

Appendix A. Test Result of AC Power Line Conducted Emission

Appendix B. Test Result of Emission Bandwidth


Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	
		Ant. 1	Ant. 1	99% Occupied Bandwidth & 26dB Bandwidth	
802.11a (20MHz)	5180	16.38	20.84	-	
	5220	16.46	20.92	-	
	5240	16.62	20.56	-	
Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	
		Ant. 1	Ant. 1	99% Occupied Bandwidth	6dB Bandwidth
802.11a (20MHz)	5745	24.34	16.28	-	0.5
	5785	23.82	15.68	-	0.5
	5825	24.62	15.72	-	0.5

Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	
		Ant. 1	Ant. 1	99% Occupied Bandwidth & 26dB Bandwidth	
802.11ac (20MHz)	5180	17.66	21.20	-	
	5220	17.66	20.88	-	
	5240	17.70	21.44	-	
Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	
		Ant. 1	Ant. 1	99% Occupied Bandwidth	6dB Bandwidth
802.11ac (20MHz)	5745	24.90	17.56	-	0.5
	5785	25.93	16.92	-	0.5
	5825	26.25	16.92	-	0.5


Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	
		Ant. 1	Ant. 1	99% Occupied Bandwidth & 26dB Bandwidth	
802.11ac (40MHz)	5190	36.04	39.20	-	
	5230	36.20	39.60	-	
Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	
		Ant. 1	Ant. 1	99% Occupied Bandwidth	6dB Bandwidth
802.11ac (40MHz)	5755	49.95	36.32	-	0.5
	5795	52.27	35.36	-	0.5

Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	
		Ant. 1	Ant. 1	99% Occupied Bandwidth & 26dB Bandwidth	
802.11ac (80MHz)	5210	75.44	79.52	-	
Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	
		Ant. 1	Ant. 1	99% Occupied Bandwidth	6dB Bandwidth
802.11ac (80MHz)	5775	88.23	75.20	-	0.5


For 99% Bandwidth:

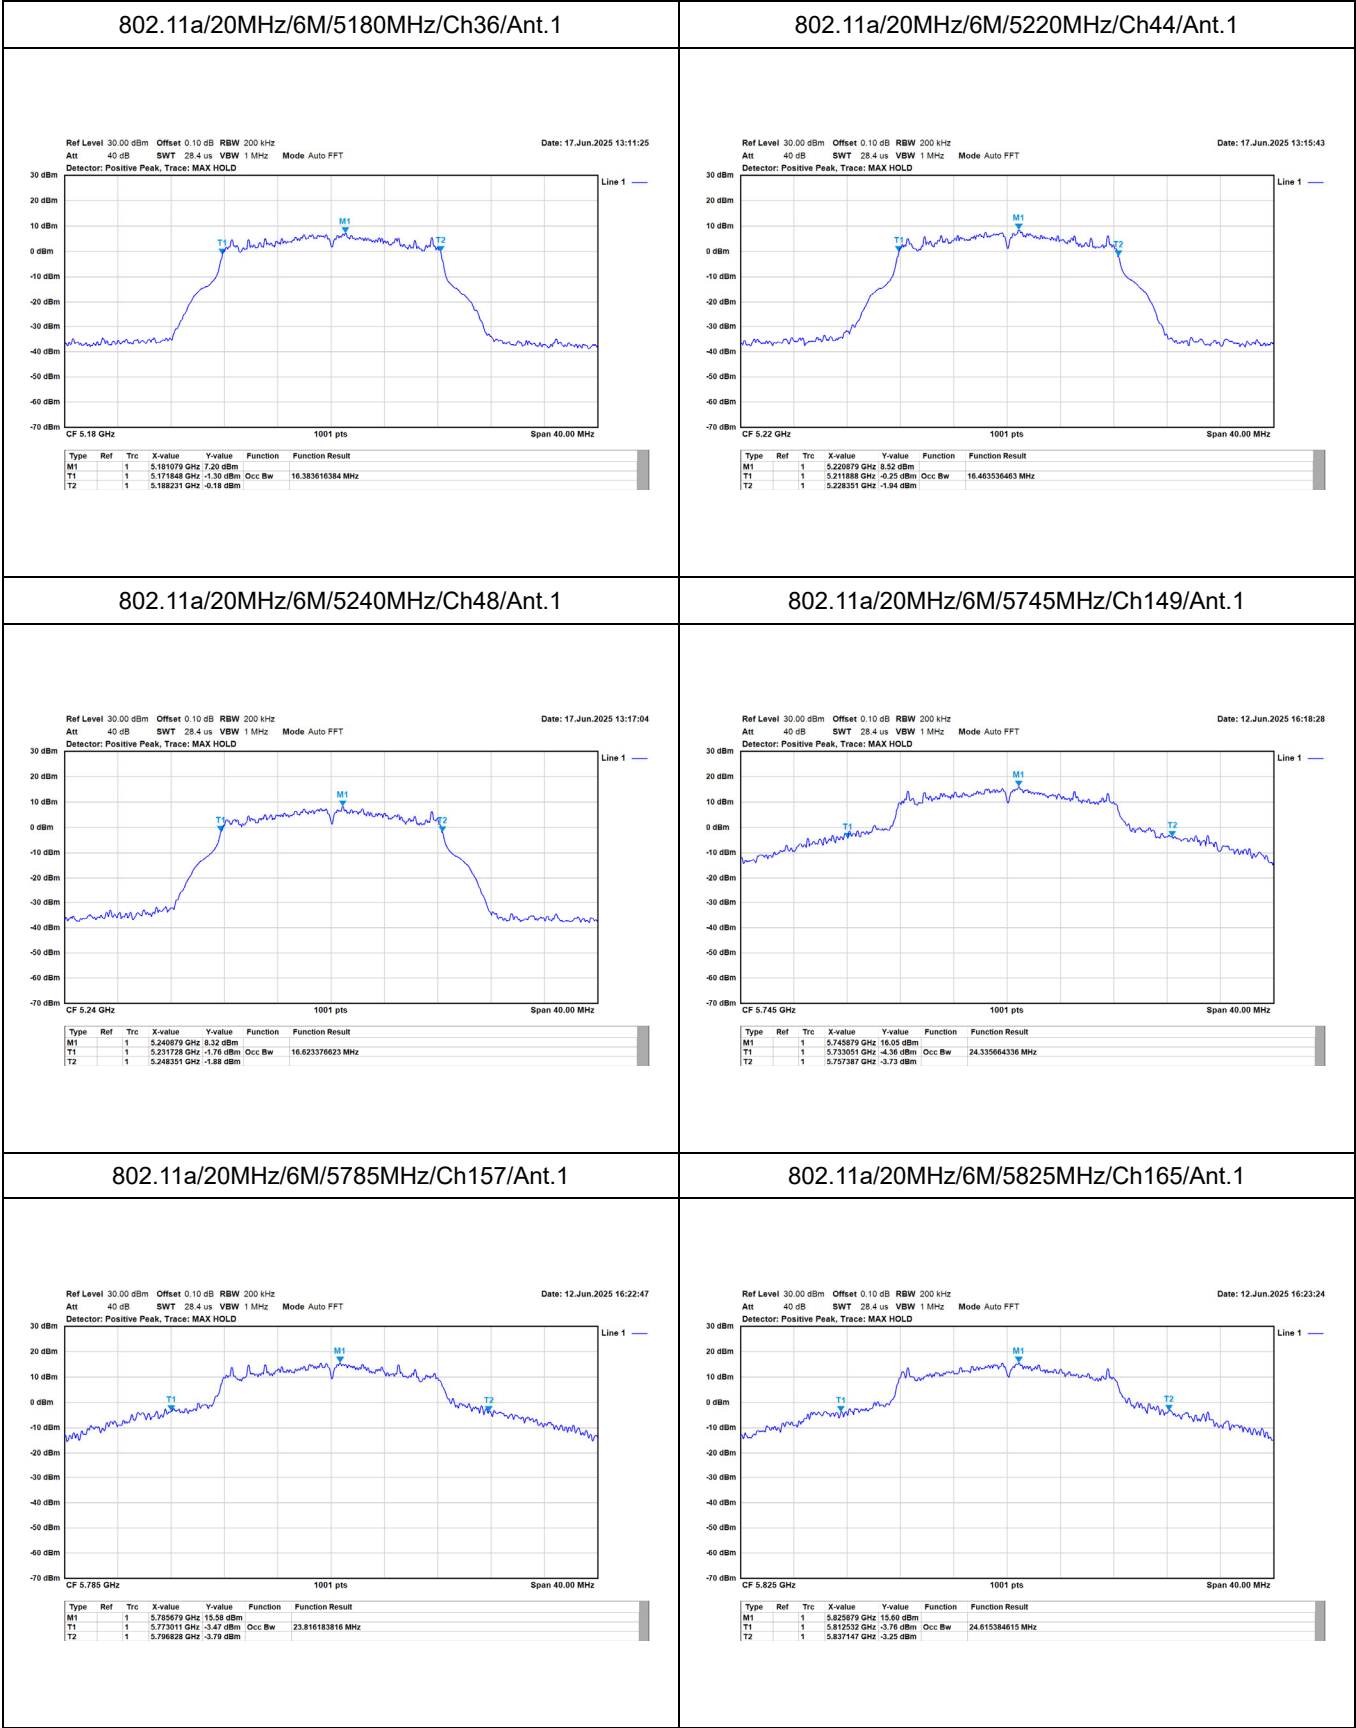


802.11ac/20MHz/MCS0/5180MHz/Ch36/Ant.1

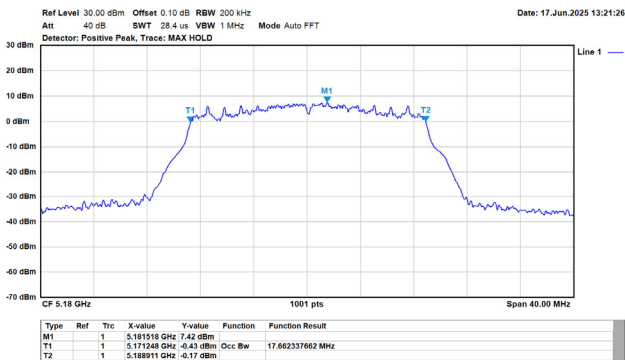


802.11ac/20MHz/MCS0/5220MHz/Ch44/Ant.1

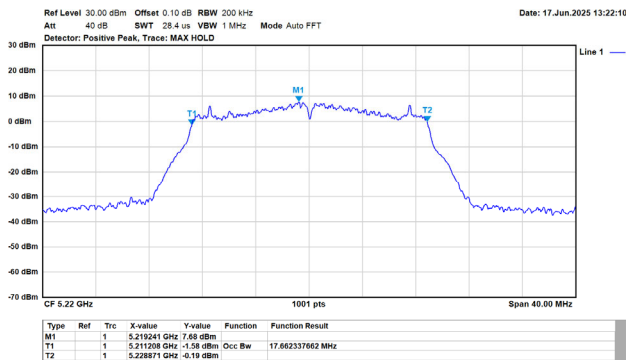


802.11ac/20MHz/MCS0/5240MHz/Ch48/Ant.1

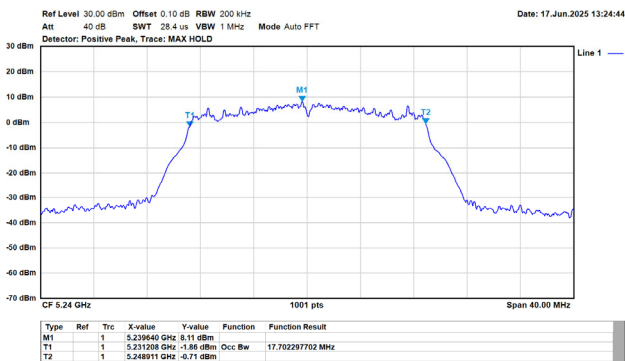


802.11ac/20MHz/MCS0/5745MHz/Ch149/Ant.1

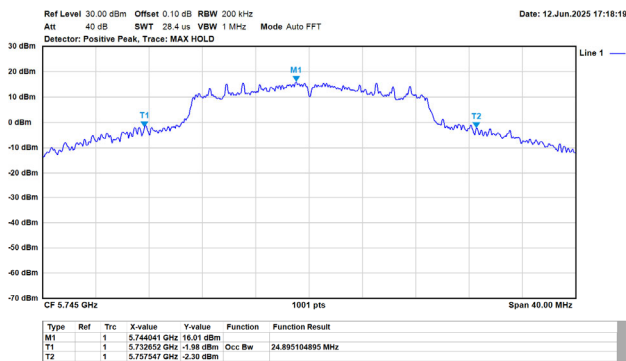


802.11ac/20MHz/MCS0/5785MHz/Ch157/Ant.1

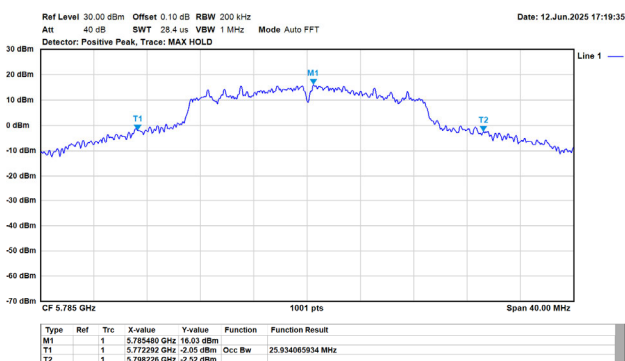


802.11ac/20MHz/MCS0/5825MHz/Ch165/Ant.1

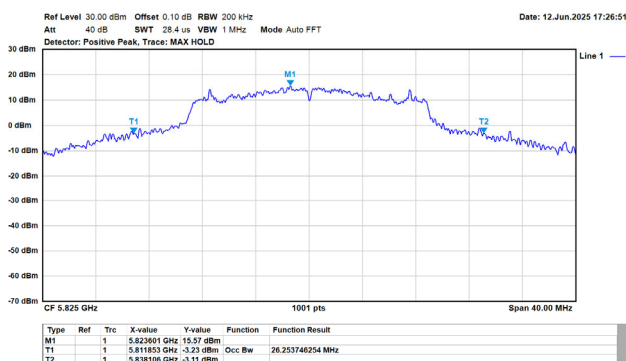


802.11ac/40MHz/MCS0/5190MHz/Ch38/Ant.1

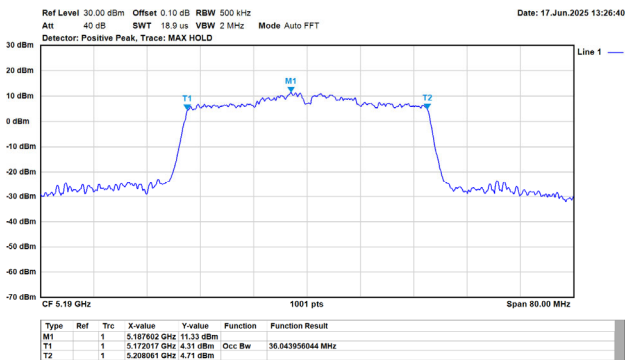


802.11ac/40MHz/MCS0/5230MHz/Ch46/Ant.1

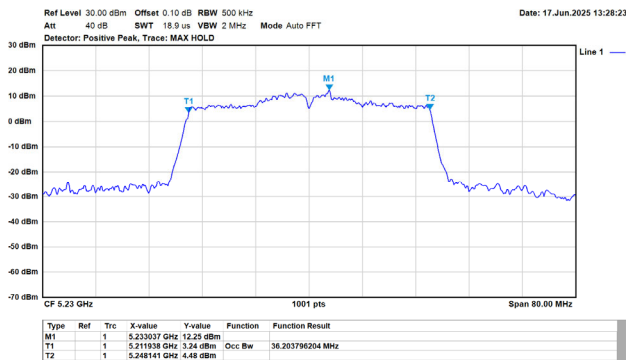


802.11ac/40MHz/MCS0/5755MHz/Ch151/Ant.1

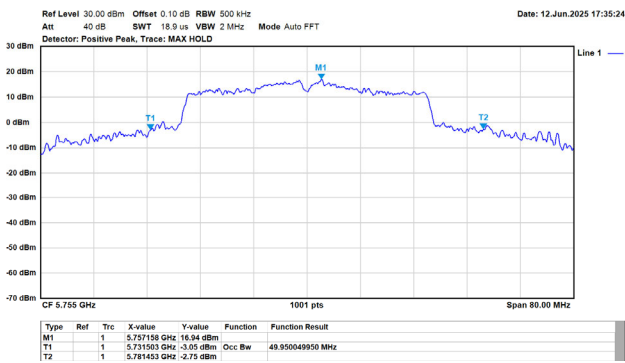


802.11ac/40MHz/MCS0/5795MHz/Ch159/Ant.1

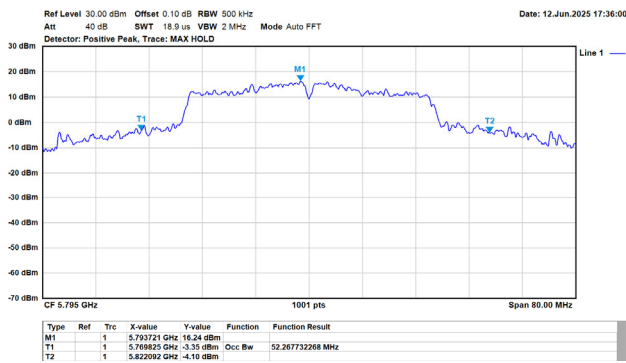


802.11ac/80MHz/MCS0/5210MHz/Ch42/Ant.1

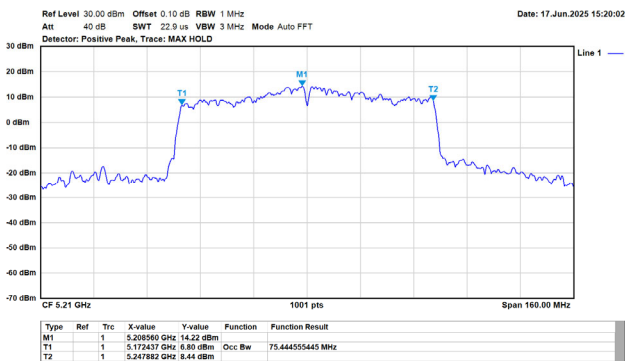


802.11ac/80MHz/MCS0/5775MHz/Ch155/Ant.1

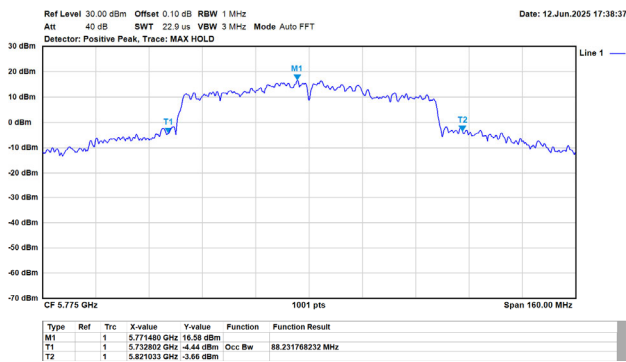


For 26dB Bandwidth:

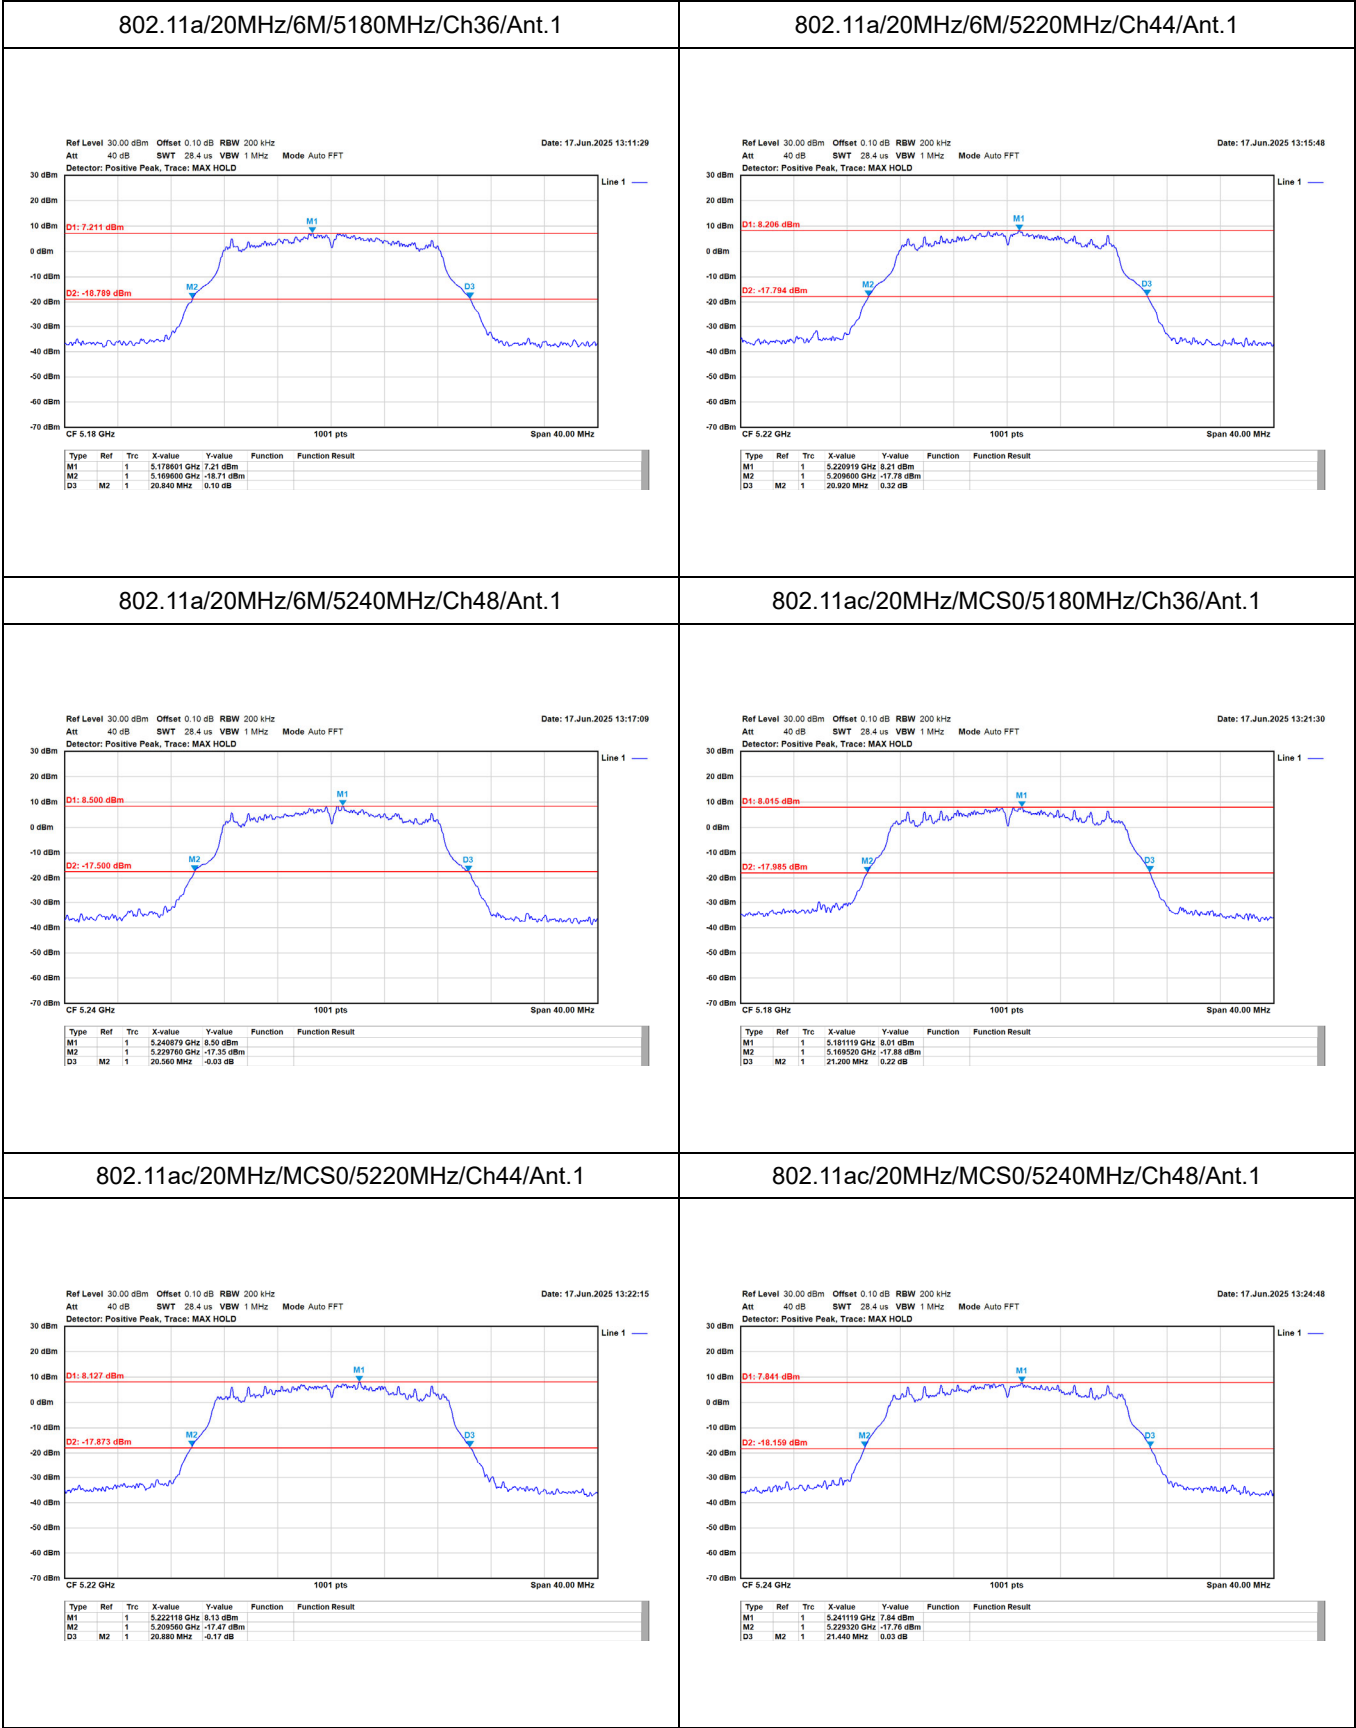


802.11ac/40MHz/MCS0/5190MHz/Ch38/Ant.1

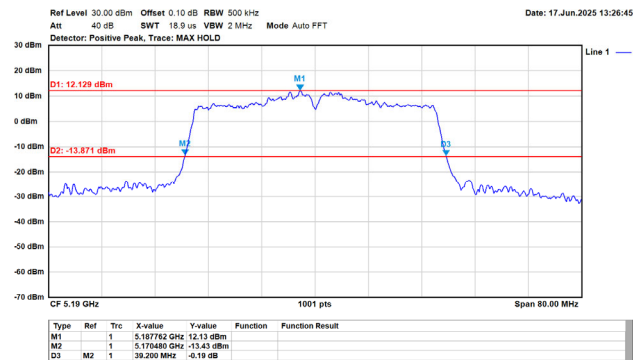


802.11ac/40MHz/MCS0/5230MHz/Ch46/Ant.1

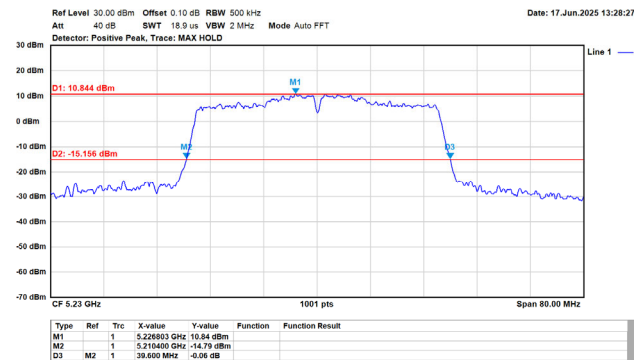


802.11ac/80MHz/MCS0/5210MHz/Ch42/Ant.1

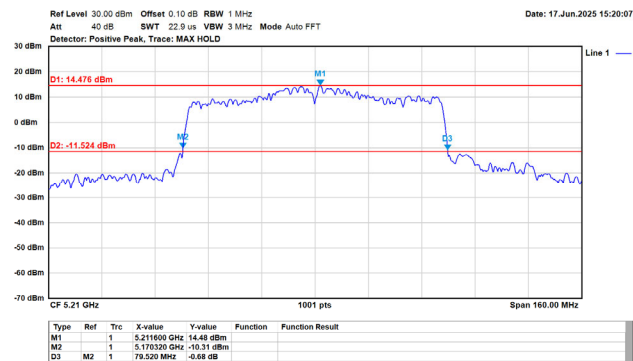


For 6dB Bandwidth:

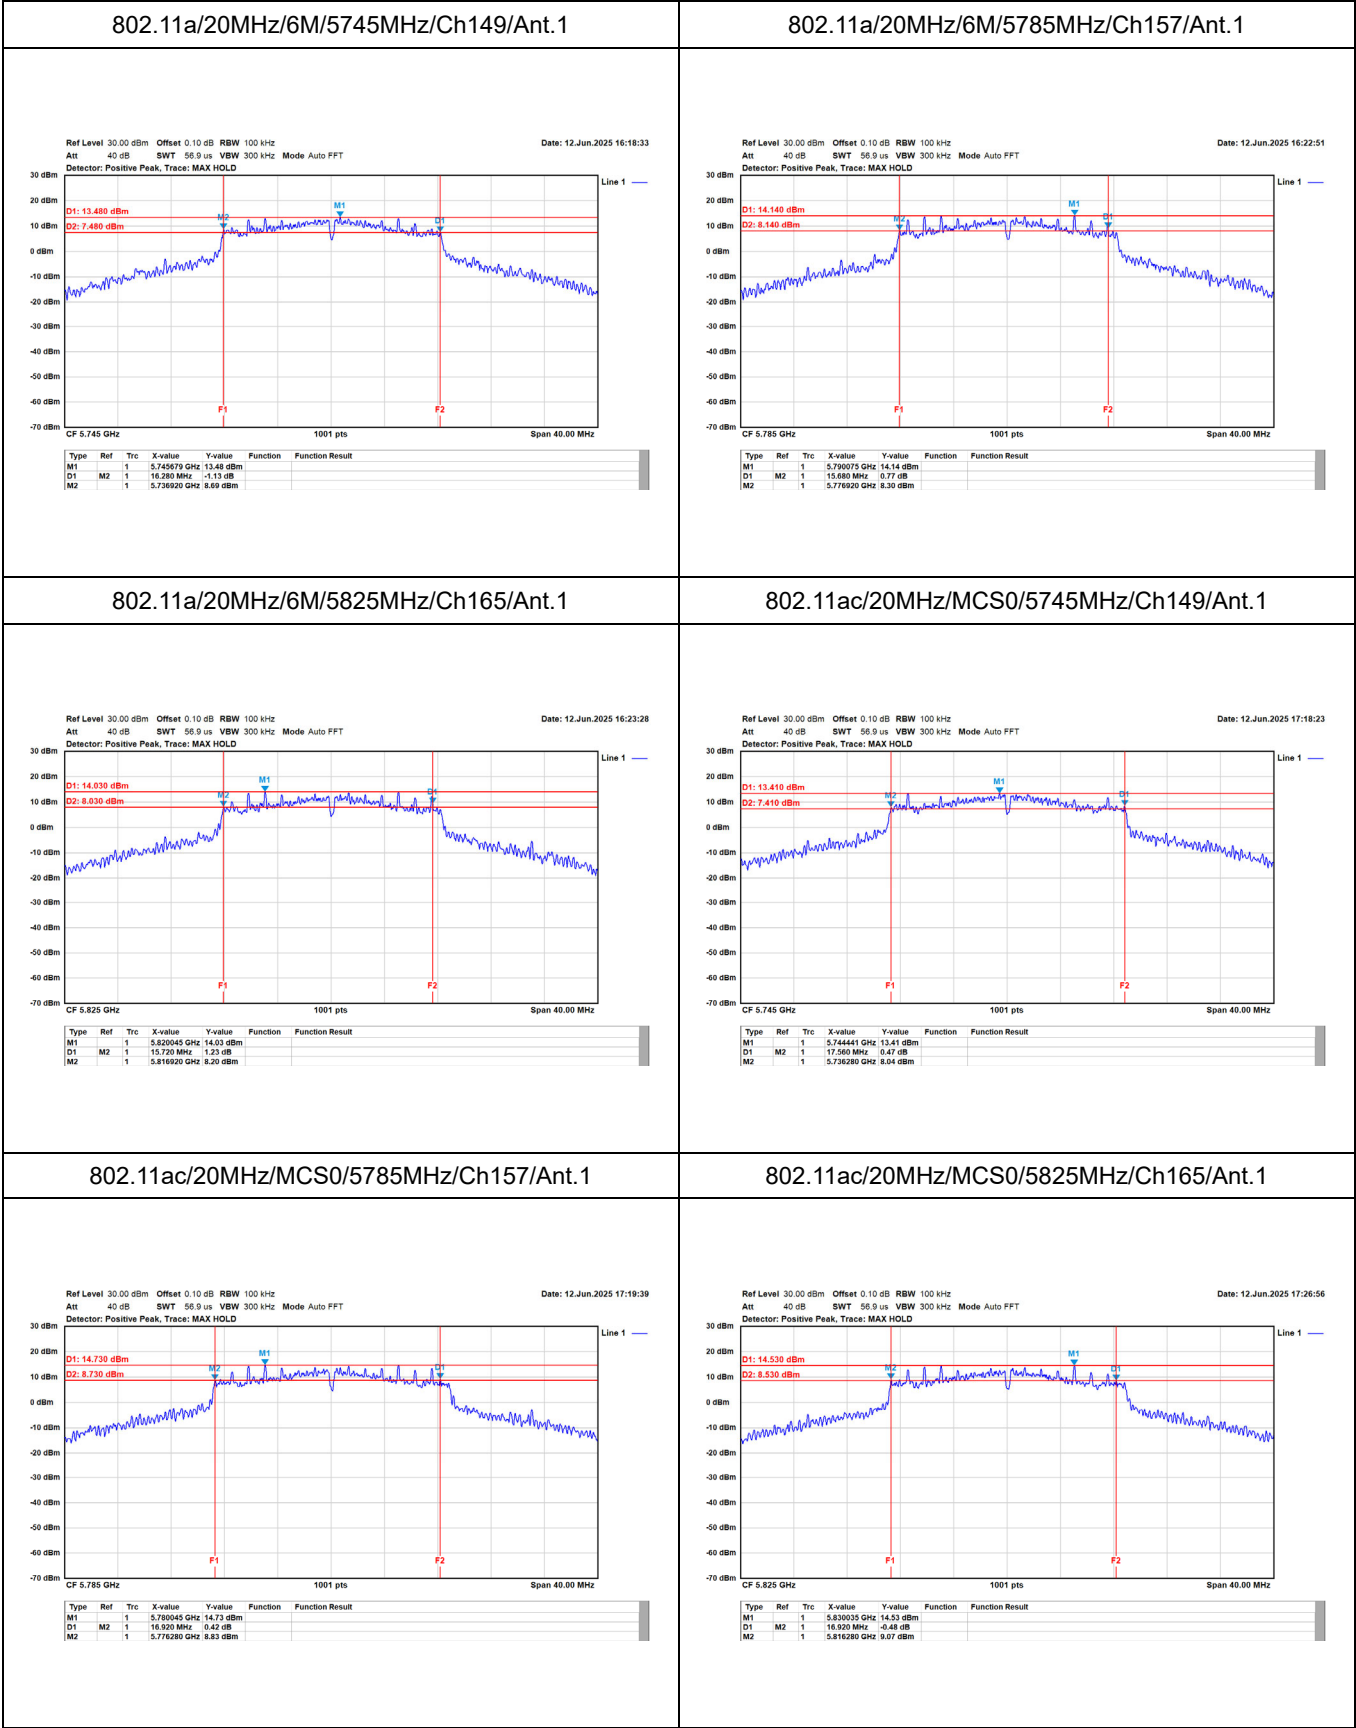


802.11ac/40MHz/MCS0/5755MHz/Ch151/Ant.1

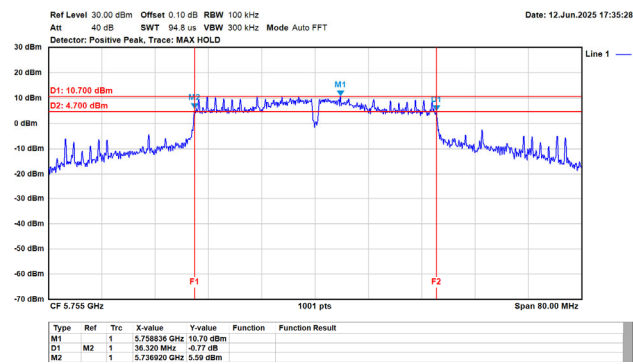

802.11ac/40MHz/MCS0/5795MHz/Ch159/Ant.1

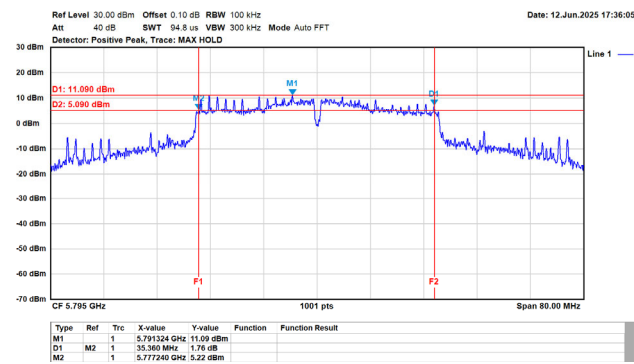

802.11ac/80MHz/MCS0/5775MHz/Ch155/Ant.1

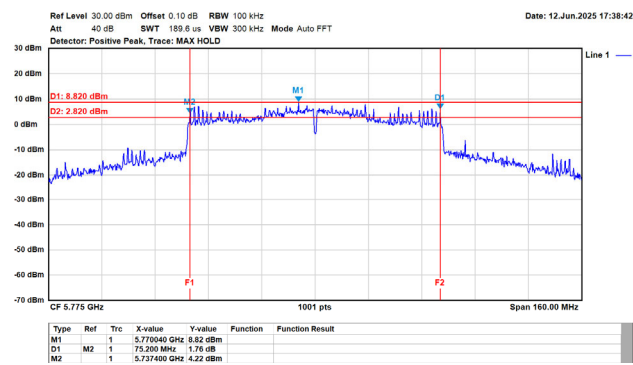


Appendix C. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
		Ant. 1		
802.11a (20MHz)	5180	9.11	24.00	Pass
	5220	9.20	24.00	Pass
	5240	9.17	24.00	Pass
	5745	13.11	30.00	Pass
	5785	13.32	30.00	Pass
	5825	12.98	30.00	Pass
802.11ac (20MHz)	5180	9.29	24.00	Pass
	5220	9.07	24.00	Pass
	5240	9.10	24.00	Pass
	5745	13.15	30.00	Pass
	5785	13.28	30.00	Pass
	5825	13.03	30.00	Pass
802.11ac (40MHz)	5190	11.79	24.00	Pass
	5230	11.94	24.00	Pass
	5755	16.03	30.00	Pass
	5795	16.11	30.00	Pass
802.11ac (80MHz)	5210	10.40	24.00	Pass
	5775	15.45	30.00	Pass


Appendix D. Test Result of Maximum Power Spectral Density

Modulation	Frequency (MHz)	Power Spectral Density dBm/MHz	Limit dBm/MHz	Result
		Ant. 1		
802.11a (20MHz)	5180	7.51	11.00	Pass
	5220	7.68	11.00	Pass
	5240	7.42	11.00	Pass
802.11ac (20MHz)	5180	7.53	11.00	Pass
	5220	7.62	11.00	Pass
	5240	7.48	11.00	Pass
802.11ac (40MHz)	5190	7.55	11.00	Pass
	5230	7.68	11.00	Pass
802.11ac (80MHz)	5210	7.55	11.00	Pass


Modulation	Frequency (MHz)	Power Spectral Density dBm/500kHz	Limit dBm/500kHz	Result
		Ant. 1		
802.11a (20MHz)	5745	12.16	30.00	Pass
	5785	12.77	30.00	Pass
	5825	12.21	30.00	Pass
802.11ac (20MHz)	5745	12.31	30.00	Pass
	5785	13.03	30.00	Pass
	5825	12.63	30.00	Pass
802.11ac (40MHz)	5755	9.52	30.00	Pass
	5795	9.88	30.00	Pass
802.11ac (80MHz)	5775	6.92	30.00	Pass

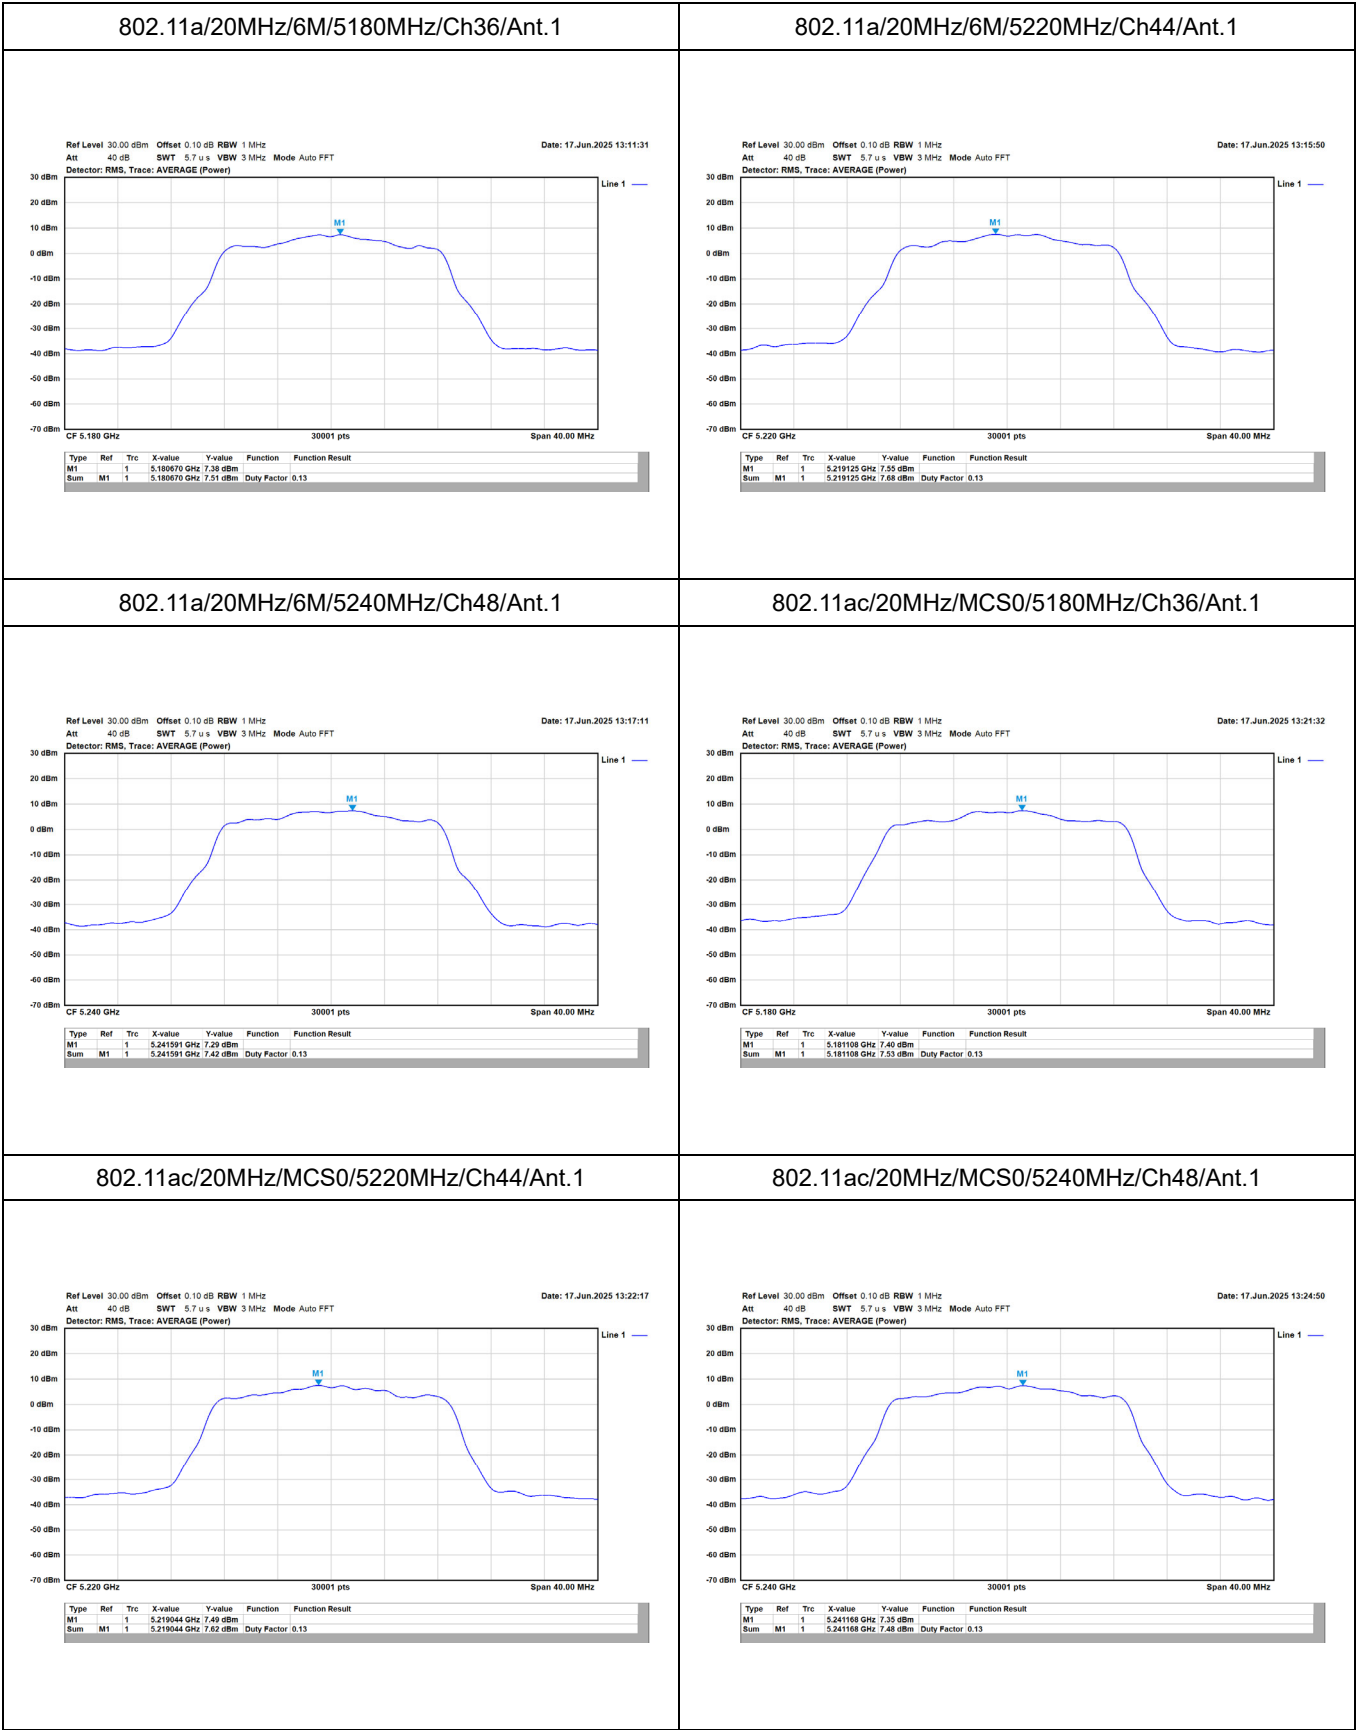


802.11ac/40MHz/MCS0/5190MHz/Ch38/Ant.1

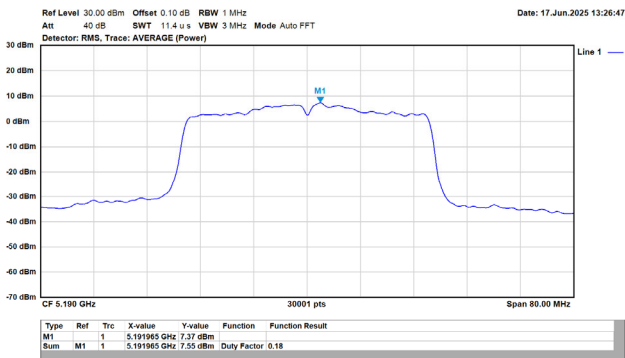


802.11ac/40MHz/MCS0/5230MHz/Ch46/Ant.1

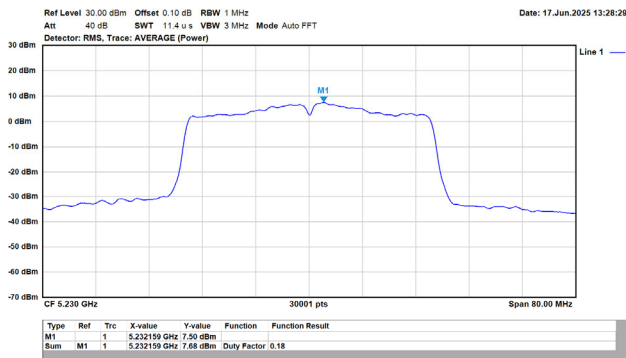


802.11ac/80MHz/MCS0/5210MHz/Ch42/Ant.1

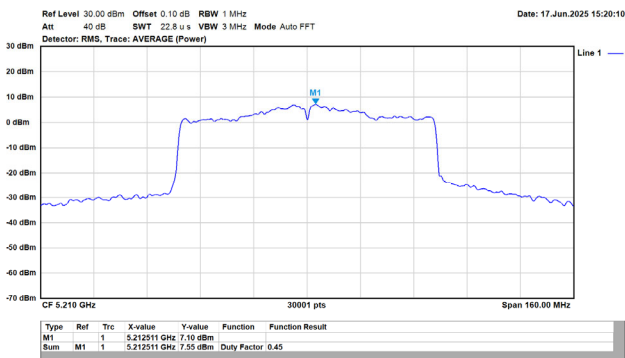


802.11a/20MHz/6M/5745MHz/Ch149/Ant.1

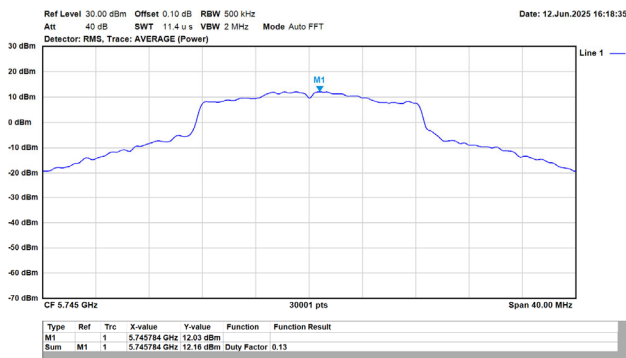


802.11a/20MHz/6M/5785MHz/Ch157/Ant.1

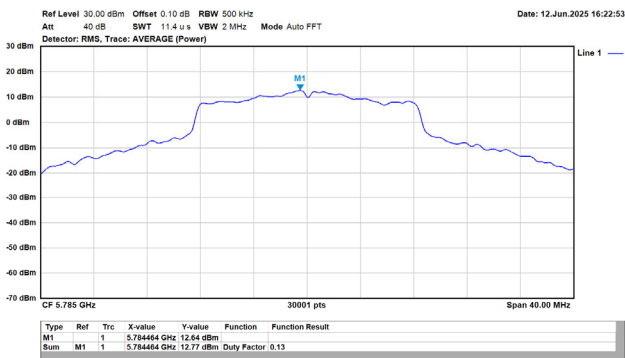


802.11a/20MHz/6M/5825MHz/Ch165/Ant.1

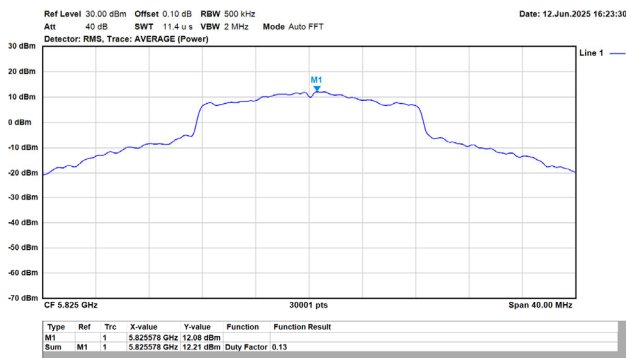


802.11ac/20MHz/MCS0/5745MHz/Ch149/Ant.1

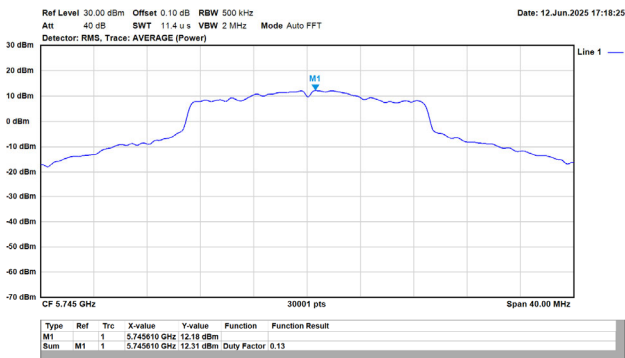


802.11ac/20MHz/MCS0/5785MHz/Ch157/Ant.1

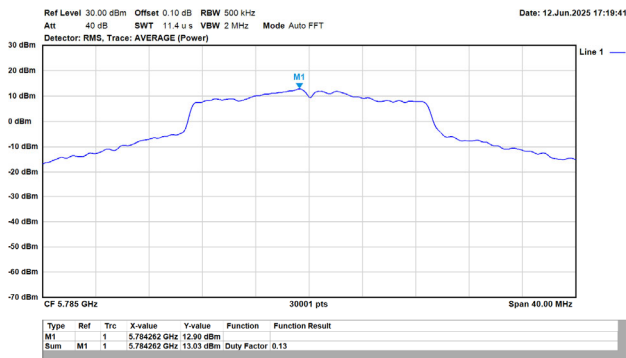


802.11ac/20MHz/MCS0/5825MHz/Ch165/Ant.1

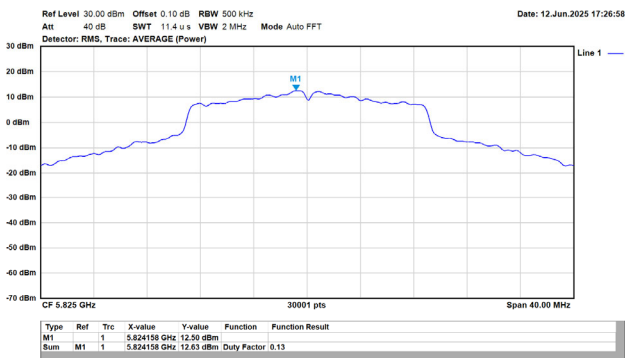


802.11ac/40MHz/MCS0/5755MHz/Ch151/Ant.1

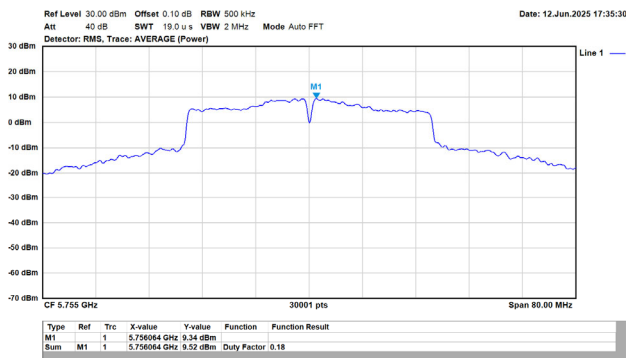





802.11ac/40MHz/MCS0/5795MHz/Ch159/Ant.1

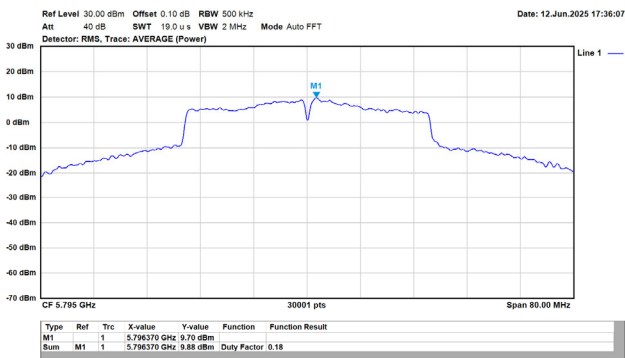

802.11ac/80MHz/MCS0/5775MHz/Ch155/Ant.1

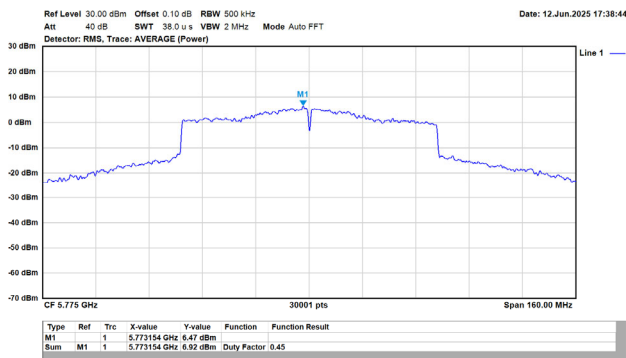


Appendix E. Test Result of Transmitter Radiated Spurious Emission

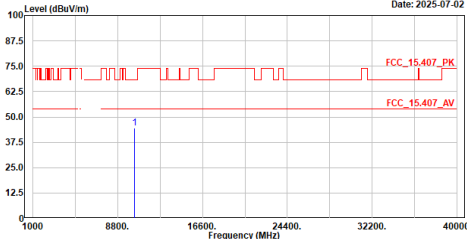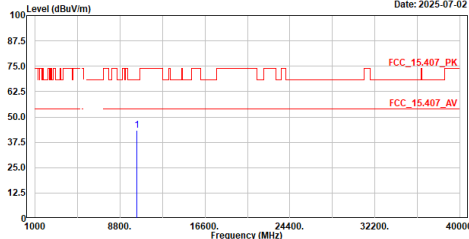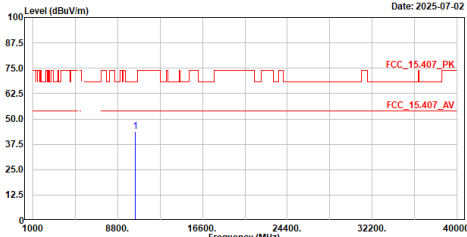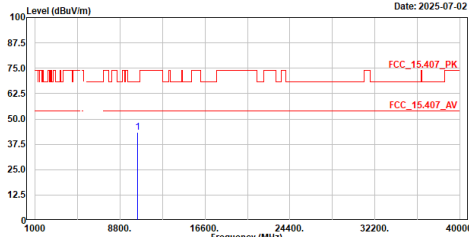TX_a_5180MHz_H	TX_a_5180MHz_V																																																
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_a_5180MHz Test BY :Ashton Date: 2025-07-02 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>10360.000</td><td>44.62</td><td>68.22</td><td>-23.60</td><td>49.38</td><td>-4.76</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10360.000	44.62	68.22	-23.60	49.38	-4.76	Peak	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_a_5180MHz Test BY :Ashton Date: 2025-07-02 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>10360.000</td><td>43.55</td><td>68.22</td><td>-24.67</td><td>48.31</td><td>-4.76</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10360.000	43.55	68.22	-24.67	48.31	-4.76	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	10360.000	44.62	68.22	-23.60	49.38	-4.76	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	10360.000	43.55	68.22	-24.67	48.31	-4.76	Peak																																										
TX_a_5220MHz_H	TX_a_5220MHz_V																																																
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_a_5220MHz Test BY :Ashton Date: 2025-07-02 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>10440.000</td><td>43.59</td><td>68.22</td><td>-24.63</td><td>48.49</td><td>-4.90</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10440.000	43.59	68.22	-24.63	48.49	-4.90	Peak	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_a_5220MHz Test BY :Ashton Date: 2025-07-02 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>10440.000</td><td>43.40</td><td>68.22</td><td>-24.82</td><td>48.30</td><td>-4.90</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10440.000	43.40	68.22	-24.82	48.30	-4.90	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	10440.000	43.59	68.22	-24.63	48.49	-4.90	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	10440.000	43.40	68.22	-24.82	48.30	-4.90	Peak																																										

TX_a_5240MHz_H Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_a_5240MHz Test BY :Ashton Level (dBuV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 1000 8000 16000 24000 32000 40000 Frequency (MHz) 1 10480.000 43.65 68.22 -24.57 48.56 -4.91 Peak 1 10480.000 43.65 68.22 -24.57 48.56 -4.91 Peak 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	TX_a_5240MHz_V Site :HY-CB03 Condition :3m ,Vertical Mode :TX_a_5240MHz Test BY :Ashton Level (dBuV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 1000 8000 16000 24000 32000 40000 Frequency (MHz) 1 10480.000 42.81 68.22 -25.41 47.72 -4.91 Peak 1 10480.000 42.81 68.22 -25.41 47.72 -4.91 Peak 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.
TX_a_5745MHz_H Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_a_5745MHz Test BY :Bob Level (dBuV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 1000 8000 16000 24000 32000 40000 Frequency (MHz) 1 11490.000 45.83 74.00 -28.17 47.82 -1.99 Peak 1 11490.000 45.83 74.00 -28.17 47.82 -1.99 Peak 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	TX_a_5745MHz_V Site :HY-CB03 Condition :3m ,Vertical Mode :TX_a_5745MHz Test BY :Bob Level (dBuV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 1000 8000 16000 24000 32000 40000 Frequency (MHz) 1 11490.000 48.86 74.00 -25.14 50.85 -1.99 Peak 1 11490.000 48.86 74.00 -25.14 50.85 -1.99 Peak 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5785MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5785MHz
Test BY :Bob

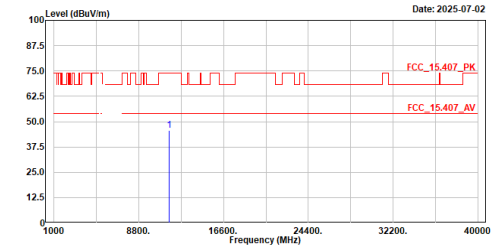


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11570.000	45.67	74.00	-28.33	47.50	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5785MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5785MHz
Test BY :Bob

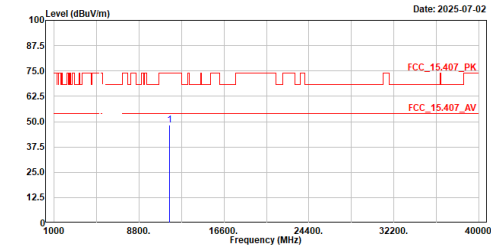


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11570.000	48.38	74.00	-25.62	50.21	-1.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5825MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5825MHz
Test BY :Bob

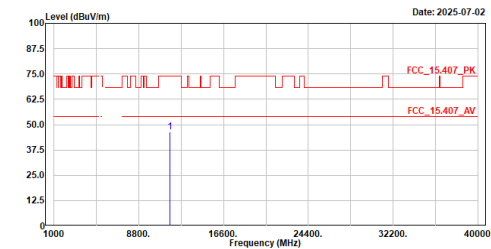


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11650.000	46.46	74.00	-27.54	48.34	-1.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5825MHz_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5825MHz
Test BY :Bob

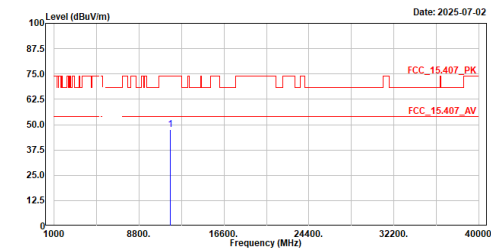

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11650.000	47.57	74.00	-26.43	49.45	-1.88	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_H

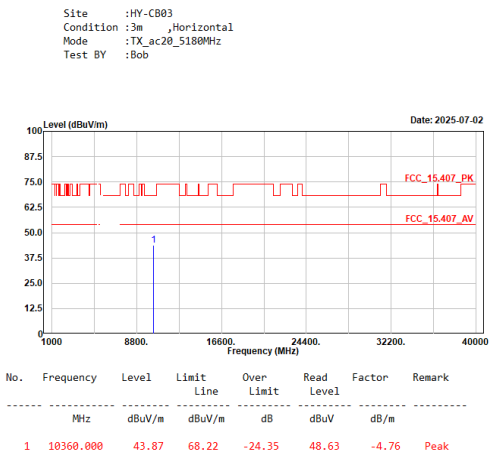


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_V

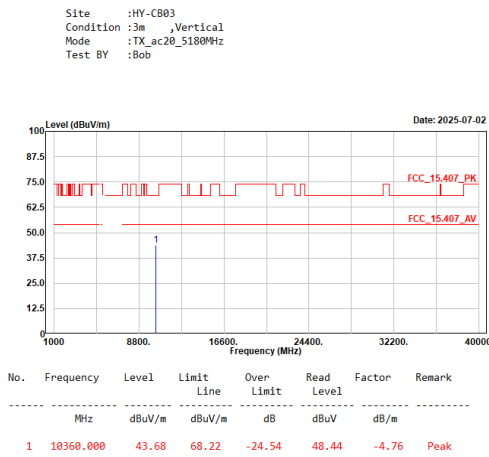


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5220MHz_H

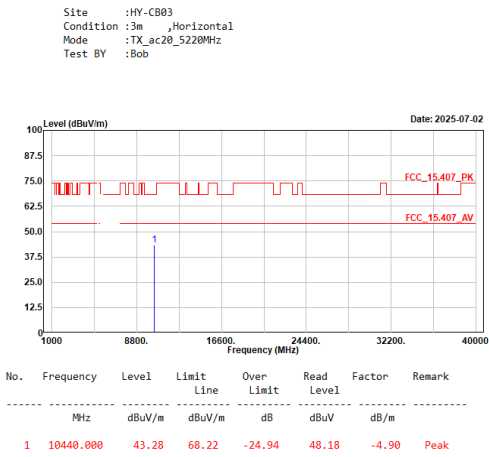

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_ac20_5220MHz_V

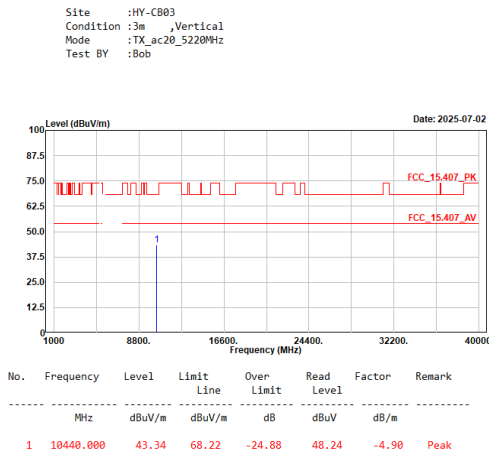

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5240MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5240MHz
Test BY :Bob

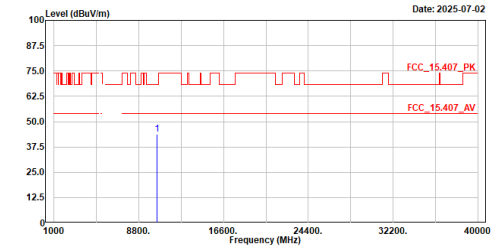


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	10480.000	43.82	62.22	-24.40	48.73	-4.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5240MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5240MHz
Test BY :Bob

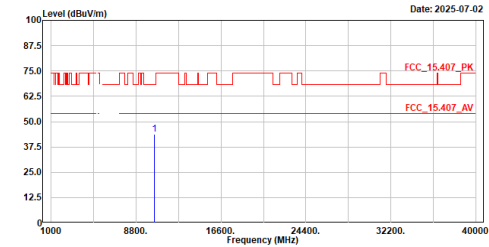


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	10480.000	43.62	62.22	-24.60	48.53	-4.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5745MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5745MHz
Test BY :Bob

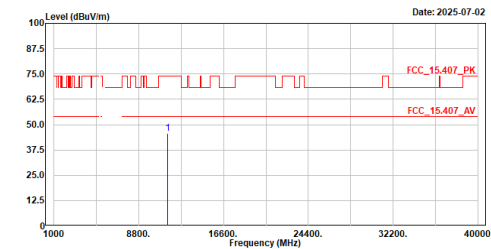


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	11490.000	45.51	74.00	-28.49	47.50	-1.99	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5745MHz_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5745MHz
Test BY :Bob

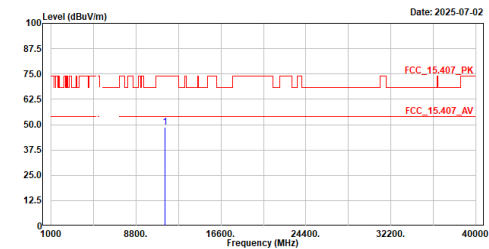


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	11490.000	48.75	74.00	-25.25	50.74	-1.99	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_ac20_5785MHz_H

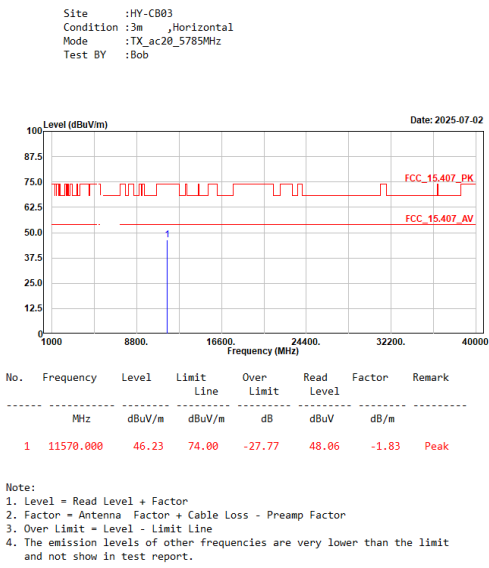


TX_ac20_5785MHz_V

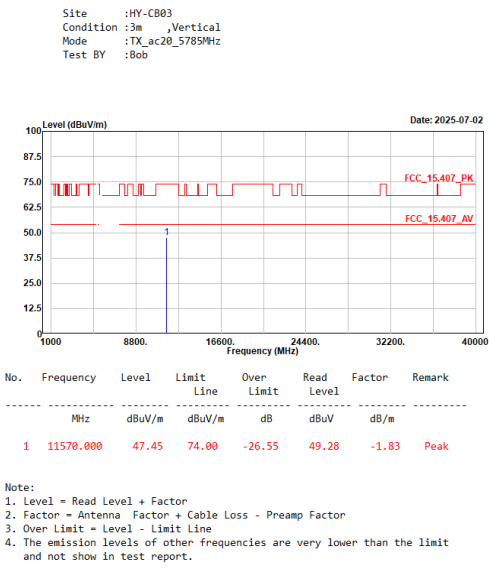


TX_ac20_5825MHz_H

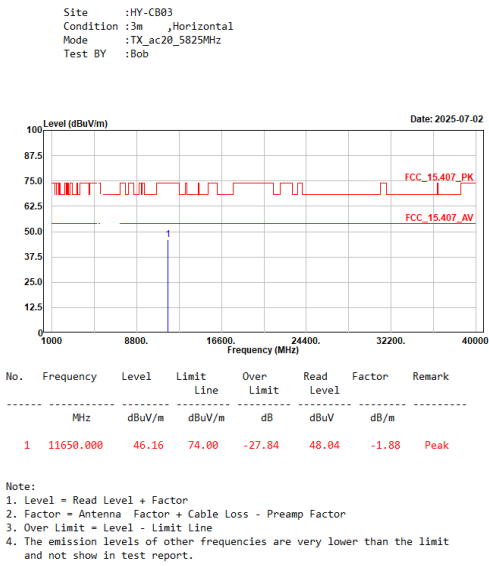


TX_ac20_5825MHz_V

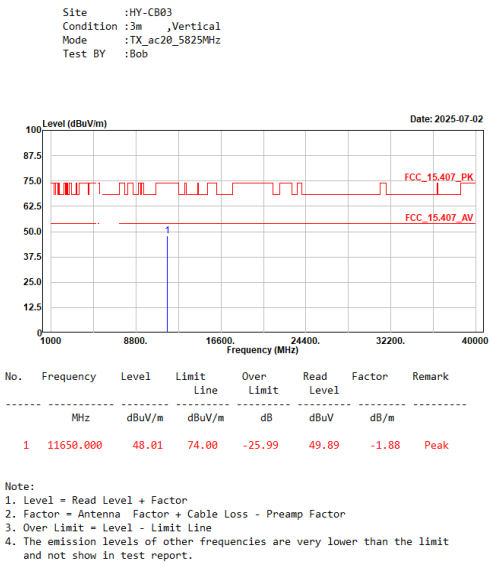


TX_ac40_5190MHz_H

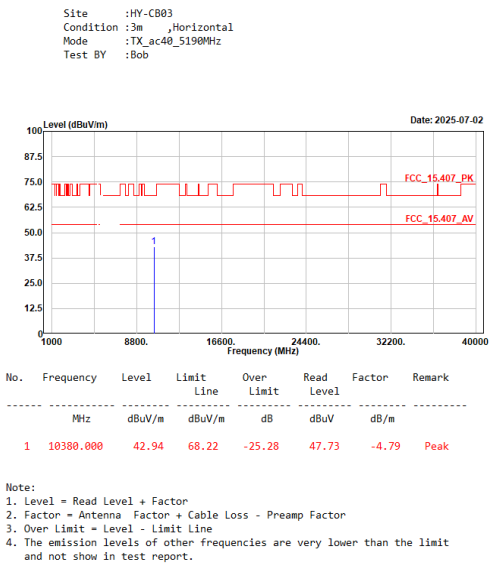


TX_ac40_5190MHz_V

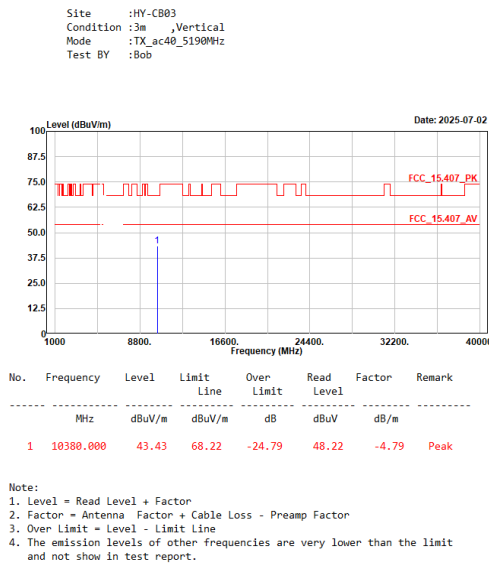


TX_ac40_5230MHz_H

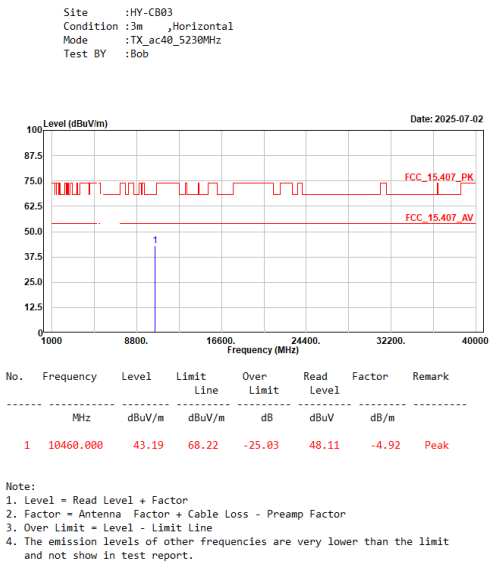

TX_ac40_5230MHz_V

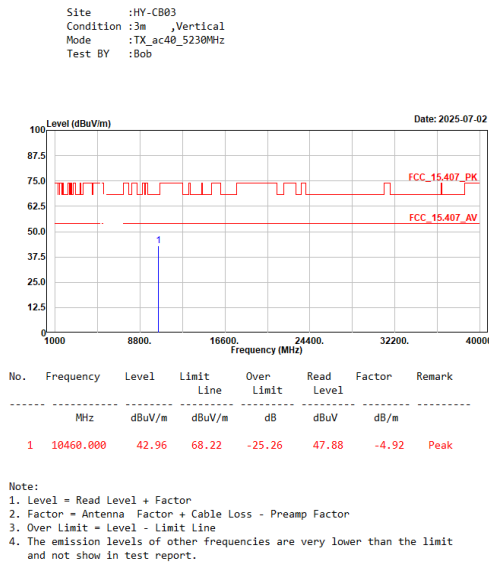


TX_ac40_5755MHz_H

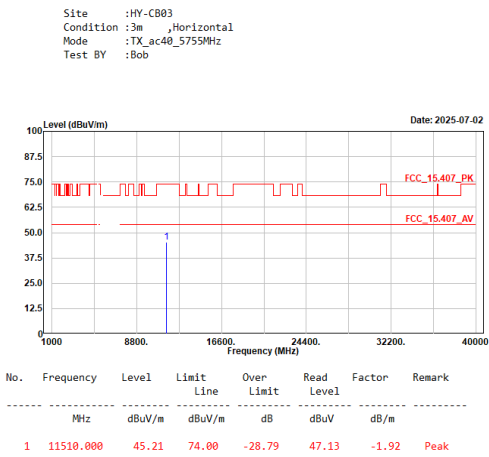


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5755MHz_V

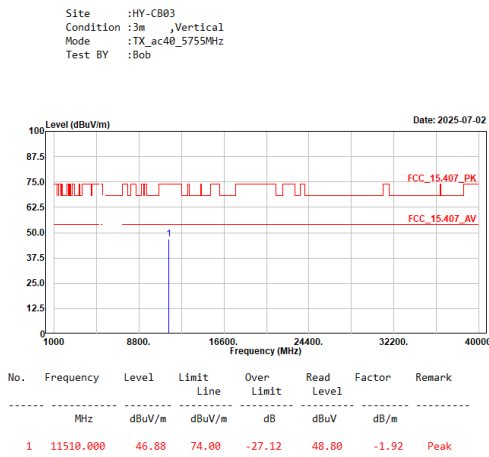


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5795MHz_H

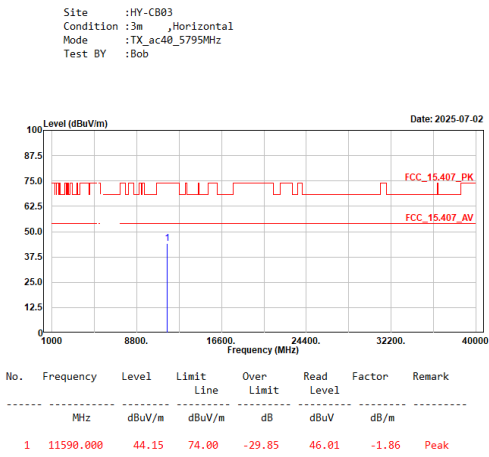

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5795MHz_V

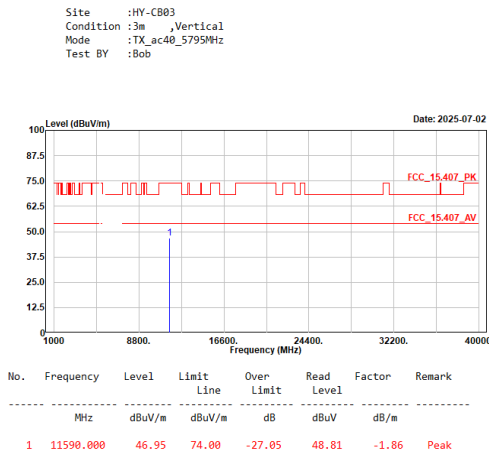


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_H				TX_ac80_5210MHz_V																																																			
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_ac80_5210MHz Test BY :Bob Level (dBuV/m) Date: 2025-07-02 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>10420.000</td><td>42.86</td><td>68.22</td><td>-25.36</td><td>47.72</td><td>-4.86</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.				No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10420.000	42.86	68.22	-25.36	47.72	-4.86	Peak	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ac80_5210MHz Test BY :Bob Level (dBuV/m) Date: 2025-07-02 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>10420.000</td><td>42.72</td><td>68.22</td><td>-25.50</td><td>47.58</td><td>-4.86</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.				No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10420.000	42.72	68.22	-25.50	47.58	-4.86	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																	
1	10420.000	42.86	68.22	-25.36	47.72	-4.86	Peak																																																
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																	
1	10420.000	42.72	68.22	-25.50	47.58	-4.86	Peak																																																
TX_ac80_5775MHz_H				TX_ac80_5775MHz_V																																																			
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_ac80_5775MHz Test BY :Bob Level (dBuV/m) Date: 2025-07-02 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>11550.000</td><td>44.26</td><td>74.00</td><td>-29.74</td><td>46.06</td><td>-1.80</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.				No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	11550.000	44.26	74.00	-29.74	46.06	-1.80	Peak	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ac80_5775MHz Test BY :Bob Level (dBuV/m) Date: 2025-07-02 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>11550.000</td><td>44.55</td><td>74.00</td><td>-29.45</td><td>46.35</td><td>-1.80</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.				No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	11550.000	44.55	74.00	-29.45	46.35	-1.80	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																	
1	11550.000	44.26	74.00	-29.74	46.06	-1.80	Peak																																																
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																	
1	11550.000	44.55	74.00	-29.45	46.35	-1.80	Peak																																																

TX_ac80_5775MHz_H_QP Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_ac80_5775MHz Test BY :Bob Level (dBuV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 30 224. 418. 612. 806. 1000 Frequency (MHz) 2025-07-17 FCC 30M.1G 1 2 3 4 5 6 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>77.530</td><td>27.08</td><td>40.00</td><td>-12.92</td><td>55.52</td><td>-28.44</td><td>QP</td></tr><tr><td>2</td><td>210.420</td><td>32.02</td><td>43.50</td><td>-11.48</td><td>58.57</td><td>-26.55</td><td>QP</td></tr><tr><td>3</td><td>335.550</td><td>38.46</td><td>46.00</td><td>-7.54</td><td>60.43</td><td>-21.97</td><td>QP</td></tr><tr><td>4</td><td>419.940</td><td>42.14</td><td>46.00</td><td>-3.86</td><td>62.09</td><td>-19.95</td><td>QP</td></tr><tr><td>5</td><td>631.400</td><td>36.18</td><td>46.00</td><td>-9.82</td><td>51.28</td><td>-15.10</td><td>QP</td></tr><tr><td>6</td><td>812.790</td><td>33.56</td><td>46.00</td><td>-12.44</td><td>46.04</td><td>-12.48</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	77.530	27.08	40.00	-12.92	55.52	-28.44	QP	2	210.420	32.02	43.50	-11.48	58.57	-26.55	QP	3	335.550	38.46	46.00	-7.54	60.43	-21.97	QP	4	419.940	42.14	46.00	-3.86	62.09	-19.95	QP	5	631.400	36.18	46.00	-9.82	51.28	-15.10	QP	6	812.790	33.56	46.00	-12.44	46.04	-12.48	QP	TX_ac80_5775MHz_V_QP Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ac80_5775MHz Test BY :Bob Level (dBuV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 30 224. 418. 612. 806. 1000 Frequency (MHz) 2025-07-17 FCC 30M.1G 1 2 3 4 5 6 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>42.610</td><td>31.14</td><td>40.00</td><td>-8.86</td><td>54.87</td><td>-23.73</td><td>QP</td></tr><tr><td>2</td><td>179.380</td><td>24.77</td><td>43.50</td><td>-18.73</td><td>50.16</td><td>-25.39</td><td>QP</td></tr><tr><td>3</td><td>419.940</td><td>34.36</td><td>46.00</td><td>-11.64</td><td>54.31</td><td>-19.95</td><td>QP</td></tr><tr><td>4</td><td>587.750</td><td>37.13</td><td>46.00</td><td>-8.87</td><td>52.98</td><td>-15.85</td><td>QP</td></tr><tr><td>5</td><td>812.790</td><td>33.19</td><td>46.00</td><td>-12.81</td><td>45.67</td><td>-12.48</td><td>QP</td></tr><tr><td>6</td><td>950.530</td><td>36.73</td><td>46.00</td><td>-9.27</td><td>47.35</td><td>-10.62</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	42.610	31.14	40.00	-8.86	54.87	-23.73	QP	2	179.380	24.77	43.50	-18.73	50.16	-25.39	QP	3	419.940	34.36	46.00	-11.64	54.31	-19.95	QP	4	587.750	37.13	46.00	-8.87	52.98	-15.85	QP	5	812.790	33.19	46.00	-12.81	45.67	-12.48	QP	6	950.530	36.73	46.00	-9.27	47.35	-10.62	QP
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	77.530	27.08	40.00	-12.92	55.52	-28.44	QP																																																																																																																										
2	210.420	32.02	43.50	-11.48	58.57	-26.55	QP																																																																																																																										
3	335.550	38.46	46.00	-7.54	60.43	-21.97	QP																																																																																																																										
4	419.940	42.14	46.00	-3.86	62.09	-19.95	QP																																																																																																																										
5	631.400	36.18	46.00	-9.82	51.28	-15.10	QP																																																																																																																										
6	812.790	33.56	46.00	-12.44	46.04	-12.48	QP																																																																																																																										
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	42.610	31.14	40.00	-8.86	54.87	-23.73	QP																																																																																																																										
2	179.380	24.77	43.50	-18.73	50.16	-25.39	QP																																																																																																																										
3	419.940	34.36	46.00	-11.64	54.31	-19.95	QP																																																																																																																										
4	587.750	37.13	46.00	-8.87	52.98	-15.85	QP																																																																																																																										
5	812.790	33.19	46.00	-12.81	45.67	-12.48	QP																																																																																																																										
6	950.530	36.73	46.00	-9.27	47.35	-10.62	QP																																																																																																																										
TX_a_5180MHz_H_Average Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_a_5180MHz Test BY :Ashton Level (dBuV/m) 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 5000 5060. 5120. 5180. 5240. 5300 Frequency (MHz) 2025-07-02 FCC_15.407_AV 1 2 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>5147.300</td><td>42.65</td><td>54.00</td><td>-11.35</td><td>27.13</td><td>15.52</td><td>Average</td></tr><tr><td>2</td><td>5180.900</td><td>96.04</td><td>-----</td><td>-----</td><td>80.42</td><td>15.62</td><td>Average</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	5147.300	42.65	54.00	-11.35	27.13	15.52	Average	2	5180.900	96.04	-----	-----	80.42	15.62	Average	TX_a_5180MHz_H_Peak Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_a_5180MHz Test BY :Ashton Level (dBuV/m) 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 5000 5060. 5120. 5180. 5240. 5300 Frequency (MHz) 2025-07-02 FCC_15.407_PK 1 2 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>5143.100</td><td>54.96</td><td>74.00</td><td>-19.04</td><td>16.93</td><td>38.03</td><td>Peak</td></tr><tr><td>2</td><td>5181.200</td><td>105.69</td><td>-----</td><td>-----</td><td>67.61</td><td>38.08</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	5143.100	54.96	74.00	-19.04	16.93	38.03	Peak	2	5181.200	105.69	-----	-----	67.61	38.08	Peak																																																																
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	5147.300	42.65	54.00	-11.35	27.13	15.52	Average																																																																																																																										
2	5180.900	96.04	-----	-----	80.42	15.62	Average																																																																																																																										
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	5143.100	54.96	74.00	-19.04	16.93	38.03	Peak																																																																																																																										
2	5181.200	105.69	-----	-----	67.61	38.08	Peak																																																																																																																										

TX a 5180MHz V Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5180MHz
Test BY :Ashton

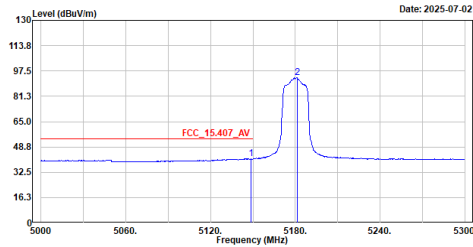


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5148.500	41.19	54.00	-12.81	25.68	15.51	Average
2	5181.200	93.05	-----	-----	77.43	15.62	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5180MHz V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5180MHz
Test BY :Ashton

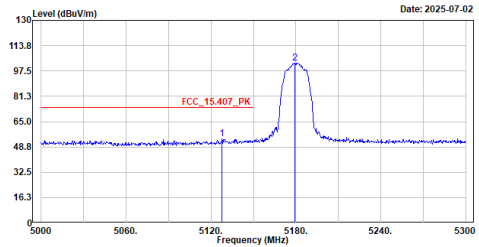


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5127.800	54.08	74.00	-19.92	16.02	38.06	Peak
2	5179.100	102.68	-----	-----	64.61	38.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5745MHz H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5745MHz
Test BY :Ashton

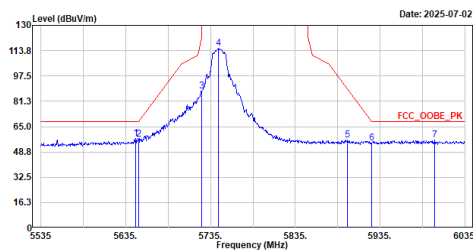


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5647.000	57.44	68.20	-10.76	40.16	17.28	Peak
2	5650.000	56.85	68.21	-11.36	39.55	17.30	Peak
3	5725.000	87.77	122.20	-34.43	70.02	17.75	Peak
4	5744.000	115.50	-----	-----	97.63	17.87	Peak
5	5896.500	56.65	89.29	-32.64	38.53	18.12	Peak
6	5925.000	54.34	68.21	-13.87	36.17	18.17	Peak
7	5999.000	56.63	68.20	-11.57	38.32	18.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5745MHz V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5745MHz
Test BY :Ashton

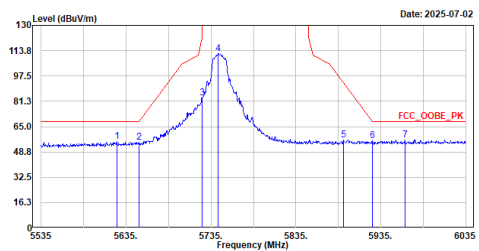


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5624.000	55.67	68.20	-12.53	38.46	17.21	Peak
2	5650.000	55.03	68.21	-13.18	37.73	17.30	Peak
3	5725.000	83.31	122.20	-38.89	65.56	17.75	Peak
4	5743.500	111.86	-----	-----	93.99	17.87	Peak
5	5891.000	56.47	93.36	-36.89	38.35	18.12	Peak
6	5925.000	55.81	68.21	-12.40	37.64	18.17	Peak
7	5963.500	56.53	68.20	-11.67	38.29	18.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5825MHz H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5825MHz
Test BY :Ashton

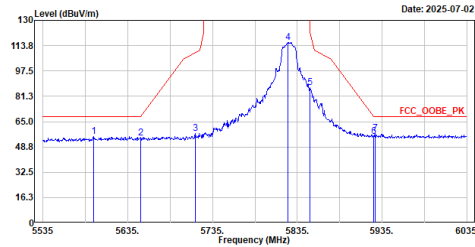


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5594.500	55.52	68.20	-12.68	38.42	17.10	Peak
2	5650.000	54.69	68.21	-13.52	37.39	17.30	Peak
3	5714.500	57.49	109.26	-51.77	39.80	17.69	Peak
4	5824.000	115.94	-----	-----	97.87	18.07	Peak
5	5850.000	86.97	122.20	-35.23	68.86	18.11	Peak
6	5925.000	55.30	68.21	-12.91	37.13	18.17	Peak
7	5926.500	57.24	68.20	-10.96	39.07	18.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX a 5825MHz V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5825MHz
Test BY :Ashton

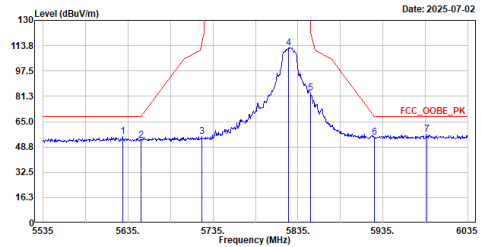


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5628.500	55.35	68.20	-12.85	38.14	17.21	Peak
2	5650.000	53.00	68.21	-15.21	35.70	17.30	Peak
3	5721.500	55.64	114.22	-58.58	37.91	17.73	Peak
4	5824.000	112.56	-----	-----	94.49	18.07	Peak
5	5850.000	83.18	122.20	-39.02	65.07	18.11	Peak
6	5925.000	55.06	68.21	-13.15	36.89	18.17	Peak
7	5986.500	56.66	68.20	-11.54	38.37	18.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX ac20 5180MHz H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
Test BY :Ashton

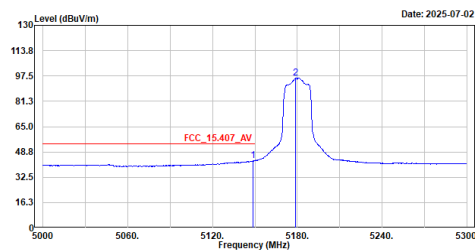


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5148.800	43.26	54.00	-10.74	27.75	15.51	Average
2	5178.800	96.15	-----	-----	80.54	15.61	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX ac20 5180MHz H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
Test BY :Ashton

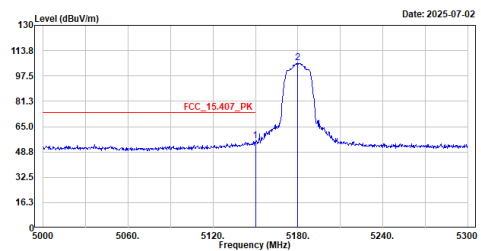


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	55.88	74.00	-18.12	40.37	15.51	Peak
2	5180.000	105.87	-----	-----	90.26	15.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
Test BY :Ashton

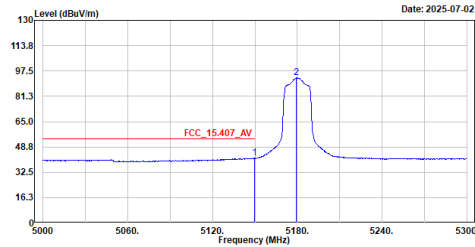


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	41.59	54.00	-12.41	26.08	15.51	Average
2	5179.100	93.07	-----	-----	77.46	15.61	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
Test BY :Ashton

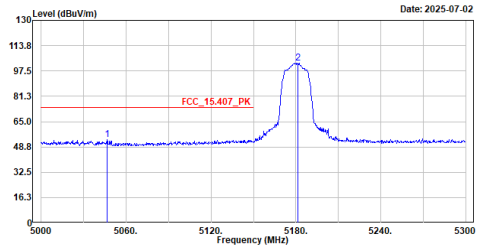


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5046.800	53.31	74.00	-20.69	37.76	15.55	Peak
2	5181.200	102.66	-----	-----	87.04	15.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5745MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5745MHz
Test BY :Ashton

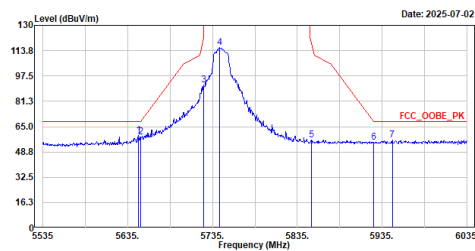


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5647.500	59.28	68.20	-8.92	42.00	17.28	Peak
2	5650.000	58.24	68.21	-9.97	40.94	17.30	Peak
3	5725.000	91.88	122.20	-30.32	74.13	17.75	Peak
4	5743.500	115.65	-----	-----	97.78	17.87	Peak
5	5851.500	56.47	119.78	-62.31	38.34	18.13	Peak
6	5925.000	54.96	68.21	-13.25	36.79	18.17	Peak
7	5947.000	56.60	68.20	-11.60	38.39	18.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5745MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5745MHz
Test BY :Ashton

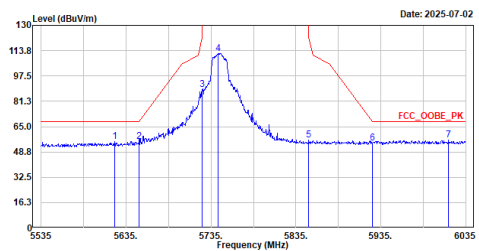


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5622.000	55.52	68.20	-12.68	38.32	17.20	Peak
2	5650.000	55.52	68.21	-12.69	38.22	17.30	Peak
3	5725.000	88.95	122.20	-33.25	71.20	17.75	Peak
4	5743.500	111.83	-----	-----	93.96	17.87	Peak
5	5850.000	56.33	122.20	-65.87	38.22	18.11	Peak
6	5925.000	54.58	68.21	-13.63	36.41	18.17	Peak
7	6015.000	56.61	68.20	-11.59	38.26	18.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5825MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5825MHz
Test BY :Ashton

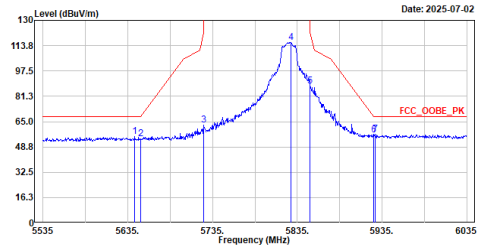


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5643.500	55.39	68.20	-12.81	38.12	17.27	Peak
2	5650.000	53.83	68.21	-14.38	36.53	17.30	Peak
3	5724.500	62.92	121.06	-58.14	45.17	17.75	Peak
4	5827.500	116.02	-----	-----	97.95	18.07	Peak
5	5850.000	87.77	122.20	-34.43	69.66	18.11	Peak
6	5925.000	56.31	68.21	-11.90	38.14	18.17	Peak
7	5926.500	56.96	68.20	-11.24	38.79	18.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5825MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5825MHz
Test BY :Ashton

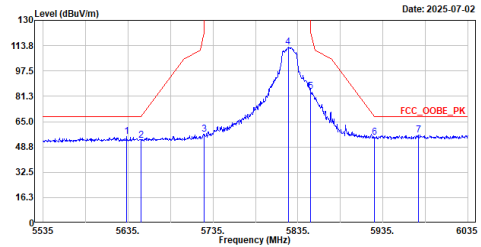


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5633.000	55.51	68.20	-12.69	38.28	17.23	Peak
2	5650.000	52.95	68.21	-15.26	35.65	17.30	Peak
3	5724.500	56.83	121.06	-64.23	39.08	17.75	Peak
4	5823.500	112.77	-----	-----	94.71	18.06	Peak
5	5850.000	84.48	122.20	-37.72	66.37	18.11	Peak
6	5925.000	54.92	68.21	-13.29	36.75	18.17	Peak
7	5977.000	56.33	68.20	-11.87	38.06	18.27	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5190MHz
Test BY :Ashton

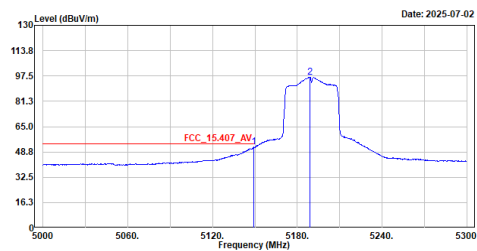


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.100	51.77	54.00	-2.23	36.26	15.51	Average
2	5189.000	96.74	-----	-----	81.09	15.65	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5190MHz
Test BY :Ashton

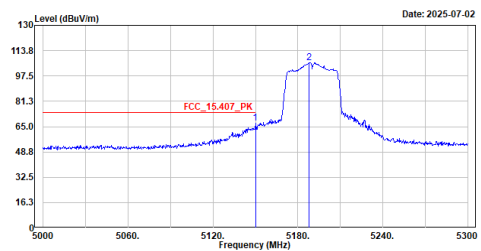


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	67.24	74.00	-6.76	51.73	15.51	Peak
2	5188.100	105.96	-----	-----	90.31	15.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
Test BY :Ashton

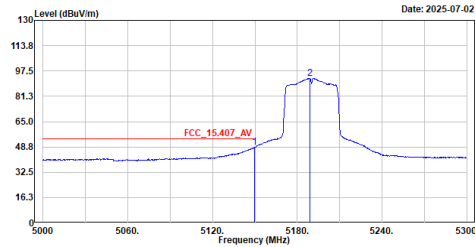


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	48.56	54.00	-5.44	33.05	15.51	Average
2	5188.700	92.88	-----	-----	77.23	15.65	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
Test BY :Ashton

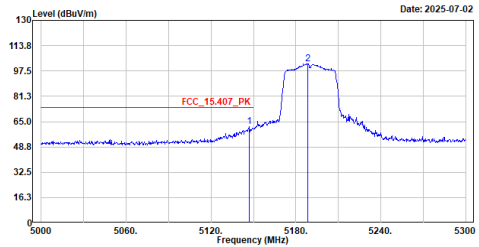


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5147.300	61.60	74.00	-12.40	46.08	15.52	Peak
2	5188.400	102.08	-----	-----	86.43	15.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5755MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5755MHz
Test BY :Ashton

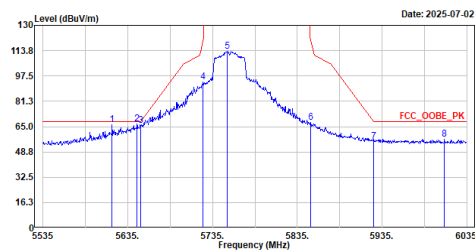


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5616.500	66.45	68.20	-1.75	49.27	17.18	Peak
2	5646.000	66.71	68.20	-1.49	49.44	17.27	Peak
3	5650.000	65.89	68.21	-2.32	48.59	17.30	Peak
4	5724.000	93.71	119.92	-26.21	75.97	17.74	Peak
5	5752.500	113.34	-----	-----	95.43	17.91	Peak
6	5850.500	67.73	121.06	-53.33	49.61	18.12	Peak
7	5925.000	55.57	68.21	-12.64	37.40	18.17	Peak
8	6008.500	56.98	68.20	-11.22	38.64	18.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5755MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5755MHz
Test BY :Ashton

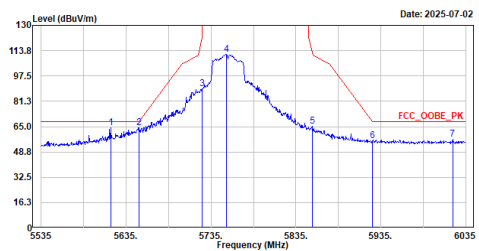


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5617.000	64.35	68.20	-3.85	47.17	17.18	Peak
2	5650.000	64.36	68.21	-3.85	47.06	17.30	Peak
3	5725.000	89.53	122.20	-32.67	71.78	17.75	Peak
4	5753.000	111.27	-----	-----	93.36	17.91	Peak
5	5854.000	65.03	113.00	-48.05	46.91	18.12	Peak
6	5925.000	56.08	68.21	-12.13	37.91	18.17	Peak
7	6019.500	56.76	68.20	-11.44	38.40	18.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5795MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5795MHz
Test BY :Ashton

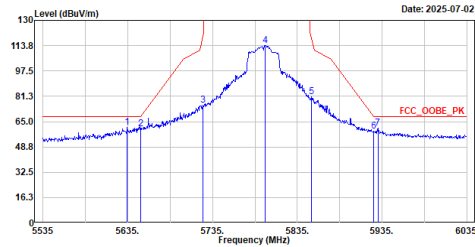


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5634.500	61.40	68.20	-6.80	44.16	17.24	Peak
2	5650.000	60.41	68.21	-7.80	43.11	17.30	Peak
3	5724.000	75.37	119.92	-44.55	57.63	17.74	Peak
4	5797.000	113.93	-----	-----	95.93	18.00	Peak
5	5852.000	80.85	117.64	-36.79	62.72	18.13	Peak
6	5925.000	58.90	68.21	-9.31	40.73	18.17	Peak
7	5930.000	60.63	68.20	-7.57	42.45	18.18	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5795MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5795MHz
Test BY :Ashton

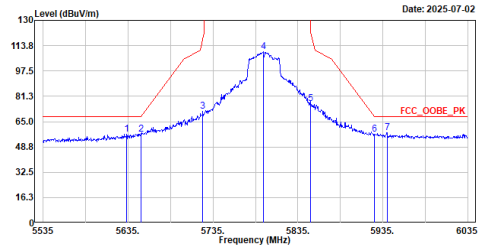


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5633.500	56.83	68.20	-11.37	39.60	17.23	Peak
2	5650.000	57.06	68.21	-11.15	39.76	17.30	Peak
3	5723.000	71.63	117.64	-46.01	53.69	17.74	Peak
4	5794.000	109.70	-----	-----	91.70	18.00	Peak
5	5850.000	76.53	122.20	-45.67	58.42	18.11	Peak
6	5925.000	56.67	68.21	-11.54	38.50	18.17	Peak
7	5940.000	57.81	68.20	-10.39	39.61	18.20	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test BY :Ashton

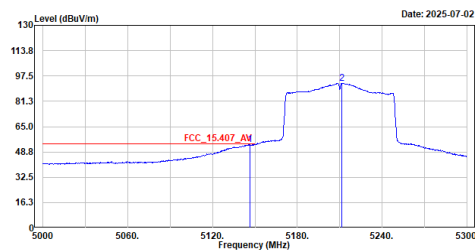


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5146.700	53.45	54.00	-0.55	37.93	15.52	Average
2	5211.500	92.92	-----	-----	77.18	15.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test BY :Ashton

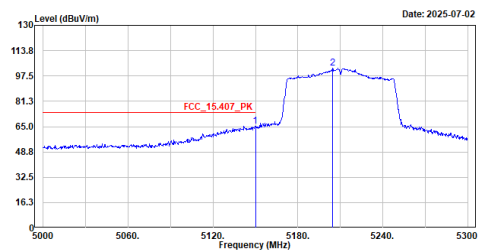


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	65.43	74.00	-8.57	49.92	15.51	Peak
2	5204.300	102.58	-----	-----	86.87	15.71	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test BY :Ashton

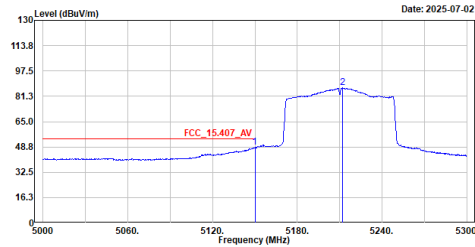


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	48.37	54.00	-5.63	32.86	15.51	Average
2	5212.100	86.59	-----	-----	70.85	15.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test BY :Ashton

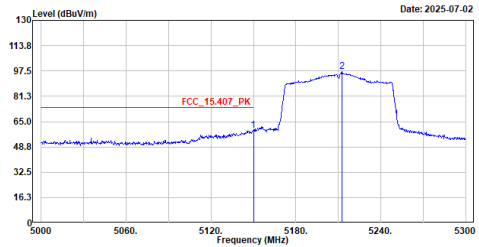


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	59.57	74.00	-14.43	44.06	15.51	Peak
2	5212.700	96.96	-----	-----	81.23	15.73	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5775MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5775MHz
Test BY :Ashton

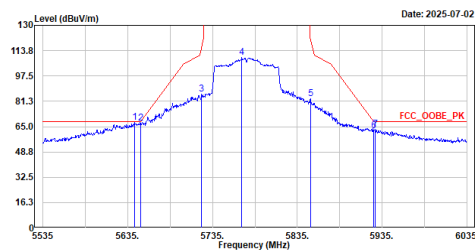


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5643.000	67.50	68.20	-0.70	50.23	17.27	Peak
2	5650.000	67.40	68.21	-0.81	50.10	17.30	Peak
3	5722.000	85.80	115.36	-29.56	68.07	17.73	Peak
4	5769.500	109.61	-----	-----	91.67	17.94	Peak
5	5850.500	82.66	121.06	-38.40	64.54	18.12	Peak
6	5925.000	62.25	68.21	-5.96	44.08	18.17	Peak
7	5926.500	63.36	68.20	-4.84	45.19	18.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5775MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5775MHz
Test BY :Ashton

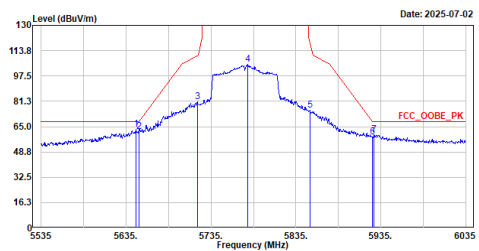


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5646.500	63.11	68.20	-5.09	45.83	17.28	Peak
2	5650.000	61.87	68.21	-6.34	44.57	17.30	Peak
3	5719.000	81.07	110.52	-29.45	63.36	17.71	Peak
4	5778.000	104.74	-----	-----	86.78	17.96	Peak
5	5852.000	75.53	117.64	-42.11	57.40	18.13	Peak
6	5925.000	58.41	68.21	-9.80	40.24	18.17	Peak
7	5927.000	59.99	68.20	-8.21	41.82	18.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Band Edge Data_802.11a (20 MHz)

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5240	5248.351	<5250	PASS

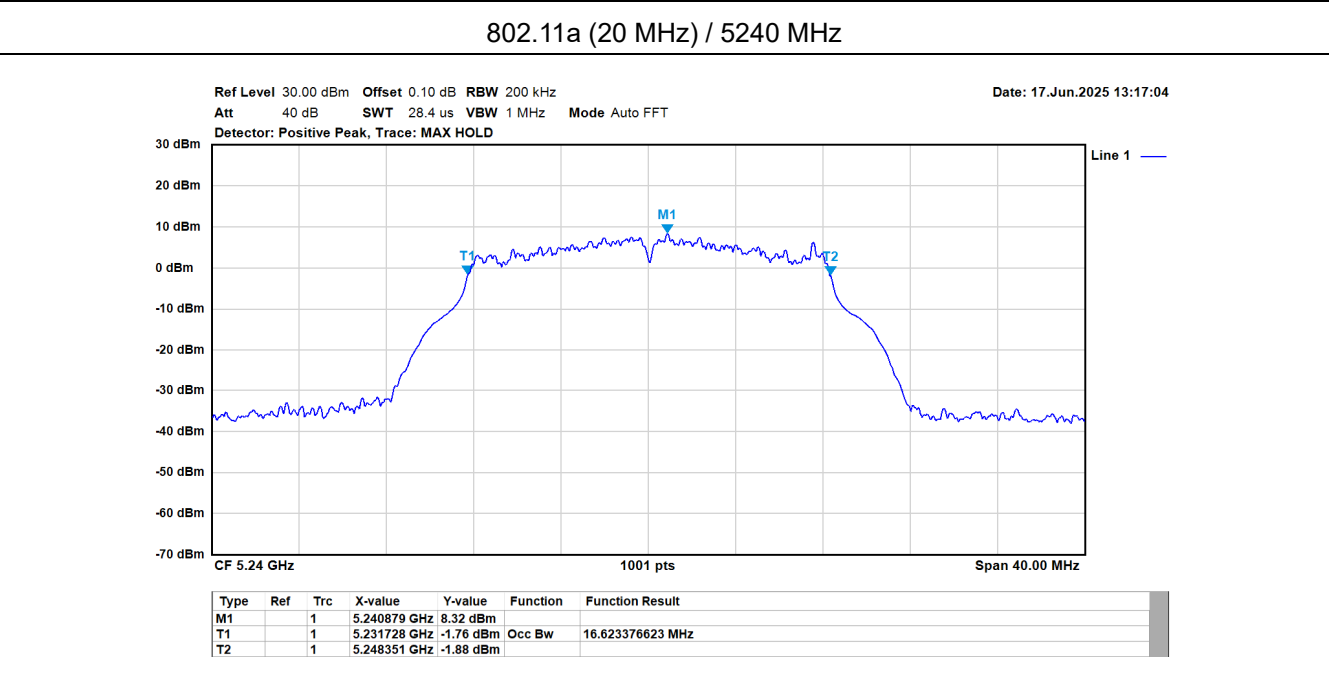


Band Edge Data_802.11ac (20 MHz)

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5240	5248.911	<5250	PASS

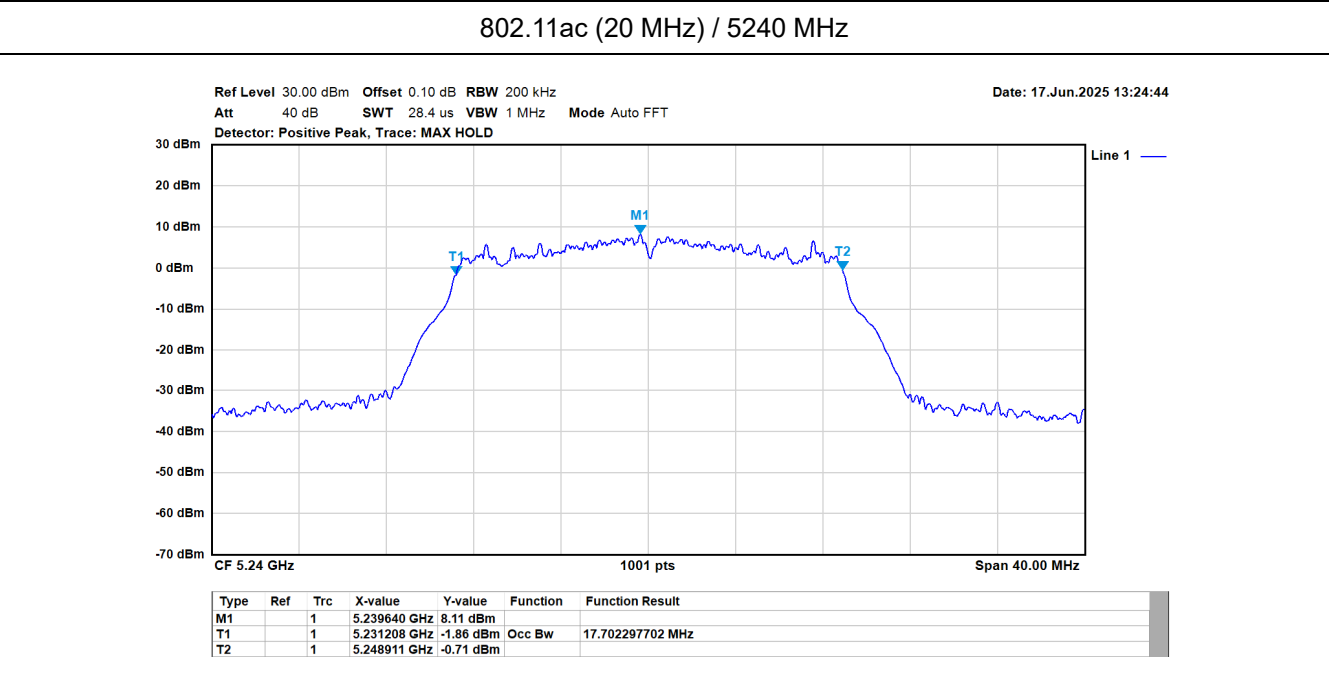

Band Edge Data_802.11ac (40 MHz)

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5230	5248.141	<5250	PASS

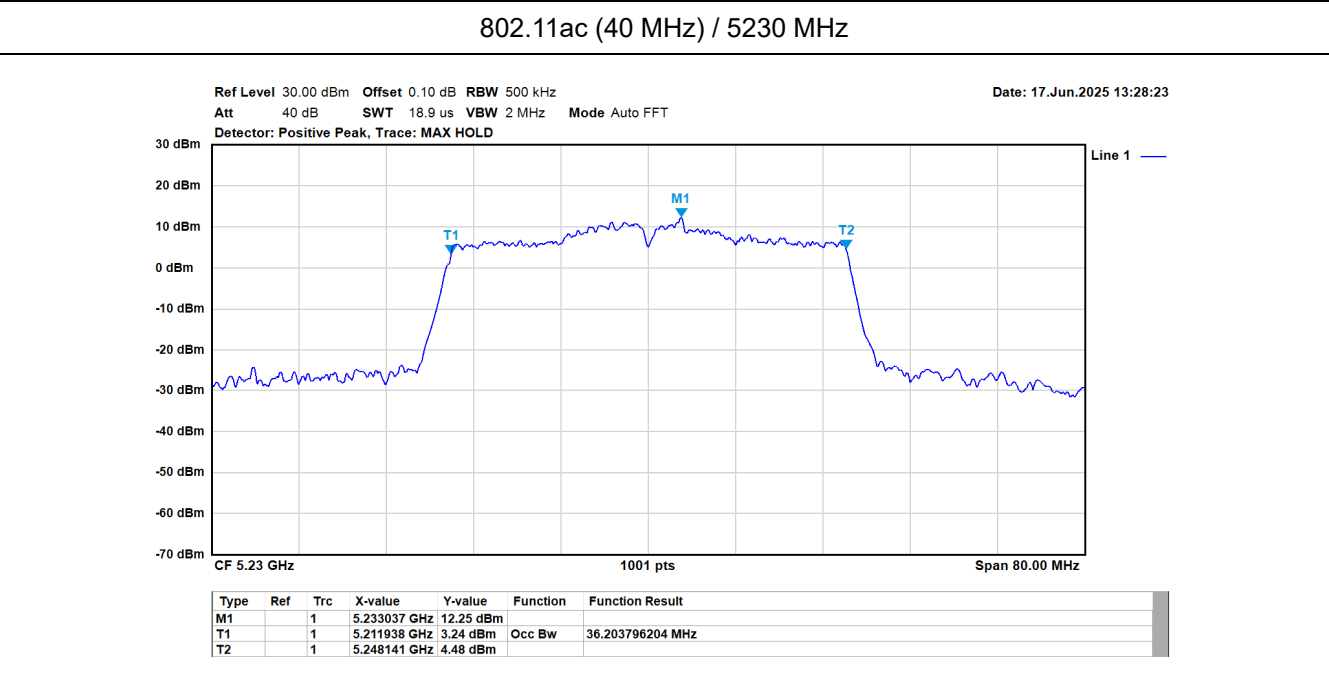

Band Edge Data_802.11ac (80 MHz)

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5210	5247.882	<5250	PASS

