


AppendixA: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
TX	Ant1	903	0.6921	0.5	PASS
TX	Ant1	912.5	0.6927	0.5	PASS
TX	Ant1	922.5	0.6931	0.5	PASS

Test Graphs

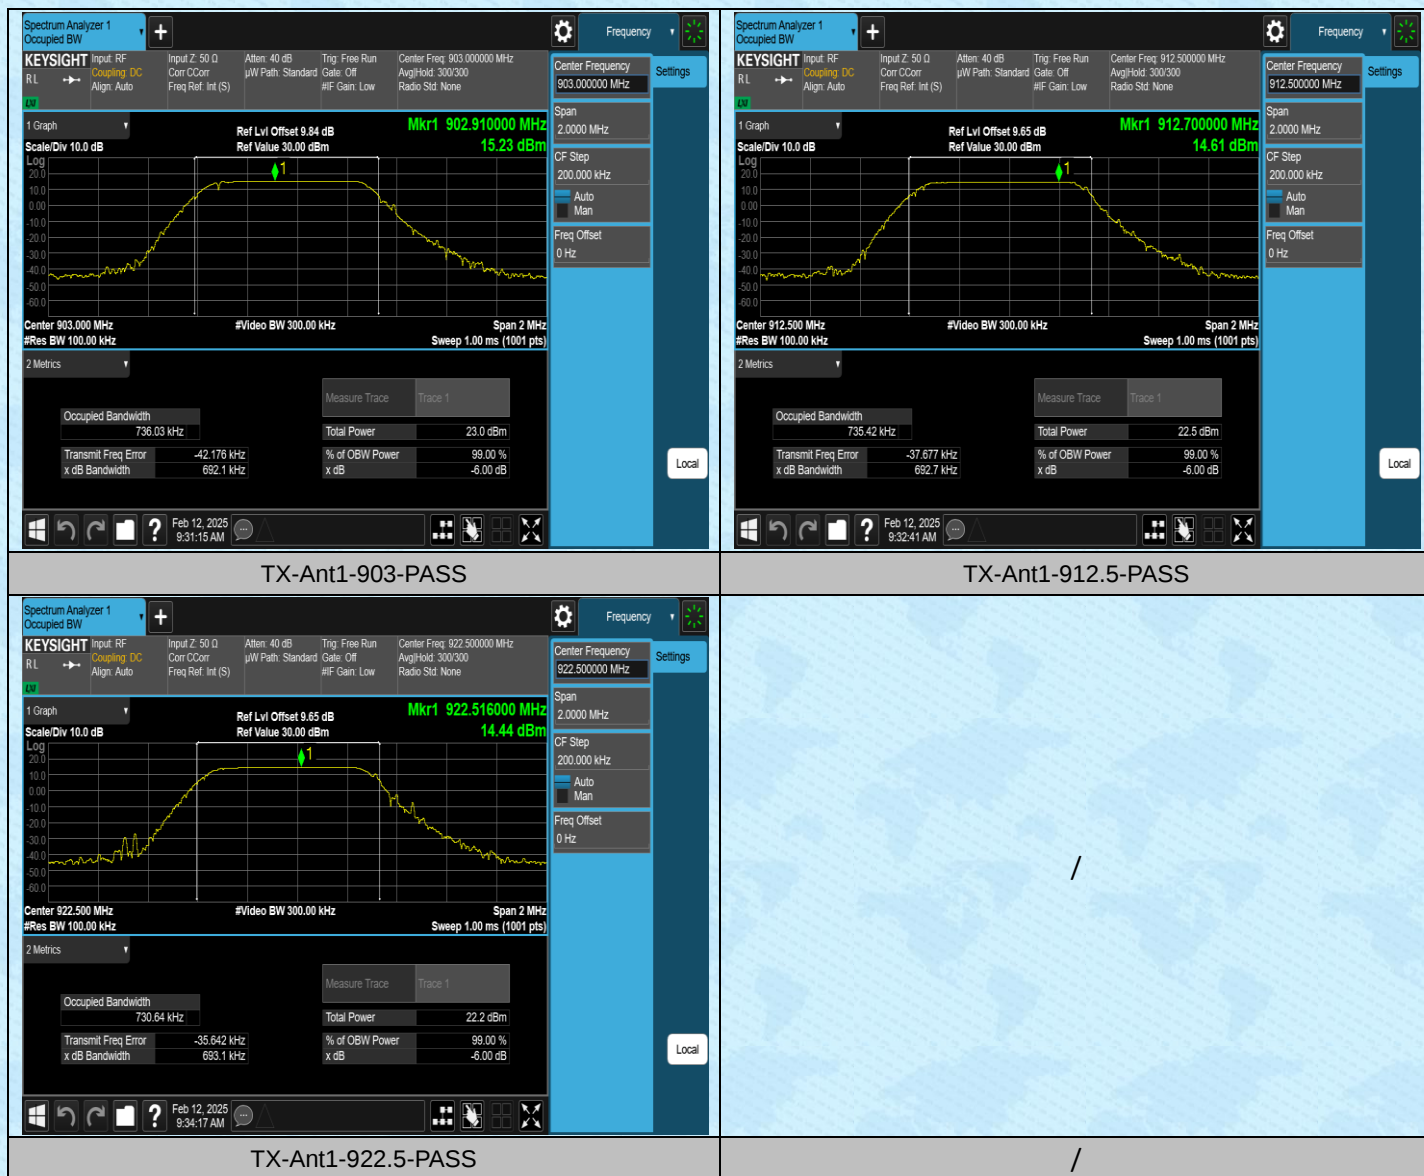


AppendixB: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	903	0.59446	902.6816	903.2760	---	---
TX	Ant1	912.5	0.59357	912.1854	912.7790	---	---
TX	Ant1	922.5	0.59000	922.1887	922.7787	---	---

Test Graphs

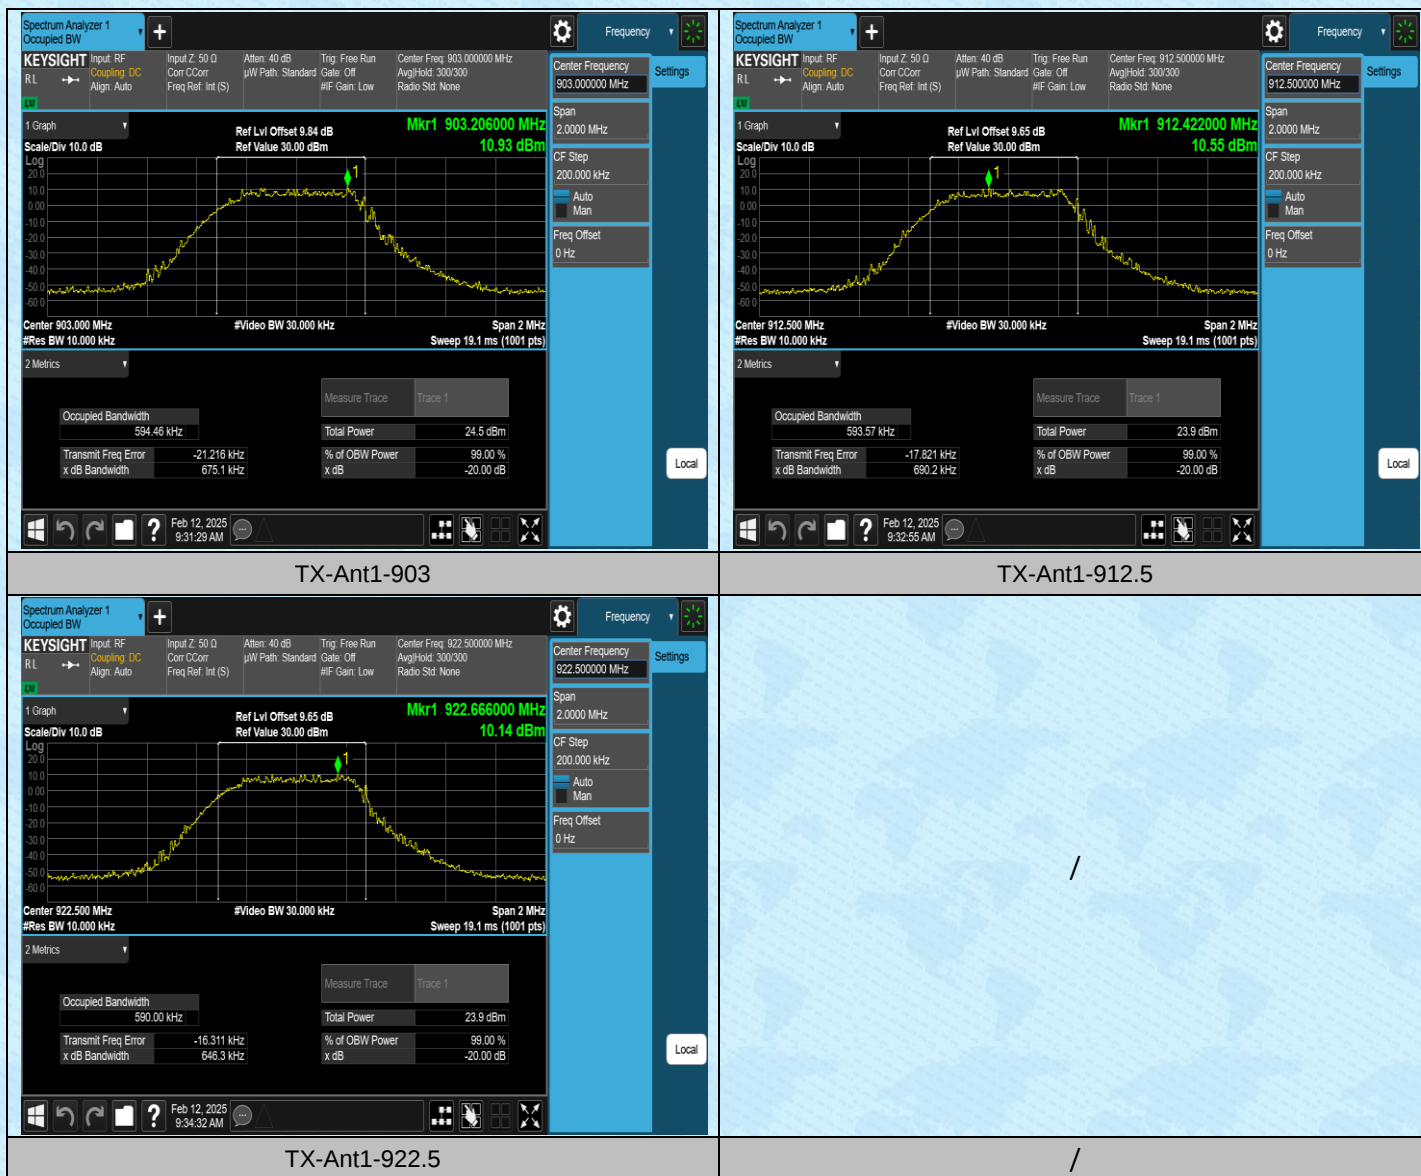


AppendixC: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
TX	Ant1	903	15.28	≤30	PASS
TX	Ant1	912.5	14.64	≤30	PASS
TX	Ant1	922.5	14.49	≤30	PASS

Test Graphs

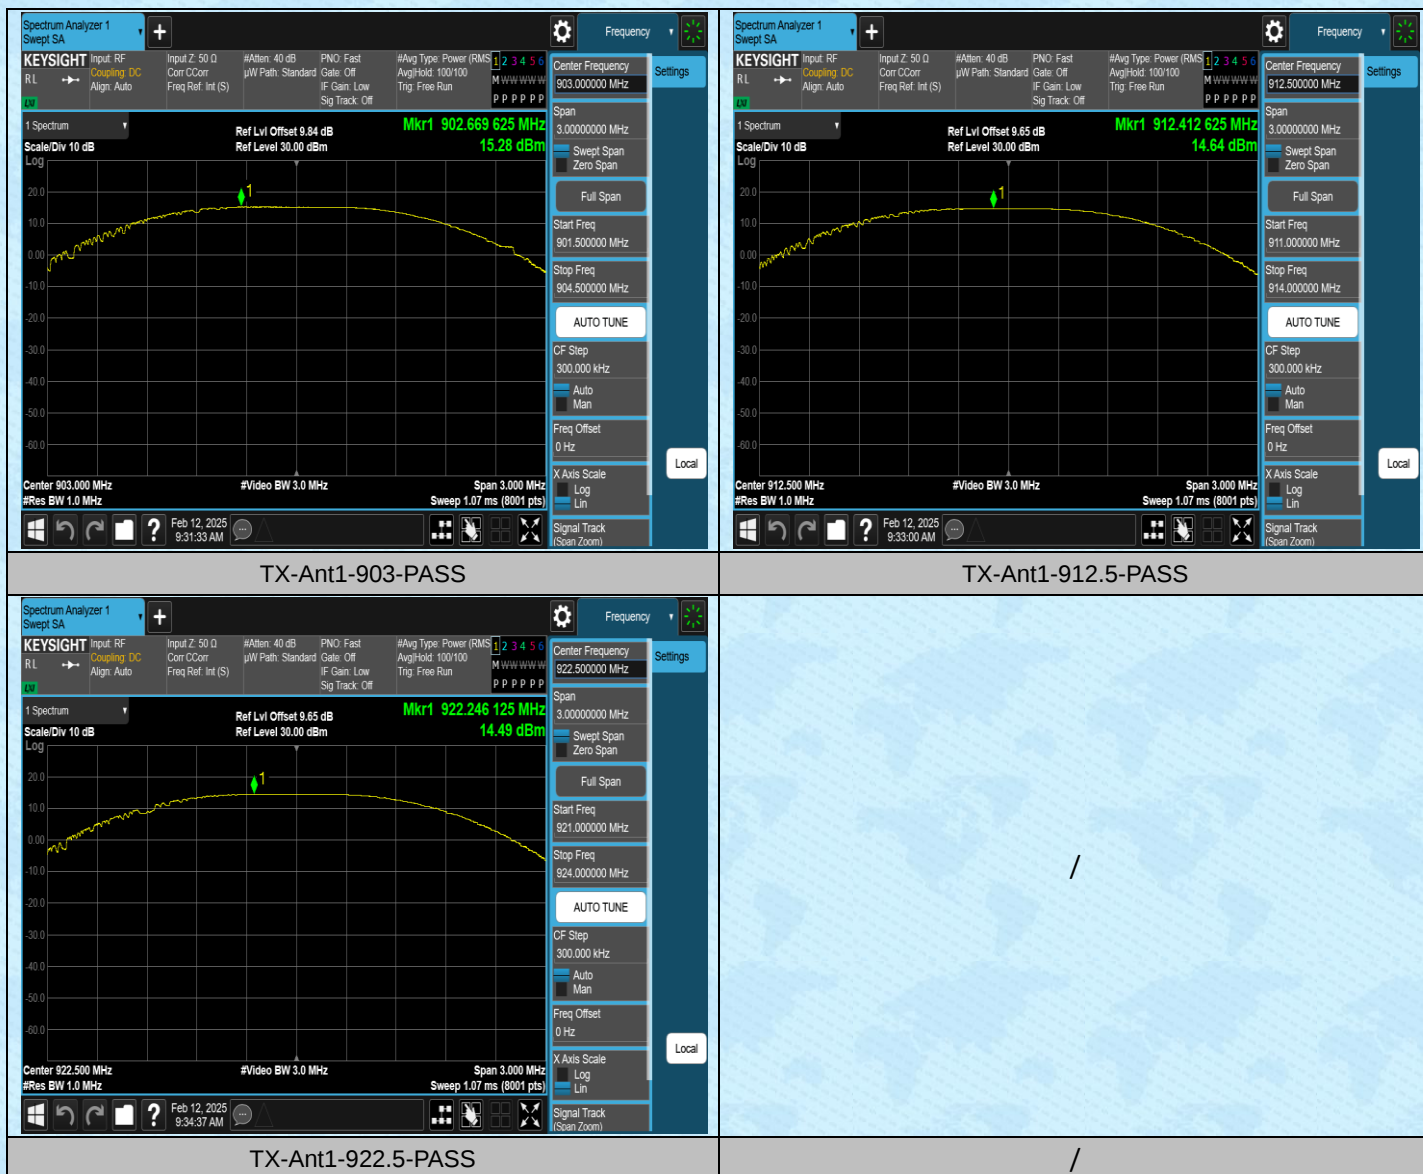


AppendixD: Maximum power spectral density

Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
TX	Ant1	903	2.85	≤8	PASS
TX	Ant1	912.5	1.22	≤8	PASS
TX	Ant1	922.5	2.47	≤8	PASS

Test Graphs

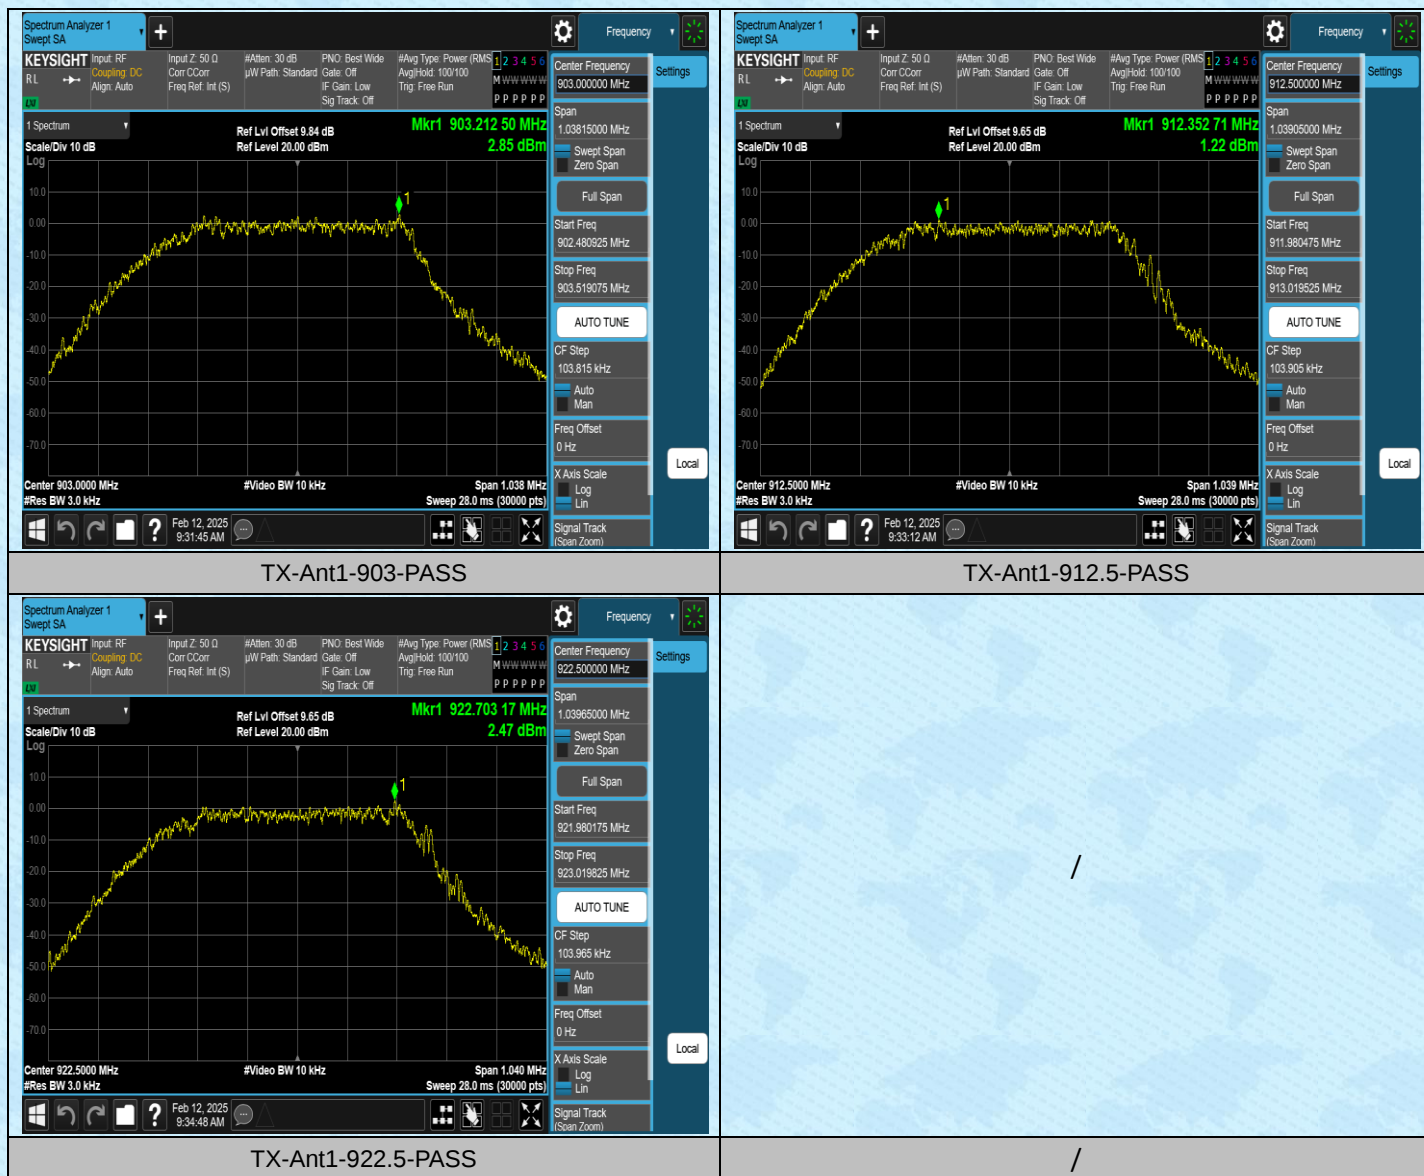


AppendixE:Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	Low	903	15.24	-43.09	≤-4.76	PASS
TX	Ant1	High	922.5	14.45	-43.41	≤-5.55	PASS

Test Graphs

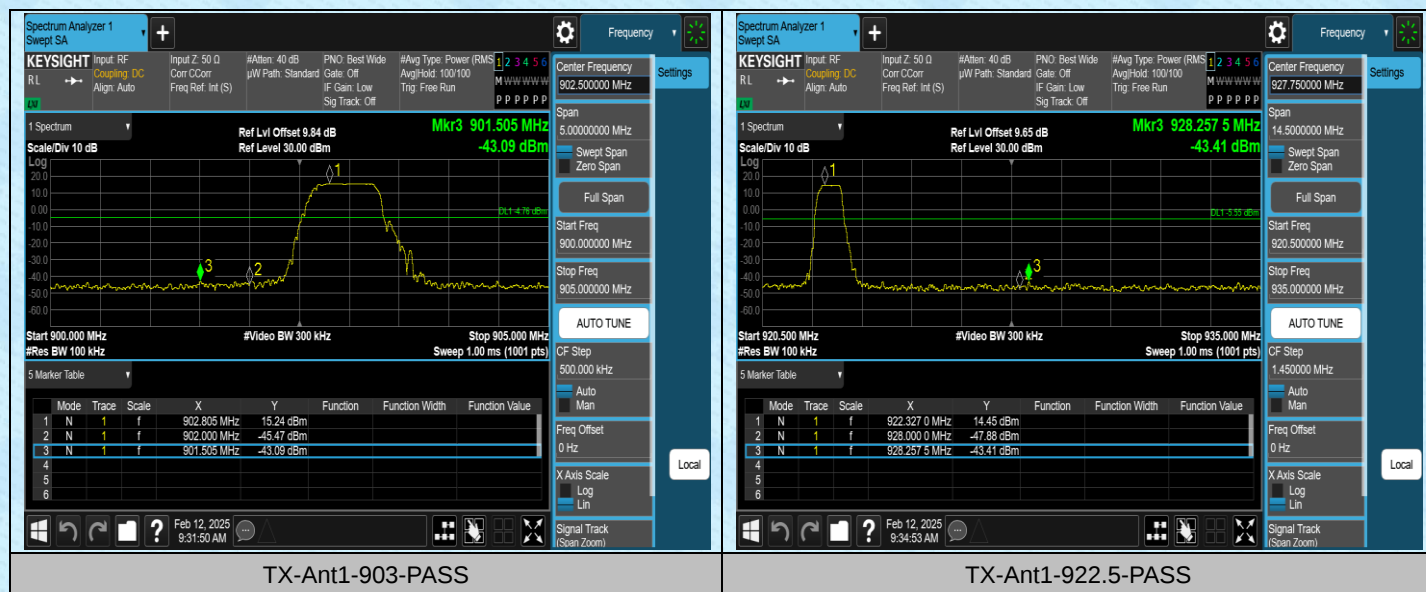


AppendixF:Conducted Spurious Emission

Test Result


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	903	0-Reference	15.10	15.10	---	PASS
TX	Ant1	903	30-10000	15.10	-26.17	≤-4.9	PASS
TX	Ant1	912.5	0-Reference	14.46	14.46	---	PASS
TX	Ant1	912.5	30-10000	14.46	-26.49	≤-5.54	PASS
TX	Ant1	922.5	0-Reference	14.26	14.26	---	PASS
TX	Ant1	922.5	30-10000	14.26	-28.19	≤-5.74	PASS

Test Graphs

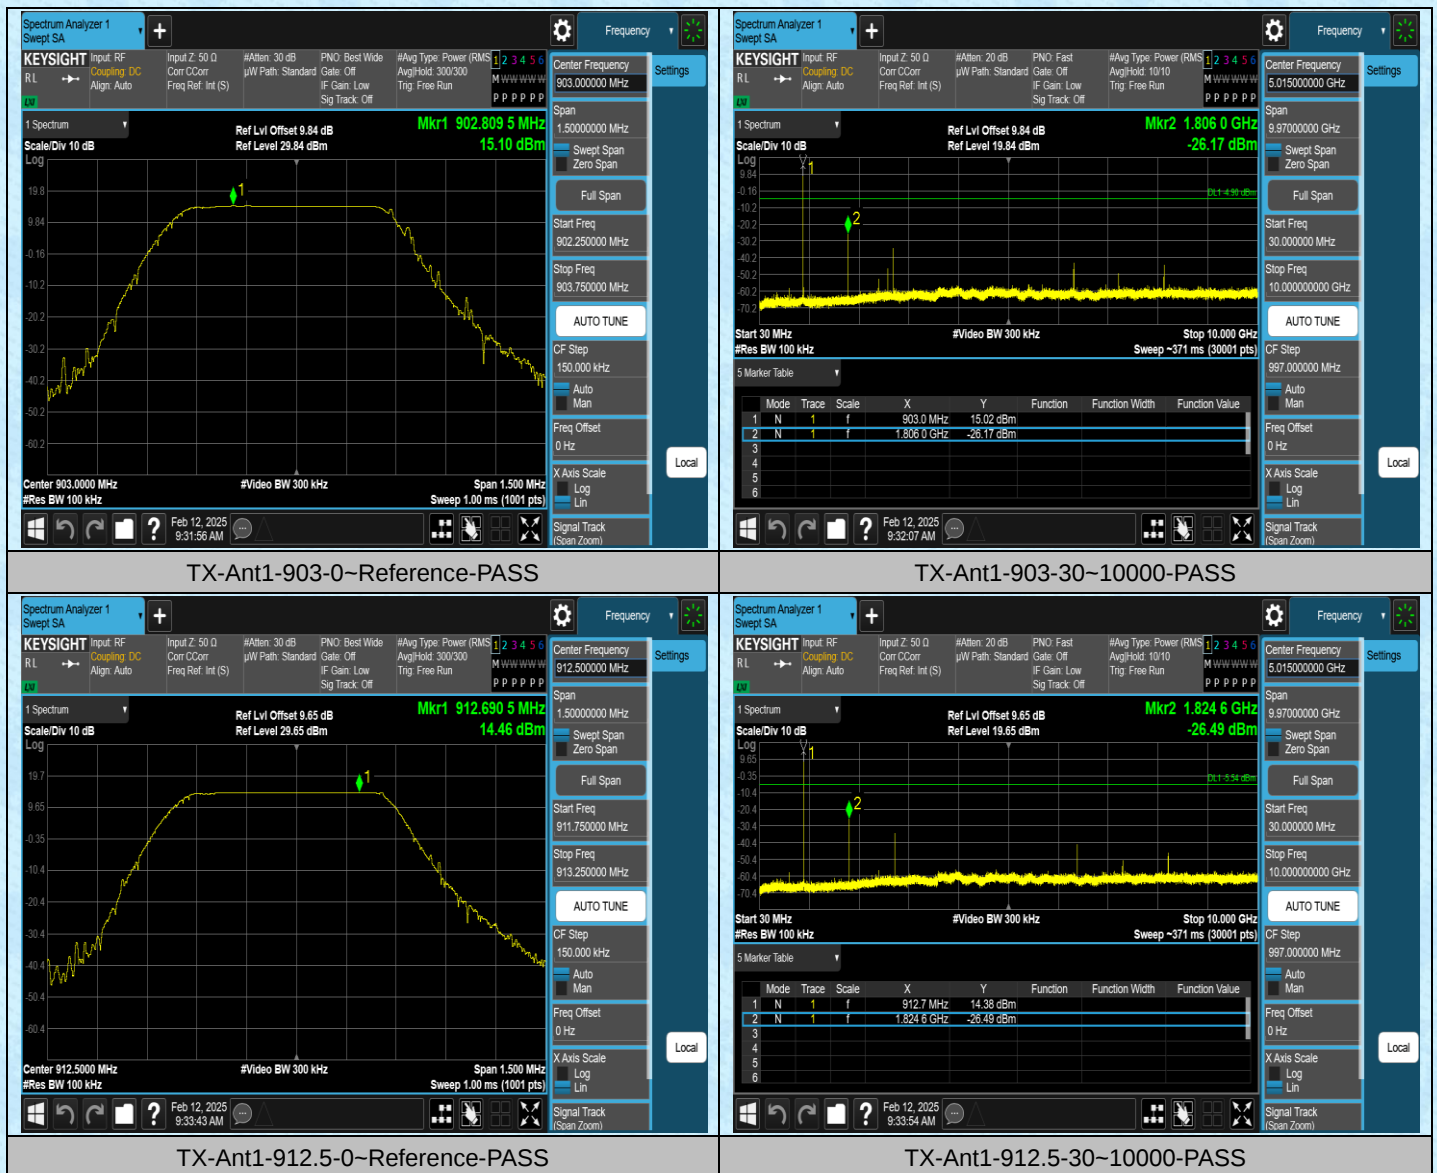



TX-Ant1-922.5-0~Reference-PASS

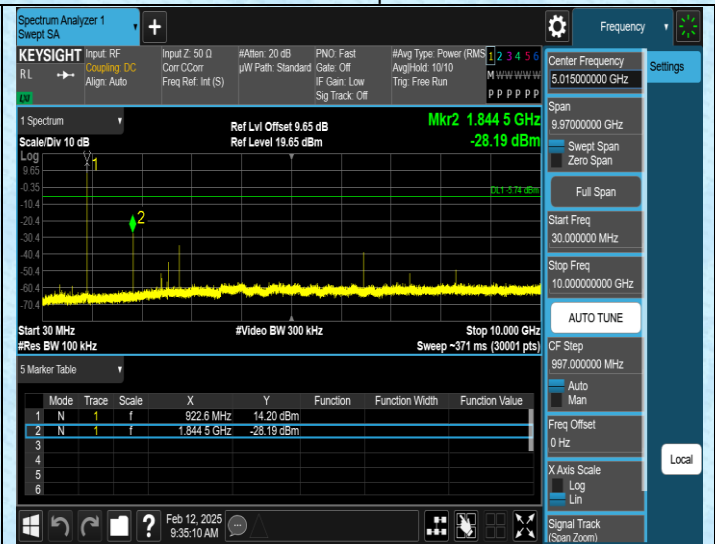


TX-Ant1-922.5-30~10000-PASS

AppendixG: Duty Cycle

Test Result

TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
TX	Ant1	903	82.00	134.00	61.19	2.13
TX	Ant1	912.5	82.00	134.00	61.19	2.13
TX	Ant1	922.5	82.00	134.00	61.19	2.13

Test Graphs

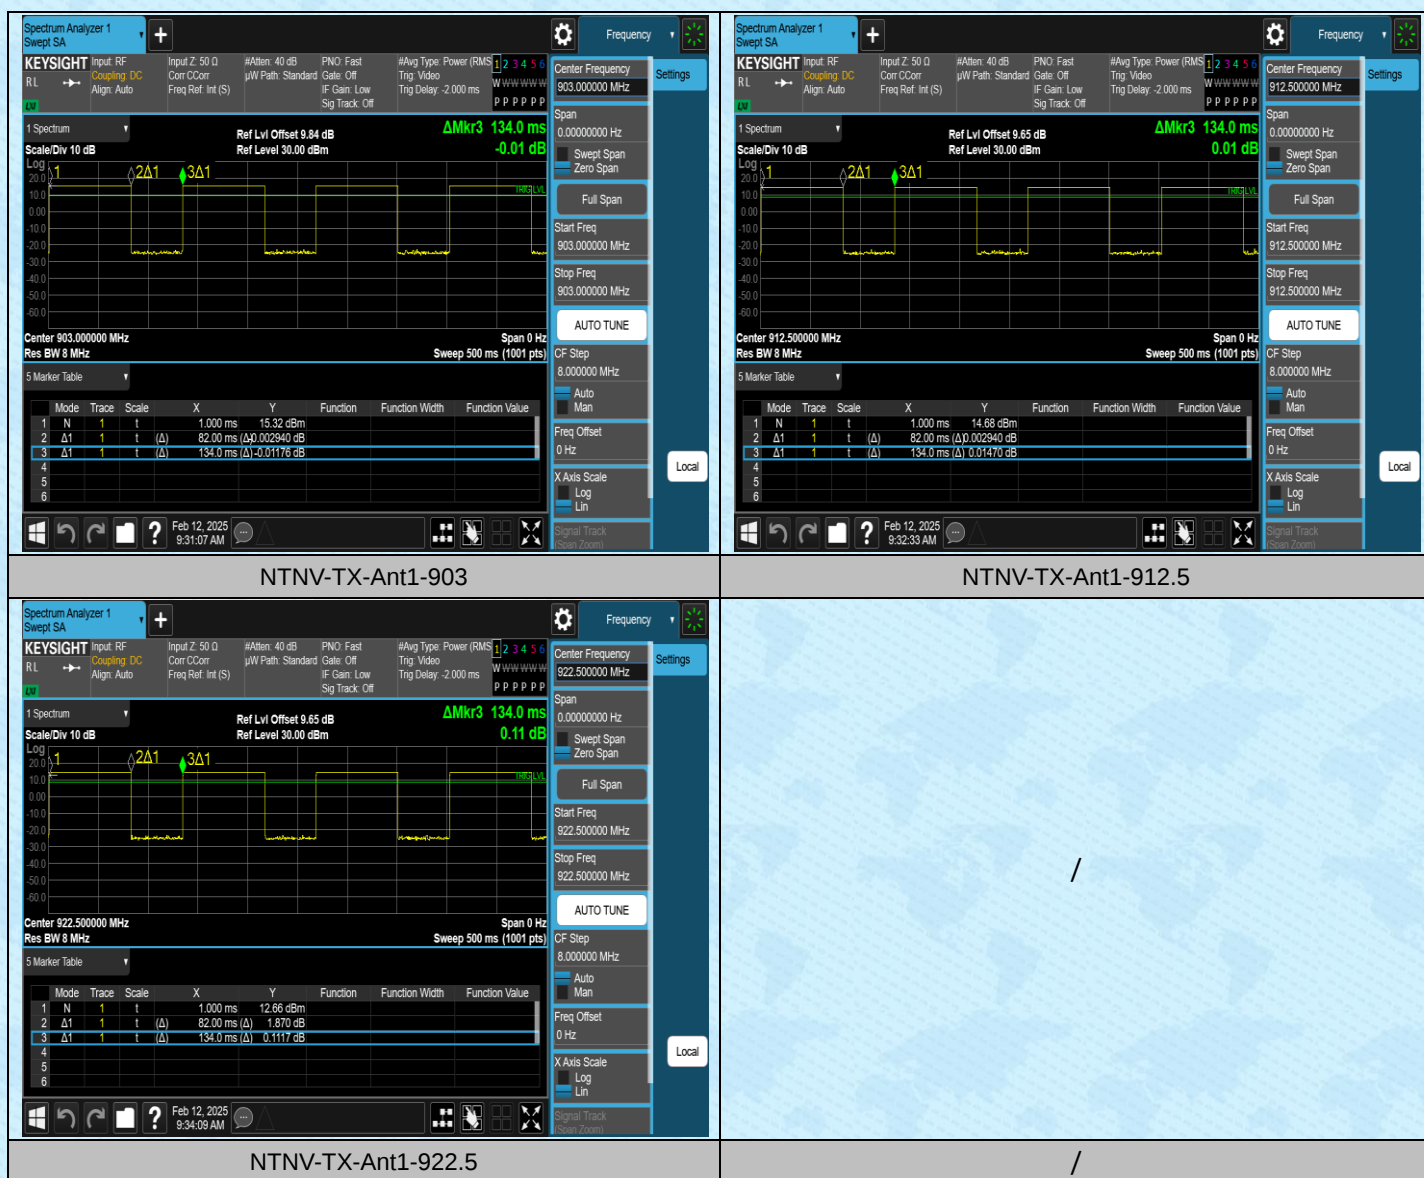

-----End-----