


AppendixA: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
TX	Ant1	903	0.6898	0.5	PASS
TX	Ant1	912.5	0.6876	0.5	PASS
TX	Ant1	922.5	0.6959	0.5	PASS

Test Graphs

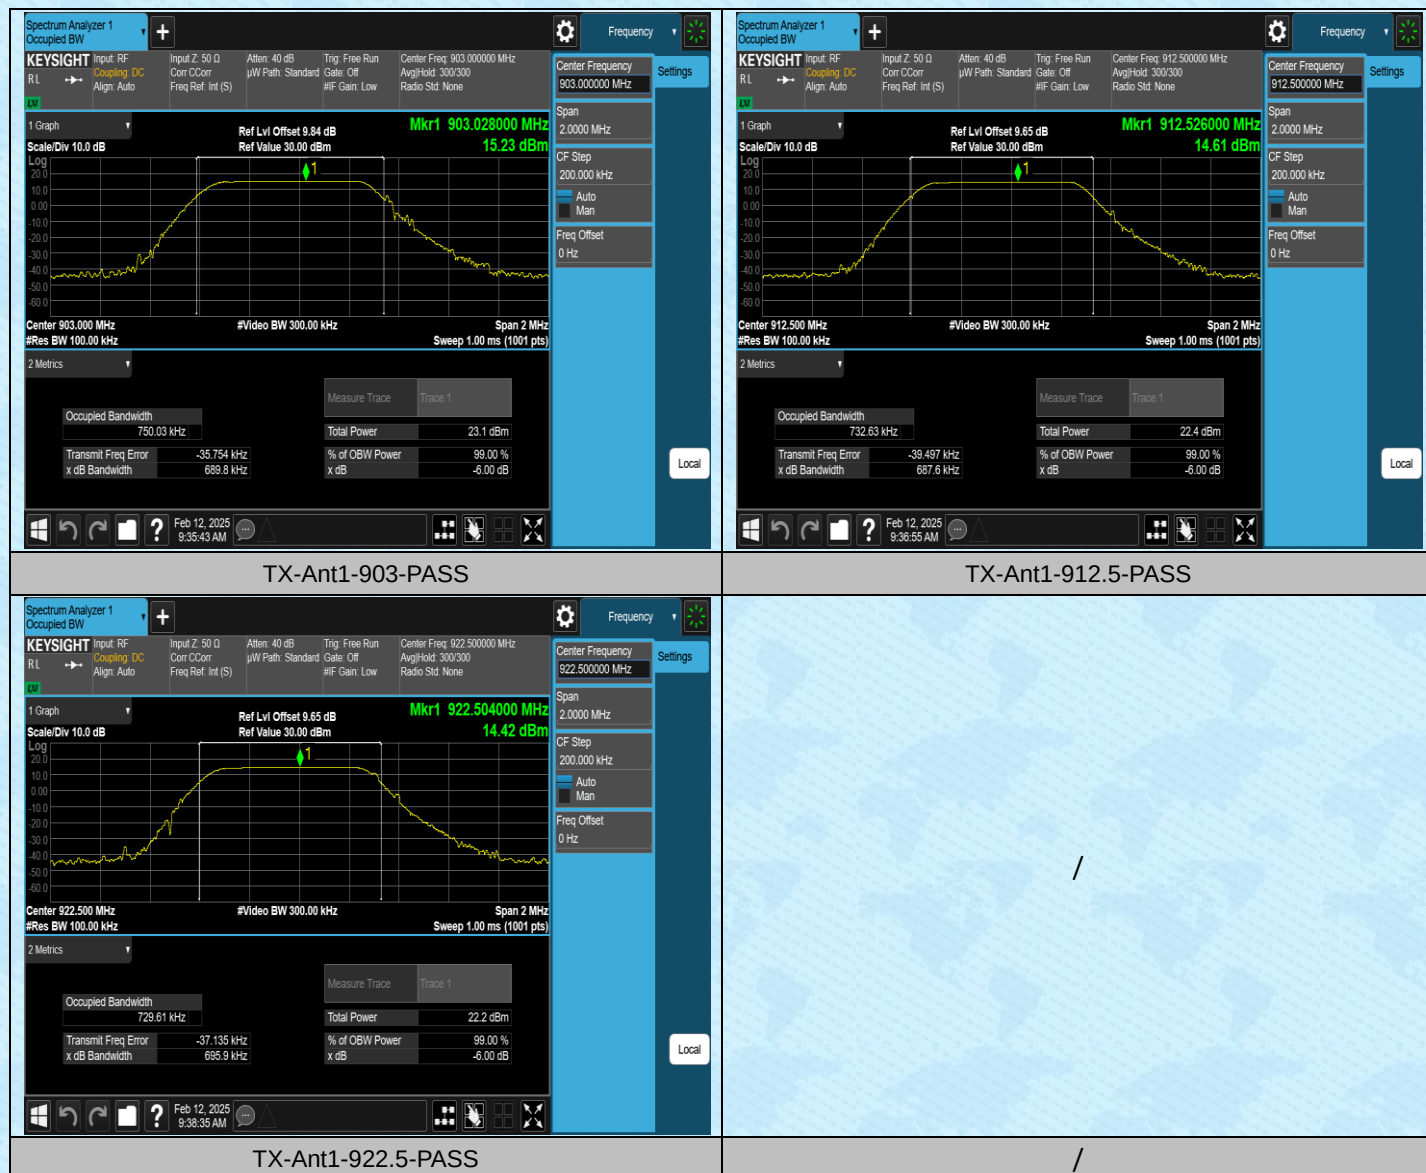


AppendixB: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	903	0.60386	902.6753	903.2792	---	---
TX	Ant1	912.5	0.58301	912.1809	912.7639	---	---
TX	Ant1	922.5	0.58985	922.1863	922.7761	---	---

Test Graphs

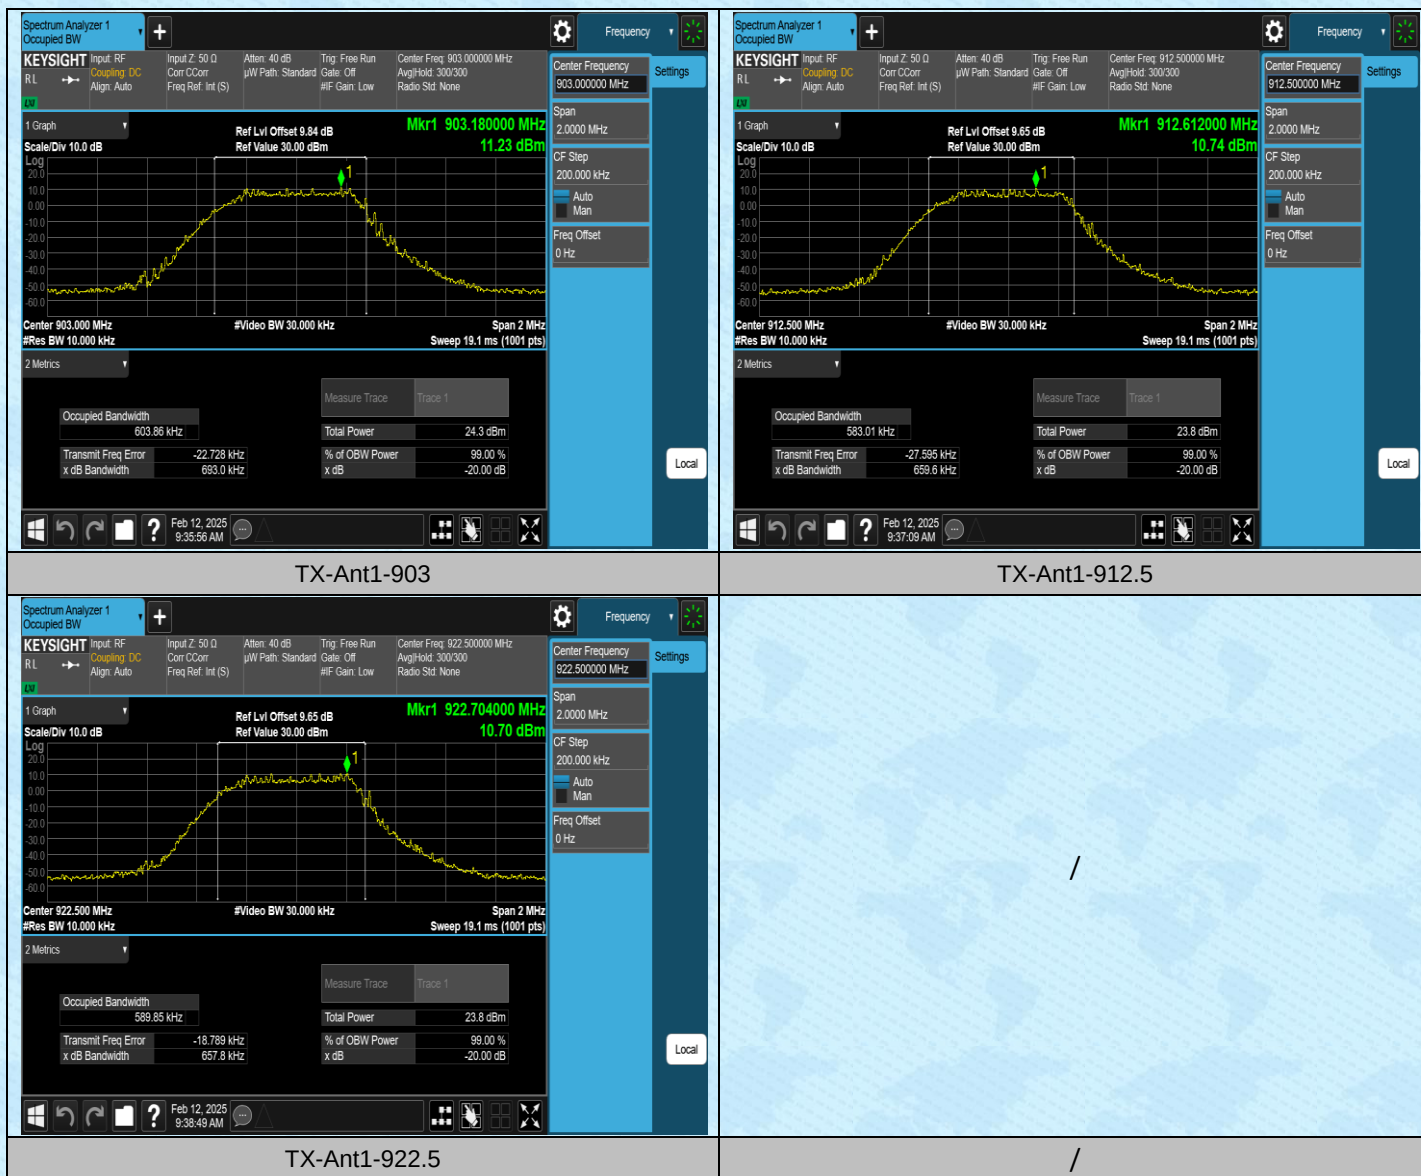


AppendixC: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
TX	Ant1	903	15.27	≤30	PASS
TX	Ant1	912.5	14.63	≤30	PASS
TX	Ant1	922.5	14.46	≤30	PASS

Test Graphs

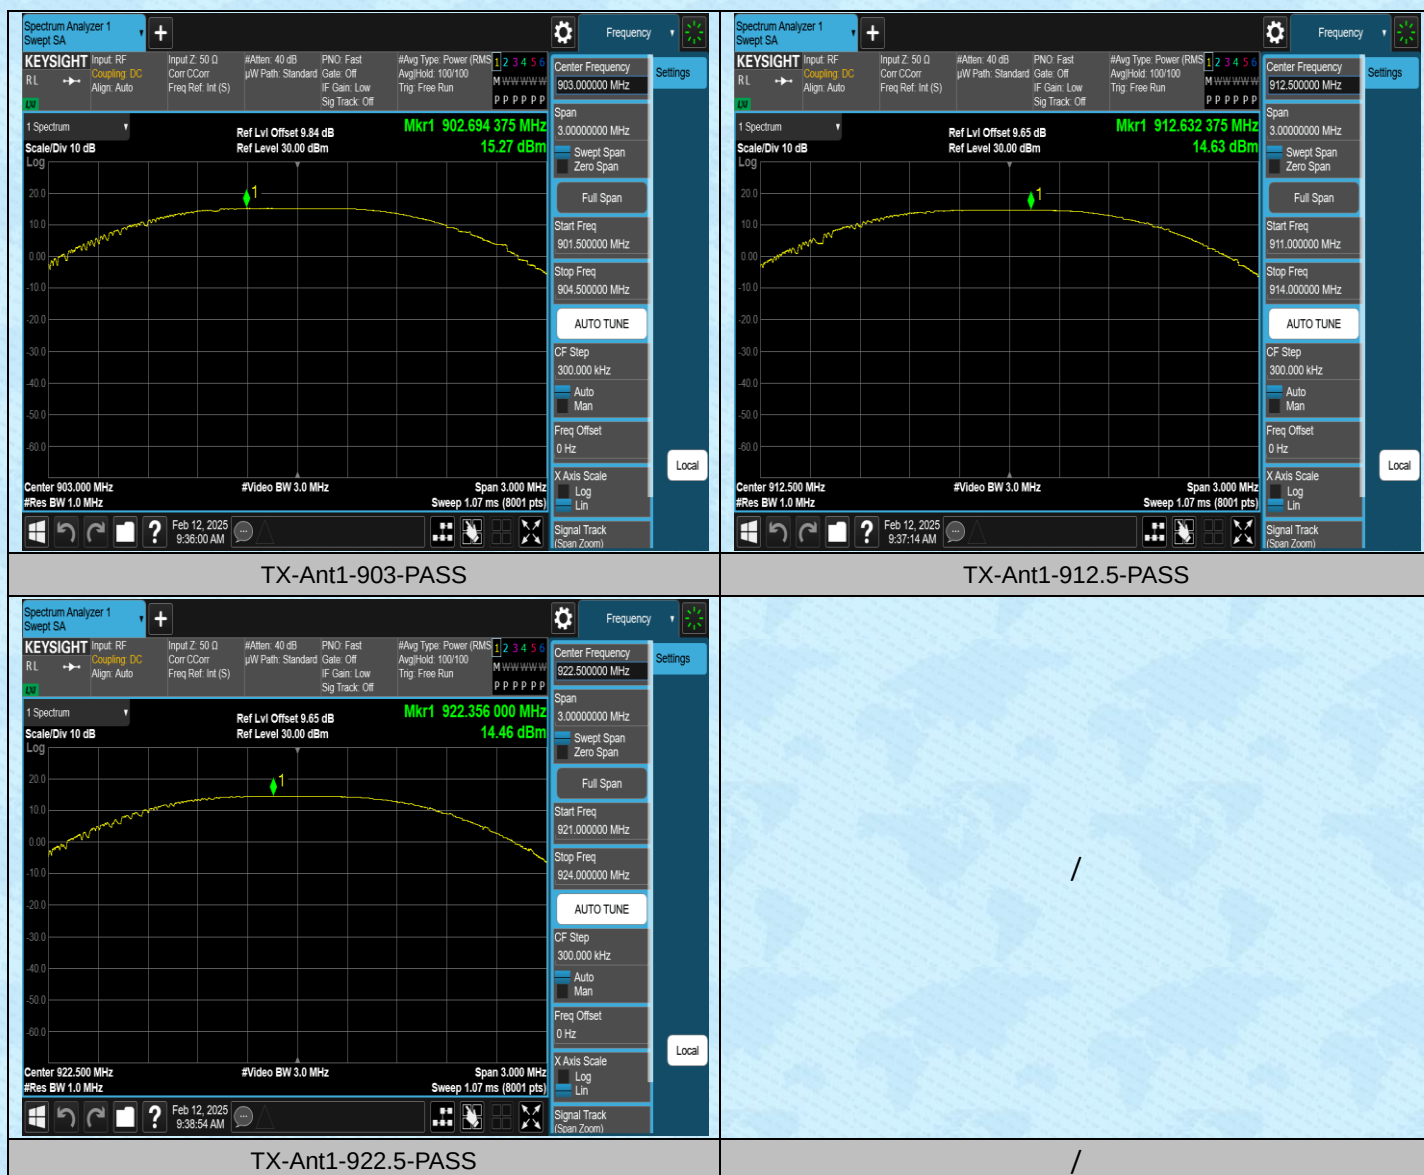


AppendixD: Maximum power spectral density

Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
TX	Ant1	903	2.33	≤8	PASS
TX	Ant1	912.5	1.54	≤8	PASS
TX	Ant1	922.5	2.32	≤8	PASS

Test Graphs

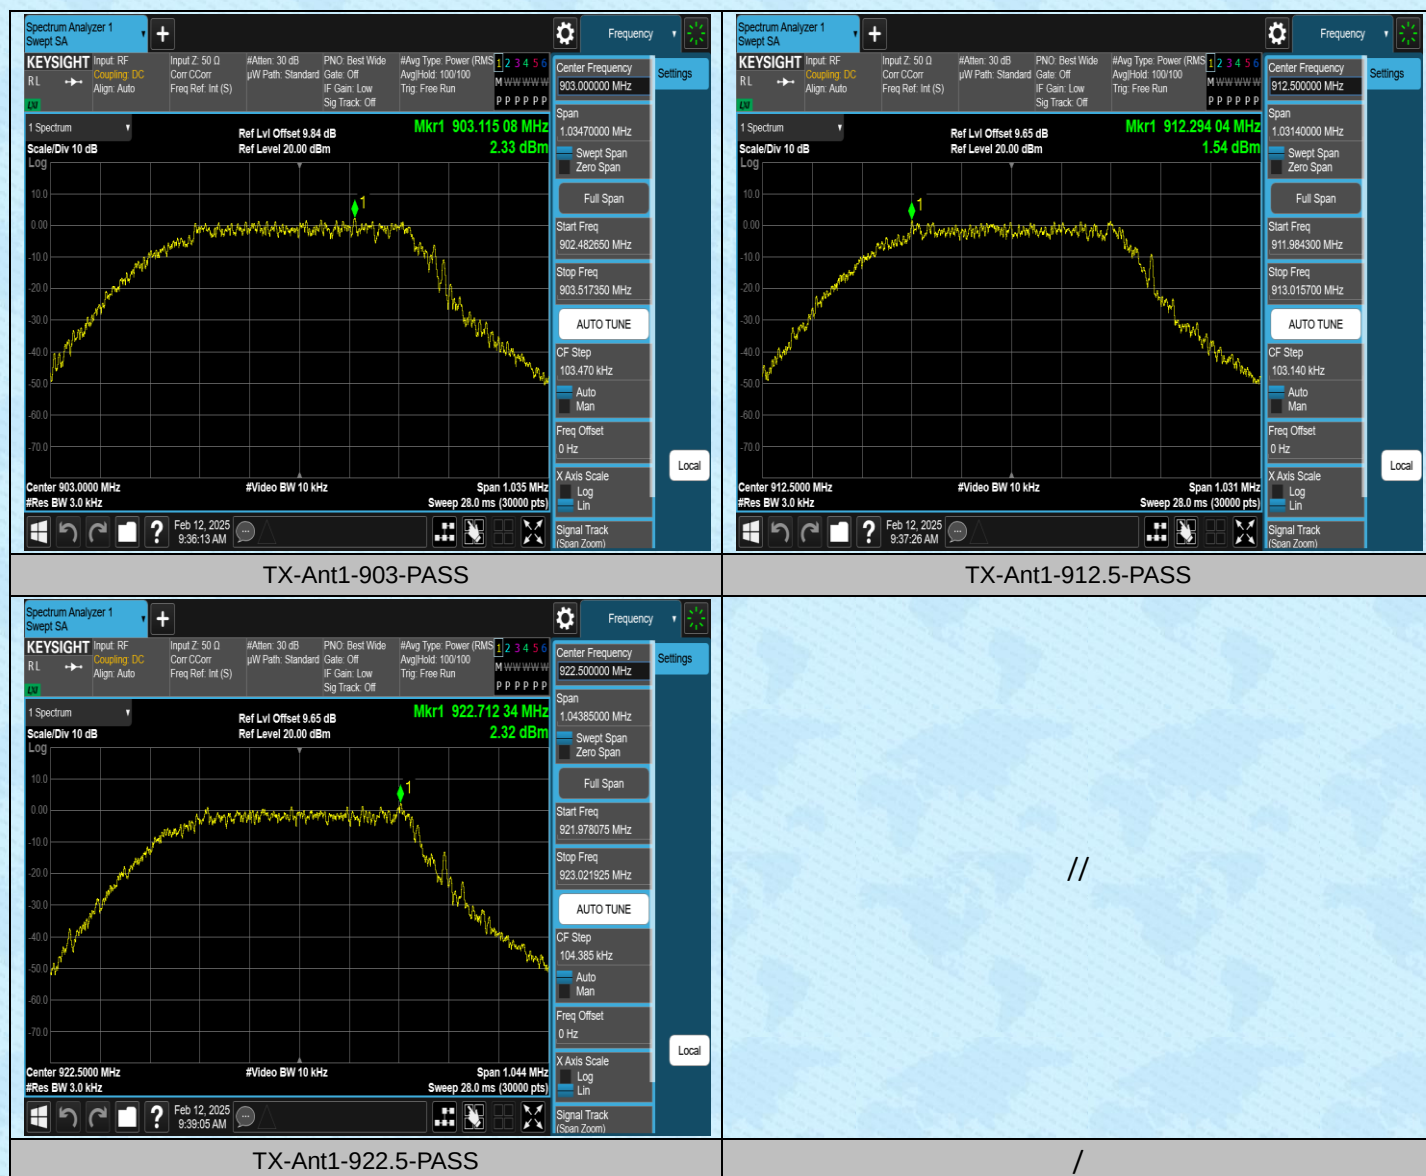


AppendixE:Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	Low	903	15.22	-43.31	≤-4.78	PASS
TX	Ant1	High	922.5	14.44	-44.18	≤-5.56	PASS

Test Graphs

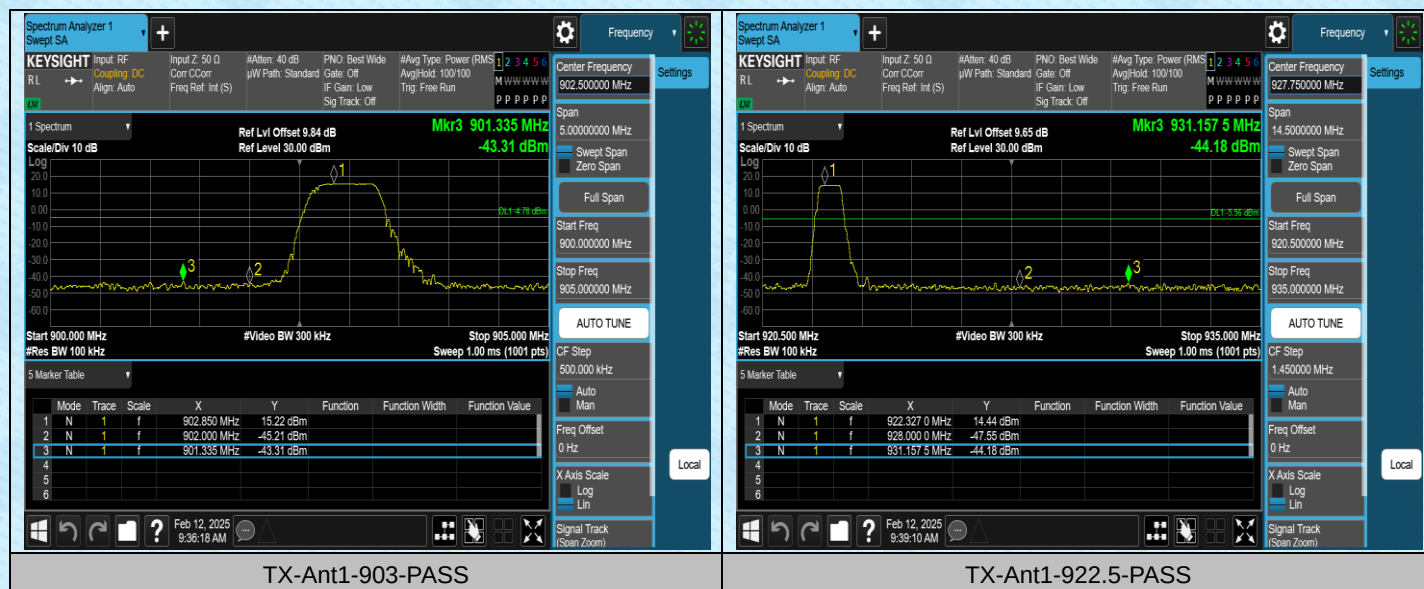


AppendixF:Conducted Spurious Emission

Test Result


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	903	0~Reference	15.10	15.10	---	PASS
TX	Ant1	903	30~10000	15.10	-26.18	≤-4.9	PASS
TX	Ant1	912.5	0~Reference	14.45	14.45	---	PASS
TX	Ant1	912.5	30~10000	14.45	-26.47	≤-5.55	PASS
TX	Ant1	922.5	0~Reference	14.27	14.27	---	PASS
TX	Ant1	922.5	30~10000	14.27	-28.21	≤-5.73	PASS

Test Graphs

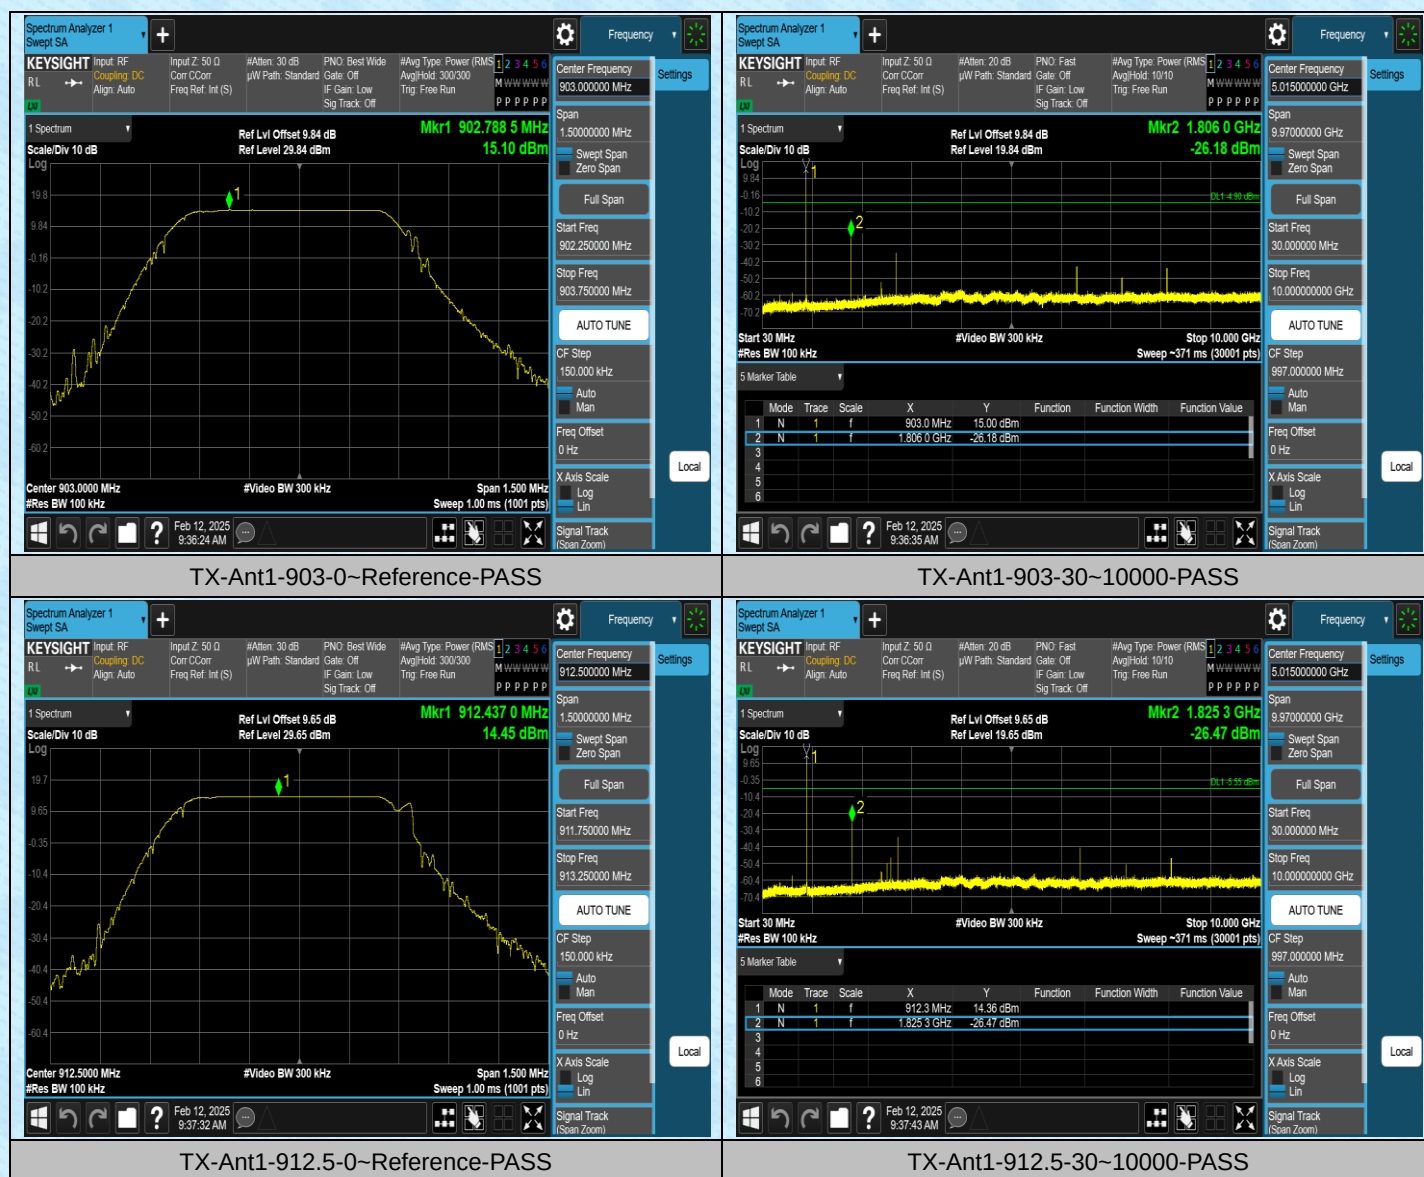



TX-Ant1-922.5-0~Reference-PASS

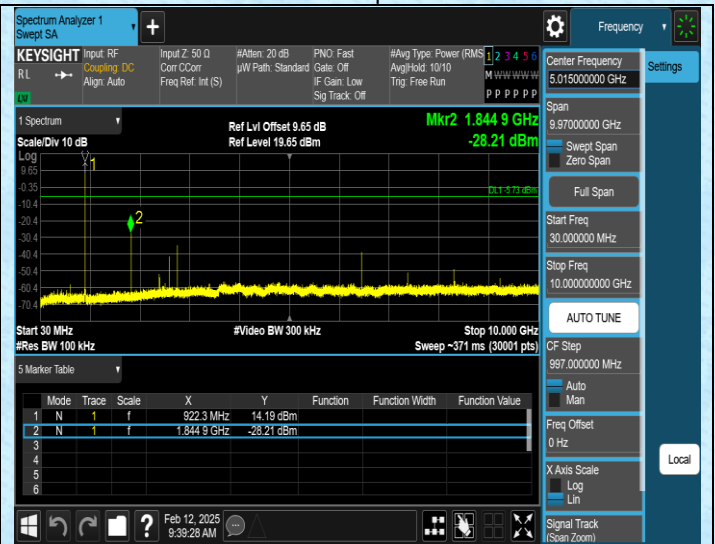


TX-Ant1-922.5-30~10000-PASS

AppendixG: Duty Cycle

Test Result

TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
TX	Ant1	903	82.00	134.00	61.19	2.13
TX	Ant1	912.5	82.00	134.00	61.19	2.13
TX	Ant1	922.5	82.00	134.00	61.19	2.13

Test Graphs

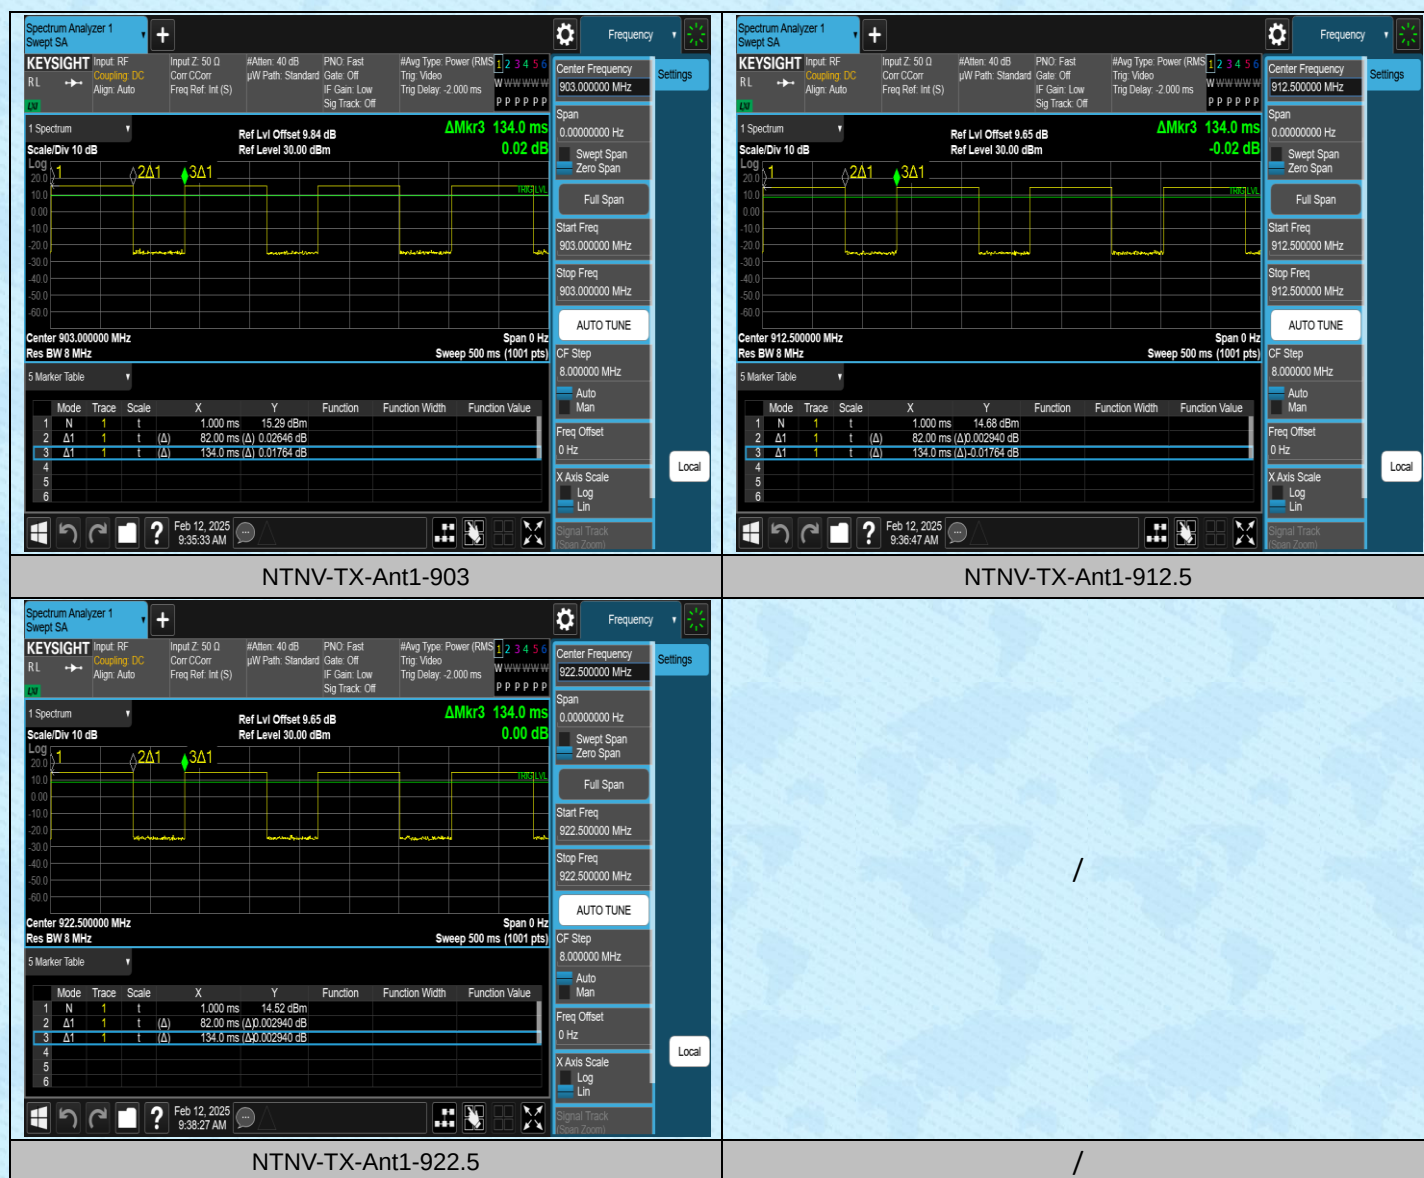

-----End-----