



# TEST REPORT

**Applicant:** MAXWEST COMMUNICATION LIMITED

Address: FLAT/RM 707 7/F, FORTRESS TOWER 250 KING'S ROAD, NORTH POINT, HONG KONG

**FCC ID:** 2ASP8NE08

**Product Name:** Phone

**Standard(s):** 47 CFR Part 2, 47 CFR Part 22, Subpart H  
47 CFR Part 24, Subpart E  
ANSI C63.26-2015  
KDB 971168 D01 Power Meas License Digital Systems v03r01  
KDB 971168 D02 Misc Rev Approv License Devices v02r02

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number:** 2503Q17178E-RF-00B

**Date Of Issue:** 2025/2/20

**Reviewed By:** Calvin Chen

Title: RF Engineer

**Approved By:** Sun Zhong

Title: Manager

**Test Laboratory:** China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China

Tel: +86-769-83085888

[www.cctt.com.cn](http://www.cctt.com.cn)

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

Each test item follows the test standard(s) without deviation.

## CONTENTS

<b>DOCUMENT REVISION HISTORY .....</b>	<b>4</b>
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
<b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b>	<b>5</b>
<b>1.2 DESCRIPTION OF TEST CONFIGURATION.....</b>	<b>6</b>
1.2.1 EUT Operation Condition: .....	6
1.2.2 Support Equipment List and Details .....	7
1.2.3 Support Cable List and Details .....	7
1.2.4 Block Diagram of Test Setup.....	7
<b>1.3 MEASUREMENT UNCERTAINTY .....</b>	<b>8</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>	<b>10</b>
3.1 Applicable Standard For Part 22 Subpart H.....	10
3.2 Applicable Standard For Part 24 Subpart E .....	12
3.3 Test Method .....	13
<b>4. Test DATA AND RESULTS .....</b>	<b>20</b>
<b>4.1 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 850 BAND .....</b>	<b>20</b>
<b>4.2 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 1900 BAND .....</b>	<b>26</b>
<b>4.3 RADIATED SPURIOUS EMISSIONS.....</b>	<b>32</b>
<b>5. EUT PHOTOGRAPHS .....</b>	<b>37</b>
<b>6. TEST SETUP PHOTOGRAPHS .....</b>	<b>38</b>

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2503Q17178E-RF-00B	Original Report	2025/2/20

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>	Phone
<b>EUT Model:</b>	NEO 8
<b>Operation Bands and modes:</b>	GSM/GPRS: 850/1900
<b>Modulation Type:</b>	GMSK
<b>Rated Input Voltage:</b>	DC 3.7V from battery or DC 5V from adapter
<b>Sample Number:</b>	2Y6T-1(for RF Conducted Test) 2Y6T-2 (Radiated Emissions Test)
<b>EUT Received Date:</b>	2025/2/10
<b>EUT Received Status:</b>	Good

#### Operation Voltage (V<sub>DC</sub>) ▲:

Lowest:	3.5	Normal:	3.7	Highest:	4.2
---------	-----	---------	-----	----------	-----

#### Transmission Antenna Information▲:

Antenna Type	Operation Bands	Antenna Frequency Range (MHz)	Antenna Gain (G <sub>T</sub> ) (dBi)	Lc(dB)
PIFA	GSM850	824-849	-1.55	0
	PCS1900	1850-1910	0.36	0

#### Note:

1. Lc= Signal Attenuation in the connecting cable between the transmitter and antenna, in dB; which declared by the manufacturer.

#### Accessory Information:

Accessory Description	Manufacturer	Model
Adapter	maxwest	NEO 8

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

<b>EUT Operation Mode:</b>	The system was configured for testing in each operation mode.
<b>Equipment Modifications:</b>	No
<b>EUT Exercise Software:</b>	No
The maximum power was configured per 3GPP Standard for each operation modes as below setting:	
GSM/GPRS	
Function:	Menu select > GSM Mobile Station > GSM 850/1900
Press Connection control to choose the different menus	
Press RESET > choose all the reset all settings	
Connection	Press Signal Off to turn off the signal and change settings
Network Support	> GSM + GPRS or GSM + EGSM
Main Service	> Packet Data
Service selection	> Test Mode A – Auto Slot Config. off
MS Signal	Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting
	> Slot configuration > Uplink/Gamma
	> 33 dBm for GPRS 850
	> 30 dBm for GPRS 1900
	> 27 dBm for EGPRS 850
	> 26 dBm for EGPRS 1900
BS Signal	Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset >	+ 0 Hz
Mode >	BCCH and TCH
BCCH Level >	-85 dBm (May need to adjust if link is not stable)
BCCH Channel >	choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
Channel Type >	Off
P0 >	4 dB
Slot Config >	Unchanged (if already set under MS signal)
TCH >	choose desired test channel
Hopping >	Off
Main Timeslot >	3
Network	Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)
Bit Stream >	2E9-1 PSR Bit Stream
AF/RF Connection	Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input Press Signal on to turn on the signal and change settings


### 1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Unknown	Antenna	Unknown	Unknown
R&S	Wideband Radio Communication Tester	CMW500	143458
maxwest	Adapter	NEO 8	Unknown
maxwest	Earphone	Unknown	Unknown

### 1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Coaxial Cable	Yes	No	10	Antenna	CMW500
Adapter Cable	No	No	0.9	Adapter	EUT
Earphone Cable	No	No	1	Earphone	EUT

### 1.2.4 Block Diagram of Test Setup

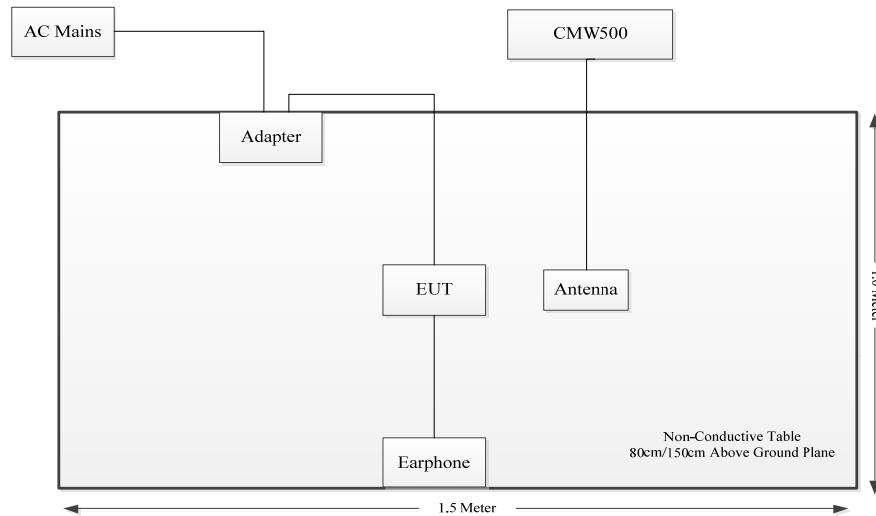

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{ dB}$
Power Spectral Density, conducted	$\pm 0.61\text{ dB}$
Unwanted Emissions, radiated	9kHz~30MHz: 4.12dB, 30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	$\pm 1.26\text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%
RF Frequency	$\pm 0.082 \times 10^{-6}$

## 2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§2.1046; § 22.913; § 24.232	RF Output Power	Compliant
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905; § 22.917; § 24.23	Occupied Bandwidth	Compliant
FCC§ 2.1051; § 22.917; § 24.238	Spurious Emissions at Antenna Terminal	Compliant
FCC§ 22.917; § 24.238	Out of band emission, Band Edge	Compliant
FCC§ 2.1055; § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant
FCC§ 2.1053; § 22.917; § 24.238	Field Strength of Spurious Radiation	Compliant

### **3. REQUIREMENTS AND TEST PROCEDURES**

---

#### **3.1 Applicable Standard For Part 22 Subpart H**

##### **3.1.1 RF Output Power**

FCC §22.913

(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) *Power measurement.* Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-toaverage ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (*see* FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rmsequivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, *etc.*, so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

##### **3.1.2 Spurious Emissions**

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

- (1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

##### **3.1.3 Frequency stability**

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	<b>2.5</b>	<b>2.5</b>
928 to 929	5	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a

### 3.2 Applicable Standard For Part 24 Subpart E

#### 3.2.1 RF Output Power

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 3.2.2 Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

#### 3.2.3 Frequency stability

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 3.3 Test Method

#### 3.3.1 Transmitter output power, e.r.p. and e.i.r.p

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5 and KDB 971168 D01 Power Meas License Digital Systems v03r01:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:


ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_T$  = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

#### Test Setup Block:

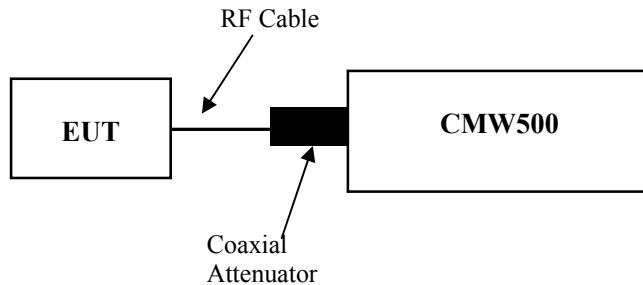

Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

### 3.3.2 Occupied Bandwidth


According to ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of  $1.5 \times$  OBW is sufficient).
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.  
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.
- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

#### Test Setup Block:

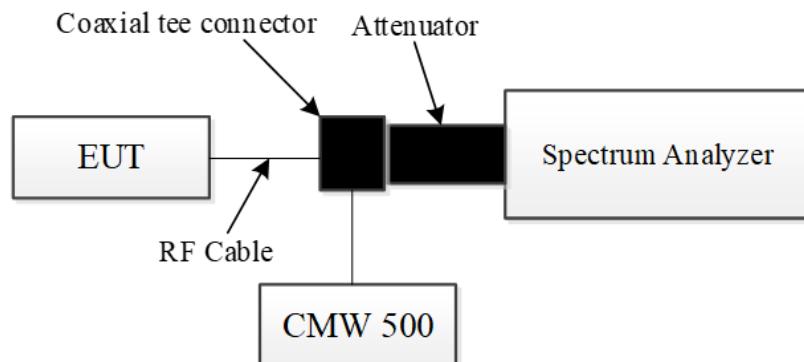


### 3.3.3 Transmitter unwanted emissions-at antenna terminals

According to ANSI C63.26-2015 Section 5.7.4, KDB 971168 D01 Power Meas License Digital Systems v03r01:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),<sup>8</sup> effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

#### Test Setup Block:

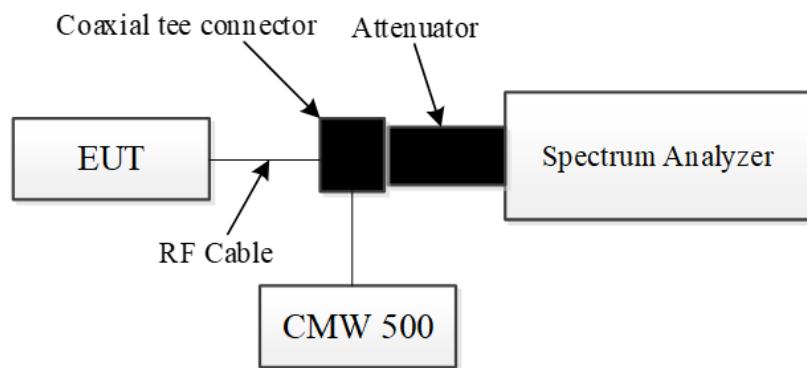


### 3.3.4 Transmitter unwanted emissions-Out of band emission

According to ANSI C63.26-2015 Section 5.7.3, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

#### Test Setup Block:

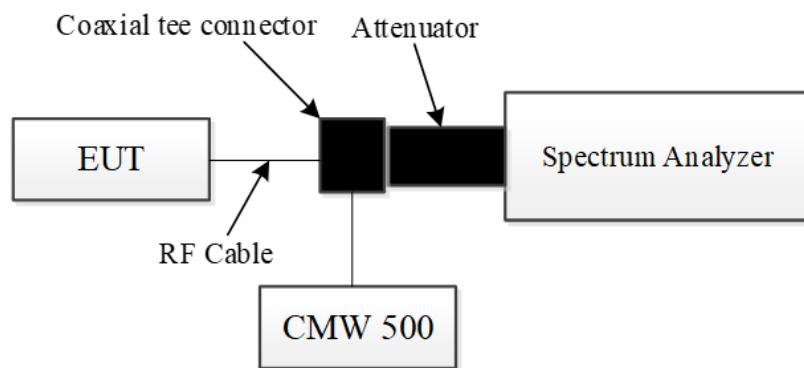

### 3.3.5 Frequency stability

According to ANSI C63.26-2015 Section 5.6, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.


The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and ±15% supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

#### Test Setup Block:

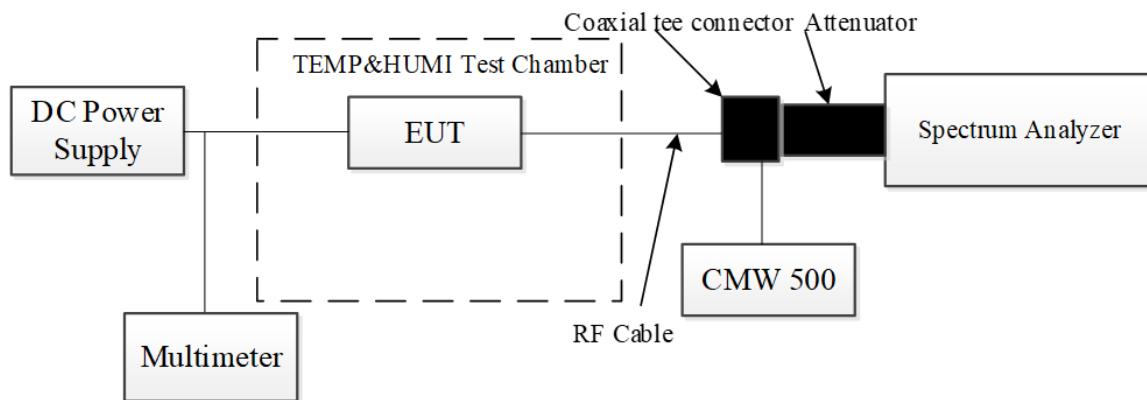

### 3.3.6 Transmitter unwanted emissions- Radiated Spurious emissions

According to ANSI C63.26-2015 Section 5.5.3:

**Test setup:**

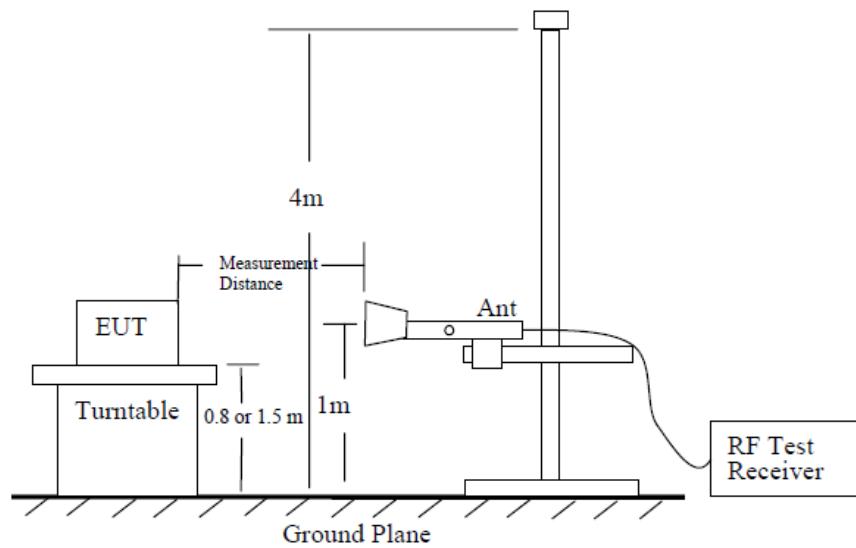


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

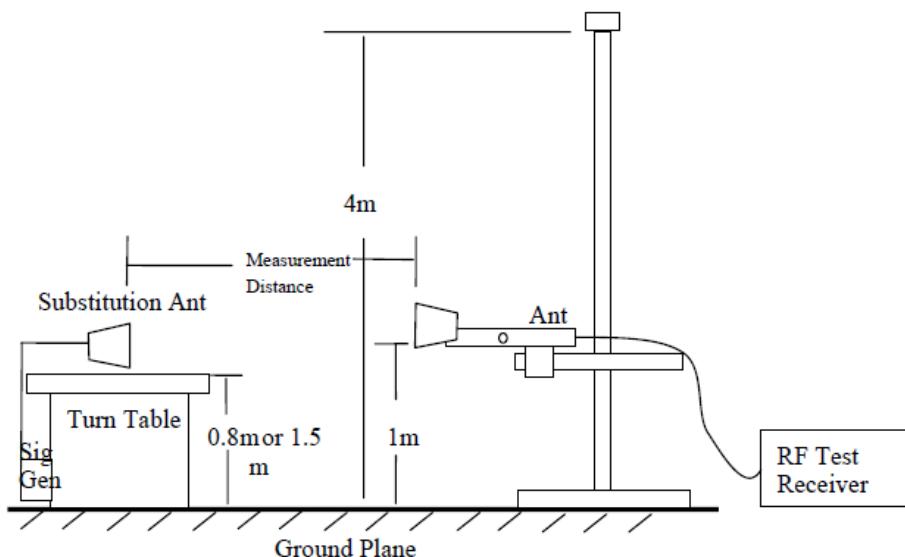


Figure 7—Substitution method set-up for radiated emission

**Test Procedure:**

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
  - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
  - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
  - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
  - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
  - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
  - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
  - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
  - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$Pe = Ps(dBm) - \text{cable loss (dB)} + \text{antenna gain (dBD)}$$
where
  - Pe = equivalent emission power in dBm
  - Ps = source (signal generator) power in dBmNOTE—dBD refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: gain (dBD) = gain (dBi) – 2.15 dB. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

## 4. Test DATA AND RESULTS

### 4.1 Antenna Port Test Data and Results for GSM 850 band

Sample Number:	2Y6T-1	Test Date:	2025/2/11-2025/2/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	<b>Pass</b>

Environmental Conditions:					
Temperature: (°C)	23.4-24.3	Relative Humidity: (%)	45-49	ATM Pressure: (kPa)	101.4-101.7

Test Equipment List and Details:					
Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2024/4/1	2025/3/31
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
Anritsu	Radio Communication Analyzer	MT8820C	6201010144	2024/7/12	2025/7/11
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2024/4/1	2025/3/31
UNI-T	Multimeter	UT39A+	C210582554	2025/1/6	2026/1/5
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:			
Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	824.2	836.6	848.8
GPRS	824.2	836.6	848.8

**Test Data:**

<b>RF Output Power</b>					
Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	30.23	30.35	<b>30.45</b>	26.75	38.45
GPRS 1 Slot	30.18	30.3	30.41	26.71	38.45
GPRS 2 Slots	29.82	29.94	30.13	26.43	38.45
GPRS 3 Slots	26.03	26.12	26.28	22.58	38.45
GPRS 4 Slots	24.09	24.22	24.36	20.66	38.45

Note:  
ERP= Conducted Power(dBm) - Lc(dB) + G<sub>T</sub>(dBd)  
G<sub>T</sub>(dBd)=G<sub>T</sub>(dBi)-2.15

	<b>Result:</b>	<b>Pass</b>
--	----------------	-------------

<b>Occupied Bandwidth</b>						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.237	0.237	0.237	0.263	0.258	0.26


Note: The test plots please refer to the Plots of Occupied Bandwidth


<b>Spurious Emissions at Antenna Terminal</b>	
<b>Result:</b>	<b>Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.</b>


<b>Out of band emission, Band Edge</b>	
<b>Result:</b>	<b>Pass, Please refer to the test plots of Out of band emission, Band Edge.</b>

<b>Frequency Stability</b>					
Test Modulation:	GMSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.7	16	0.019	2.5
	-20	3.7	12	0.014	2.5
	-10	3.7	26	0.031	2.5
	0	3.7	9	0.011	2.5
	10	3.7	13	0.016	2.5
	20	3.7	6	0.007	2.5
	30	3.7	23	0.027	2.5
	40	3.7	6	0.007	2.5
	50	3.7	51	0.061	2.5
Frequency Stability vs. Voltage	20	3.5	22	0.026	2.5
	20	4.2	38	0.045	2.5
				<b>Result:</b>	<b>Pass</b>

**Test Plots** (Note: The 14.5 dB is the Insertion loss of the RF cable, Coaxial tee connector and Attenuator, which was offset into the Spectrum Analyzer):

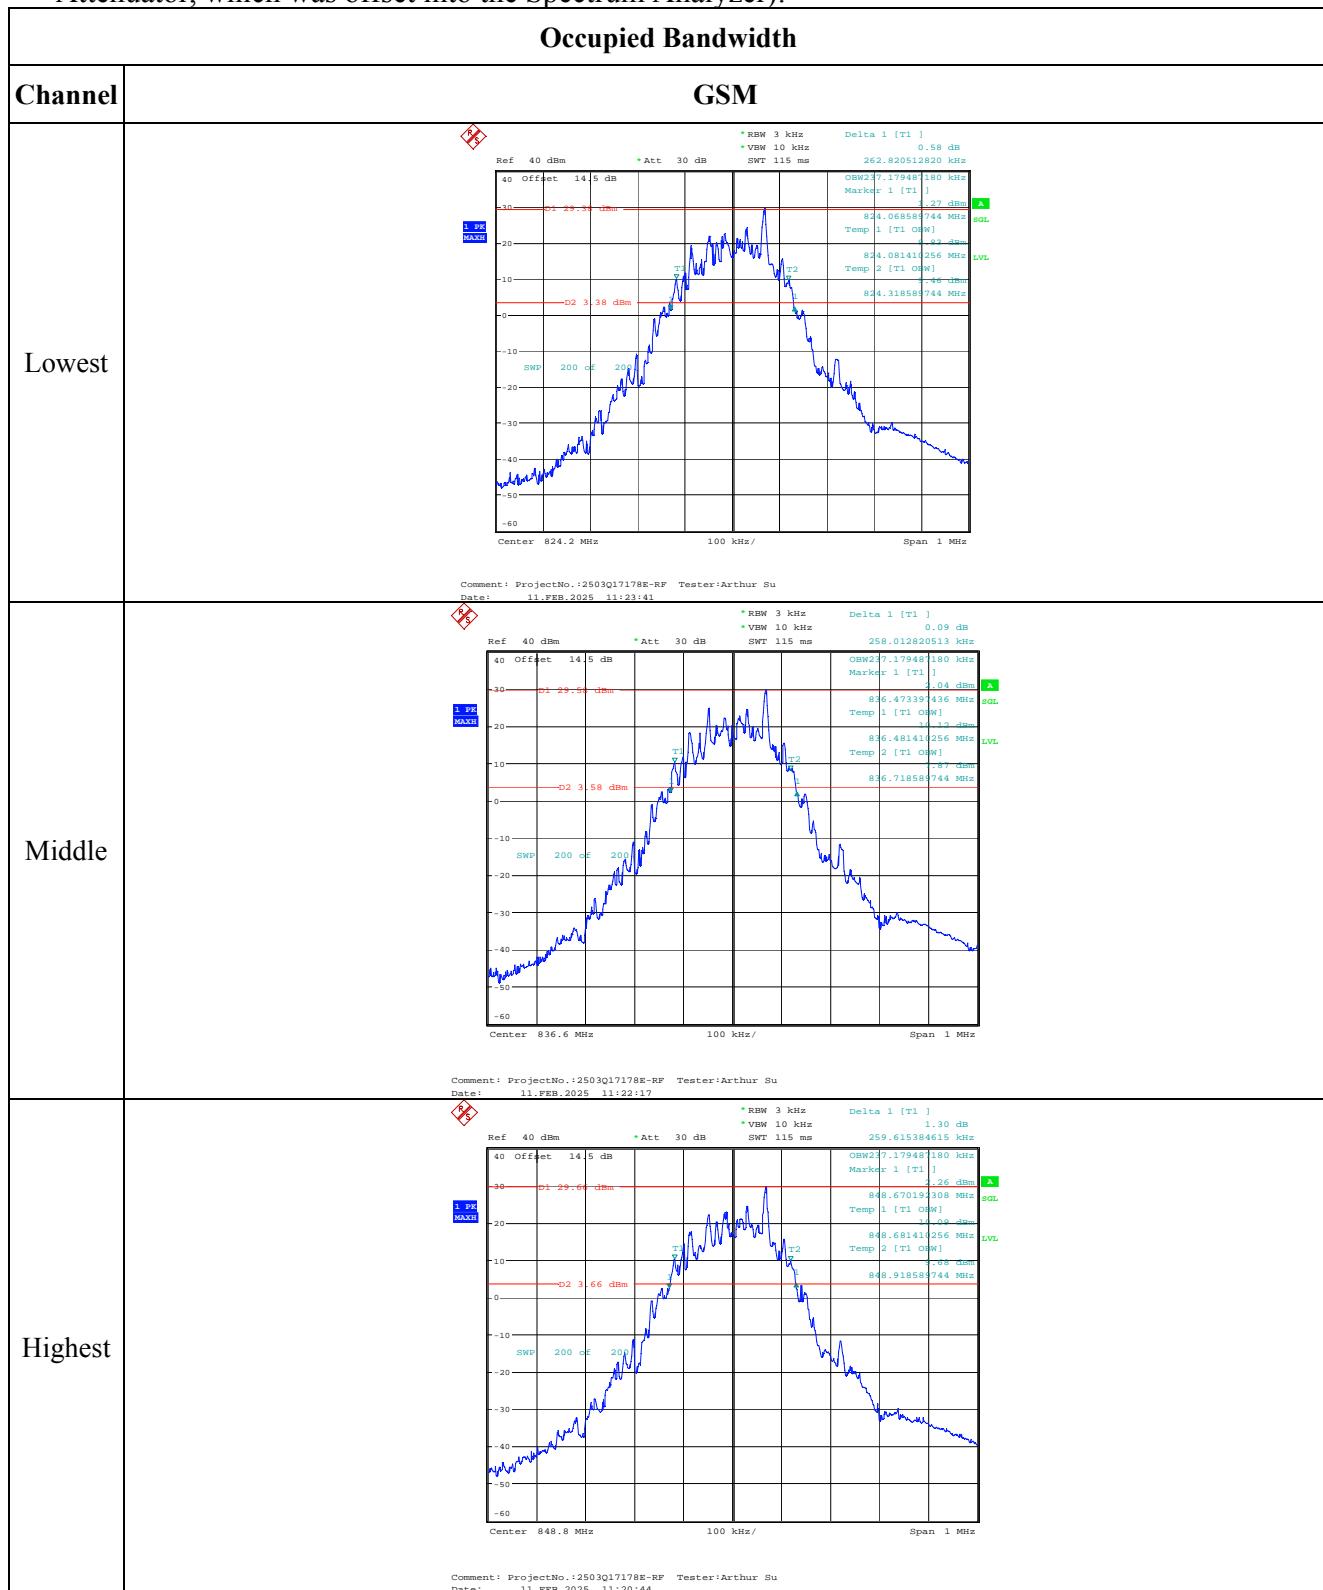

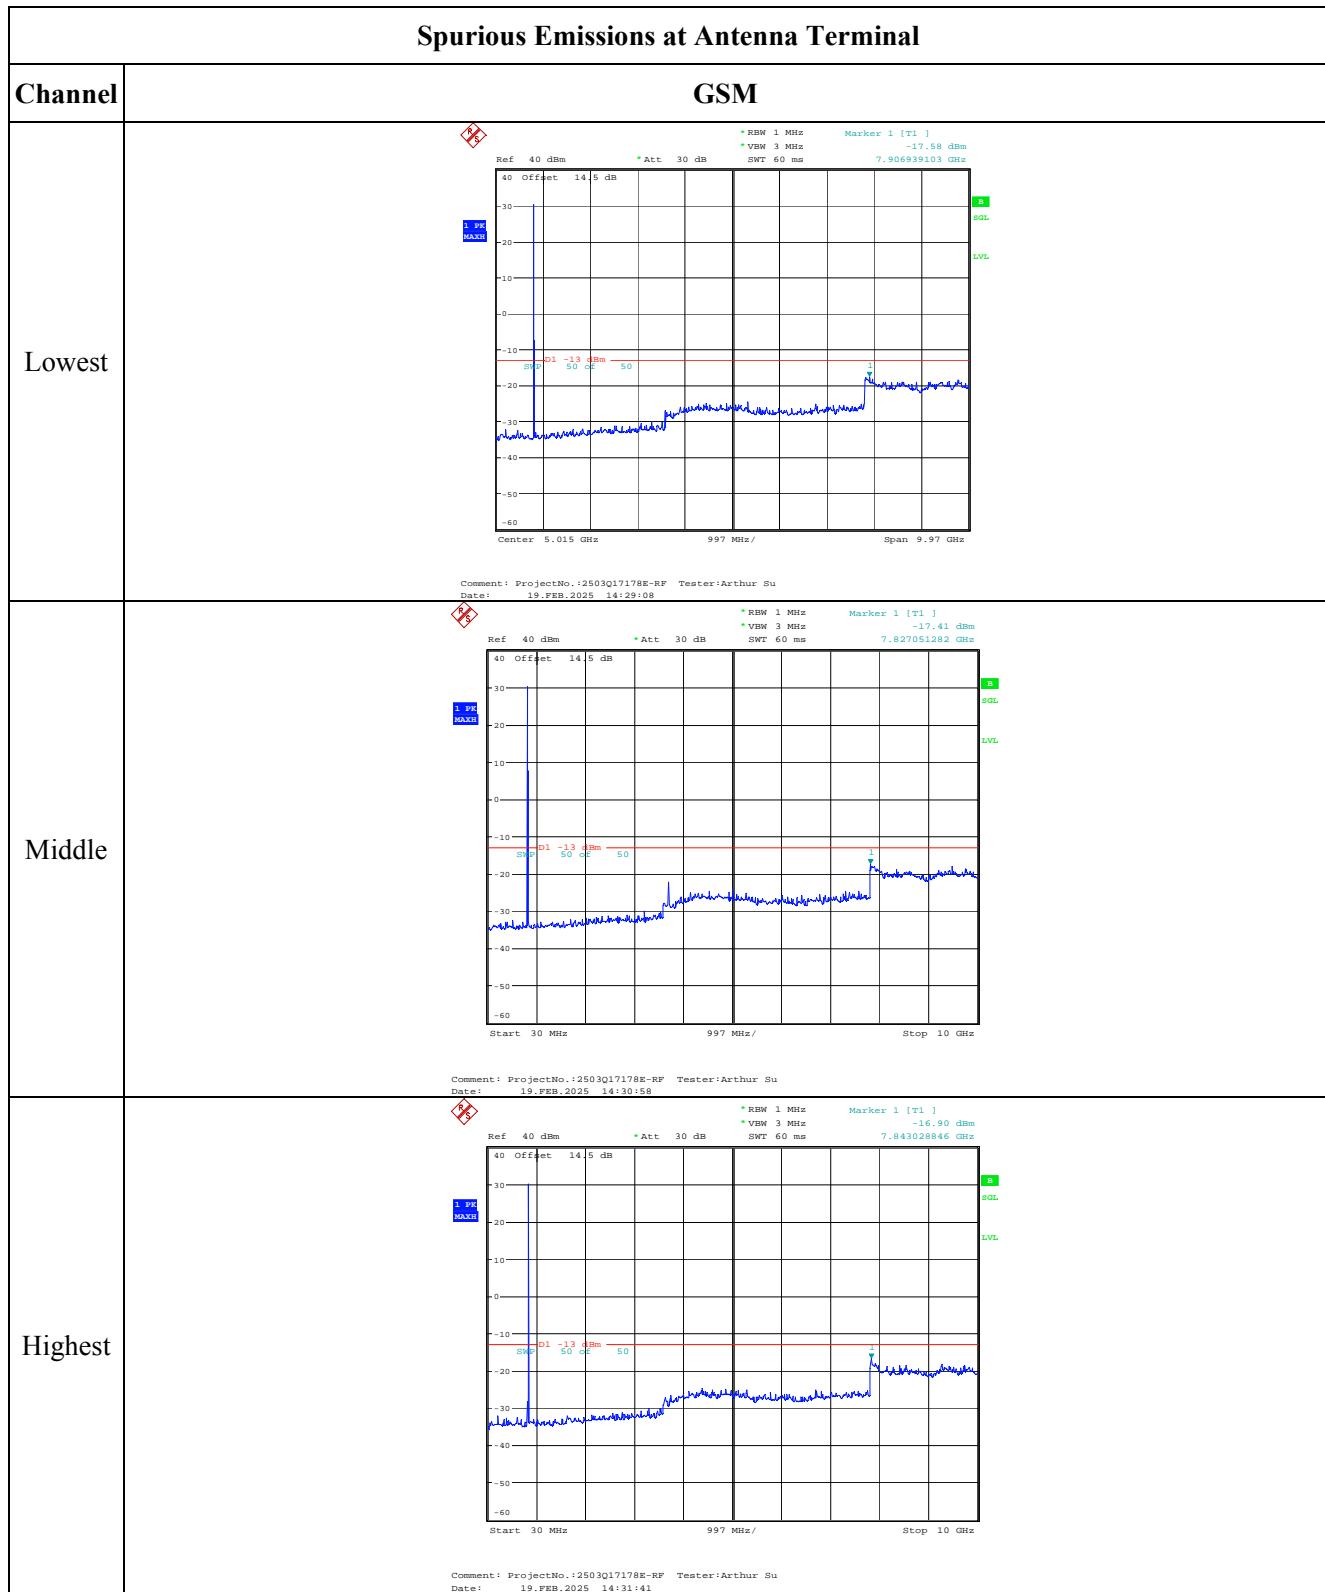

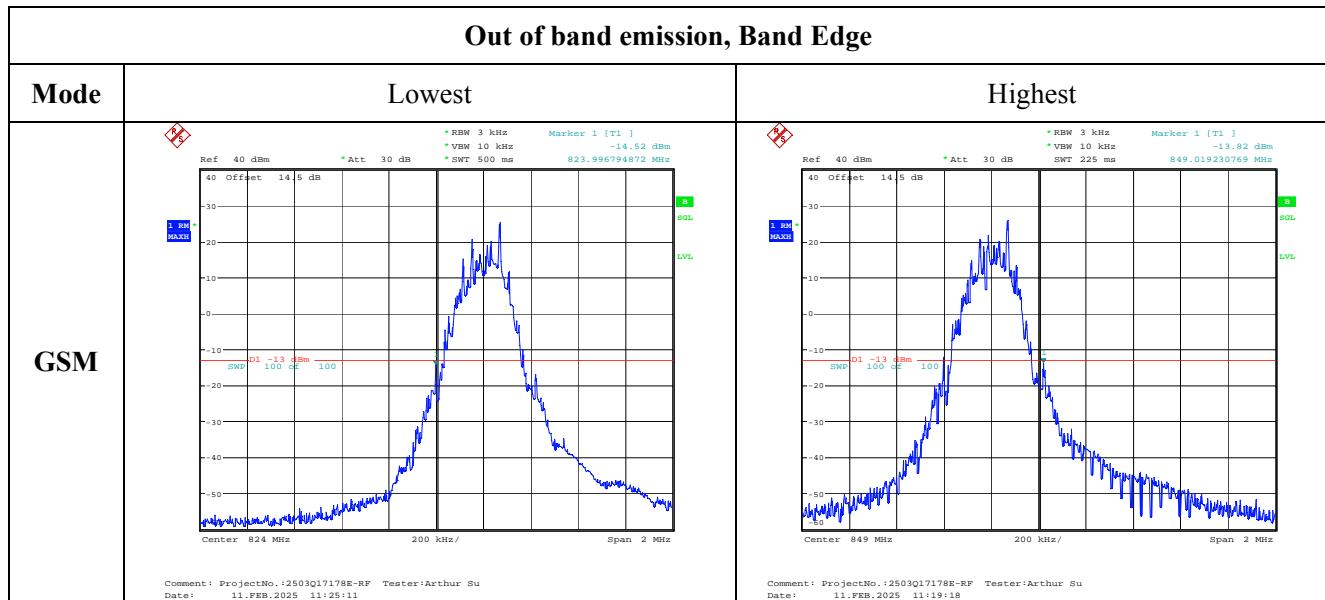

#### 4.2 Antenna Port Test Data and Results for GSM 1900 band

Sample Number:	2Y6T-1	Test Date:	2025/2/11-2025/2/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	<b>Pass</b>

#### Environmental Conditions:

Temperature: (°C)	23.4-24.3	Relative Humidity: (%)	45-49	ATM Pressure: (kPa)	101.4-101.7
-------------------	-----------	------------------------	-------	---------------------	-------------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2024/4/1	2025/3/31
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
Anritsu	Radio Communication Analyzer	MT8820C	6201010144	2024/7/12	2025/7/11
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2024/4/1	2025/3/31
UNI-T	Multimeter	UT39A+	C210582554	2025/1/6	2026/1/5
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	1850.2	1880	1909.8
GPRS	1850.2	1880	1909.8

**Test Data:**

<b>RF Output Power</b>					
Test Mode	Conducted Peak Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	27.21	27.37	<b>27.56</b>	27.92	33
GPRS 1 Slot	27.16	27.27	27.55	27.91	33
GPRS 2 Slots	26.86	27.3	27.35	27.71	33
GPRS 3 Slots	22.93	22.91	23.29	23.65	33
GPRS 4 Slots	20.63	20.72	21.05	21.41	33

Note: EIRP=Conducted Power(dBm) -  $L_c$ (dB) +  $G_T$ (dBi)

	<b>Result:</b>	<b>Pass</b>
--	----------------	-------------

<b>Occupied Bandwidth</b>						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	
GSM	0.24	0.237	0.239	0.273	0.262	0.277


Note: The test plots please refer to the Plots of Occupied Bandwidth


<b>Spurious Emissions at Antenna Terminal</b>	
<b>Result:</b>	<b>Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.</b>


<b>Out of band emission, Band Edge</b>	
<b>Result:</b>	<b>Pass, Please refer to the test plots of Out of band emission, Band Edge.</b>

<b>Frequency Stability</b>						
Test Mode:	GMSK	Test Channel: Lowest for Lower Edge, Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.7	1850.081	1850.000	1909.964	1910.000
	-20	3.7	1850.076	1850.000	1909.966	1910.000
	-10	3.7	1850.076	1850.000	1909.930	1910.000
	0	3.7	1850.073	1850.000	1909.969	1910.000
	10	3.7	1850.097	1850.000	1909.934	1910.000
	20	3.7	1850.083	1850.000	1909.923	1910.000
	30	3.7	1850.070	1850.000	1909.943	1910.000
	40	3.7	1850.077	1850.000	1909.948	1910.000
	50	3.7	1850.056	1850.000	1909.946	1910.000
Frequency Stability vs. Voltage	20	3.5	1850.067	1850.000	1909.949	1910.000
	20	4.2	1850.070	1850.000	1909.934	1910.000
					<b>Result:</b>	<b>Pass</b>

**Test Plots** (Note: The 14.5 dB is the Insertion loss of the RF cable, Coaxial tee connector and Attenuator, which was offset into the Spectrum Analyzer):

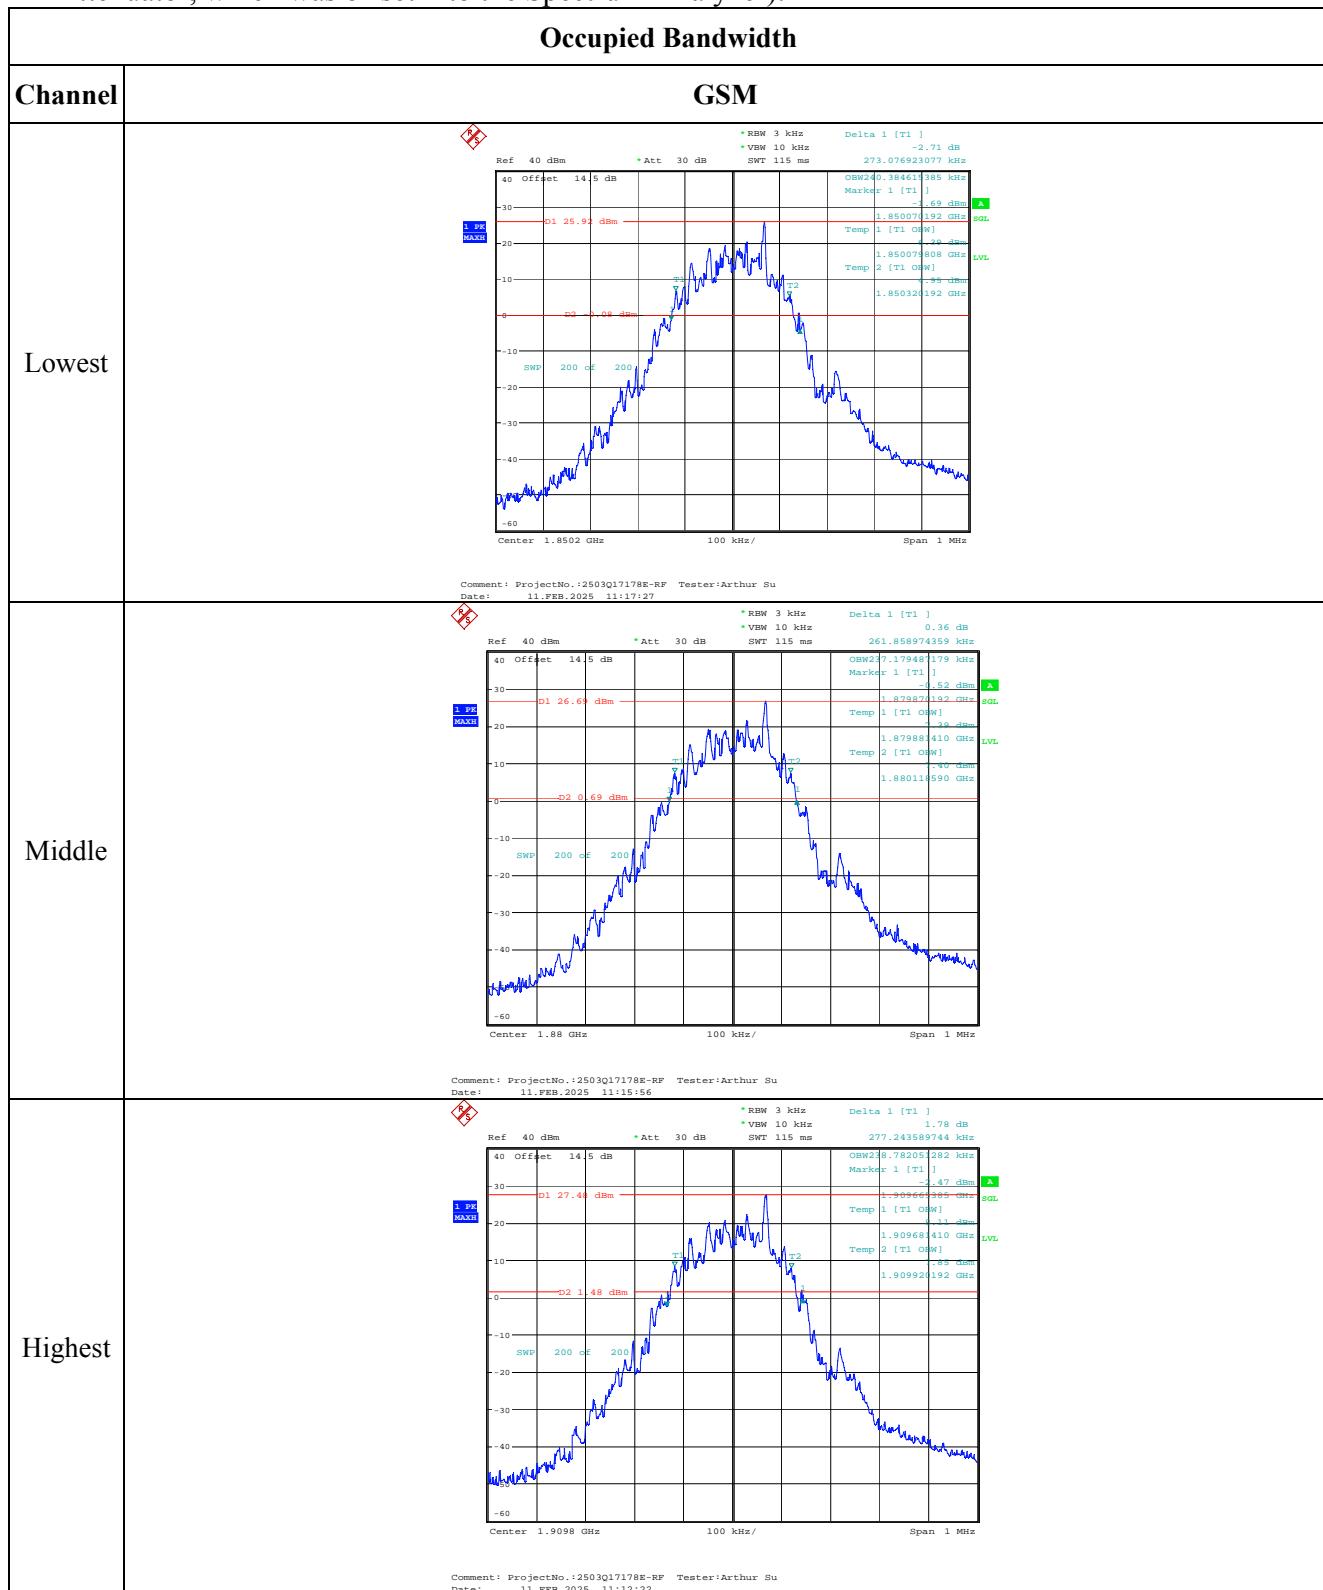

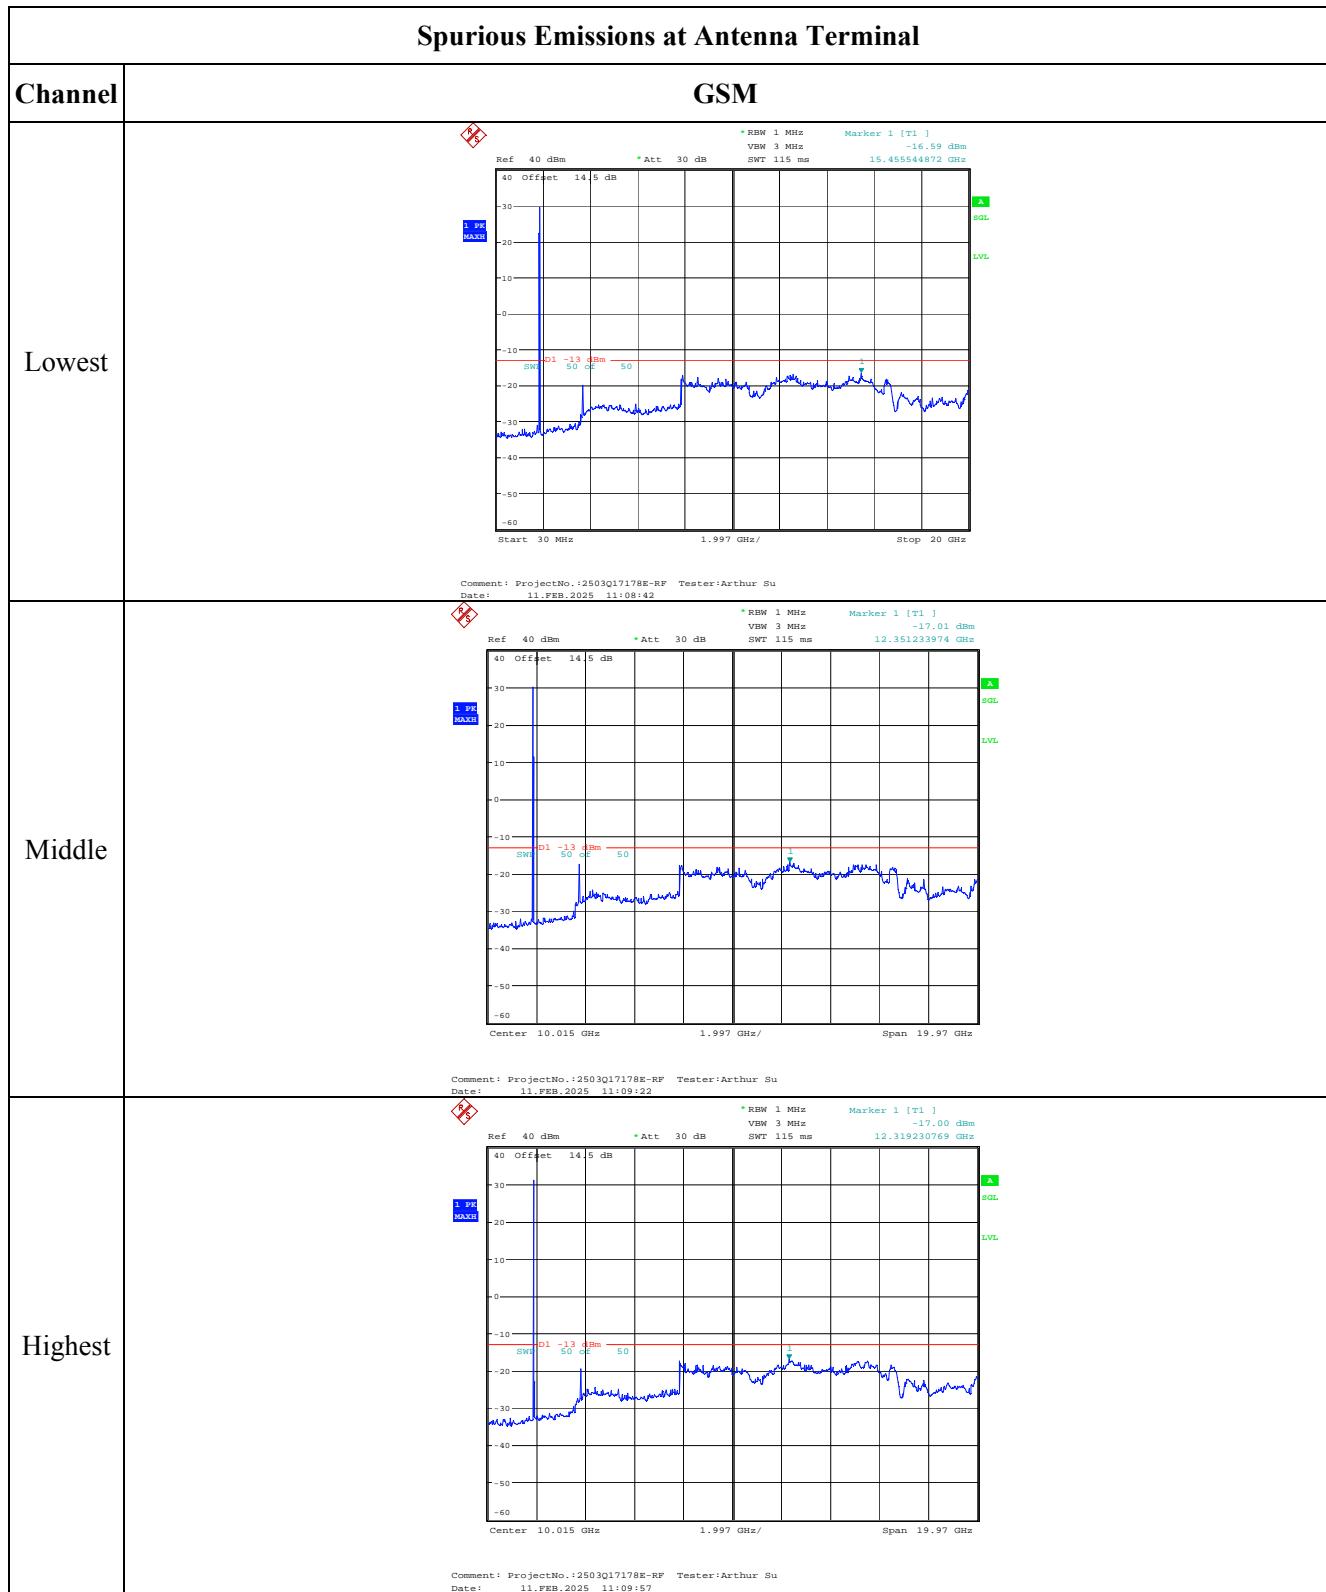

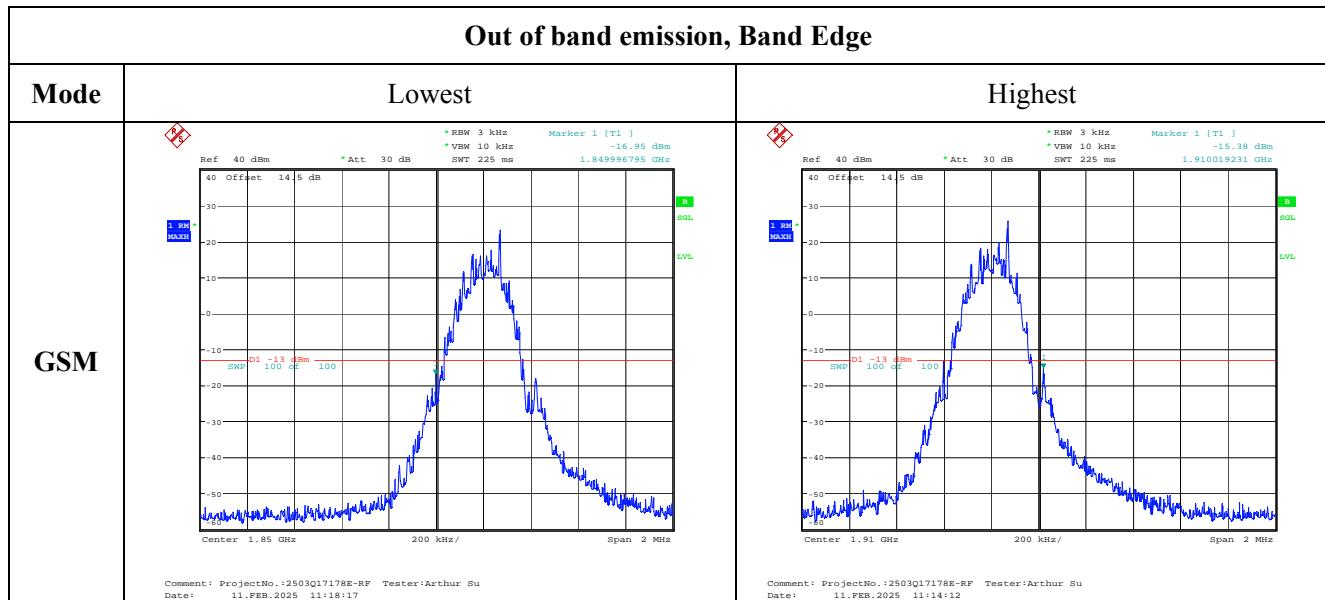

### 4.3 Radiated Spurious Emissions

#### 1) Below 1GHz

Sample Number:	2Y6T-2	Test Date:	2025/2/13
Test Site:	966-2	Test Mode:	Transmitting
Tester:	Roinin Fu	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	24.9	Relative Humidity: (%)	51	ATM Pressure: (kPa)	101.4

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2023/12/1	2026/11/30
R&S	EMI Test Receiver	ESR3	102724	2024/2/29	2025/2/28
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0100-03	2024/12/3	2025/12/2
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0370-01	2024/12/3	2025/12/2
XQY	Coaxial Cable	XQY-CMR400UF-NJ-NJ-7M	24056379	2024/6/11	2025/6/10
Sonoma	Amplifier	310N	186165	2024/12/3	2025/12/2
EMCO	Adjustable Dipole Antenna	3121C	9109-756	N/A	N/A
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2024/7/15	2025/7/14
Agilent	Signal Generator	E8247C	MY43321352	2025/1/9	2026/1/8

**\* Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

**Cellular Band (PART 22H)****GSM 850:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB $\mu$ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency: 824.2 MHz								
236.48	H	21.19	-59.74	0.00	0.29	-60.03	-13.00	47.03
342.65	V	20.79	-55.91	0.00	0.37	-56.28	-13.00	43.28
Frequency: 836.6 MHz								
156.72	H	21.83	-58.51	0.00	0.23	-58.74	-13.00	45.74
322.42	V	20.69	-56.42	0.00	0.34	-56.76	-13.00	43.76
Frequency: 848.8 MHz								
367.58	H	21.34	-57.03	0.00	0.37	-57.40	-13.00	44.40
426.85	V	20.53	-53.95	0.00	0.39	-54.34	-13.00	41.34

**PCS Band (PART 24E)****GSM 1900:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB $\mu$ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency: 1850.2 MHz								
80.39	H	41.79	-68.12	0.00	0.16	-68.28	-13.00	55.28
78.68	V	42.39	-65.40	-0.66	0.16	-66.22	-13.00	53.22
Frequency: 1880 MHz								
80.12	H	42.10	-67.72	0.00	0.16	-67.88	-13.00	54.88
79.34	V	43.67	-64.52	-0.33	0.16	-65.01	-13.00	52.01
Frequency: 1909.8 MHz								
78.76	H	41.25	-67.79	-0.62	0.16	-68.57	-13.00	55.57
79.57	V	42.85	-65.47	-0.22	0.16	-65.85	-13.00	52.85

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2: Absolute Level = Substituted Level - Cable Loss+ Antenna Gain

Margin = Limit - Absolute Level

**2) Above 1GHz**

Sample Number	2Y6T-2	Test Date:	2025/2/19
Test Site:	966-1	Test Mode:	Transmitting
Tester:	Mack Huang	Test Result:	Pass

<b>Environmental Conditions:</b>					
Temperature: (°C)	24.1	Relative Humidity: (%)	51	ATM Pressure: (kPa)	101.7

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	9912-5985	2023/12/6	2026/12/5
R&S	Spectrum Analyzer	FSV40	101591	2024/4/1	2025/3/31
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2025/1/10	2026/1/9
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2025/1/10	2026/1/9
BACL	Preamplifier	1313-A20M18G	4032311	2024/4/1	2025/3/31
AH	Double Ridge Guide Horn Antenna	SAS-571	1396	2023/2/22	2026/2/21
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2024/7/15	2025/7/14
Agilent	Signal Generator	E8247C	MY43321352	2025/1/9	2026/1/8
PASTERNACK	Horn Antenna	PE9852/2F-20	112002	2024/2/4	2027/2/3
PASTERNACK	Horn Antenna	PE9852/2F-20	112001	2024/2/4	2027/2/3
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2025/1/6	2026/1/5
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2025/1/6	2026/1/5
JD	Multiplex Switch Test Control Set	DT7220SCU	DQ77925	2024/8/5	2025/8/4
JD	Filter Switch Unit	DT7220FSU	DQ77928	2024/8/5	2025/8/4

**\* Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

**Cellular Band (PART 22H)****GSM850(1-10GHz):**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB $\mu$ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency: 824.2 MHz								
1648.400	H	44.38	-60.07	8.68	0.80	-52.19	-13.00	39.19
1648.400	V	64.64	-39.89	8.68	0.80	-32.01	-13.00	19.01
2472.600	H	43.57	-57.46	9.38	1.00	-49.08	-13.00	36.08
2472.600	V	50.35	-50.63	9.38	1.00	-42.25	-13.00	29.25
3296.800	H	34.67	-62.71	10.32	1.15	-53.54	-13.00	40.54
3296.800	V	34.21	-62.93	10.32	1.15	-53.76	-13.00	40.76
Frequency: 836.6 MHz								
1673.200	H	46.23	-58.19	8.71	0.85	-50.33	-13.00	37.33
1673.200	V	64.46	-40.07	8.71	0.85	-32.21	-13.00	19.21
2509.800	H	42.79	-58.04	9.42	1.01	-49.63	-13.00	36.63
2509.800	V	48.84	-52.00	9.42	1.01	-43.59	-13.00	30.59
3346.400	H	34.22	-63.84	10.34	1.16	-54.66	-13.00	41.66
3346.400	V	34.76	-63.16	10.34	1.16	-53.98	-13.00	40.98
Frequency: 848.8 MHz								
1697.600	H	51.48	-52.91	8.74	0.90	-45.07	-13.00	32.07
1697.600	V	74.27	-30.25	8.74	0.90	-22.41	-13.00	9.41
2546.400	H	46.50	-54.11	9.47	1.01	-45.65	-13.00	32.65
2546.400	V	63.94	-36.62	9.47	1.01	-28.16	-13.00	15.16
3395.200	H	33.56	-65.23	10.36	1.19	-56.06	-13.00	43.06
3395.200	V	45.83	-52.93	10.36	1.19	-43.76	-13.00	30.76

**PCS Band (PART 24E)****GSM1900(1-20GHz):**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB $\mu$ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency: 1850.2 MHz								
3700.400	H	42.55	-56.43	10.60	1.25	-47.08	-13.00	34.08
3700.400	V	42.56	-56.40	10.60	1.25	-47.05	-13.00	34.05
5550.600	H	46.32	-49.85	11.44	1.49	-39.90	-13.00	26.90
5550.600	V	51.57	-44.43	11.44	1.49	-34.48	-13.00	21.48
Frequency: 1880 MHz								
3760.000	H	42.26	-55.44	10.66	1.24	-46.02	-13.00	33.02
3760.000	V	45.46	-52.12	10.66	1.24	-42.70	-13.00	29.70
5640.000	H	46.48	-50.32	11.33	1.54	-40.53	-13.00	27.53
5640.000	V	52.10	-44.58	11.33	1.54	-34.79	-13.00	21.79
Frequency: 1909.8 MHz								
3819.600	H	40.72	-56.27	10.72	1.29	-46.84	-13.00	33.84
3819.600	V	47.01	-49.83	10.72	1.29	-40.40	-13.00	27.40
5729.400	H	47.68	-49.46	11.22	1.59	-39.83	-13.00	26.83
5729.400	V	50.45	-46.56	11.22	1.59	-36.93	-13.00	23.93

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2: Absolute Level = Substituted Level - Cable Loss+ Antenna Gain

Margin = Limit - Absolute Level

## **5. EUT PHOTOGRAPHS**

Please refer to the attachment 2503Q17178E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2503Q17178E-RF-INP EUT INTERNAL PHOTOGRAPHS

## **6. TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment 2503Q17178E-RF-00B-TSP TEST SETUP PHOTOGRAPHS.

**===== END OF REPORT =====**