

Test Report

Report No. : CQASZ20190500019EX-01
Applicant: MAYFLASH LIMITED
Address of Applicant: 3/F, Buiding No.1, TingWei Industrial Park, LiuFang Rd, No.67, BaoAn, Shenzhen, China.
Manufacturer: MAYFLASH LIMITED
Address of Manufacturer: 3/F, Buiding No.1, TingWei Industrial Park, LiuFang Rd, No.67, BaoAn, Shenzhen, China.
Equipment Under Test (EUT):
Product: MAGIC-S V1.1
Test Model No.: MAGIC-S V1.1
Brand Name: N/A
FCC ID: 2ASVQ-MAGICSV1
Standards: 47 CFR Part 15, Subpart C
Date of Test: May 10, 2019 to May 30, 2019
Date of Issue: May 30, 2019
Test Result : PASS*

Tested By:

Daisy Qin

Reviewed By:

(Daisy Qin)
Aaron Ma

Approved By:

(Aaron Ma)
Jack Ai

(Jack Ai)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20190500019EX-01	Rev.01	Initial report	May 30, 2019

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS

3 Contents

	Page
COVER PAGE	1
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST ENVIRONMENT	7
4.4 DESCRIPTION OF SUPPORT UNITS	7
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
4.6 TEST LOCATION	9
4.7 TEST FACILITY	9
4.8 ABNORMALITIES FROM STANDARD CONDITIONS	9
4.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
4.10 EQUIPMENT LIST	10
5 TEST RESULTS AND MEASUREMENT DATA	11
5.1 ANTENNA REQUIREMENT	11
5.2 CONDUCTED EMISSIONS	12
5.3 CONDUCTED PEAK OUTPUT POWER	16
5.4 20dB OCCUPY BANDWIDTH	21
5.5 FREQUENCIES SEPARATION	25
5.6 HOPPING CHANNEL NUMBER	27
5.7 DWELL TIME	29
5.8 BAND-EDGE FOR RF CONDUCTED EMISSIONS	33
5.9 SPURIOUS RF CONDUCTED EMISSIONS	39
5.10 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	50
5.11 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	52
5.11.1 Radiated Emission below 1GHz	55
5.11.2 Transmitter Emission above 1GHz	57
6 PHOTOGRAPHS - EUT TEST SETUP	60
6.1 RADIATED EMISSION	60
6.2 CONDUCTED EMISSION	61
7 PHOTOGRAPHS OF EUT	62

4 General Information

4.1 Client Information

Applicant:	MAYFLASH LIMITED
Address of Applicant:	3/F, Buiding No.1, TingWei Industrial Park, LiuFang Rd, No.67, BaoAn, Shenzhen, China.
Manufacturer:	MAYFLASH LIMITED
Address of Manufacturer:	3/F, Buiding No.1, TingWei Industrial Park, LiuFang Rd, No.67, BaoAn, Shenzhen, China.

4.2 General Description of EUT

Product Name:	MAGIC-S V1.1
Test Model No.:	MAGIC-S V1.1
Trade Mark:	N/A
Hardware Version:	V 1.1
Software Version:	V 1.04
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V4.2/ EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Transfer Rate:	1Mbps/2Mbps/3Mbps
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Product Type:	☐ Mobile ☒ Portable ☐ Fix Location
Antenna Type:	PCB Antenna
Antenna Gain:	0 dBi
EUT Power Supply:	DC 5V from PC

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

4.3 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	995mbar
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
PC	Lenovo	ThinkPad E450c	Provide by lab	FCC ID
AC/DC Adapter	Lenovo	ADLX65NLC3A	Provide by lab	FCC SDOC

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	±5.12dB	(1)
2	Radiated Emission (Above 1GHz)	±4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	±3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.6 Test Location

Shenzhen Huaxia Testing Technology Co., Ltd,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **ISED No.: 22984**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Abnormalities from Standard Conditions

None.

4.9 Other Information Requested by the Customer

None.

4.10 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2018/9/26	2019/9/25
Spectrum analyzer	R&S	FSU26	CQA-038	2018/10/28	2019/10/27
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2018/9/26	2019/9/25
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2018/11/2	2019/11/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2018/10/28	2020/10/27
Bilog Antenna	R&S	HL562	CQA-011	2018/9/26	2020/9/25
Horn Antenna	R&S	HF906	CQA-012	2018/9/26	2020/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2018/9/26	2020/9/25
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2018/9/26	2019/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2018/9/26	2019/9/25
Spectrum analyzer	Agilent	E4440A	CQA-103	2018/10/28	2019/10/27
Antenna Connector	CQA	RFC-01	CQA-080	2018/9/26	2019/9/25
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2018/9/26	2019/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2018/9/26	2019/9/25
EMI Test Receiver	R&S	ESPI3	CQA-013	2018/9/26	2019/9/25
LISN	R&S	ENV216	CQA-003	2018/11/5	2019/11/4
Coaxial cable	CQA	N/A	CQA-C009	2018/9/26	2019/9/25

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data


5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	PCB Antenna 
The antenna is PCB Antenna. The best case gain of the antenna is 0 dBi.	

Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.
Final Test Mode:	Through Pre-scan, find the 3DH5 of data type and 8DPSK modulation at the highest channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC 120V/60Hz
Test Results:	Pass

Measurement Data

L line:

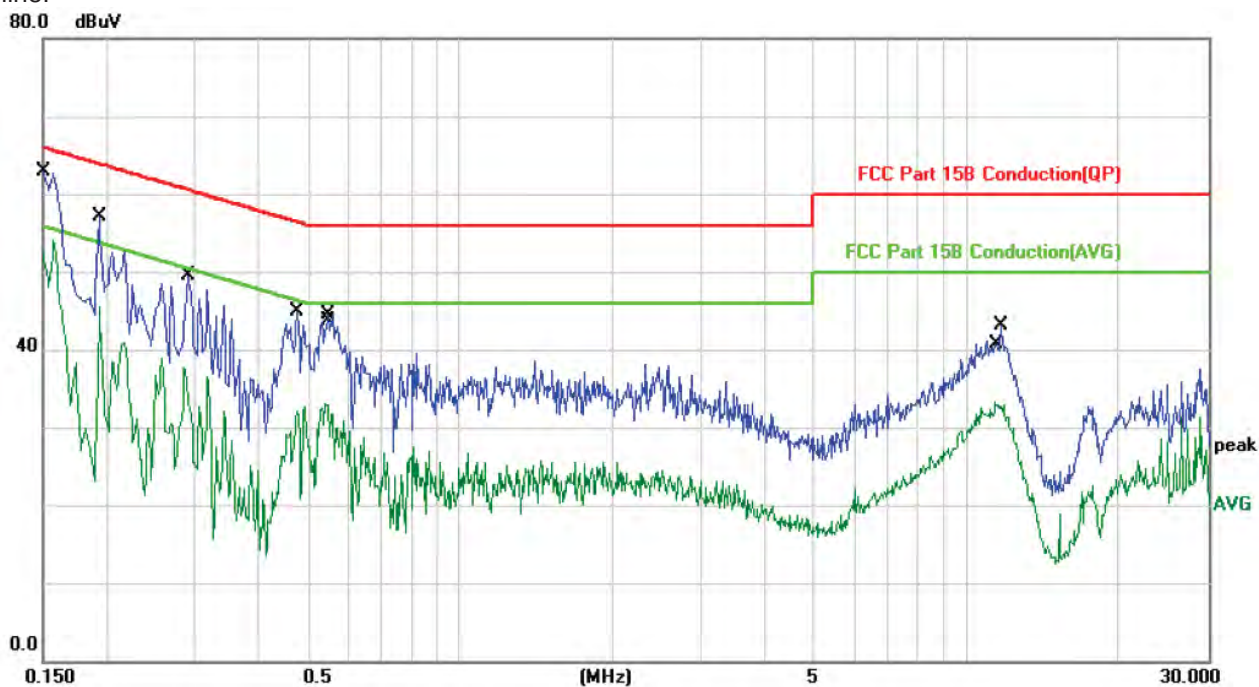


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	62.95	0.00	62.95	65.99	-3.04	QP	
2		0.1500	52.57	0.00	52.57	55.99	-3.42	AVG	
3		0.1940	57.01	0.00	57.01	63.86	-6.85	QP	
4		0.1940	45.48	0.00	45.48	53.86	-8.38	AVG	
5		0.2860	37.67	0.10	37.77	50.64	-12.87	AVG	
6		0.2900	49.35	0.10	49.45	60.52	-11.07	QP	
7		0.4780	44.71	0.10	44.81	56.37	-11.56	QP	
8		0.4780	31.91	0.10	32.01	46.37	-14.36	AVG	
9		0.5420	32.93	0.10	33.03	46.00	-12.97	AVG	
10		0.5500	44.43	0.10	44.53	56.00	-11.47	QP	
11		11.4180	32.77	0.44	33.21	50.00	-16.79	AVG	
12		11.6860	42.61	0.45	43.06	60.00	-16.94	QP	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

N line:

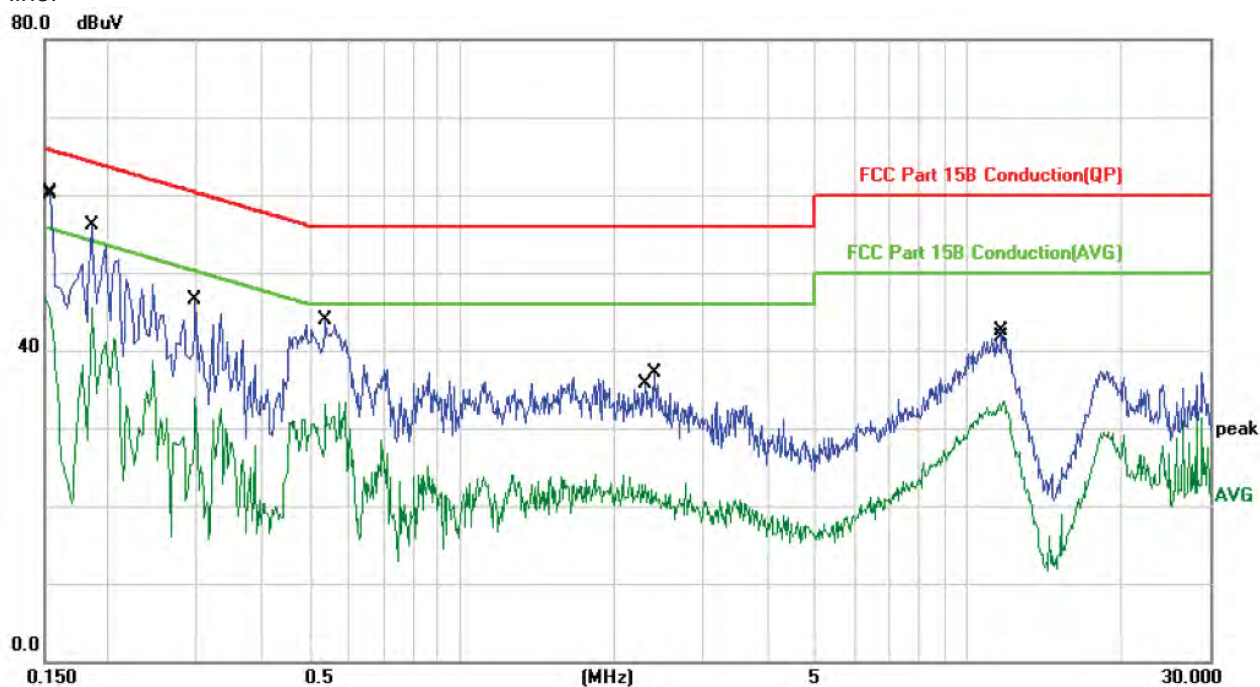


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	46.90	0.00	46.90	55.99	-9.09	AVG	
2	*	0.1539	60.23	0.00	60.23	65.78	-5.55	QP	
3		0.1860	56.17	0.00	56.17	64.21	-8.04	QP	
4		0.1860	45.50	0.00	45.50	54.21	-8.71	AVG	
5		0.2980	46.43	0.10	46.53	60.30	-13.77	QP	
6		0.2980	33.75	0.10	33.85	50.30	-16.45	AVG	
7		0.5380	43.82	0.10	43.92	56.00	-12.08	QP	
8		0.5380	32.97	0.10	33.07	46.00	-12.93	AVG	
9		2.3020	22.58	0.10	22.68	46.00	-23.32	AVG	
10		2.4020	36.90	0.11	37.01	56.00	-18.99	QP	
11		11.6820	41.99	0.45	42.44	60.00	-17.56	QP	
12		11.7540	33.08	0.45	33.53	50.00	-16.47	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Conducted Peak Output Power

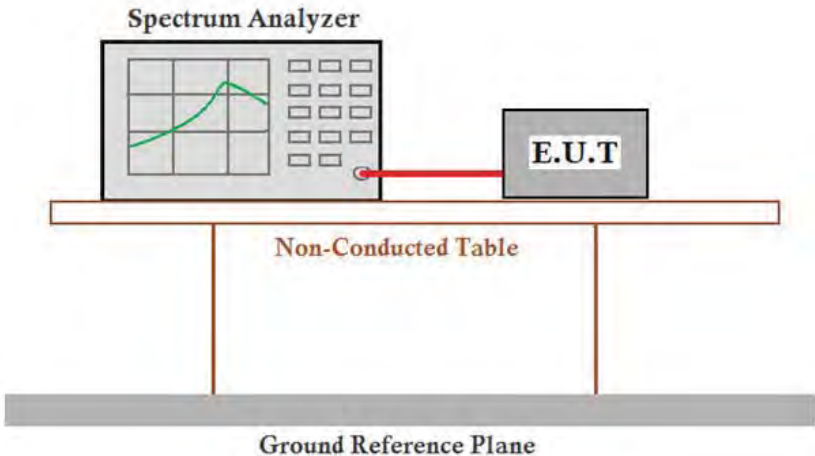Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	30dBm
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	3.770	30.00	Pass
Middle	2.809	30.00	Pass
Highest	3.999	30.00	Pass
$\pi/4$ DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	3.695	30.00	Pass
Middle	2.839	30.00	Pass
Highest	4.048	30.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	3.773	30.00	Pass
Middle	2.835	30.00	Pass
Highest	4.067	30.00	Pass


Test plot as follows:

Graphs	
GFSK/LCH	
GFSK/MCH	
GFSK/HCH	

$\pi/4$DQPSK/LCH		
$\pi/4$DQPSK/MCH		
$\pi/4$DQPSK/HCH		

8DPSK/LCH	 Key parameters from the screenshot: - Center Freq: 2.40200000 GHz - Mkr1: 2.402 03 GHz, 3.773 dBm - Span: 20.00 MHz #Res BW: 4 MHz #VBW: 8.0 MHz - Sweep: 1.067 ms (2001 pts)	
8DPSK/MCH	 Key parameters from the screenshot: - Center Freq: 2.44100000 GHz - Mkr1: 2.440 65 GHz, 2.835 dBm - Span: 20.00 MHz #Res BW: 4 MHz #VBW: 8.0 MHz - Sweep: 1.067 ms (2001 pts)	
8DPSK/HCH	 Key parameters from the screenshot: - Center Freq: 2.48000000 GHz - Mkr1: 2.479 92 GHz, 4.067 dBm - Span: 20.00 MHz #Res BW: 4 MHz #VBW: 8.0 MHz - Sweep: 1.067 ms (2001 pts)	


5.4 20dB Occupy Bandwidth

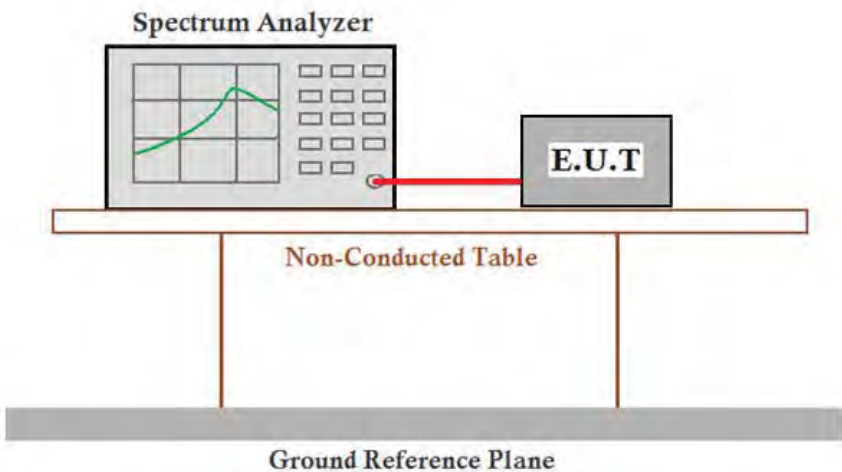Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	NA
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass


Measurement Data

Test channel	20dB Occupy Bandwidth (MHz)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Lowest	0.8157	1.181	1.232
Middle	0.8268	1.186	1.216
Highest	0.8714	1.256	1.209


Test plot as follows:

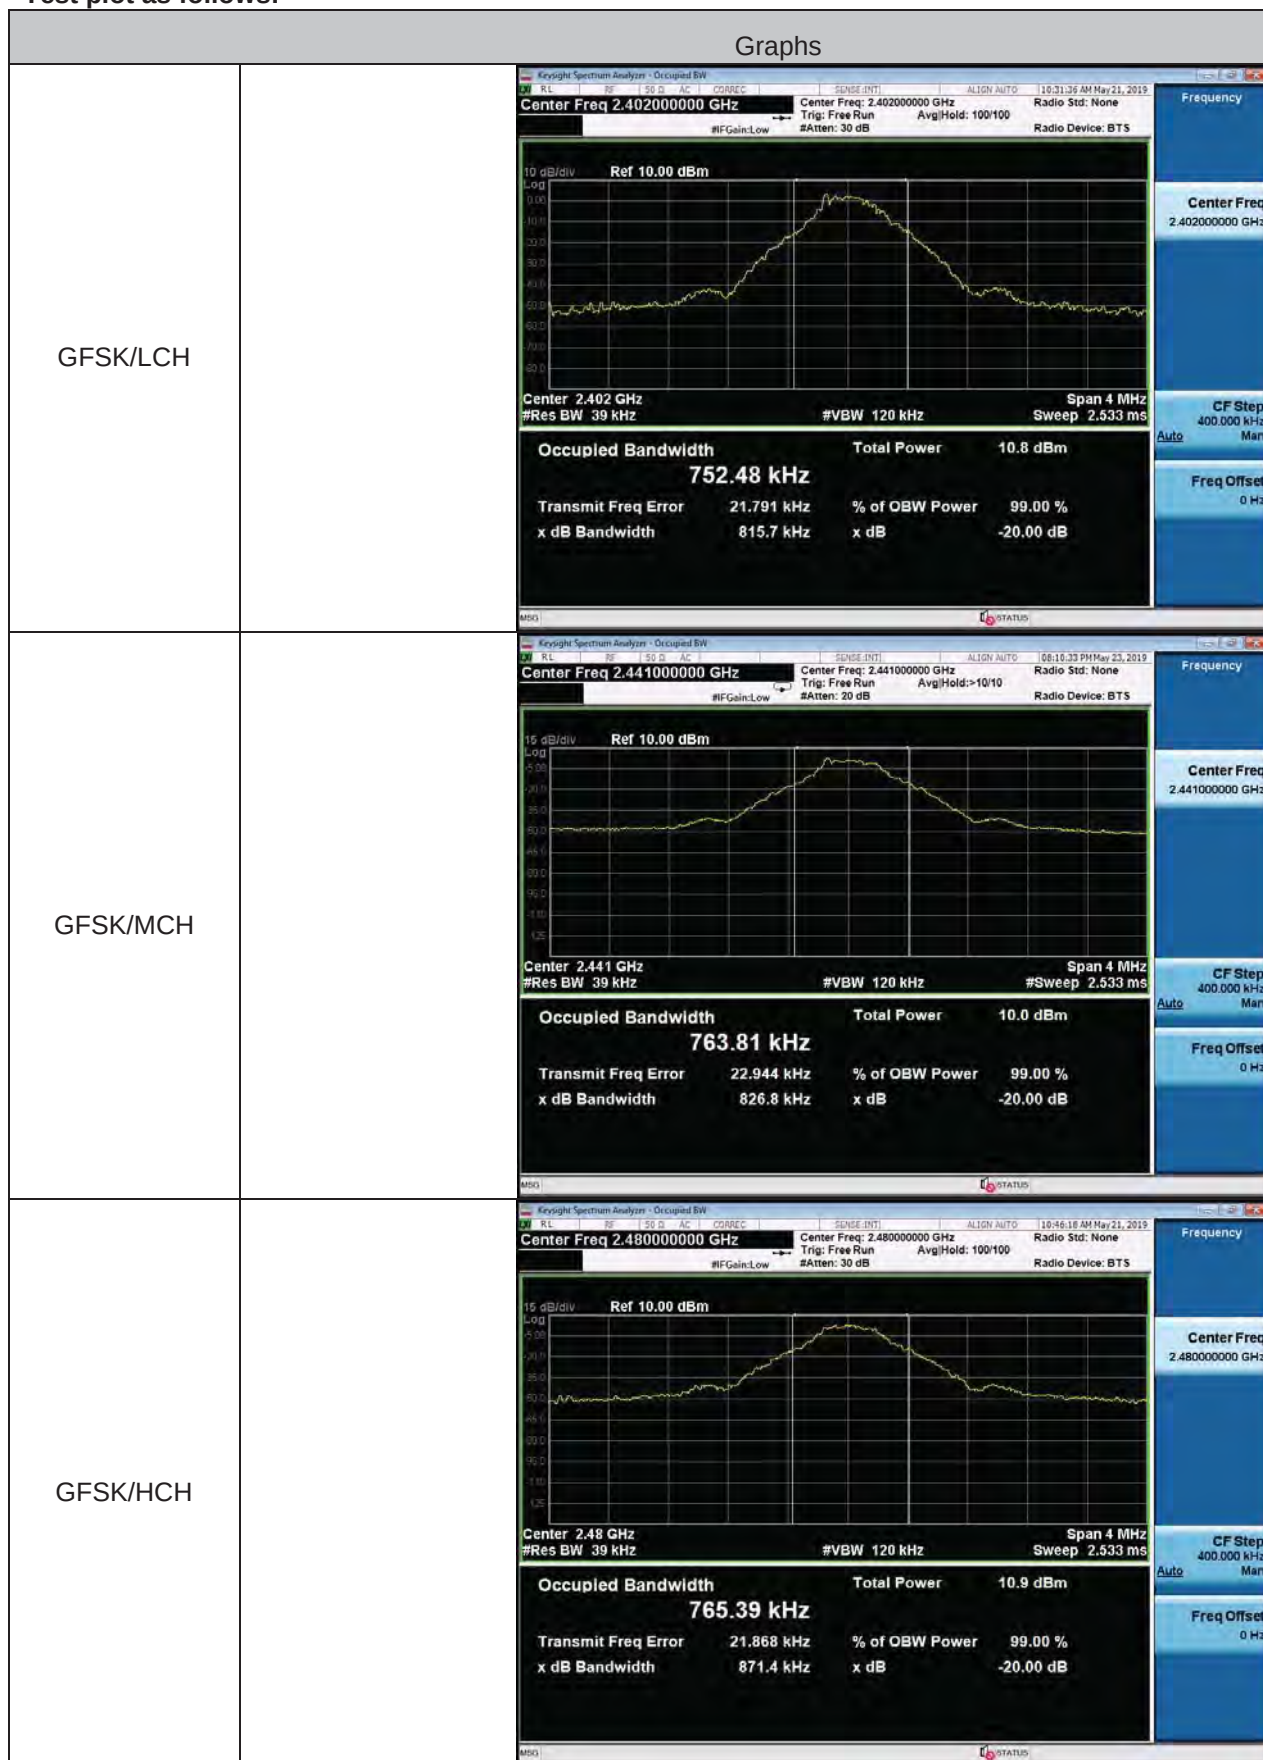

$\pi/4$DQPSK/LCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IFGain: Low #Atten: 30 dB Ref 10.00 dBm 15 dB/div Log Center 2.402 GHz #Res BW 39 kHz #VBW 120 kHz Span 4 MHz Sweep 2.533 ms Occupied Bandwidth 1.1119 MHz Total Power 9.70 dBm Transmit Freq Error 20.950 kHz % of OBW Power 99.00 % x dB Bandwidth 1.181 MHz x dB -20.00 dB Frequency Center Freq 2.40200000 GHz CF Step 400.000 kHz Man Freq Offset 0 Hz
$\pi/4$DQPSK/MCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS #IFGain: Low #Atten: 20 dB Ref 10.00 dBm 15 dB/div Log Center 2.441 GHz #Res BW 39 kHz #VBW 120 kHz Span 4 MHz Sweep 2.533 ms Occupied Bandwidth 1.1134 MHz Total Power 9.15 dBm Transmit Freq Error 17.283 kHz % of OBW Power 99.00 % x dB Bandwidth 1.186 MHz x dB -20.00 dB Frequency Center Freq 2.44100000 GHz CF Step 400.000 kHz Man Freq Offset 0 Hz
$\pi/4$DQPSK/HCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IFGain: Low #Atten: 30 dB Ref 10.00 dBm 10 dB/div Log Center 2.48 GHz #Res BW 39 kHz #VBW 120 kHz Span 4 MHz Sweep 2.533 ms Occupied Bandwidth 1.2926 MHz Total Power 7.40 dBm Transmit Freq Error -28.948 kHz % of OBW Power 99.00 % x dB Bandwidth 1.256 MHz x dB -20.00 dB Frequency Center Freq 2.48000000 GHz CF Step 400.000 kHz Man Freq Offset 0 Hz

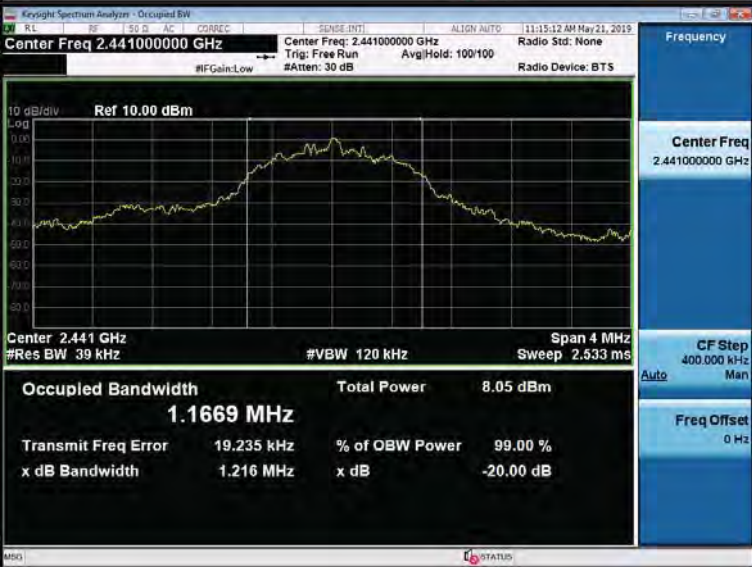8DPSK/LCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Center Freq: 2.402000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #FGain: Low #Atten: 30 dB 10 dB/div Ref 10.00 dBm Center 2.402 GHz #Res BW 39 kHz #VBW 120 kHz Span 4 MHz Sweep 2.533 ms Occupied Bandwidth 1.1746 MHz Total Power 8.52 dBm Transmit Freq Error 24.261 kHz % of OBW Power 99.00 % x dB Bandwidth 1.232 MHz x dB -20.00 dB Frequency Center Freq 2.402000000 GHz CF Step 400.000 kHz Man Freq Offset 0 Hz
8DPSK/MCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Center Freq: 2.441000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #FGain: Low #Atten: 30 dB 10 dB/div Ref 10.00 dBm Center 2.441 GHz #Res BW 39 kHz #VBW 120 kHz Span 4 MHz Sweep 2.533 ms Occupied Bandwidth 1.1669 MHz Total Power 8.05 dBm Transmit Freq Error 19.235 kHz % of OBW Power 99.00 % x dB Bandwidth 1.216 MHz x dB -20.00 dB Frequency Center Freq 2.441000000 GHz CF Step 400.000 kHz Man Freq Offset 0 Hz
8DPSK/HCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Center Freq: 2.480000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS #FGain: Low #Atten: 20 dB 15 dB/div Ref 10.00 dBm Center 2.48 GHz #Res BW 39 kHz #VBW 120 kHz Span 4 MHz #Sweep 2.533 ms Occupied Bandwidth 1.1591 MHz Total Power 10.2 dBm Transmit Freq Error 10.544 kHz % of OBW Power 99.00 % x dB Bandwidth 1.209 MHz x dB -20.00 dB Frequency Center Freq 2.480000000 GHz CF Step 400.000 kHz Man Freq Offset 0 Hz

5.5 Frequencies Separation

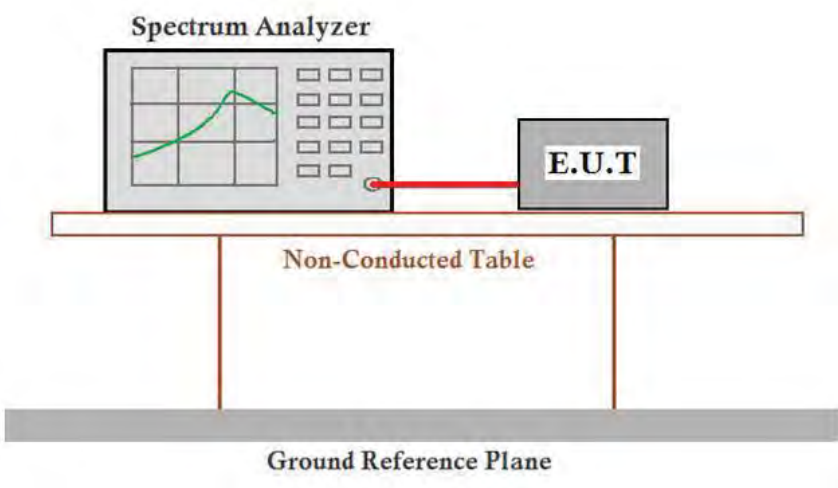
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	2/3 of the 20dB bandwidth
	Remark: the transmission power is less than 0.125W.
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH39	1.000	25KHz or 2/3*20dB bandwidth	Pass
	CH40			
$\pi/4$ DQPSK	CH39	1.000	25KHz or 2/3*20dB bandwidth	Pass
	CH40			
8DPSK	CH39	1.002	25KHz or 2/3*20dB bandwidth	Pass
	CH40			

Test plot as follows:

Graphs	
GFSK	 Key parameters from the screenshot: - Start Freq: 2.439500000 GHz - Stop Freq: 2.441500000 GHz - Center Freq: 2.440500000 GHz - Resolution BW: 100 kHz - Video BW: 300 kHz - Sweep: 1.000 ms (1001 pts) - Marker 1: 1.000 MHz, -0.039 dB
$\pi/4$ DQPSK	 Key parameters from the screenshot: - Start Freq: 2.439500000 GHz - Stop Freq: 2.441500000 GHz - Center Freq: 2.440500000 GHz - Resolution BW: 100 kHz - Video BW: 300 kHz - Sweep: 1.000 ms (1001 pts) - Marker 1: 1.000 MHz, 0.030 dB
8DPSK	 Key parameters from the screenshot: - Start Freq: 2.439500000 GHz - Stop Freq: 2.441500000 GHz - Center Freq: 2.440500000 GHz - Resolution BW: 100 kHz - Video BW: 300 kHz - Sweep: 1.000 ms (1001 pts) - Marker 1: 1.002 MHz, -0.120 dB


5.6 Hopping Channel Number

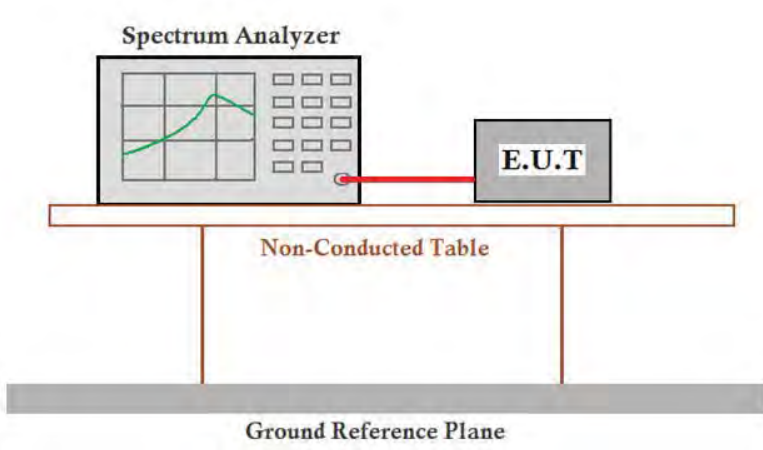Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	At least 15 channels
Exploratory Test Mode:	hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass


Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥ 15
$\pi/4$ DQPSK	79	≥ 15
8DPSK	79	≥ 15

Test plot as follows:

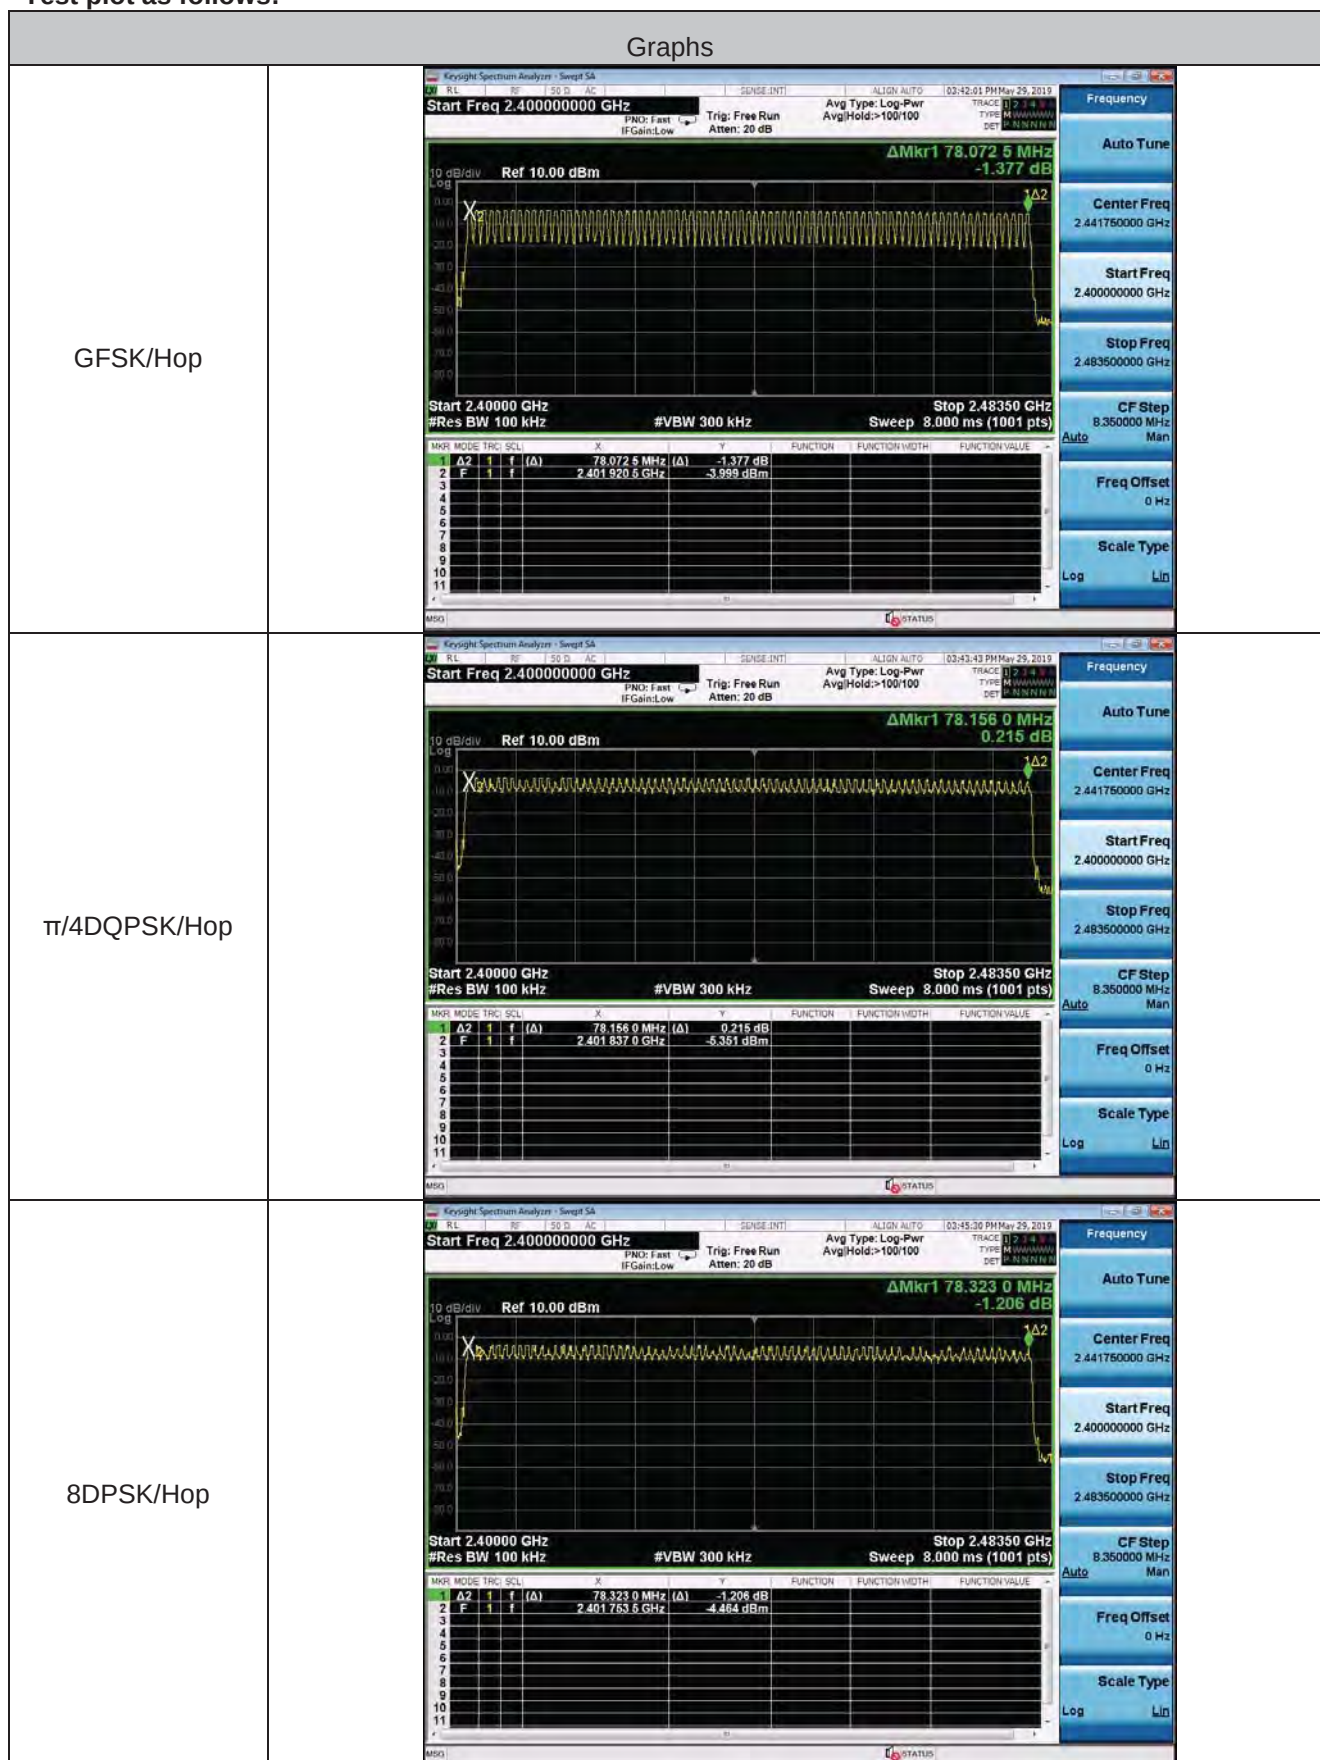

5.7 Dwell Time

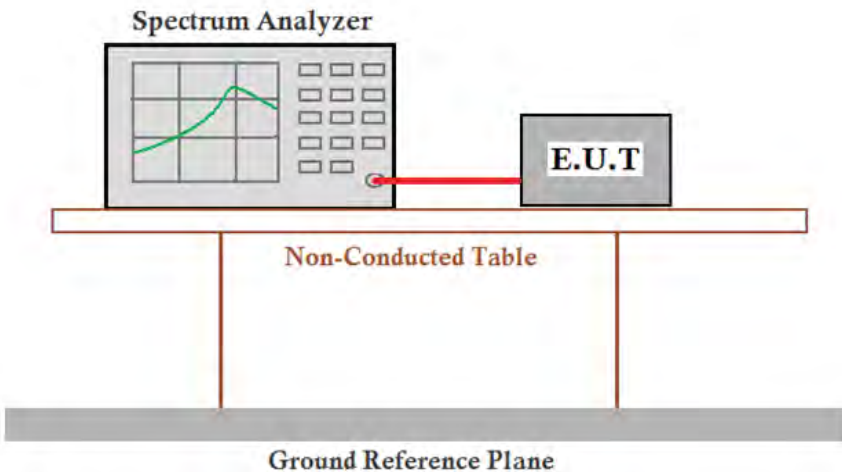Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Limit:	0.4 Second
Test Results:	Pass

Measurement Data

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time[s]	Limit (second)
GFSK	DH1	MCH	0.407	0.130	≤0.4
GFSK	DH3	MCH	1.662	0.266	≤0.4
GFSK	DH5	MCH	2.912	0.311	≤0.4
π/4DQPSK	2DH1	MCH	0.416	0.133	≤0.4
π/4DQPSK	2DH3	MCH	1.667	0.267	≤0.4
π/4DQPSK	2DH5	MCH	2.909	0.310	≤0.4
8DPSK	3DH1	MCH	0.412	0.132	≤0.4
8DPSK	3DH3	MCH	1.667	0.267	≤0.4
8DPSK	3DH5	MCH	2.913	0.311	≤0.4

Remark:


The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$




DH1/2DH1/3DH1 Dwell time = Burst Width(ms)*(1600/ (2*79))*31.6



DH3/2DH3/3DH3 Dwell time = Burst Width (ms)*(1600/ (4*79))*31.6

DH5/2DH5/3DH5 Dwell time = Burst Width (ms)*(1600/ (6*79))*31.6


Test plot as follows:

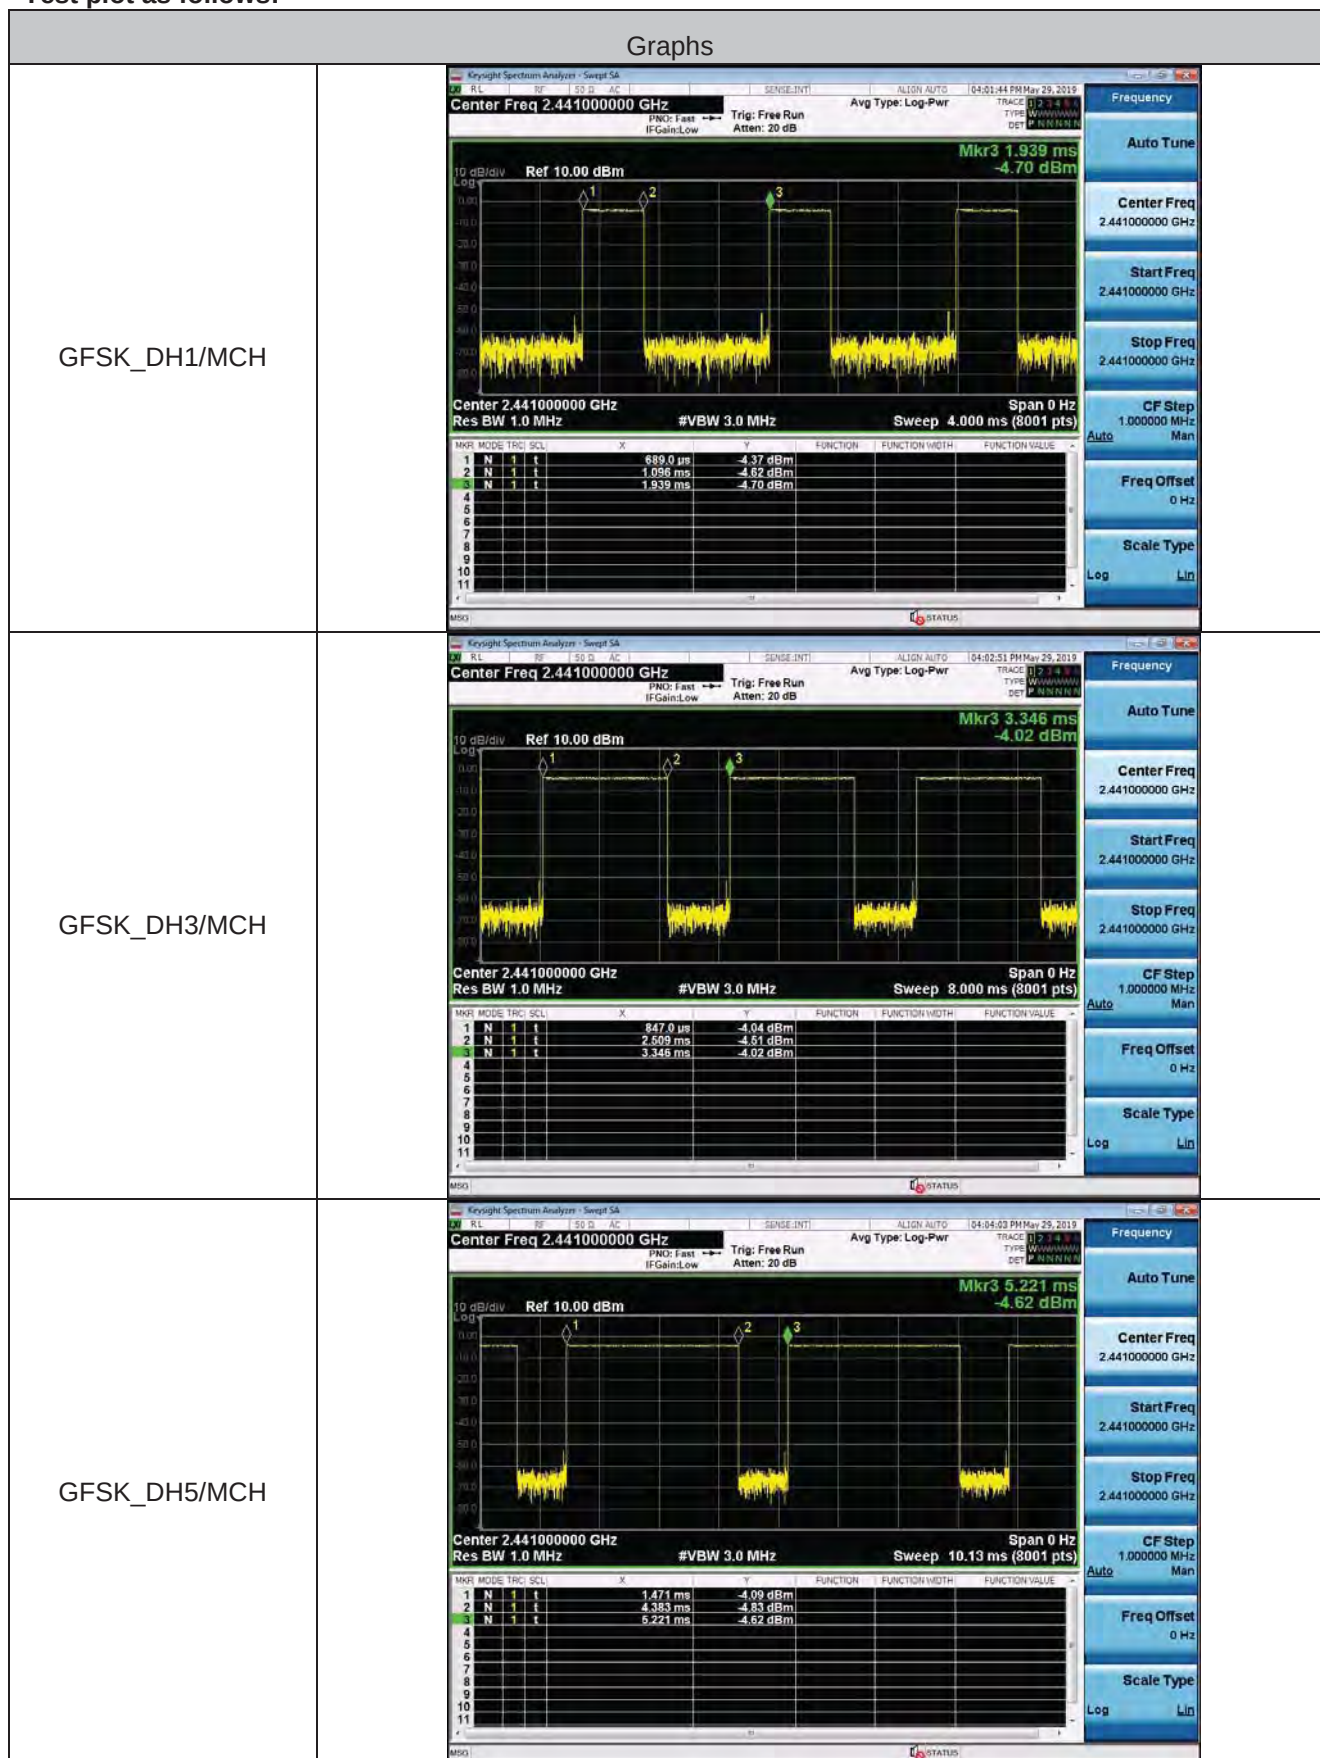

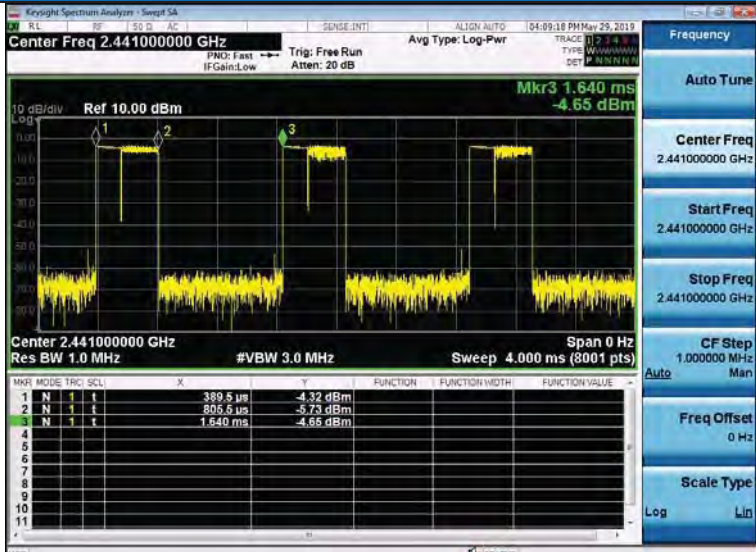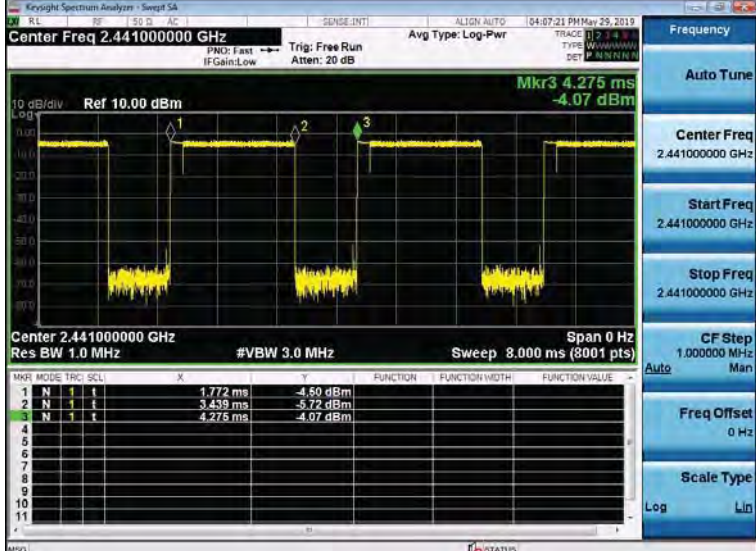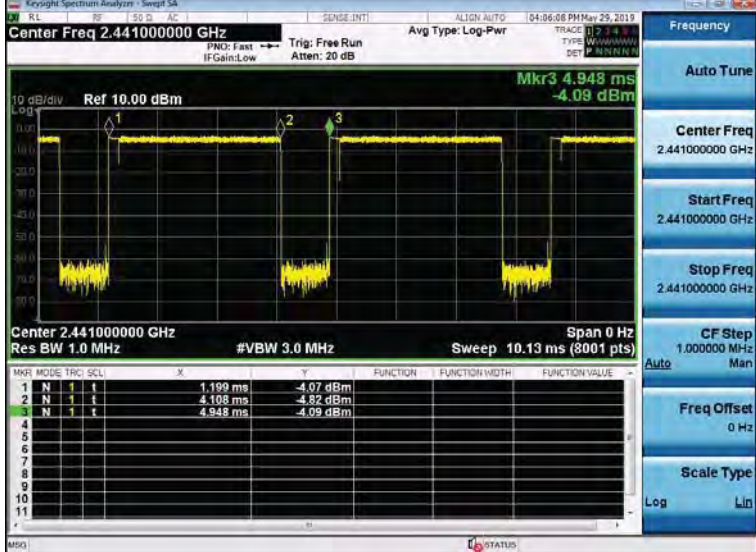$\pi/4$ DQPSK _2DH1/MCH	 <table><thead><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>389.5 ms</td><td>-4.32 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>805.5 ms</td><td>-5.73 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>1.640 ms</td><td>-4.65 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	389.5 ms	-4.32 dBm				2	N	1	t	805.5 ms	-5.73 dBm				3	N	1	t	1.640 ms	-4.65 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	389.5 ms	-4.32 dBm																																
2	N	1	t	805.5 ms	-5.73 dBm																																
3	N	1	t	1.640 ms	-4.65 dBm																																
$\pi/4$ DQPSK _2DH3/MCH	 <table><thead><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>1.772 ms</td><td>-4.50 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>3.439 ms</td><td>-5.72 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>4.275 ms</td><td>-4.07 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	1.772 ms	-4.50 dBm				2	N	1	t	3.439 ms	-5.72 dBm				3	N	1	t	4.275 ms	-4.07 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	1.772 ms	-4.50 dBm																																
2	N	1	t	3.439 ms	-5.72 dBm																																
3	N	1	t	4.275 ms	-4.07 dBm																																
$\pi/4$ DQPSK _2DH5/MCH	 <table><thead><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>1.199 ms</td><td>-4.07 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>4.108 ms</td><td>-4.82 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>4.948 ms</td><td>-4.09 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	1.199 ms	-4.07 dBm				2	N	1	t	4.108 ms	-4.82 dBm				3	N	1	t	4.948 ms	-4.09 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	1.199 ms	-4.07 dBm																																
2	N	1	t	4.108 ms	-4.82 dBm																																
3	N	1	t	4.948 ms	-4.09 dBm																																

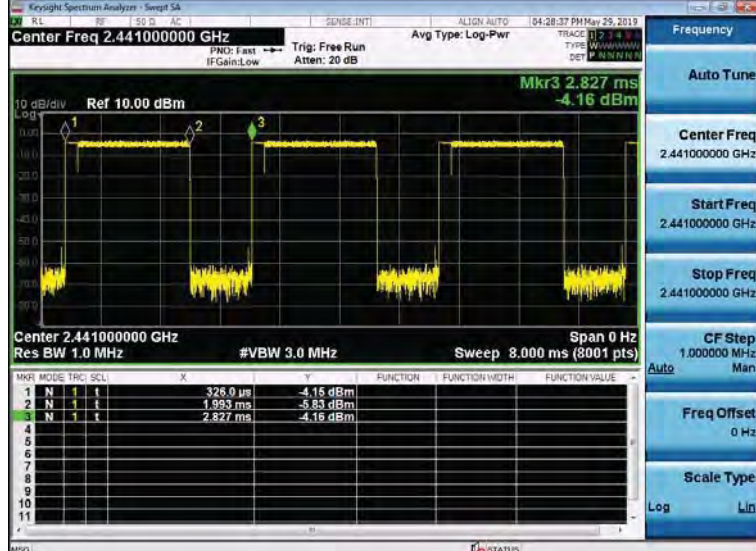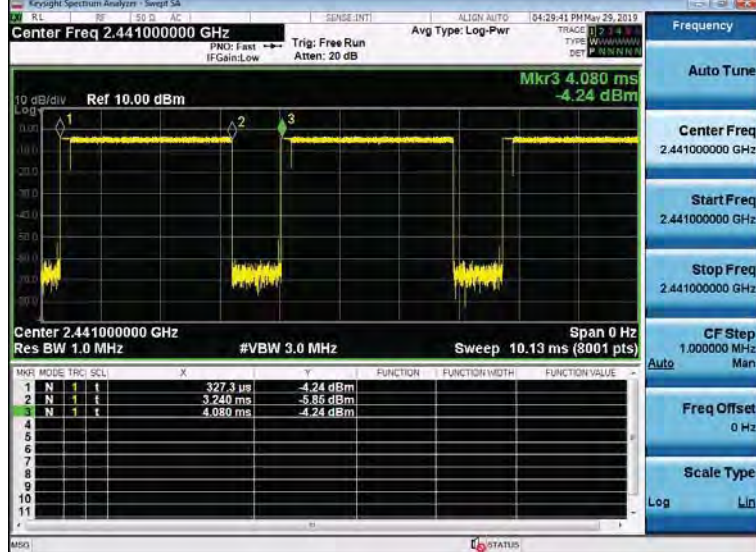
8DPSK_3DH1/MCH	 <table><thead><tr><th>MKR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>360.0 μs</td><td>-4.08 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>771.5 μs</td><td>-5.80 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>1.607 ms</td><td>-4.16 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	360.0 μ s	-4.08 dBm				2	N	1	t	771.5 μ s	-5.80 dBm				3	N	1	t	1.607 ms	-4.16 dBm			
MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	360.0 μ s	-4.08 dBm																																
2	N	1	t	771.5 μ s	-5.80 dBm																																
3	N	1	t	1.607 ms	-4.16 dBm																																
8DPSK_3DH3/MCH	 <table><thead><tr><th>MKR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>328.0 μs</td><td>-4.15 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>1.993 ms</td><td>-5.83 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>2.827 ms</td><td>-4.16 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	328.0 μ s	-4.15 dBm				2	N	1	t	1.993 ms	-5.83 dBm				3	N	1	t	2.827 ms	-4.16 dBm			
MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	328.0 μ s	-4.15 dBm																																
2	N	1	t	1.993 ms	-5.83 dBm																																
3	N	1	t	2.827 ms	-4.16 dBm																																
8DPSK_3DH5/MCH	 <table><thead><tr><th>MKR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>327.3 μs</td><td>-4.24 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>3.240 ms</td><td>-5.85 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>4.080 ms</td><td>-4.24 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	327.3 μ s	-4.24 dBm				2	N	1	t	3.240 ms	-5.85 dBm				3	N	1	t	4.080 ms	-4.24 dBm			
MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	327.3 μ s	-4.24 dBm																																
2	N	1	t	3.240 ms	-5.85 dBm																																
3	N	1	t	4.080 ms	-4.24 dBm																																



5.8 Band-edge for RF Conducted Emissions


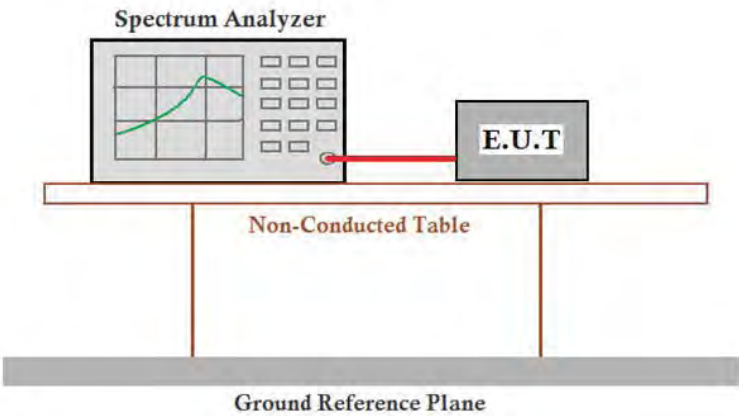
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=cable loss+ attenuation factor.
Limit:	In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Mode	Test Channel	Frequency [MHz]	Frequency Hopping	Emission Level [dBm]	Limit [dBm]	Result
GFSK	LCH	2400	Off	-31.527	-23.55	PASS
			On	-32.929	-23.64	PASS
GFSK	HCH	2483.5	Off	-59.973	-24.97	PASS
			On	-57.243	-24.84	PASS
$\pi/4$ DQPSK	LCH	2400	Off	-31.698	-23.55	PASS
			On	-31.908	-23.55	PASS
$\pi/4$ DQPSK	HCH	2483.5	Off	-59.774	-24.93	PASS
			On	-57.111	-24.81	PASS
8DPSK	LCH	2400	Off	-31.704	-23.59	PASS
			On	-32.334	-23.71	PASS
8DPSK	HCH	2483.5	Off	-60.454	-25.00	PASS
			On	-57.977	-24.76	PASS

Test plot as follows:

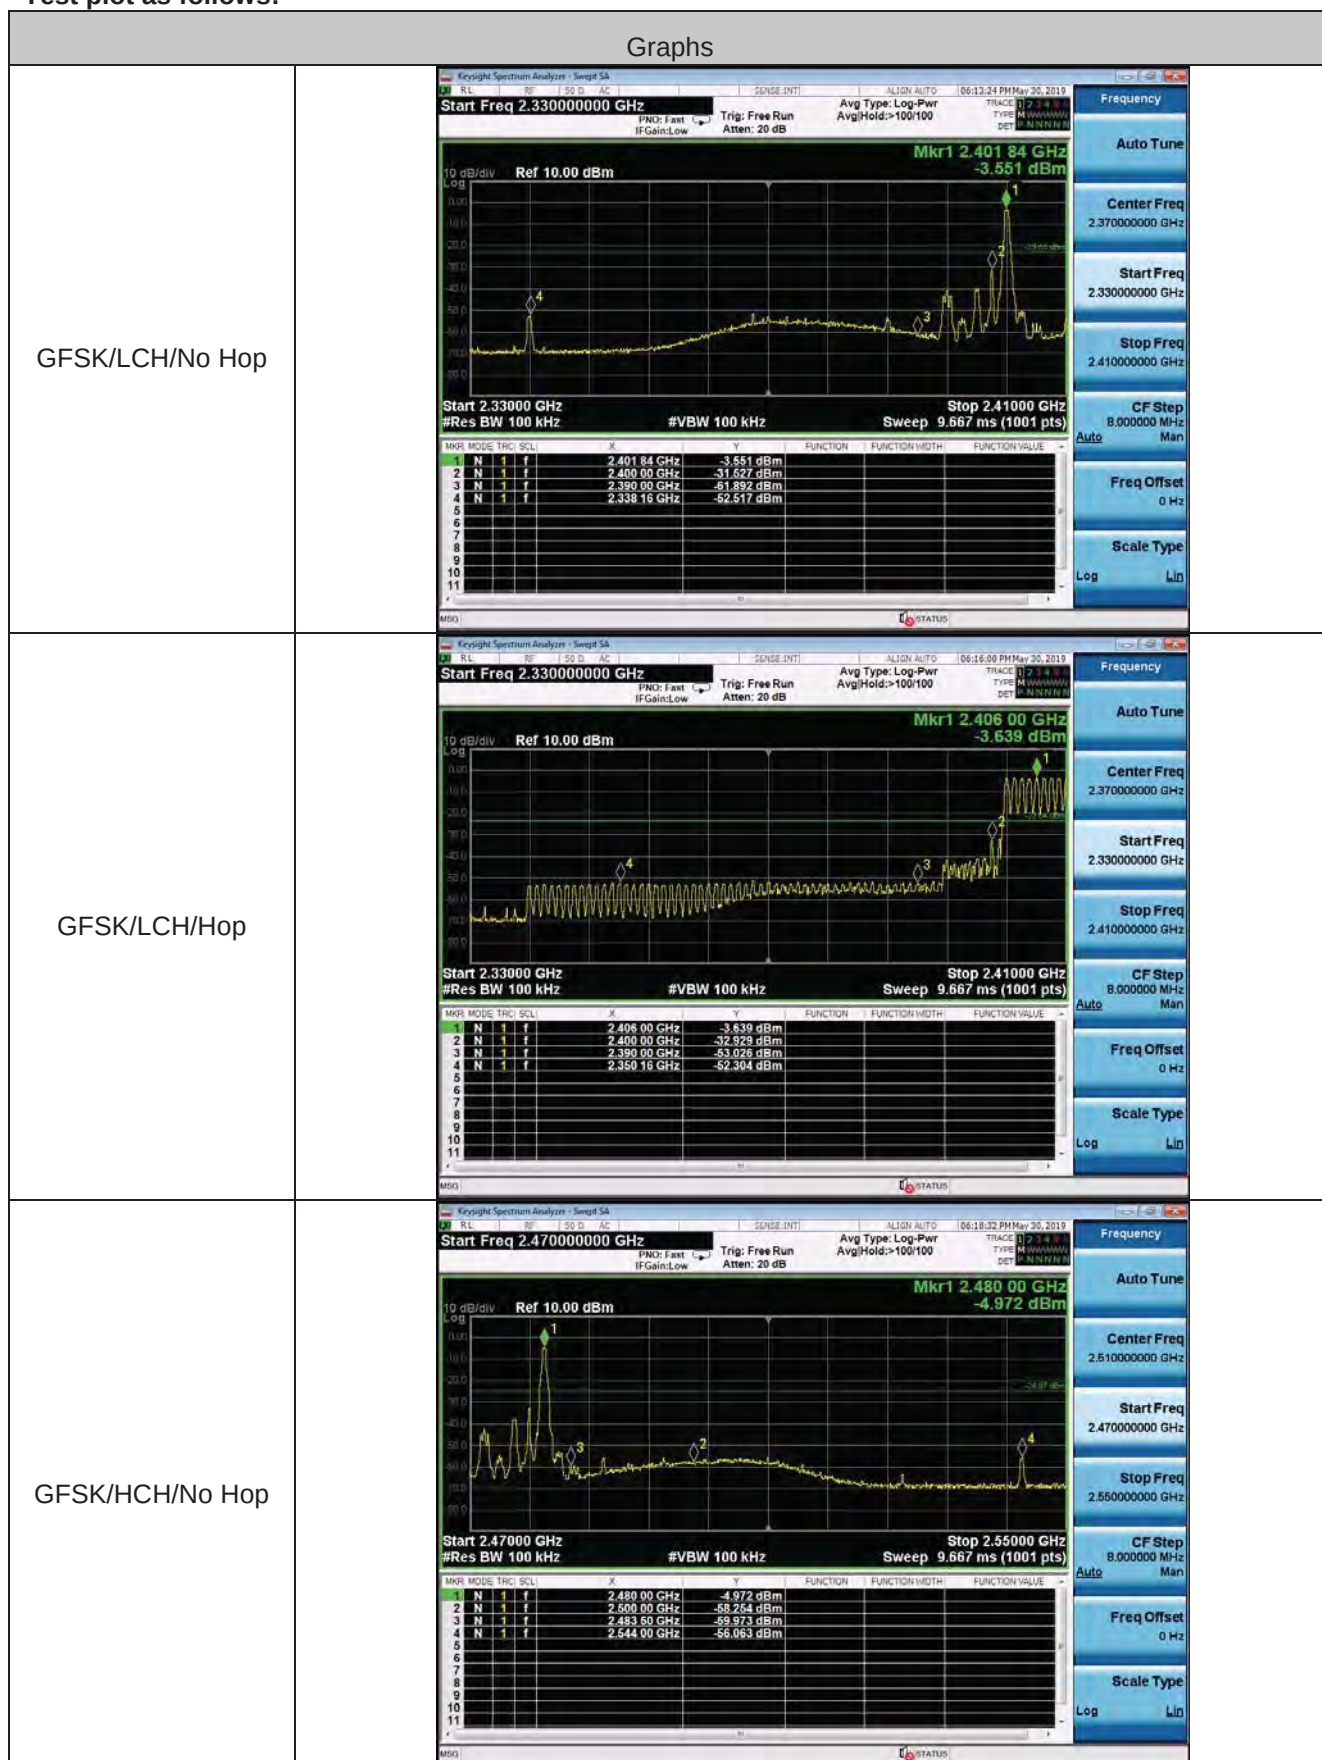


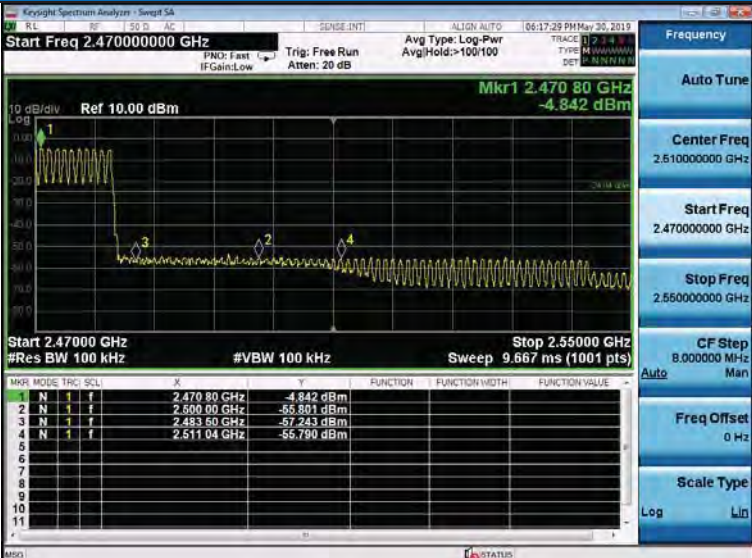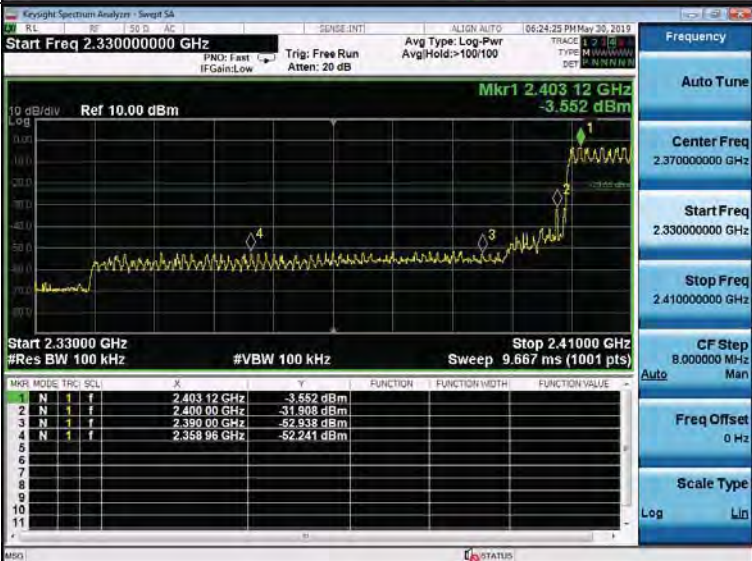
GFSK/HCH/Hop	 <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.470 80 GHz</td><td>-4.842 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-55.801 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 60 GHz</td><td>-57.243 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.511 04 GHz</td><td>-55.790 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.470 80 GHz	-4.842 dBm				2	N	1	f	2.500 00 GHz	-55.801 dBm				3	N	1	f	2.483 60 GHz	-57.243 dBm				4	N	1	f	2.511 04 GHz	-55.790 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.470 80 GHz	-4.842 dBm																																									
2	N	1	f	2.500 00 GHz	-55.801 dBm																																									
3	N	1	f	2.483 60 GHz	-57.243 dBm																																									
4	N	1	f	2.511 04 GHz	-55.790 dBm																																									
$\pi/4$ DQPSK/LCH/No Hop	 <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 16 GHz</td><td>-3.546 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-31.698 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-60.873 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.338 16 GHz</td><td>-52.213 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 16 GHz	-3.546 dBm				2	N	1	f	2.400 00 GHz	-31.698 dBm				3	N	1	f	2.390 00 GHz	-60.873 dBm				4	N	1	f	2.338 16 GHz	-52.213 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 16 GHz	-3.546 dBm																																									
2	N	1	f	2.400 00 GHz	-31.698 dBm																																									
3	N	1	f	2.390 00 GHz	-60.873 dBm																																									
4	N	1	f	2.338 16 GHz	-52.213 dBm																																									
$\pi/4$ DQPSK/LCH/Hop	 <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.403 12 GHz</td><td>-3.552 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-31.908 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-52.938 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.358 96 GHz</td><td>-52.241 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.403 12 GHz	-3.552 dBm				2	N	1	f	2.400 00 GHz	-31.908 dBm				3	N	1	f	2.390 00 GHz	-52.938 dBm				4	N	1	f	2.358 96 GHz	-52.241 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.403 12 GHz	-3.552 dBm																																									
2	N	1	f	2.400 00 GHz	-31.908 dBm																																									
3	N	1	f	2.390 00 GHz	-52.938 dBm																																									
4	N	1	f	2.358 96 GHz	-52.241 dBm																																									

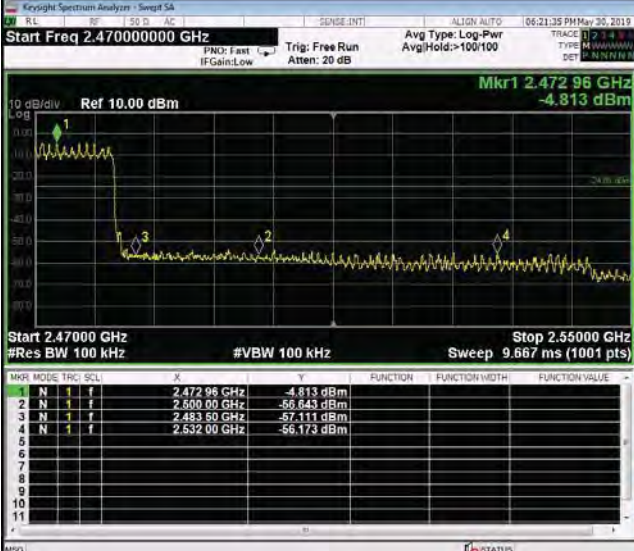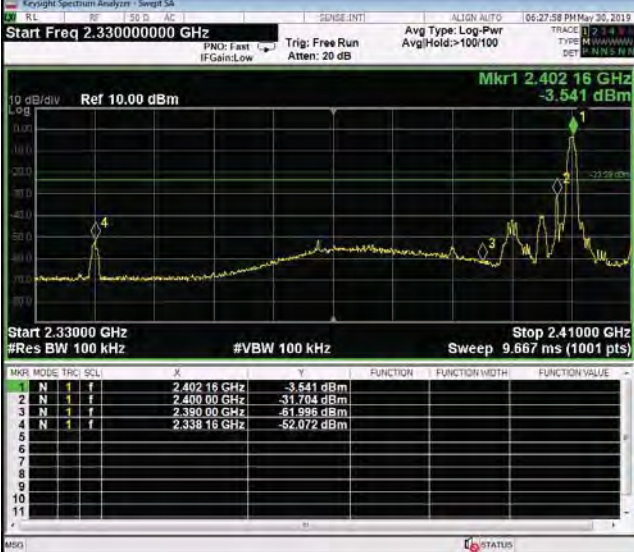$\pi/4$ DQPSK/HCH/No Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.48016 GHz</td><td>-4.928 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.50000 GHz</td><td>-57.910 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.48350 GHz</td><td>-59.774 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.54400 GHz</td><td>-55.463 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.48016 GHz	-4.928 dBm				2	N	1	f	2.50000 GHz	-57.910 dBm				3	N	1	f	2.48350 GHz	-59.774 dBm				4	N	1	f	2.54400 GHz	-55.463 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.48016 GHz	-4.928 dBm																																									
2	N	1	f	2.50000 GHz	-57.910 dBm																																									
3	N	1	f	2.48350 GHz	-59.774 dBm																																									
4	N	1	f	2.54400 GHz	-55.463 dBm																																									
$\pi/4$ DQPSK/HCH/Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.47296 GHz</td><td>-4.813 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.50000 GHz</td><td>-56.643 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.48350 GHz</td><td>-57.111 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.53200 GHz</td><td>-56.173 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.47296 GHz	-4.813 dBm				2	N	1	f	2.50000 GHz	-56.643 dBm				3	N	1	f	2.48350 GHz	-57.111 dBm				4	N	1	f	2.53200 GHz	-56.173 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.47296 GHz	-4.813 dBm																																									
2	N	1	f	2.50000 GHz	-56.643 dBm																																									
3	N	1	f	2.48350 GHz	-57.111 dBm																																									
4	N	1	f	2.53200 GHz	-56.173 dBm																																									
8DPSK/LCH/No Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.40216 GHz</td><td>-3.541 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.40000 GHz</td><td>-31.704 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.39000 GHz</td><td>-51.996 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.33816 GHz</td><td>-52.072 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.40216 GHz	-3.541 dBm				2	N	1	f	2.40000 GHz	-31.704 dBm				3	N	1	f	2.39000 GHz	-51.996 dBm				4	N	1	f	2.33816 GHz	-52.072 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.40216 GHz	-3.541 dBm																																									
2	N	1	f	2.40000 GHz	-31.704 dBm																																									
3	N	1	f	2.39000 GHz	-51.996 dBm																																									
4	N	1	f	2.33816 GHz	-52.072 dBm																																									

8DPSK/LCH/Hop	Keysight Spectrum Analyzer - Swept SA RL RF SD AC SENSE INT ALIGN AUTO 06:26:11 PM May 30, 2019 Start Freq 2.330000000 GHz PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 7 8 9 10 11 TYPE M W W W W W W W DET P N M S R N 10 dB/div Ref 10.00 dBm LOG 0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 Mkr1 2.408 96 GHz -3.709 dBm Start 2.33000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.41000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.408 96 GHz</td><td>-3.709 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-52.334 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-53.727 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.356 00 GHz</td><td>-52.485 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO STATUS Frequency Auto Tune Center Freq 2.370000000 GHz Start Freq 2.330000000 GHz Stop Freq 2.410000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin <tr><td>8DPSK/HCH/No Hop</td><td> Keysight Spectrum Analyzer - Swept SA RL RF SD AC SENSE INT ALIGN AUTO 06:26:50 PM May 30, 2019 Start Freq 2.470000000 GHz PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 7 8 9 10 11 TYPE M W W W W W W W DET P N M S R N 10 dB/div Ref 10.00 dBm LOG 0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 Mkr1 2.480 16 GHz -4.997 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 16 GHz</td><td>-4.997 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-57.810 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-50.454 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.544 08 GHz</td><td>-56.245 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO STATUS Frequency Auto Tune Center Freq 2.510000000 GHz Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin <tr><td>8DPSK/HCH/Hop</td><td> Keysight Spectrum Analyzer - Swept SA RL RF SD AC SENSE INT ALIGN AUTO 06:29:46 PM May 30, 2019 Start Freq 2.470000000 GHz PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 7 8 9 10 11 TYPE M W W W W W W W DET P N M S R N 10 dB/div Ref 10.00 dBm LOG 0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 Mkr1 2.472 16 GHz -4.763 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.472 16 GHz</td><td>-4.763 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-55.485 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-57.977 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.512 00 GHz</td><td>-55.647 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO STATUS Frequency Auto Tune Center Freq 2.510000000 GHz Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin </td></tr></td></tr>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.408 96 GHz	-3.709 dBm				2	N	1	f	2.400 00 GHz	-52.334 dBm				3	N	1	f	2.390 00 GHz	-53.727 dBm				4	N	1	f	2.356 00 GHz	-52.485 dBm				5									6									7									8									9									10									11									8DPSK/HCH/No Hop	Keysight Spectrum Analyzer - Swept SA RL RF SD AC SENSE INT ALIGN AUTO 06:26:50 PM May 30, 2019 Start Freq 2.470000000 GHz PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 7 8 9 10 11 TYPE M W W W W W W W DET P N M S R N 10 dB/div Ref 10.00 dBm LOG 0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 Mkr1 2.480 16 GHz -4.997 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 16 GHz</td><td>-4.997 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-57.810 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-50.454 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.544 08 GHz</td><td>-56.245 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO STATUS Frequency Auto Tune Center Freq 2.510000000 GHz Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin <tr><td>8DPSK/HCH/Hop</td><td> Keysight Spectrum Analyzer - Swept SA RL RF SD AC SENSE INT ALIGN AUTO 06:29:46 PM May 30, 2019 Start Freq 2.470000000 GHz PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 7 8 9 10 11 TYPE M W W W W W W W DET P N M S R N 10 dB/div Ref 10.00 dBm LOG 0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 Mkr1 2.472 16 GHz -4.763 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.472 16 GHz</td><td>-4.763 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-55.485 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-57.977 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.512 00 GHz</td><td>-55.647 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO STATUS Frequency Auto Tune Center Freq 2.510000000 GHz Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin </td></tr>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 16 GHz	-4.997 dBm				2	N	1	f	2.500 00 GHz	-57.810 dBm				3	N	1	f	2.483 50 GHz	-50.454 dBm				4	N	1	f	2.544 08 GHz	-56.245 dBm				5									6									7									8									9									10									11									8DPSK/HCH/Hop	Keysight Spectrum Analyzer - Swept SA RL RF SD AC SENSE INT ALIGN AUTO 06:29:46 PM May 30, 2019 Start Freq 2.470000000 GHz PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 7 8 9 10 11 TYPE M W W W W W W W DET P N M S R N 10 dB/div Ref 10.00 dBm LOG 0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 Mkr1 2.472 16 GHz -4.763 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.472 16 GHz</td><td>-4.763 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-55.485 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-57.977 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.512 00 GHz</td><td>-55.647 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO STATUS Frequency Auto Tune Center Freq 2.510000000 GHz Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.472 16 GHz	-4.763 dBm				2	N	1	f	2.500 00 GHz	-55.485 dBm				3	N	1	f	2.483 50 GHz	-57.977 dBm				4	N	1	f	2.512 00 GHz	-55.647 dBm				5									6									7									8									9									10									11								
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																																																																																																																																																																																																																																																	
1	N	1	f	2.408 96 GHz	-3.709 dBm																																																																																																																																																																																																																																																																																																																																				
2	N	1	f	2.400 00 GHz	-52.334 dBm																																																																																																																																																																																																																																																																																																																																				
3	N	1	f	2.390 00 GHz	-53.727 dBm																																																																																																																																																																																																																																																																																																																																				
4	N	1	f	2.356 00 GHz	-52.485 dBm																																																																																																																																																																																																																																																																																																																																				
5																																																																																																																																																																																																																																																																																																																																									
6																																																																																																																																																																																																																																																																																																																																									
7																																																																																																																																																																																																																																																																																																																																									
8																																																																																																																																																																																																																																																																																																																																									
9																																																																																																																																																																																																																																																																																																																																									
10																																																																																																																																																																																																																																																																																																																																									
11																																																																																																																																																																																																																																																																																																																																									
8DPSK/HCH/No Hop	Keysight Spectrum Analyzer - Swept SA RL RF SD AC SENSE INT ALIGN AUTO 06:26:50 PM May 30, 2019 Start Freq 2.470000000 GHz PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 7 8 9 10 11 TYPE M W W W W W W W DET P N M S R N 10 dB/div Ref 10.00 dBm LOG 0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 Mkr1 2.480 16 GHz -4.997 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 16 GHz</td><td>-4.997 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-57.810 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-50.454 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.544 08 GHz</td><td>-56.245 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO STATUS Frequency Auto Tune Center Freq 2.510000000 GHz Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin <tr><td>8DPSK/HCH/Hop</td><td> Keysight Spectrum Analyzer - Swept SA RL RF SD AC SENSE INT ALIGN AUTO 06:29:46 PM May 30, 2019 Start Freq 2.470000000 GHz PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 7 8 9 10 11 TYPE M W W W W W W W DET P N M S R N 10 dB/div Ref 10.00 dBm LOG 0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 Mkr1 2.472 16 GHz -4.763 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.472 16 GHz</td><td>-4.763 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-55.485 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-57.977 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.512 00 GHz</td><td>-55.647 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO STATUS Frequency Auto Tune Center Freq 2.510000000 GHz Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin </td></tr>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 16 GHz	-4.997 dBm				2	N	1	f	2.500 00 GHz	-57.810 dBm				3	N	1	f	2.483 50 GHz	-50.454 dBm				4	N	1	f	2.544 08 GHz	-56.245 dBm				5									6									7									8									9									10									11									8DPSK/HCH/Hop	Keysight Spectrum Analyzer - Swept SA RL RF SD AC SENSE INT ALIGN AUTO 06:29:46 PM May 30, 2019 Start Freq 2.470000000 GHz PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 7 8 9 10 11 TYPE M W W W W W W W DET P N M S R N 10 dB/div Ref 10.00 dBm LOG 0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 Mkr1 2.472 16 GHz -4.763 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.472 16 GHz</td><td>-4.763 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-55.485 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-57.977 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.512 00 GHz</td><td>-55.647 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO STATUS Frequency Auto Tune Center Freq 2.510000000 GHz Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.472 16 GHz	-4.763 dBm				2	N	1	f	2.500 00 GHz	-55.485 dBm				3	N	1	f	2.483 50 GHz	-57.977 dBm				4	N	1	f	2.512 00 GHz	-55.647 dBm				5									6									7									8									9									10									11																																																																																																																						
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																																																																																																																																																																																																																																																	
1	N	1	f	2.480 16 GHz	-4.997 dBm																																																																																																																																																																																																																																																																																																																																				
2	N	1	f	2.500 00 GHz	-57.810 dBm																																																																																																																																																																																																																																																																																																																																				
3	N	1	f	2.483 50 GHz	-50.454 dBm																																																																																																																																																																																																																																																																																																																																				
4	N	1	f	2.544 08 GHz	-56.245 dBm																																																																																																																																																																																																																																																																																																																																				
5																																																																																																																																																																																																																																																																																																																																									
6																																																																																																																																																																																																																																																																																																																																									
7																																																																																																																																																																																																																																																																																																																																									
8																																																																																																																																																																																																																																																																																																																																									
9																																																																																																																																																																																																																																																																																																																																									
10																																																																																																																																																																																																																																																																																																																																									
11																																																																																																																																																																																																																																																																																																																																									
8DPSK/HCH/Hop	Keysight Spectrum Analyzer - Swept SA RL RF SD AC SENSE INT ALIGN AUTO 06:29:46 PM May 30, 2019 Start Freq 2.470000000 GHz PNO: Fast IFGain:Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold:>100/100 TRACE 1 2 3 4 5 6 7 8 9 10 11 TYPE M W W W W W W W DET P N M S R N 10 dB/div Ref 10.00 dBm LOG 0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 Mkr1 2.472 16 GHz -4.763 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 100 kHz Stop 2.55000 GHz Sweep 9.667 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.472 16 GHz</td><td>-4.763 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-55.485 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-57.977 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.512 00 GHz</td><td>-55.647 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> MSO STATUS Frequency Auto Tune Center Freq 2.510000000 GHz Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.472 16 GHz	-4.763 dBm				2	N	1	f	2.500 00 GHz	-55.485 dBm				3	N	1	f	2.483 50 GHz	-57.977 dBm				4	N	1	f	2.512 00 GHz	-55.647 dBm				5									6									7									8									9									10									11																																																																																																																																																																																																																																				
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																																																																																																																																																																																																																																																	
1	N	1	f	2.472 16 GHz	-4.763 dBm																																																																																																																																																																																																																																																																																																																																				
2	N	1	f	2.500 00 GHz	-55.485 dBm																																																																																																																																																																																																																																																																																																																																				
3	N	1	f	2.483 50 GHz	-57.977 dBm																																																																																																																																																																																																																																																																																																																																				
4	N	1	f	2.512 00 GHz	-55.647 dBm																																																																																																																																																																																																																																																																																																																																				
5																																																																																																																																																																																																																																																																																																																																									
6																																																																																																																																																																																																																																																																																																																																									
7																																																																																																																																																																																																																																																																																																																																									
8																																																																																																																																																																																																																																																																																																																																									
9																																																																																																																																																																																																																																																																																																																																									
10																																																																																																																																																																																																																																																																																																																																									
11																																																																																																																																																																																																																																																																																																																																									

5.9 Spurious RF Conducted Emissions

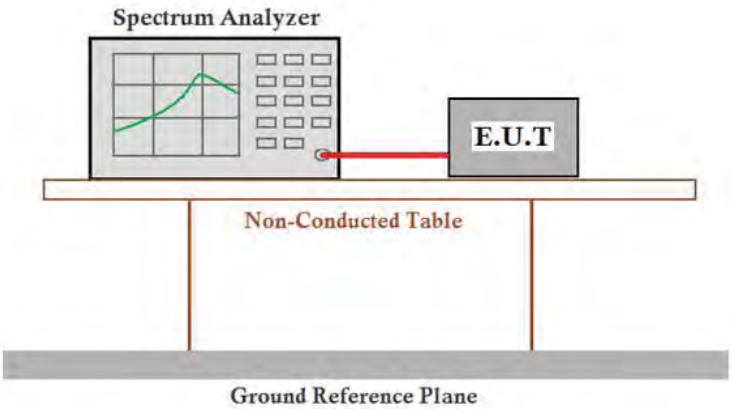Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=cable loss+ attenuation factor.
Limit:	In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Pass

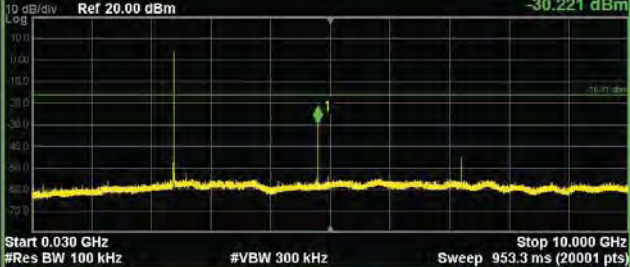
GFSK LCH Graphs																																																																																																														
Reference		Keysight Spectrum Analyzer - Sweep SA Center Freq 2.402000000 GHz 10 dB/div Ref 20.00 dBm  Center 2.402000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (8001 pts) Span 4.000 MHz Frequency Auto Tune Center Freq 2.402000000 GHz Start Freq 2.400000000 GHz Stop Freq 2.404000000 GHz CF Step 400.000 kHz Auto Man Freq Offset 0 Hz Scale Type Log Lin																																																																																																												
30MHz-10GHz		Keysight Spectrum Analyzer - Sweep SA Center Freq 5.015000000 GHz 10 dB/div Ref 20.00 dBm  Start 0.030 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 953.3 ms (20001 pts) Stop 10.000 GHz <table><thead><tr><th>MNR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>4.803 6 GHz</td><td>-30.221 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table> Frequency Auto Tune Center Freq 5.015000000 GHz Start Freq 30.0000000 MHz Stop Freq 10.000000000 GHz CF Step 997.0000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin	MNR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	4.803 6 GHz	-30.221 dBm				2									3									4									5									6									7									8									9									10									11								
MNR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																						
1	N	1	f	4.803 6 GHz	-30.221 dBm																																																																																																									
2																																																																																																														
3																																																																																																														
4																																																																																																														
5																																																																																																														
6																																																																																																														
7																																																																																																														
8																																																																																																														
9																																																																																																														
10																																																																																																														
11																																																																																																														
10GHz-26GHz		Keysight Spectrum Analyzer - Sweep SA Center Freq 18.000000000 GHz 10 dB/div Ref 20.00 dBm  Start 10.000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.529 s (20001 pts) Stop 26.000 GHz <table><thead><tr><th>MNR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>25.048 8 GHz</td><td>-44.018 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table> Frequency Auto Tune Center Freq 18.000000000 GHz Start Freq 10.000000000 GHz Stop Freq 26.000000000 GHz CF Step 1.600000000 GHz Auto Man Freq Offset 0 Hz Scale Type Log Lin	MNR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	25.048 8 GHz	-44.018 dBm				2									3									4									5									6									7									8									9									10									11								
MNR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																						
1	N	1	f	25.048 8 GHz	-44.018 dBm																																																																																																									
2																																																																																																														
3																																																																																																														
4																																																																																																														
5																																																																																																														
6																																																																																																														
7																																																																																																														
8																																																																																																														
9																																																																																																														
10																																																																																																														
11																																																																																																														

GFSK MCH Graphs

Reference




30MHz-10GHz

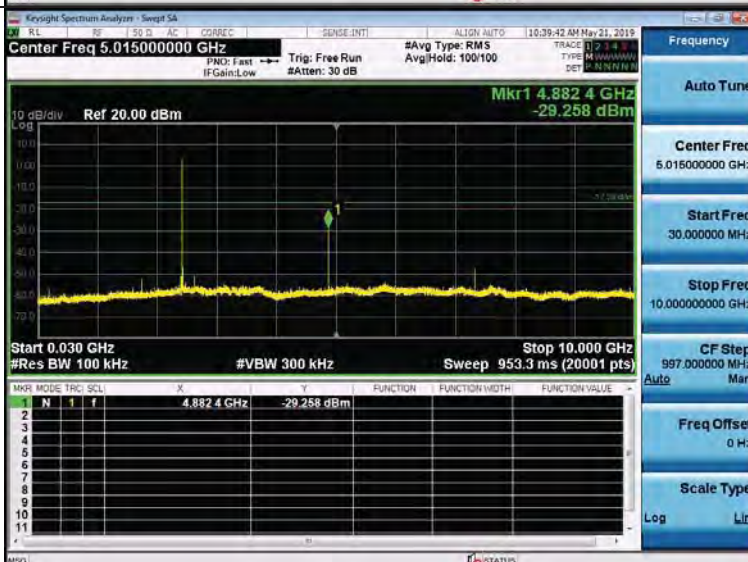


10GHz-26GHz




GFSK HCH Graphs

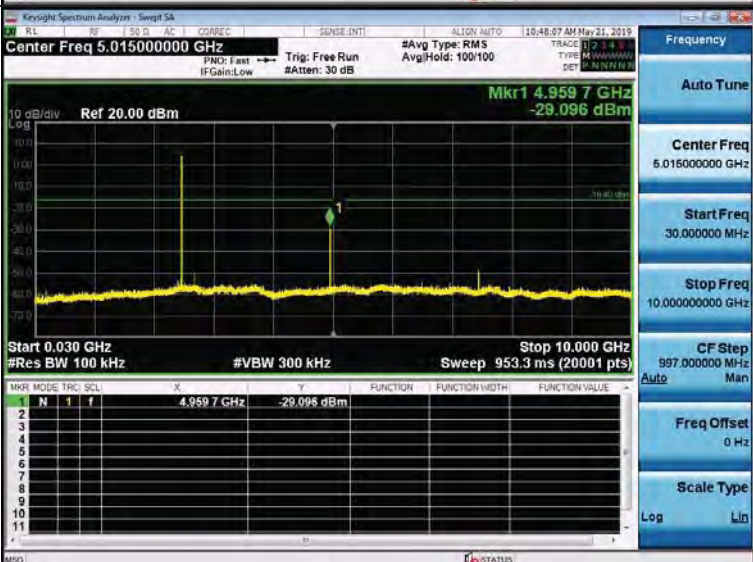Reference	 Key parameters from the screenshot: - Center Freq: 2.48000000 GHz - Mkr1: 2.480 074 0 GHz, 3.598 dBm - Span: 4.000 MHz - Res BW: 100 kHz - VBW: 300 kHz - Sweep: 1.067 ms (8001 pts)
30MHz-10GHz	 Key parameters from the screenshot: - Center Freq: 5.01500000 GHz - Mkr1: 4.959 7 GHz, -29.096 dBm - Span: 10.000 MHz - Res BW: 100 kHz - VBW: 300 kHz - Sweep: 953.3 ms (20001 pts)
10GHz-26GHz	 Key parameters from the screenshot: - Center Freq: 18.00000000 GHz - Mkr1: 24.949 6 GHz, -44.258 dBm - Span: 16.000 MHz - Res BW: 100 kHz - VBW: 300 kHz - Sweep: 1.529 s (20001 pts)

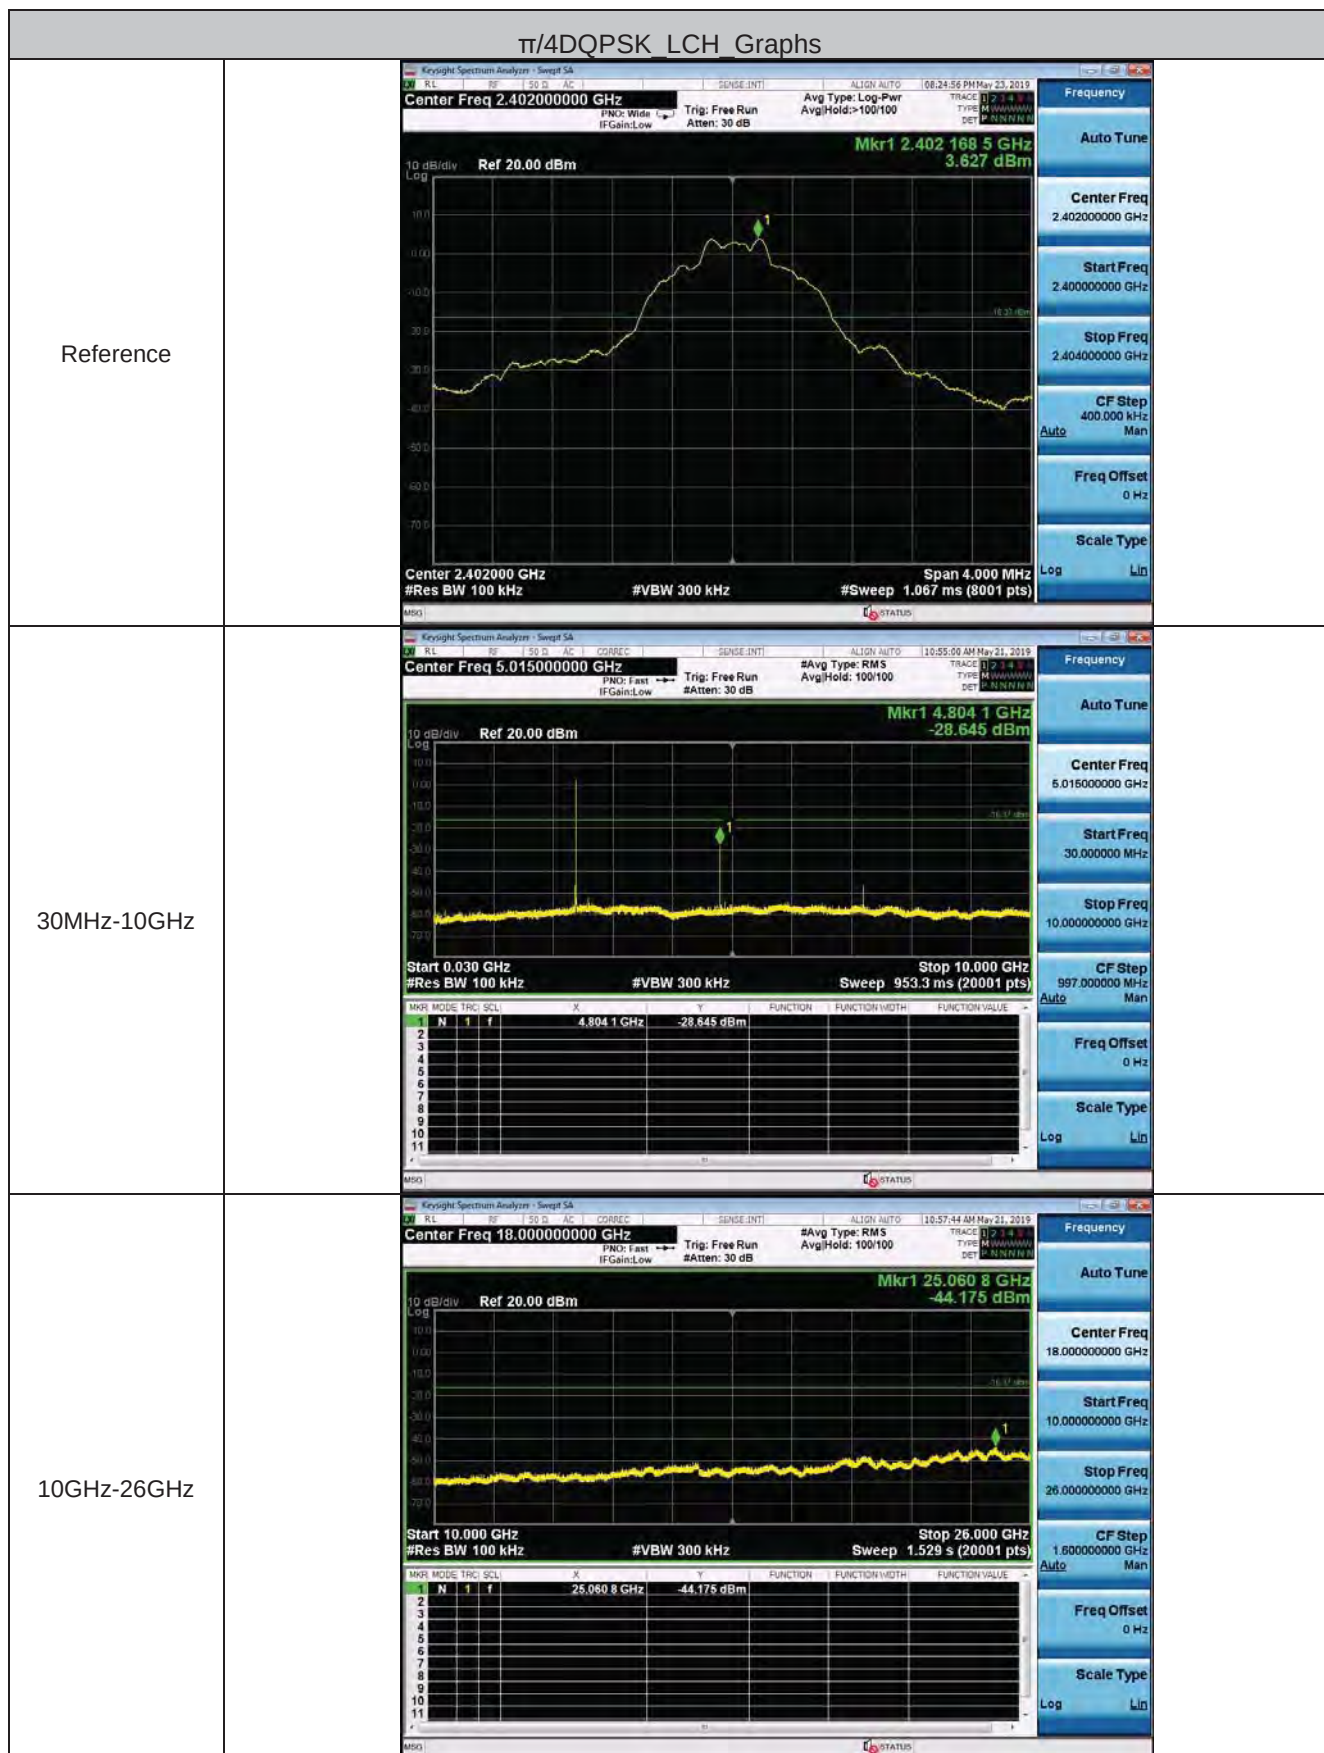

$\pi/4$ DQPSK MCH Graphs

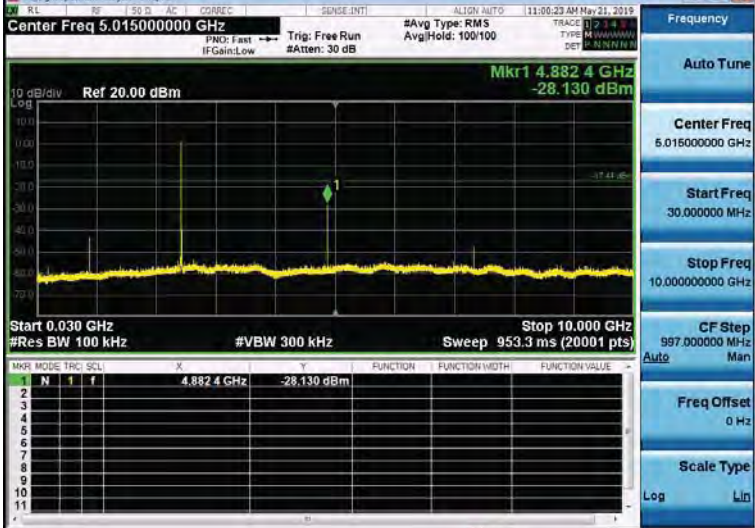
Reference	 Key parameters for Reference signal: - Center Freq: 2.441000000 GHz - Span: 4.000 MHz - Res BW: 100 kHz - VBW: 300 kHz - Sweep: 1.067 ms (8001 pts) - Peak Level: -2.560 dBm
30MHz-10GHz	 Key parameters for 30MHz-10GHz range: - Center Freq: 5.015000000 GHz - Span: 9.970 GHz - Res BW: 100 kHz - VBW: 300 kHz - Sweep: 953.3 ms (20001 pts) - Peak Level: -28.130 dBm
10GHz-26GHz	 Key parameters for 10GHz-26GHz range: - Center Freq: 18.000000000 GHz - Span: 16.000 GHz - Res BW: 100 kHz - VBW: 300 kHz - Sweep: 1.529 s (20001 pts) - Peak Level: -44.563 dBm

$\pi/4$ DQPSK HCH Graphs


Reference



30MHz-10GHz

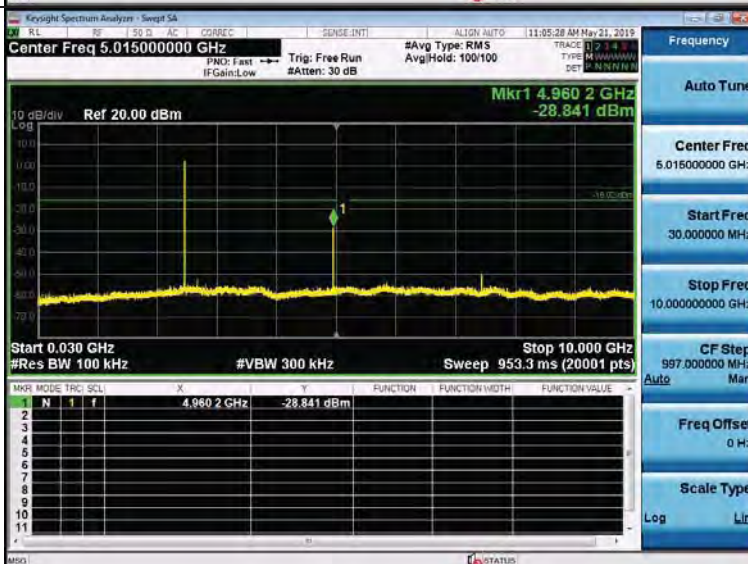


10GHz-26GHz

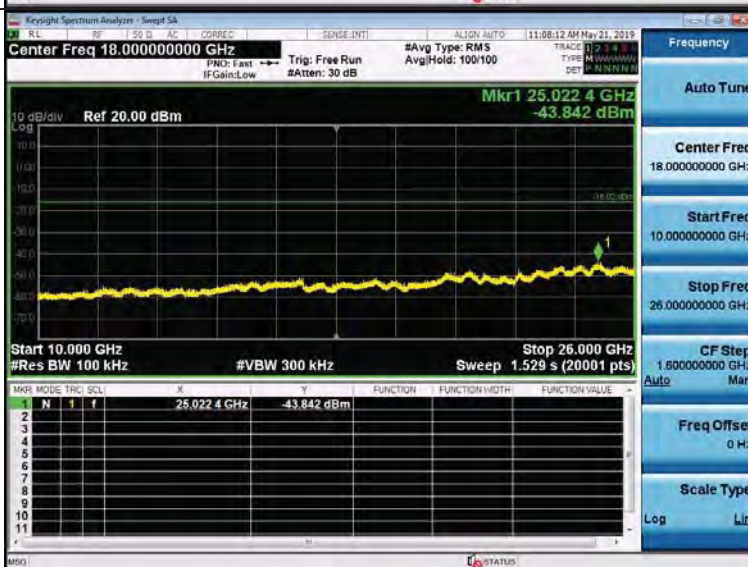


8DPSK LCH Graphs

Reference

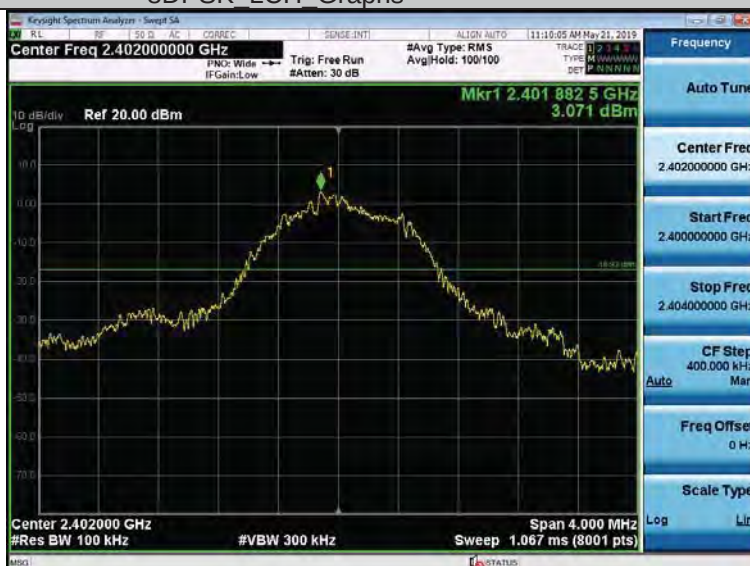

30MHz-10GHz

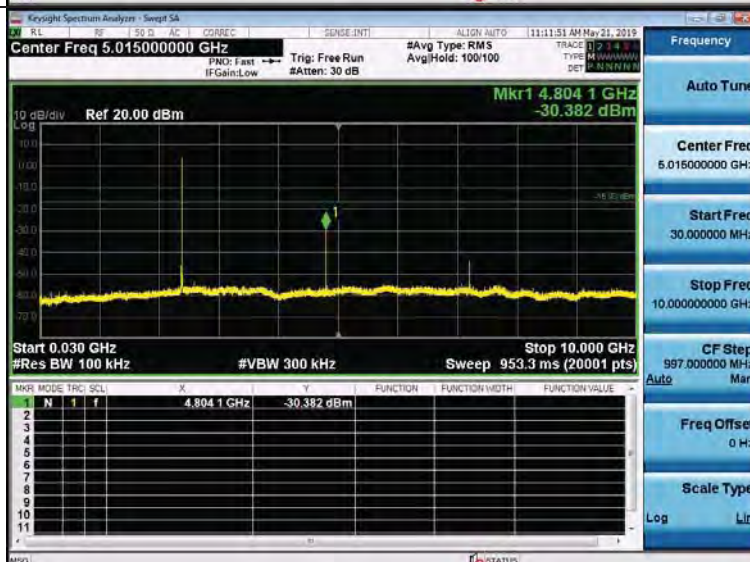

10GHz-26GHz




8DPSK MCH Graphs

Reference



30MHz-10GHz

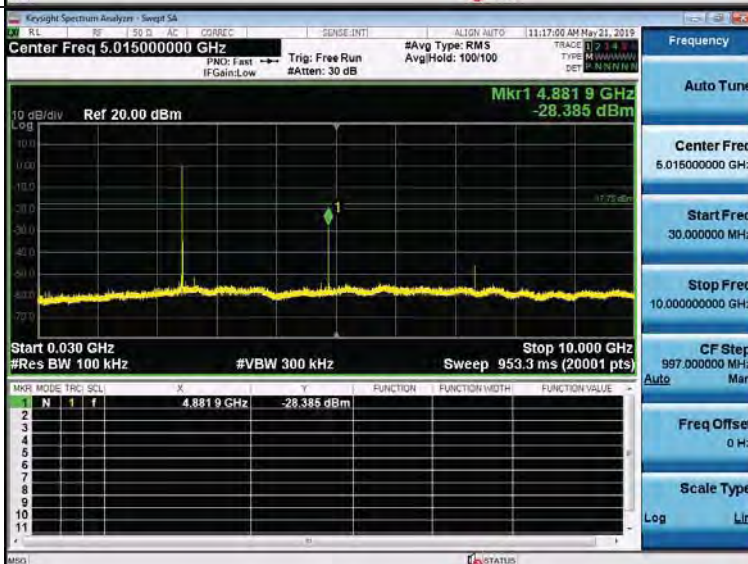

10GHz-26GHz




8DPSK HCH Graphs

Reference



30MHz-10GHz

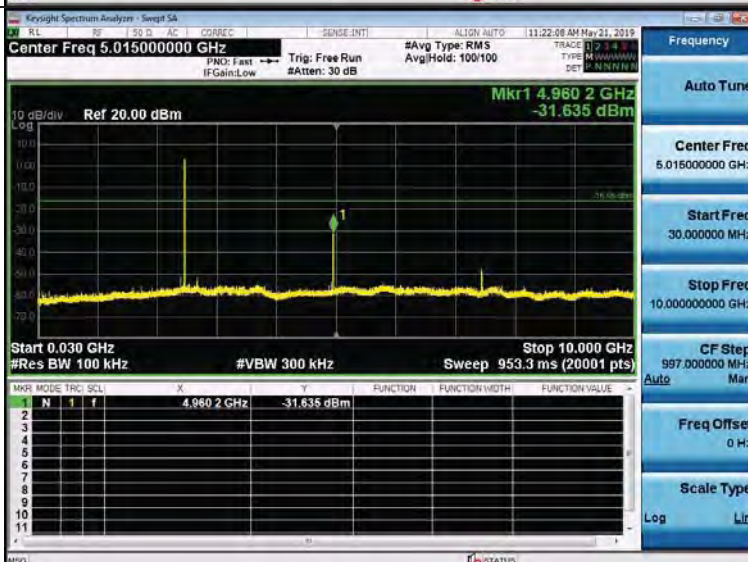

10GHz-26GHz



Remark:

Pre test 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.10 Other requirements Frequency Hopping Spread Spectrum System

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:
The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals. Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section. The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.	
Compliance for section 15.247(a)(1)	
According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> An example of Pseudorandom Frequency Hopping Sequence as follow: Each frequency used equally on the average by each transmitter. According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.	
Compliance for section 15.247(g)	
According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.	

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

5.11 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Peak	100 kHz	300kHz	Peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

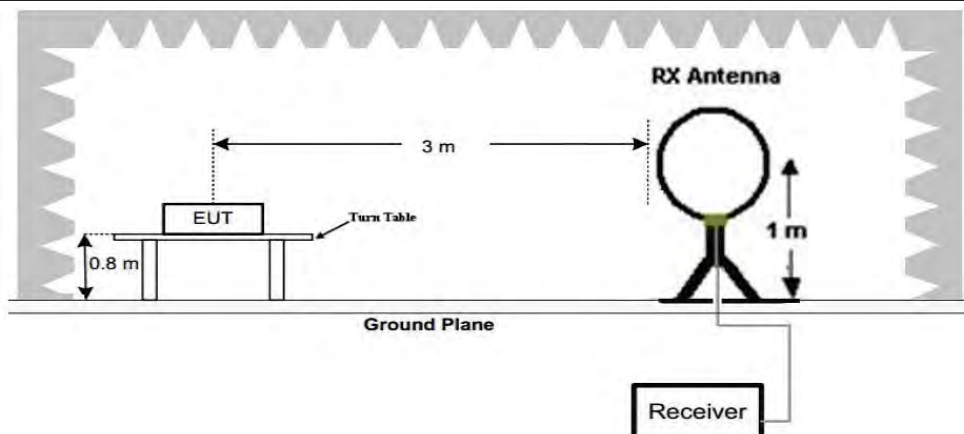


Figure 1. Below 30MHz

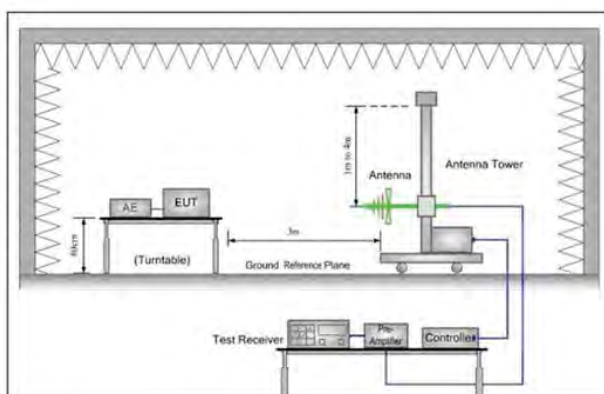


Figure 2. 30MHz to 1GHz

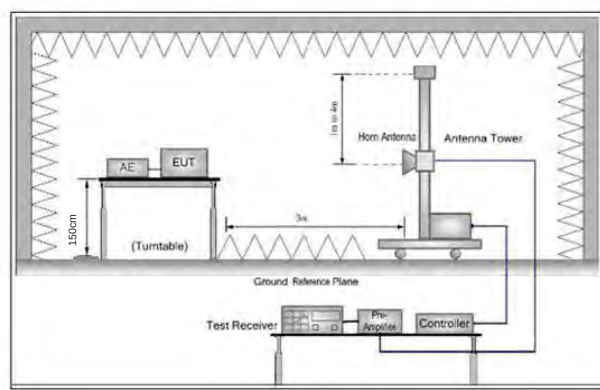



Figure 3. Above 1 GHz

Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode.
Final Test Mode:	Through Pre-scan, find the 3DH5 of data type and 8DPSK modulation is the worst case. For below 1GHz part, through pre-scan, the worst case is the highest channel. Only the worst case is recorded in the report.
Test Results:	Pass

5.11.1 Radiated Emission below 1GHz

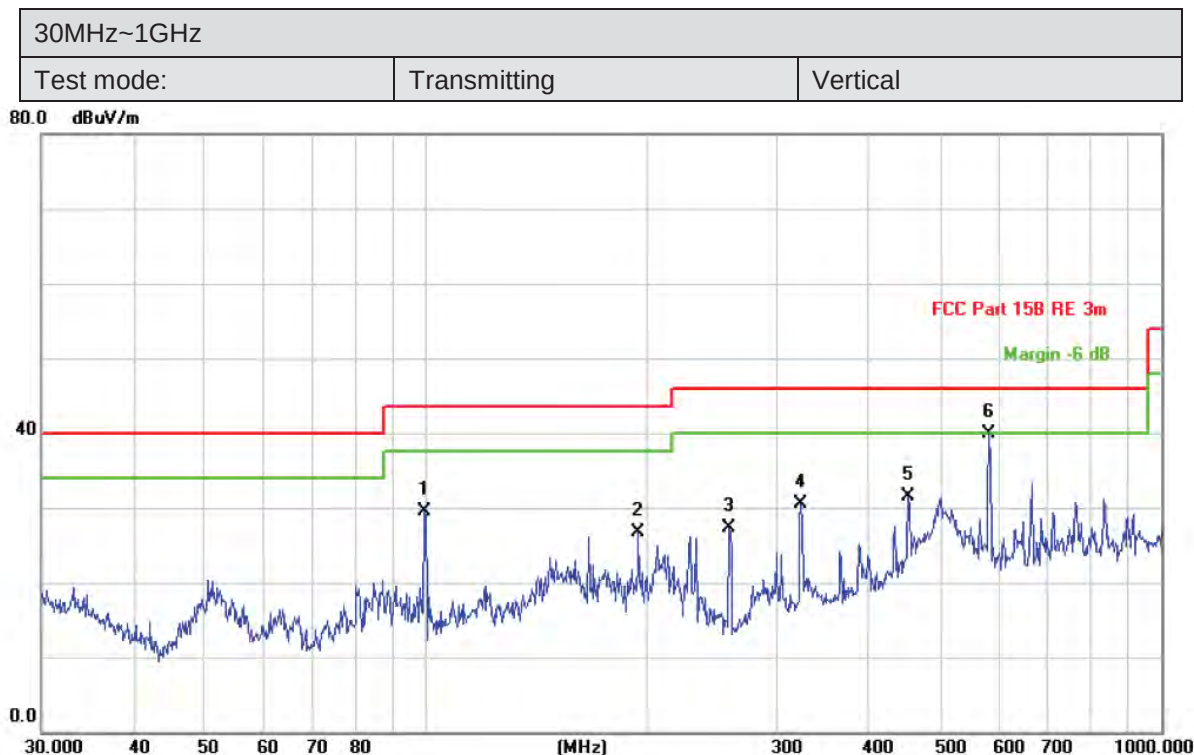

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		99.5281	45.44	-15.99	29.45	43.50	-14.05	QP		
2		194.4534	40.42	-13.70	26.72	43.50	-16.78	QP		
3		258.3264	39.81	-12.55	27.26	46.00	-18.74	QP		
4		323.3204	41.08	-10.57	30.51	46.00	-15.49	QP		
5		452.7197	38.39	-6.94	31.45	46.00	-14.55	QP		
6	*	582.7425	44.08	-4.22	39.86	46.00	-6.14	QP		

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		99.8777	39.79	-15.91	23.88	43.50	-19.62	QP		
2		193.7728	50.19	-14.01	36.18	43.50	-7.32	QP		
3		227.6906	49.23	-13.27	35.96	46.00	-10.04	QP		
4	*	323.3204	50.78	-9.90	40.88	46.00	-5.12	QP		
5		452.7197	47.05	-7.22	39.83	46.00	-6.17	QP		
6		839.1818	34.18	-0.89	33.29	46.00	-12.71	QP		

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.11.2 Transmitter Emission above 1GHz

mode:		GFSK(DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	55.67	-9.2	46.47	74	-27.53	Peak	H
2400	56.83	-9.39	47.44	74	-26.56	Peak	H
4804	52.23	-4.33	47.90	74	-26.10	Peak	H
7206	49.22	1.01	50.23	74	-23.77	Peak	H
2390	55.27	-9.2	46.07	74	-27.93	Peak	V
2400	56.21	-9.39	46.82	74	-27.18	Peak	V
4804	54.49	-4.33	50.16	74	-23.84	Peak	V
7206	49.55	1.01	50.56	74	-23.44	Peak	V

mode:		GFSK(DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4882	52.33	-4.11	48.22	74	-25.78	Peak	H
7323	49.49	1.51	51.00	74	-23.00	Peak	H
4882	53.25	-4.11	49.14	74	-24.86	Peak	V
7323	49.19	1.51	50.70	74	-23.30	Peak	V

mode:		GFSK(DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.5	56.69	-9.29	47.40	74	-26.60	Peak	H
4960	50.83	-4.04	46.79	74	-27.21	Peak	H
7440	48.79	1.57	50.36	74	-23.64	Peak	H
2483.5	53.28	-9.29	43.99	74	-30.01	Peak	V
4960	49.03	-4.04	44.99	74	-29.01	Peak	V
7440	50.21	1.57	51.78	74	-22.22	Peak	V

mode:		$\pi/4$ DQPSK (2DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2390	55.21	-9.2	46.01	74	-27.99	Peak	H
2400	56.27	-9.39	46.88	74	-27.12	Peak	H
4804	53.62	-4.33	49.29	74	-24.71	Peak	H
7206	50.36	1.01	51.37	74	-22.63	Peak	H
2390	53.71	-9.2	44.51	74	-29.49	Peak	V
2400	54.99	-9.39	45.60	74	-28.40	Peak	V
4804	54.14	-4.33	49.81	74	-24.19	Peak	V
7206	48.57	1.01	49.58	74	-24.42	Peak	V

mode:		$\pi/4$ DQPSK (2DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
4882	52.34	-4.11	48.23	74	-25.77	Peak	H
7323	48.74	1.51	50.25	74	-23.75	Peak	H
4882	53.95	-4.11	49.84	74	-24.16	Peak	V
7323	50.26	1.51	51.77	74	-22.23	Peak	V

mode:		$\pi/4$ DQPSK (2DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2483.5	54.33	-9.29	45.04	74	-28.96	Peak	H
4960	53.13	-4.04	49.09	74	-24.91	Peak	H
7440	49.58	1.57	51.15	74	-22.85	Peak	H
2483.5	54.68	-9.29	45.39	74	-28.61	Peak	V
4960	49.33	-4.04	45.29	74	-28.71	Peak	V
7440	49.09	1.57	50.66	74	-23.34	Peak	V

mode:		8DPSK(3DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	54.26	-9.2	45.06	74	-28.94	Peak	H
2400	56.95	-9.39	47.56	74	-26.44	Peak	H
4804	51.27	-4.33	46.94	74	-27.06	Peak	H
7206	50.96	1.01	51.97	74	-22.03	Peak	H
2390	56.20	-9.2	47.00	74	-27.00	Peak	V
2400	56.40	-9.39	47.01	74	-26.99	Peak	V
4804	53.87	-4.33	49.54	74	-24.46	Peak	V
7206	50.55	1.01	51.56	74	-22.44	Peak	V

mode:		8DPSK(3DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4882	51.09	-4.11	46.98	74	-27.02	Peak	H
7323	49.03	1.51	50.54	74	-23.46	Peak	H
4882	53.24	-4.11	49.13	74	-24.87	Peak	V
7323	50.71	1.51	52.22	74	-21.78	Peak	V


Worse case mode:		8DPSK(3DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.5	54.96	-9.29	45.67	74	-28.33	Peak	H
4960	50.71	-4.04	46.67	74	-27.33	Peak	H
7440	50.61	1.57	52.18	74	-21.82	Peak	H
2483.5	53.34	-9.29	44.05	74	-29.95	Peak	V
4960	49.81	-4.04	45.77	74	-28.23	Peak	V
7440	51.23	1.57	52.80	74	-21.20	Peak	V

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

6 Photographs - EUT Test Setup

6.1 Radiated Emission

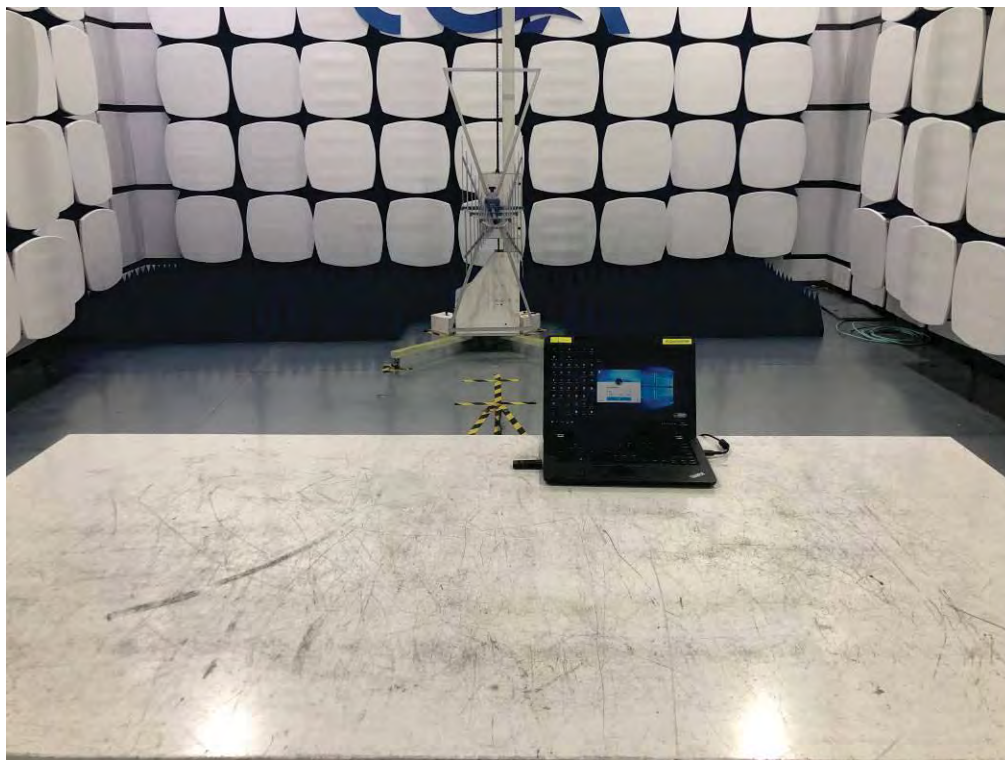


30MHz~1GHz




Above 1GHz

6.2 Conducted Emission

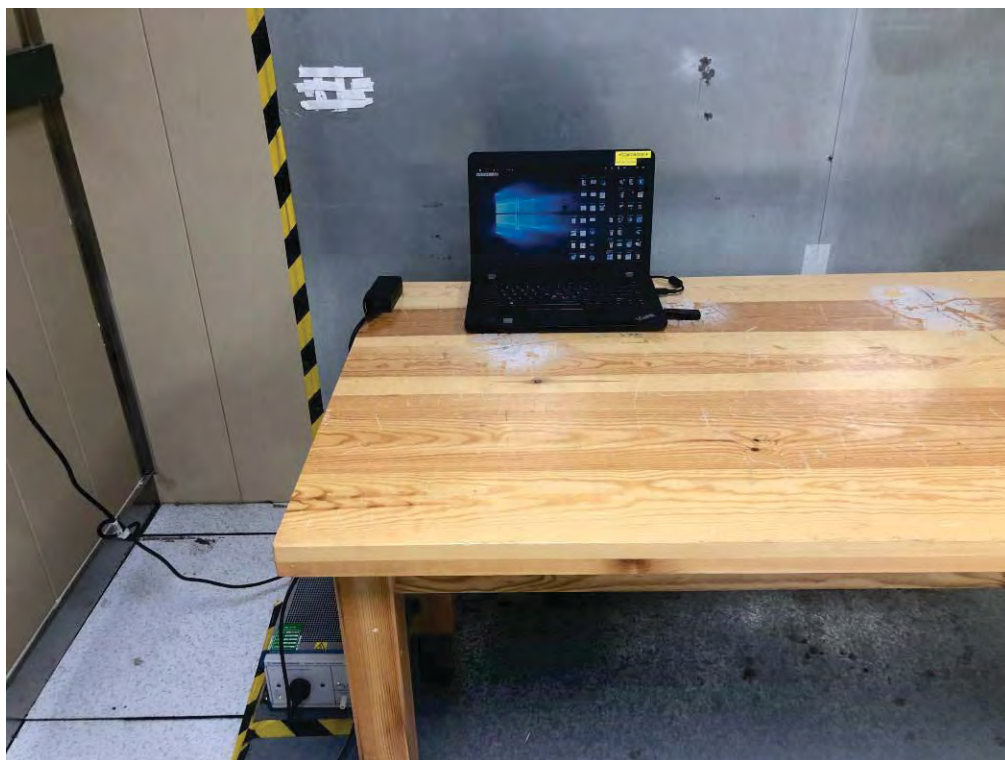



7 PHOTOGRAPHS OF EUT


External Photos of EUT

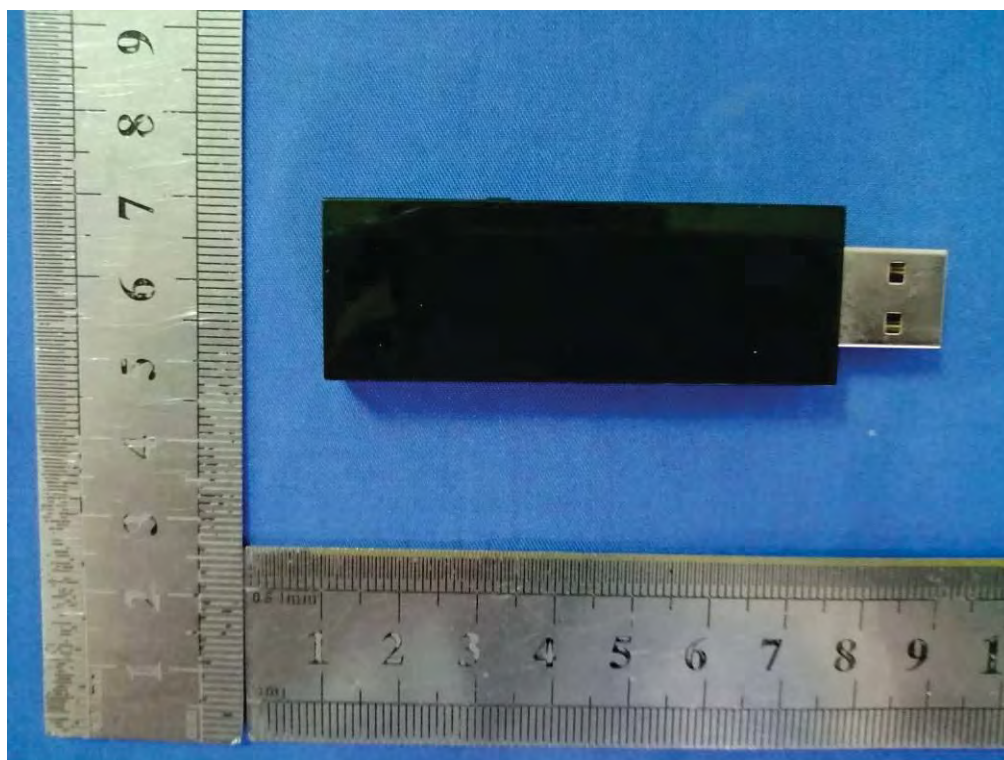



Internal Photos of EUT

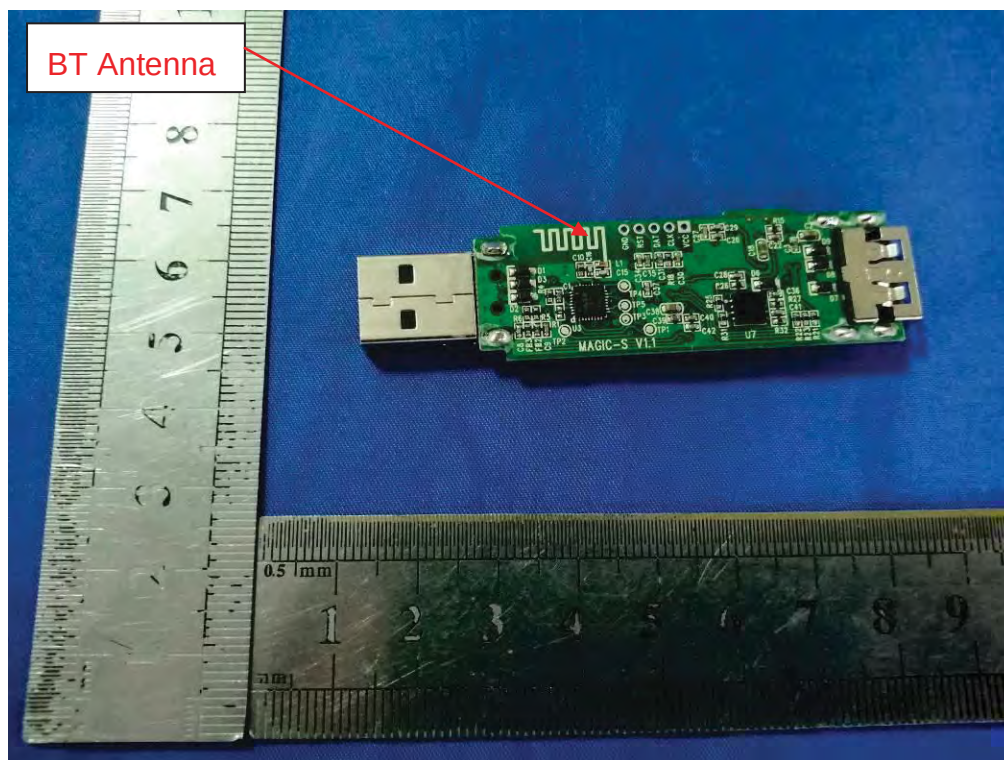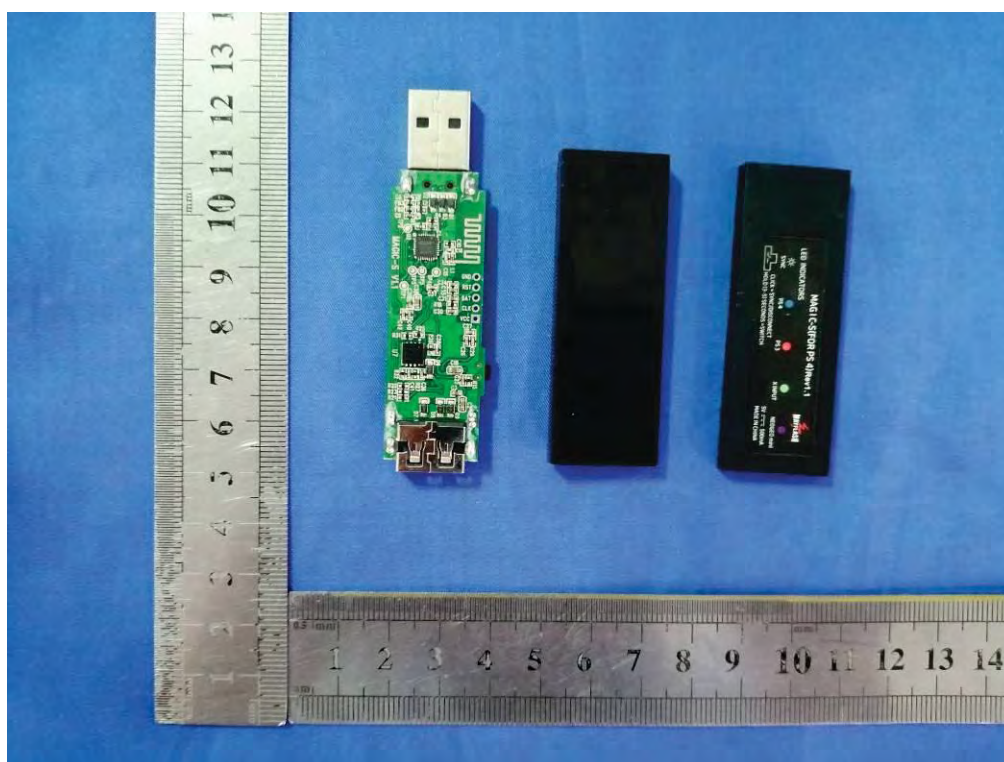

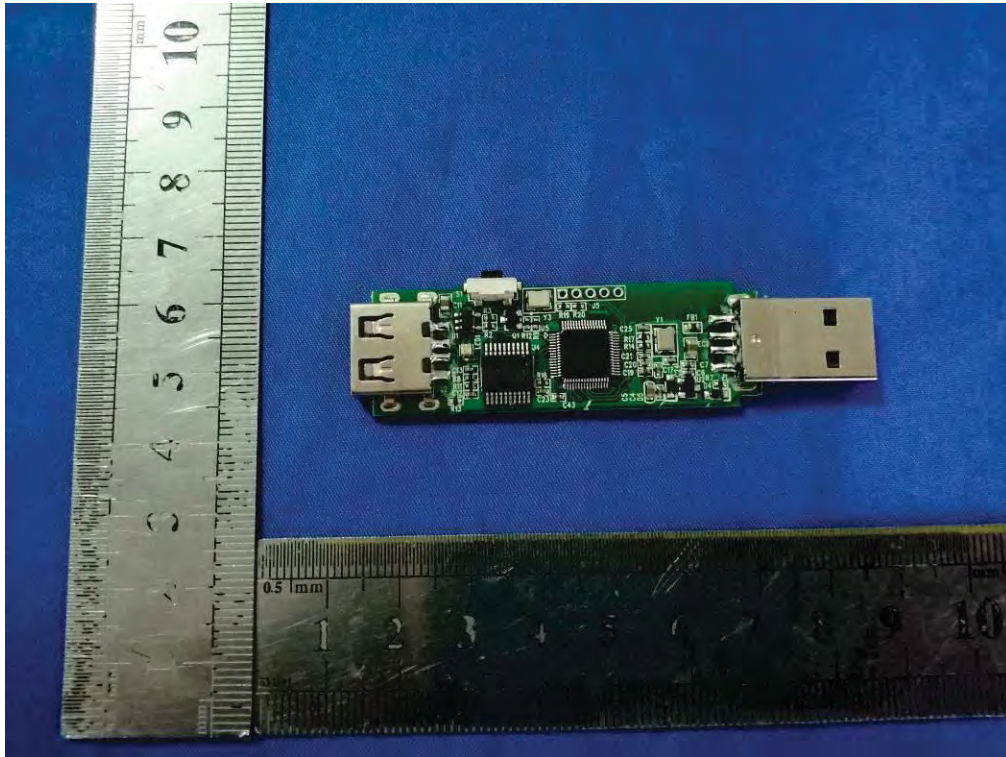

*****THE END*****