

6. Enable Smart Life Skill, the sign in your Smart Life account to complete the account linking.

7. After successful account linking, ask Alexa to discover devices. After a 20-second device discovery, Alexa will show all the discovered devices.

8. Back to Menu by clicking "Home", and then click "Smart Home".

• 7 •

9. In Smart Home page, you can group your devices for different categories. Your Smart Life APP has been skilled with Alexa. Now you can control your Smart Light through Alexa.

How to connect Smart Device to Google Home

1. Click on the Google Home App and make sure Google Home is installed. If not, please follow Google Home installation instruction to complete the installation.
2. Once Google Home is installed, in the upper left corner of APP Home page, clicking  button to show APP menu, then clicking "Home Control".

10. Assign rooms for your smart device.

• 8 •

• 9 •

• 10 •

Smart Home

3. On "Add devices" page, scroll down to find "Smart Life" and then click "Sign in Smart Life App with your Smart Life App account and password" choose Smart Life App in the drop down menu to complete the account linking.

4. After successful account linking, you can see all the smart devices from your Smart Life App account in Google Home App. You can assign rooms for each device.

5. Now you can use Google Home to control your smart device, you can say like:

OK Google, turn on/off wall light  
OK Google, set bedroom light to red

• 11 •

Product Features

- Color Adjustment
- Brightness Adjustment
- One-key Open ration
- Scene Mode Switch
- Timing Switch
- Voice Control
- Phone Control
- Firmware Upgrade

Safety Precautions

1. Please confirm the working voltage before using this product, the use of inappropriate voltage may cause damage to the product and security risks.
2. Please don't dismantle the product by yourself.
3. The ceiling will generate heat when working. Please don't use it in a sealed lamp for a long time. Keep the air flow around.
4. The optical radiation of the led lamp meets the IEC62471-2005 exemption level requirements.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:


- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

• 12 •

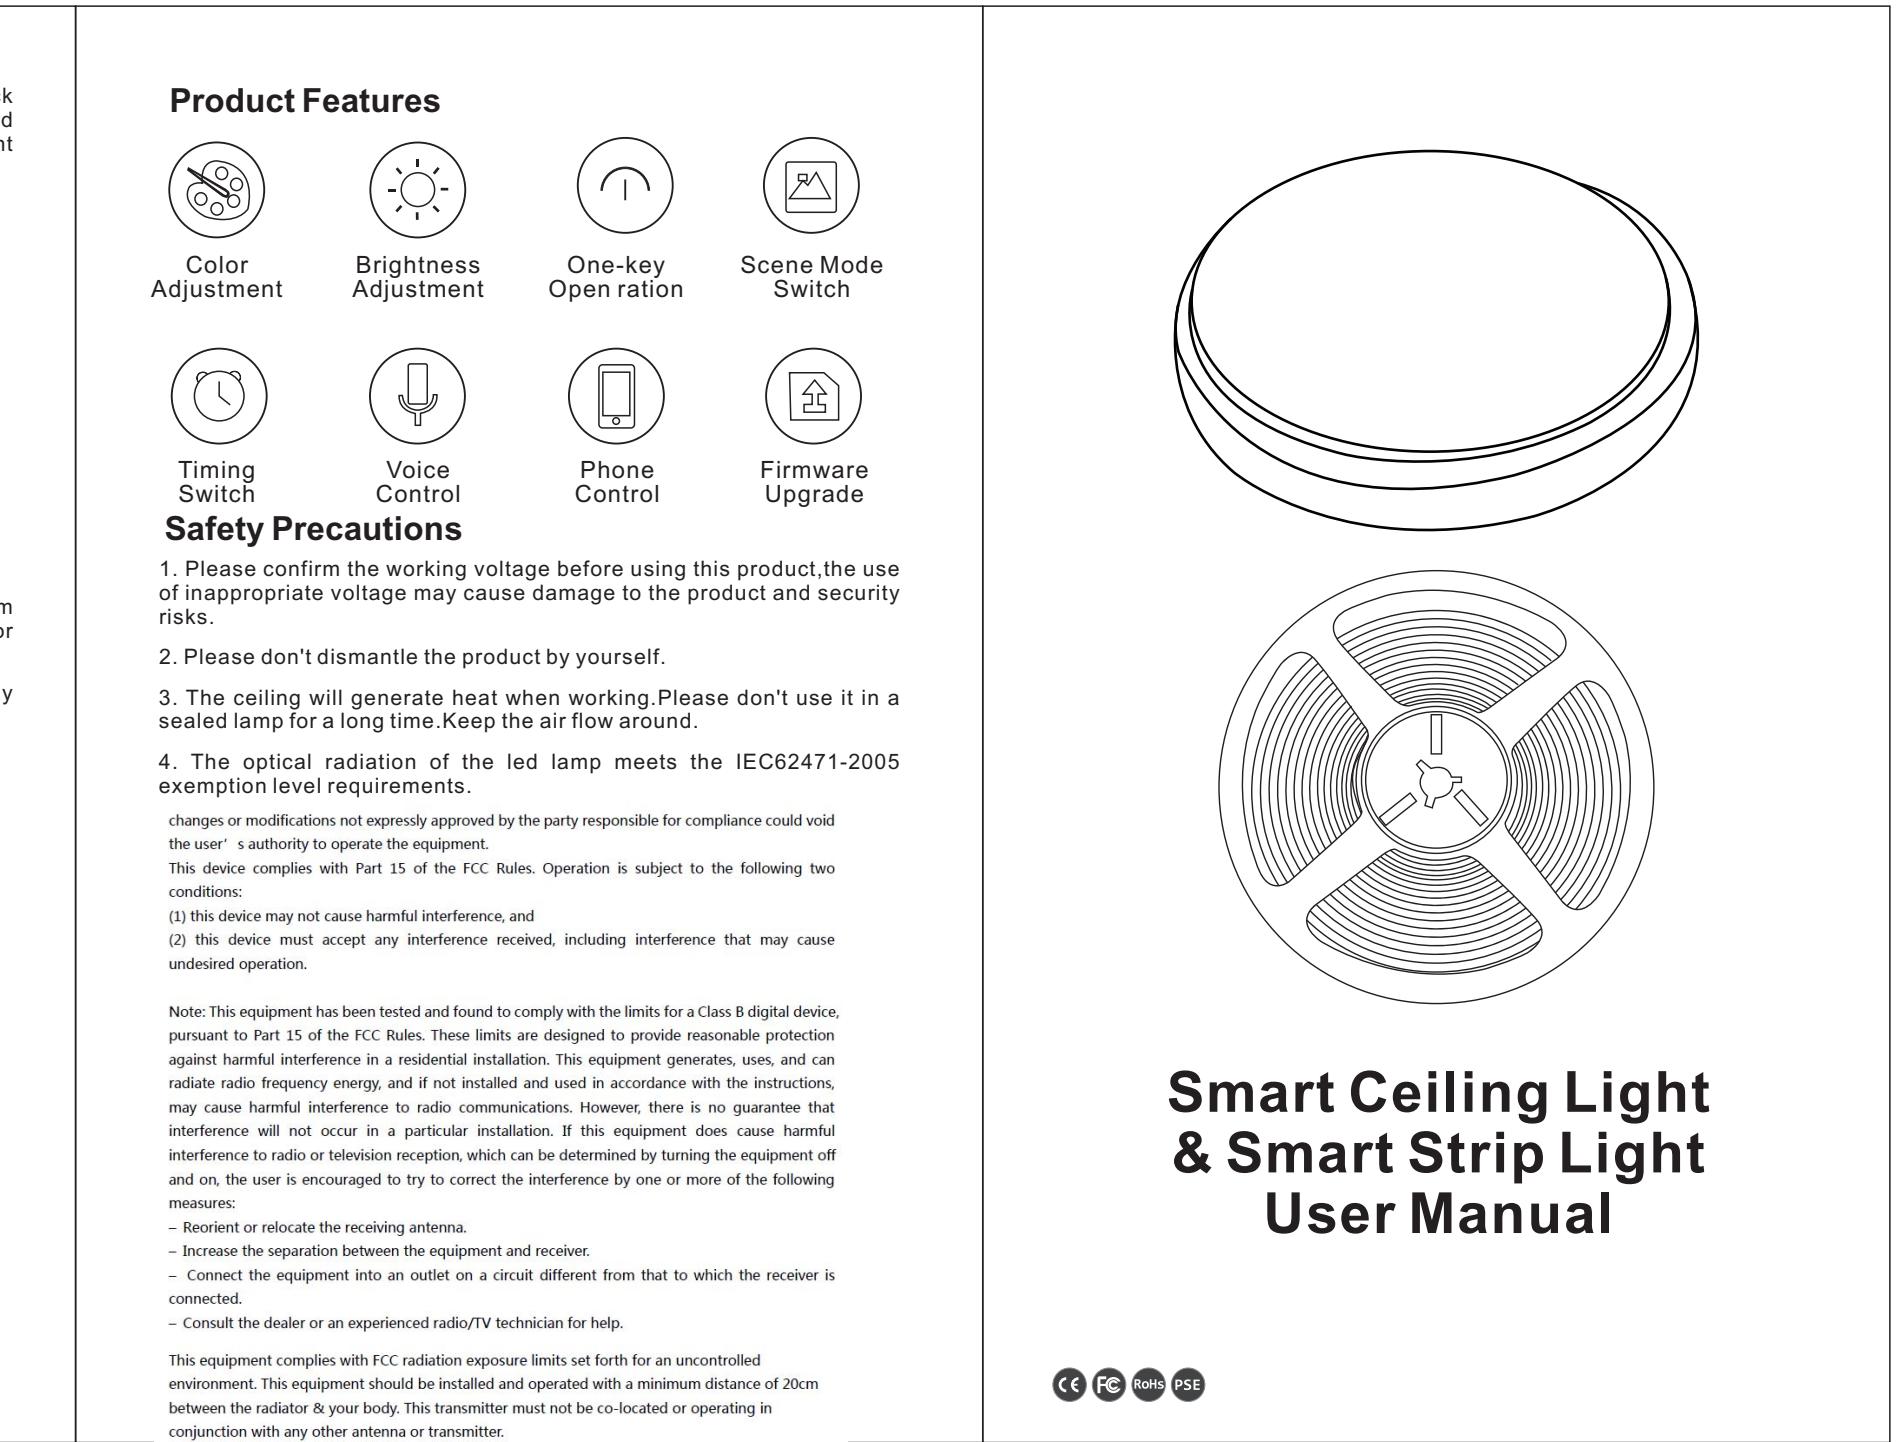

**Specification**

Product:	Smart light ceiling	Smart light ceiling	Smart light ceiling
Luminous Flux:	≥1150 lm	≥1450 lm	≥1900 lm
Input Voltage:	AC90-265V 50/60Hz	AC90-265V 50/60Hz	AC90-265V 50/60Hz
Lamp Base:	KD2/3	KD2/3	KD2/3
Rated Power:	15 W	18 W	23 W
Ra:	>80	>80	>80
CCT	2700-6500K+RGB		
Size:	Ø290*90mm	Ø330*100mm	Ø385*110mm
Working Hours:	>20000h	>20000h	>20000h
Wireless Connect:	AC90-265V 50/60Hz	2.4GHz 802.11b/g/n	2.4GHz 802.11b/g/n
Support system:	Android/IOS		

Product:	Smart light strip	Smart light strip	Smart light strip
Luminous Flux:	35-45 lumens (lm)/W	40-50 lumens (lm)/W	50-60 lumens (lm)/W
Adapter input voltage	AC100-240V 50/60Hz (Output Voltage: DC 24V 2.5A)	AC100-240V 50/60Hz (Output Voltage: DC 24V 2.5A)	AC100-240V 50/60Hz (Output Voltage: DC 24V 3A)
Led Quantity:	30 LED/m	48 LED/m	60 LED/m
CCT	3000K+RGB		
wattage:	6 W/m	10 W/m	12 W/m
Ra:	>80	>80	>80
Strip width:	0.5 in (12mm)		
Strip length:	16.4 ft (5m)		
Working Hours:	>20000h	>20000h	>20000h
Wireless Connect:	2.4GHz 802.11b/g/n	2.4GHz 802.11b/g/n	2.4GHz 802.11b/g/n

• 1 •

**Factory Reset**

Turn on and off the lamp 5 times. Hold for 2 seconds when the lamp is turned on or off. For the 5th time, hold the turn-on mode for about 5 seconds. If the light blinks, which means the lamp is reset successfully.

**Installation**

1. Installing ceiling  
Install the ceiling and turn on the power switch. Use quick-connect terminal wiring. Turn the mask open, insert the pre-wired terminals into the quick-connect terminals, then fix the ceiling lamp, a peripheral switch, and finally install the top cover. that's it.

2. Installing strip  
Use the docking terminal cable to make the lamp strap and the adapter better connected. The back of the lamp strip has double-sided tape. Before fixing the lamp strip, it is best to wipe the towel with a place to be glued. This can better stick the lamp strip. On the table or on the glass. Not only that, but also the time for fixing the lamp strip is extended, and the lamp strip is not easy to fall down.

• 2 •

**Attention**

1. Please insure the power is turned off when installing, removing or inspecting the ceiling.
2. Please don't install the ceiling to dimmable appliances in case of damaging the ceiling (For example, dimmable desk lamp).
3. Please don't use it in a damp environment.
4. It is not recommended to use the ceiling in a narrow or sealed space in case of losing signals or bad heat dissipation.

**Smart Control**

This product is compatible with the smart platform and can be controlled by "Smart Life APP" or "Tuya Smart APP", supporting smart voice control such as Amazon echo, Google Home, etc. Simplified steps to install App on your smart device and pair with Amazon Alexa, Google Assistant using Smart Life App on Apple Store/Google Play Store Compatible with any smart phone or including any Android and Apple device.

**How to connect Smart Device to Wi-Fi network**

Download Smart Life from [App Store](#) or [Google Play](#). Download or scan the QR code and install the Smart Life App for either iOS or Android. Once downloaded, the app will ask you to register your device. Enter your phone number or email whichever one makes you feel comfortable and select the country you live in. If phone number is selected you will receive a text with a registration code. If you choose email you will then create a password.

• 3 •



**Use your phone to control your lights**

1. Download the Smart Life app, click to enter the app, log in or register an account.
2. Click Add Device and select Smart Lighting--Lighting Devices.
3. Switch the bulb quickly 3 times, and turn it on for the fourth time. The bulb will flash. Now you can click on Confirm light blinks rapidly on the app. If you can't connect, please try a few more times. Because it is possible that the network is not good enough to connect to your lights.
4. Connect to the network, smart life APP will find your lights, when it reaches 100%, you can use your mobile phone to control your light bulb. For your convenience, you can give your own light bulb a name, like: bedroom light.

• 4 •

**How to connect Smart Device to Amazon Alexa**

1. Click on Smart Life App, sign in your account and make sure Smart Light is in the device list.
2. Modify device name so that Alexa can easily recognize, such as Living room Light, Bedroom light, etc.
3. Minimize Smart Life App, then click the Alexa APP and sign in your Alexa account and make sure you have at least one Alexa voice-controlled device installed.
4. In the upper left corner of the Home page, click "Home" the button to show the App menu. Then click "Skills" in the menu.
5. Type in "Smart life" in the search and click the search button next to it.

• 5 •

• 6 •