



Appendix E

RF Test Data for 5.3GWIFI (Conducted Measurement)

Product Name: Figgers Tablets

Test Model: F-tab

Environmental Conditions

Temperature:	23.6° C
Relative Humidity:	52.3%
ATM Pressure:	100.0 kPa
Test Engineer:	Can Kun
Supervised by:	Nick Peng





E.1 -26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	Ant1	27.697	≥ 0.5	Pass
NVNT	a	5300	Ant1	26.601	≥ 0.5	Pass
NVNT	a	5320	Ant1	27.178	≥ 0.5	Pass
NVNT	n20	5260	Ant1	28.143	≥ 0.5	Pass
NVNT	n20	5300	Ant1	28.067	≥ 0.5	Pass
NVNT	n20	5320	Ant1	28.74	≥ 0.5	Pass
NVNT	n40	5270	Ant1	48.957	≥ 0.5	Pass
NVNT	n40	5310	Ant1	51.257	≥ 0.5	Pass
NVNT	ac20	5260	Ant1	27.143	≥ 0.5	Pass
NVNT	ac20	5300	Ant1	27.238	≥ 0.5	Pass
NVNT	ac20	5320	Ant1	29.43	≥ 0.5	Pass
NVNT	ac40	5270	Ant1	44.763	≥ 0.5	Pass
NVNT	ac40	5310	Ant1	50.213	≥ 0.5	Pass
NVNT	ac80	5290	Ant1	86.766	≥ 0.5	Pass






Test Graphs

-26dB Bandwidth NVNT a 5260MHz Ant1

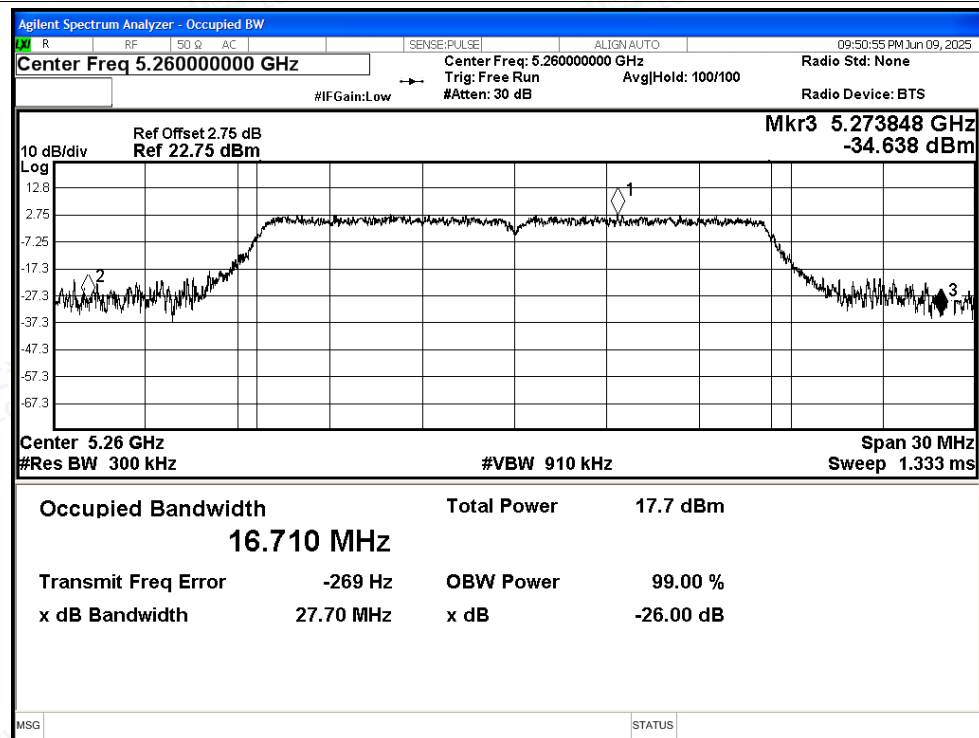

-26dB Bandwidth NVNT a 5300MHz Ant1

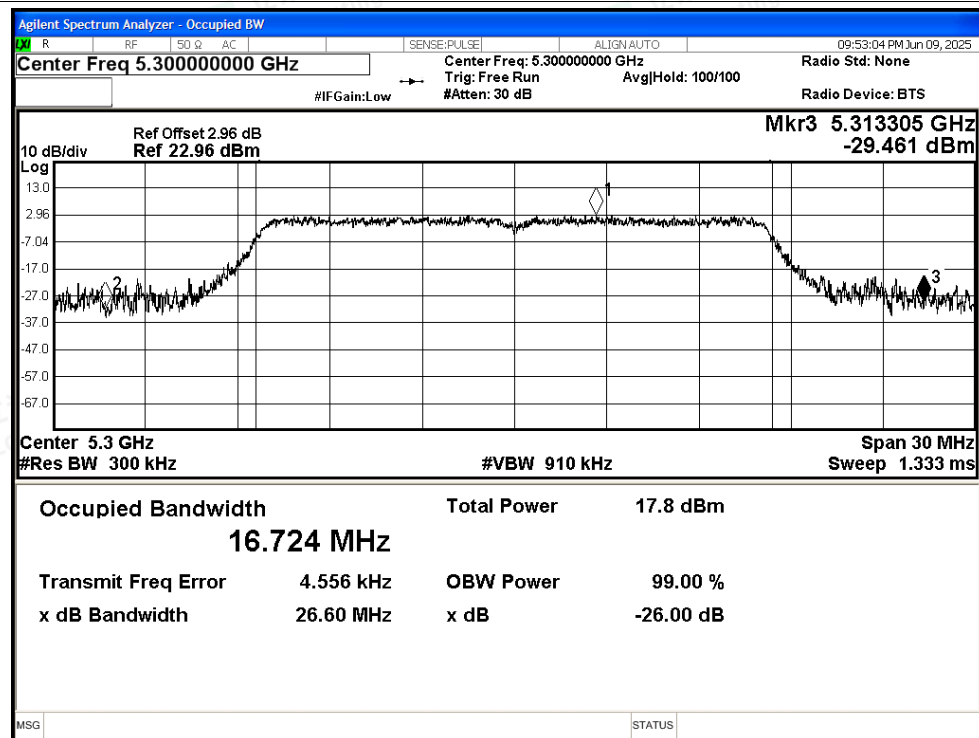

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT a 5320MHz Ant1

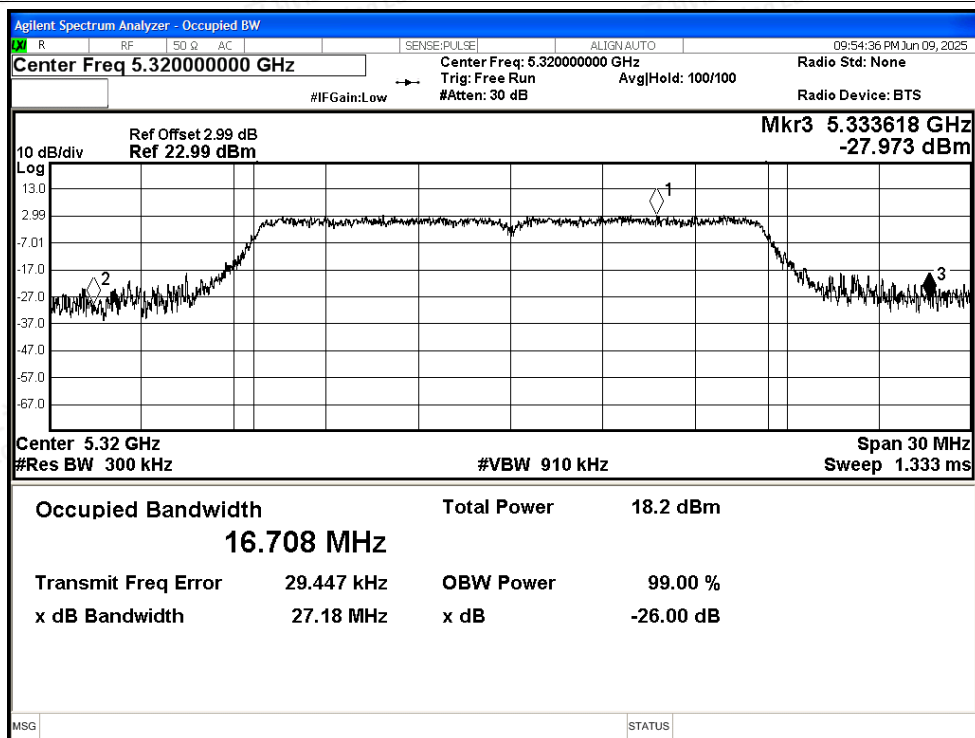

-26dB Bandwidth NVNT n20 5260MHz Ant1

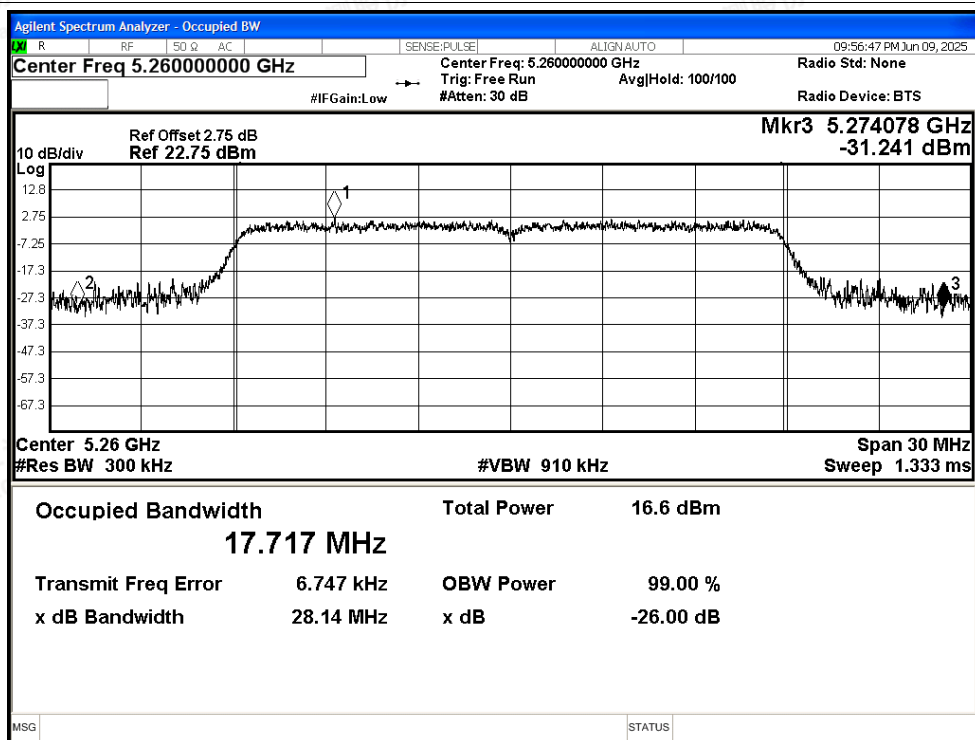

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT n20 5300MHz Ant1

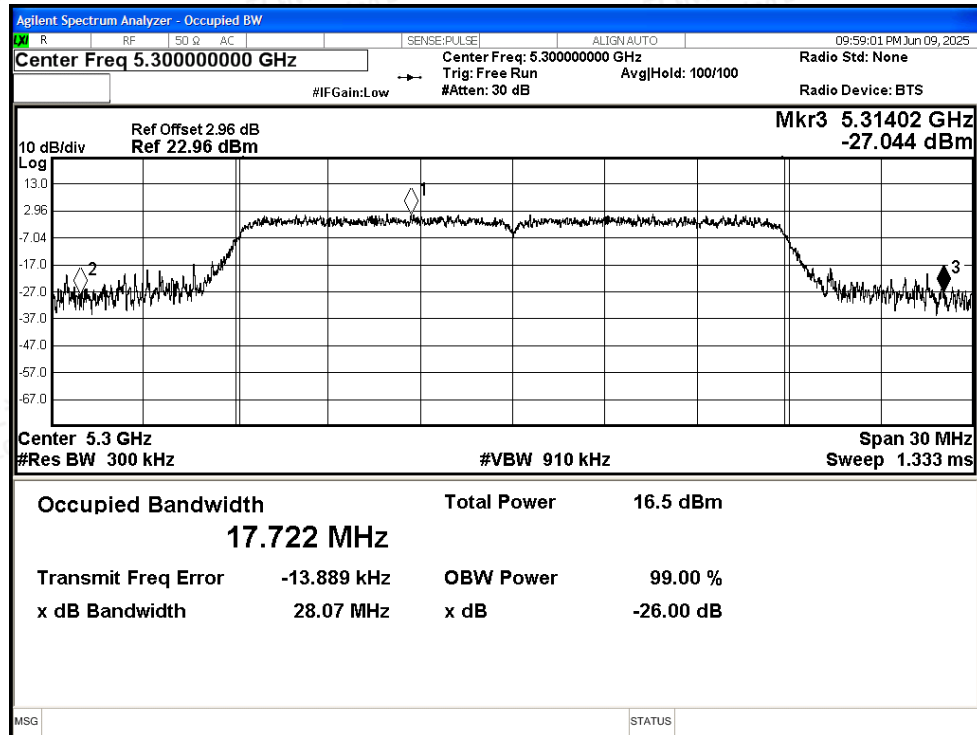

-26dB Bandwidth NVNT n20 5320MHz Ant1

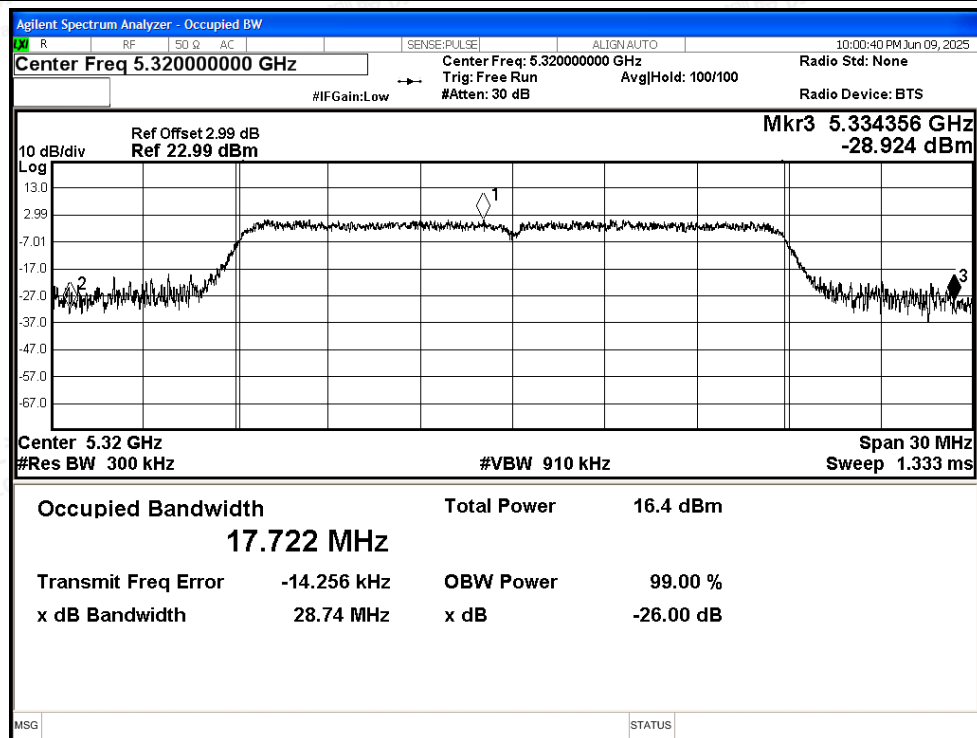

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT n40 5270MHz Ant1

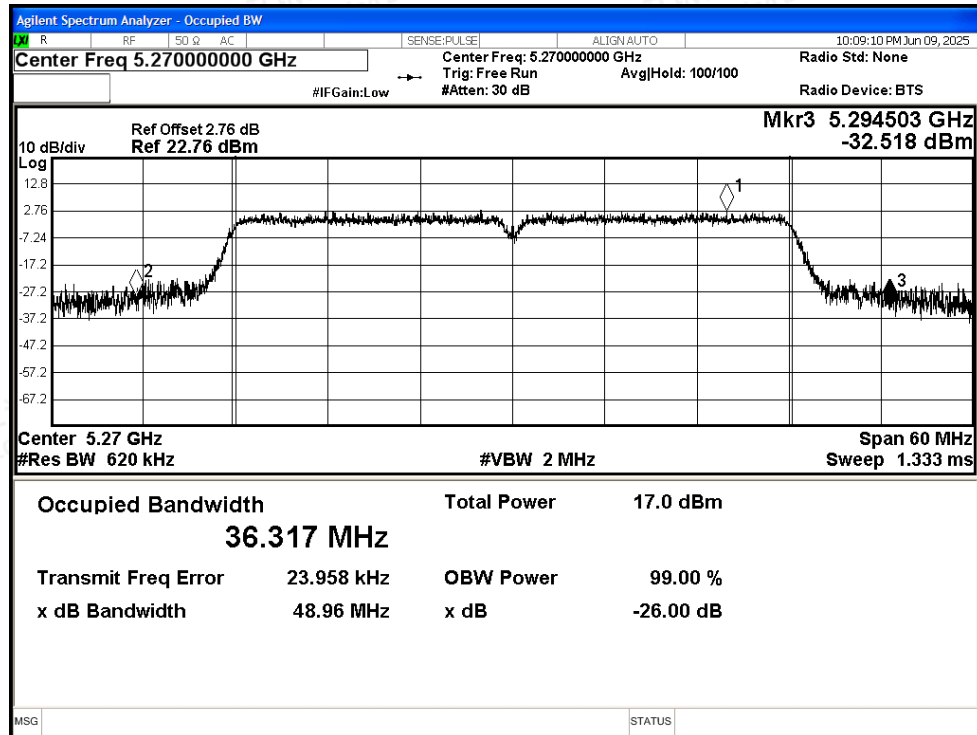

-26dB Bandwidth NVNT n40 5310MHz Ant1

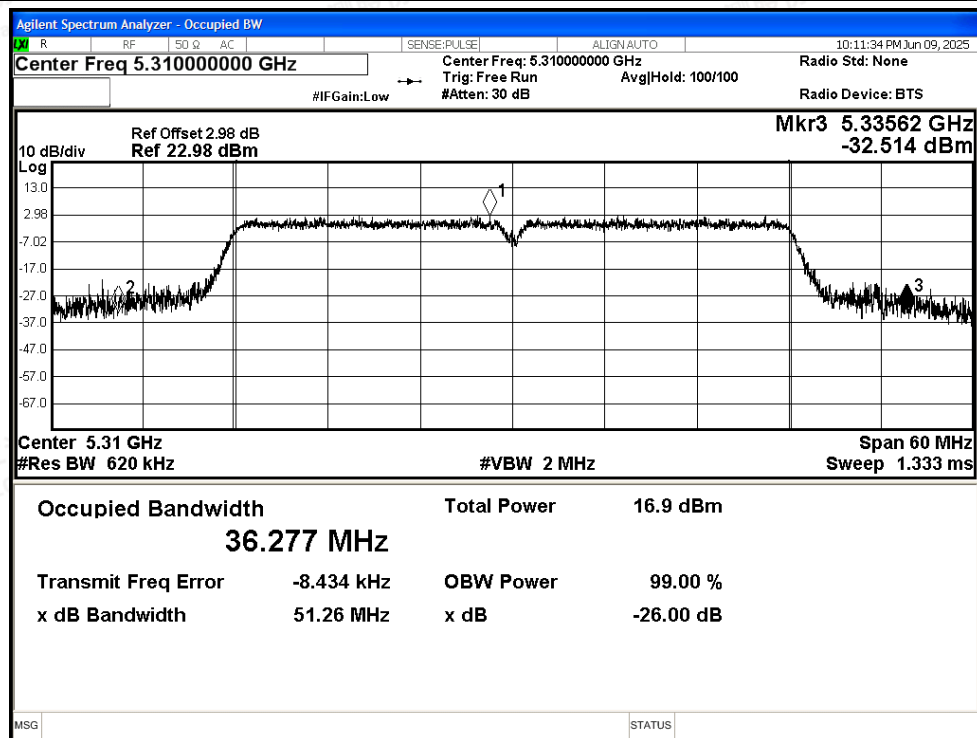

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity





-26dB Bandwidth NVNT ac20 5260MHz Ant1

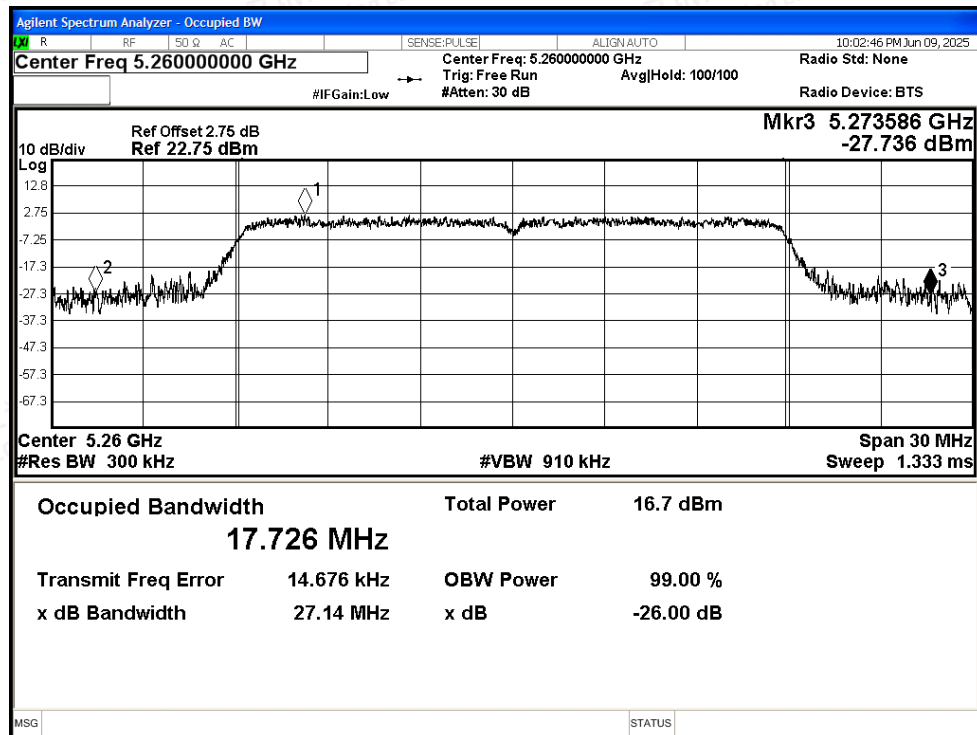

-26dB Bandwidth NVNT ac20 5300MHz Ant1

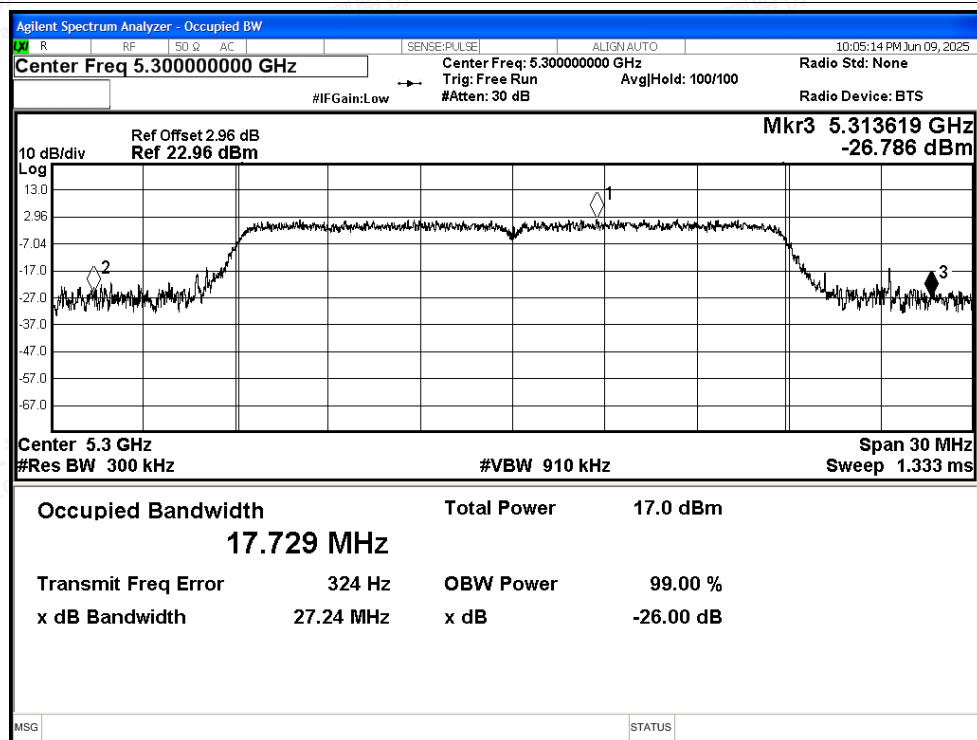

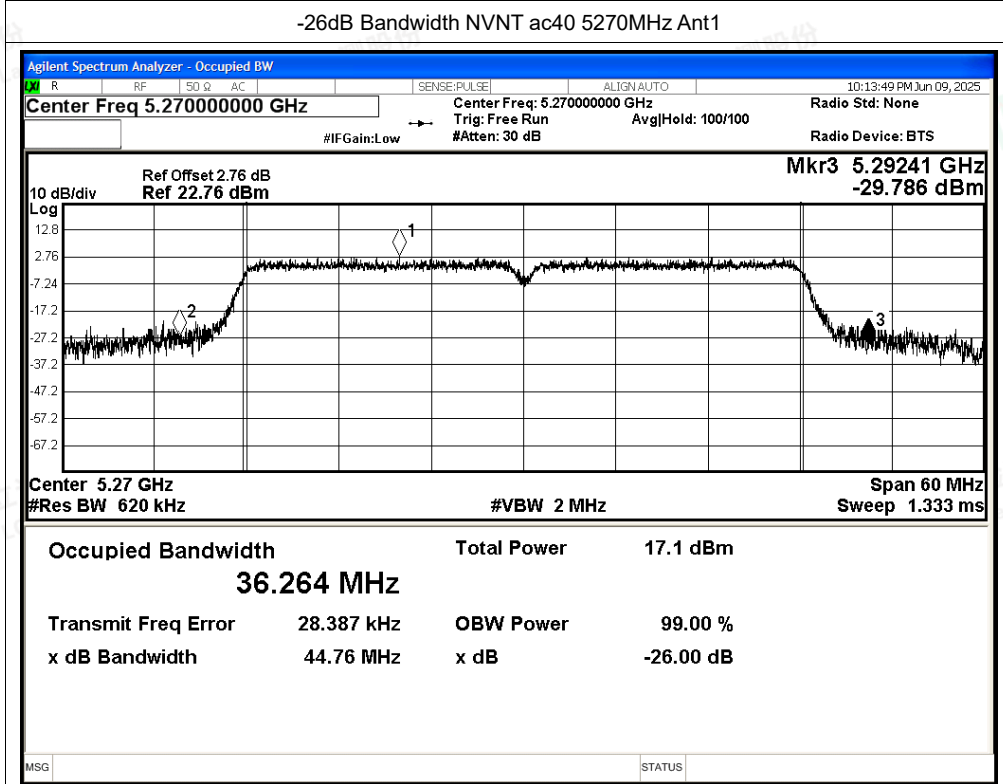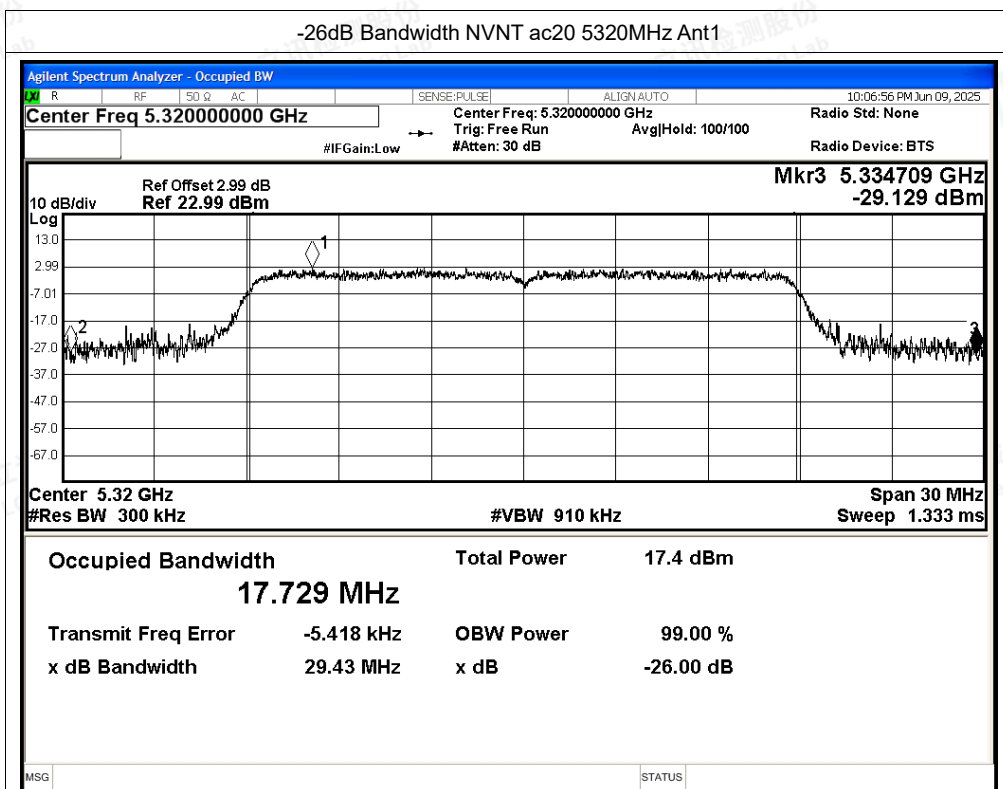

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac40 5310MHz Ant1

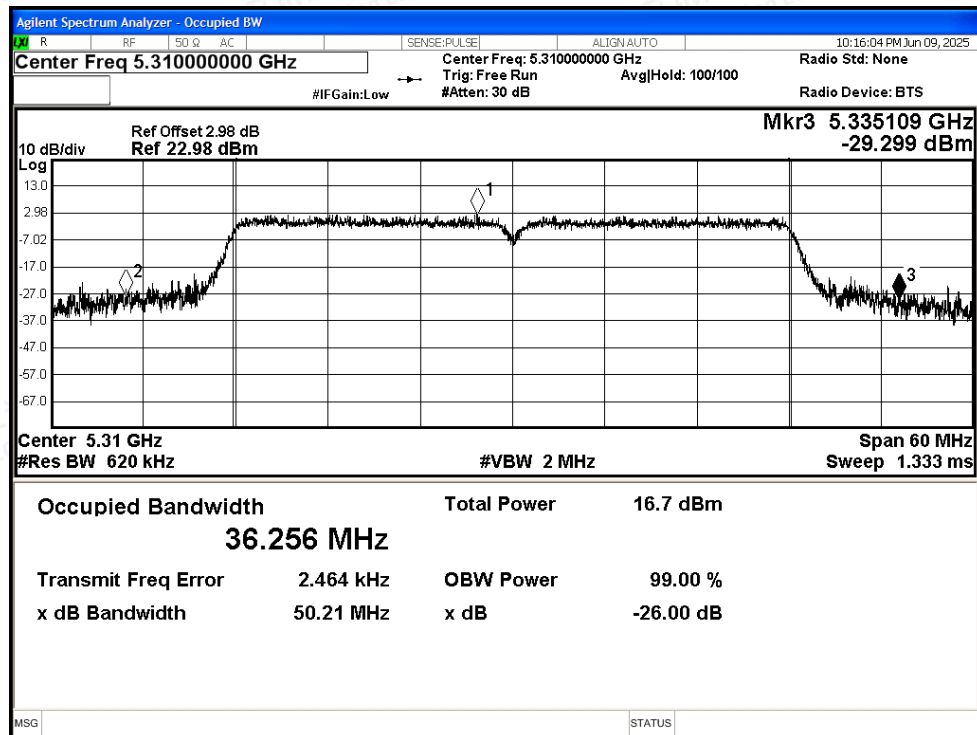

-26dB Bandwidth NVNT ac80 5290MHz Ant1

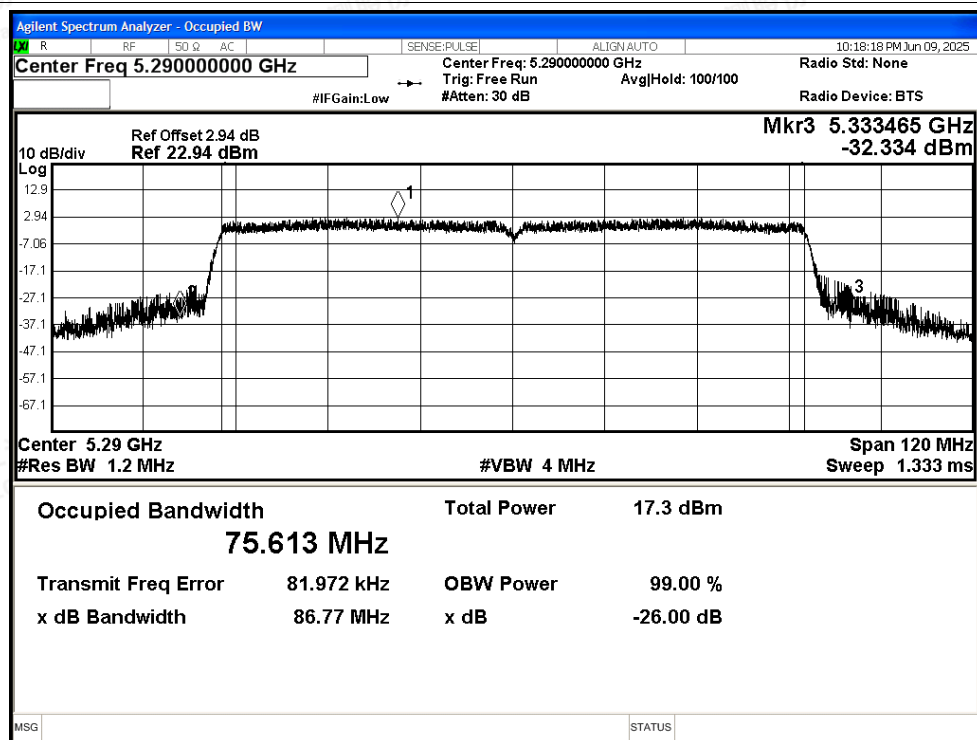

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



E.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	12.02	0.24	12.26	24	Pass
NVNT	a	5300	Ant1	12.13	0.24	12.37	24	Pass
NVNT	a	5320	Ant1	12.5	0.24	12.74	24	Pass
NVNT	n20	5260	Ant1	11.12	0.12	11.24	24	Pass
NVNT	n20	5300	Ant1	10.93	0.12	11.05	24	Pass
NVNT	n20	5320	Ant1	10.91	0.12	11.03	24	Pass
NVNT	n40	5270	Ant1	10.89	0.23	11.12	24	Pass
NVNT	n40	5310	Ant1	10.72	0.24	10.96	24	Pass
NVNT	ac20	5260	Ant1	11.18	0.12	11.3	24	Pass
NVNT	ac20	5300	Ant1	11.52	0.12	11.64	24	Pass
NVNT	ac20	5320	Ant1	11.96	0.12	12.08	24	Pass
NVNT	ac40	5270	Ant1	10.74	0.24	10.98	24	Pass
NVNT	ac40	5310	Ant1	10.46	0.24	10.7	24	Pass
NVNT	ac80	5290	Ant1	10.28	0.47	10.75	24	Pass





E.3 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5260	Ant1	1.5	0.24	1.74	11	Pass
NVNT	a	5300	Ant1	1.58	0.24	1.82	11	Pass
NVNT	a	5320	Ant1	1.92	0.24	2.16	11	Pass
NVNT	n20	5260	Ant1	0.57	0.12	0.69	11	Pass
NVNT	n20	5300	Ant1	0.2	0.12	0.32	11	Pass
NVNT	n20	5320	Ant1	-0.13	0.12	-0.01	11	Pass
NVNT	n40	5270	Ant1	-2.91	0.23	-2.68	11	Pass
NVNT	n40	5310	Ant1	-3.19	0.24	-2.95	11	Pass
NVNT	ac20	5260	Ant1	0.47	0.12	0.59	11	Pass
NVNT	ac20	5300	Ant1	0.65	0.12	0.77	11	Pass
NVNT	ac20	5320	Ant1	1.23	0.12	1.35	11	Pass
NVNT	ac40	5270	Ant1	-3.03	0.24	-2.79	11	Pass
NVNT	ac40	5310	Ant1	-3.46	0.24	-3.22	11	Pass
NVNT	ac80	5290	Ant1	-6.53	0.47	-6.06	11	Pass






Test Graphs

PSD NVNT a 5260MHz Ant1

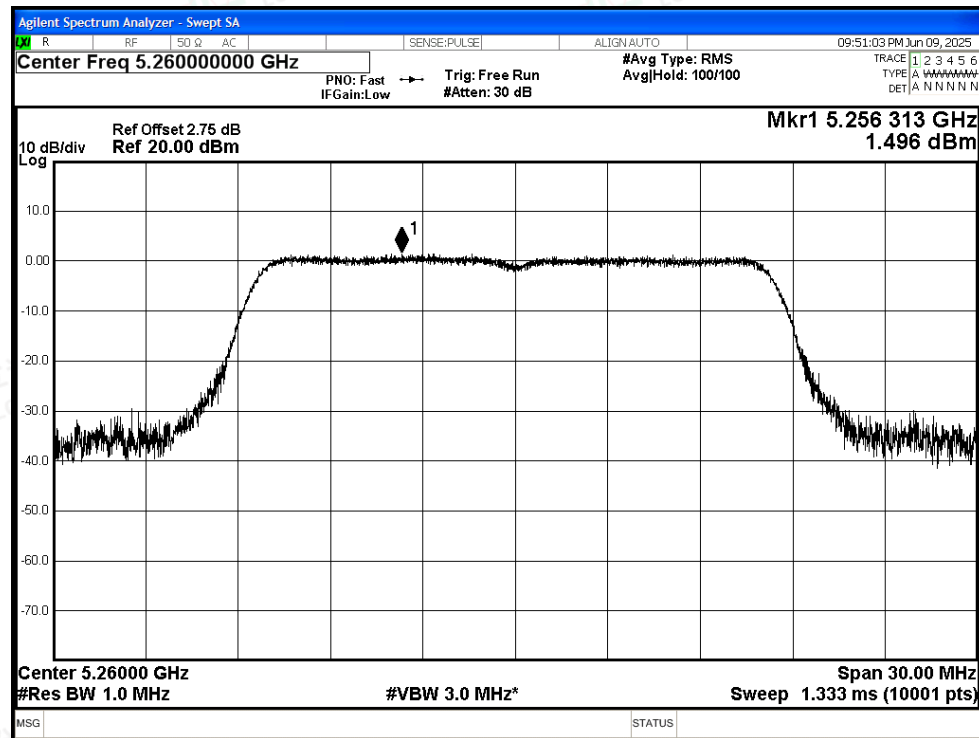

PSD NVNT a 5300MHz Ant1

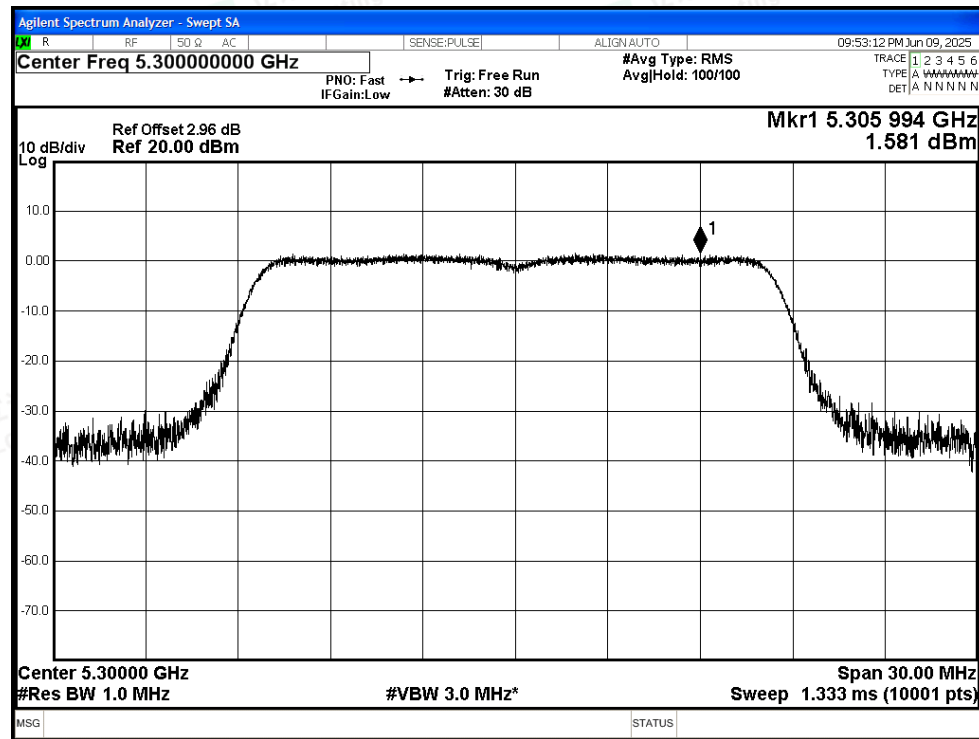

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity







PSD NVNT a 5320MHz Ant1

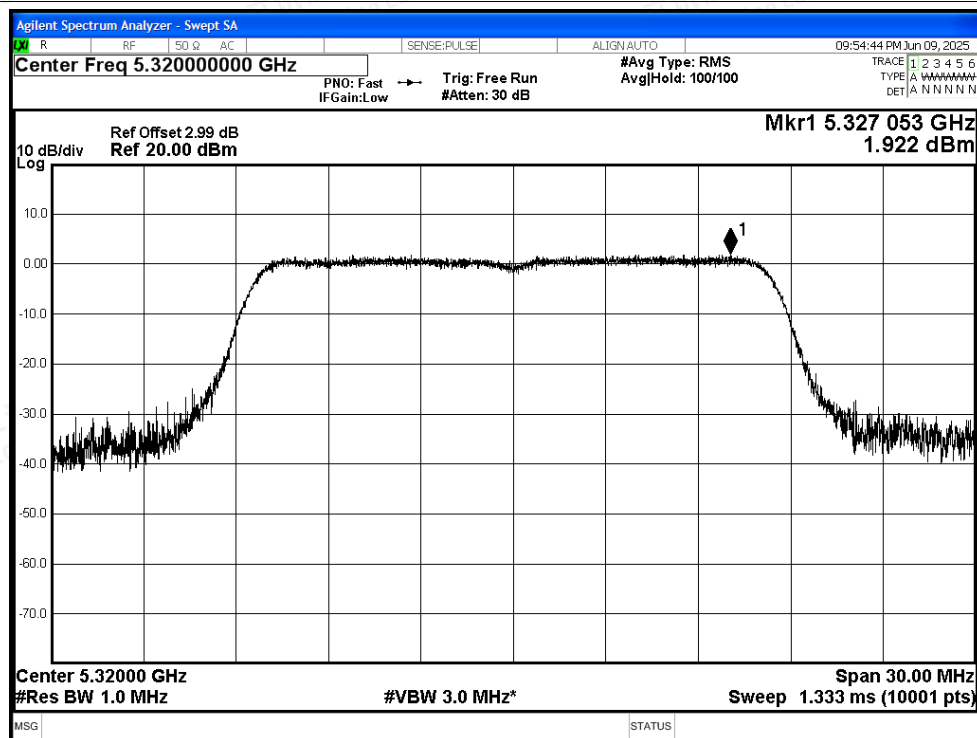

PSD NVNT n20 5260MHz Ant1

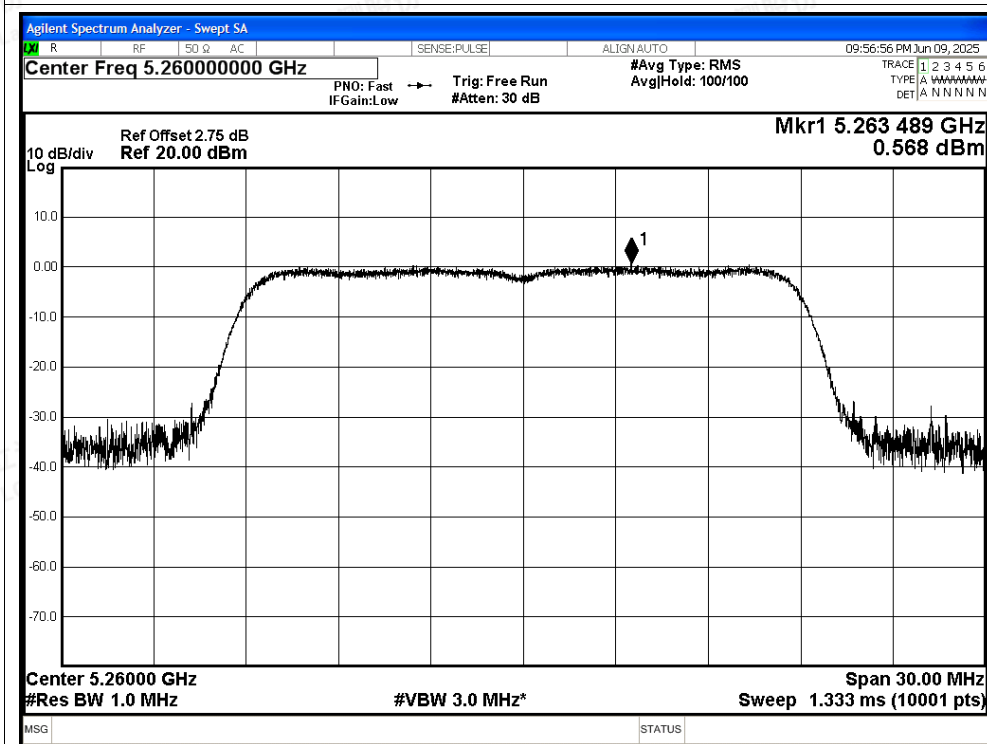

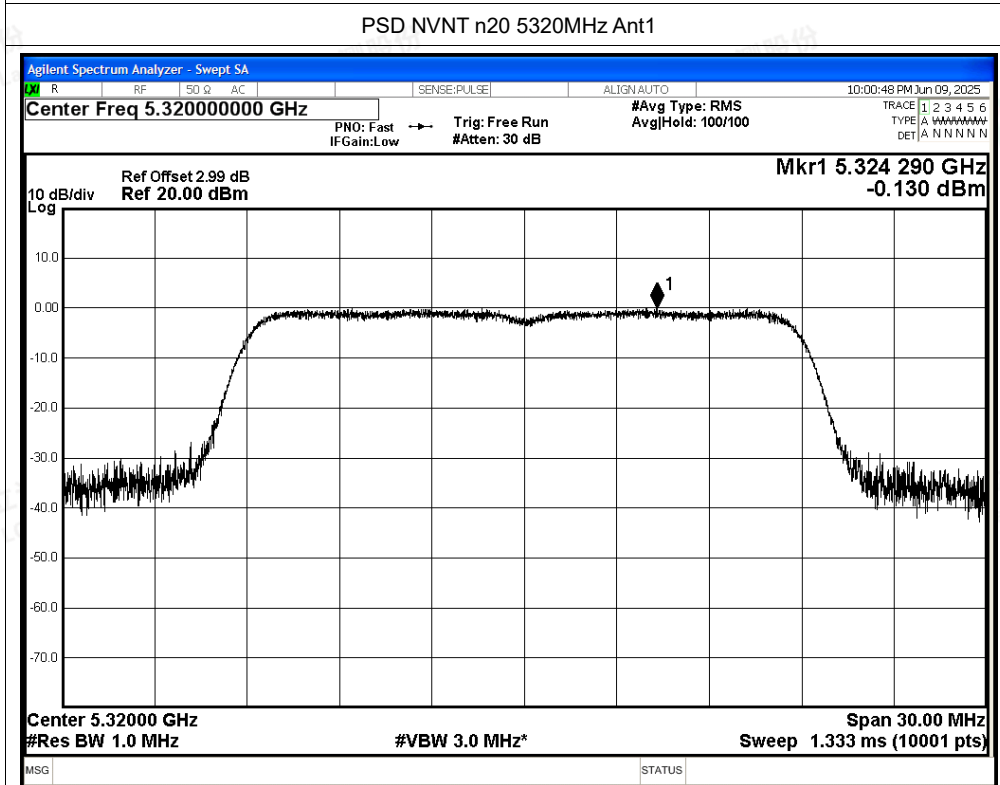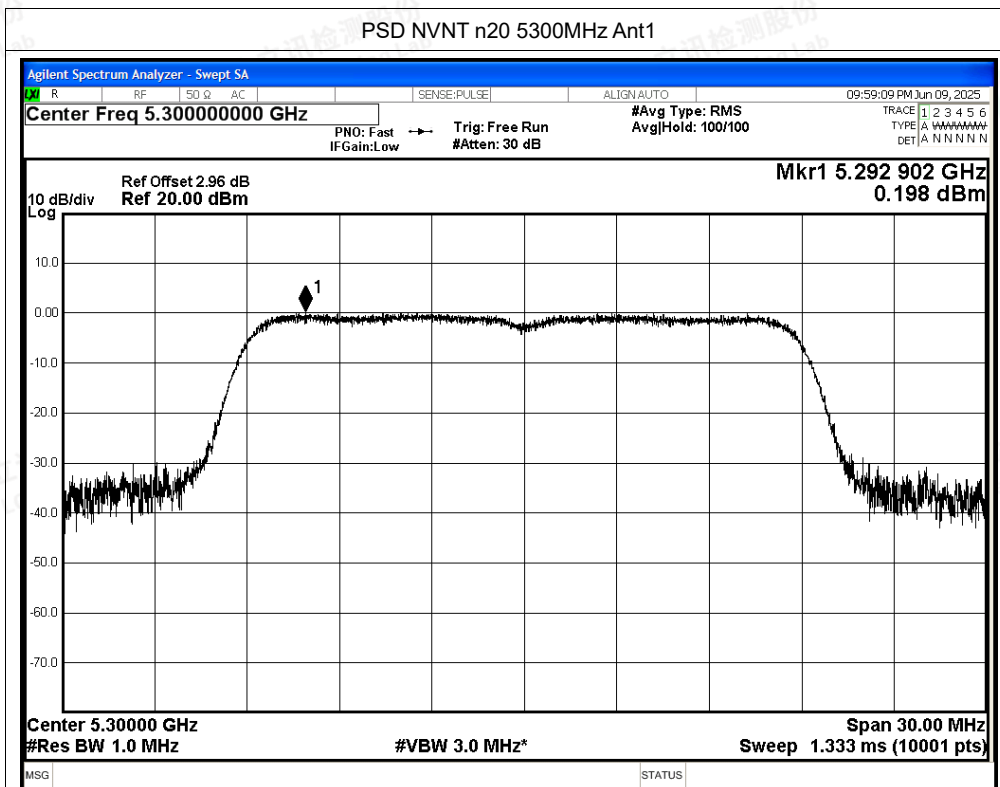

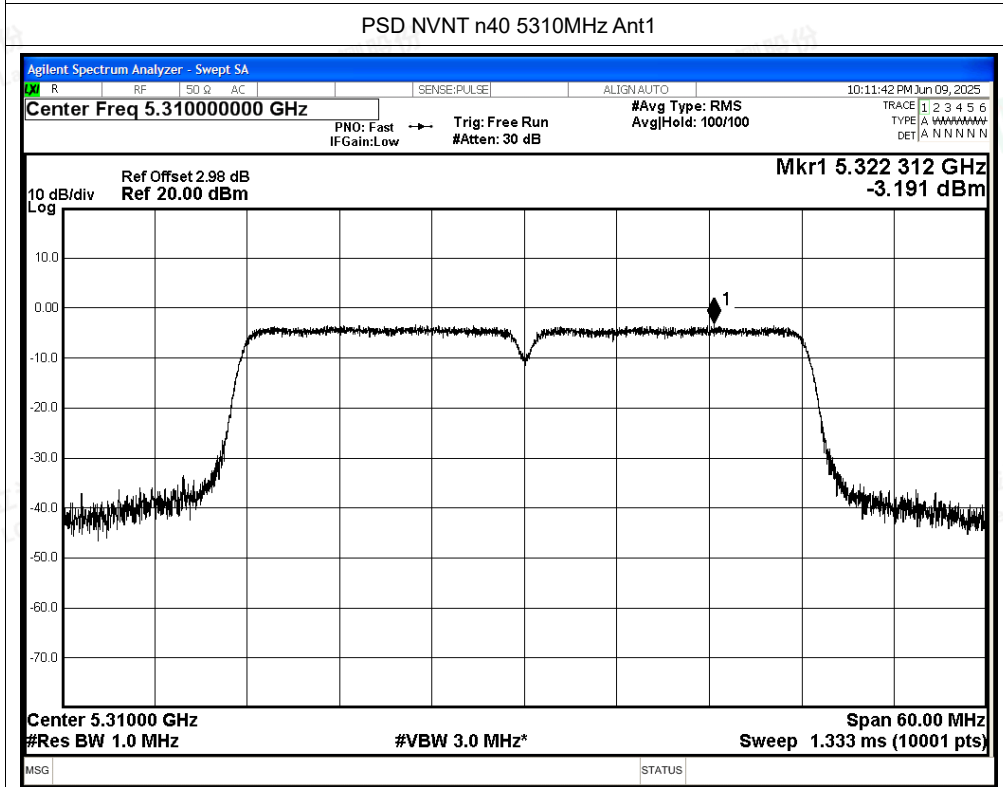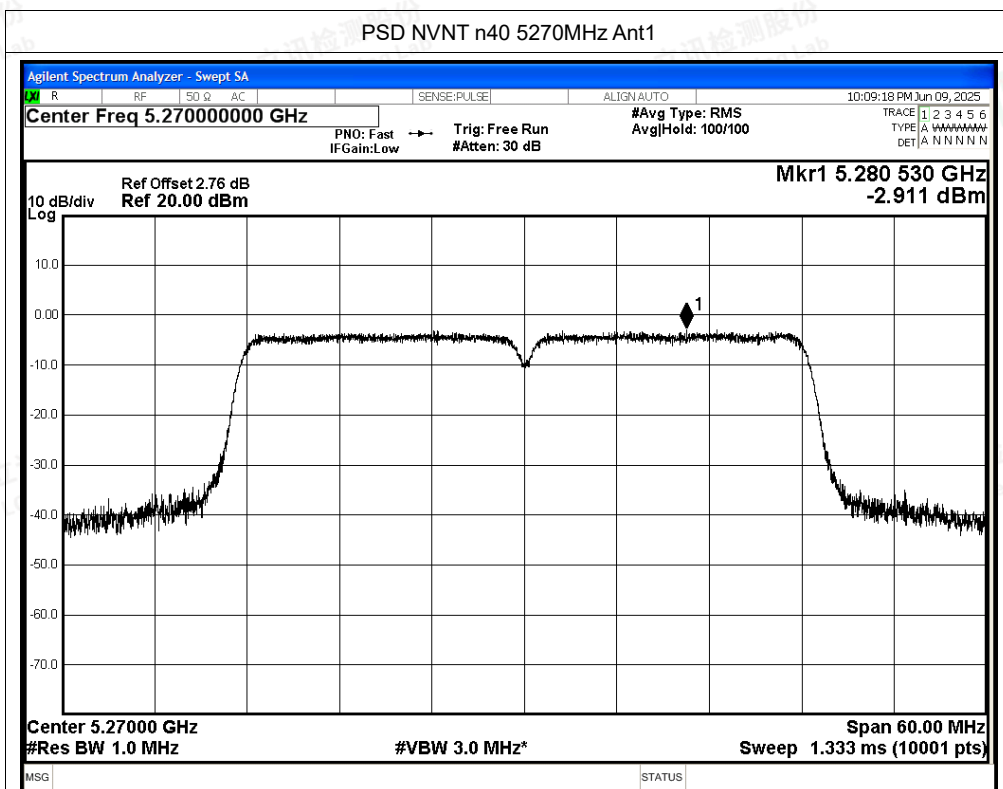

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT ac20 5260MHz Ant1

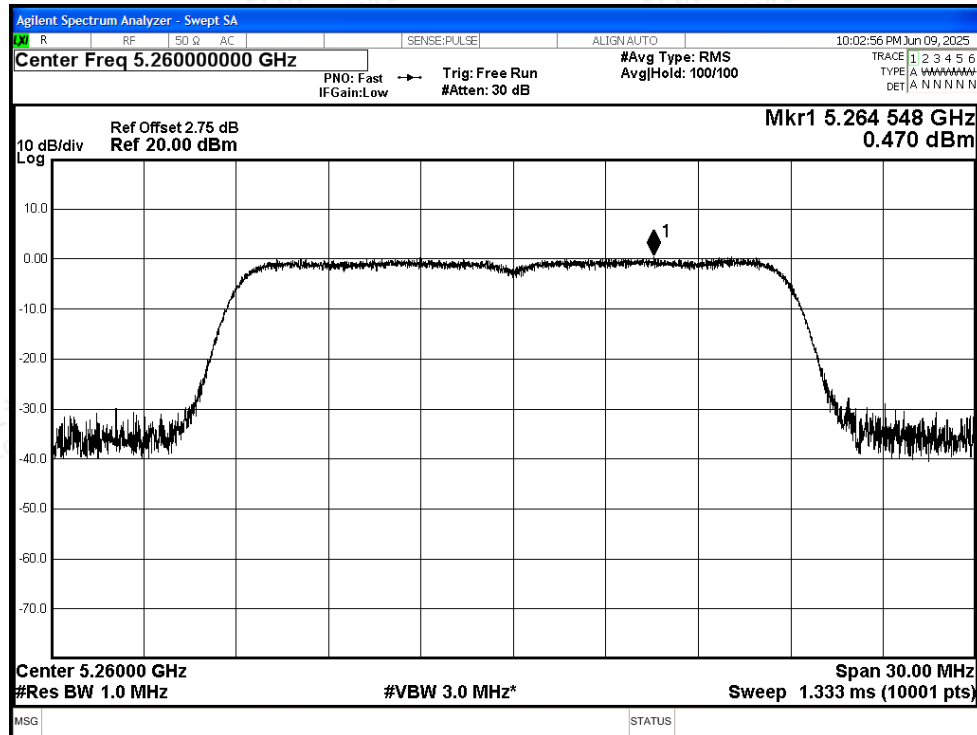


PSD NVNT ac20 5300MHz Ant1

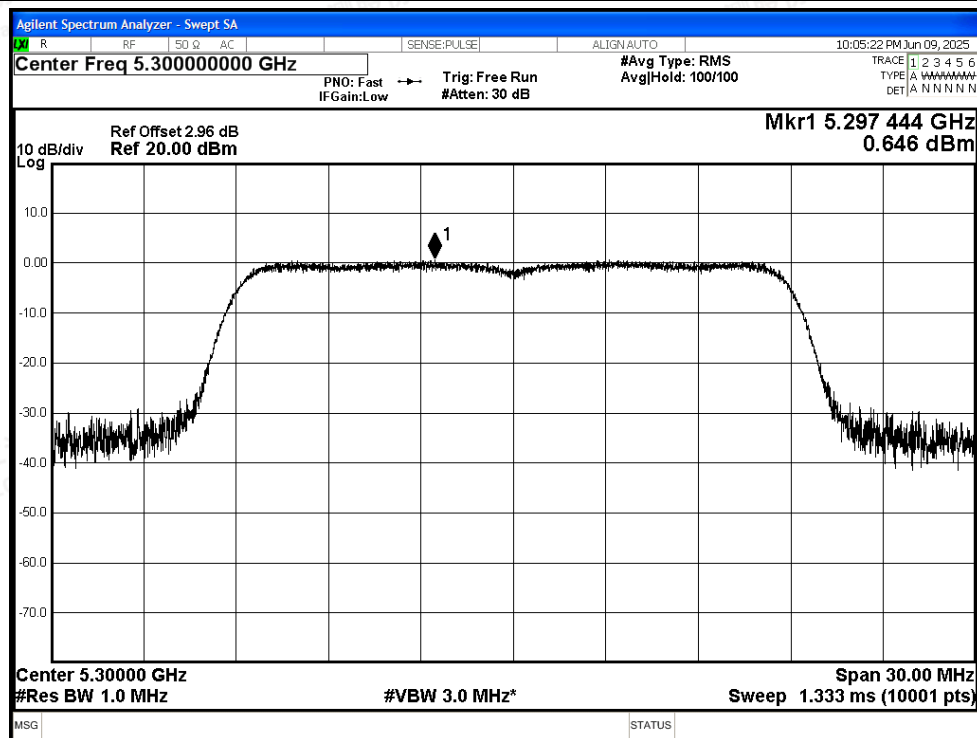






PSD NVNT ac20 5320MHz Ant1

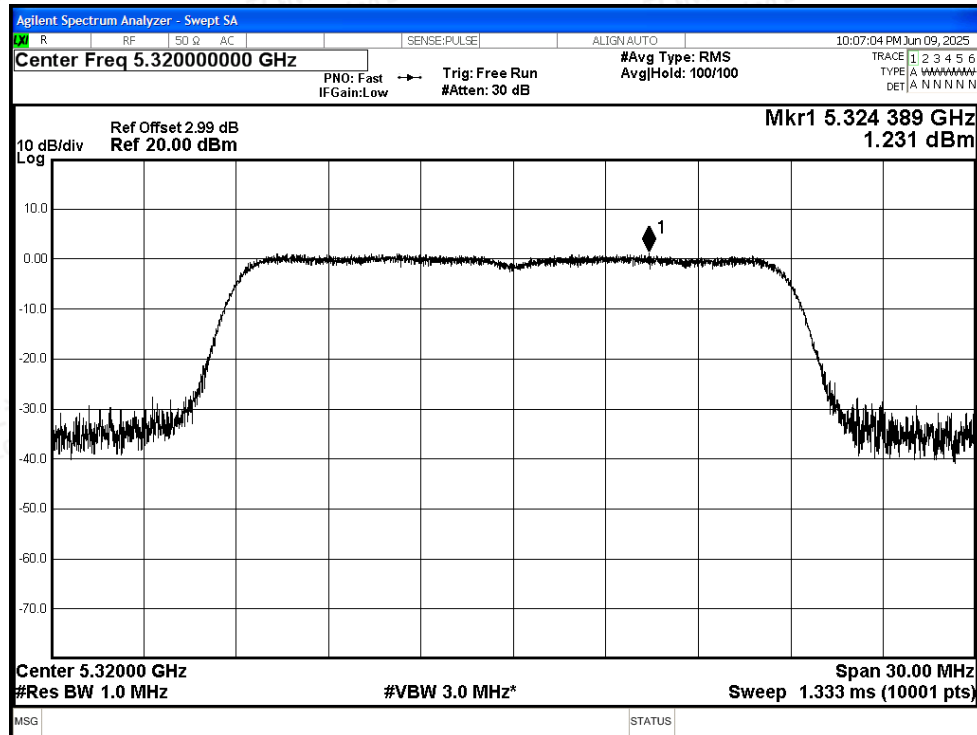

PSD NVNT ac40 5270MHz Ant1

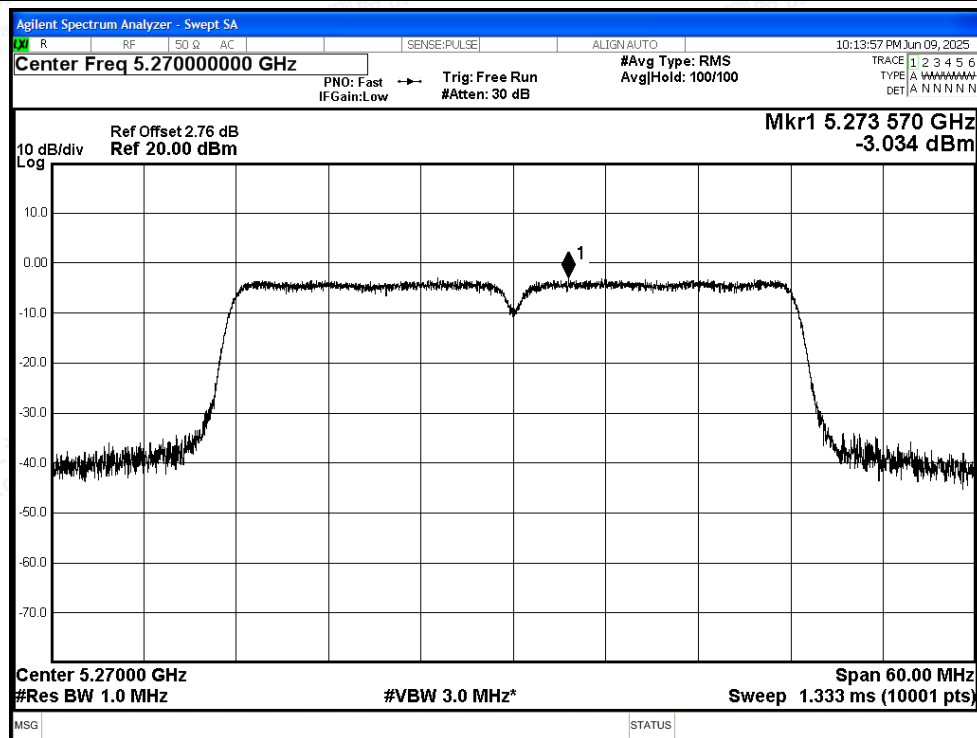

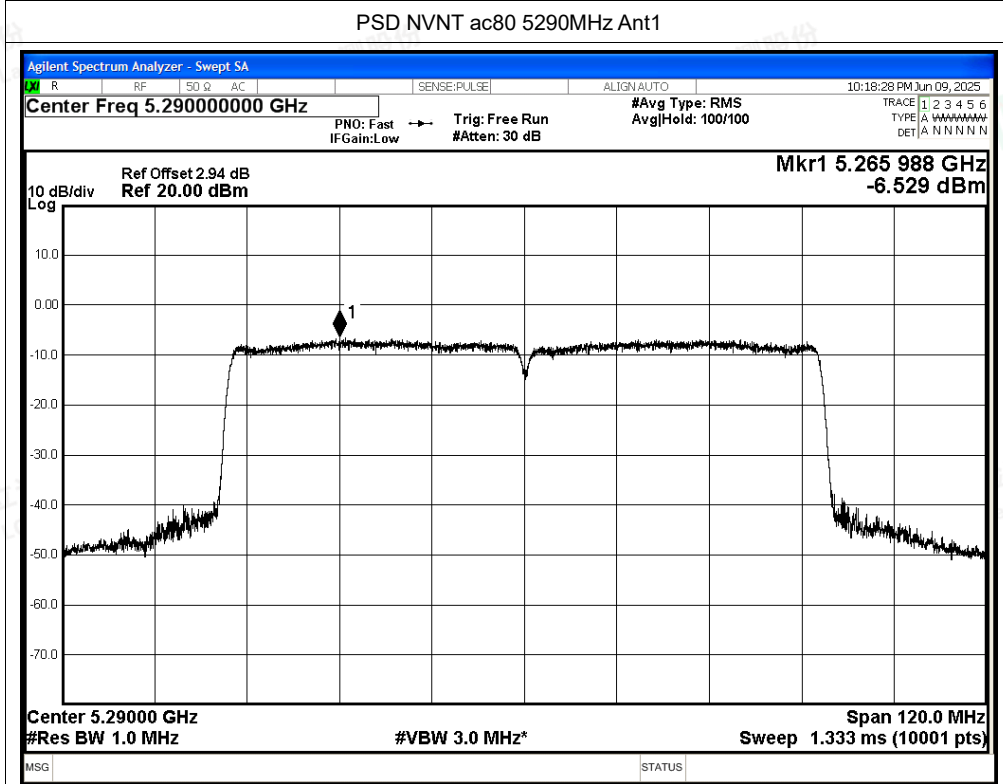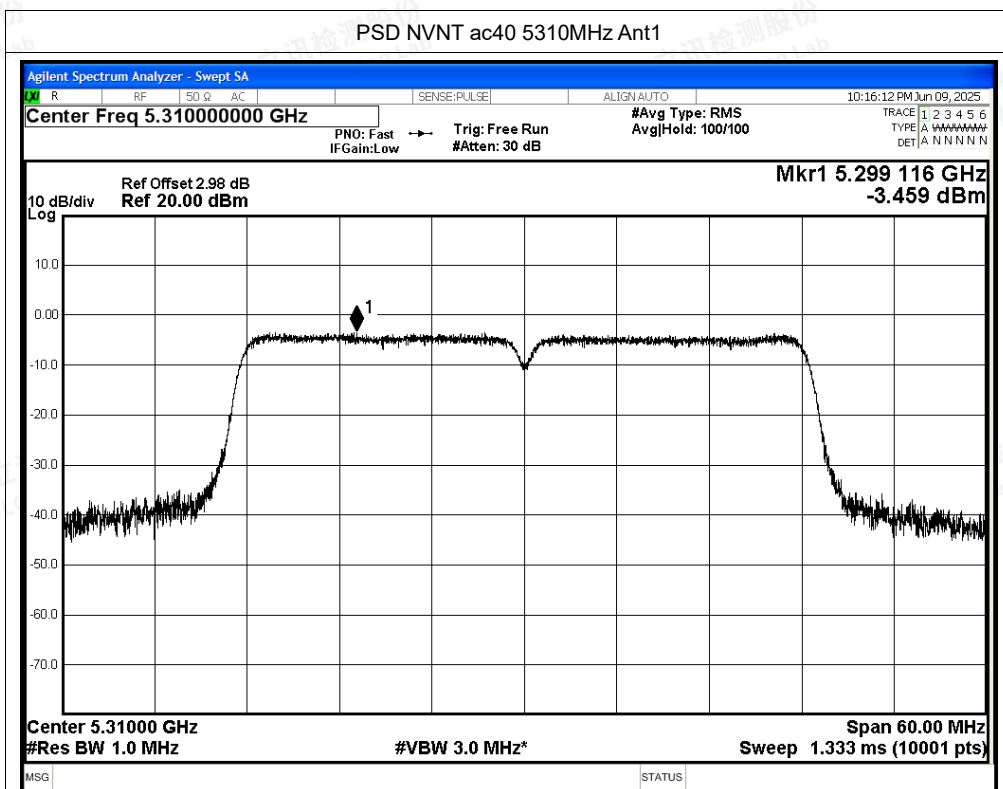

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



E.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5260	Ant1	4500	-51.11	2	-	46.12	Peak	68.2	Pass
NVNT	a	5260	Ant1	4500	-59.87	2	0.24	37.6	Average	54	Pass
NVNT	a	5260	Ant1	5095.14	-46.74	2	-	50.49	Peak	68.2	Pass
NVNT	a	5260	Ant1	5056.92	-57	2	0.24	40.47	Average	54	Pass
NVNT	a	5260	Ant1	5150	-48.91	2	-	48.32	Peak	68.2	Pass
NVNT	a	5260	Ant1	5150	-57.96	2	0.24	39.51	Average	54	Pass
NVNT	a	5320	Ant1	5350	-48.06	2	-	49.17	Peak	68.2	Pass
NVNT	a	5320	Ant1	5350	-57.48	2	0.24	39.99	Average	54	Pass
NVNT	a	5320	Ant1	5351.4	-42.51	2	-	54.72	Peak	68.2	Pass
NVNT	a	5320	Ant1	5350.4	-56.19	2	0.24	41.28	Average	54	Pass
NVNT	a	5320	Ant1	5460	-49.75	2	-	47.48	Peak	68.2	Pass
NVNT	a	5320	Ant1	5460	-57.8	2	0.24	39.67	Average	54	Pass
NVNT	n20	5260	Ant1	4500	-50.88	2	-	46.35	Peak	68.2	Pass
NVNT	n20	5260	Ant1	4500	-60.19	2	0.12	37.16	Average	54	Pass
NVNT	n20	5260	Ant1	4895.46	-46.64	2	-	50.59	Peak	68.2	Pass
NVNT	n20	5260	Ant1	5120.1	-56.86	2	0.12	40.49	Average	54	Pass
NVNT	n20	5260	Ant1	5150	-50.17	2	-	47.06	Peak	68.2	Pass
NVNT	n20	5260	Ant1	5150	-57.24	2	0.12	40.11	Average	54	Pass
NVNT	n20	5320	Ant1	5350	-44.93	2	-	52.3	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5350	-56.46	2	0.12	40.89	Average	54	Pass
NVNT	n20	5320	Ant1	5351.4	-44.91	2	-	52.32	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5350.8	-55.94	2	0.12	41.41	Average	54	Pass
NVNT	n20	5320	Ant1	5460	-50.65	2	-	46.58	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5460	-59.03	2	0.12	38.32	Average	54	Pass
NVNT	n40	5270	Ant1	4500	-50.48	2	-	46.75	Peak	68.2	Pass
NVNT	n40	5270	Ant1	4500	-59.4	2	0.23	38.06	Average	54	Pass
NVNT	n40	5270	Ant1	5062.95	-46.56	2	-	50.67	Peak	68.2	Pass
NVNT	n40	5270	Ant1	5099.4	-56.96	2	0.23	40.5	Average	54	Pass
NVNT	n40	5270	Ant1	5150	-49.31	2	-	47.92	Peak	68.2	Pass
NVNT	n40	5270	Ant1	5150	-57.94	2	0.23	39.52	Average	54	Pass
NVNT	n40	5310	Ant1	5350	-44.72	2	-	52.51	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5350	-56.67	2	0.24	40.8	Average	54	Pass
NVNT	n40	5310	Ant1	5352.2	-41.3	2	-	55.93	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5351.2	-55.87	2	0.24	41.6	Average	54	Pass
NVNT	n40	5310	Ant1	5460	-50.78	2	-	46.45	Peak	68.2	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




NVNT	n40	5310	Ant1	5460	-58.43	2	0.24	39.04	Average	54	Pass
NVNT	ac20	5260	Ant1	4500	-51.5	2	-	45.73	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	4500	-59.25	2	0.12	38.1	Average	54	Pass
NVNT	ac20	5260	Ant1	5127.9	-46.47	2	-	50.76	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	5007.78	-56.98	2	0.12	40.37	Average	54	Pass
NVNT	ac20	5260	Ant1	5150	-50.14	2	-	47.09	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	5150	-57.89	2	0.12	39.46	Average	54	Pass
NVNT	ac20	5320	Ant1	5350	-42.92	2	-	54.31	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5350	-56.28	2	0.12	41.07	Average	54	Pass
NVNT	ac20	5320	Ant1	5350.6	-42.65	2	-	54.58	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5350.6	-55.75	2	0.12	41.6	Average	54	Pass
NVNT	ac20	5320	Ant1	5460	-50.73	2	-	46.5	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5460	-58.27	2	0.12	39.08	Average	54	Pass
NVNT	ac40	5270	Ant1	4500	-50.99	2	-	46.24	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	4500	-59.35	2	0.24	38.12	Average	54	Pass
NVNT	ac40	5270	Ant1	5031.36	-46.88	2	-	50.35	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	5118.84	-56.95	2	0.24	40.52	Average	54	Pass
NVNT	ac40	5270	Ant1	5150	-48.43	2	-	48.8	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	5150	-57.74	2	0.24	39.73	Average	54	Pass
NVNT	ac40	5310	Ant1	5350	-45.14	2	-	52.09	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5350	-56.08	2	0.24	41.39	Average	54	Pass
NVNT	ac40	5310	Ant1	5351	-40.79	2	-	56.44	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5350.2	-55.51	2	0.24	41.96	Average	54	Pass
NVNT	ac40	5310	Ant1	5460	-47.95	2	-	49.28	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5460	-58.61	2	0.24	38.86	Average	54	Pass
NVNT	ac80	5290	Ant1	4500	-50.19	2	-	47.04	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	4500	-59.03	2	0.47	38.67	Average	54	Pass
NVNT	ac80	5290	Ant1	5149.89	-45.56	2	-	51.67	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5149.02	-55.47	2	0.47	42.23	Average	54	Pass
NVNT	ac80	5290	Ant1	5150	-45.56	2	-	51.67	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5150	-56.02	2	0.47	41.68	Average	54	Pass
NVNT	ac80	5290	Ant1	5350	-47.6	2	-	49.63	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5350	-56.24	2	0.47	41.46	Average	54	Pass
NVNT	ac80	5290	Ant1	5351.25	-44.45	2	-	52.78	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5350.25	-55.56	2	0.47	42.14	Average	54	Pass
NVNT	ac80	5290	Ant1	5460	-49.37	2	-	47.86	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5460	-57.9	2	0.47	39.8	Average	54	Pass






Test Graphs

Restrict Band NVNT a 5260MHz Ant1 Peak

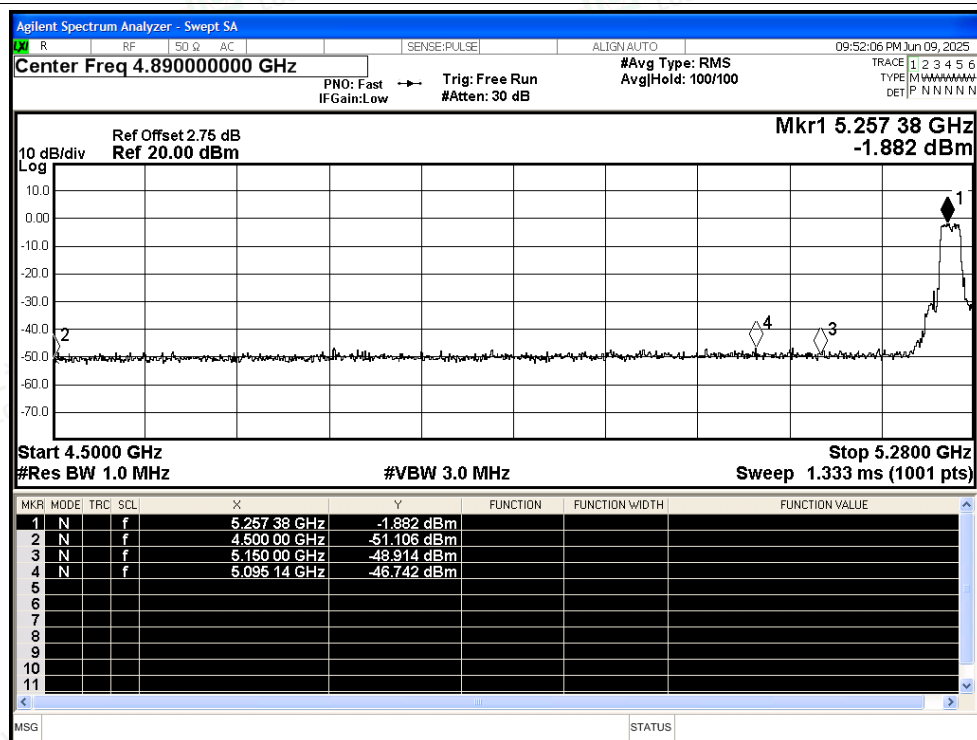

Restrict Band NVNT a 5260MHz Ant1 Average

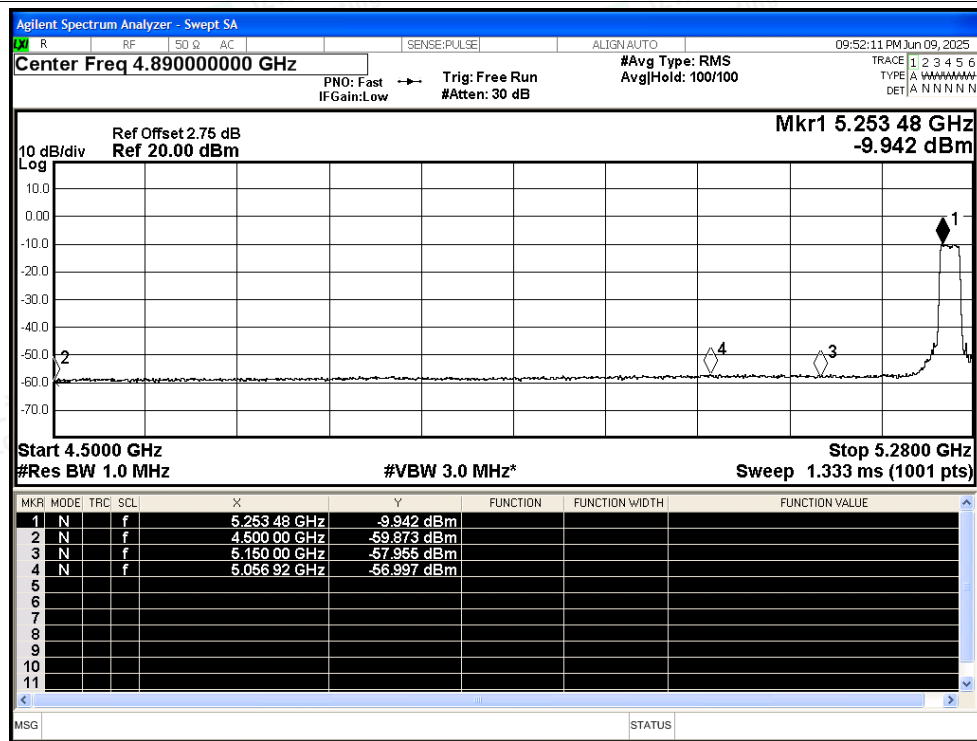

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT a 5320MHz Ant1 Peak

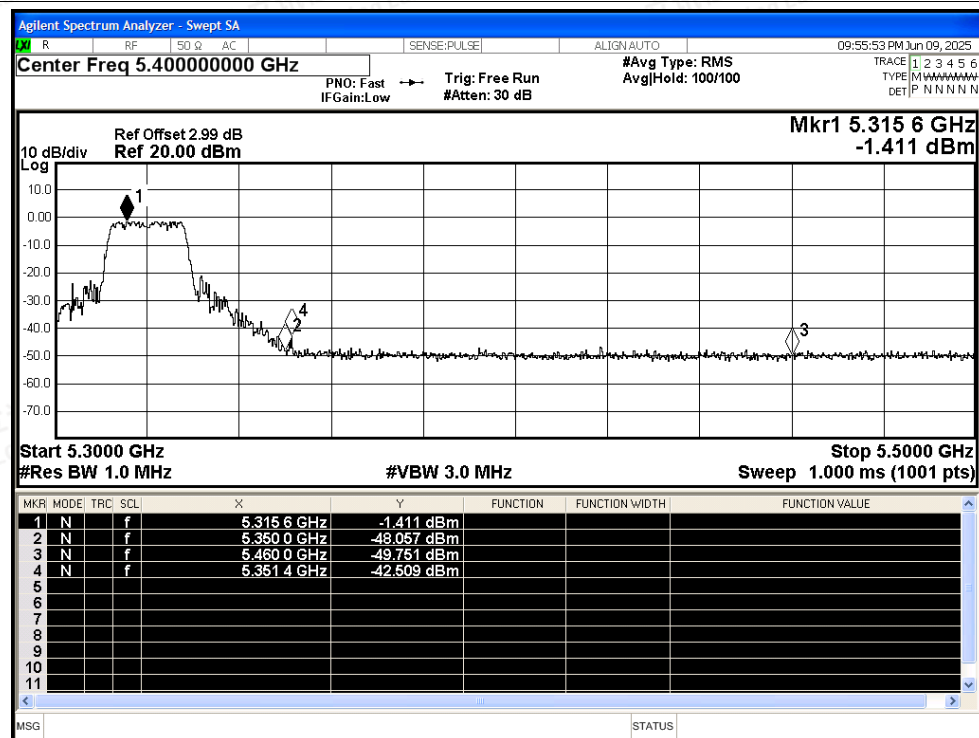


Restrict Band NVNT a 5320MHz Ant1 Average

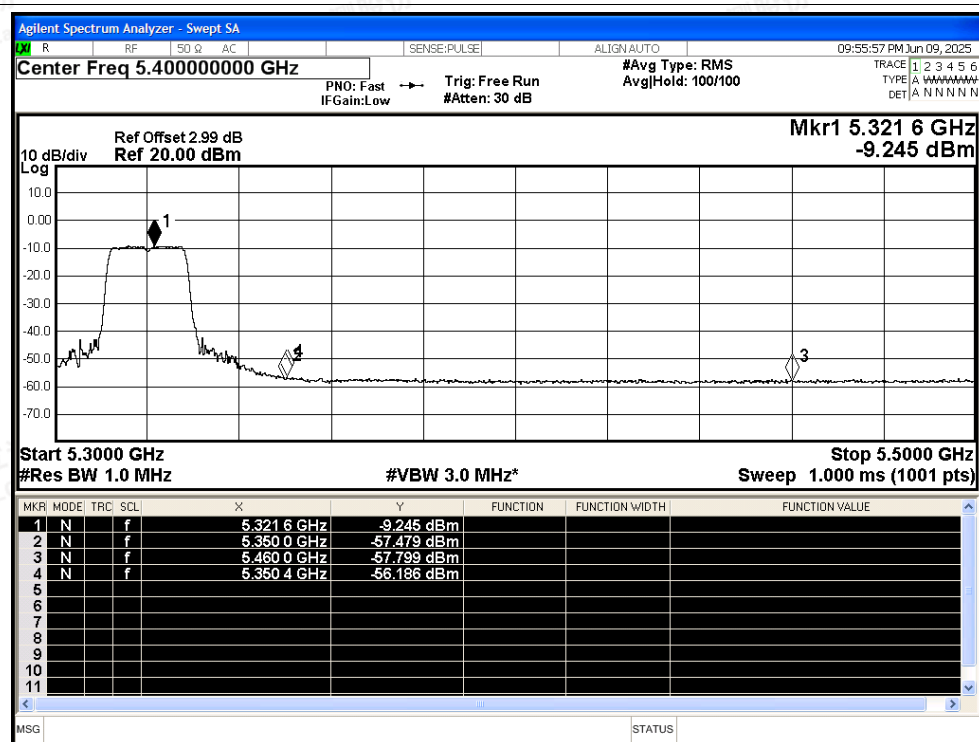




Restrict Band NVNT n20 5260MHz Ant1 Peak

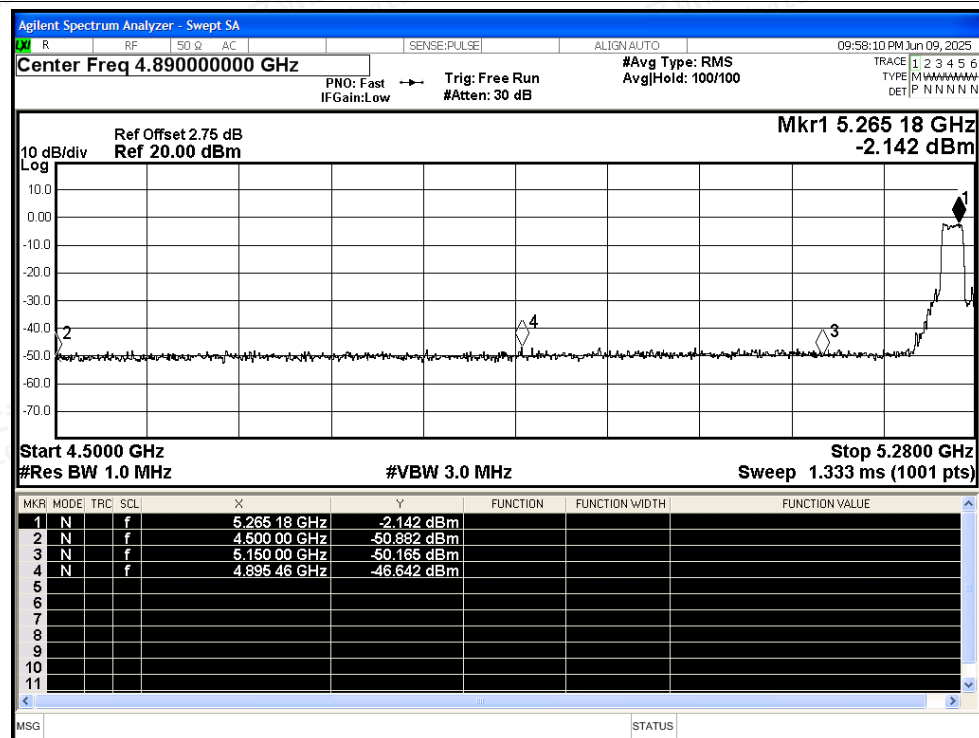

Restrict Band NVNT n20 5260MHz Ant1 Average

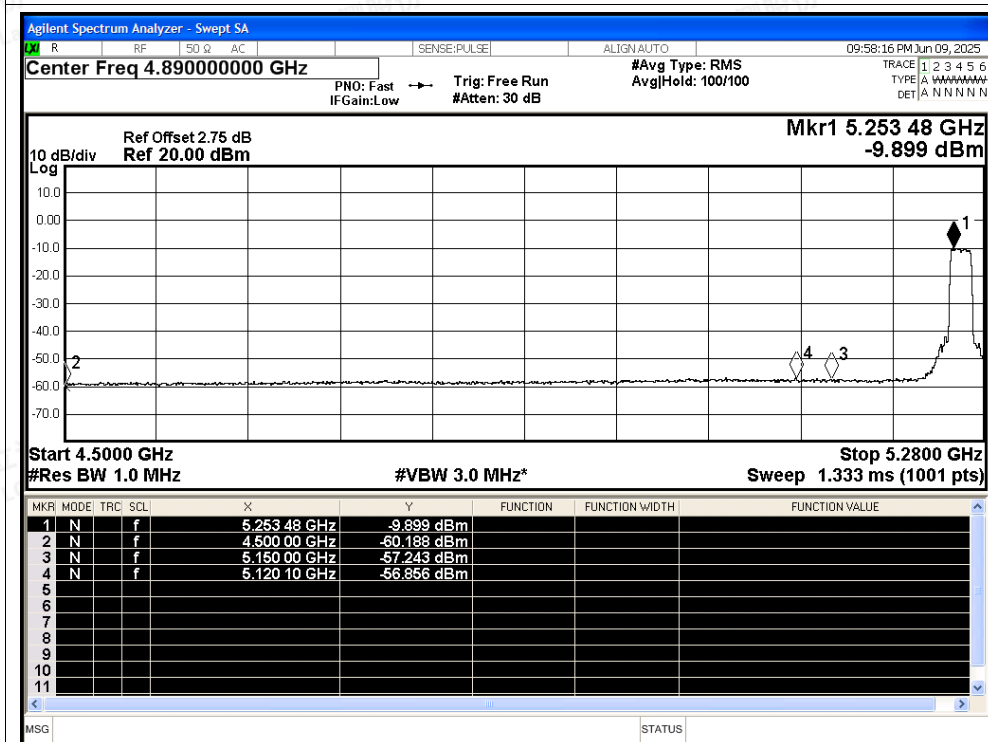

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT n20 5320MHz Ant1 Peak

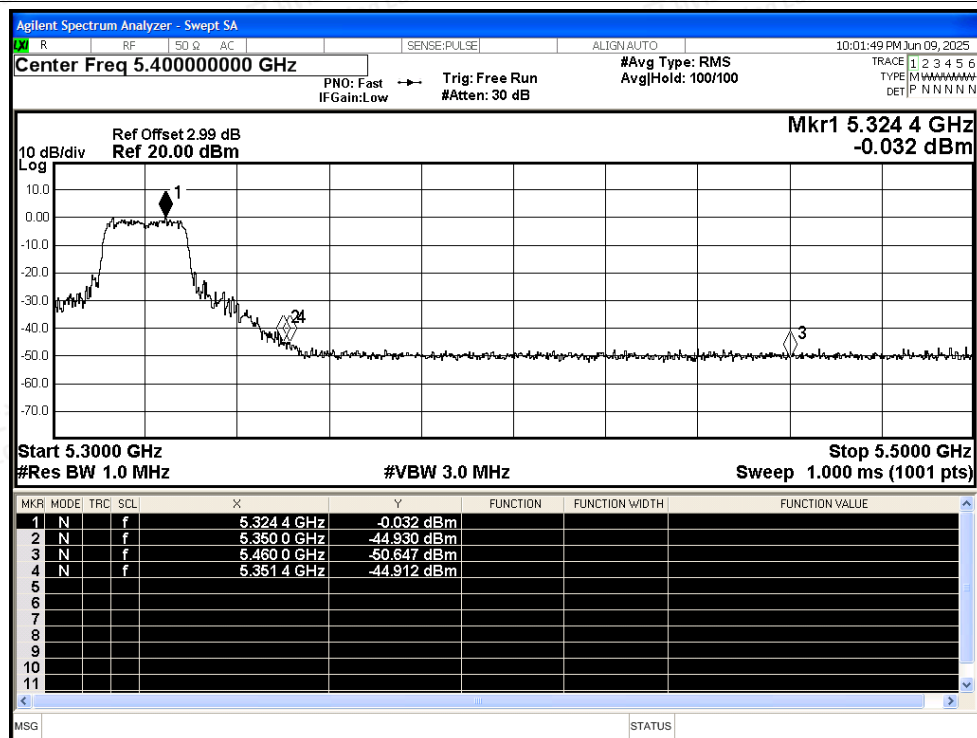

Restrict Band NVNT n20 5320MHz Ant1 Average

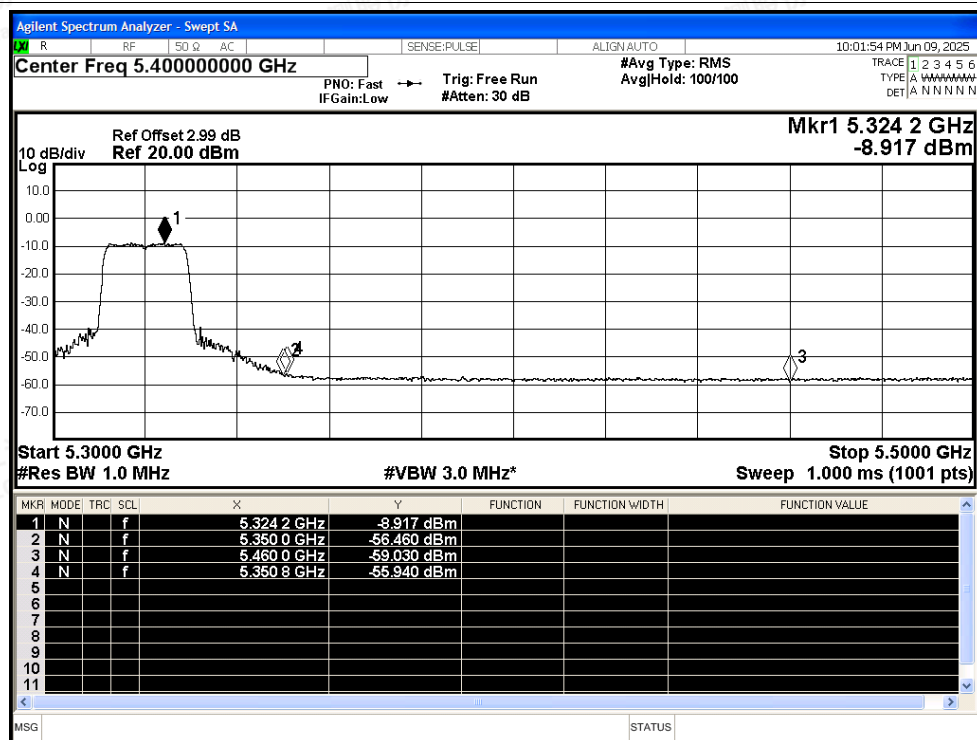

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT n40 5270MHz Ant1 Peak

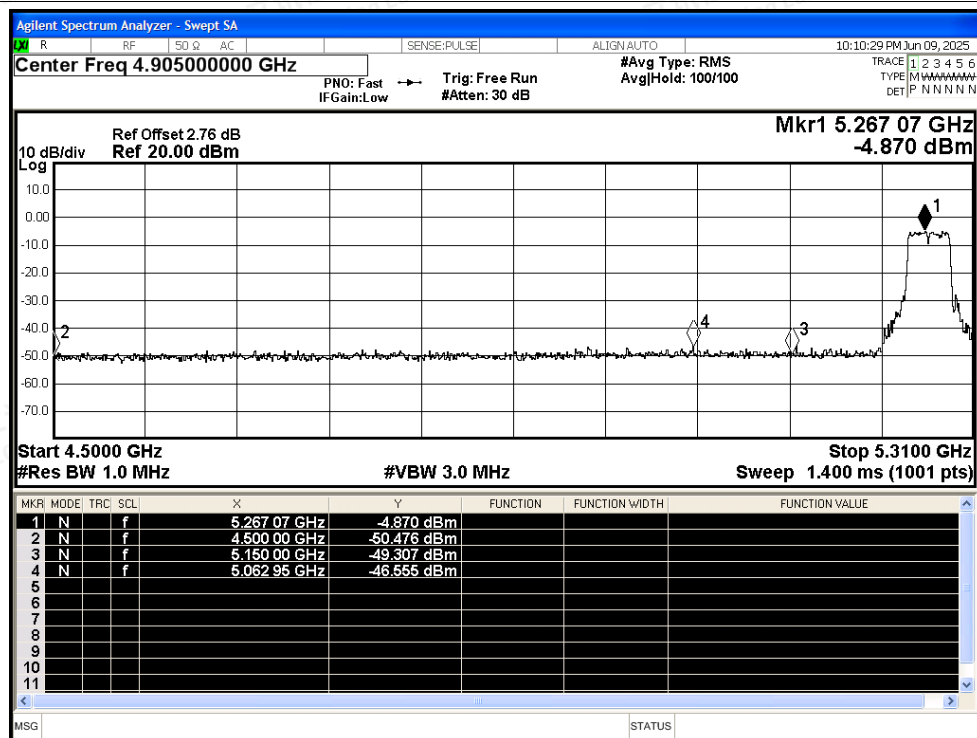

Restrict Band NVNT n40 5270MHz Ant1 Average

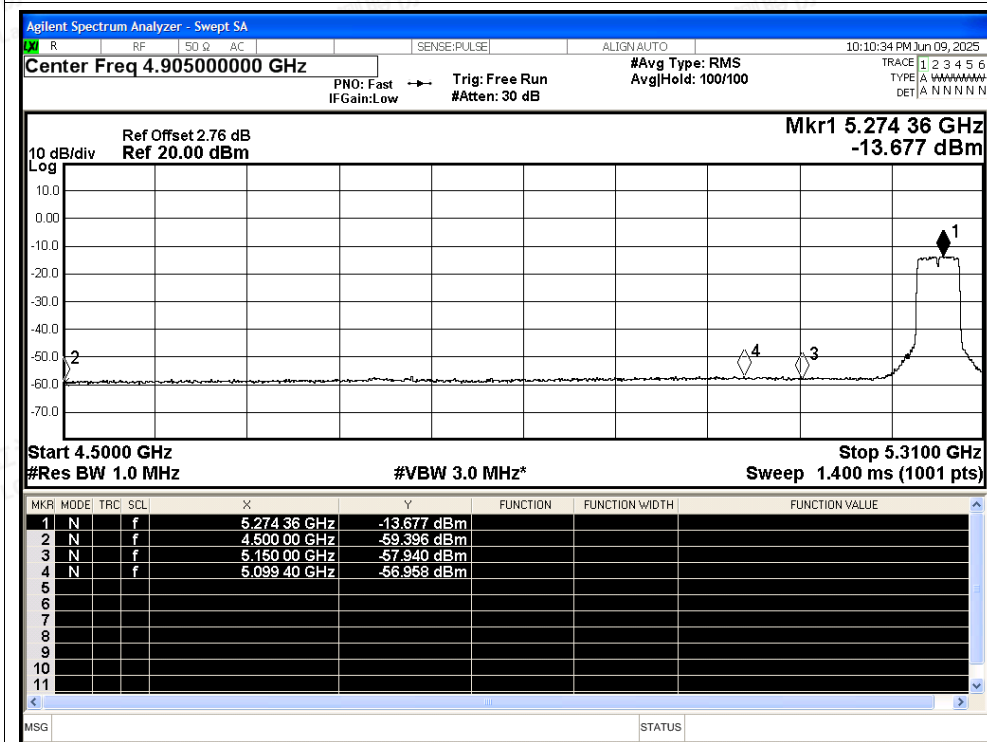

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT n40 5310MHz Ant1 Peak

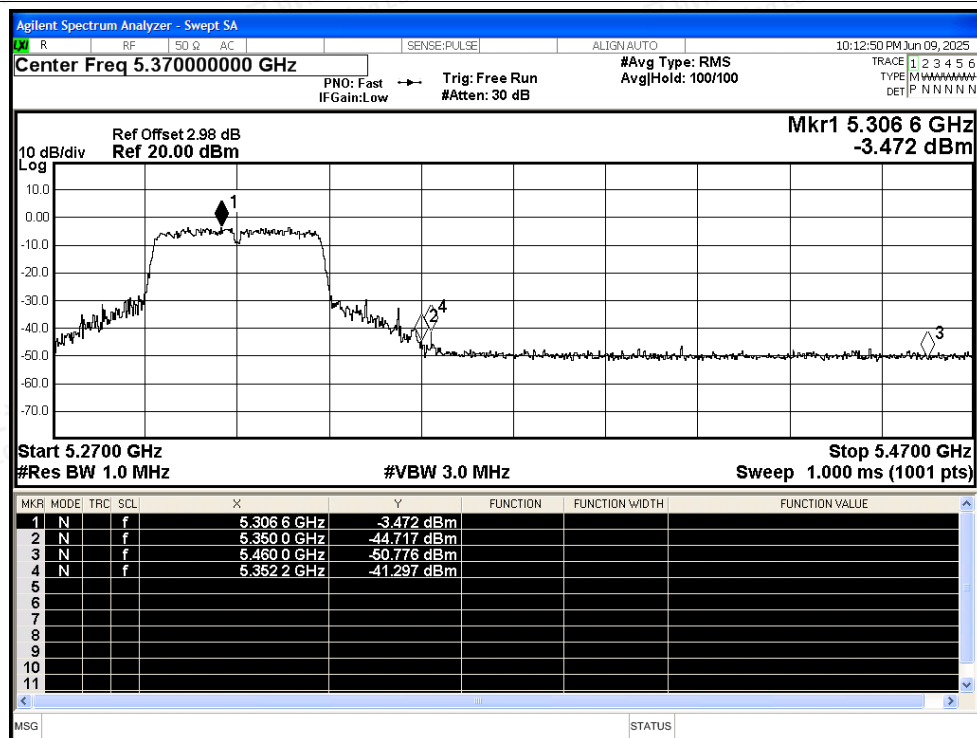

Restrict Band NVNT n40 5310MHz Ant1 Average

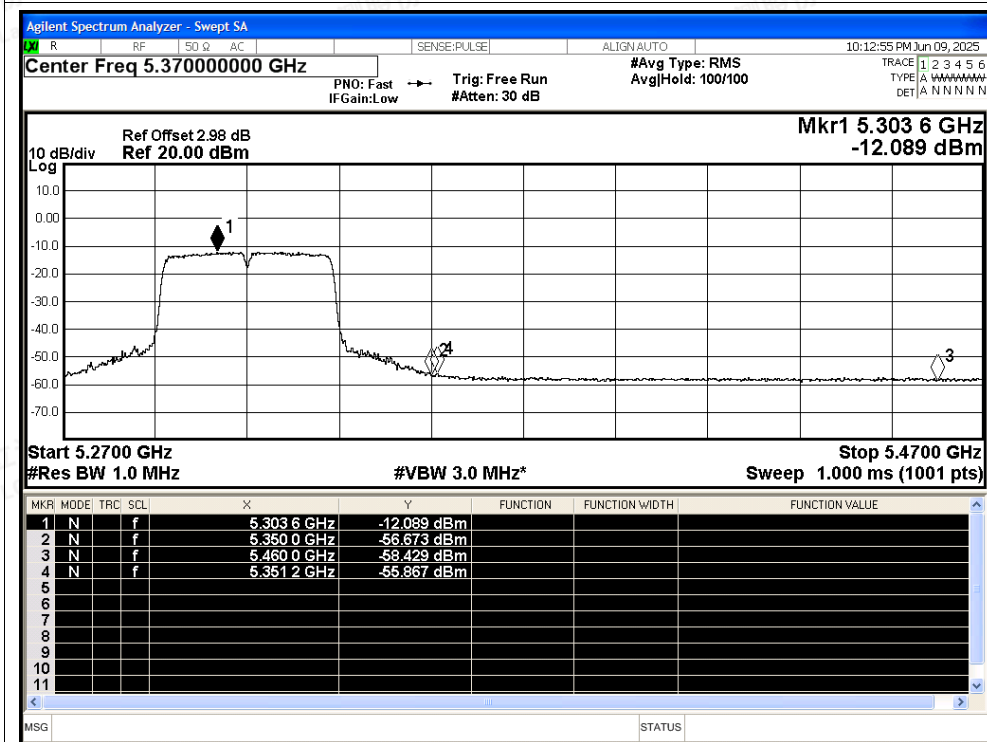

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT ac20 5260MHz Ant1 Peak

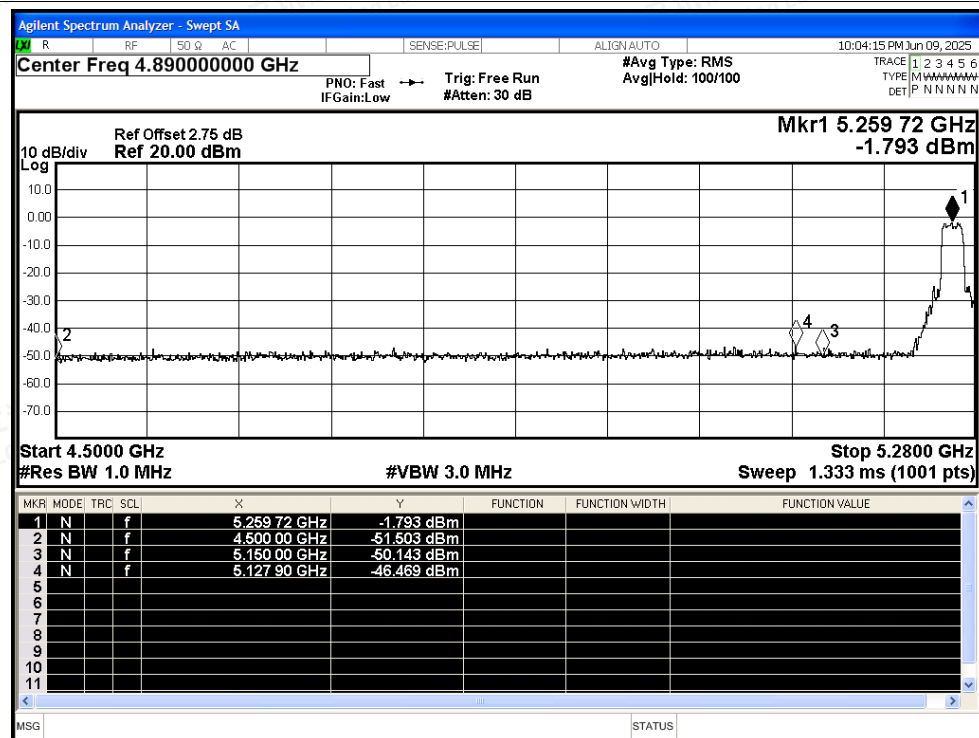

Restrict Band NVNT ac20 5260MHz Ant1 Average

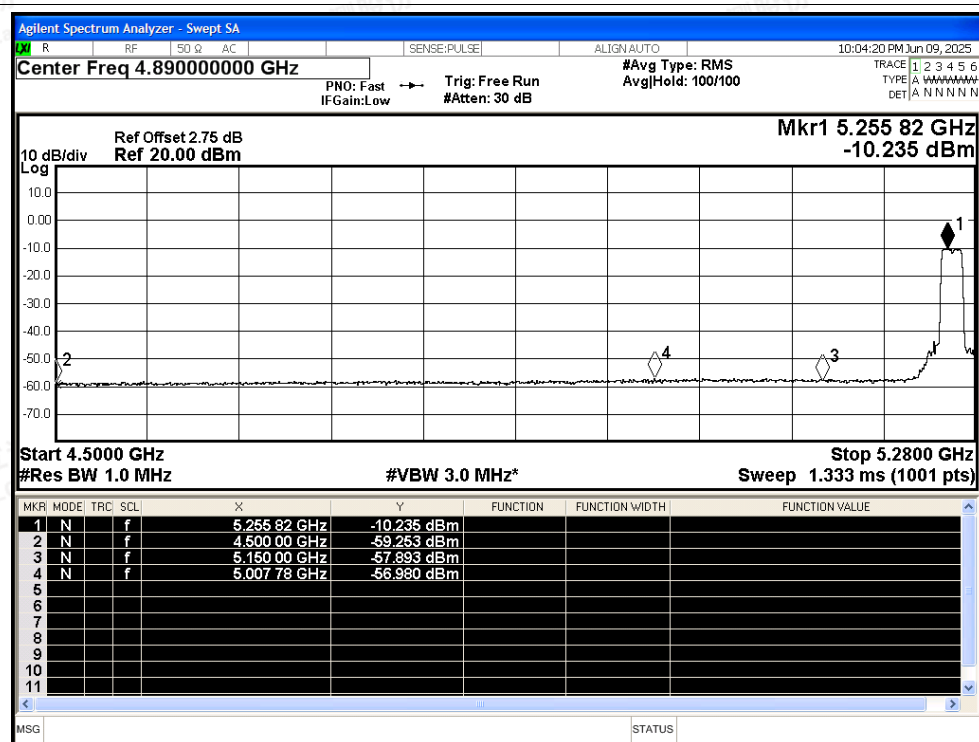

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT ac20 5320MHz Ant1 Peak

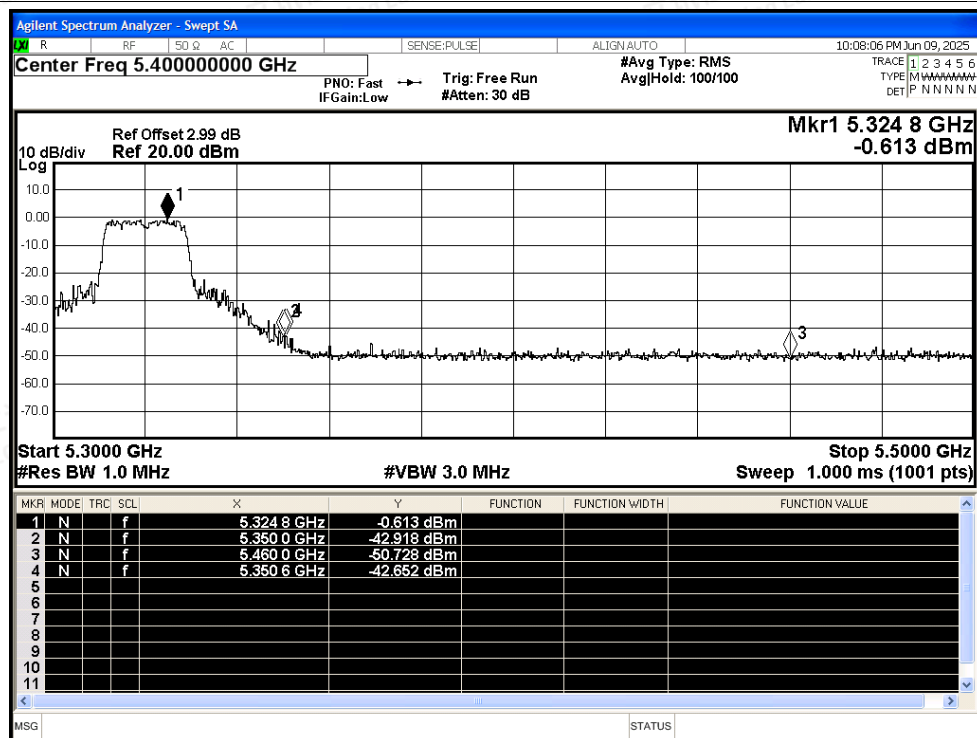

Restrict Band NVNT ac20 5320MHz Ant1 Average

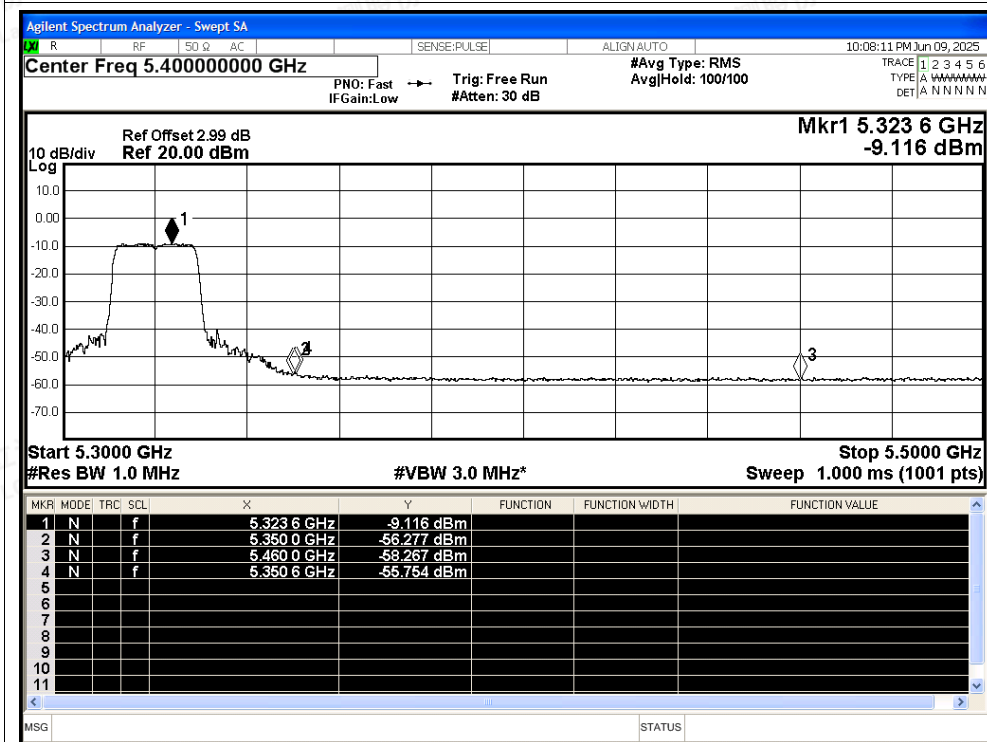

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT ac40 5270MHz Ant1 Peak

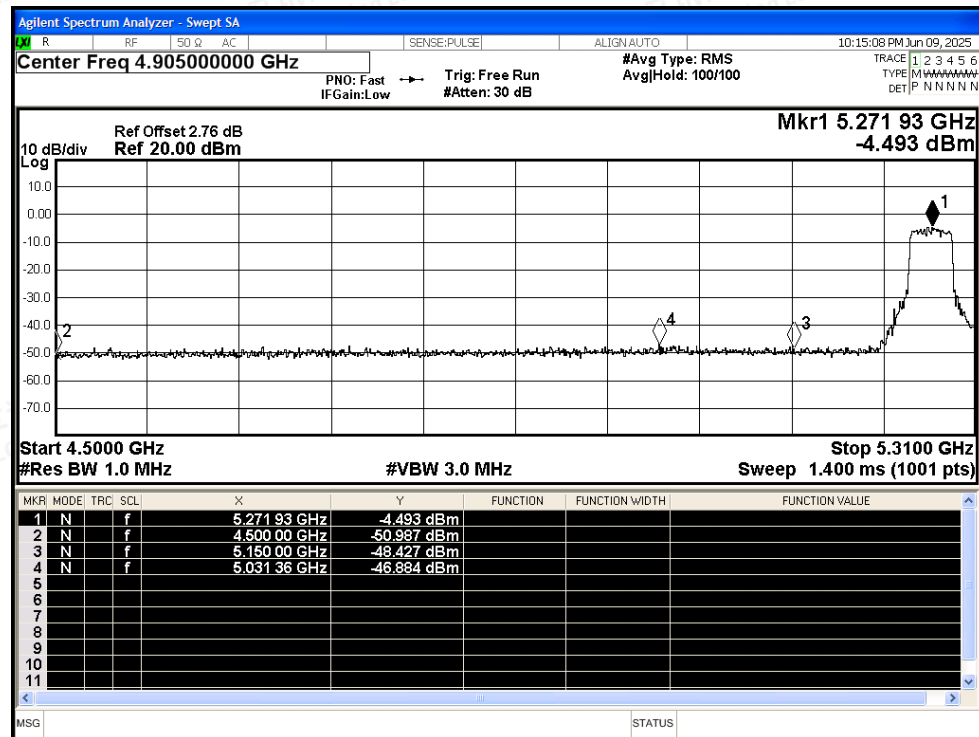

Restrict Band NVNT ac40 5270MHz Ant1 Average

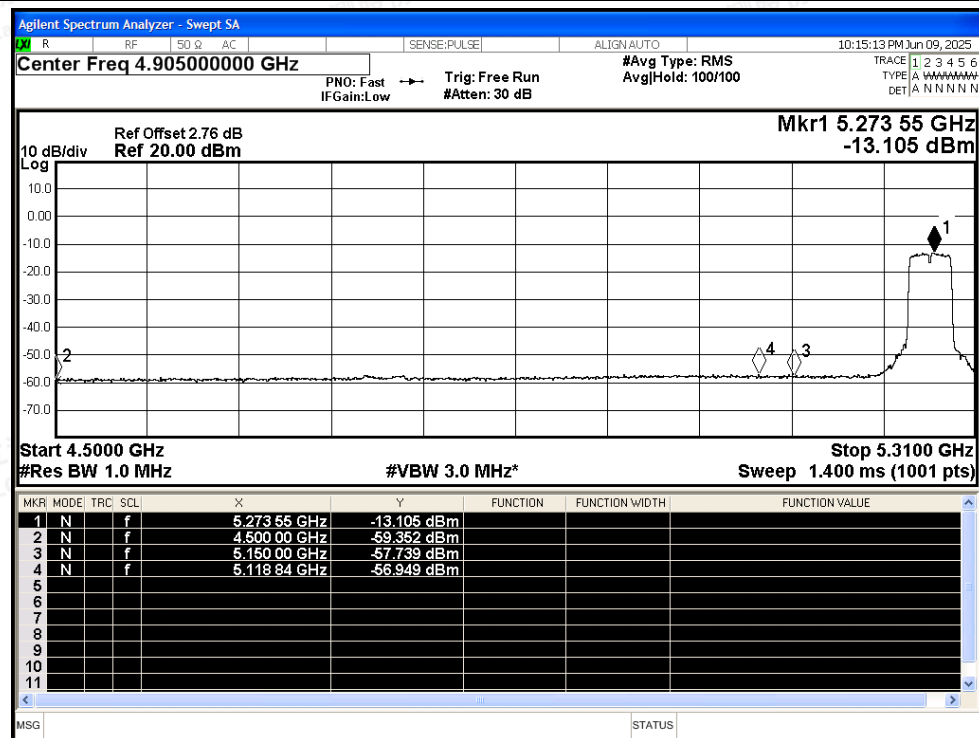

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT ac40 5310MHz Ant1 Peak

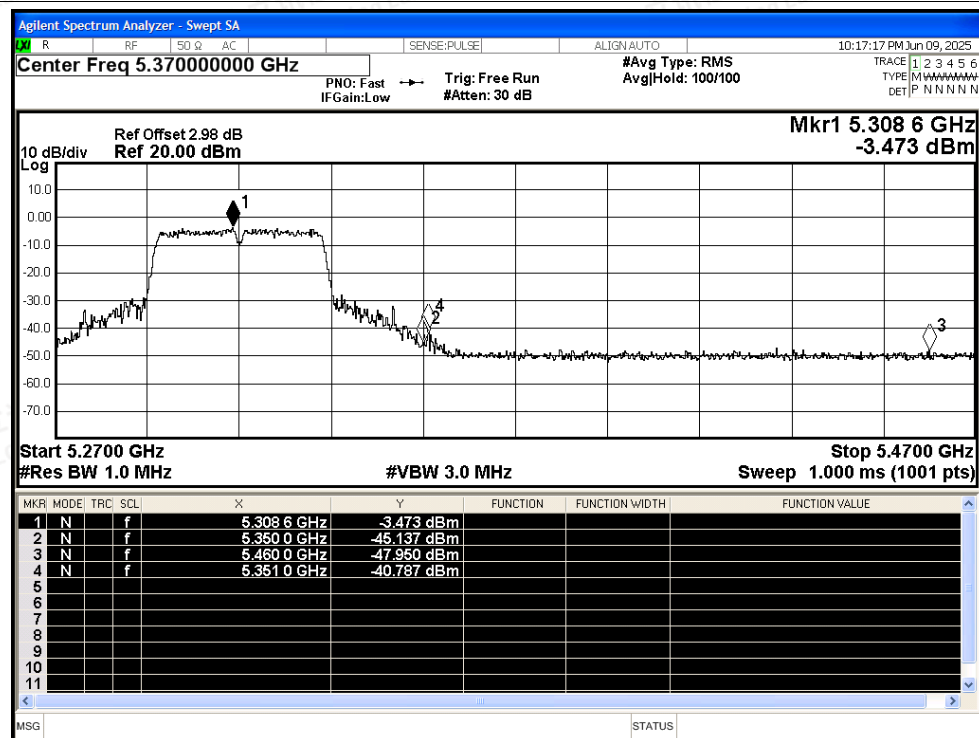


Restrict Band NVNT ac40 5310MHz Ant1 Average

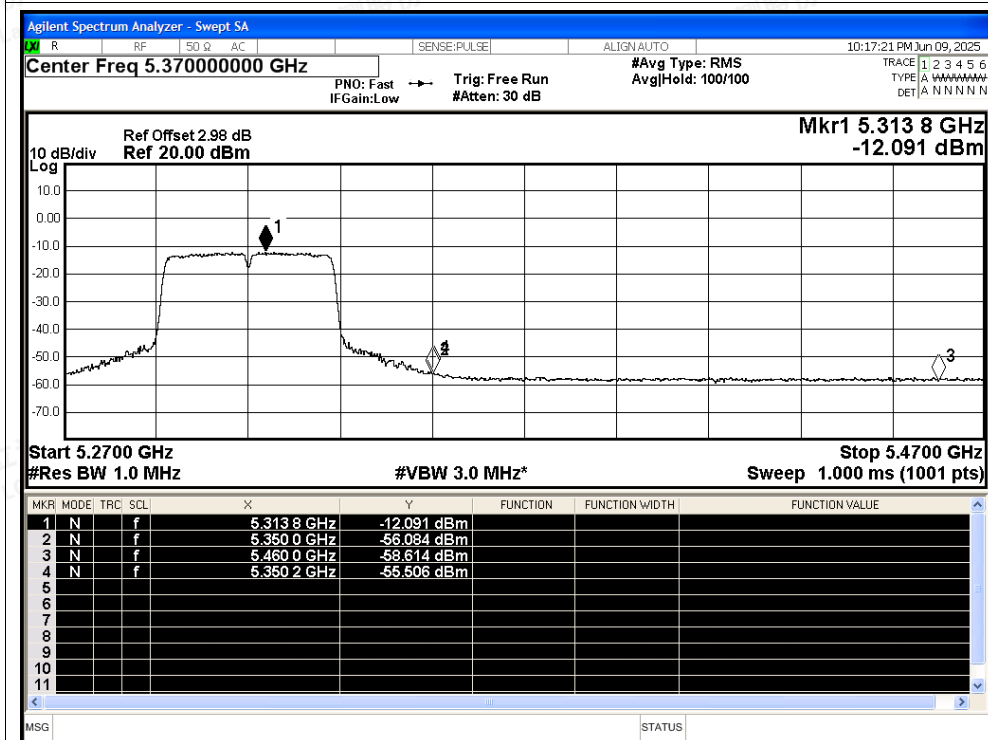




Restrict Band NVNT ac80 5290MHz Ant1 Peak

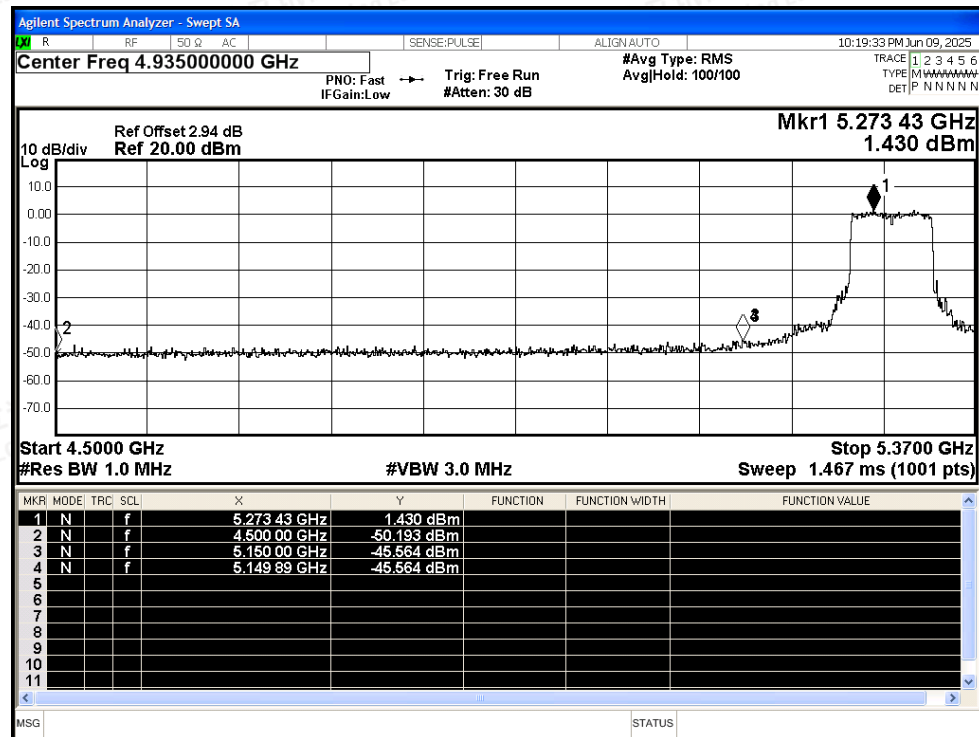


Restrict Band NVNT ac80 5290MHz Ant1 Average

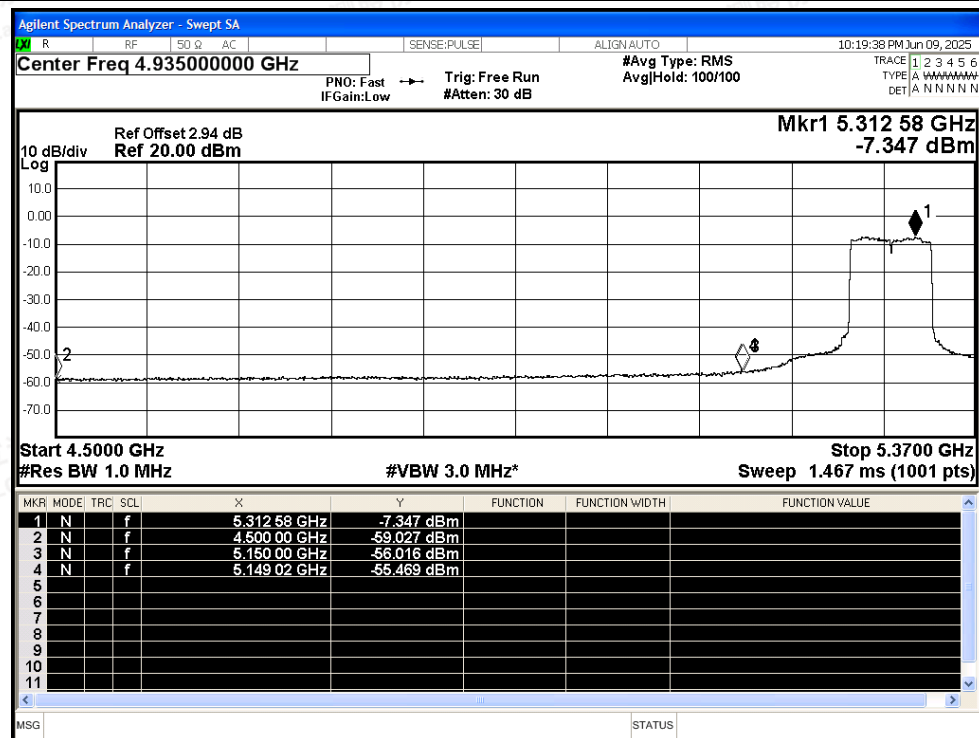




Restrict Band NVNT ac80 5290MHz Ant1 Peak

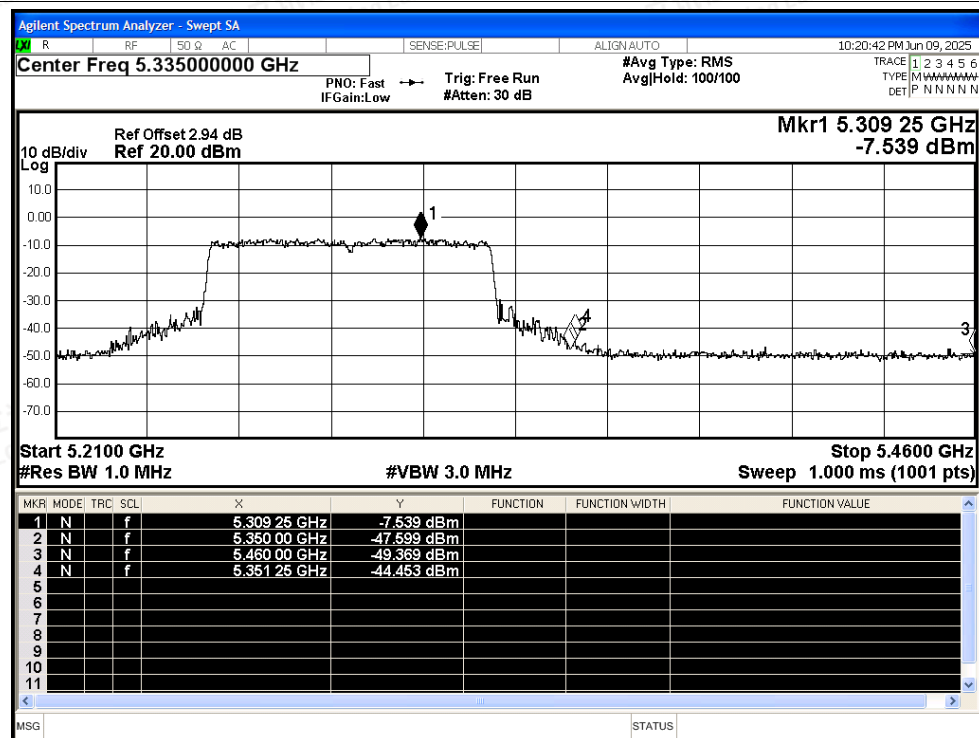

Restrict Band NVNT ac80 5290MHz Ant1 Average

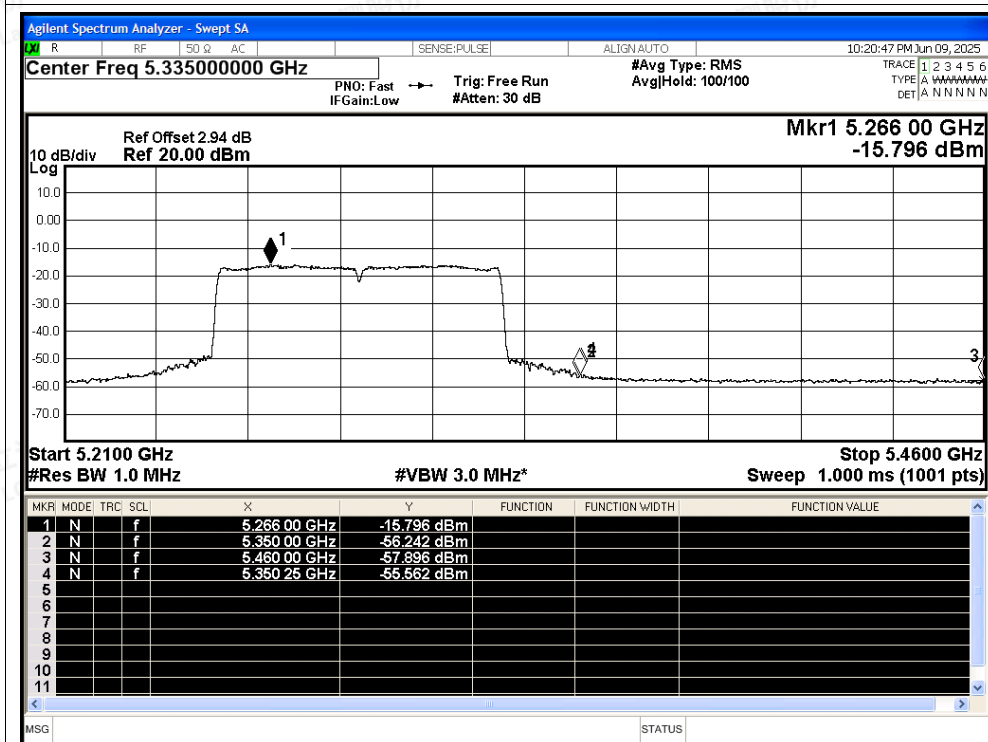

E.5 Frequency Stability



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5260	Ant1	5259.98	-20000	-3.8	25	Pass
NVNT	a	5300	Ant1	5299.98	-20000	-3.77	25	Pass
NVNT	a	5320	Ant1	5320	0	0	25	Pass
NVNT	n20	5260	Ant1	5259.98	-20000	-3.8	25	Pass
NVNT	n20	5300	Ant1	5300	0	0	25	Pass
NVNT	n20	5320	Ant1	5319.96	-40000	-7.52	25	Pass
NVNT	n40	5270	Ant1	5269.96	-40000	-7.59	25	Pass
NVNT	n40	5310	Ant1	5309.96	-40000	-7.53	25	Pass
NVNT	ac20	5260	Ant1	5260	0	0	25	Pass
NVNT	ac20	5300	Ant1	5299.98	-20000	-3.77	25	Pass
NVNT	ac20	5320	Ant1	5319.98	-20000	-3.76	25	Pass
NVNT	ac40	5270	Ant1	5270	0	0	25	Pass
NVNT	ac40	5310	Ant1	5309.96	-40000	-7.53	25	Pass
NVNT	ac80	5290	Ant1	5290	0	0	25	Pass






Test Graphs

Freq. Stability NVNT a 5260MHz Ant1

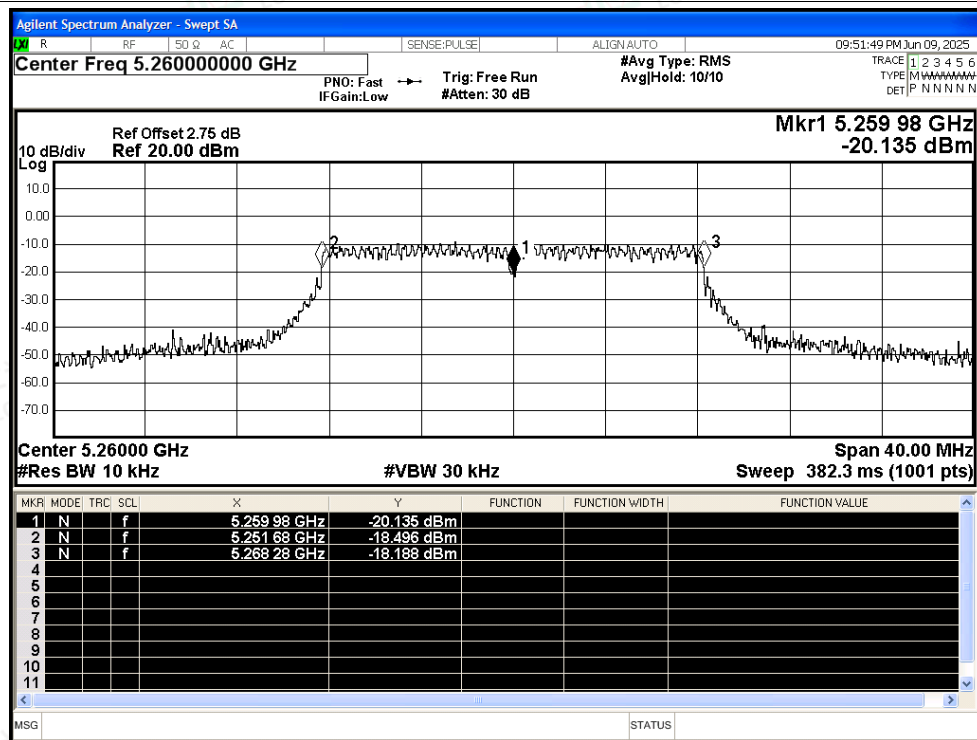

Freq. Stability NVNT a 5300MHz Ant1

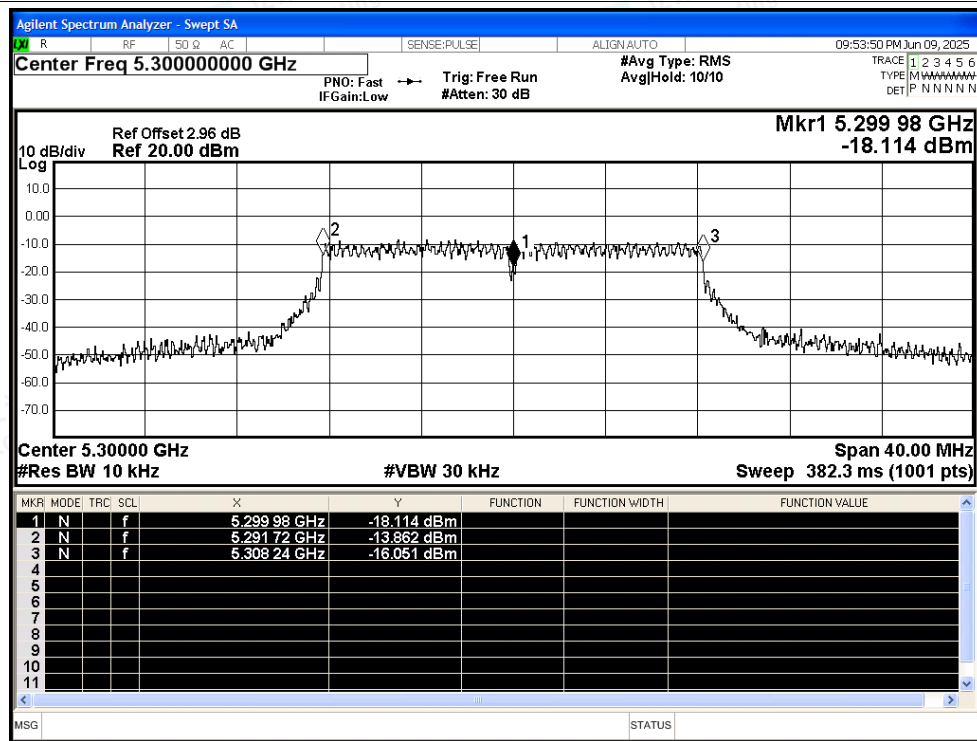

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Freq. Stability NVNT a 5320MHz Ant1

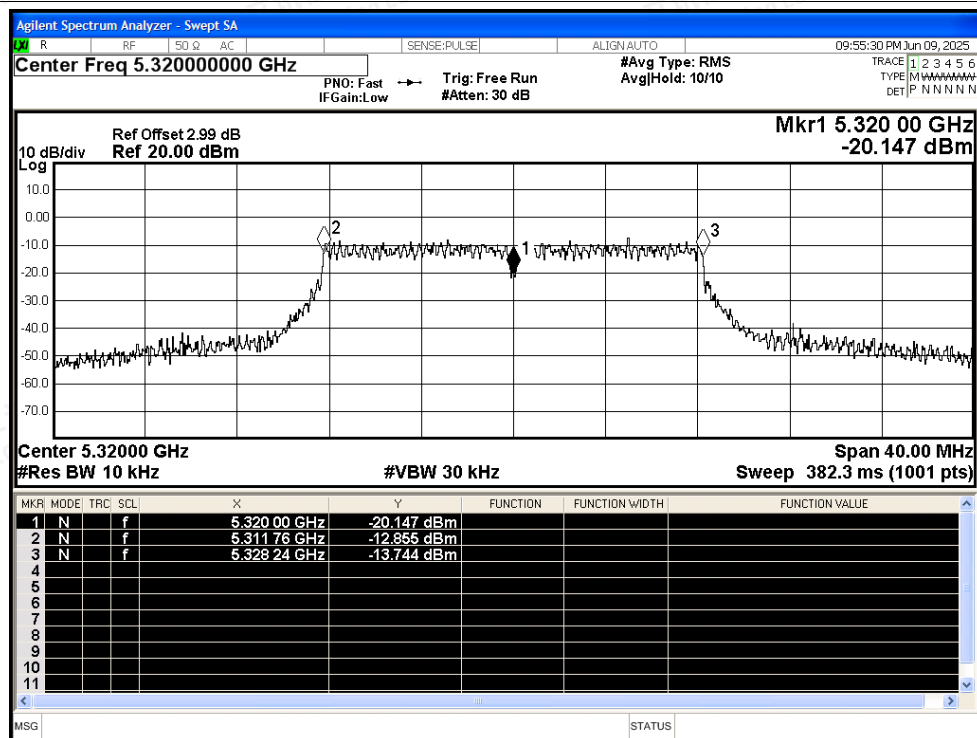

Freq. Stability NVNT n20 5260MHz Ant1

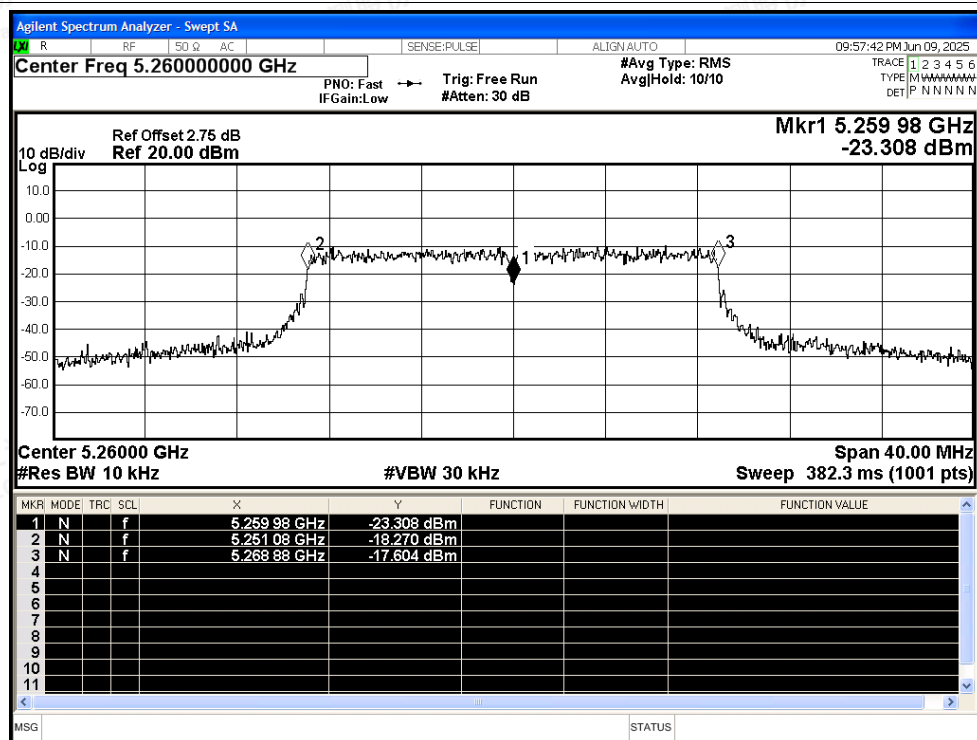

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Freq. Stability NVNT n20 5300MHz Ant1

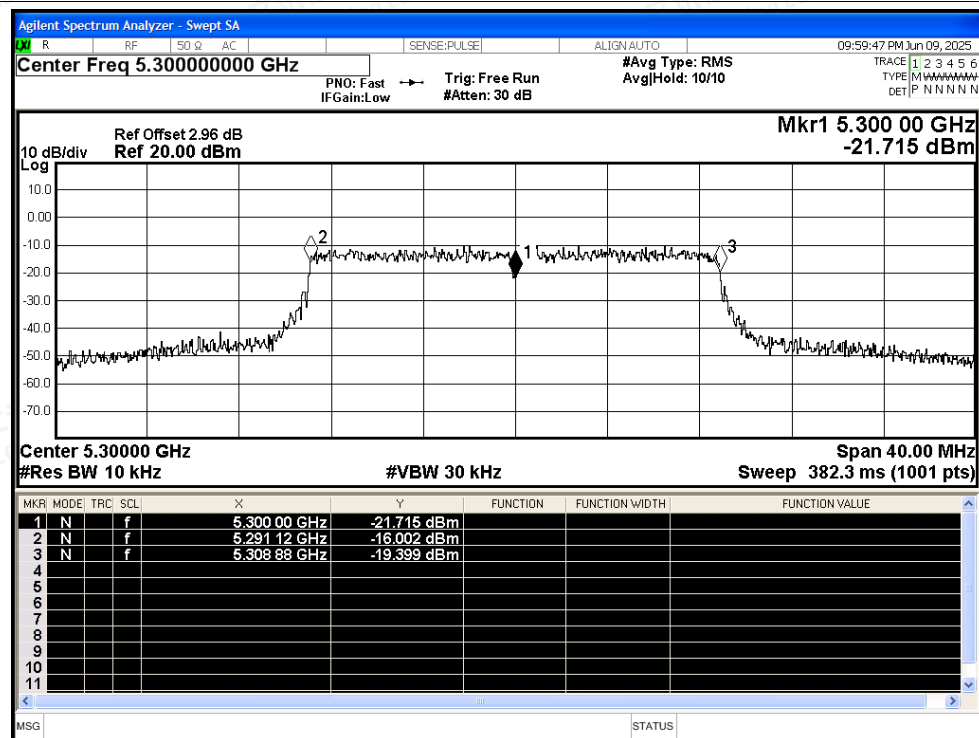


Freq. Stability NVNT n20 5320MHz Ant1

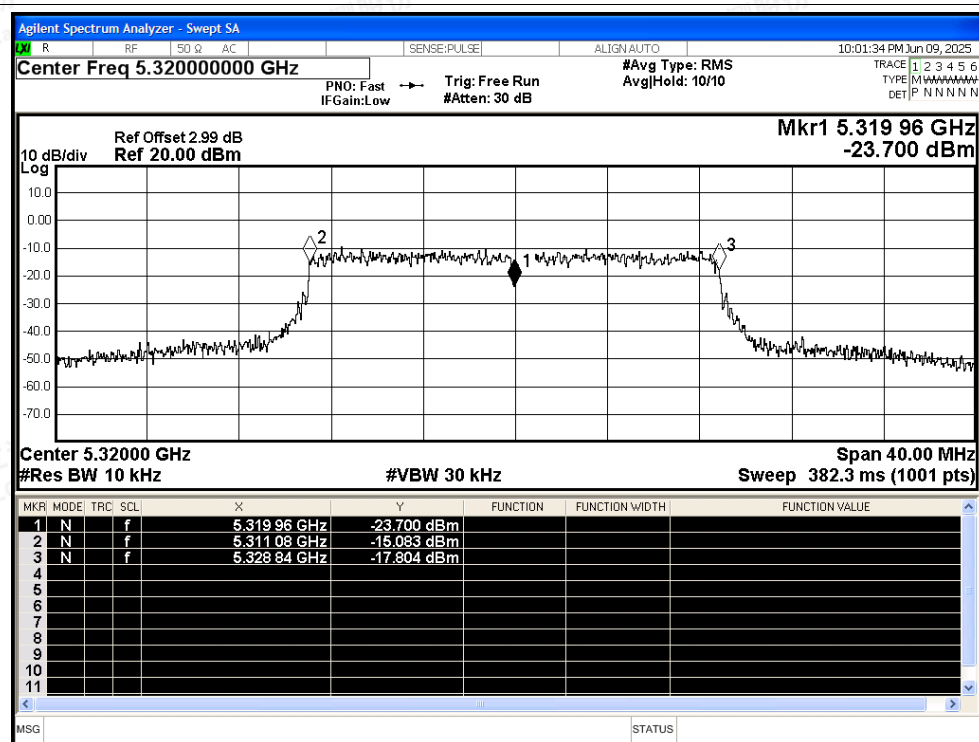








Freq. Stability NVNT n40 5270MHz Ant1


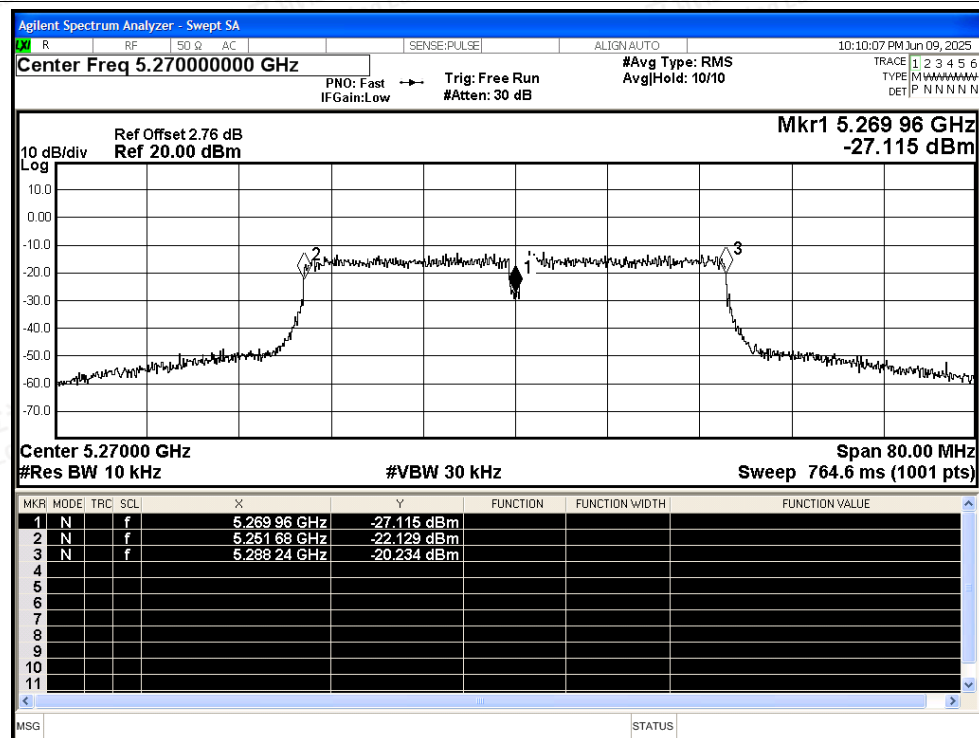


Freq. Stability NVNT n40 5310MHz Ant1

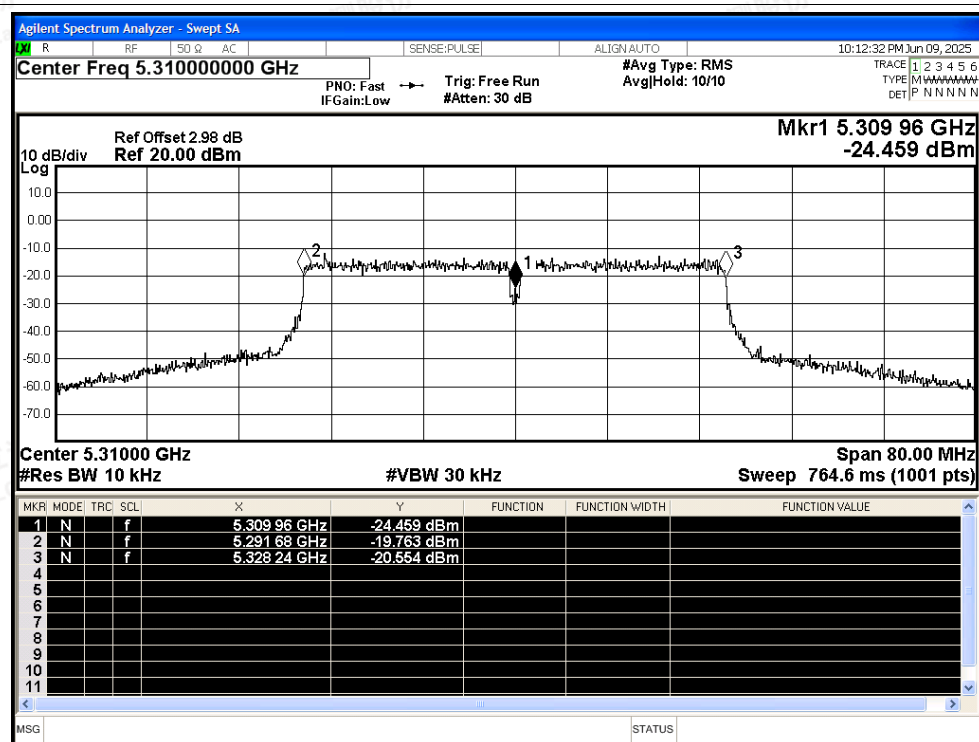

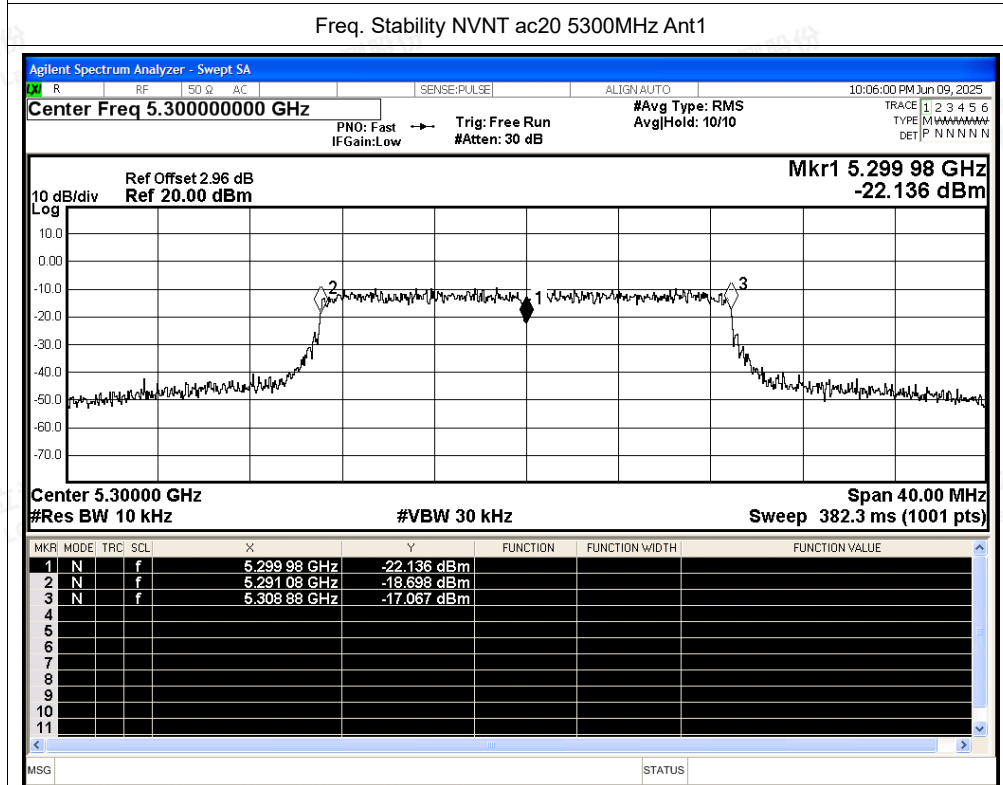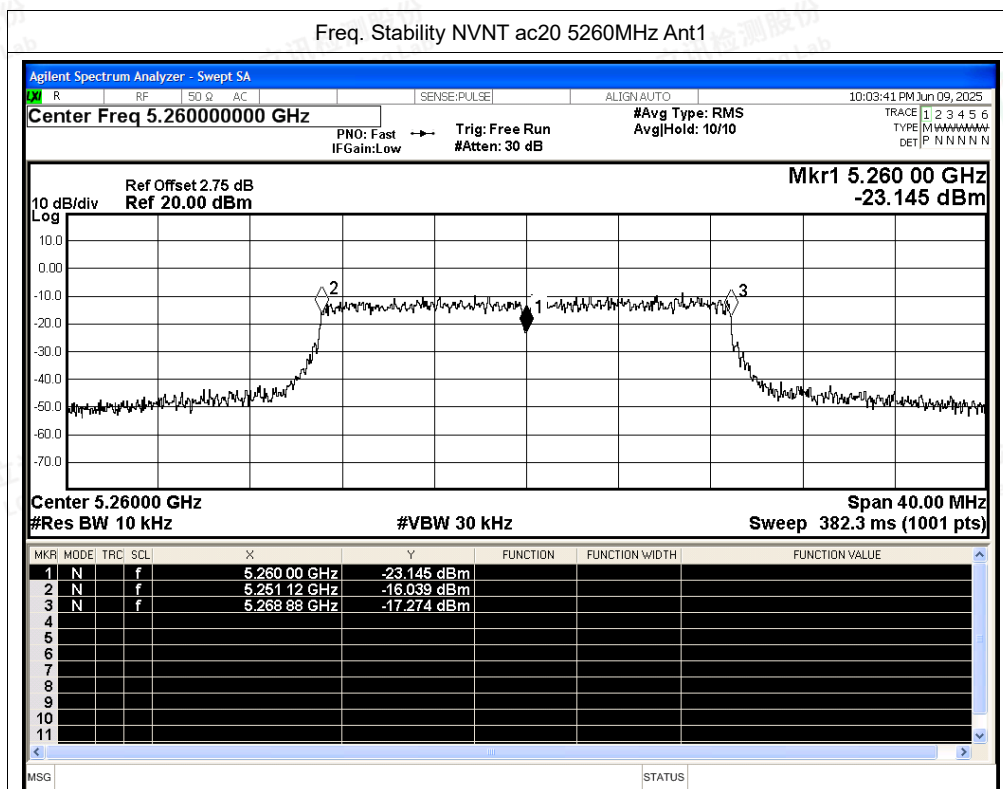

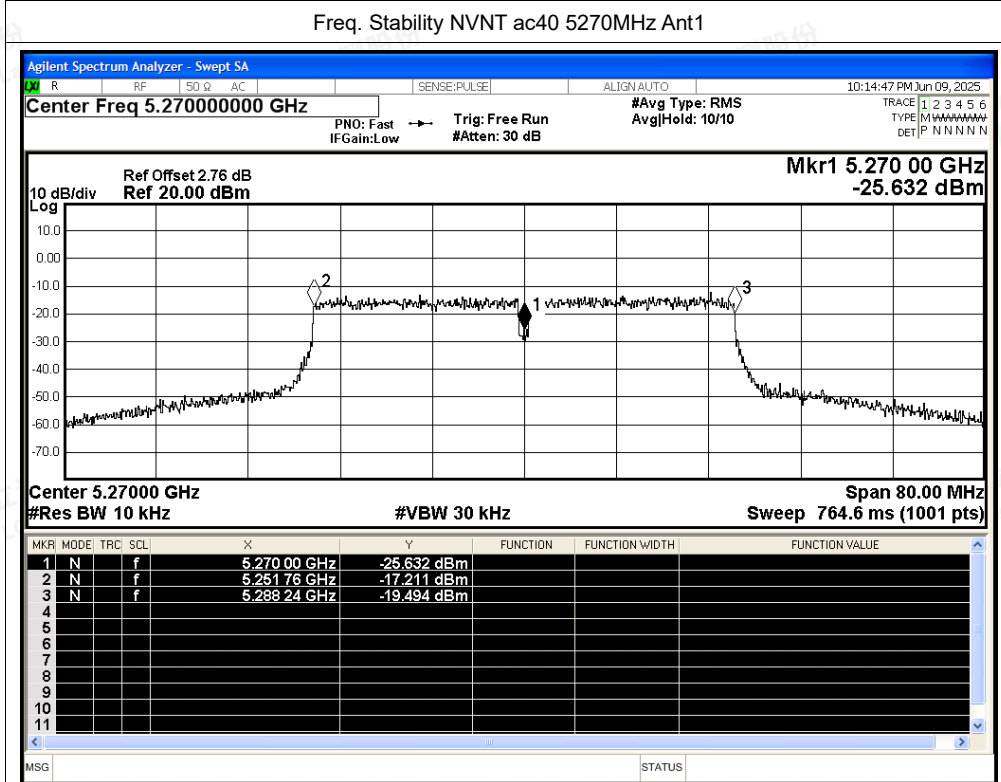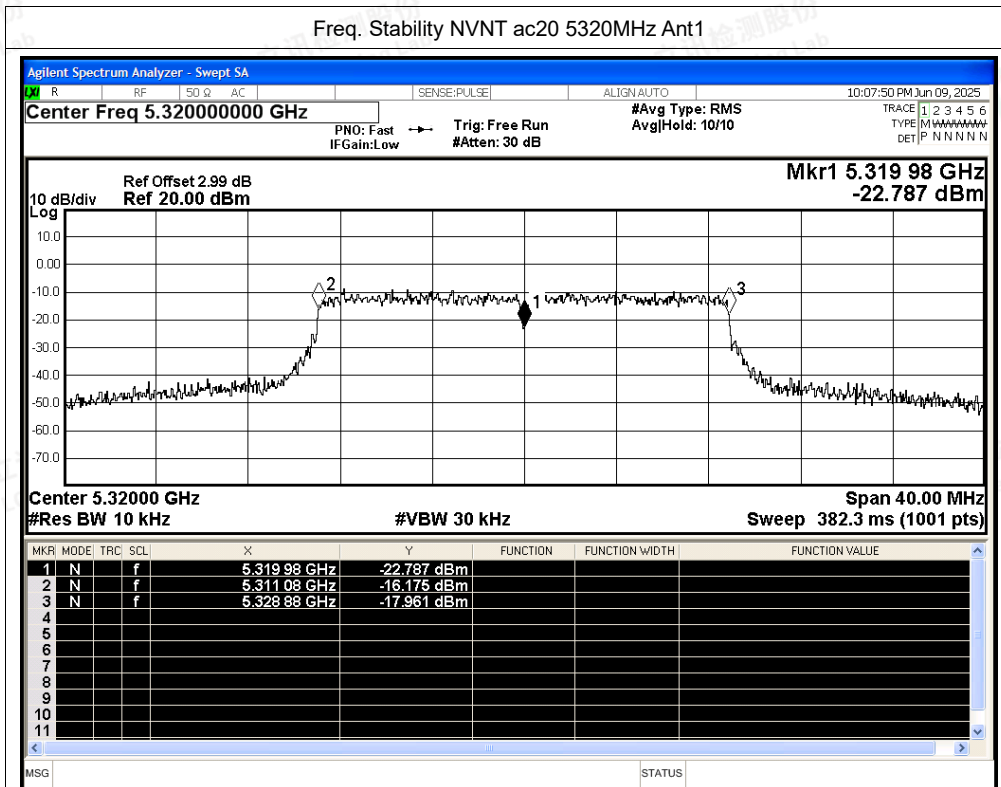

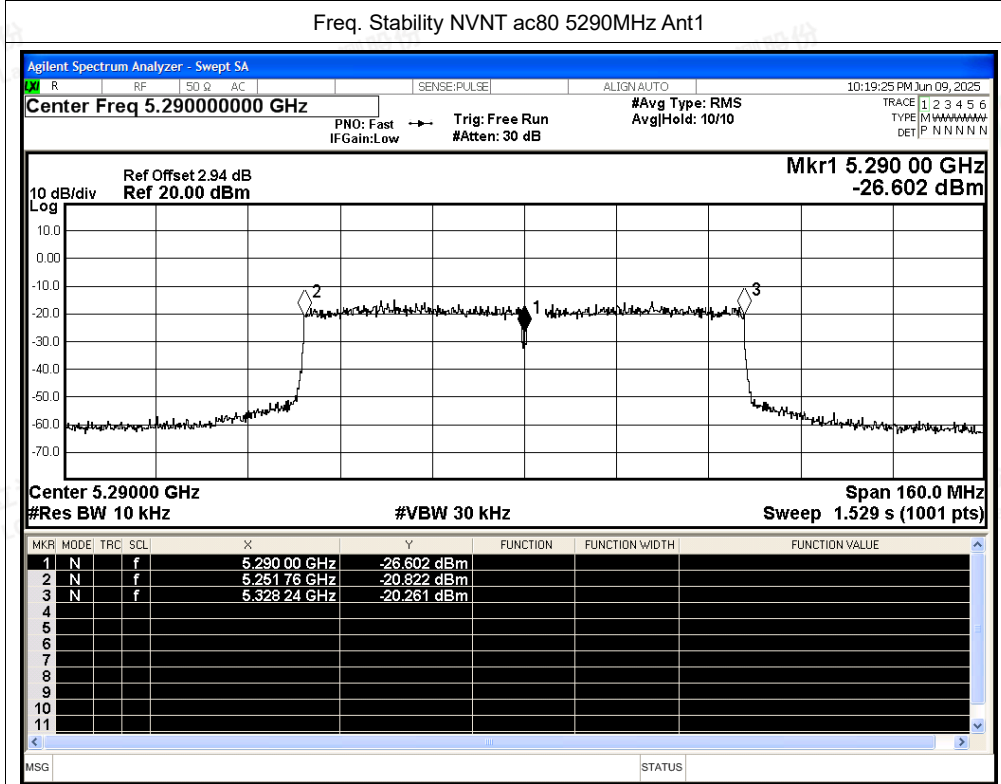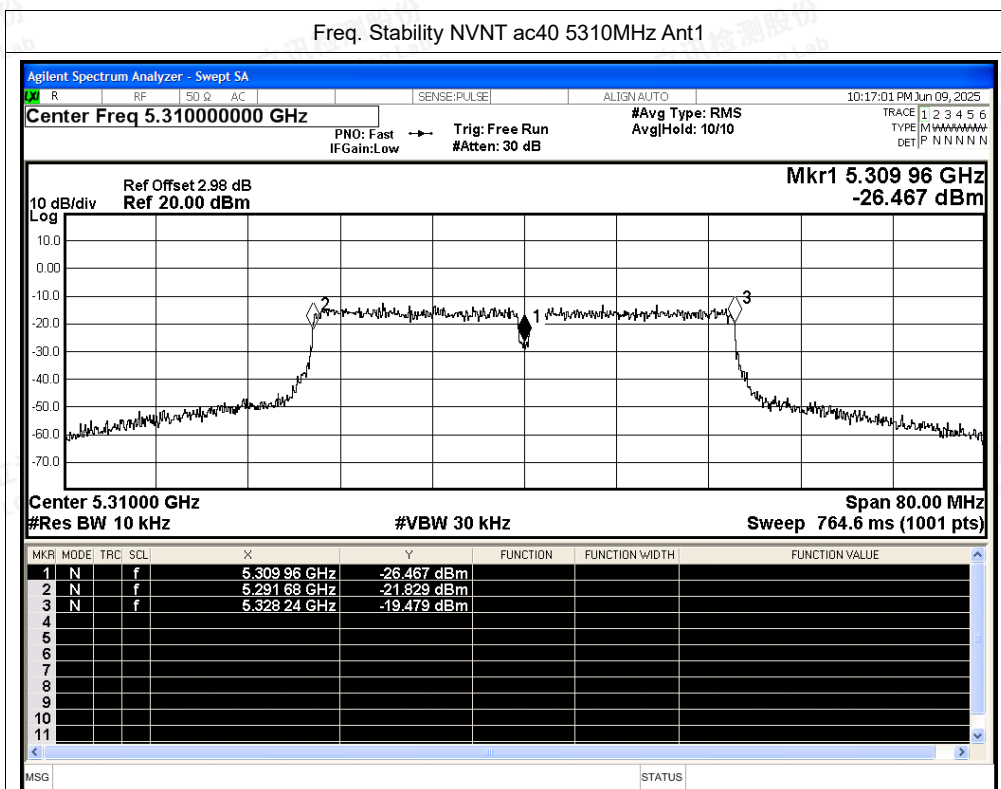

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



E.6 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	Ant1	94.56	0.24	0.91
NVNT	a	5300	Ant1	94.56	0.24	0.91
NVNT	a	5320	Ant1	94.56	0.24	0.91
NVNT	n20	5260	Ant1	97.29	0.12	0.44
NVNT	n20	5300	Ant1	97.33	0.12	0.44
NVNT	n20	5320	Ant1	97.29	0.12	0.44
NVNT	n40	5270	Ant1	94.79	0.23	0.9
NVNT	n40	5310	Ant1	94.71	0.24	0.9
NVNT	ac20	5260	Ant1	97.34	0.12	0.44
NVNT	ac20	5300	Ant1	97.3	0.12	0.44
NVNT	ac20	5320	Ant1	97.3	0.12	0.44
NVNT	ac40	5270	Ant1	94.72	0.24	0.9
NVNT	ac40	5310	Ant1	94.72	0.24	0.9
NVNT	ac80	5290	Ant1	89.65	0.47	1.86






Test Graphs

Duty Cycle NVNT a 5260MHz Ant1

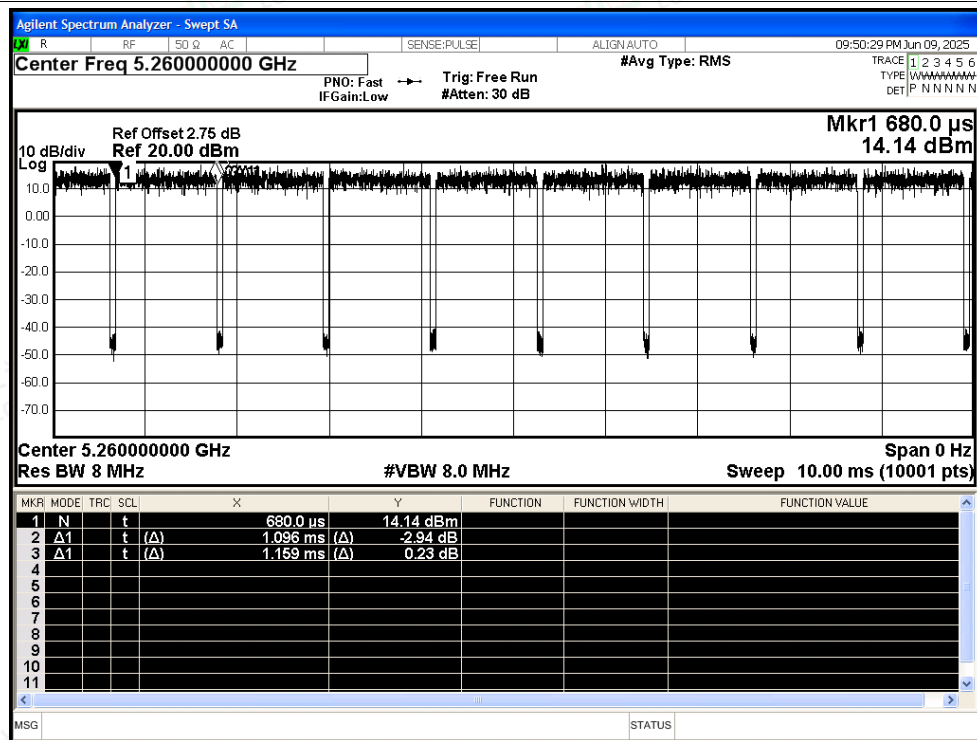

Duty Cycle NVNT a 5300MHz Ant1

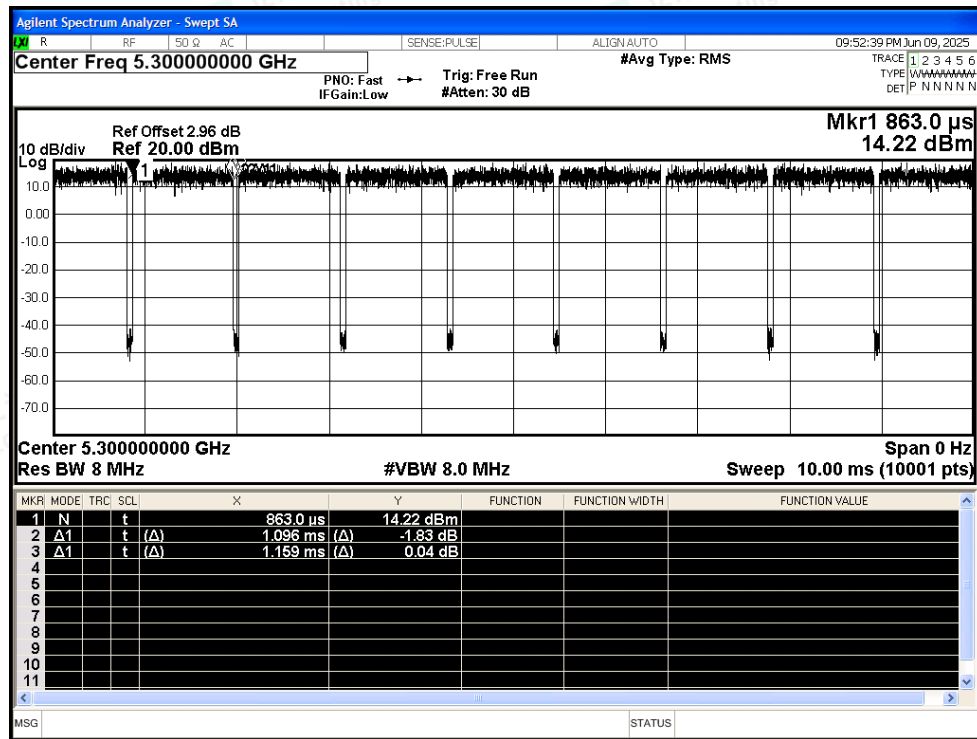

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT a 5320MHz Ant1

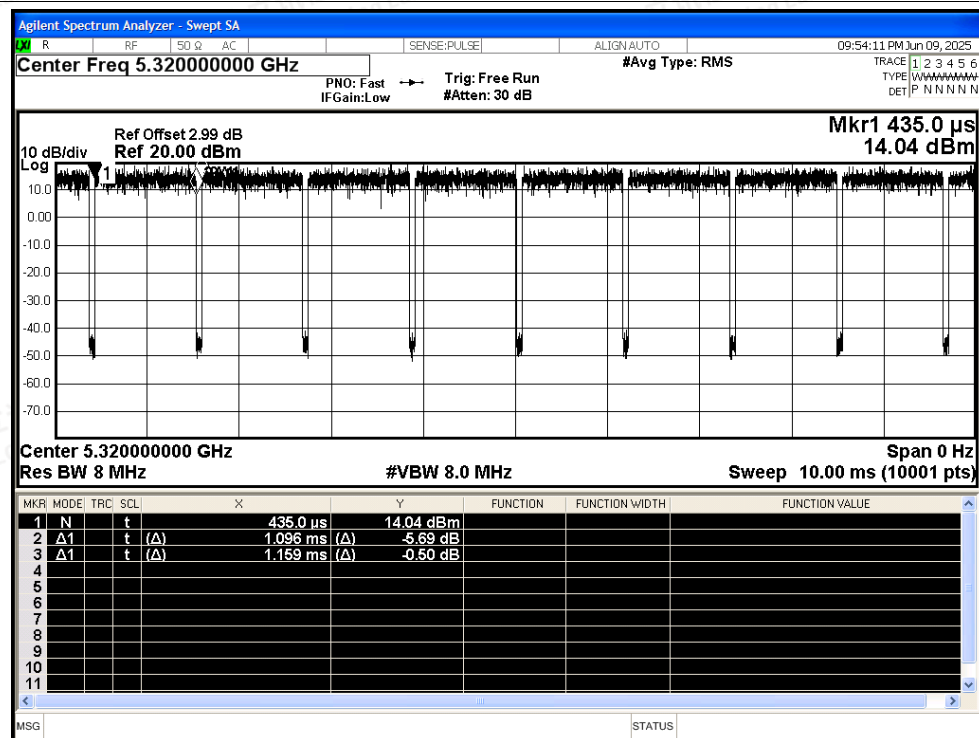


Duty Cycle NVNT n20 5260MHz Ant1

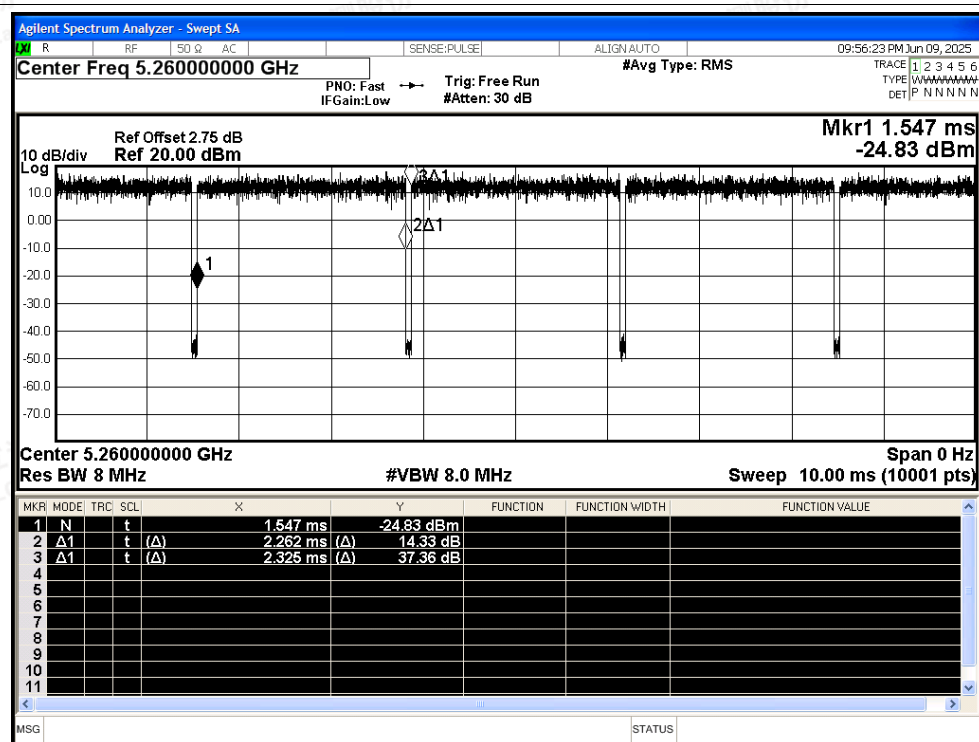




Duty Cycle NVNT n20 5300MHz Ant1

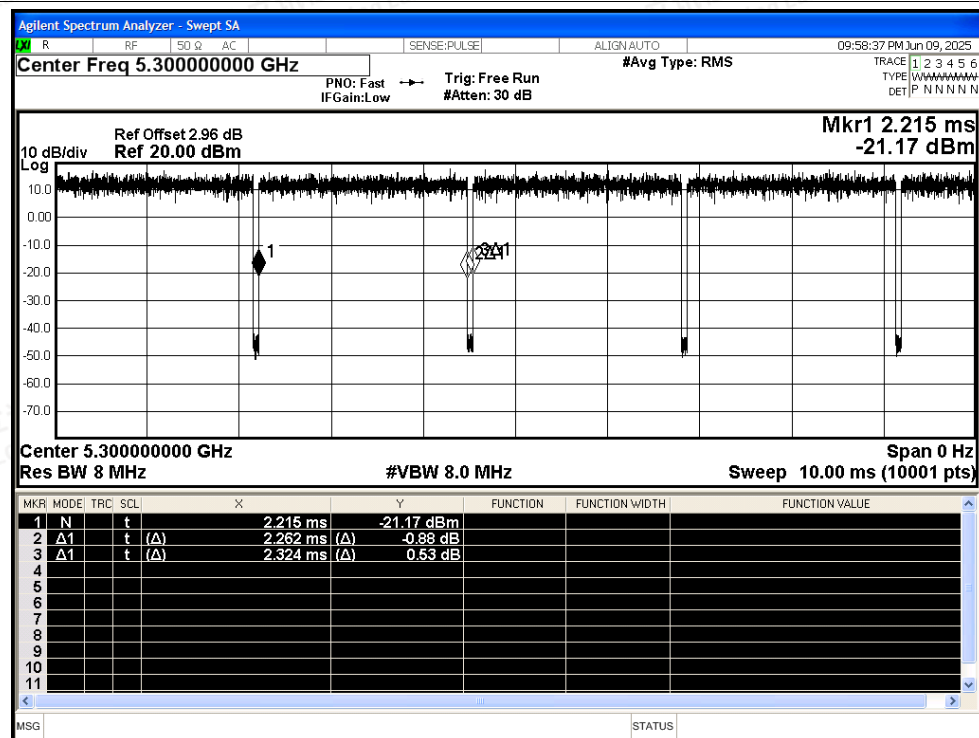


Duty Cycle NVNT n20 5320MHz Ant1

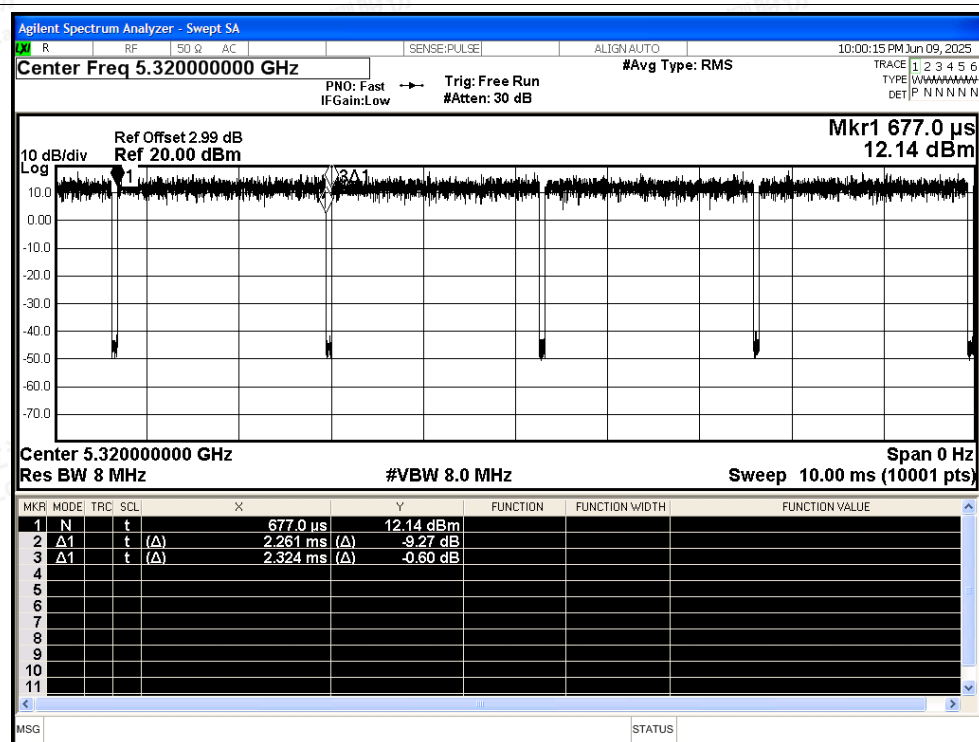




Duty Cycle NVNT n40 5270MHz Ant1

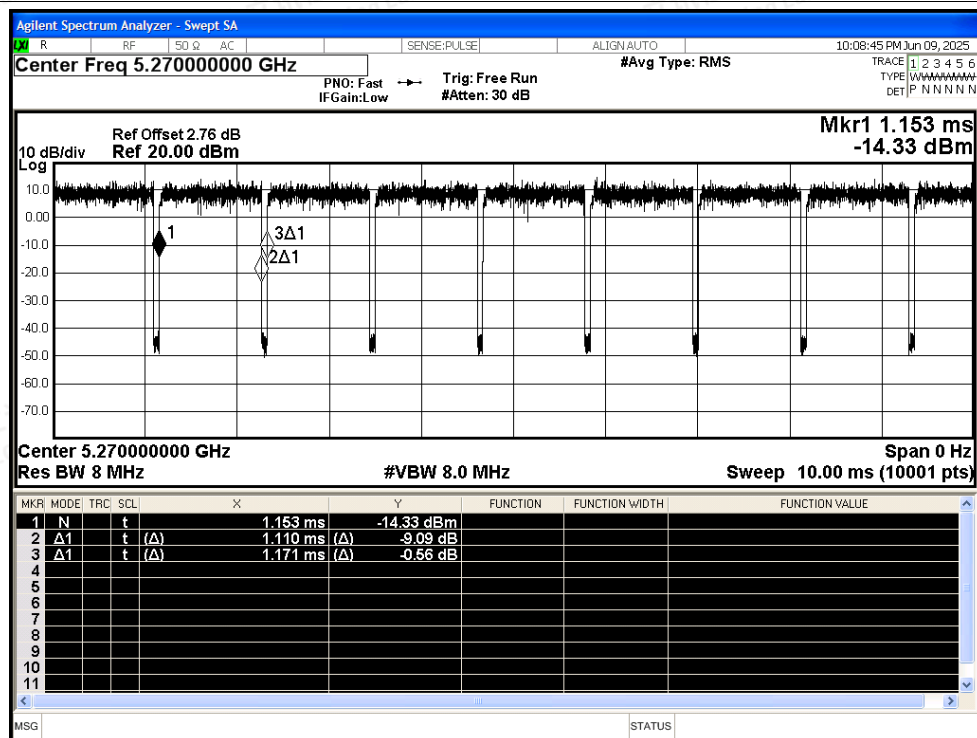

Duty Cycle NVNT n40 5310MHz Ant1

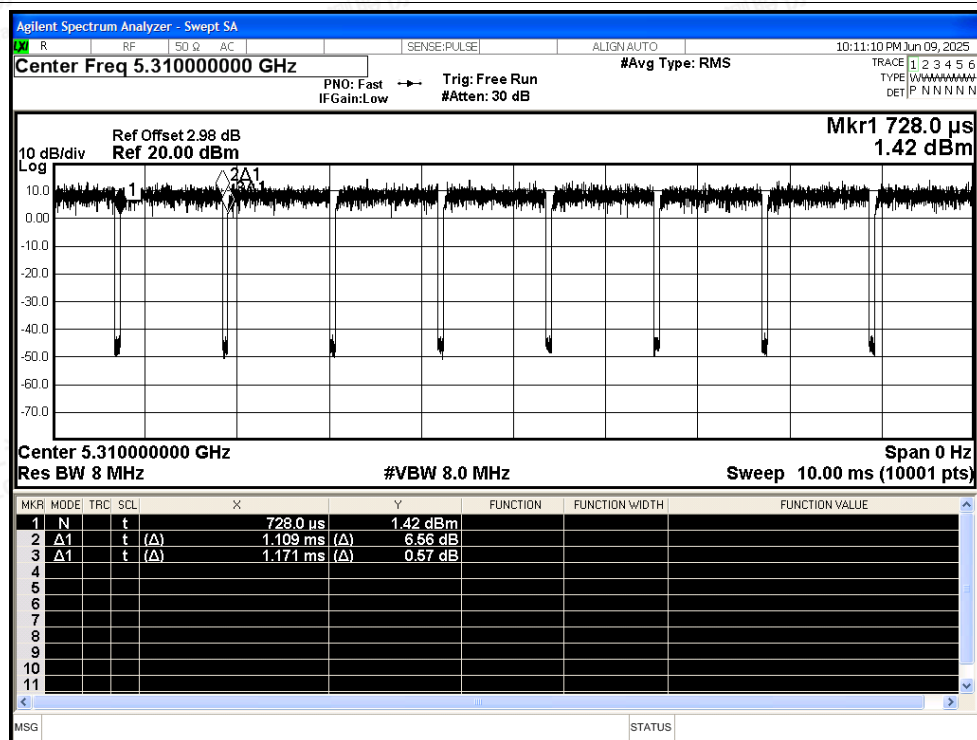

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT ac20 5260MHz Ant1

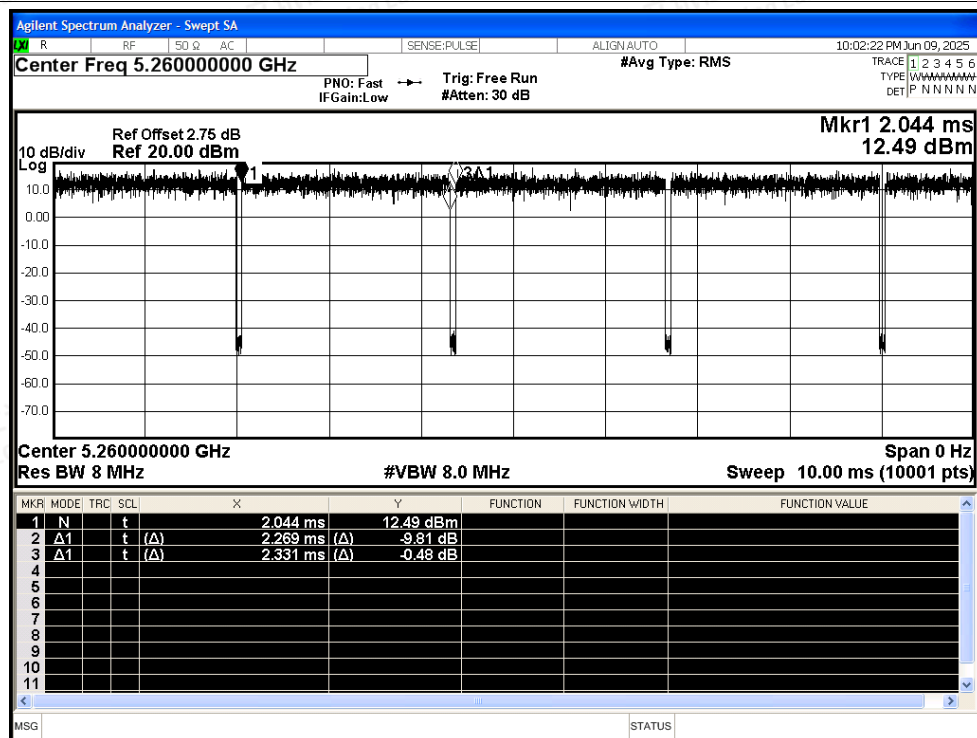


Duty Cycle NVNT ac20 5300MHz Ant1

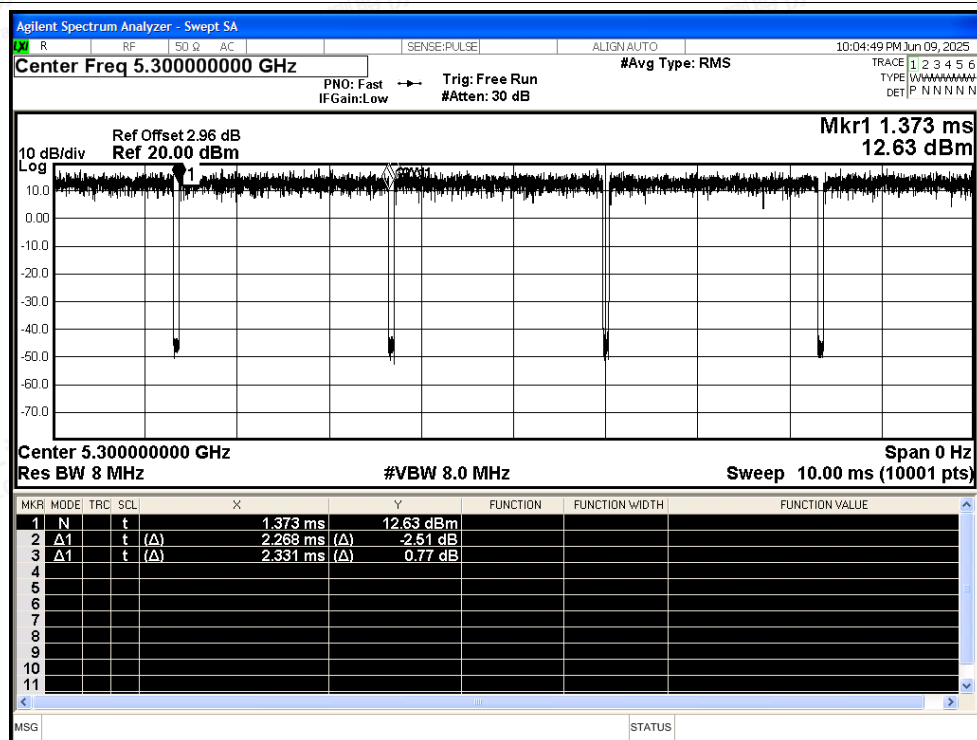




Duty Cycle NVNT ac20 5320MHz Ant1

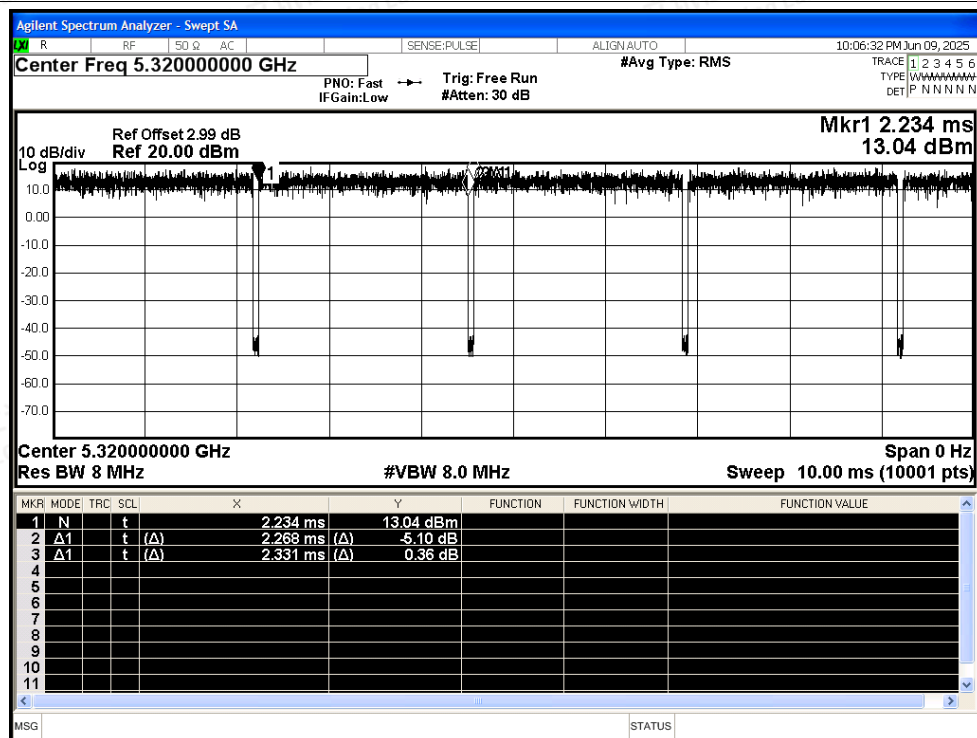

Duty Cycle NVNT ac40 5270MHz Ant1

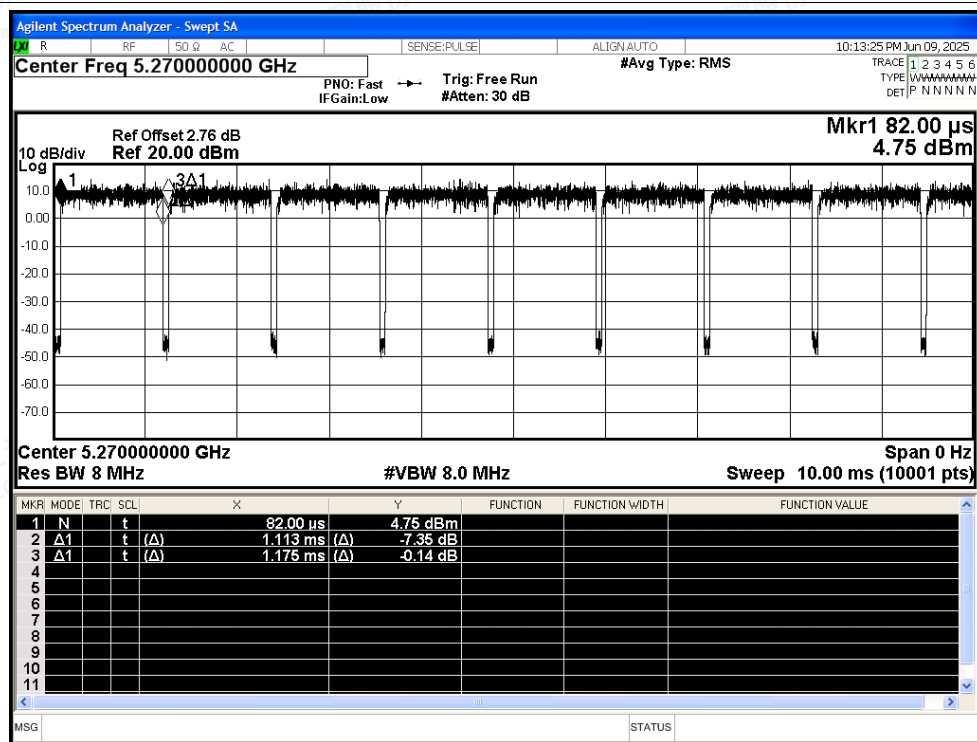

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Duty Cycle NVNT ac40 5310MHz Ant1

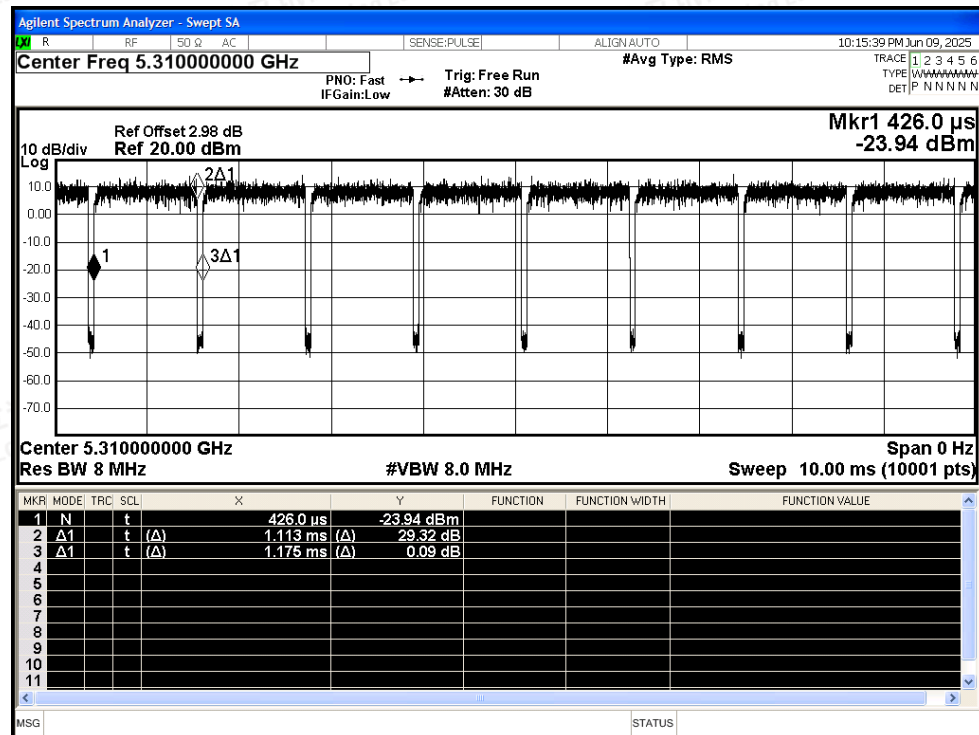

Duty Cycle NVNT ac80 5290MHz Ant1

