
TEST REPORT

Report No.: SRTC2019-9003(F)-0030
Product Name: Notification Pager
Model Name: P00000401A01
Applicant: SoftBank Robotics Corp.
Manufacturer: SoftBank Robotics Corp.
Specification: FCC Part15B (Certification)
(2019 edition)
FCC ID: 2ATI9-P00000401A01

The State Radio_monitoring_center Testing Center (SRTC)
15th Building, No.30 Shixing Street, Shijingshan District,
Beijing, China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

1. General information	3
1.1 Notes of the test report	3
1.2 Information about the testing laboratory.....	3
1.3 Applicant's details	3
1.4 Manufacturer's details.....	3
1.5 Application details	4
1.6 Reference specification.....	4
1.7 Information of EUT	4
1.7.1 General information.....	4
1.7.2EUT details	5
1.7.3 Auxiliary equipment details.....	5
2. Test information	6
2.1 Summary of the test results	6
2.2 Test result.....	7
2.2.1Conducted Emissions-FCC Part15.107	7
2.2.2RadiatedEmissions-FCC Part15.109.....	10
2.3. List of test equipments	14

1. General information

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company: The State Radio_monitoring_center Testing Center (SRTC)
Address: 15th Building, No.30 Shixing Street, Shijingshan District
Testing location: No.80, Zhaojiachang, BeizangCun, Daxing District, Beijing, China.
City: Beijing
Country or Region: China
Contacted person: Liu Jia
Tel: +86 10 57996183
Fax: +86 10 57996388
Email: liujiaf@srtc.org.cn

1.3 Applicant's details

Company: SoftBank Robotics Corp.
Address: 1-9-2 Higashi-shimbashi, Minato-ku, Tokyo, Japan
City: Tokyo
Country or Region: Japan
Contacted person: Huijun Wang
Tel: + 81-3-6889-2450
Email: huijun.wang@g.softbank.co.jp

1.4 Manufacturer's details

Company: SoftBank Robotics Corp.
Address: 1-9-2 Higashi-shimbashi, Minato-ku, Tokyo, Japan
City: Tokyo
Country or Region: Japan
Contacted person: Huijun Wang
Tel: + 81-3-6889-2450
Email: huijun.wang@g.softbank.co.jp

1.5 Application details

Date of reception of test sample: 26th June 2019

Date of test: 26th June 2019 to 5th September 2019

1.6 Reference specification

FCC Part 15B, 2019 (Certification)

1.7 Information of EUT

1.7.1 General information

Name of EUT	Notification Pager
Model Name	P00000401A01
Marketing Name	/
FCC ID	2ATI9-P00000401A01
Frequency Range	Lora: 902-928MHz
Equipment Class	Class B
Power Supply	Battery or Charger
Rated Power Supply Voltage	5V
HW Version	V 2.0.1
SW Version	V1.2.X

1.7.2EUT details

Product Name	Model Name	SN
Notification Pager	P00000401A01	720022702A40746

1.7.3 Auxiliary equipment details

AE (Auxiliary Equipment) 1#: USB Cable

Manufacturer	SHENZHEN LIANFALI ELECTRONIC TECHNOLOGY CO.,LTD.
Model Number	LFLBTUB02001

AE (Auxiliary Equipment) 2#: Battery

Type	Li-Lon
Manufacturer	Hunan Huahui New Energy Co.,Ltd
Model Number	NSC1450
Capacity	750mAh
Nominal Voltage	3.7V

AE (Auxiliary Equipment) 3#: Notification pager cradle

Manufacturer	Guangzhou Robustel LTD
Model Number	P00000501A01
S/N	/

AE (Auxiliary Equipment) 4#: Charger

Manufacturer	CHENYANG
Model Number	UP0515S
S/N	/
Input Voltage	100V-240V AC
Output Voltage	5V DC



Note1: The EUT is sold without power adapter. The USB power adapter (AE4) was provided by laboratory. Just for test.

Note2: The USB port of the cradle (AE3) can only be charged without the function of transmit data.

2. Test information

2.1 Summary of the test results

No.	Test case	FCC reference	Verdict
1	Conducted emissions	15.107	Pass
2	Radiated emissions	15.109	Pass

Approved By: Mr. Liu Wei Director of the test department 	Checked By Mr. Guo Yu Vice director of the test department 
Tested By: Mr. Wu Chengwang 	Issued date: 2019.09.06

2.2 Test result

2.2.1 Conducted Emissions-FCC Part15.107

Ambient condition:

Temperature	Relative humidity	Pressure
25.2°C	40.5%	100.8kPa

Test Setup with Charger:

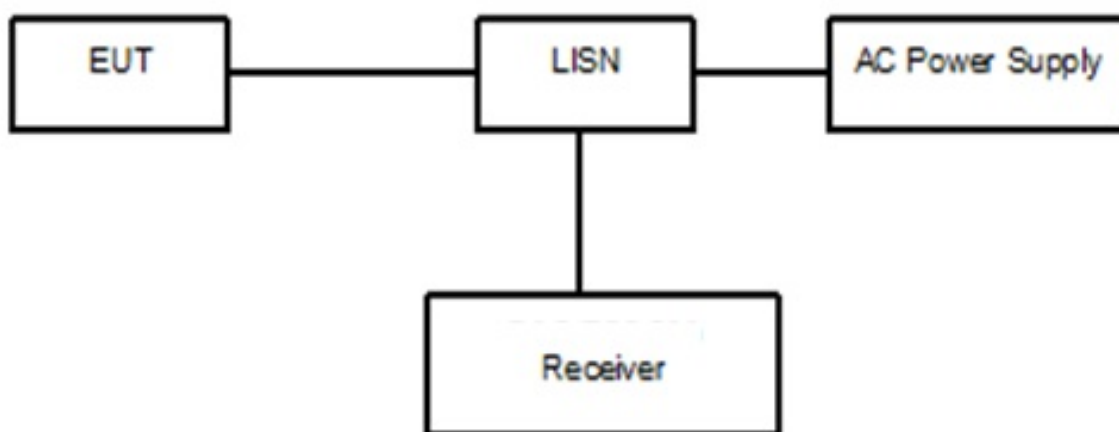


Figure 1

Test Procedure:

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The EUT is connected with LISN via the charger. The LISN is connected to the reference ground. The EUT was working at charging mode and Receiver mode.

The test set-up and the test methods are performed according to ANSI C63.4:2014. Then start the test software EMC32. Sweep the whole frequency band through the range from 150 KHz to 30 MHz with RBW 9kHz, VBW 30kHz. The measurement should be done for both L line and N line. During pre-test, the receiver uses both peak detector and average detector. And the final test, the receiver uses both average detector and Quasi-peak detector.

The data of cable loss has been calibrated in full testing frequency range before the testing.

A “reference path loss” Corr.(dB) is established and the $L_{\text{cable}} + \text{ATT} + \text{VDF}$ is the attenuation of “reference path loss”, and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{\text{result}} = P_{\text{mea}} + \text{Corr. (dB)}$$

Sample calculation: $(29.45 \text{ dB}\mu\text{V}) = (-0.25 \text{ dB}\mu\text{V}) + (29.7 \text{ dB})$, the corresponding frequency is 0.278136MHz.


Limit:

Frequency of Emission(MHz)	Limits(dB μ V)	
	Quasi-peak	Average
0.15~0.5	66 to 56*	56 to 46*
0.5~5	56	46
5~30	60	50

Note: * Decreases with the logarithm of the frequency


Test result:

Noise Level of the Measuring Instrument

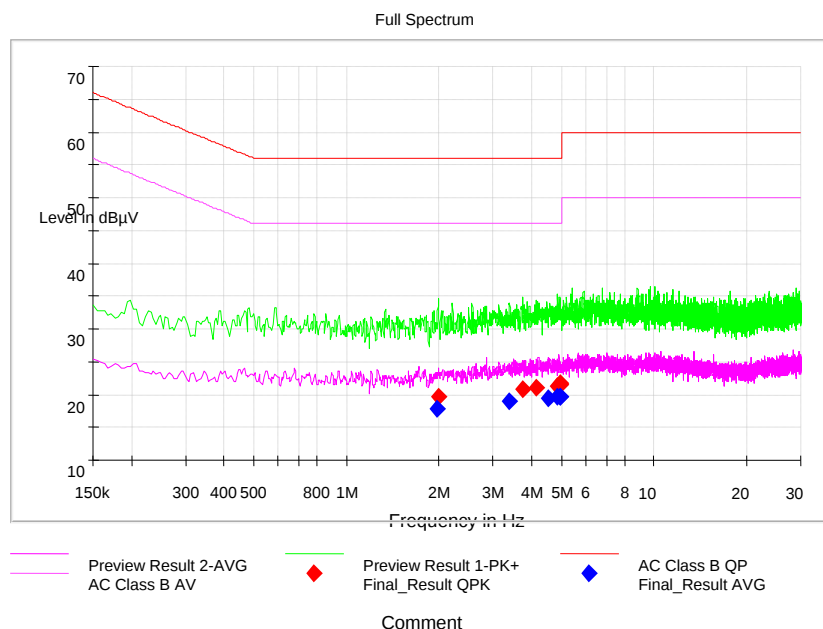

Pic1. Conducted emission L and N Line

EUT +AE #1+ AE #2+ AE #3+ AE #4:

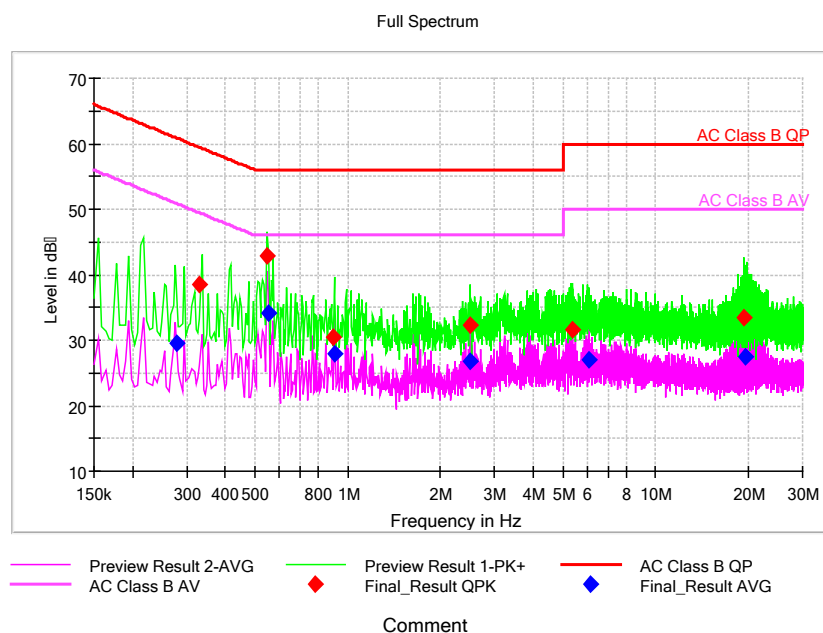

Pic2. Conducted emission L&N Line

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)	Pmea QuasiPeak (dBμV)	Pmea Average (dBμV)
0.278136	---	29.45	50.87	21.42	L1	29.7	---	-0.25
0.328932	38.43	---	59.48	21.05	L1	29.7	8.73	---
0.549500	42.78	---	56.00	13.22	L1	29.7	13.08	---
0.553500	---	34.24	46.00	11.76	L1	29.7	---	4.54
0.894795	30.41	---	56.00	25.59	L1	29.7	0.71	---
0.906795	---	27.83	46.00	18.17	N	29.7	---	-1.87
2.494795	32.19	---	56.00	23.81	L1	29.8	2.39	---
2.498795	---	26.87	46.00	19.13	L1	29.8	---	-2.93
5.350205	31.54	---	60.00	28.46	L1	29.8	1.74	---
6.076795	---	27.02	50.00	22.98	L1	29.8	---	-2.78
19.392750	33.35	---	60.00	26.65	L1	30.0	3.35	---
19.621318	---	27.36	50.00	22.64	L1	30.0	---	-2.64

2.2.2 Radiated Emissions-FCC Part15.109

Ambient condition:

Temperature	Relative humidity	Pressure
24.8°C	40.1%	100.8kPa

Test Setup:

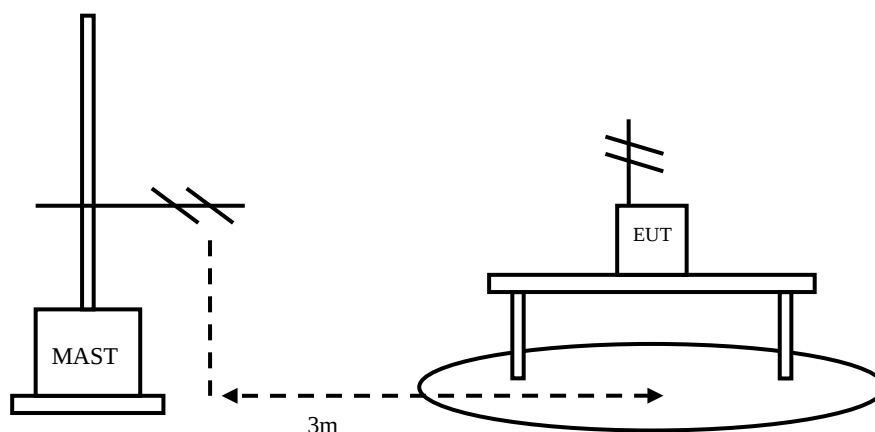


Figure 2

Test Procedure:

EUT+ charger:

The EUT should be placed on a non-metallic table 80cm above the ground plane. The receive antennas shall be moved from 1 to 4 meters. The distance between EUT and receive antenna should be 3 meters.

The EUT should work in charging mode. The EUT is connected with the charger. The test set-up and the test methods are performed according to ANSI C63.4:2014. Then start the test software EMC32. Sweep the whole frequency band through the range from 30MHz to 1GHz, using receive log period antenna VULB 9163.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The EUT is laid in two modes as follow:
1. put the EUT in horizontal direction; 2. put the EUT in vertical direction.

The data of cable loss and antenna factor have been calibrated in full testing frequency range before the testing. All test results are performed with max hold at

the horizontal and vertical polarity.

RBW=120kHz, VBW=300kHz, when the test frequency: $30\text{MHz} < f < 1\text{GHz}$

RBW=1MHz, VBW=3MHz, when the test frequency: $f > 1\text{GHz}$

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Limit:

Frequency of Emission(MHz)	Limits	
	Detector	Unit (dB μ V/m)
30~88	Quasi-peak	40
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46
960~1000	Quasi-peak	54
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54
	Peak	74


Test result:

Sample calculation: (19.01 dB μ V/m) = (39.11 dB μ V/m) + (-20.1dB), the corresponding frequency is 65.171500MHz.

EUT +AE #1+ AE #2+ AE #3+ AE #4


Frequency(MHz)	Result(dB μ V/m)	Limit (dB μ V/m)	ARpl (dB)	Pmea (dB μ V/m)	Polarity
65.171500	19.01	40.00	-20.1	39.11	V
65.541500	19.36	40.00	-20.2	39.56	V
83.147000	23.72	40.00	-22.9	46.62	V
94.902000	25.50	43.50	-19.6	45.1	V
95.438000	25.57	43.50	-19.5	45.07	V
95.463500	25.59	43.50	-19.5	45.09	V

EUT +AE #1+ AE #2+ AE #3+ AE #4: refer to Pic3, Pic4, Pic5

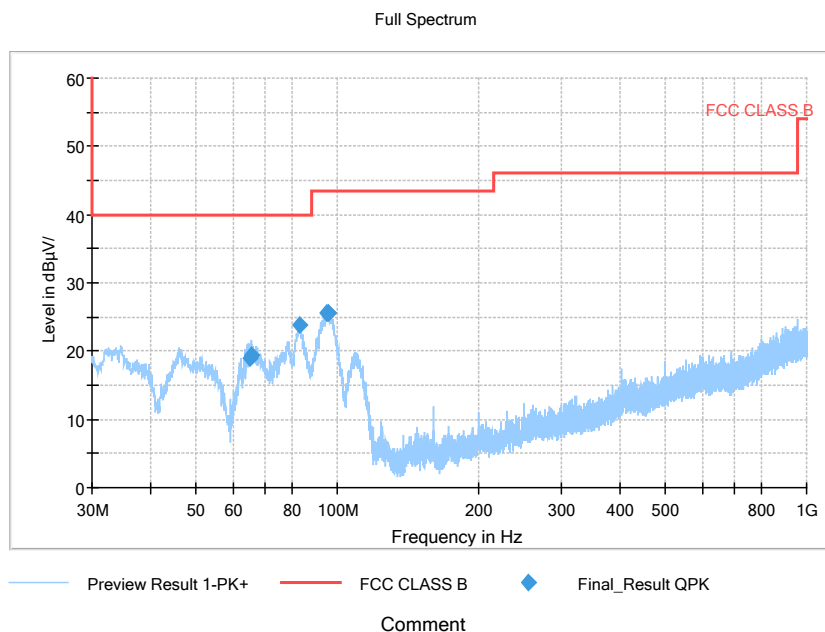

Pic3. Radiated emission (30MHz – 1GHz)


Note: The test data in the graph includes two polarizations: horizontal and vertical

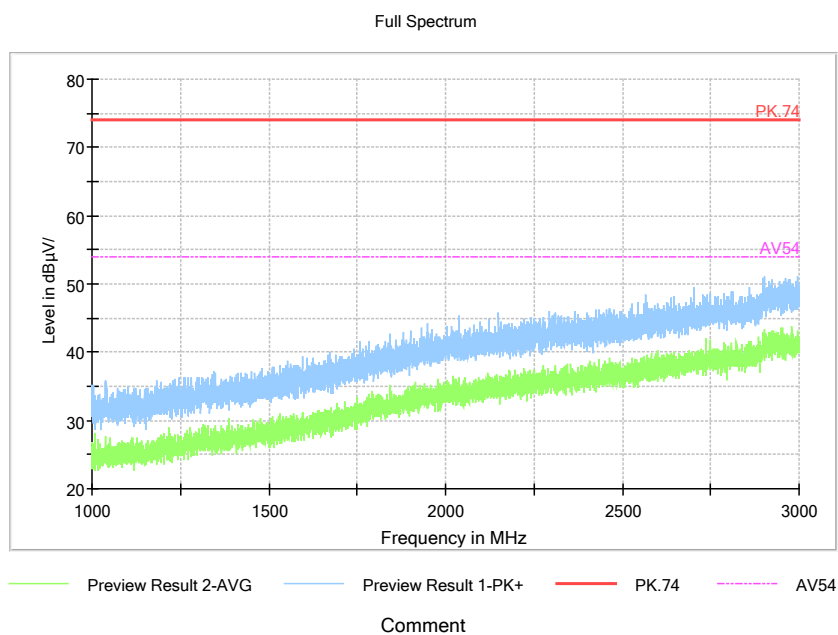

Pic4. Radiated emission (1GHz –3GHz)

Note: The test data in the graph includes two polarizations: horizontal and vertical.

Full Spectrum

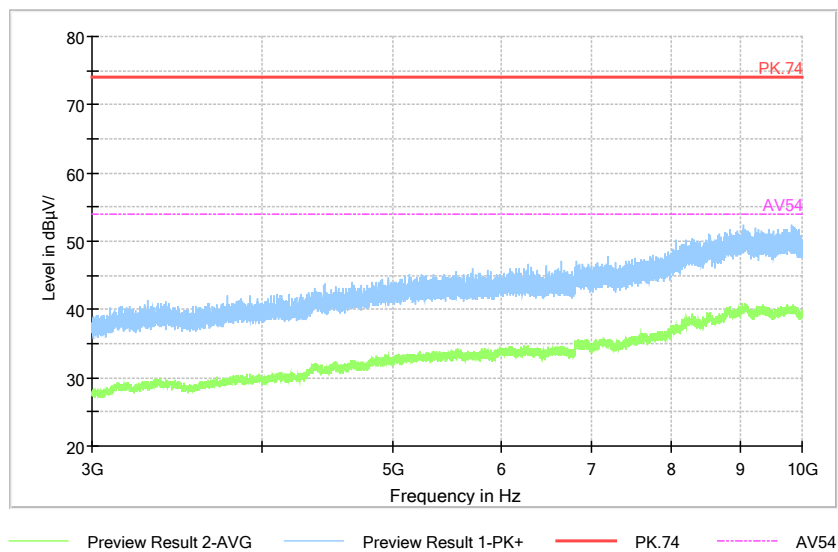

Comment

Pic5. Radiated emission (3GHz –10GHz)

Note: The test data in the graph includes two polarizations: horizontal and vertical.

2.3. List of test equipments

No.	Name/Model	Manufacturer	S/N	Calibration Due Date	Calibration Date
1	23.18m×16.88m×9.60mS emi-AnechoicChamber	FRANKONIA	-----	5th Sep. 2021	6th Sep. 2016
2	ESW EMI test receiver	R&S	101574	20th Aug. 2020	20th Aug. 2018
3	9.080m×5.255m×3.525m Shielding room	FRANKONIA	-----	5th Sep. 2021	6th Sep. 2016
4	ESR3 EMI test receiver	R&S	102361	20th Aug. 2020	20th Aug. 2018
5	VULB 9163 Ultra log test antenna	schwarzbeck	867	20th Aug. 2020	20th Aug. 2018
6	ENV216 AMN	R&S	3560.6550. 12	20th Aug. 2020	20th Aug. 2018
7	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100512	20th Aug. 2020	20th Aug. 2018
8	PS2000 Turn Table	FRANKONIA	-----	-----	-----
9	MA260 Antenna Master	FRANKONIA	-----	-----	-----
10	EMC32EMI test software	R&S	-----	-----	-----