

# Shenzhen SKYLink Technology Co.,Ltd

## Antenna Specification for Approval

Customer Name: \_\_\_\_\_

Product Name: \_\_\_\_\_ 2.4G WIFI Antenna \_\_\_\_\_

Part NO. : \_\_\_\_\_ G01. SM. WIFI. C113. 75B. 1 \_\_\_\_\_

Write By: \_\_\_\_\_ YAN PEI HAI \_\_\_\_\_

Issued Date: \_\_\_\_\_ 2024-08-29 \_\_\_\_\_

Customer

| R&D Dept | Business Dept | Approved By |
|----------|---------------|-------------|
|          |               |             |

SKYLink

| R&D Dept | Engineer Dept | Approval |
|----------|---------------|----------|
|          |               |          |

## ● Specification Summary

| A. Electrical Characteristics            |                   |
|------------------------------------------|-------------------|
| Frequency                                | 2400MHz ~2500MHz  |
| VSWR                                     | <2.0              |
| Efficiency                               | >45%              |
| Peak Gain                                | 1.6dbi            |
| Impedance                                | 50 Ohm            |
| Polarization                             | Line              |
|                                          |                   |
| B. Material & Mechanical Characteristics |                   |
| Material of Radiator                     | Cu                |
| Cable Type                               | 1.13mm            |
| Connector Type                           | I                 |
| Dimension                                | At Attachment     |
| Heat-durability                          | 280±5°C, 10sec.   |
|                                          |                   |
| C. Environmental Characteristics         |                   |
| Operation Temperature                    | - 20 °C ~ + 80 °C |
| Storage Temperature                      | - 30 °C ~ + 85 °C |
|                                          |                   |

## ● Test Equipment & Conditions




### 1. Network Analyzers :

Agilent 8753D 5071B

**Communications Test Set:**

Agilent E5515C CMW500

### 2. 3D Chamber Test System

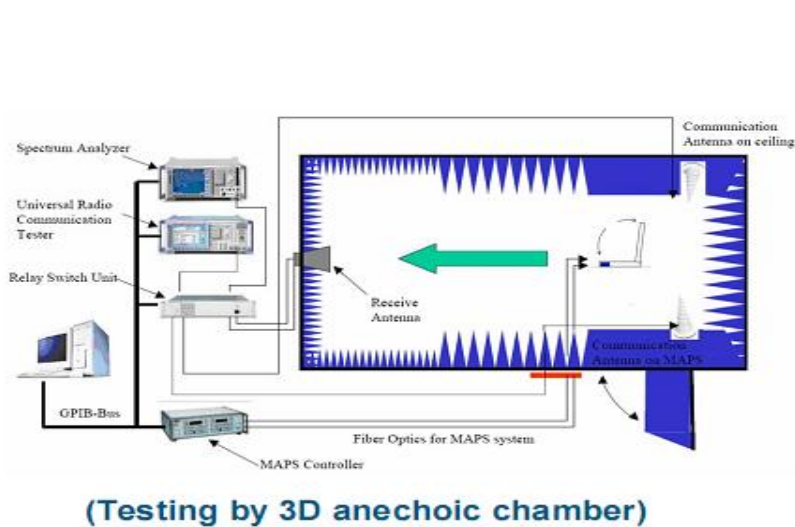

1

2

3



4

5

6

7

8

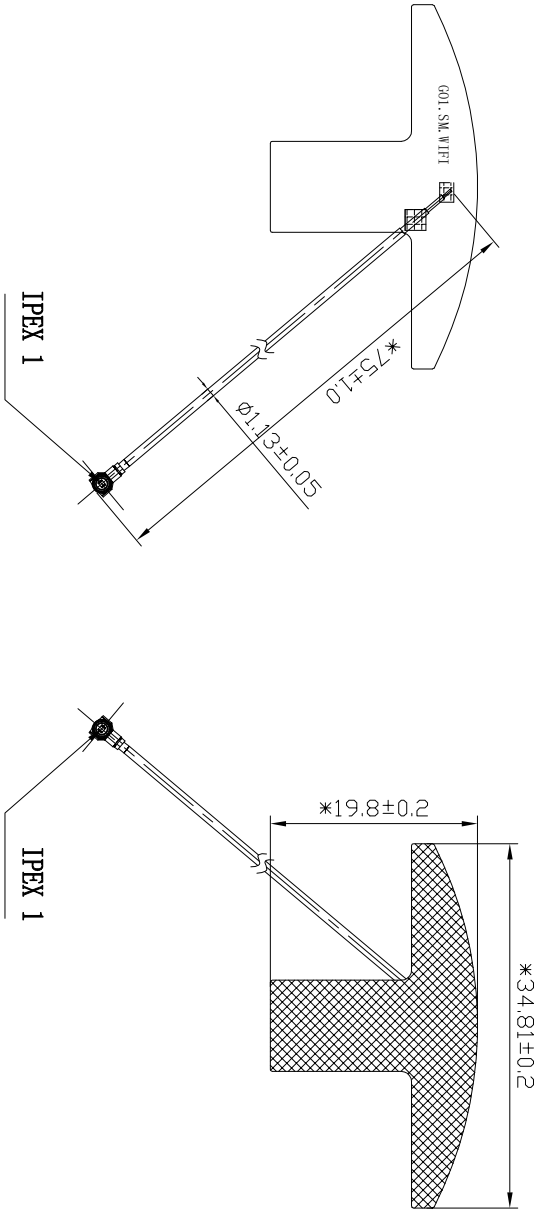


|                                                              |  |   |  |   |  |   |  |   |  |   |  |   |  |   |  |
|--------------------------------------------------------------|--|---|--|---|--|---|--|---|--|---|--|---|--|---|--|
| 1                                                            |  | 2 |  | 3 |  | 4 |  | 5 |  | 6 |  | 7 |  | 8 |  |
| A                                                            |  | A |  |   |  |   |  |   |  |   |  |   |  |   |  |
| <div><div>RoHS</div><div>Compliant</div><div>G.P</div></div> |  |   |  |   |  |   |  |   |  |   |  |   |  |   |  |

### ◆ Gain & Efficiency


| Fre (MHz) | Ef(%) (dB) | Gain(dB) |
|-----------|------------|----------|
| 2400      | 45.62      | 1.51     |
| 2410      | 45.68      | 1.35     |
| 2420      | 46.32      | 1.54     |
| 2430      | 46.55      | 1.5      |
| 2440      | 47.82      | 1.32     |
| 2450      | 46.38      | 0.98     |
| 2460      | 48.55      | 1.08     |
| 2470      | 48.31      | 1.3      |
| 2480      | 49.22      | 1.37     |
| 2490      | 48.71      | 1.63     |
| 2500      | 48.19      | 1.65     |

## ◆ Directional pattern


2400.000MHz




2400.000MHz H




2400.000MHz E1




2400.000MHz E2




2450.000MHz




2450.000MHz H




2450.000MHz E1




2450.000MHz E2




2500.000MHz




2500.000MHz H





2500.000MHz E1



2500.000MHz E2



## ◆ Antenna Picture

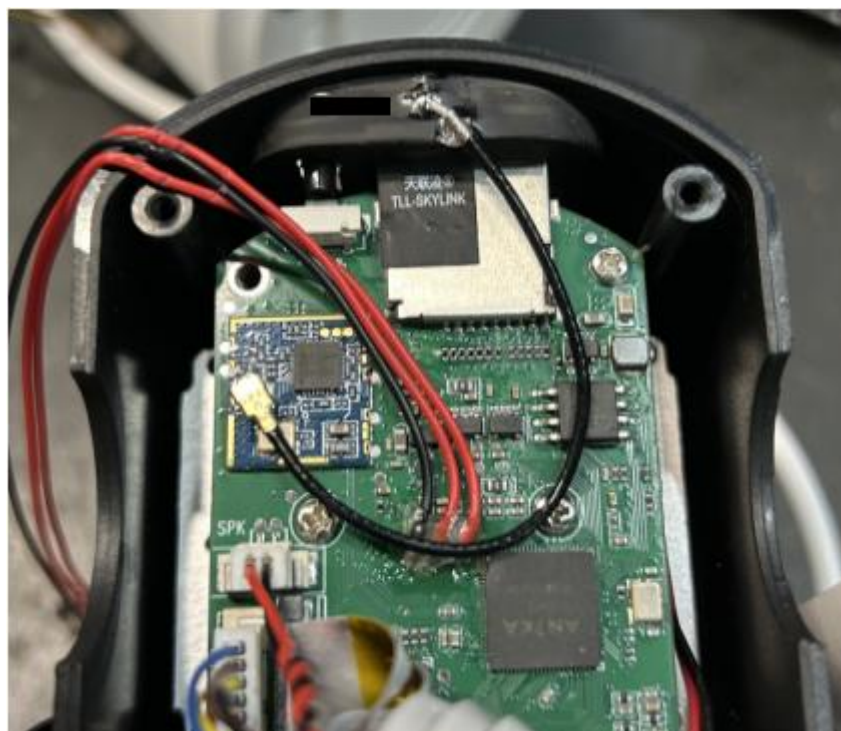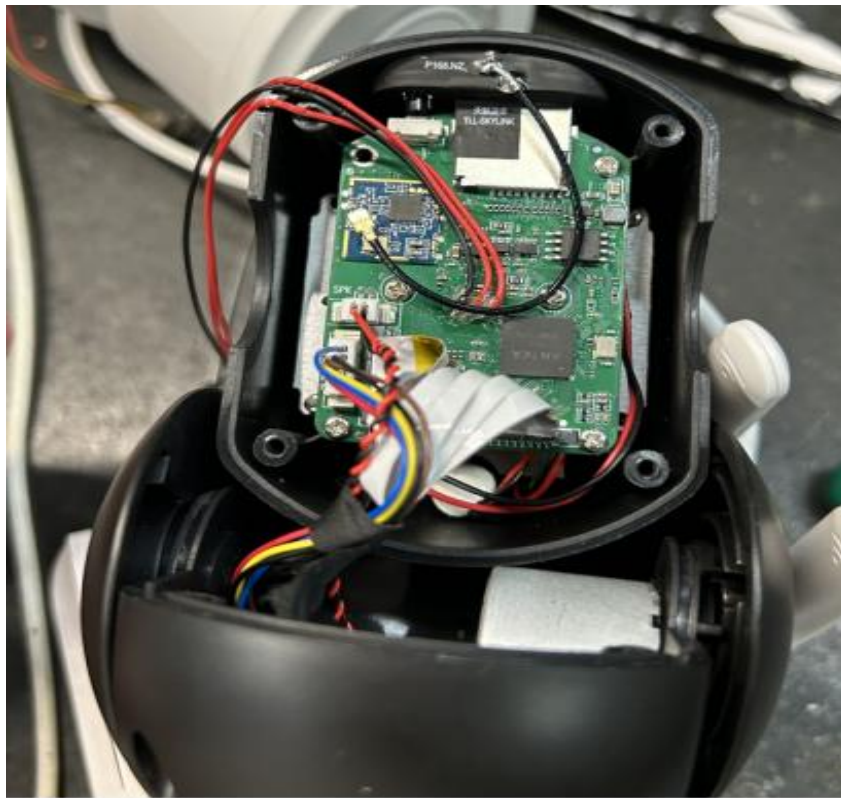

## ◆ Reliability Test

| Test Item |                                    | Test condition                                                                                                                                                                                                                                                                                                                           | Equipment          | Specification                                                                    | Result |
|-----------|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------------------------------------------------------------|--------|
| 1         | Low Temp. Storage Test             | <p>Temperature: -30℃ , Time:48hrs</p> <p>Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃,test antenna after 2 hours.</p>                                         | Temp.&Humi. Tester | <p>No material deformation is allowed.</p> <p>Electronic Performance is ok .</p> | PASS   |
| 2         | High Temp./High Humid Storage Test | <p>Temperature: 85℃ Humidity: 85% RH Time:48hrs</p> <p>Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃,test antenna after 2 hours.</p> | Temp.&Humi. Tester | <p>No material deformation is allowed.</p> <p>Electronic Performance is ok .</p> | PASS   |
| 3         | Salt-Spray 6 pray Test             | <p>Placing antenna in the Salt-Spray Tester ,set the test condition , Temp: <math>35\pm 2^{\circ}\text{C}</math> Humidity: 85% NaCl salt spray :<math>5\pm 1\%</math>.PH value :6.5~7.2 Test time:24hours</p>                                                                                                                            | Salt-Spray Tester  | <p>No color change</p> <p>No appear rusting</p>                                  | PASS   |