

## TEST REPORT

<b>Product</b>	: LED Floodlight
<b>Trade mark</b>	: N/A
<b>Model/Type reference</b>	: D100WIFI,G50WIFI,D30WIFI
<b>Test Model No.</b>	: D100WIFI
<b>Serial Number</b>	: N/A
<b>Report Number</b>	: EED32N81242502
<b>FCC ID</b>	: 2A3W8D100WIFI
<b>Date of Issue</b>	: Jan. 11, 2022
<b>Test Standards</b>	: 47 CFR Part 15 Subpart C
<b>Test result</b>	: PASS

Prepared for:

**Shen Zhen Shi Meng Zhi Tu Ke Ji You Xian Gong Si**  
**Qian Wan yi lu 1 hao A dong 201 shi, qian hai shen gang he zuo qu,**  
**shen zhen,518000 guang dong, China**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Compiled by:

Frazer. Li

Reviewed by:

Aaron Ma

Approved by:

Frazer Li

David Wang

David Wang

Aaron Ma

Date of issue:

Jan. 11, 2022

Check No.:5536231121



## 1 Content

<b>1 CONTENT.....</b>	<b>2</b>
<b>2 VERSION.....</b>	<b>3</b>
<b>3 TEST SUMMARY.....</b>	<b>4</b>
<b>4 GENERAL INFORMATION.....</b>	<b>5</b>
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF EUT.....	5
4.3 TEST CONFIGURATION.....	7
4.4 TEST ENVIRONMENT.....	7
4.5 DESCRIPTION OF SUPPORT UNITS.....	8
4.6 TEST LOCATION.....	8
4.7 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	8
<b>5 EQUIPMENT LIST.....</b>	<b>9</b>
5.1 ANTENNA REQUIREMENT.....	11
5.2 AC POWER LINE CONDUCTED EMISSIONS.....	12
5.3 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS.....	15
<b>PHOTOGRAPHS OF TEST SETUP.....</b>	<b>42</b>
<b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....</b>	<b>44</b>

**2 Version**

Version No.	Date	Description
00	Jan. 11, 2022	Original

### 3 Test Summary

Test Item	Test Requirement	Result
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	PASS
<b>DTS Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	Note
<b>Maximum Conducted Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	Note
<b>Maximum Power Spectral Density</b>	47 CFR Part 15 Subpart C Section 15.247 (e)	Note
<b>Band edge measurements</b>	47 CFR Part 15 Subpart C Section 15.247(d)	Note
<b>Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)	Note
<b>Radiated Spurious Emission &amp; Restricted bands</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	PASS

Remark:

1. Note: Refer to the report of 709502102915-00,

This test report (Ref. No.: EED32N81242501) is only valid with the original test report (Ref. No.: 709502102915-00).

Review this report and original report, the module without changes in circuit and product function, therefore in this report the Radiated Spurious Emission were retested and shown the data in this report, other tests data please refer to original report No. 709502102915-00.

2. Company Name and Address shown on Report, the sample(s) and sample Information were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

3. Model No.: D100WIFI, G50WIFI, D30WIFI

Only the model D100WIFI was tested. Their electrical circuit design, layout, components used and internal wiring are identical. Only the difference in circuit design: D100WIFI, G50WIFI and D30WIFI all use the same linear constant current IC, the same auxiliary power supply, the same Wi-Fi module and the same antenna. The only difference is the difference in the number of linear ICs and LED chips. The greater the power, the more ICs and LED chips used, and the larger the size of the aluminum substrate.

## 4 General Information

### 4.1 Client Information

Applicant:	Shen Zhen Shi Meng Zhi Tuo Ke Ji You Xian Gong Si
Address of Applicant:	Qian Wan yi lu 1 hao A dong 201 shi, qian hai shen gang he zuo qu, shen zhen,518000 guang dong, China
Manufacturer:	Shen Zhen Shi Meng Zhi Tuo Ke Ji You Xian Gong Si
Address of Manufacturer:	Qian Wan yi lu 1 hao A dong 201 shi, qian hai shen gang he zuo qu, shen zhen,518000 guang dong, China
Factory:	Shen Zhen Shi Meng Zhi Tuo Ke Ji You Xian Gong Si
Address of Factory:	Qian Wan yi lu 1 hao A dong 201 shi, qian hai shen gang he zuo qu, shen zhen,518000 guang dong, China

### 4.2 General Description of EUT

Product Name:	LED Floodlight
Model No.:	D100WIFI,G50WIFI,D30WIFI
Trade mark:	N/A
Product Type:	<input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fix Location
Operation Frequency:	IEEE 802.11b/g/n(HT20 and HT40): 2412MHz to 2462MHz
Modulation Type:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM,QPSK,BPSK)
Number of Channel:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Antenna Type:	Internal antenna
Antenna Gain:	5dBi
Power Supply:	AC 100-120V~60Hz 750mA
Test Voltage:	AC 120V~60Hz 750mA
Sample Received Date:	Nov. 24, 2021
Sample tested Date:	Nov. 24, 2021 to Dec. 24, 2021

Operation Frequency each of channel (802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel (802.11n HT40)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz
4	2427MHz	7	2442MHz		
5	2432MHz	8	2447MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/g/n (HT20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The highest channel	2462MHz

802.11n (HT40)

Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The highest channel	2452MHz

### 4.3 Test Configuration

<b>EUT Test Software Settings:</b>	
Software:	Wifi Test Tool v1.6.0
EUT Power Grade:	Default
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.	
<b>Test Mode:</b>	
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
<b>Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.</b>	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	6.5Mbps
802.11n(HT40)	13.5Mbps
According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup" 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(HT20) and 6.5Mbps for 802.11n(HT40).	

### 4.4 Test Environment

<b>Operating Environment:</b>	
<b>Radiated Spurious Emissions:</b>	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
<b>Conducted Emissions:</b>	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar

## 4.5 Description of Support Units

The EUT has been tested with associated equipment below.

Associated equipment name	Manufacture	model	S/N serial number	Supplied by	Certification	
AE1	Netbook	DELL	Latitude 3490	/	CTI	FCC&CE
AE2	Phone	XIAOMI	MI 6X	/	CTI	FCC&CE

## 4.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

## 4.7 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

## 5 Equipment List

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-15-2021	04-14-2022
Temperature/ Humidity Indicator	Defu	TH128	/	---	---
LISN	R&S	ENV216	100098	03-04-2021	03-03-2022
Barometer	changchun	DYM3	1188	---	---

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	05-16-2021	05-15-2022
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-15-2021	04-14-2024
Receiver	R&S	ESCI7	100938-003	10-16-2020 10-15-2021	10-15-2021 10-14-2022
Multi device Controller	maturo	NCD/070/10711 112	---	---	---
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	06-24-2021	06-23-2022
Communication test set	Agilent	E5515C	GB47050534	03-01-2019	02-28-2022
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	03-04-2021	03-03-2022
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-04-2021	03-03-2022
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-04-2021	03-03-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-28-2021	04-27-2024
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-15-2021	04-14-2024
Communication Antenna	Schwarzbeck	CLSA 0110L	1014	---	---
Horn Antenna	ETS-LINDGREN	3117	57407	07-04-2021	07-03-2024
Preamplifier	EMCI	EMC184055SE	980596	05-20-2021	05-19-2022
Communication test set	R&S	CMW500	102898	12-31-2020	12-30-2021
Preamplifier	EMCI	EMC001330	980563	04-21-2021	04-20-2022
Preamplifier	JS Tonscend	980380	EMC051845 SE	12-31-2020	12-30-2021
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-16-2021	04-15-2022
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2021	01-08-2024
Filter bank	JS Tonscend	JS0806-F	188060094	04-09-2021	04-08-2024
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

## Test results and Measurement Data

### 5.1 Antenna Requirement


<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
<b>EUT Antenna:</b>	Please see Internal photos
The antenna is Internal antenna. The best case gain of the antenna is 5dBi.	

## 5.2 AC Power Line Conducted Emissions

**Measurement Data**

Live line:

80.0 dBuV

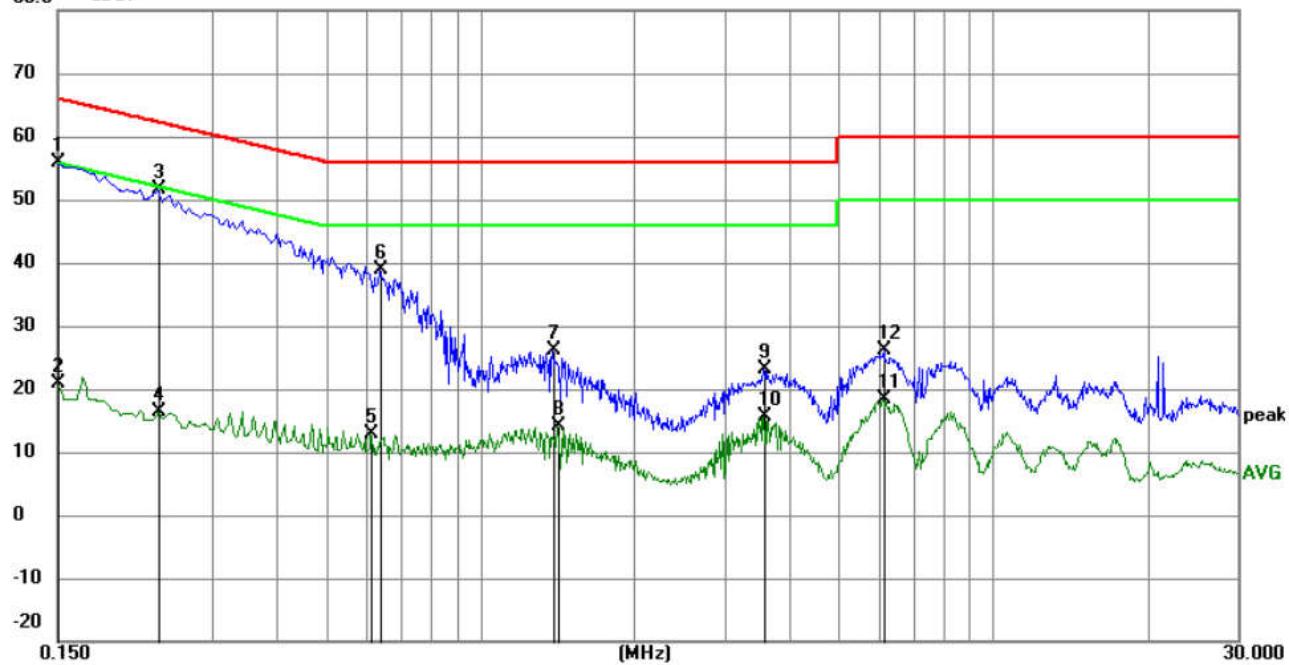


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dB			
1	*	0.1500	46.04	9.87	55.91	66.00	-10.09	peak	
2		0.1500	11.08	9.87	20.95	56.00	-35.05	AVG	
3		0.2355	41.67	9.94	51.61	62.25	-10.64	peak	
4		0.2355	6.42	9.94	16.36	52.25	-35.89	AVG	
5		0.6134	2.93	10.04	12.97	46.00	-33.03	AVG	
6		0.6405	28.93	9.99	38.92	56.00	-17.08	peak	
7		1.3829	16.20	9.81	26.01	56.00	-29.99	peak	
8		1.4144	4.29	9.81	14.10	46.00	-31.90	AVG	
9		3.5790	13.45	9.78	23.23	56.00	-32.77	peak	
10		3.5790	5.85	9.78	15.63	46.00	-30.37	AVG	
11		6.1035	8.66	9.79	18.45	50.00	-31.55	AVG	
12		6.1395	16.24	9.79	26.03	60.00	-33.97	peak	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

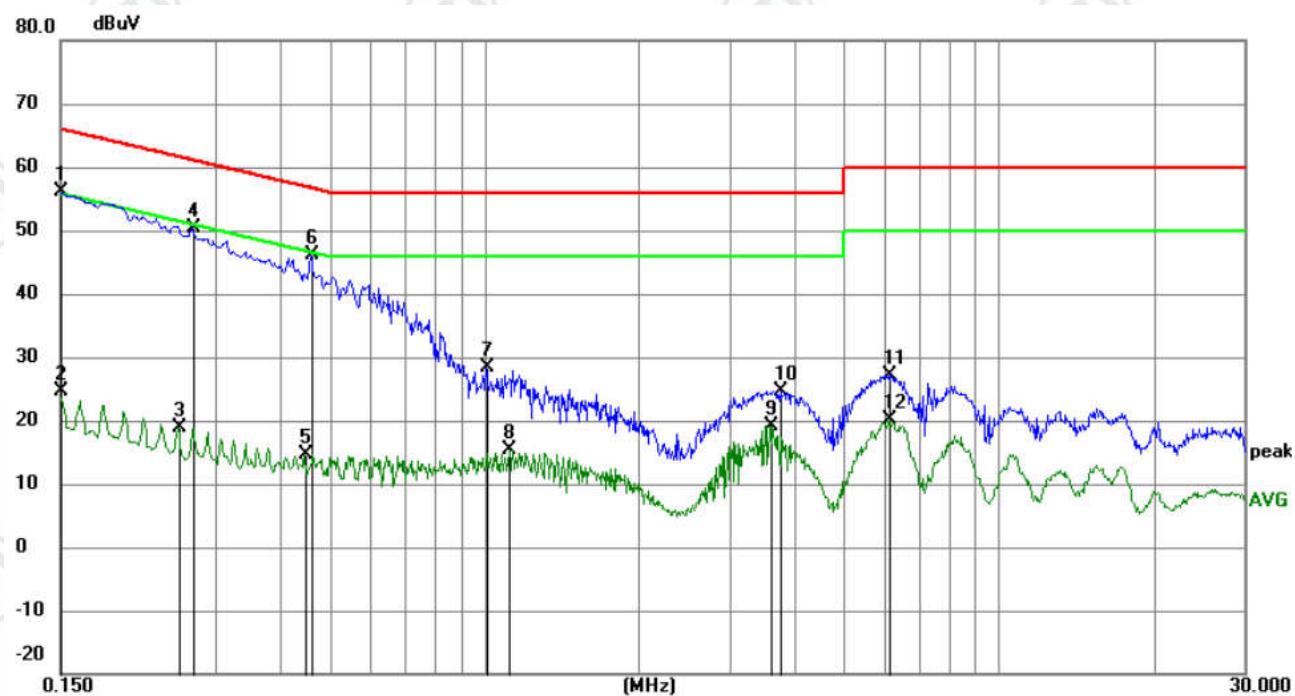

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1500	46.14	9.87	56.01	66.00	-9.99	peak	
2		0.1500	14.80	9.87	24.67	56.00	-31.33	AVG	
3		0.2535	8.78	9.98	18.76	51.64	-32.88	AVG	
4		0.2701	40.34	10.01	50.35	61.11	-10.76	peak	
5		0.4468	4.64	9.96	14.60	46.93	-32.33	AVG	
6		0.4588	36.17	9.96	46.13	56.71	-10.58	peak	
7		1.0050	18.44	9.83	28.27	56.00	-27.73	peak	
8		1.1173	5.52	9.83	15.35	46.00	-30.65	AVG	
9		3.6225	9.28	9.78	19.06	46.00	-26.94	AVG	
10		3.7594	14.94	9.78	24.72	56.00	-31.28	peak	
11		6.1209	17.44	9.79	27.23	60.00	-32.77	peak	
12		6.1209	10.38	9.79	20.17	50.00	-29.83	AVG	



Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

### 5.3 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

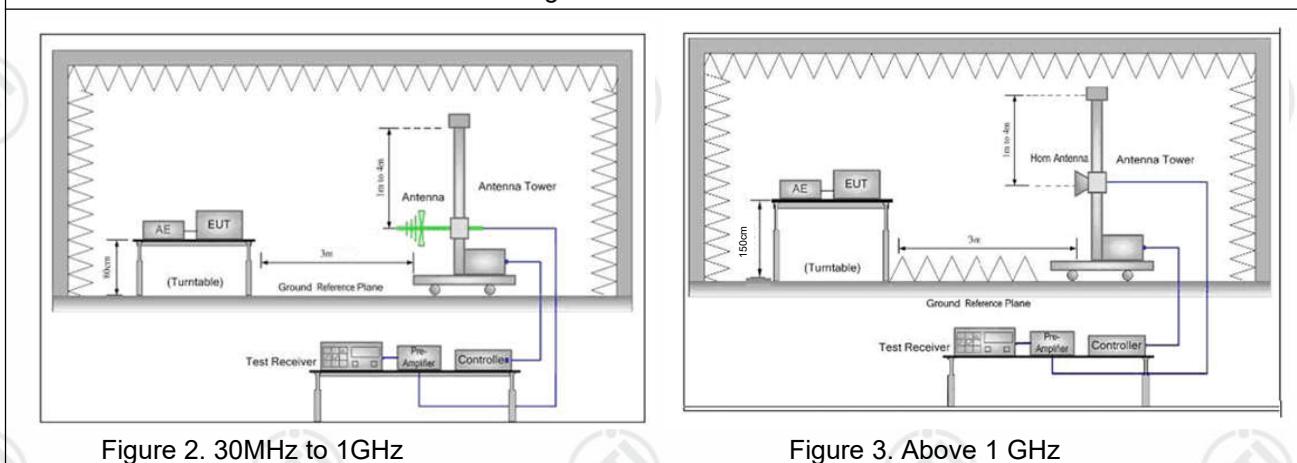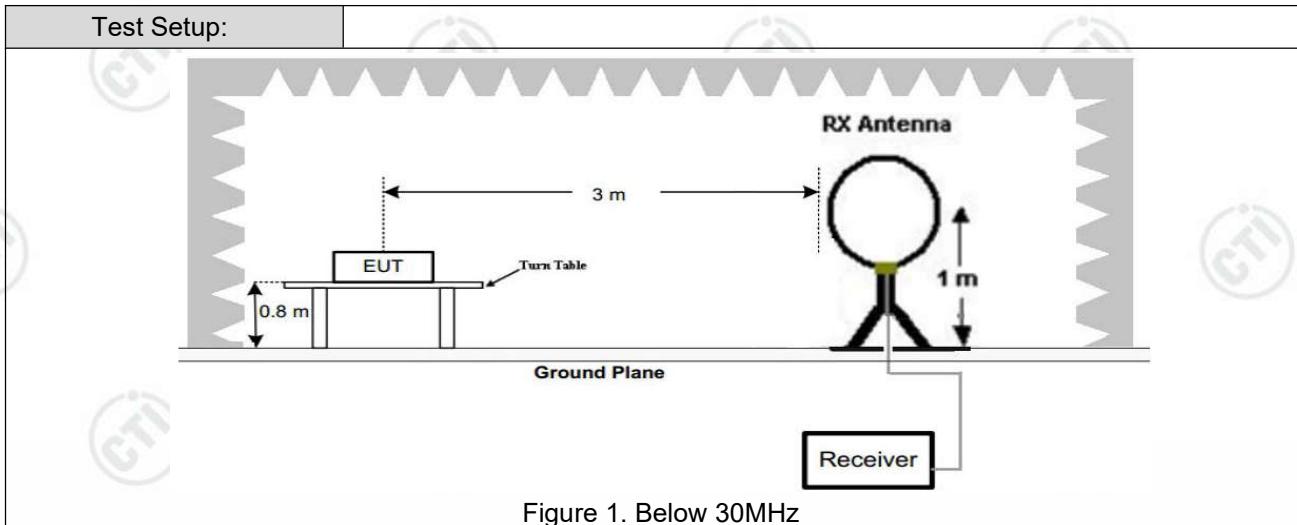


Test Procedure:	<p>a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>Note: For the radiated emission test above 1GHz:</p> <p>Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Test Mode:	Refer to clause 5.3
Test Results:	Pass

## Radiated Spurious Emission below 1GHz:


During the test, the Radiated Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel of 1Mbps for 802.11b was recorded in the report.

### Test Graph

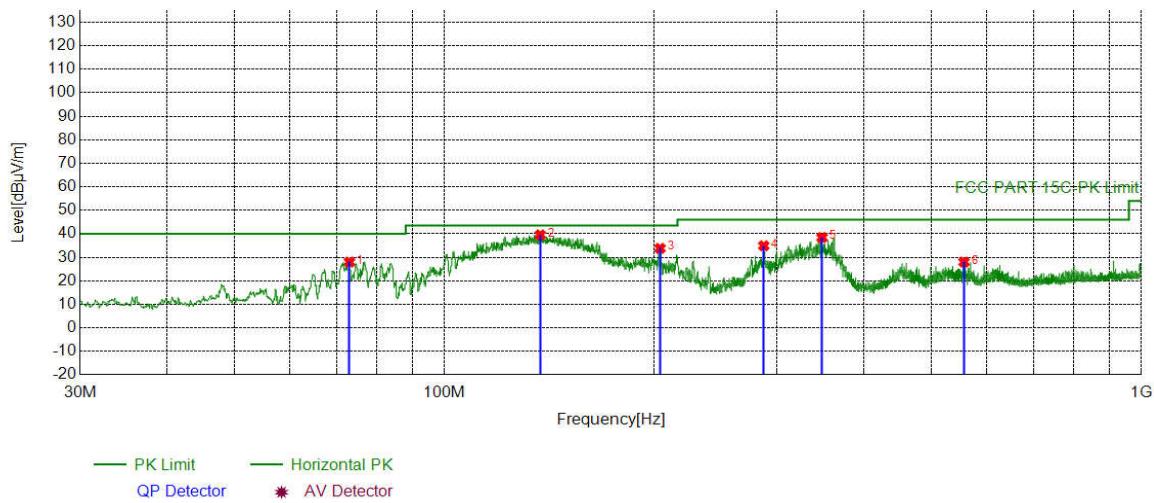

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	73.0723	-21.34	49.33	27.99	40.00	12.01	PASS	Horizontal	Peak
2	137.2927	-21.91	61.45	39.54	43.50	3.96	PASS	Horizontal	Peak
3	203.9384	-17.75	51.57	33.82	43.50	9.68	PASS	Horizontal	Peak
4	287.2697	-15.78	50.69	34.91	46.00	11.09	PASS	Horizontal	Peak
5	348.2888	-14.13	52.56	38.43	46.00	7.57	PASS	Horizontal	Peak
6	556.7627	-9.64	37.64	28.00	46.00	18.00	PASS	Horizontal	Peak

Test Graph

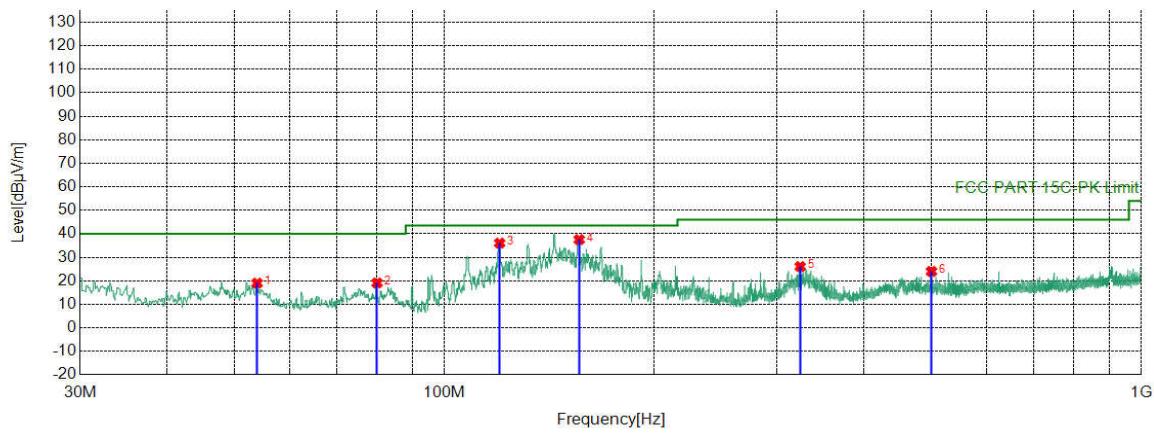

NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	53.8644	-17.69	36.70	19.01	40.00	20.99	PASS	Vertical	Peak
2	80.0570	-22.55	41.63	19.08	40.00	20.92	PASS	Vertical	Peak
3	120.0250	-20.08	56.12	36.04	43.50	7.46	PASS	Vertical	Peak
4	156.1126	-21.34	58.87	37.53	43.50	5.97	PASS	Vertical	Peak
5	324.0364	-14.85	40.92	26.07	46.00	19.93	PASS	Vertical	Peak
6	500.0120	-10.88	34.88	24.00	46.00	22.00	PASS	Vertical	Peak

**Radiated Spurious Emission above 1GHz:**

Mode:			802.11 b Transmitting			Channel:		2412MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1280.8281	1.01	43.02	44.03	74.00	29.97	PASS	H	PK
2	1692.6693	2.89	41.55	44.44	74.00	29.56	PASS	H	PK
3	5322.1548	-14.75	54.16	39.41	74.00	34.59	PASS	H	PK
4	7730.3154	-11.14	53.67	42.53	74.00	31.47	PASS	H	PK
5	10298.4866	-6.47	51.06	44.59	74.00	29.41	PASS	H	PK
6	14397.7599	1.18	48.54	49.72	74.00	24.28	PASS	H	PK
7	1144.8145	0.83	42.91	43.74	74.00	30.26	PASS	V	PK
8	1765.0765	3.16	42.20	45.36	74.00	28.64	PASS	V	PK
9	4263.0842	-17.52	67.72	50.20	74.00	23.80	PASS	V	PK
10	6636.2424	-12.70	55.46	42.76	74.00	31.24	PASS	V	PK
11	9266.4178	-7.93	52.56	44.63	74.00	29.37	PASS	V	PK
12	11825.5884	-6.04	52.12	46.08	74.00	27.92	PASS	V	PK

Mode:			802.11 b Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1264.8265	0.97	42.43	43.40	74.00	30.60	PASS	H	PK
2	1679.2679	2.81	41.62	44.43	74.00	29.57	PASS	H	PK
3	4830.1220	-16.22	55.28	39.06	74.00	34.94	PASS	H	PK
4	7631.3088	-11.16	54.27	43.11	74.00	30.89	PASS	H	PK
5	10350.4900	-6.37	51.19	44.82	74.00	29.18	PASS	H	PK
6	13735.7157	-1.72	50.07	48.35	74.00	25.65	PASS	H	PK
7	1462.4462	1.44	42.38	43.82	74.00	30.18	PASS	V	PK
8	1891.4891	3.97	41.08	45.05	74.00	28.95	PASS	V	PK
9	4247.0831	-17.65	59.88	42.23	74.00	31.77	PASS	V	PK
10	6375.2250	-12.87	53.53	40.66	74.00	33.34	PASS	V	PK
11	9747.4498	-7.55	51.80	44.25	74.00	29.75	PASS	V	PK
12	13318.6879	-3.33	50.35	47.02	74.00	26.98	PASS	V	PK

Mode:			802.11 b Transmitting			Channel:		2462MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1238.6239	0.90	42.60	43.50	74.00	30.50	PASS	H	PK
2	1791.0791	3.25	42.30	45.55	74.00	28.45	PASS	H	PK
3	3811.0541	-19.22	56.76	37.54	74.00	36.46	PASS	H	PK
4	6476.2317	-12.73	53.82	41.09	74.00	32.91	PASS	H	PK
5	9848.4566	-7.23	53.65	46.42	74.00	27.58	PASS	H	PK
6	12352.6235	-5.18	51.23	46.05	74.00	27.95	PASS	H	PK
7	1249.4249	0.93	42.63	43.56	74.00	30.44	PASS	V	PK
8	1655.0655	2.65	41.99	44.64	74.00	29.36	PASS	V	PK
9	4257.0838	-17.57	60.91	43.34	74.00	30.66	PASS	V	PK
10	6391.2261	-12.87	56.66	43.79	74.00	30.21	PASS	V	PK
11	9248.4166	-7.91	52.02	44.11	74.00	29.89	PASS	V	PK
12	12789.6526	-4.25	51.43	47.18	74.00	26.82	PASS	V	PK

Mode:			802.11 g Transmitting			Channel:		2412MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1330.0330	1.16	43.19	44.35	74.00	29.65	PASS	H	PK
2	1747.4747	3.10	41.58	44.68	74.00	29.32	PASS	H	PK
3	4250.0833	-17.62	57.55	39.93	74.00	34.07	PASS	H	PK
4	5991.1994	-13.02	53.73	40.71	74.00	33.29	PASS	H	PK
5	9214.4143	-7.89	51.35	43.46	74.00	30.54	PASS	H	PK
6	12577.6385	-4.27	50.85	46.58	74.00	27.42	PASS	H	PK
7	1267.2267	0.97	42.85	43.82	74.00	30.18	PASS	V	PK
8	1788.6789	3.24	41.30	44.54	74.00	29.46	PASS	V	PK
9	4254.0836	-17.59	67.17	49.58	74.00	24.42	PASS	V	PK
10	6661.2441	-12.62	57.83	45.21	74.00	28.79	PASS	V	PK
11	8528.3686	-10.49	56.35	45.86	74.00	28.14	PASS	V	PK
12	12491.6328	-4.82	51.42	46.60	74.00	27.40	PASS	V	PK

Mode:			802.11 g Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1235.0235	0.89	44.42	45.31	74.00	28.69	PASS	H	PK
2	1781.0781	3.22	41.82	45.04	74.00	28.96	PASS	H	PK
3	4260.0840	-17.55	55.39	37.84	74.00	36.16	PASS	H	PK
4	6312.2208	-12.91	54.00	41.09	74.00	32.91	PASS	H	PK
5	9817.4545	-7.33	52.67	45.34	74.00	28.66	PASS	H	PK
6	15400.8267	0.52	48.75	49.27	74.00	24.73	PASS	H	PK
7	1296.0296	1.05	42.39	43.44	74.00	30.56	PASS	V	PK
8	1930.4930	4.19	40.85	45.04	74.00	28.96	PASS	V	PK
9	4269.0846	-17.47	58.48	41.01	74.00	32.99	PASS	V	PK
10	6388.2259	-12.87	56.65	43.78	74.00	30.22	PASS	V	PK
11	8518.3679	-10.51	56.22	45.71	74.00	28.29	PASS	V	PK
12	12469.6313	-4.79	52.09	47.30	74.00	26.70	PASS	V	PK

Mode:			802.11 g Transmitting			Channel:		2462MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1307.8308	1.09	42.15	43.24	74.00	30.76	PASS	H	PK
2	1755.4755	3.13	41.24	44.37	74.00	29.63	PASS	H	PK
3	4219.0813	-17.87	56.14	38.27	74.00	35.73	PASS	H	PK
4	6814.2543	-12.33	53.07	40.74	74.00	33.26	PASS	H	PK
5	10347.4898	-6.37	51.51	45.14	74.00	28.86	PASS	H	PK
6	13769.7180	-1.67	49.94	48.27	74.00	25.73	PASS	H	PK
7	1319.8320	1.13	42.28	43.41	74.00	30.59	PASS	V	PK
8	1972.8973	4.41	40.82	45.23	74.00	28.77	PASS	V	PK
9	4259.0839	-17.55	70.65	53.10	74.00	20.90	PASS	V	PK
10	7154.2770	-11.72	53.18	41.46	74.00	32.54	PASS	V	PK
11	9847.4565	-7.23	51.62	44.39	74.00	29.61	PASS	V	PK
12	13712.7142	-1.75	50.58	48.83	74.00	25.17	PASS	V	PK

Mode:			802.11 n(HT20) Transmitting			Channel:		2412MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1295.6296	1.05	42.46	43.51	74.00	30.49	PASS	H	PK
2	1665.6666	2.72	42.01	44.73	74.00	29.27	PASS	H	PK
3	5042.1361	-15.76	54.46	38.70	74.00	35.30	PASS	H	PK
4	7372.2915	-11.56	53.36	41.80	74.00	32.20	PASS	H	PK
5	11793.5862	-6.12	52.56	46.44	74.00	27.56	PASS	H	PK
6	15349.8233	-0.06	49.32	49.26	74.00	24.74	PASS	H	PK
7	1326.0326	1.15	42.25	43.40	74.00	30.60	PASS	V	PK
8	1653.6654	2.64	41.57	44.21	74.00	29.79	PASS	V	PK
9	4257.0838	-17.57	60.07	42.50	74.00	31.50	PASS	V	PK
10	5984.1989	-13.06	55.76	42.70	74.00	31.30	PASS	V	PK
11	8500.3667	-10.55	54.37	43.82	74.00	30.18	PASS	V	PK
12	11891.5928	-5.85	52.31	46.46	74.00	27.54	PASS	V	PK

Mode:			802.11 n(HT20) Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1305.8306	1.08	42.31	43.39	74.00	30.61	PASS	H	PK
2	1763.4763	3.16	41.18	44.34	74.00	29.66	PASS	H	PK
3	4259.0839	-17.55	58.44	40.89	74.00	33.11	PASS	H	PK
4	6903.2602	-11.83	53.16	41.33	74.00	32.67	PASS	H	PK
5	9175.4117	-8.08	52.00	43.92	74.00	30.08	PASS	H	PK
6	14400.7601	1.21	48.44	49.65	74.00	24.35	PASS	H	PK
7	1160.8161	0.82	42.45	43.27	74.00	30.73	PASS	V	PK
8	1733.6734	3.05	41.48	44.53	74.00	29.47	PASS	V	PK
9	4248.0832	-17.64	57.32	39.68	74.00	34.32	PASS	V	PK
10	5710.1807	-13.88	54.12	40.24	74.00	33.76	PASS	V	PK
11	8512.3675	-10.53	55.59	45.06	74.00	28.94	PASS	V	PK
12	10781.5188	-6.27	51.34	45.07	74.00	28.93	PASS	V	PK

Mode:			802.11 n(HT20) Transmitting			Channel:		2462MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1303.8304	1.07	42.19	43.26	74.00	30.74	PASS	H	PK
2	1852.6853	3.68	41.72	45.40	74.00	28.60	PASS	H	PK
3	3783.0522	-19.36	56.50	37.14	74.00	36.86	PASS	H	PK
4	6193.2129	-13.21	53.73	40.52	74.00	33.48	PASS	H	PK
5	9847.4565	-7.23	52.33	45.10	74.00	28.90	PASS	H	PK
6	13772.7182	-1.67	51.30	49.63	74.00	24.37	PASS	H	PK
7	1159.4159	0.82	42.63	43.45	74.00	30.55	PASS	V	PK
8	1794.0794	3.26	41.76	45.02	74.00	28.98	PASS	V	PK
9	5331.1554	-14.73	58.29	43.56	74.00	30.44	PASS	V	PK
10	8206.3471	-10.98	52.58	41.60	74.00	32.40	PASS	V	PK
11	11726.5818	-6.21	51.85	45.64	74.00	28.36	PASS	V	PK
12	14365.7577	0.65	48.52	49.17	74.00	24.83	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2422MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1309.8310	1.09	43.11	44.20	74.00	29.80	PASS	H	PK
2	1762.6763	3.15	41.60	44.75	74.00	29.25	PASS	H	PK
3	4387.0925	-17.07	55.34	38.27	74.00	35.73	PASS	H	PK
4	6626.2417	-12.74	53.38	40.64	74.00	33.36	PASS	H	PK
5	9240.4160	-7.91	52.04	44.13	74.00	29.87	PASS	H	PK
6	14395.7597	1.15	48.30	49.45	74.00	24.55	PASS	H	PK
7	1251.4251	0.93	42.29	43.22	74.00	30.78	PASS	V	PK
8	1668.8669	2.74	41.89	44.63	74.00	29.37	PASS	V	PK
9	4248.0832	-17.64	67.12	49.48	74.00	24.52	PASS	V	PK
10	6568.2379	-12.79	53.21	40.42	74.00	33.58	PASS	V	PK
11	9145.4097	-8.32	52.26	43.94	74.00	30.06	PASS	V	PK
12	12431.6288	-4.73	52.31	47.58	74.00	26.42	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1340.8341	1.19	42.26	43.45	74.00	30.55	PASS	H	PK
2	1661.2661	2.69	41.28	43.97	74.00	30.03	PASS	H	PK
3	4248.0832	-17.64	58.37	40.73	74.00	33.27	PASS	H	PK
4	6324.2216	-12.91	54.78	41.87	74.00	32.13	PASS	H	PK
5	9219.4146	-7.89	53.04	45.15	74.00	28.85	PASS	H	PK
6	12494.6330	-4.82	51.73	46.91	74.00	27.09	PASS	H	PK
7	1194.6195	0.80	42.57	43.37	74.00	30.63	PASS	V	PK
8	1767.4767	3.17	41.57	44.74	74.00	29.26	PASS	V	PK
9	4249.0833	-17.63	57.27	39.64	74.00	34.36	PASS	V	PK
10	5640.1760	-14.13	54.34	40.21	74.00	33.79	PASS	V	PK
11	7963.3309	-11.44	53.02	41.58	74.00	32.42	PASS	V	PK
12	11976.5984	-5.39	51.52	46.13	74.00	27.87	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2452MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1292.2292	1.04	42.39	43.43	74.00	30.57	PASS	H	PK
2	1690.4690	2.88	41.89	44.77	74.00	29.23	PASS	H	PK
3	4658.1105	-16.63	54.82	38.19	74.00	35.81	PASS	H	PK
4	6917.2612	-11.83	52.93	41.10	74.00	32.90	PASS	H	PK
5	9807.4538	-7.36	51.51	44.15	74.00	29.85	PASS	H	PK
6	13674.7116	-1.73	49.92	48.19	74.00	25.81	PASS	H	PK
7	1236.8237	0.90	42.60	43.50	74.00	30.50	PASS	V	PK
8	1783.2783	3.22	41.57	44.79	74.00	29.21	PASS	V	PK
9	4821.1214	-16.22	54.69	38.47	74.00	35.53	PASS	V	PK
10	6957.2638	-11.82	53.30	41.48	74.00	32.52	PASS	V	PK
11	9808.4539	-7.35	51.75	44.40	74.00	29.60	PASS	V	PK
12	14326.7551	0.00	48.82	48.82	74.00	25.18	PASS	V	PK

## Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Factor}$$


$$\text{Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

### Restricted bands:

### Test plot as follows:

Mode:	802.11 b Transmitting	Channel:	2412
Remark:			


### Test Graph

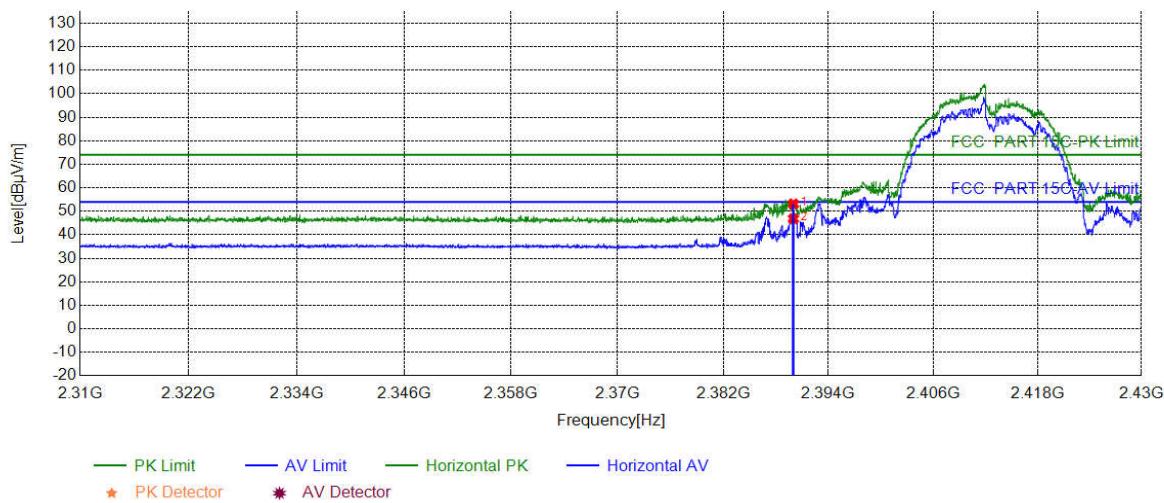

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	47.37	53.14	74.00	20.86	PASS	Horizontal	PK
2	2390.0000	5.77	41.07	46.84	54.00	7.16	PASS	Horizontal	AV

Mode:	802.11 b Transmitting	Channel:	2412
Remark:			


### Test Graph

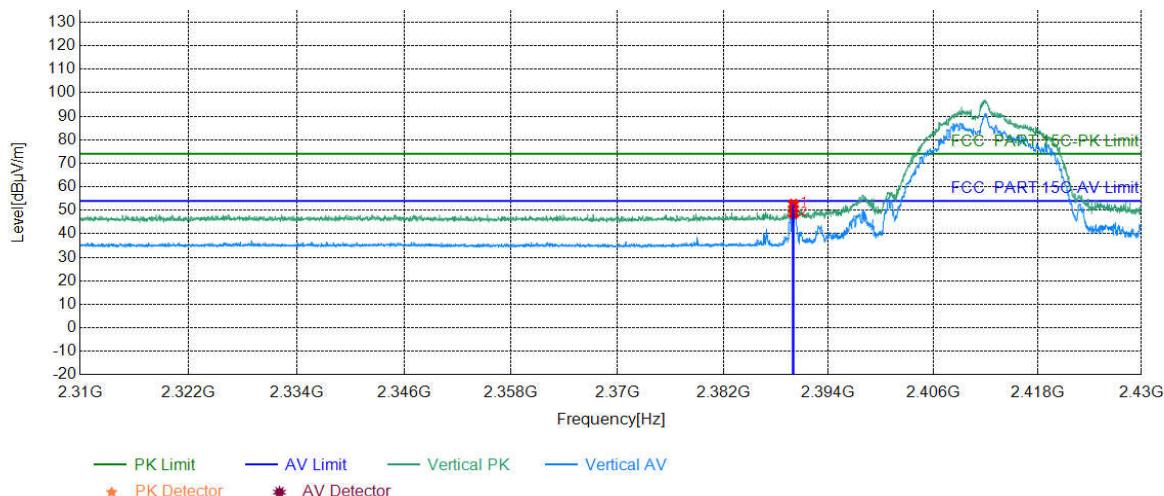

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	46.81	52.58	74.00	21.42	PASS	Vertical	PK
2	2390.0000	5.77	42.83	48.60	54.00	5.40	PASS	Vertical	AV

Mode:	802.11 b Transmitting	Channel:	2462
Remark:			

### Test Graph

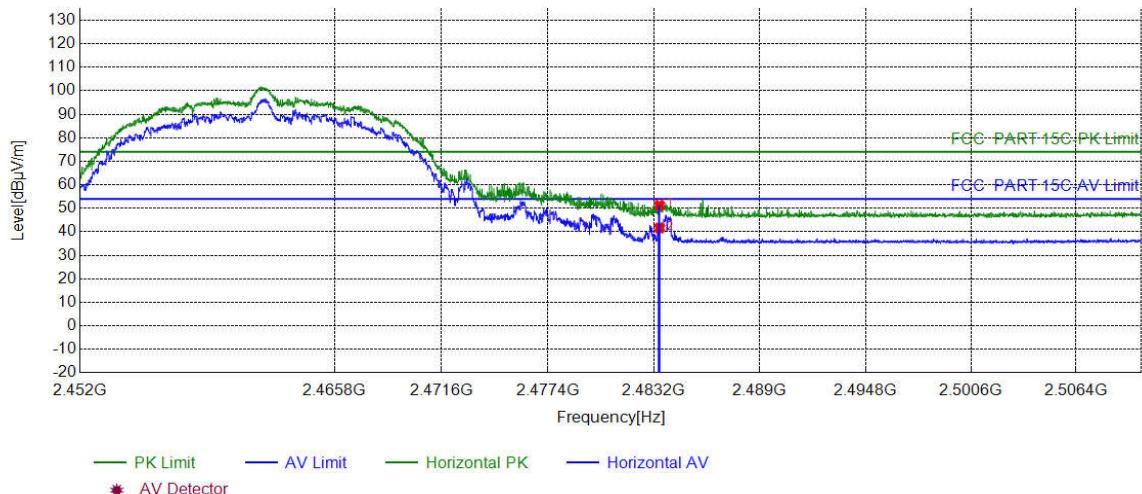


### Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	44.74	51.31	74.00	22.69	PASS	Horizontal	PK
2	2483.5000	6.57	35.06	41.63	54.00	12.37	PASS	Horizontal	AV

Mode:	802.11 b Transmitting	Channel:	2462
Remark:			

### Test Graph

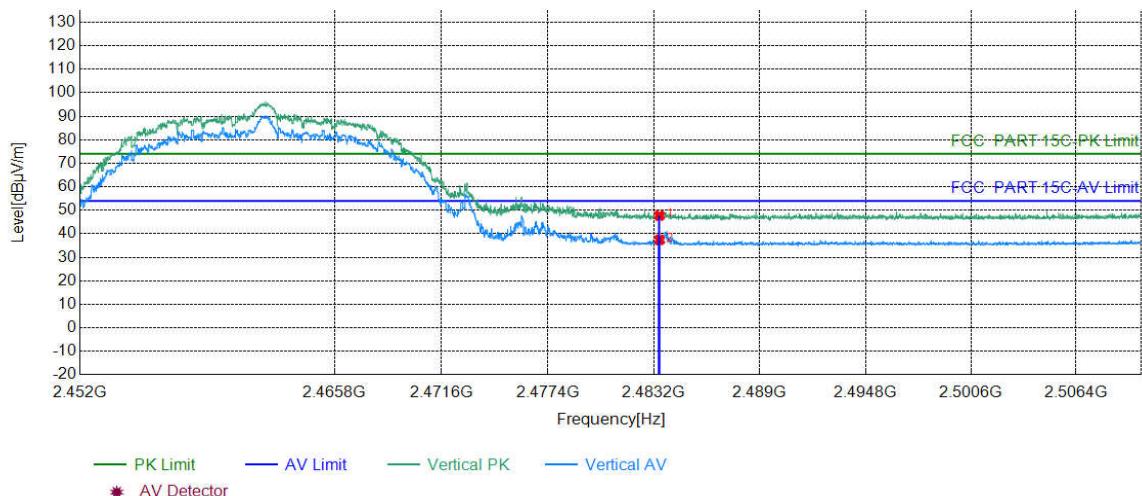


### Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	41.19	47.76	74.00	26.24	PASS	Vertical	PK
2	2483.5000	6.57	30.86	37.43	54.00	16.57	PASS	Vertical	AV

Mode:	802.11 g Transmitting	Channel:	2412
Remark:			

### Test Graph

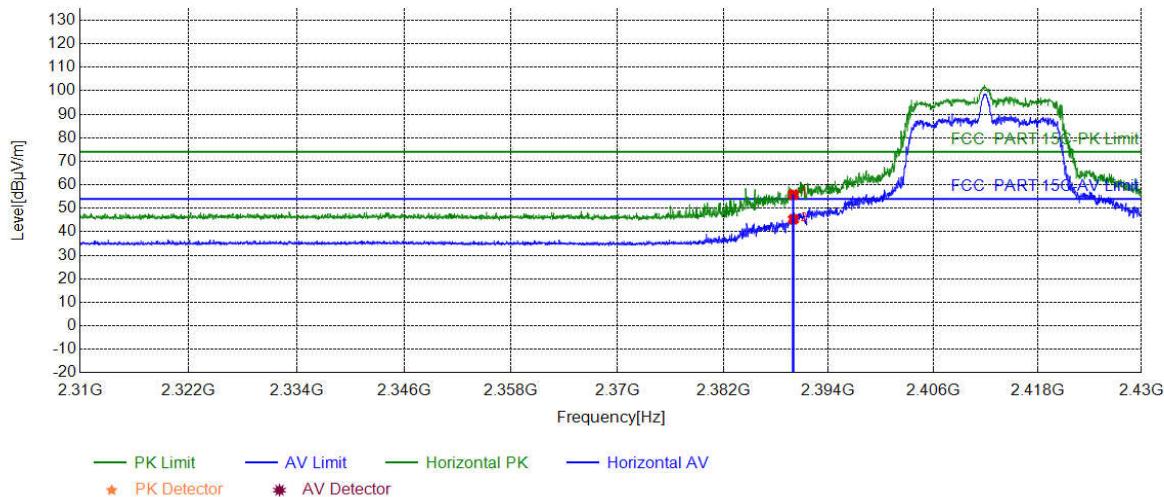


### Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	50.09	55.86	74.00	18.14	PASS	Horizontal	PK
2	2390.0000	5.77	39.57	45.34	54.00	8.66	PASS	Horizontal	AV

Mode:	802.11 g Transmitting	Channel:	2412
Remark:			

### Test Graph

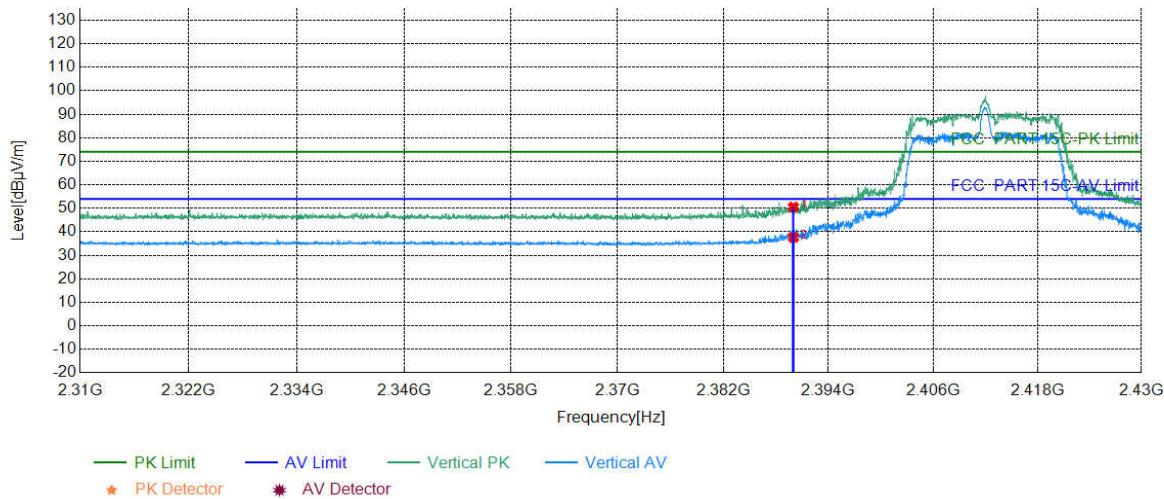


### Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	44.75	50.52	74.00	23.48	PASS	Vertical	PK
2	2390.0000	5.77	31.85	37.62	54.00	16.38	PASS	Vertical	AV

Mode:	802.11 g Transmitting	Channel:	2462
Remark:			

### Test Graph

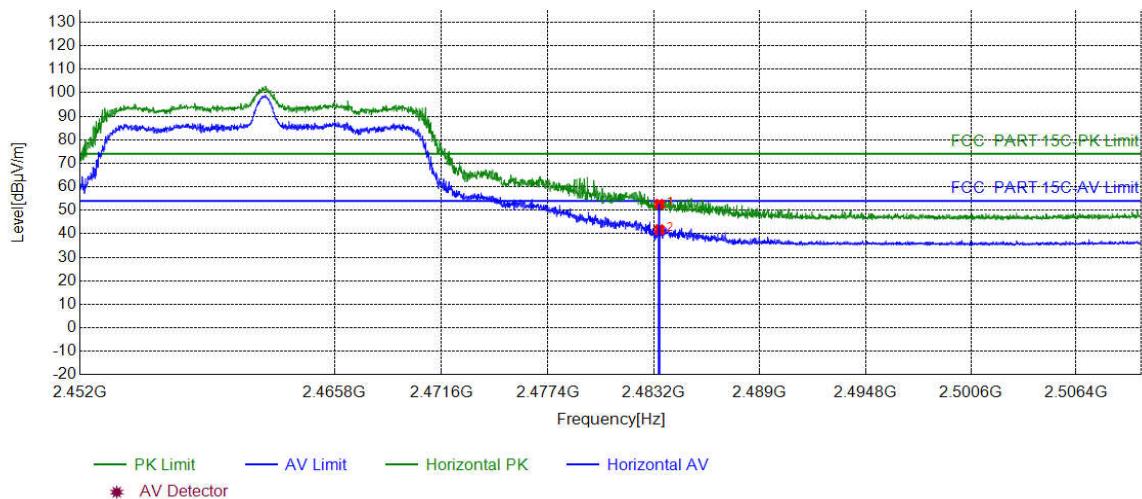


### Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	46.01	52.58	74.00	21.42	PASS	Horizontal	PK
2	2483.5000	6.57	35.19	41.76	54.00	12.24	PASS	Horizontal	AV

Mode:	802.11 g Transmitting	Channel:	2462
Remark:			

### Test Graph

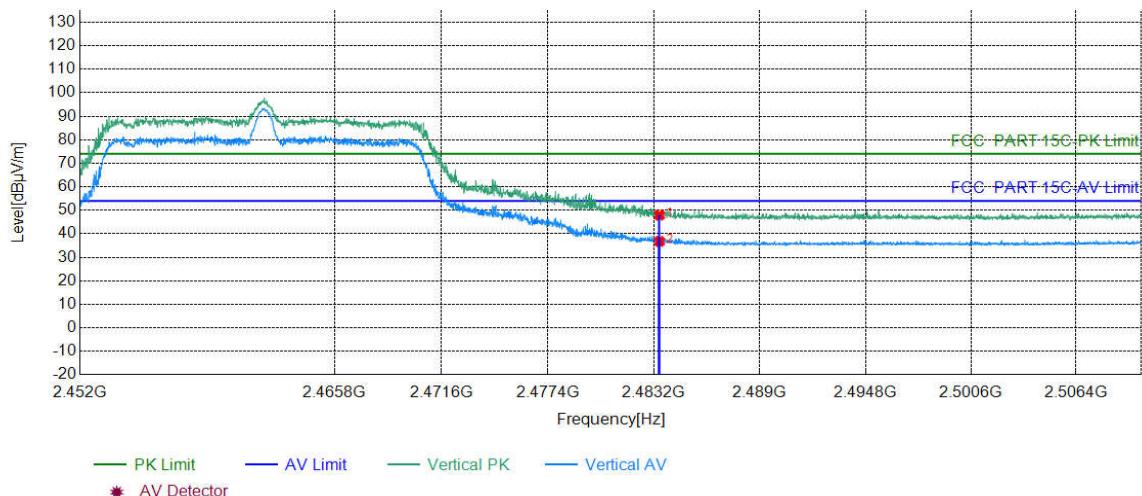


### Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	41.36	47.93	74.00	26.07	PASS	Vertical	PK
2	2483.5000	6.57	30.21	36.78	54.00	17.22	PASS	Vertical	AV

Mode:	802.11 n(HT20) Transmitting	Channel:	2412
Remark:			

### Test Graph

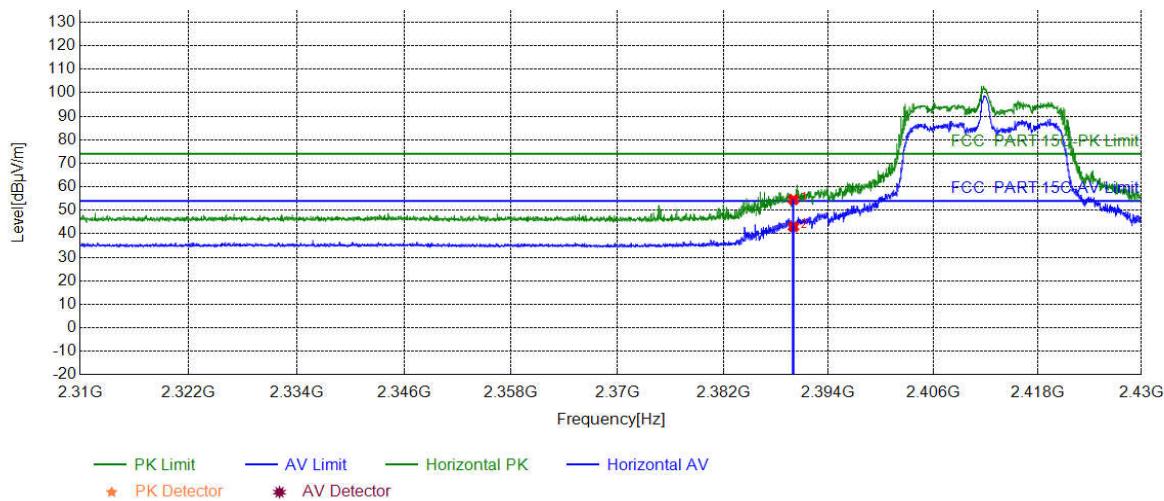


### Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	48.75	54.52	74.00	19.48	PASS	Horizontal	PK
2	2390.0000	5.77	37.24	43.01	54.00	10.99	PASS	Horizontal	AV

Mode:	802.11 n(HT20) Transmitting	Channel:	2412
Remark:			

**Test Graph**

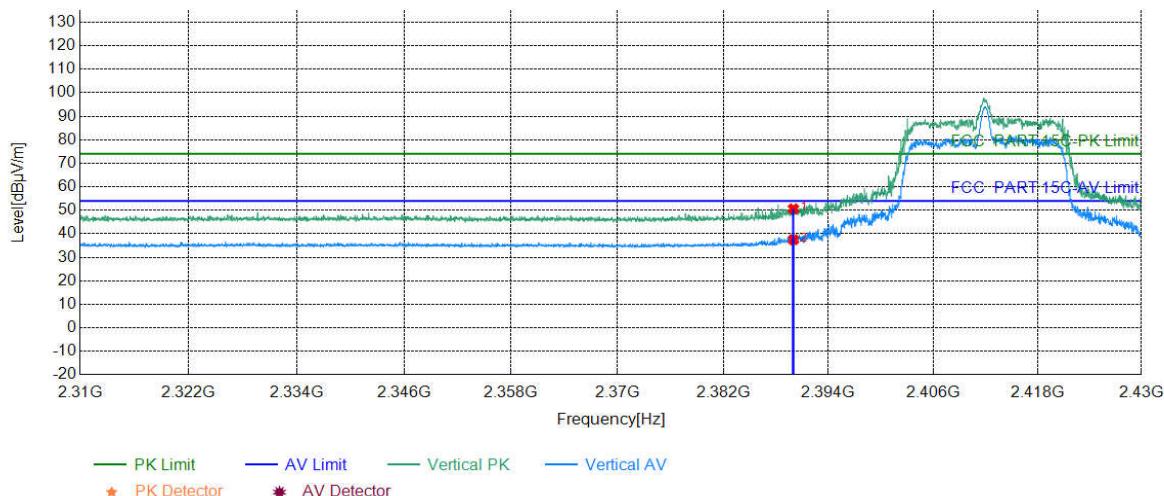


**Suspected List**

NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	44.84	50.61	74.00	23.39	PASS	Vertical	PK
2	2390.0000	5.77	31.69	37.46	54.00	16.54	PASS	Vertical	AV

Mode:	802.11 n(HT20) Transmitting	Channel:	2462
Remark:			

### Test Graph

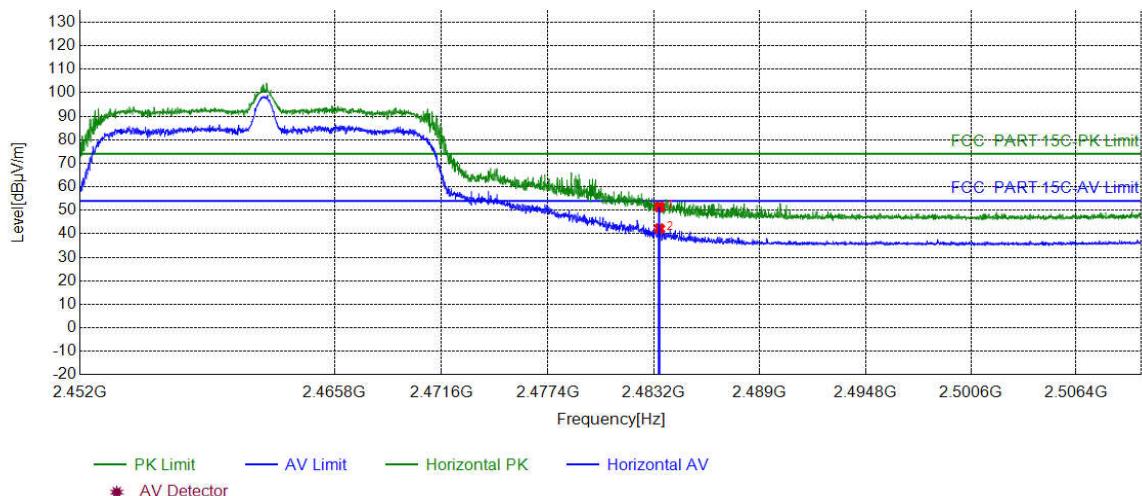


### Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	44.88	51.45	74.00	22.55	PASS	Horizontal	PK
2	2483.5000	6.57	35.62	42.19	54.00	11.81	PASS	Horizontal	AV

Mode:	802.11 n(HT20) Transmitting	Channel:	2462
Remark:			

### Test Graph

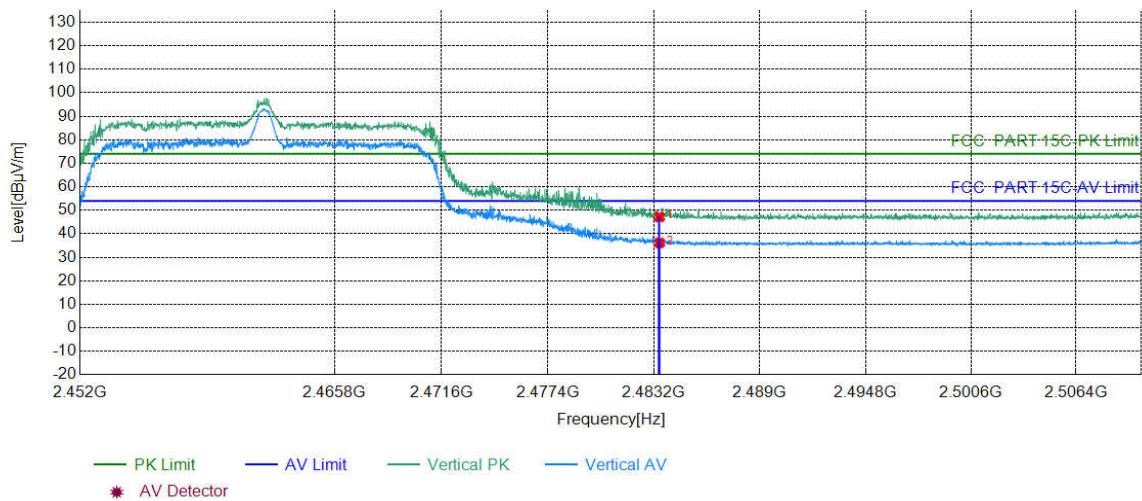


### Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	40.60	47.17	74.00	26.83	PASS	Vertical	PK
2	2483.5000	6.57	29.56	36.13	54.00	17.87	PASS	Vertical	AV

Mode:	802.11 n(HT40) Transmitting	Channel:	2422
Remark:			

### Test Graph

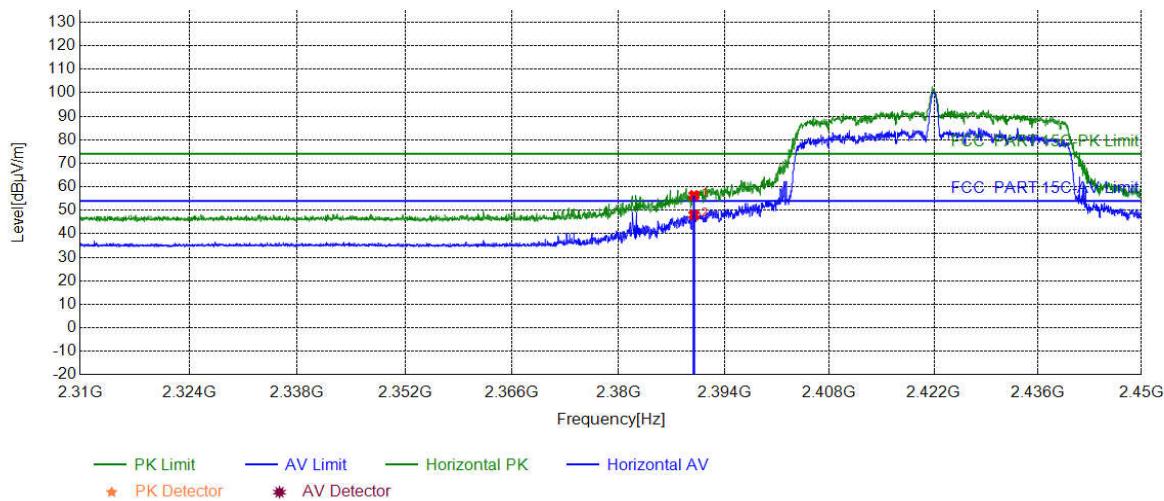


### Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	50.55	56.32	74.00	17.68	PASS	Horizontal	PK
2	2390.0000	5.77	42.27	48.04	54.00	5.96	PASS	Horizontal	AV

Mode:	802.11 n(HT40) Transmitting	Channel:	2422
Remark:			

**Test Graph**

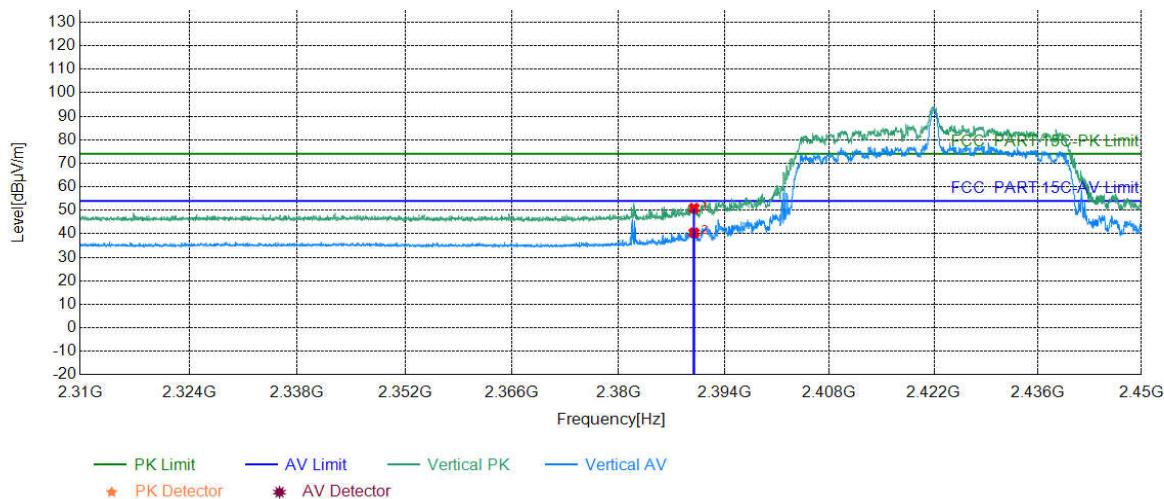


**Suspected List**

NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	45.14	50.91	74.00	23.09	PASS	Vertical	PK
2	2390.0000	5.77	34.67	40.44	54.00	13.56	PASS	Vertical	AV

Mode:	802.11 n(HT40) Transmitting	Channel:	2452
Remark:			

### Test Graph

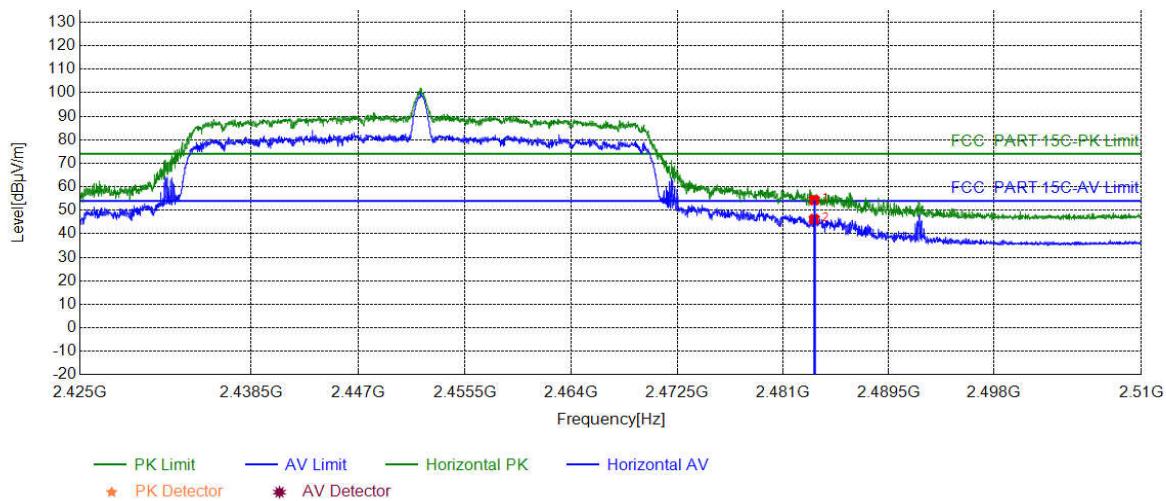


### Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	47.81	54.38	74.00	19.62	PASS	Horizontal	PK
2	2483.5000	6.57	39.65	46.22	54.00	7.78	PASS	Horizontal	AV

Mode:	802.11 n(HT40) Transmitting	Channel:	2452
Remark:			

### Test Graph

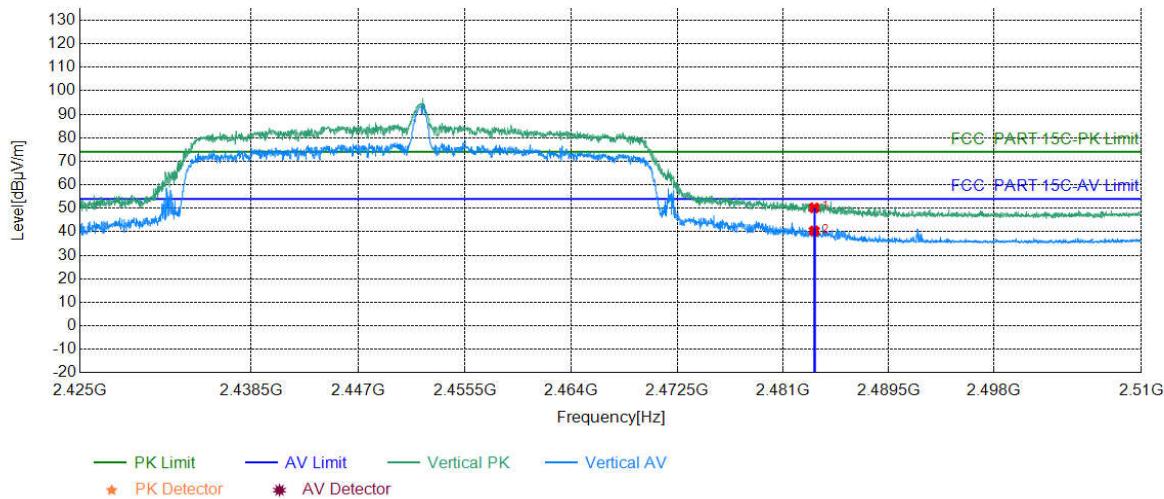

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	43.61	50.18	74.00	23.82	PASS	Vertical	PK
2	2483.5000	6.57	33.78	40.35	54.00	13.65	PASS	Vertical	AV

### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Factor

Factor = Preamplifier Factor - Antenna Factor - Cable Factor