

TEST REPORT

Applicant: Shenzhen Gision Security Technology Co.,Ltd.

Address of Applicant: D302 JingFu Industrial Park, HangKong Road(West), SanWei Community, HangCheng Street, Baoan, Shenzhen, China

Manufacturer/Factory: Shenzhen Gision Security Technology Co.,Ltd.

Address of Manufacturer/Factory: D302 JingFu Industrial Park, HangKong Road(West), SanWei Community, HangCheng Street, Baoan, Shenzhen, China

Equipment Under Test (EUT)

Product Name: 5 channel 4G vehicle monitoring all-in-one DVR

Model No.: P1-4GW, P1, P1-4G, P1-5G, P1-5GW, P2, P2-4G, P2-4GW, P2-5G, P2-5GW, P3, P3-4G, P3-4GW, P3-5G, P3-5GW

Brand: VSSTECH

FCC ID: 2A3W9-P1-4WG

Applicable standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22
FCC CFR Title 47 Part 24
FCC CFR Title 47 Part 27

Date of sample receipt: August 26, 2021

Date of Test: August 27, 2021-September 09, 2021

Date of report issued: September 09, 2021

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	September 09, 2021	Original

Prepared By:




Project Engineer

Date:

September 09, 2021

Check By:



Reviewer

Date:

September 09, 2021

3 Contents

	Page
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 RELATED SUBMITTAL(S) / GRANT (S)	8
5.3 TEST METHODOLOGY.....	8
5.4 DEVIATION FROM STANDARDS	8
5.5 ABNORMALITIES FROM STANDARD CONDITIONS.....	8
5.6 TEST FACILITY	8
5.7 TEST LOCATION.....	8
6 TEST INSTRUMENTS LIST	9
7 SYSTEM TEST CONFIGURATION	11
7.1 TEST MODE	11
7.2 CONFIGURATION OF TESTED SYSTEM	11
7.3 CONDUCTED AVERAGE OUTPUT POWER AND ERP/EIRP	12
7.4 PEAK-TO-AVERAGE RATIO	14
7.5 OCCUPY BANDWIDTH.....	15
7.6 MODULATION CHARACTERISTIC.....	19
7.7 OUT OF BAND EMISSION AT ANTENNA TERMINALS.....	19
7.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT.....	24
7.9 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT.....	29
7.10 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	31
8 TEST SETUP PHOTO	33
9 EUT CONSTRUCTIONAL DETAILS	33

4 Test Summary

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 Part 22.913 (a) Part 24.232 (c) Part 27.50	Pass
Peak-to-Average Ratio	Part 2.1046 Part 24.232 Part 27.50	Pass
Modulation Characteristics	Part 2.1047	Pass
99% Occupied Bandwidth & 26dB Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b) Part 27.53	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 Part 24.238 Part 27.53	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 Part 24.238 Part 27.53	Pass
Out of band emission, Band Edge	Part 2.1051 Part 22.917 Part 24.238 Part 27.53	Pass
ERP and EIRP	Part 22.913(a) Part 24.232(b) Part 27.50	Pass
Frequency stability vs. temperature	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235 Part 27.54	Pass
Frequency stability vs. voltage	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235 Part 27.54	Pass

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 General Description of EUT

Product Name:	5 channel 4G vehicle monitoring all-in-one DVR
Model No.:	P1-4GW, P1, P1-4G, P1-5G, P1-5GW, P2, P2-4G, P2-4GW, P2-5G, P2-5GW, P3, P3-4G, P3-4GW, P3-5G, P3-5GW
Test Model No.:	P1-4GW
Remark:All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance size and model name for commercial purpose.	
Test sample(s) ID:	GTSL202108000282-1
Sample(s) Status:	Engineer sample
S/N:	N/A
Hardware Version:	P1_5CH_V2.0
Software Version:	GSP120211211
Support Networks:	WCDMA
Support Bands:	WCDMA Band V, WCDMA Band IV, WCDMA Band II
TX Frequency:	WCDMA Band V: 826.40MHz-846.60MHz WCDMA Band IV: 1712.40MHz -1752.60MHz WCDMA Band II: 1852.40MHz-1907.60MHz
Modulation type:	QPSK
Antenna type:	External Antenna
Antenna gain:	5.0dBi(declare by applicant)
Power supply:	DC 12V battery

Operation Frequency List:

WCDMA Band V		WCDMA Band II		WCDMA Band IV	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
4132	826.40	9262	1852.40	1312	1712.40
4133	826.60	9263	1852.60	1313	1712.60
· ∴	· ∴	· ∴	· ∴	· ∴	· ∴
4181	836.20	9399	1879.80	1411	1732.20
4182	836.40	9400	1880.00	1412	1732.40
4183	836.60	9401	1880.20	1413	1732.60
· ∴	· ∴	· ∴	· ∴	· ∴	· ∴
4232	846.40	9537	1907.40	1512	1752.40
4233	846.60	9538	1907.60	1513	1752.60

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Final test channel:

WCDMA Band V		WCDMA Band II		WCDMA Band IV	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
4132	826.40	9262	1852.40	1312	1712.40
4183	836.60	9400	1880.00	1412	1732.40
4233	846.60	9538	1907.60	1513	1752.60

5.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 22/24/27 of the FCC CFR 47 Rules.

5.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on ANSI C63.26:2015 and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

- **IC —Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 24 2021	June. 23 2022
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 24 2021	June. 23 2022
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 24 2021	June. 23 2022
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 24 2021	June. 23 2022
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 24 2021	June. 23 2022
9	Coaxial Cable	GTS	N/A	GTS211	June. 24 2021	June. 23 2022
10	Coaxial cable	GTS	N/A	GTS210	June. 24 2021	June. 23 2022
11	Coaxial Cable	GTS	N/A	GTS212	June. 24 2021	June. 23 2022
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 24 2021	June. 23 2022
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 24 2021	June. 23 2022
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 24 2021	June. 23 2022
15	Band filter	Amindeon	82346	GTS219	June. 24 2021	June. 23 2022
16	Power Meter	Anritsu	ML2495A	GTS540	June. 24 2021	June. 23 2022
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 24 2021	June. 23 2022
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 24 2021	June. 23 2022
19	Splitter	Agilent	11636B	GTS237	June. 24 2021	June. 23 2022
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 24 2021	June. 23 2022
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 24 2021	June. 23 2022

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 24 2021	June. 23 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 24 2021	June. 23 2022
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 24 2021	June. 23 2022
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 24 2021	June. 23 2022
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 24 2021	June. 23 2022
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 24 2021	June. 23 2022
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 24 2021	June. 23 2022
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 24 2021	June. 23 2022

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 24 2021	June. 23 2022
2	Barometer	ChangChun	DYM3	GTS255	June. 24 2021	June. 23 2022


7 System test configuration

7.1 Test mode


During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Test modes		
Band	Radiated	Conducted
WCDMA II	■ RMC 12.2Kbps link	■ RMC 12.2Kbps link
WCDMA Band IV	■ RMC 12.2Kbps link	■ RMC 12.2Kbps link
WCDMA Band V	■ RMC 12.2Kbps link	■ RMC 12.2Kbps link

7.2 Configuration of Tested System

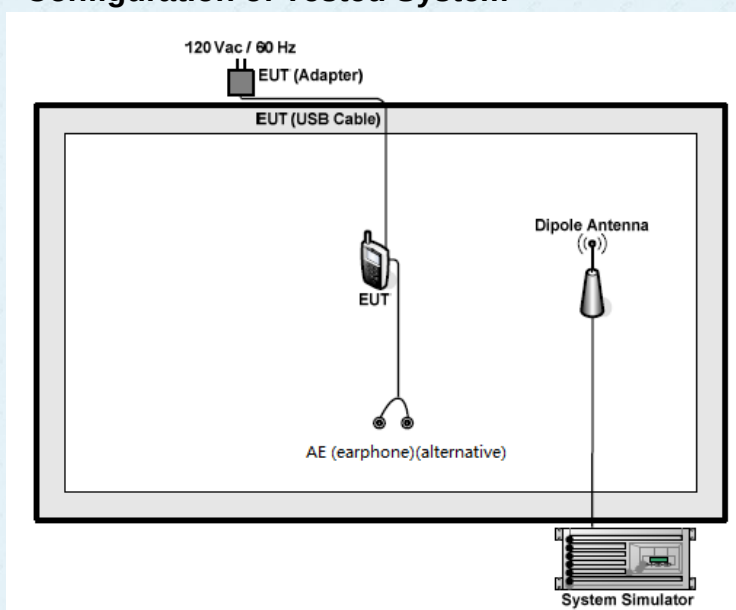

7.3 Conducted Average Output Power and ERP/EIRP

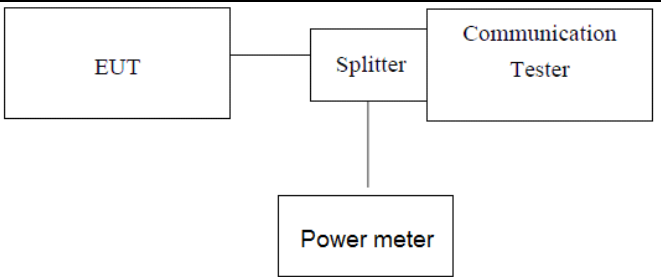
Test Requirement:	FCC part 22.913(a) and FCC part 24.232(c) and FCC part 27.50
Test Method:	FCC part2.1046
Limit:	WCDMA Band V: 7W(38.45dBm) WCDMA Band II: 2W(33dBm)
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1. The transmitter output port was connected to base station. 2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement. 3. Set EUT at maximum power through base station. 4. Select lowest, middle, and highest channels for each band and different modulation. 5. Measure the maximum burst power. 6. $EIRP = \text{measured power} + \text{antenna gain}$ $ERP = EIRP - 2.15$
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

Conducted Power (dBm)									
Band	WCDMA Band II			WCDMA Band IV			WCDMA Band V		
Channel	9262	9400	9538	1312	1412	1513	4132	4183	4233
Frequency	1852.4	1880.0	1907.6	1712.4	1732.4	1752.6	826.4	836.6	846.6
RMC 12.2Kbps	23.93	23.83	24.48	23.81	23.25	23.66	24.31	24.27	24.30
HSDPA Subtest-1	23.71	23.68	23.65	23.54	23.24	23.09	23.83	23.82	23.71
HSDPA Subtest-2	23.72	23.69	23.64	23.90	23.18	23.31	23.76	23.74	23.68
HSDPA Subtest-3	23.69	23.67	23.65	23.58	23.05	23.84	23.75	23.68	23.65
HSDPA Subtest-4	23.68	23.66	23.65	23.98	23.34	23.69	23.78	23.72	23.69
HSUPA Subtest-1	23.96	23.93	23.89	23.62	23.85	23.88	23.84	23.90	23.83
HSUPA Subtest-2	23.95	23.90	23.89	23.80	23.50	23.70	23.85	23.86	23.83
HSUPA Subtest-3	23.94	23.92	23.91	23.89	23.32	23.16	23.89	23.90	23.86
HSUPA Subtest-4	23.97	23.95	23.91	23.11	23.82	23.26	23.87	23.86	23.85
HSUPA Subtest-5	23.96	23.92	23.90	23.24	23.11	23.87	23.88	23.87	23.89
AMR	23.84	23.83	23.82	23.68	23.37	23.87	23.86	23.85	23.84

ERP/EIRP Power (dBm)									
Band	WCDMA Band II			WCDMA Band IV			WCDMA Band V		
Channel	9262	9400	9538	1312	1412	1513	4132	4183	4233
Frequency	1852.4	1880.0	1907.6	1712.4	1732.4	1752.6	826.4	836.6	846.6
RMC 12.2Kbps	28.93	28.83	29.48	28.81	28.25	28.66	27.16	27.12	27.15
HSDPA Subtest-1	28.71	28.68	28.65	28.54	28.24	28.09	26.68	26.67	26.56
HSDPA Subtest-2	28.72	28.69	28.64	28.9	28.18	28.31	26.61	26.59	26.53
HSDPA Subtest-3	28.69	28.67	28.65	28.58	28.05	28.84	26.6	26.53	26.5
HSDPA Subtest-4	28.68	28.66	28.65	28.98	28.34	28.69	26.63	26.57	26.54
HSUPA Subtest-1	28.96	28.93	28.89	28.62	28.85	28.88	26.69	26.75	26.68
HSUPA Subtest-2	28.95	28.9	28.89	28.8	28.5	28.7	26.7	26.71	26.68
HSUPA Subtest-3	28.94	28.92	28.91	28.89	28.32	28.16	26.74	26.75	26.71
HSUPA Subtest-4	28.97	28.95	28.91	28.11	28.82	28.26	26.72	26.71	26.7
HSUPA Subtest-5	28.96	28.92	28.9	28.24	28.11	28.87	26.73	26.72	26.74
AMR	28.84	28.83	28.82	28.68	28.37	28.87	26.71	26.7	26.69


7.4 Peak-to-Average Ratio

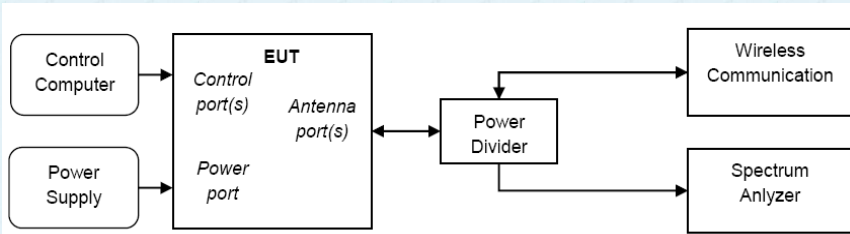Test Requirement:	FCC Part 22.913(d), FCC part 24.232 and Part 27.50
Test Method:	FCC part2.1046
Limit:	13db
Test setup:	
Test Procedure:	A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode. Test Settings 1. The signal analyzer's CCDF measurement profile enabled 2. Frequency= carrier center frequency 3. Measurement BW > EBW of signal 4. for continuous transmissions, set to 1ms 5. Record the maximum PAPR level associated with a probability of 0.1%.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement data

Test Band	Peak to Average Ratio (dB)			Limit (dB)	Result
	Low Ch.	Middle Ch.	High Ch.		
WCDMA Band V	3.25	3.85	3.47	13	PASS
WCDMA Band IV	3.68	3.12	3.14	13	PASS
WCDMA Band II	2.87	3.08	3.11	13	PASS

7.5 Occupancy Bandwidth

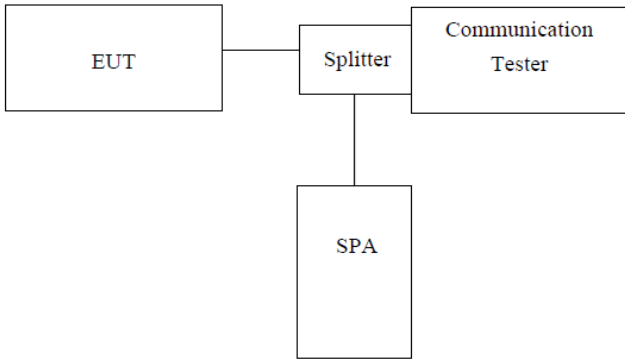
Test Requirement:	FCC part 22.917(b) and FCC part 24.238(b) and FCC part 27.53
Test Method:	FCC part2.1049
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data


EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
WCDMA Band II (RMC 12.2Kbps link)	9262	1852.4	4161.50	4711.0
	9400	1880.0	4157.30	4710.0
	9538	1907.6	4175.31	4715.0
4684WCDMA Band IV (RMC 12.2Kbps link)	1312	1712.40	4123.40	4745.0
	1412	1732.40	4143.30	4707.0
	1513	1752.60	4157.30	4753.0
4684WCDMA Band V (RMC 12.2Kbps link)	4132	826.40	4165.60	4720.0
	4183	836.60	4136.80	4708.0
	4233	846.60	4161.30	4705.0

Test plot as follows:


Test band:	WCDMA Band II (RMC 12.2Kbps link)
------------	-----------------------------------

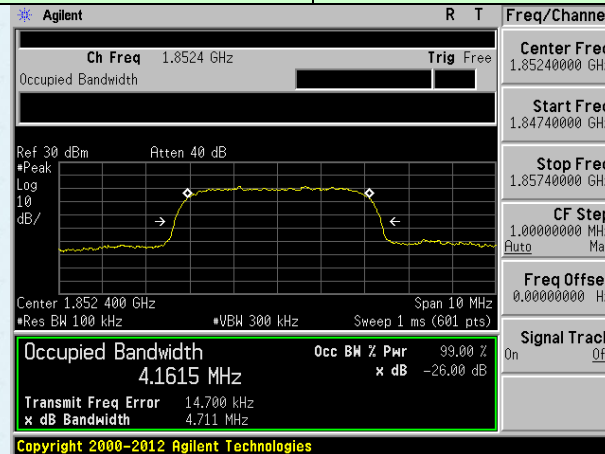

Lowest channel

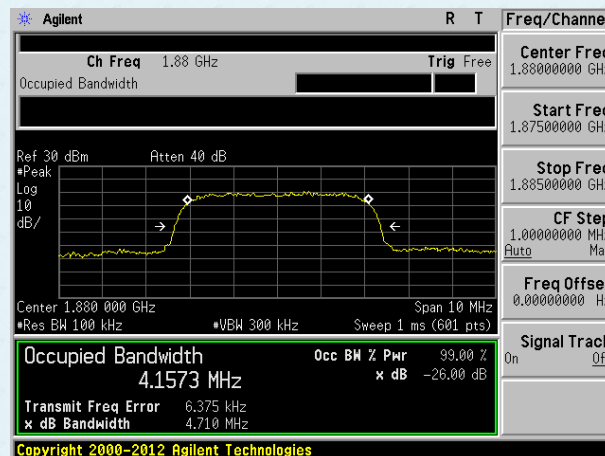


Middle channel

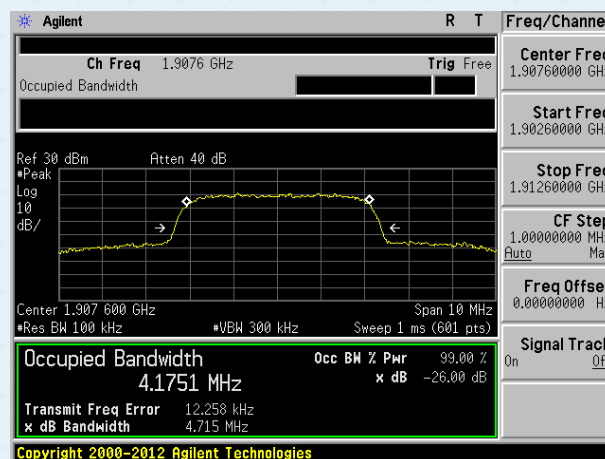


Highest channel


Test band:	WCDMA Band IV (RMC 12.2Kbps link)
------------	-----------------------------------

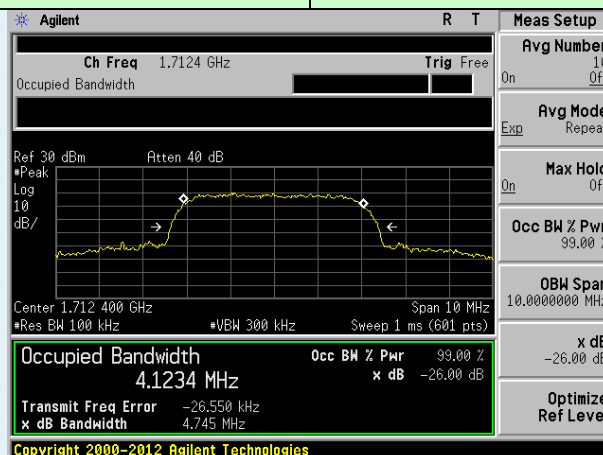

Lowest channel

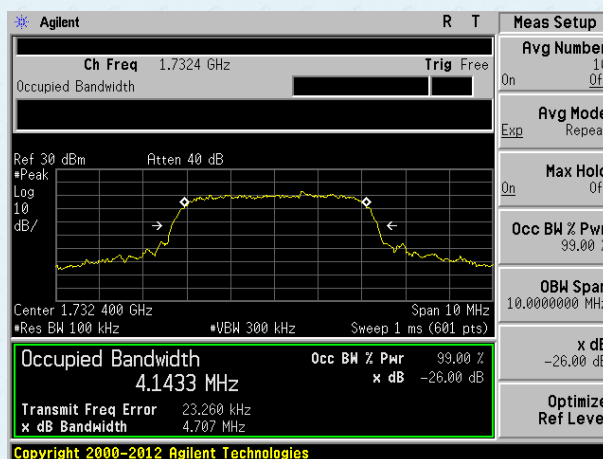


Middle channel

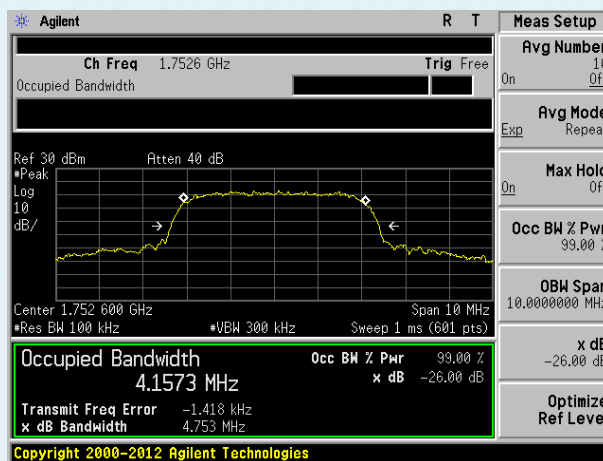


Highest channel


Test band:	WCDMA Band V (RMC 12.2Kbps link)
------------	----------------------------------

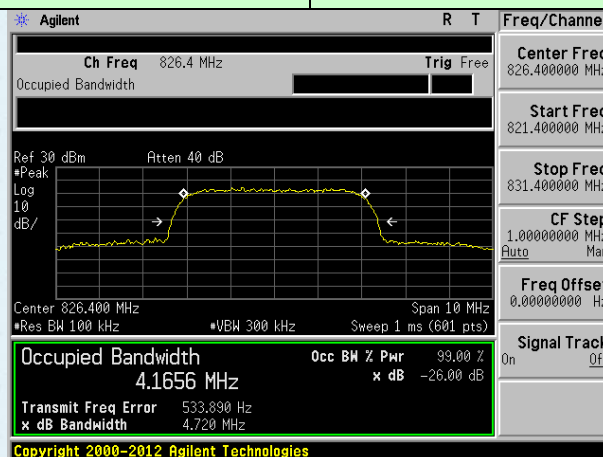

Lowest channel

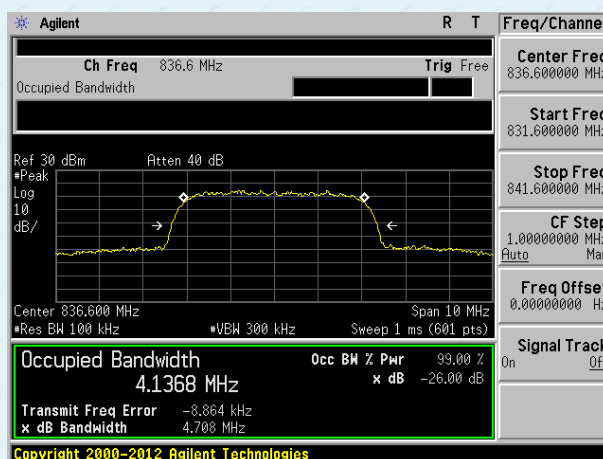

Middle channel

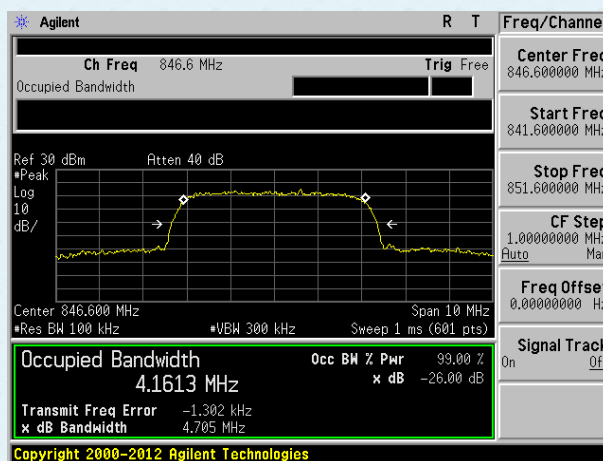


Highest channel

7.6 MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.



7.7 Out of band emission at antenna terminals

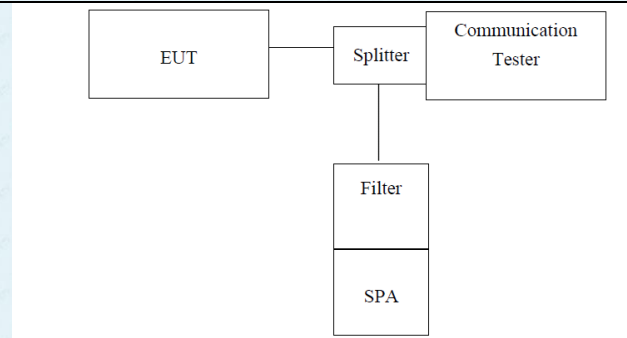Test Requirement:	FCC part 22.917 and FCC part 24.238 and FCC part 27.53
Test Method:	FCC part2.1051
Limit:	-13dBm
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass



Test plot as follows:

Test Mode: Traffic mode



WCDMA Band II (RMC 12.2Kbps link)

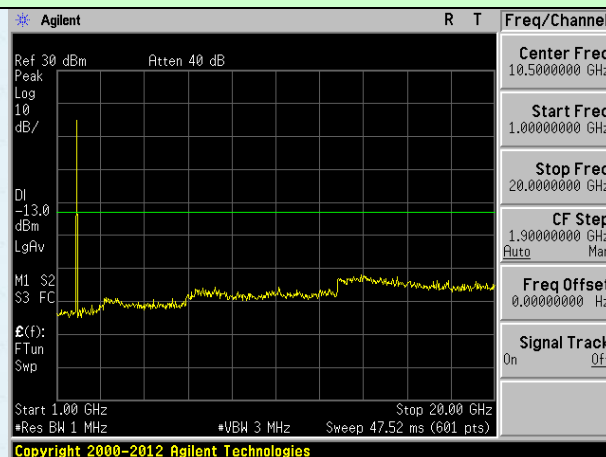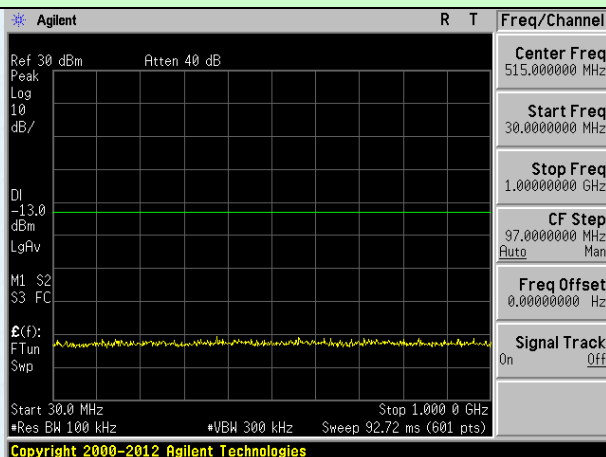

Lowest channel

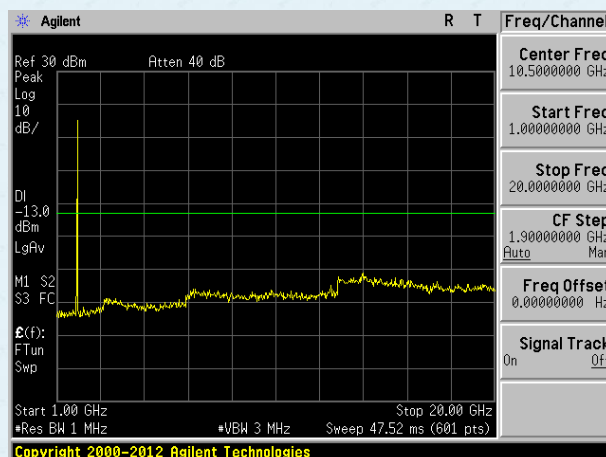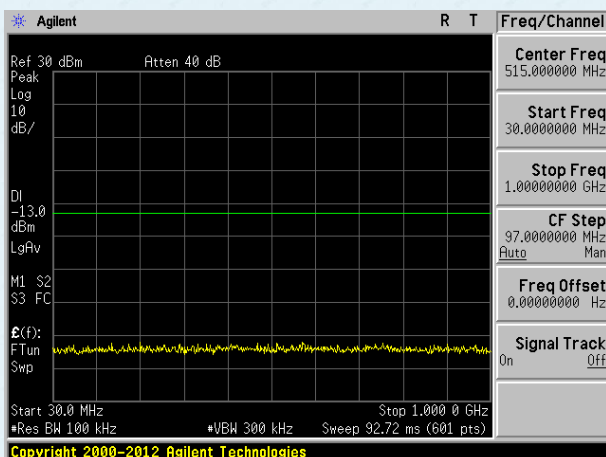



Middle channel

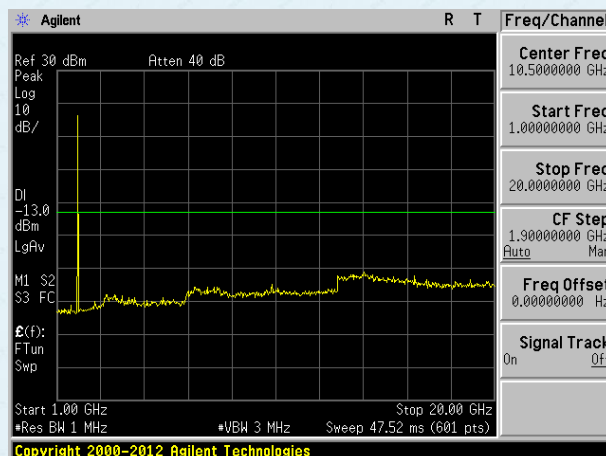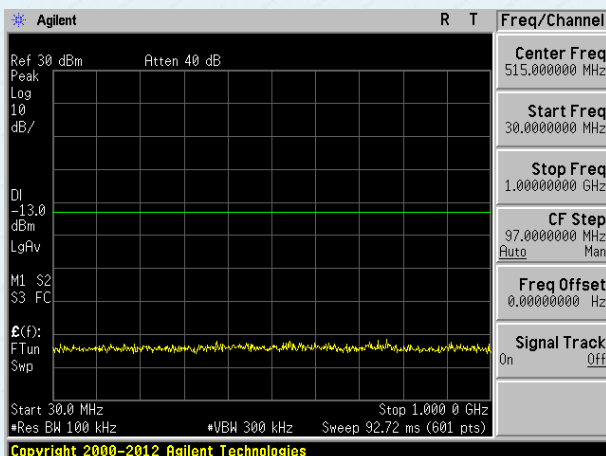



Highest channel

Test Mode: Traffic mode



WCDMA Band IV (RMC 12.2Kbps link)

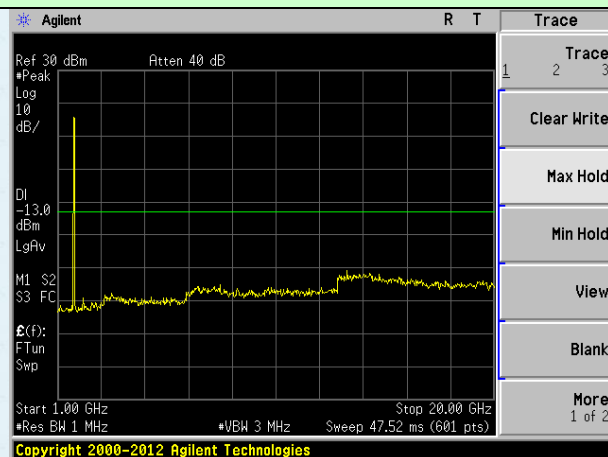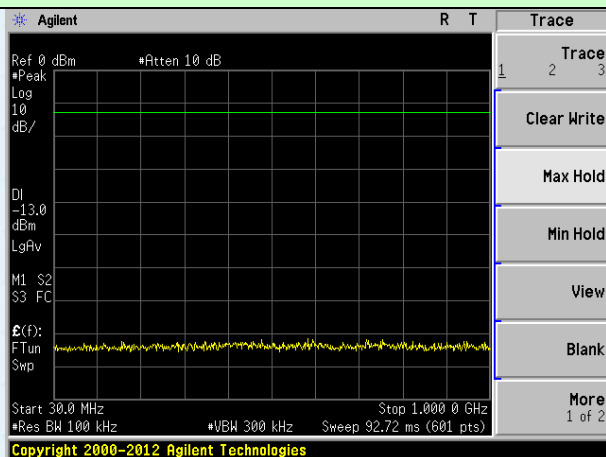

Lowest channel

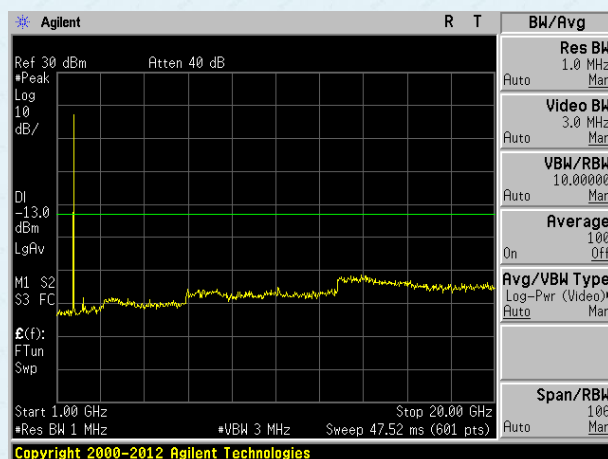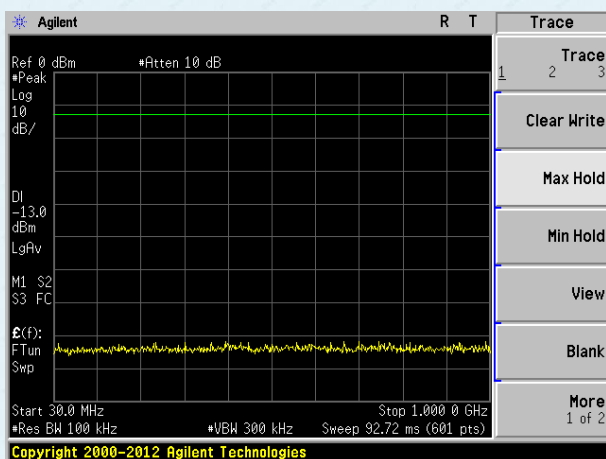



Middle channel

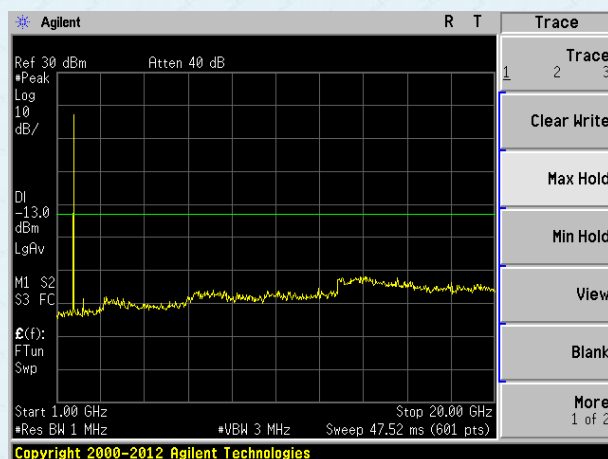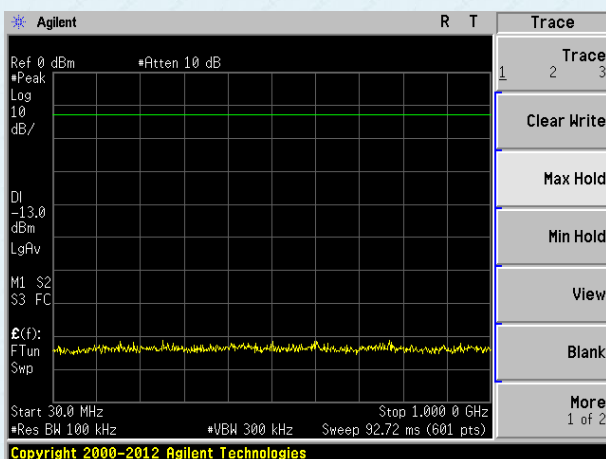



Highest channel

Test Mode: Traffic mode



WCDMA Band V (RMC 12.2Kbps link)

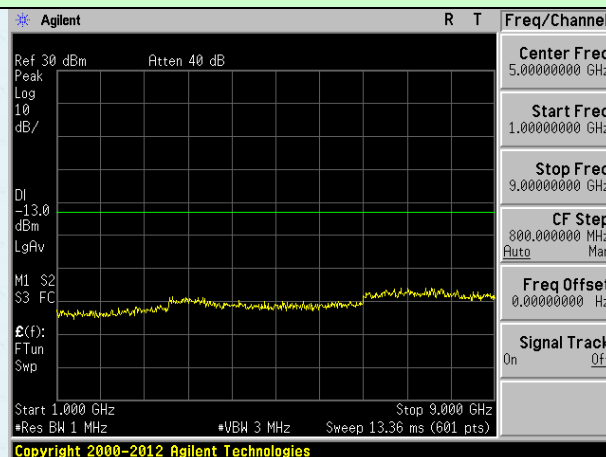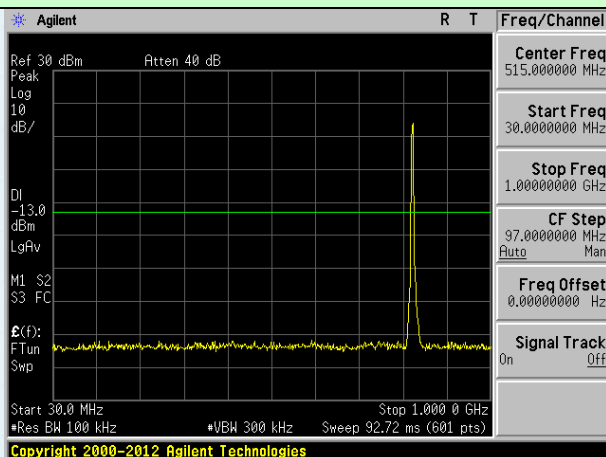

Lowest channel

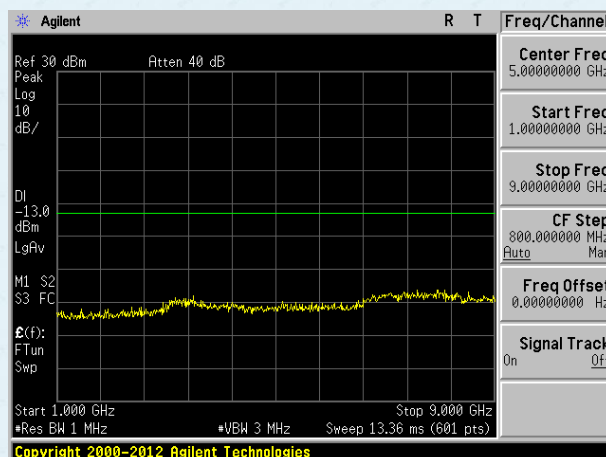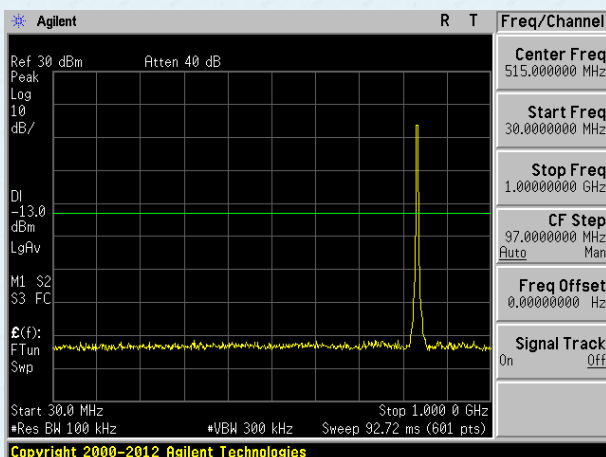

Middle channel

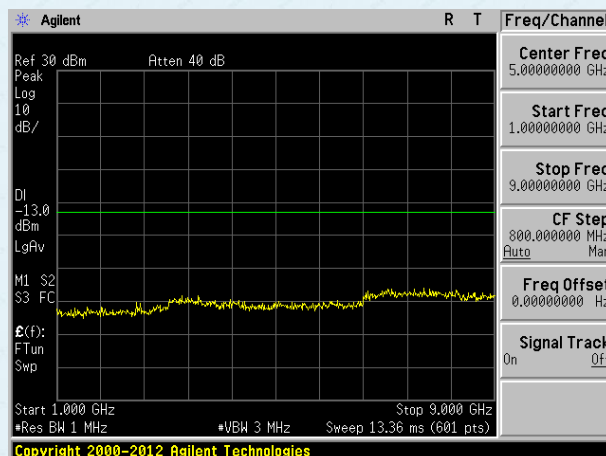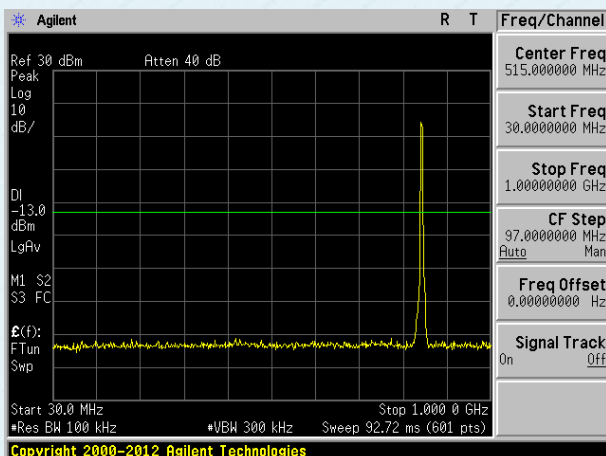


Highest channel


Band Edge:

Test Mode: Traffic mode

WCDMA Band II (RMC 12.2Kbps link)

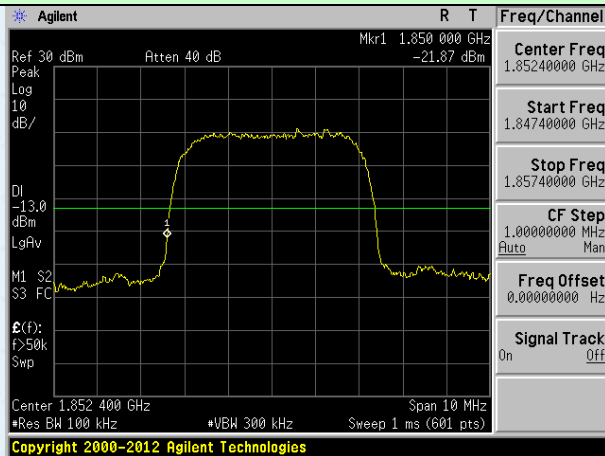


Lowest channel

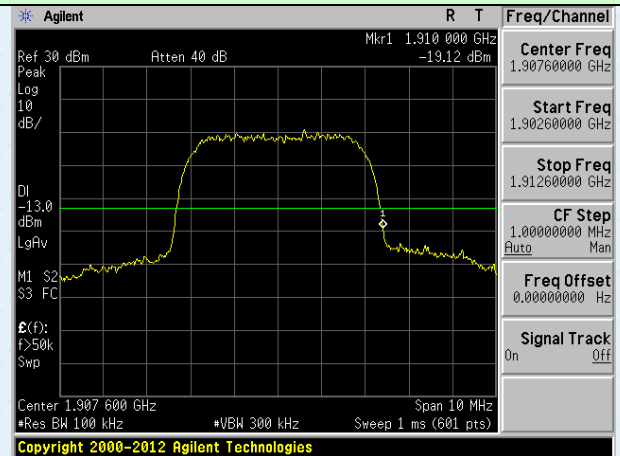


Highest channel

Test Mode: Traffic mode

WCDMA Band IV (RMC 12.2Kbps link)

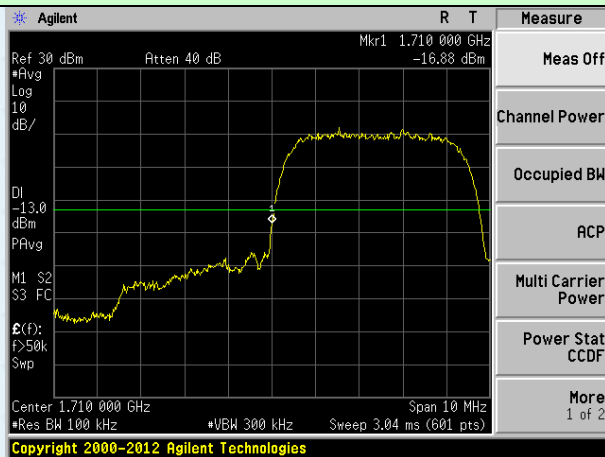


Lowest channel

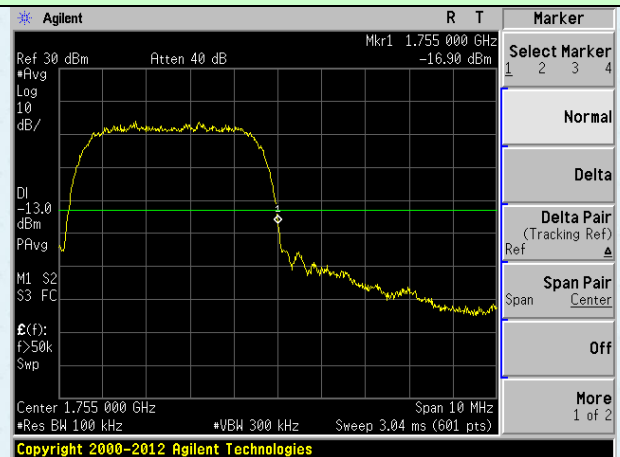


Highest channel

Test Mode: Traffic mode

WCDMA Band IV (RMC 12.2Kbps link)



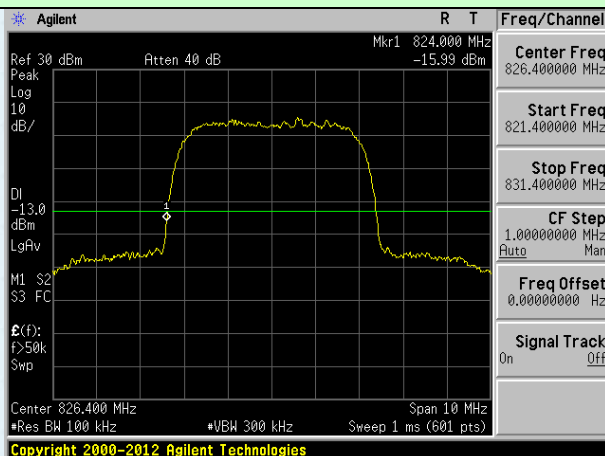


Lowest channel

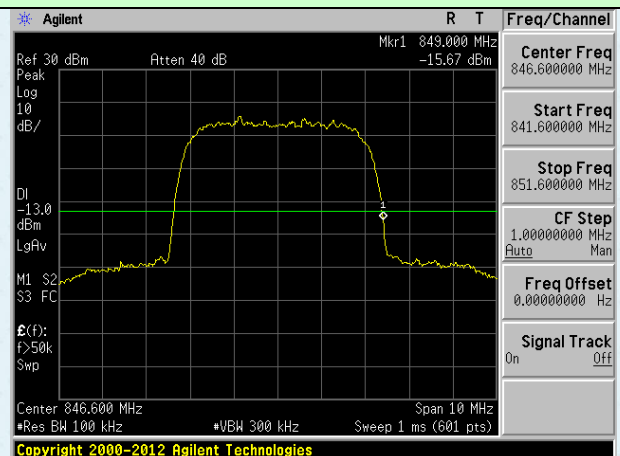

Highest channel

7.8 Field strength of spurious radiation measurement

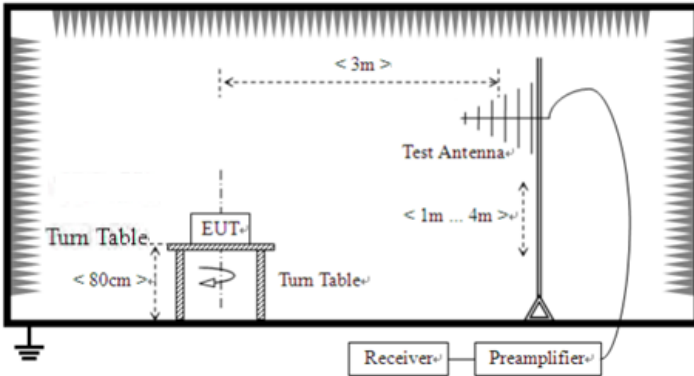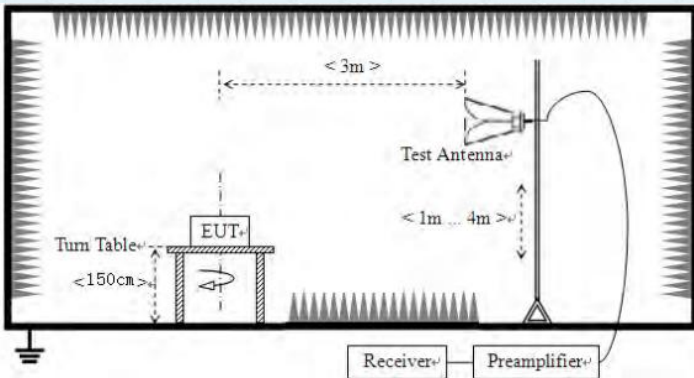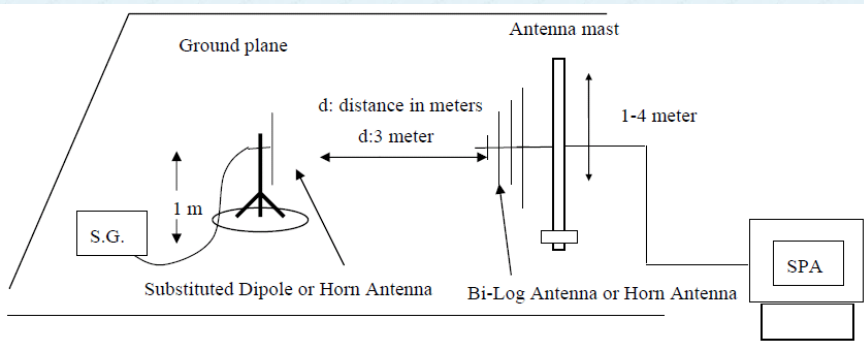Test Requirement:	FCC part 22.917 and FCC part 24.238 and Part 27.53
Test Method:	FCC part 2.1053 and ANSI C63.26:2015
Limit:	-13dBm
Test setup:	Below 1GHz  Above 1GHz  Substituted method: 

Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$ $\text{ERP} = \text{EIRP} - 2.15$
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

WCDMA Band V								
Channel	Frequency(MHz)	Polarization	SGP [dBm]	Substitution Gain[dBi]	Cable loss[dB]	ERP (dBm)	Limit (dBm)	Over Limit (dBm)
Lowest	1652.80	H	-48.61	6.74	2.37	-46.39	-13	-33.39
	2479.20	H	-55.75	8.94	3.18	-52.14	-13	-39.14
	3305.60	H	-52.92	10.62	3.62	-48.07	-13	-35.07
	1652.80	V	-50.14	6.74	2.37	-47.92	-13	-34.92
	2479.20	V	-54	8.94	3.18	-50.39	-13	-37.39
	3305.60	V	-45.03	10.62	3.62	-40.18	-13	-27.18
Middle	1672.80	H	-54.44	6.74	2.39	-52.24	-13	-39.24
	2509.20	H	-52.57	8.94	3.03	-48.81	-13	-35.81
	3345.60	H	-45.11	10.62	3.63	-40.27	-13	-27.27
	1672.80	V	-55.28	6.74	2.39	-53.08	-13	-40.08
	2509.20	V	-49.6	8.94	3.03	-45.84	-13	-32.84
	3345.60	V	-47.01	10.62	3.63	-42.17	-13	-29.17
Highest	1693.20	H	-51.37	6.74	2.4	-49.18	-13	-36.18
	2539.80	H	-47.01	8.94	3.06	-43.28	-13	-30.28
	3386.40	H	-48.74	10.62	3.64	-43.91	-13	-30.91
	1693.20	V	-50.24	6.74	2.4	-48.05	-13	-35.05
	2539.80	V	-50.94	8.94	3.06	-47.21	-13	-34.21
	3386.40	V	-48.33	10.62	3.64	-43.5	-13	-30.5

The emission levels of below 1 GHz are very lower than the limit so not show in test report


WCDMA Band IV								
Channel	Frequency(MHz)	Polarization	SGP [dBm]	Substitution Gain[dBi]	Cable loss[dB]	EIRP (dBm)	Limit (dBm)	Over Limit (dBm)
Lowest	3424.8	H	-45.42	11.96	3.67	-37.13	-13	-24.13
	5137.2	H	-50.02	10.11	4.95	-44.86	-13	-31.86
	6849.6	H	-46.42	10.37	6.11	-42.16	-13	-29.16
	3424.8	V	-50.77	8.96	3.67	-45.48	-13	-32.48
	5137.2	V	-48.59	10.11	4.95	-43.43	-13	-30.43
	6849.6	V	-55.12	10.37	6.17	-50.92	-13	-37.92
Middle	3464.8	H	-54.24	8.96	3.69	-48.97	-13	-35.97
	5197.2	H	-55.52	10.11	4.96	-50.37	-13	-37.37
	6929.6	H	-51.32	10.37	6.15	-47.1	-13	-34.1
	3464.8	V	-45.49	8.96	3.69	-40.22	-13	-27.22
	5197.2	V	-56.34	10.11	4.96	-51.19	-13	-38.19
	6929.6	V	-47.64	10.37	6.15	-43.42	-13	-30.42
Highest	3505.2	H	-51.26	8.96	3.7	-46	-13	-33
	5257.8	H	-56.3	10.11	5.01	-51.2	-13	-38.2
	7010.4	H	-52.66	10.37	6.21	-48.5	-13	-35.5
	3505.2	V	-53.83	8.96	3.7	-48.57	-13	-35.57
	5257.8	V	-56.6	10.11	5.01	-51.5	-13	-38.5
	7010.4	V	-46.82	10.37	6.21	-42.66	-13	-29.66

The emission levels of below 1 GHz are very lower than the limit so not show in test report

WCDMA Band II								
Channel	Frequency(MHz)	Polarization	SGP [dBm]	Substitution Gain[dBi]	Cable loss[dB]	EIRP (dBm)	Limit (dBm)	Over Limit (dBm)
Lowest	3704.80	H	-48.53	13.13	3.88	-39.28	-13	-26.28
	5557.20	H	-48.77	11.62	5.27	-42.42	-13	-29.42
	7409.60	H	-52.65	10.22	6.73	-49.16	-13	-36.16
	3704.80	V	-55.78	13.13	3.88	-46.53	-13	-33.53
	5557.20	V	-54.32	11.62	5.27	-47.97	-13	-34.97
	7409.60	V	-53.59	10.22	6.73	-50.1	-13	-37.1
Middle	3760.00	H	-51.12	13.13	3.9	-41.89	-13	-28.89
	5640.00	H	-55.87	11.62	5.33	-49.58	-13	-36.58
	7520.00	H	-51.27	10.22	6.82	-47.87	-13	-34.87
	3760.00	V	-45.82	13.13	3.9	-36.59	-13	-23.59
	5640.00	V	-53.15	11.62	5.33	-46.86	-13	-33.86
	7520.00	V	-48.67	10.22	6.82	-45.27	-13	-32.27
Highest	3815.20	H	-46.86	13.13	3.92	-37.65	-13	-24.65
	5722.80	H	-47.46	11.62	5.4	-41.24	-13	-28.24
	7630.40	H	-46.28	10.22	6.8	-42.86	-13	-29.86
	3815.20	V	-55.99	13.13	3.92	-46.78	-13	-33.78
	5722.80	V	-49.12	11.62	5.4	-42.9	-13	-29.9
	7630.40	V	-54.86	10.22	6.8	-51.44	-13	-38.44

The emission levels of below 1 GHz are very lower than the limit so not show in test report


7.9 Frequency stability V.S. Temperature measurement

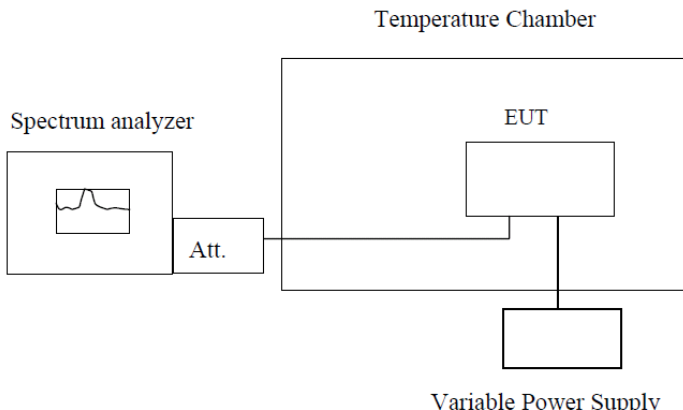Test Requirement:	FCC part 22.355 and FCC part 24.235 and Part 27.54
Test Method:	FCC Part2.1055(a)(1)(b)
Limit:	$\pm 2.5\text{ppm}$
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test procedure:	1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to –20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12	-30	97	0.1159	± 2.5	Pass
	-20	139	0.1658		
	-10	158	0.1885		
	0	70	0.0841		
	10	108	0.1295		
	20	120	0.1431		
	30	181	0.2158		
	40	169	0.2022		
	50	203	0.2431		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880.0MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12	-30	93	0.0493	± 2.5	Pass
	-20	83	0.0439		
	-10	71	0.0379		
	0	67	0.0355		
	10	61	0.0325		
	20	53	0.0283		
	30	67	0.0355		
	40	75	0.0397		
	50	71	0.0379		

7.10 Frequency stability V.S. Voltage measurement

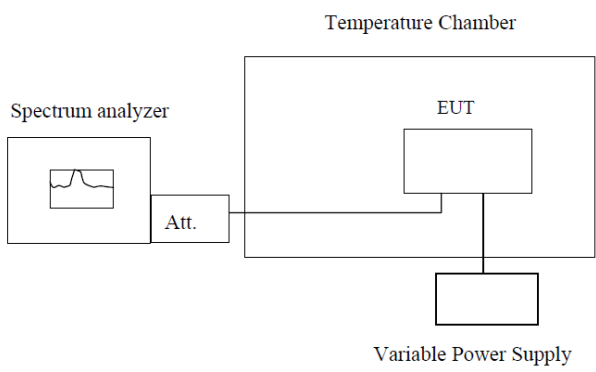Test Requirement:	FCC part 22.355 and FCC part 24.235
Test Method:	FCC Part2.1055(d)(1)(2)
Limit:	$\pm 2.5\text{ppm}$
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test procedure:	1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	10.8	43	0.0230	± 2.5	Pass
	12	32	0.0171		
	13.2	34	0.0183		
Reference Frequency: WCDMA Band II Middle channel=940 channel=1880.0MHz					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	10.8	62	0.0329	± 2.5	Pass
	12	71	0.0378		
	13.2	71	0.0380		

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----