

Can't connect? Need help?



DO NOT RETURN THIS
PRODUCT TO THE STORE

Call 1-800-757-1440
Mon-Fri 9:00-5:00 EST (US)
or email support@atomiusa.com



Date Code: MM/YY

Smart Shop Light

User Manual



Download Free APP

Watch Video

Open your smartphone camera
and point it at the QR Code

SAFETY INFORMATION

IMPORTANT: READ ALL SAFETY INFORMATION AND INSTALLATION INSTRUCTIONS BEFORE INSTALLING OR SERVICING THIS PRODUCT. SAVE THIS MANUAL FOR REFERENCE


- 5' power cord with plug, link up to 10 shop lights together.
- Do not handle any energized fixture or attempt to energize any fixture with wet hands or while standing on a wet or damp surface or in water.
- Assure that the fixture is mounted onto a structurally sound surface that will support the fixture.
- The fixture is designed for use in a 120Vac, 50/60Hz fused circuit. Do not use on a dimming circuit.
- Do not look into the lights.
- Product is intended for use in garages, basements, work areas, utility rooms and recreation rooms.
- Maximum distance to the receptacle is determined by the length of the cord provided. (5 ft, 2-prong, 120Vac parallel-blade plug)
- Includes a protective sleeve, such as 0.010-inch (0.25-mm) thick fiberglass, where the path of cord travel to the ceiling-mounted receptacle is not between the two supporting chains.
- The fixture is intended to be installed directly beneath a ceiling-mounted receptacle. Excess cord should be secured to one of the supporting chains with a cable tie to keep it out of the work space.
- Use hook to support chain, not the electrical cord.
- Do not install on radiant-heating type ceiling.

⚠ Warning: Failure to comply with these instructions could result in a potentially fatal electric shock and/or property damage.

Thank you for purchasing the atomi Smart Shop Light

Control your Shop Light from your phone anytime, anywhere! Ideal for garages, basements, work areas, utility rooms and recreational rooms. Control your Smart Shop Lights using Alexa, Google Voice Assistant or customize them with any Wi-Fi enabled smartphone/tablet in the atomi smart app (available for Android or iOS). You can connect and link up to 10 lights.

Inside the box you'll find:

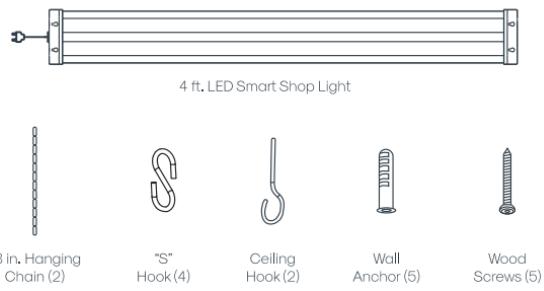

Before you begin

1. Know your Wi-Fi network and password.
2. Make sure your mobile device is running iOS® 8 or higher or Android™ 4.1x or higher.
3. Make sure you're connected to a 2.4GHz Wi-Fi network (atomi smart app can't connect to 5GHz networks).
4. Before installing, plug the Smart Shop Light into the outlet to ensure it is working properly.

Step 1: Installation

Option A: Pendant Mounted



BB
"S" Hook (4)



NOTE: The unit is intended to be installed directly beneath a ceiling-mounted receptacle. If there is excess cord, bind with string or a cable tie to keep it out of work space.

IMPORTANT: Unplug the Smart-Shop Light prior to mounting.


Attach the Ceiling Hooks

Choose desired location of light fixture making sure it is within reach of an outlet. Use a pencil to place a mark on the ceiling where each ceiling hook (part CC) should go. Screw hooks in place until secure.




Suspended to Ceiling

1. Hook the "S" hooks (Part BB) into each of the holes on both sides of the Smart Shop Light.
2. Hook the hanging chains (Part AA) into each of the ceiling hooks (Part CC).



(Figure 1)

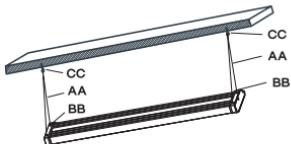

(Figure 2)

Option B: Surface Mounted




DD
Wall
Anchor (5)



EE
Wood
Screws (5)


Attach the Ceiling Hooks

1. Drill a 1/4 inch pilot hole into the marked screw locations.
2. Insert wall anchors (Parts DD).
3. Start the wood screws (Part EE) but do not tighten fully.
4. Slide the fixture over until the narrow legs of the keyhole slots are under the heads of the wood screws (Part EE).

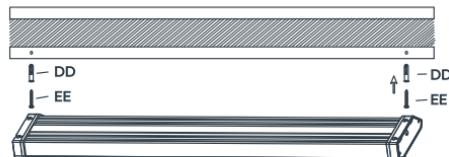


Secure the Fixture

Drill a 1/4 inch pilot hole nearby the fixture's receptacle. Insert wall anchors (Part DD) and tighten the wood screws (Parts EE).




Step 2: Plug In

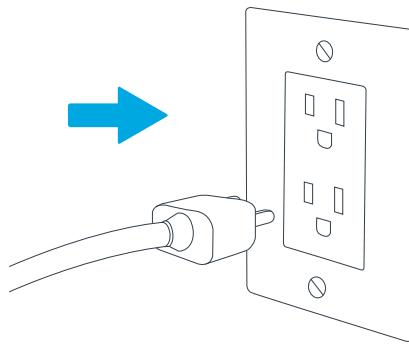

Plug atomi Smart Shop Light
into any standard outlet.

Wait for 10 seconds after plugging in.

Step 3: Download App

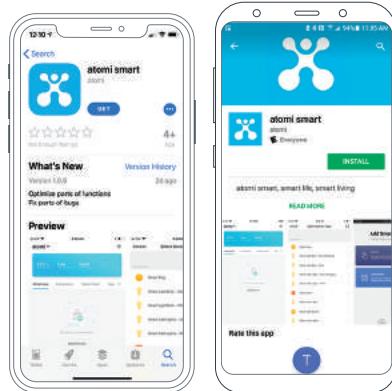

Download the atomi smart app from
the App Store or Google Play.


Step 4: Register



Enter your mobile phone number or email address.




Enter the verification code and create a password.

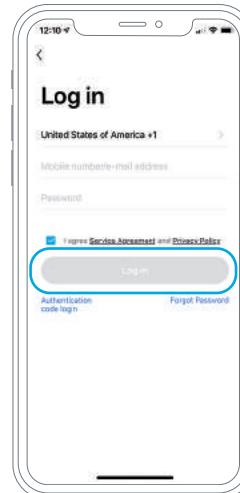


Log into the app.


Step 5: Add Device

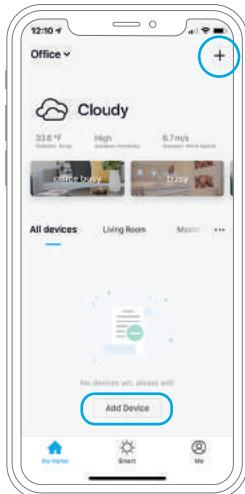

Select “Add Device” or click (+) at the top right corner of the devices screen.

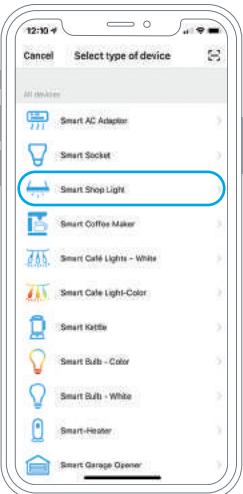

Choose “Smart Shop Light” from the Device list.

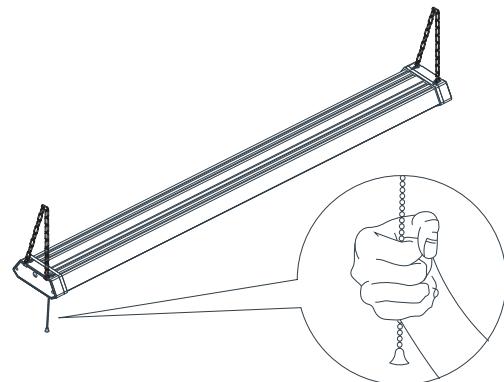

Pull the chain down and hold for 5 seconds until the light flashes rapidly, then press “Continue” on the atomi smart app.



Enter your Wi-Fi network and password.



The atomi smart app will connect your device.

Switch

ON/OFF

Press to power Smart Shop Lights ON/OFF.



Schedule
Set up weekly schedules to fit your lifestyle.


Countdown
Set a countdown to power off Smart Shop Light.

Countdown



Automatically powers Smart Shop Light ON/OFF.


Settings

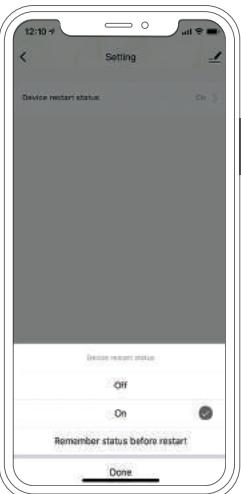

Selects the current status of light(s)

Schedule

Time
Set preferred scheduled time.

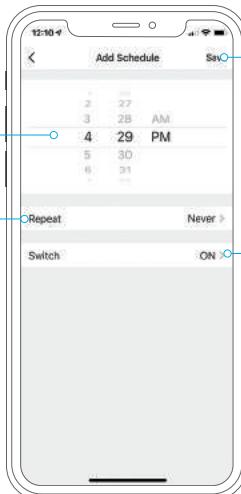

Repeat
Set preferred days to repeat schedule.

Save
Confirm and save schedule.

Switch
Set preferred state (ON/OFF).

You can set up your Smart Shop Light to illuminate at specific times on specific days of the week.

Troubleshooting

Cannot connect to your Wi-Fi network.

Make sure you entered the correct Wi-Fi password during the Wi-Fi setup. Check if there are problems with your internet connection. If the Wi-Fi signal is too weak, reset your Wi-Fi router and try again.

Setup is not working properly.

1. Close all apps that are running in the background then re-open the atomi smart app.
2. Uninstall and reinstall the atomi smart app then repeat the setup process.

Light will not turn on.

Check wires to ensure proper connections. Make sure your breaker is on and test another working electrical device to make sure it is receiving power.

I'm still having trouble!

Wi-Fi networks come in a lot of shapes and sizes with many quirks. It doesn't mean your Smart Shop Light is malfunctioning. If problems persist, please try these steps, in order:


1. Force quit and re-launch the atomi smart app.
Check to see if this fixes the issue.
2. Unplug Smart Shop Light and plug it back in.
Check to see if this fixes the issue.
3. Unplug your router and plug it back in.
Check to see if this fixes the issue.
4. Delete and reinstall the atomi app.
Check to see if this fixes the issue.
5. If all else fails, restore your Smart Shop Light to factory settings:
Unplug your Smart Shop Light. Plug it back in and pull and hold the chain for 5 secs.

Factory Reset

Choose "restore factory defaults" from the app directly.

Connection Options

1. If multiple lights are being installed, make sure the distance from the end of front light to the head of next one is less than the 5-feet long power supply cord.
2. Plug the power cord into the receptacle from the front light to the next one.
3. Plug power cord into an outlet and use pull chain or atomi smart app to control Smart Shop Lights.

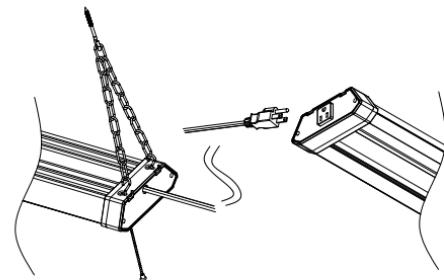

Connecting Devices


In order to connect multiple lights and control with the atomi smart app you are required to create a group.

Creating a Group



Press the "Edit" button at the top right corner of your screen.

Adding Devices

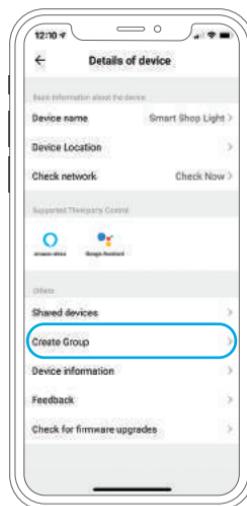

Press "Create Group", select the devices you wish to be included and press "Save". You can now control your lights simultaneously.



Specifications

- 5000K (Bright White) CCT
- Input Voltage: 120V/50-60HZ
- 5-foot prong cordset
- CRI: >80

FCC Notice:

WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.

NOTES: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION: Suitable for indoor use only.

Made in China

For questions or concerns, email us at info@atomiusa.com
Manufactured and marketed by Atomi, Inc.
10 West 33rd St, Suite 520, New York, NY 10001
atomi™ is a trademark of Atomi, Inc.
Designed by Atomi in New York. Made in China

One-year limited warranty from date of purchase against defects in materials and workmanship. Google is a trademark of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.