

# "Four-button scene panel" instruction manual

**Shanghai Unisplendor Lelian  
Internet of Things Technology  
Co., Ltd.**  
**R&D department**

文件标识:	UIOT-YFB-DETAILDOC
应用部门:	R&D department
保存期限:	

---

## Document revision history

date	version	Description	Author	Approver
2019-10-09	V1. 0. 0	Initial release	Guangyu e Hu	

UIOT-題綱知識庫

# Four-button scene panel

## 1 Product Features

### 1.1. Functional description


1. Local control: The scene can be controlled by buttons.
2. Remote control: After entering the network, the corresponding scene function is executed through the UIOT smart home APP trigger switch.



---

## 2 Product structure

### 2.1. Product panel diagram

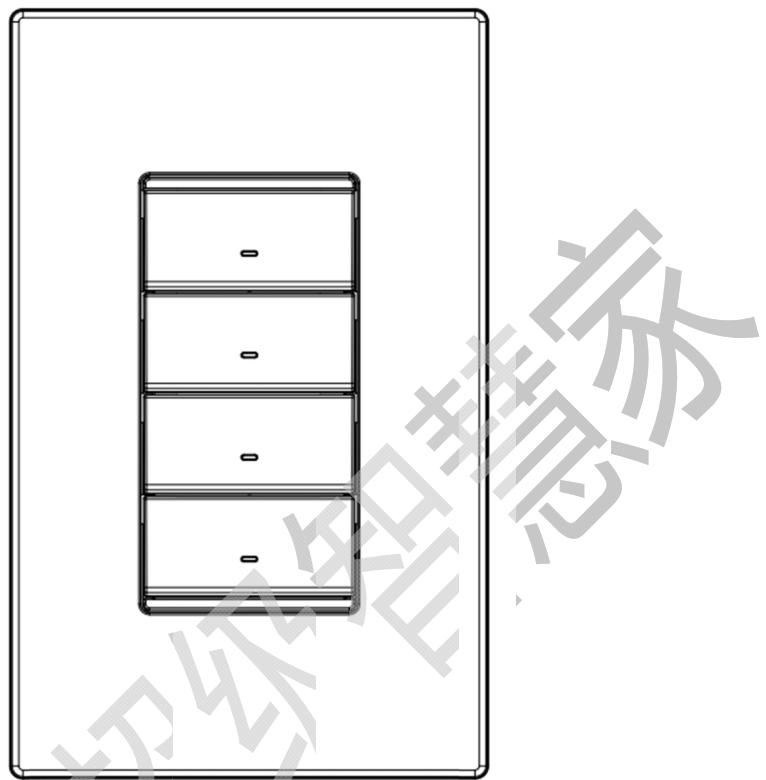


### 2.2. Product wiring instructions

Blue line (zero line), brown line (hot line), yellow-green line (ground line)

---

### 2.3. Product Structure

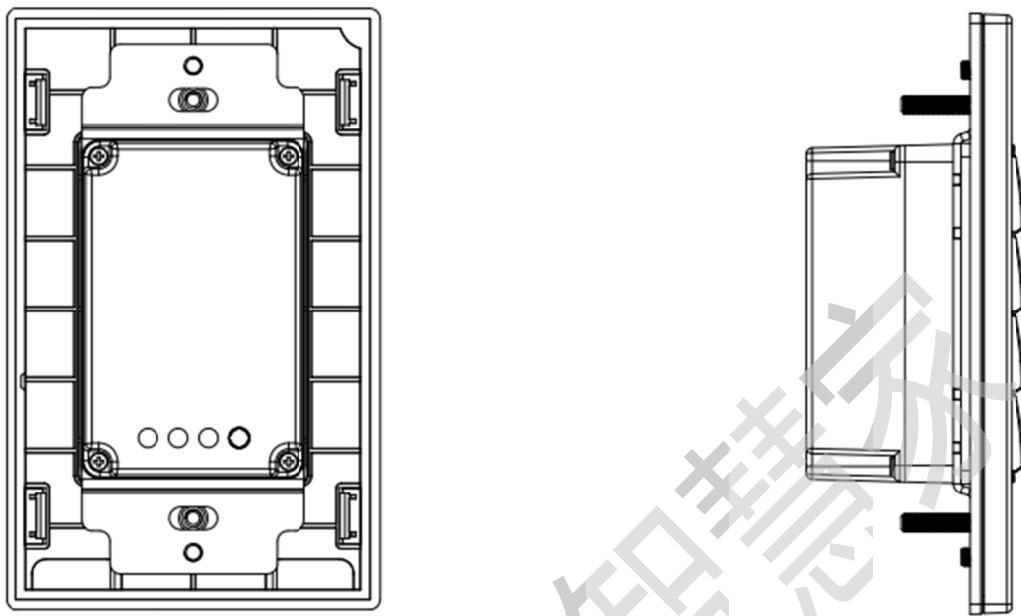

## 3 installation steps

### 3.1. Installation requirements


1. The product housing is a special housing for the dimmer switch;
2. The installation cassette is an American UL certified junction box with position adjustment;
3. Cannot be installed outdoors.

### 3.2. Product installation steps


1. Cut off the mains power supply, follow the wiring diagram, connect the line, be sure to confirm the wiring is correct.

---


2. Put the dimmer switch flat into the wall prefabricated American UL certification junction box, and manage the line.
3. Fix the bottom case to the American UL-certified junction box of the indoor wall with screws, pay attention to the installation direction.

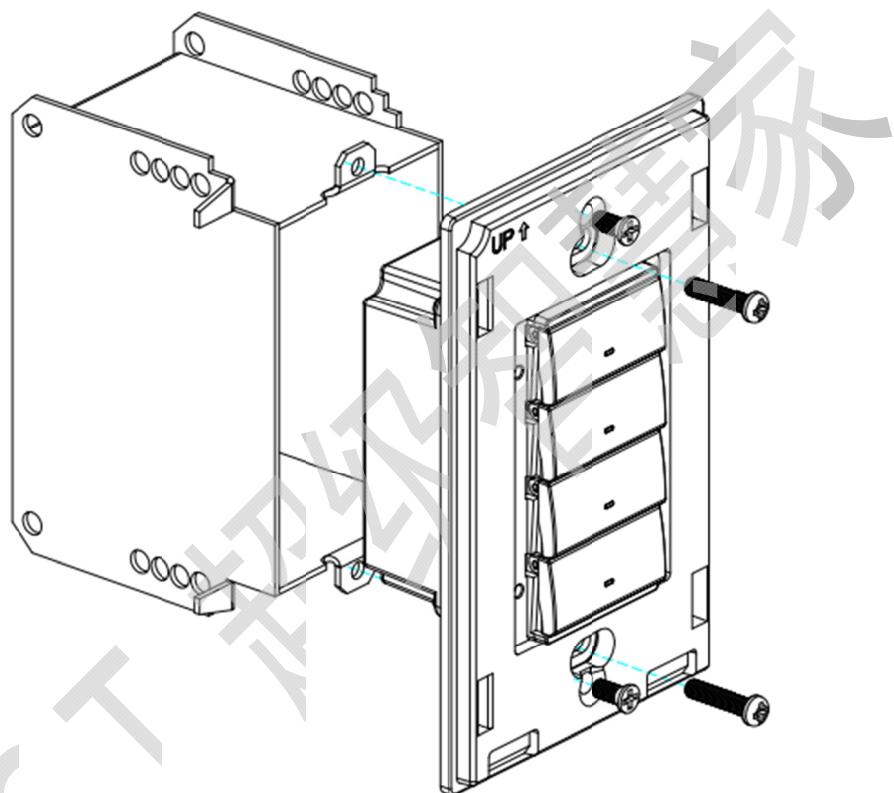

4. Align the top end of the panel with the bottom case and place it in the bayonet.

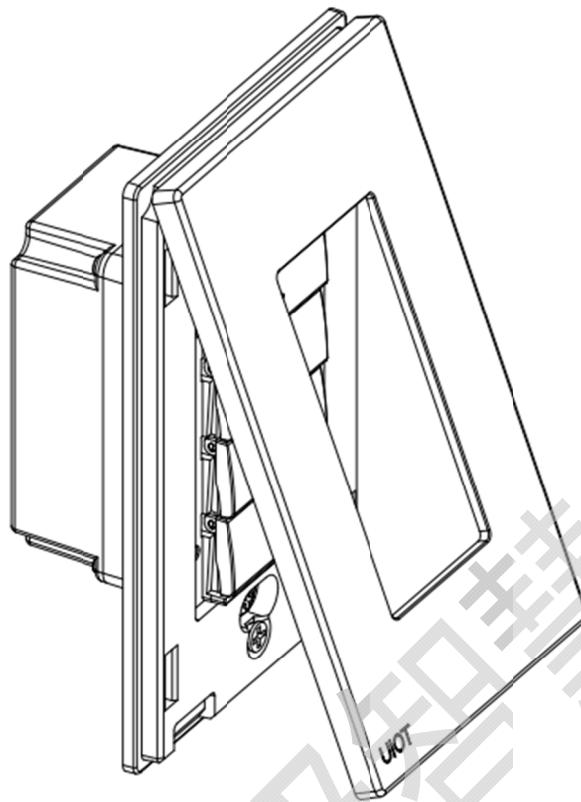


5. Press the lower end of the panel to the bottom of the shell to complete the product installation.

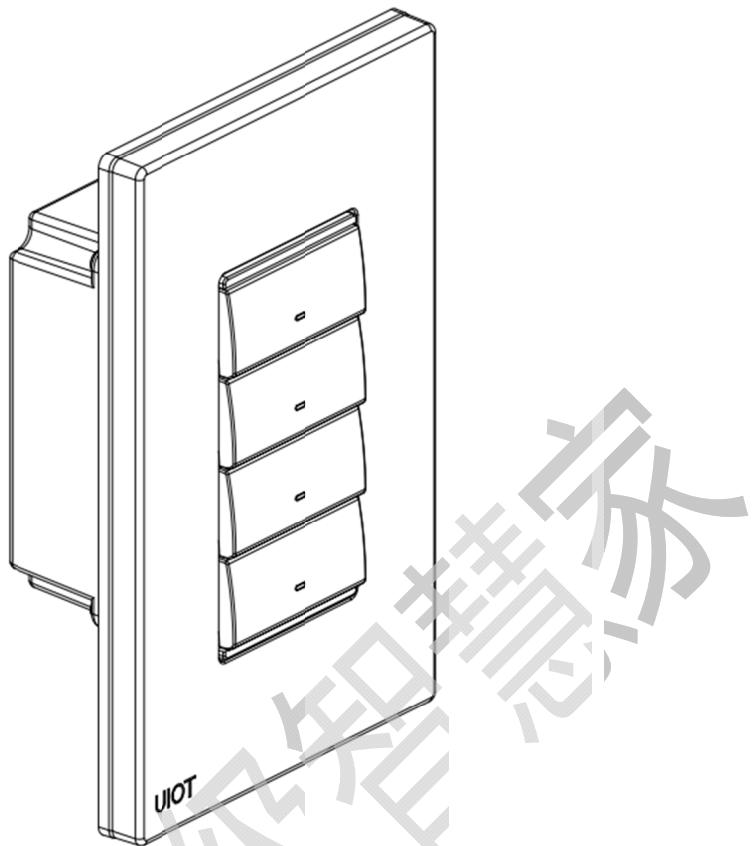


## 4 Network access instructions

### 4.1. Network access instructions

1. After the device is powered normally, connect the smart server, register and log in to the smart home APP as shown below: Click “My” in the area indicated by the arrow in the lower right corner.

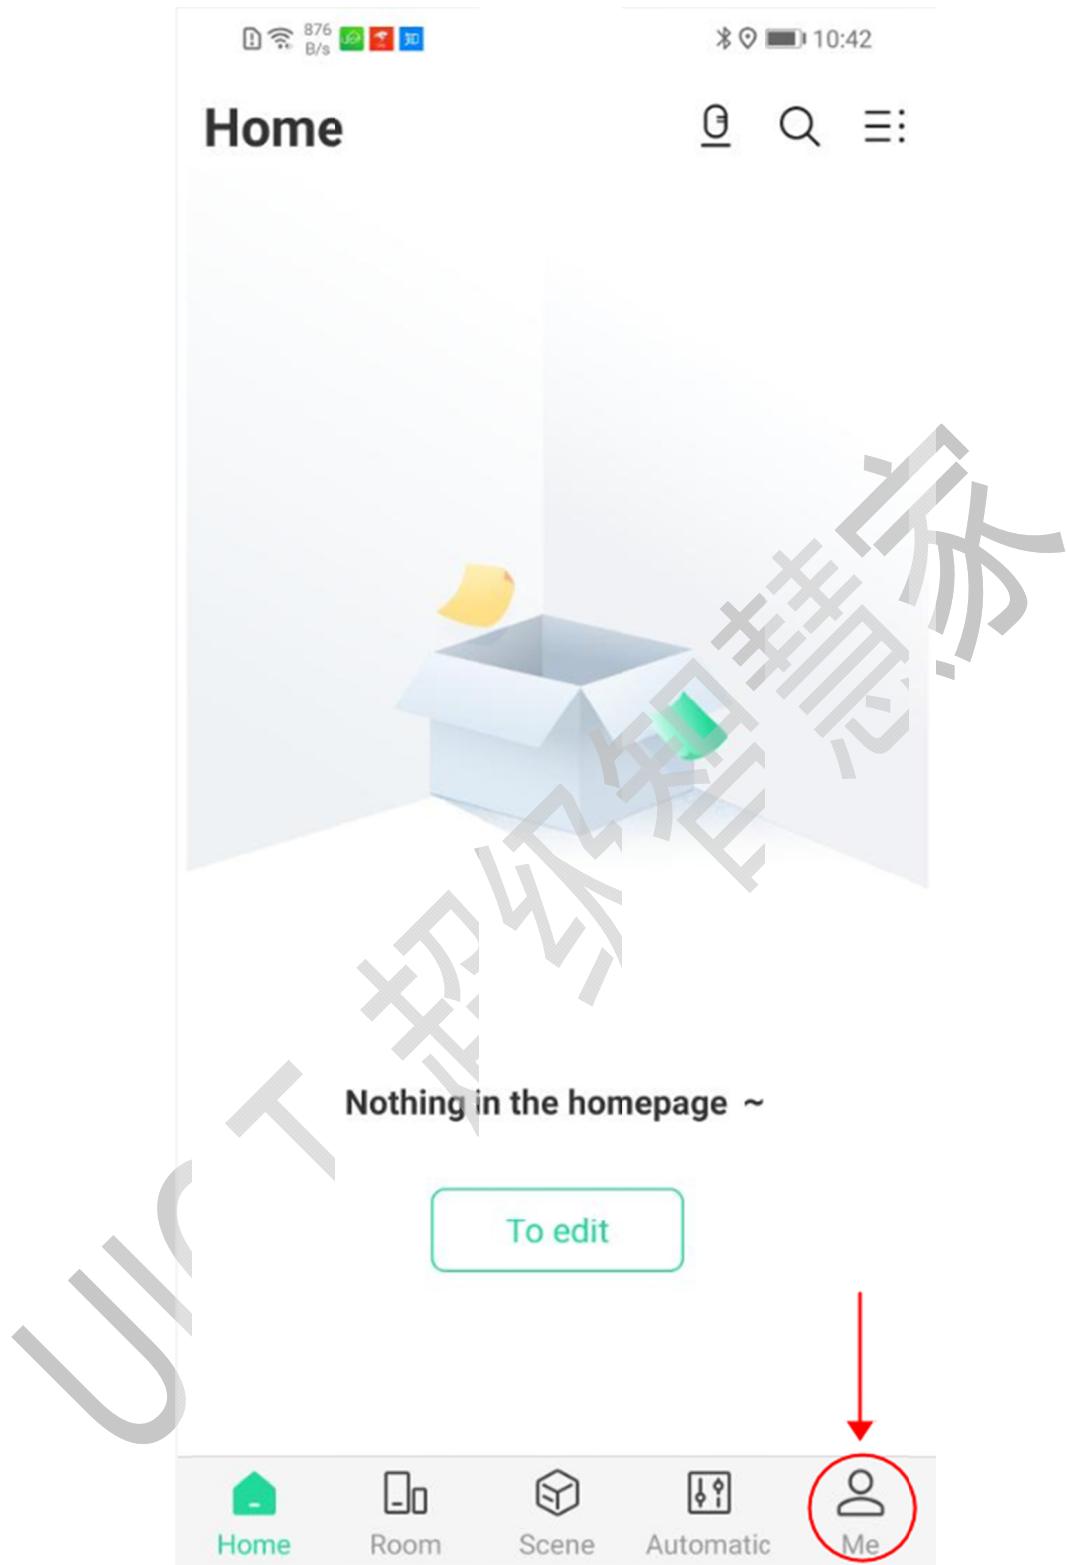


2. Go to the interface shown below and click on “Device Management” at the red arrow in the upper left corner of the interface shown below.

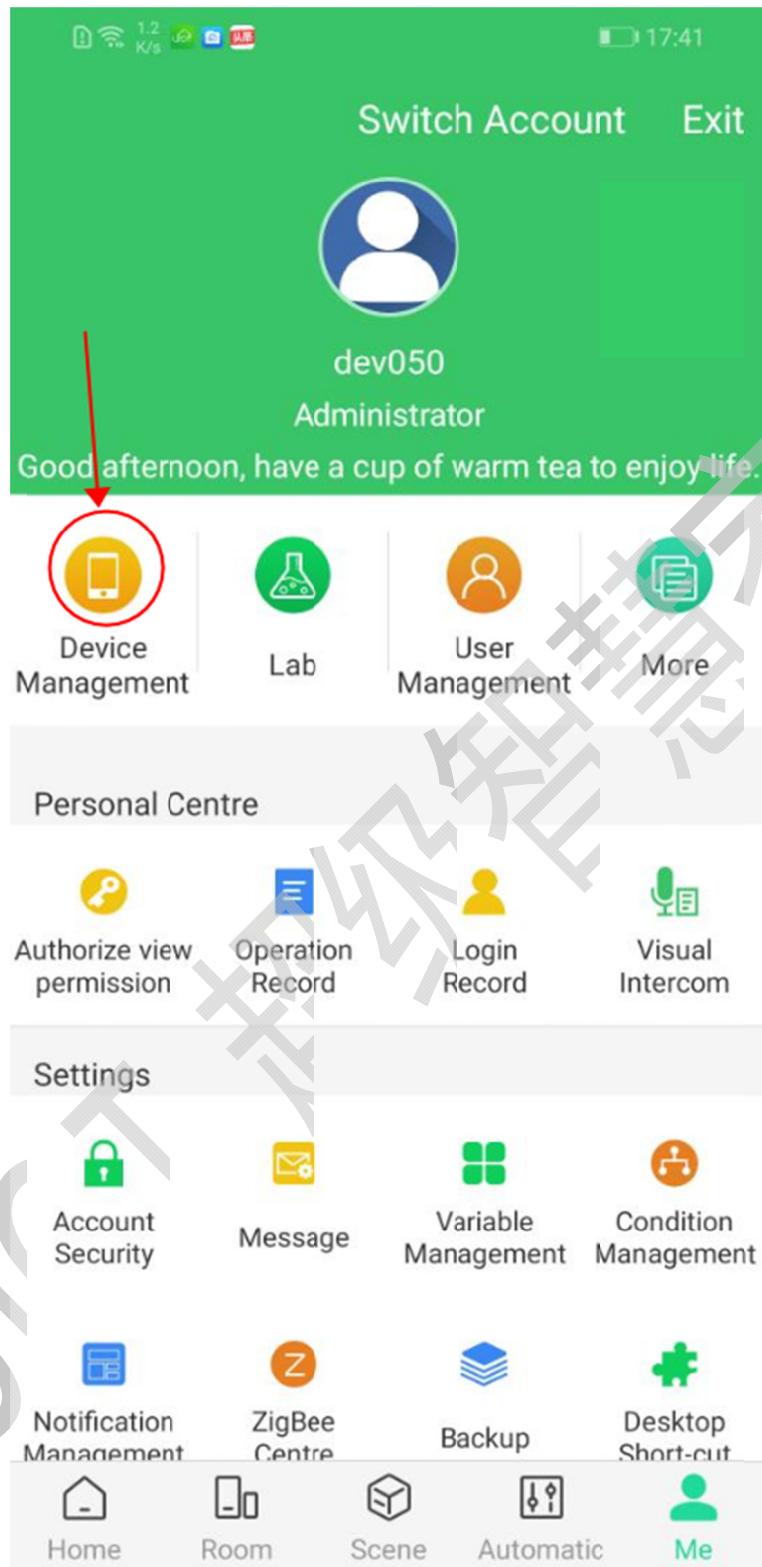

3. Go to the device management interface below and click the “+” sign in the red arrow at the top right of the screen to add the device.




4. After entering the device type selection interface, as shown in the figure below, find the “scene” indicated by the red arrow in the figure below and click to proceed to the next step.

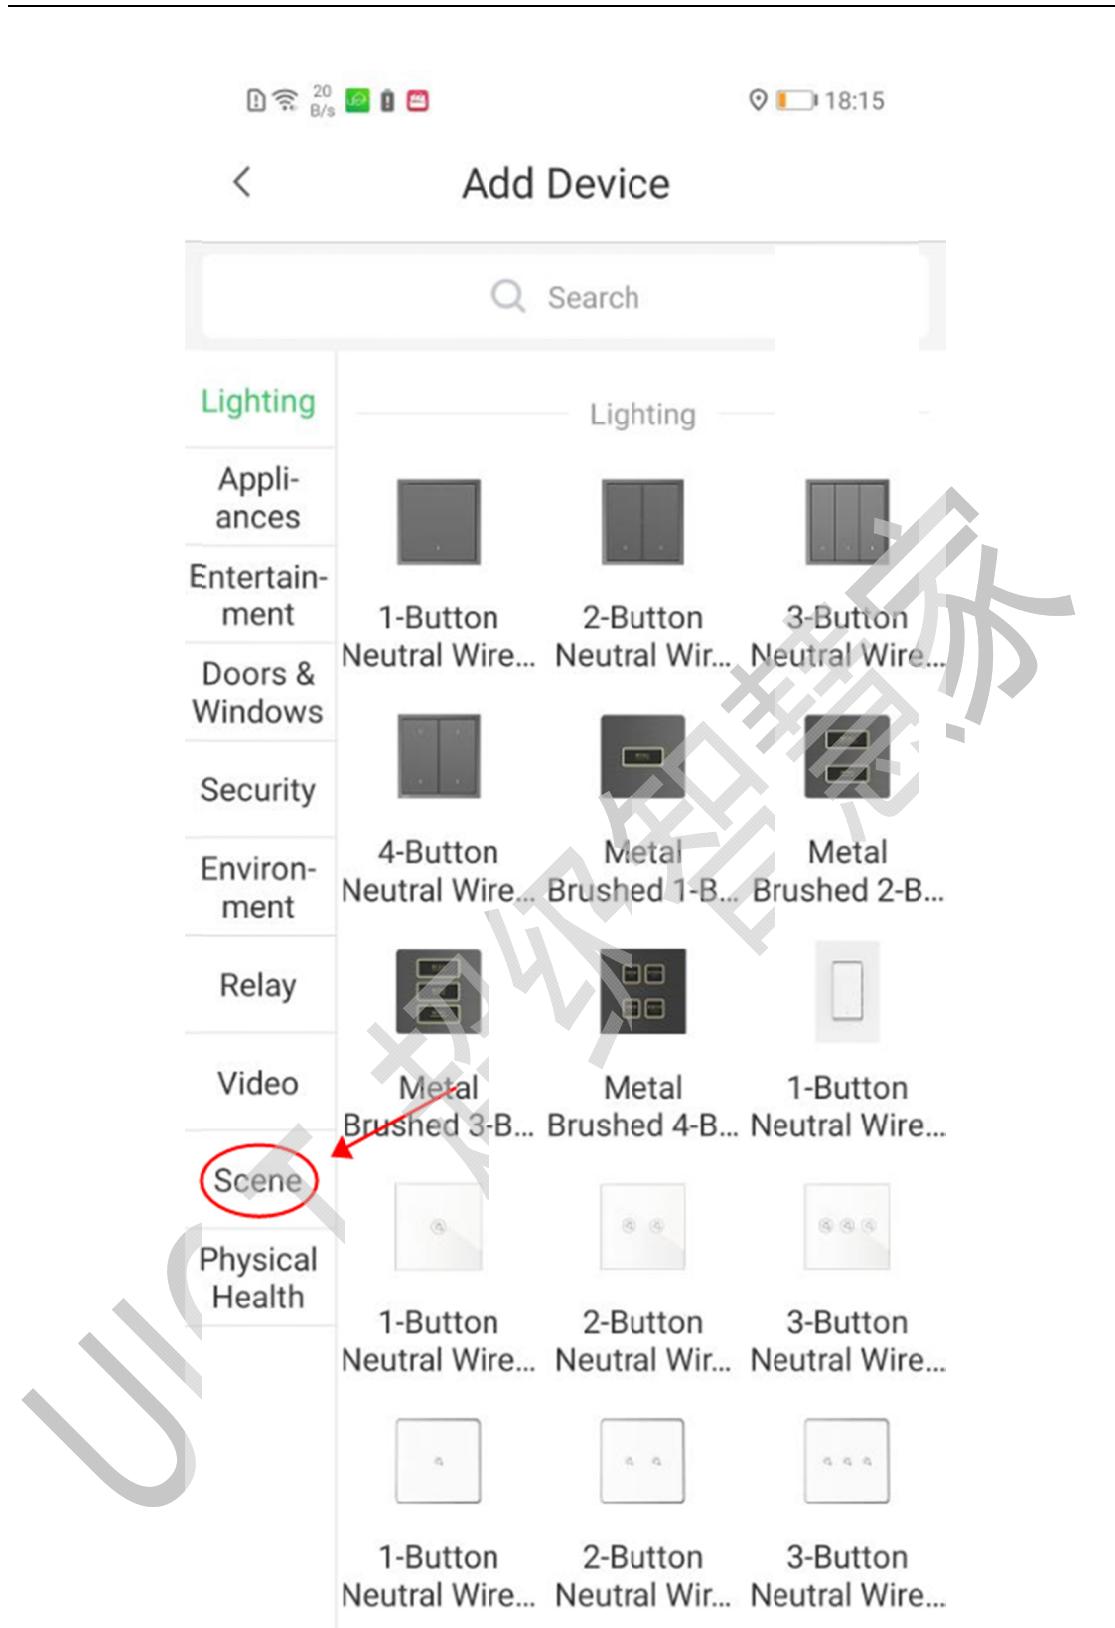

5. In the "Select Device Type" interface, find the "Four-Button Scene Machine" icon as shown in the figure below, and click to go to the next step.


&lt;

## Add Device

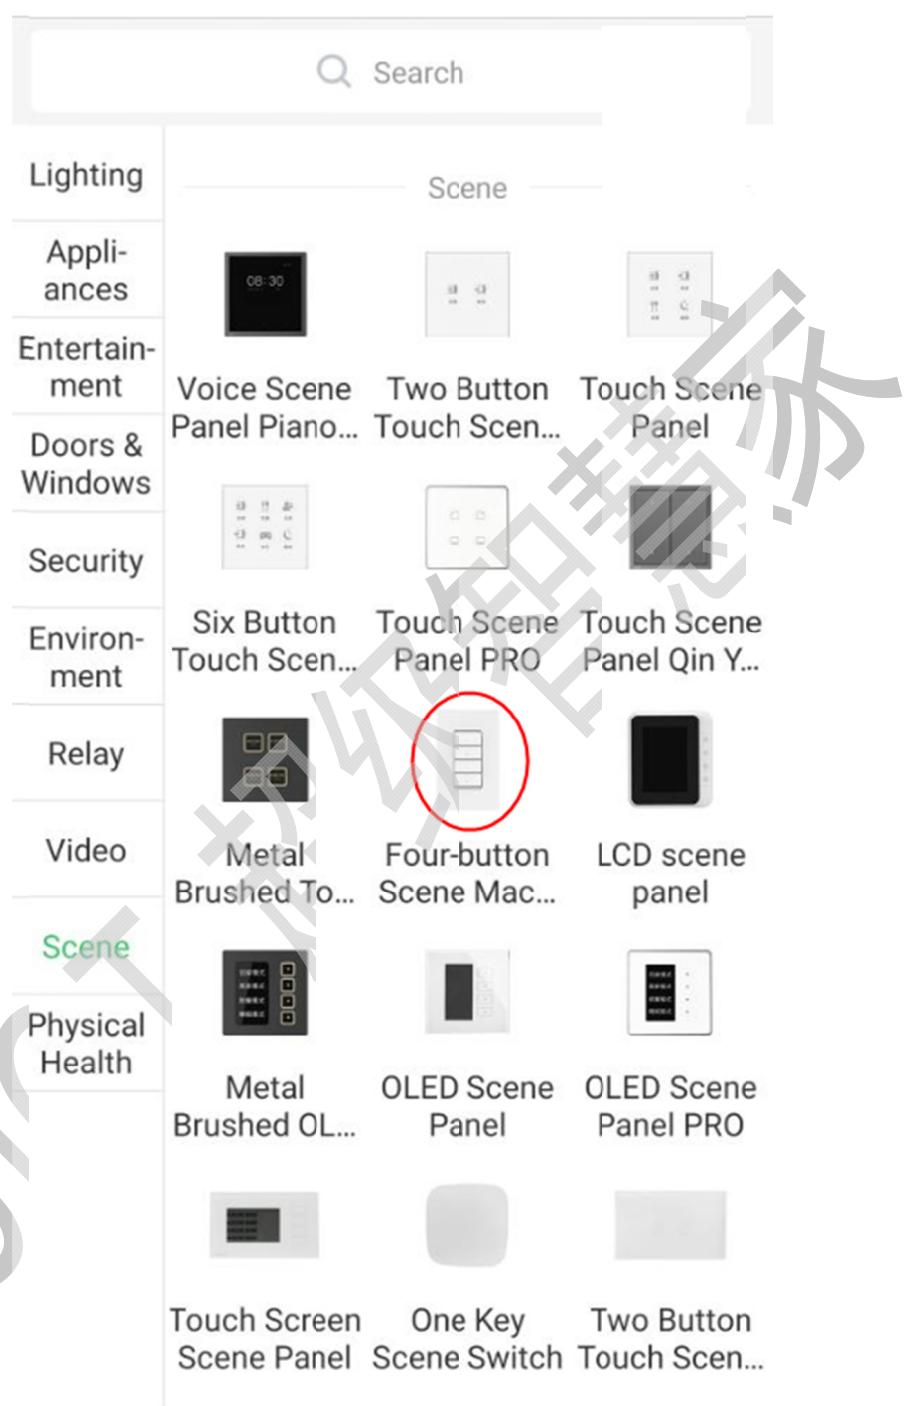

6. After clicking, enter the “Add Four-Button Scene Machine” interface below, and follow the interface prompts to enter the network. After entering the network,

you can put the device into the created room and name the device for easy operation and management.

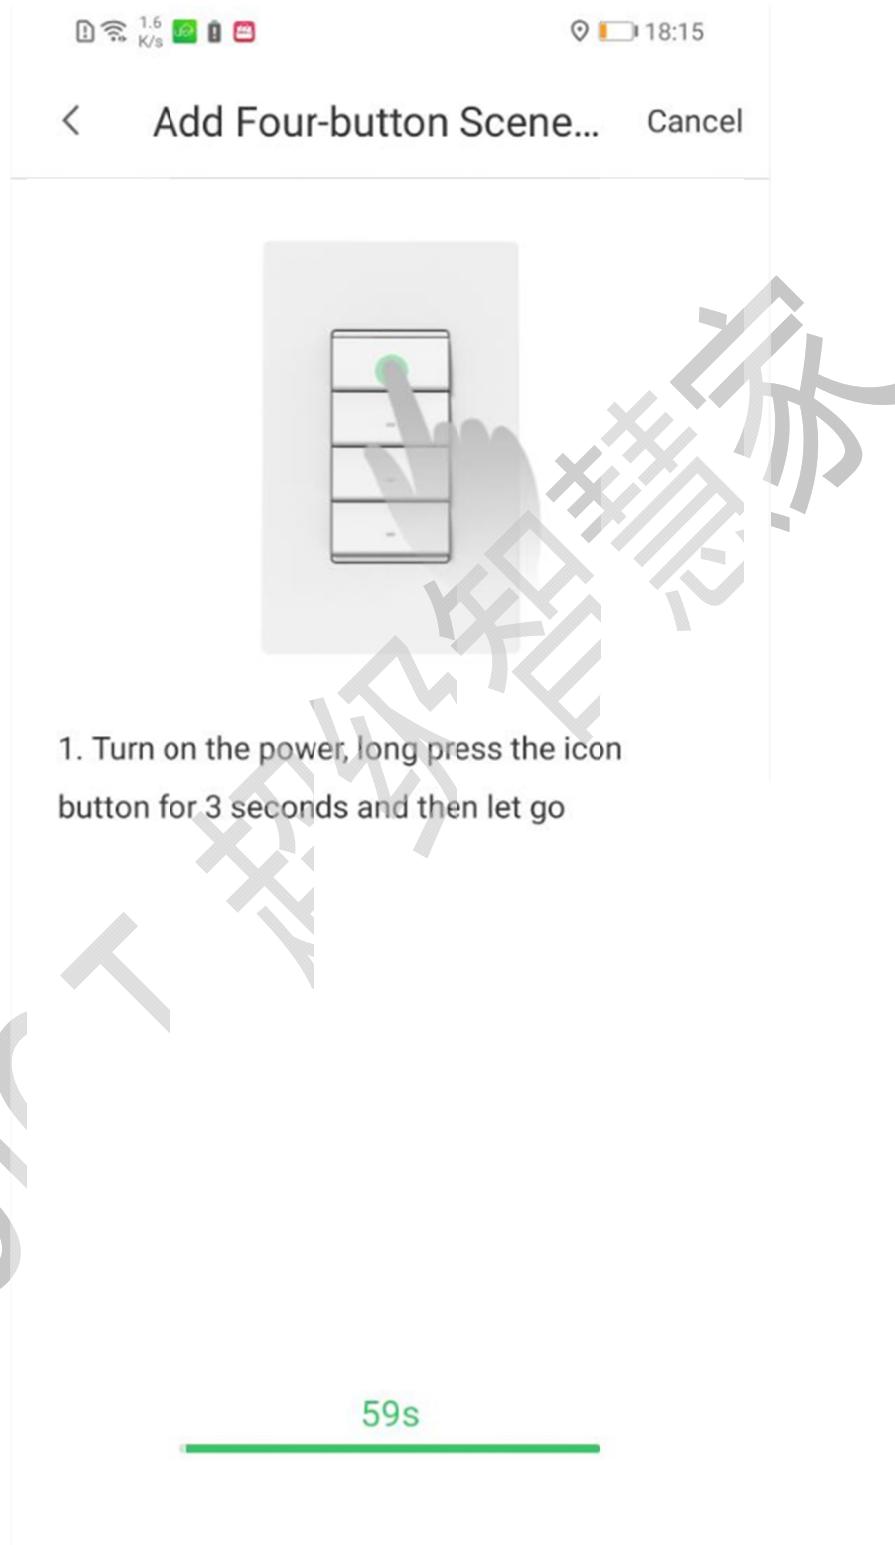

7. After the network is successfully accessed, you can find the room you created and the equipment after the network. Quick operation of power-on and power-off in the room.





## 5 Instructions for use

### 5. 1. Instructions for use

#### 1. Bind a custom scene in a room shortcut:

For example: Bind the scene "out of office". Click "+" to select the scene to bind.

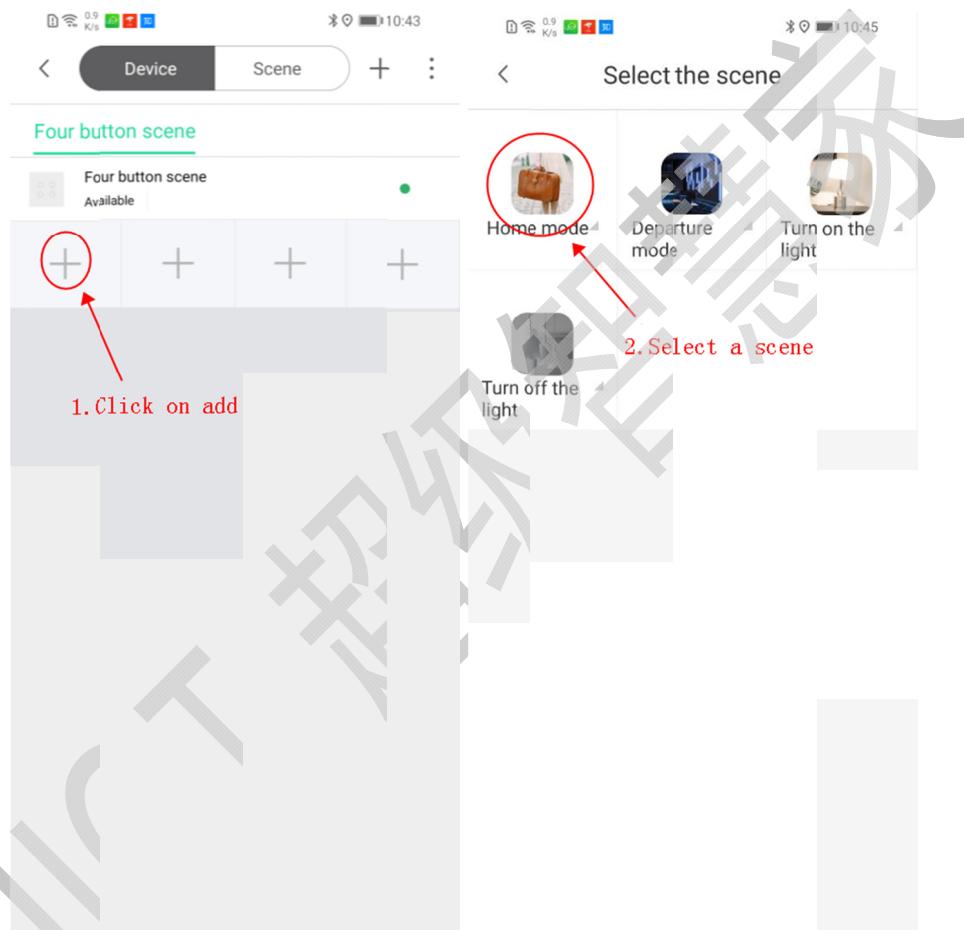

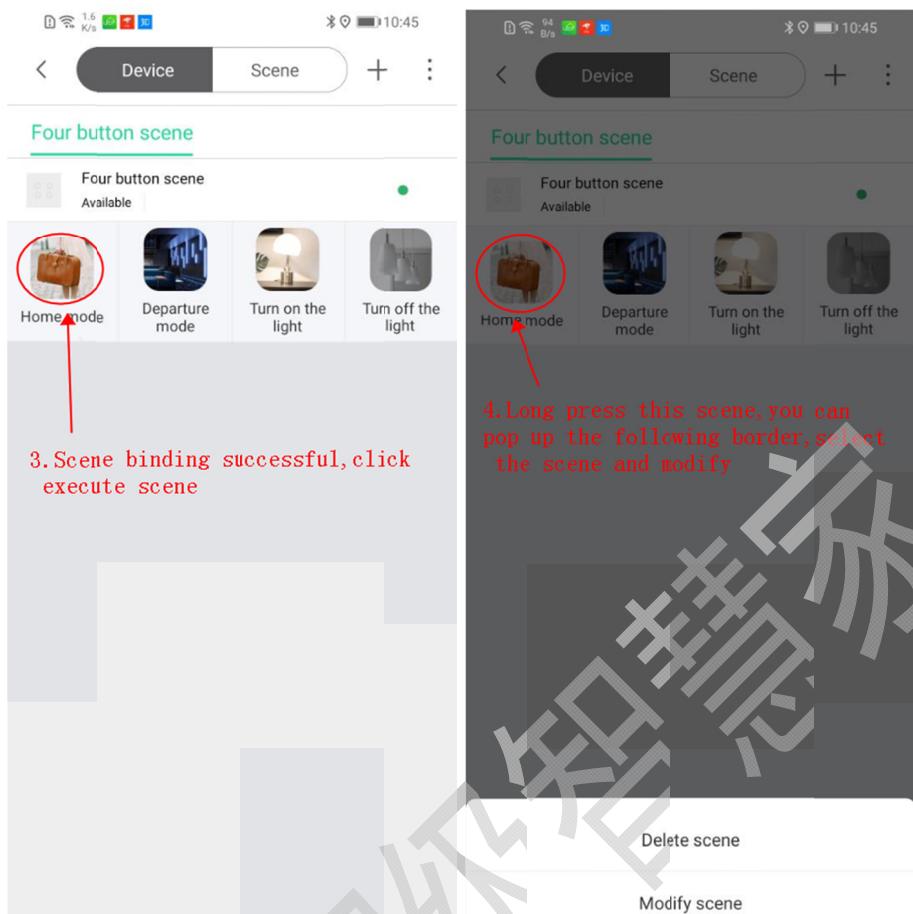

2. Click on the name of the scene to make the "More" interface.



### 5.1.1. **Device details**

Click on device details to view device details data:

- (1) Device information: View device name, belonging to the room, control method

---

- (2) Status: Online / Offline
- (3) Signal strength: show the signal strength of the product
- (4) Power supply mode: the power supply mode of the product
- (5) Software version: software version information of the product
- (6) Hardware version: hardware version information of the product
- (7) Address: Product Identification Number



## Four button scene

Device Information



State

Online

Signal Strength

Power Supply Mode

Power Supply

Software Version

V4.25

Hardware Version

V4.20


Address

0000f1f8

Search device

### 5.1.2. Backlight

After entering the backlight adjustment page, you can adjust the brightness of the backlight or turn off the backlight.

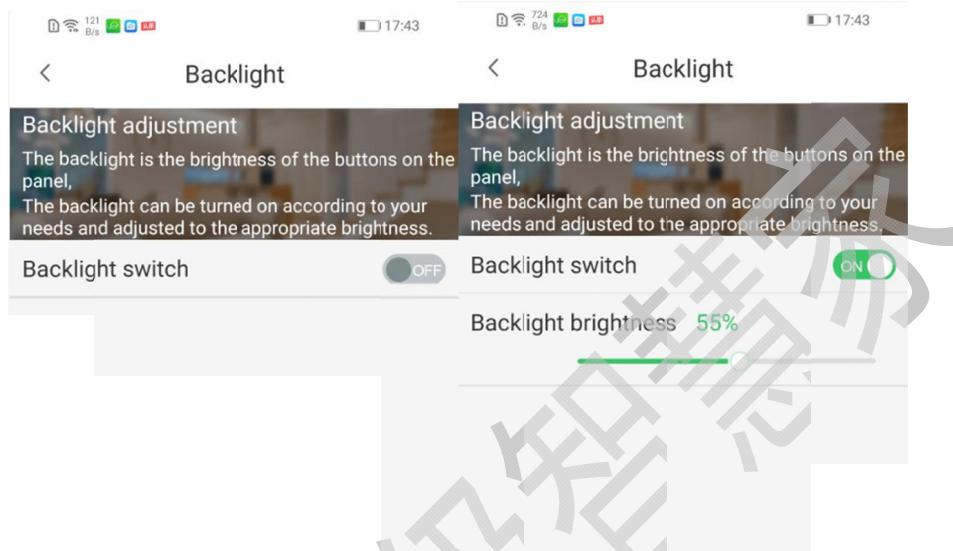

## 6 Product parameters

### 6.1. Product parameters

1. Product Size: 119X74X40.5 mm
2. Operating Voltage: AC120V±10% 50/60Hz
3. Operating Temperature: -10 °C~40 °C
4. Working Humidity: <90% RH (non-condensing)
5. Communication Mode: IEEE 802.15.4(Zigbee)

---

## 7 Common problem

## 8 Precautions

### 8. 1. Installation and use precautions

1. There are fragile devices in the product, please avoid destructive actions such as falling and heavy pressure.
2. The product is a precision electronic device, pay attention to waterproof and avoid high temperature during use.
3. Do not drop foreign objects into the machine.
4. Do not disassemble or modify the unit in any way.
5. The main power supply must be cut off during installation to avoid accidents.
6. Wiring in strict accordance with the product wiring diagram.
7. Do not press the device hard during the wiring process to avoid damage to the device.
8. When fixing the bottom case, do not press hard to avoid damage to the case.
9. Do not install the device in a humid environment.

### 8. 2. Caveat

To prevent damage or property damage, be sure to follow the instructions and instructions below.



What this picture shows is that you cannot do the following [prohibited] content:

1. Absolute prohibition of disassembly: Non-professionals are prohibited from disassembly and modification to avoid damage or harm.

---

2. Prohibit product water: It may cause short circuit and electric shock. The water on the panel will affect the sensitivity of the button.
3. It is forbidden to use other AC power sources: using the power supply beyond the specifications will damage the product or cause harm.
4. It is forbidden to use in high temperature, humidity and water in the bathroom: it is easy to cause leakage, electric shock, fire and other hazards.



As shown in this figure, be sure to perform the following [mandatory] contents.

1. Do not touch flammable substances or sources of ignition.



The content indicated by this mark is [indoor use].



What this sign indicates is [assuming the possibility of death or serious injury].


1. It is forbidden to use alcohol or organic solvent to wipe: it is responsible for damage or fire caused by electric shock or fire.



The content indicated by this mark is [cannot be placed in the trash can].



The content indicated by this mark is [high voltage danger].



The content represented by this mark is [Class 2].

UIOT-超級知識家

---

## RF exposure statement

This equipment complies with the FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and any part of your body.

This equipment meets the exemption from the routine evaluation limits in section 2.5 of RSS-102. It should be installed and operated with a minimum distance of 20cm between the radiator and any part of your body.

Cet équipement est conforme à l'exemption des limites d'évaluation habituelle de la section 2.5 de la norme RSS-102. Il doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et toute partie de votre corps.

## FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## IC WARNING

This device contains licence-exempt transmitter(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.