




- NOTES:**
- 1) DECAL MATERIAL:
BASE MATERIAL: 2 MIL (0.05 mm) THICK VINYL
OVERLAMINATE: 1MIL (0.025 mm) THICK CLEAR MYLAR
OVER GRAPHICS, UV RATED FOR
OUTDOOR USE
ADHESIVE: 1.8 MIL (0.046 mm) THICK 3M 350
LINER: DECAL P/N PLACED ON TAB NEXT TO DECAL FOR
REFERENCE
 - 2) LABEL MUST BE SUITABLE FOR THE FOLLOWING:
- INDOOR AND OUTDOOR USE.
- FOR SURFACE TEMPERATURES -40° TO 160°F (-40° TO 71°C).
 - 3) ARTWORK TO BE APPROVED BY EMERSON PROFESSIONAL TOOLS
 - 4) ALL TEXT TO BE AS SPECIFIED.
 - 5) SUPPLIER CHANGE MUST BE APPROVED BY ENGINEERING.
 - 6) PRODUCT MUST COMPLY TO ALL LATEST APPLICABLE MATERIAL
COMPLIANCE REGULATIONS INCLUDING BUT NOT LIMITED TO REACH,
RoHS, AND CALIFORNIA PROP 65. SEE RIDGE TOOL OP STD 1-106.
 - 7) COLORS:
BLACK PANTONE 2C ON PURE WHITE BACKGROUND

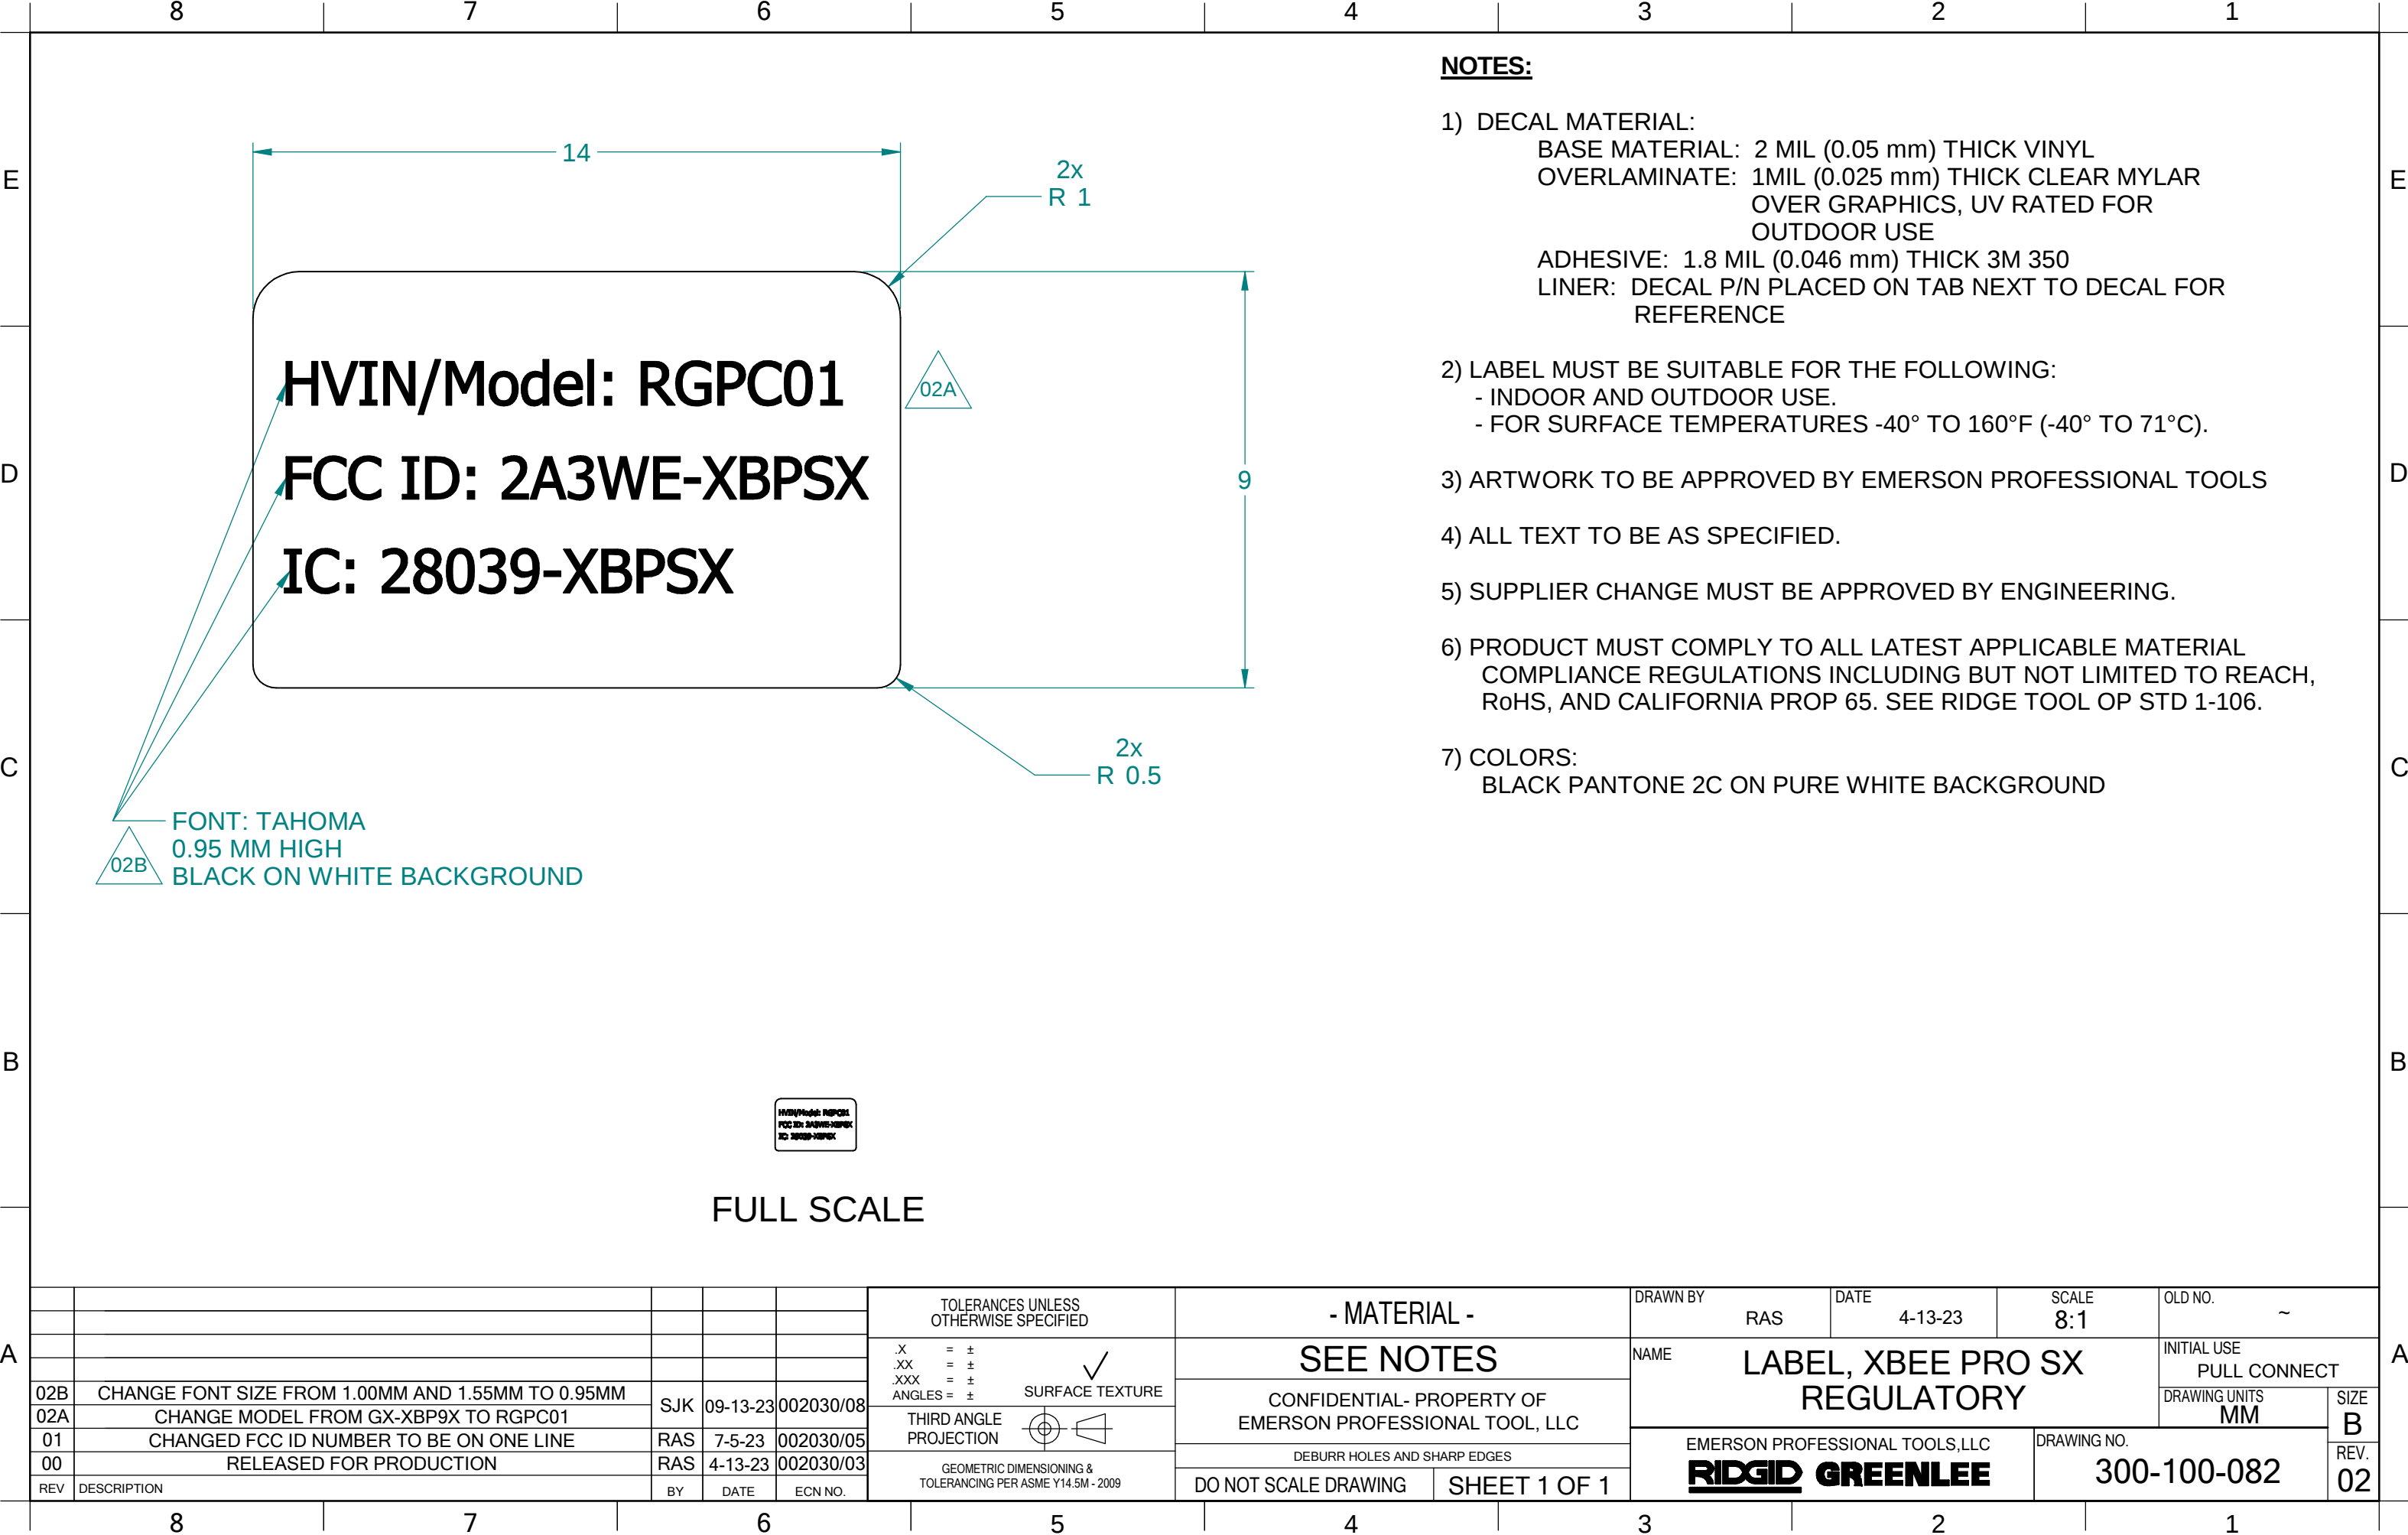

FULL SCALE

						TOLERANCES UNLESS OTHERWISE SPECIFIED		- MATERIAL -		DRAWN BY RAS		DATE 4-13-23		SCALE 8:1		OLD NO. ~	
								SEE NOTES		NAME LABEL, XBEE PRO SX REGULATORY		INITIAL USE PULL CONNECT		DRAWING UNITS MM		SIZE B	
								CONFIDENTIAL- PROPERTY OF EMERSON PROFESSIONAL TOOL, LLC									
								SURFACE TEXTURE		DEBURR HOLES AND SHARP EDGES		EMERSON PROFESSIONAL TOOLS,LLC		DRAWING NO. 300-100-082		REV. 02	
								THIRD ANGLE PROJECTION									
								GEOMETRIC DIMENSIONING & TOLERANCING PER ASME Y14.5M - 2009		DO NOT SCALE DRAWING		SHEET 1 OF 1					
02B		CHANGE FONT SIZE FROM 1.00MM AND 1.55MM TO 0.95MM		SJK		09-13-23		002030/08									
02A		CHANGE MODEL FROM GX-XBP9X TO RGPC01															
01		CHANGED FCC ID NUMBER TO BE ON ONE LINE		RAS		7-5-23		002030/05									
00		RELEASED FOR PRODUCTION		RAS		4-13-23		002030/03									
REV		DESCRIPTION		BY		DATE		ECN NO.									