


Test Mode	TX AC80 Mode Channel 155 (UNII-3)	Phase	Neutral
-----------	-----------------------------------	-------	---------

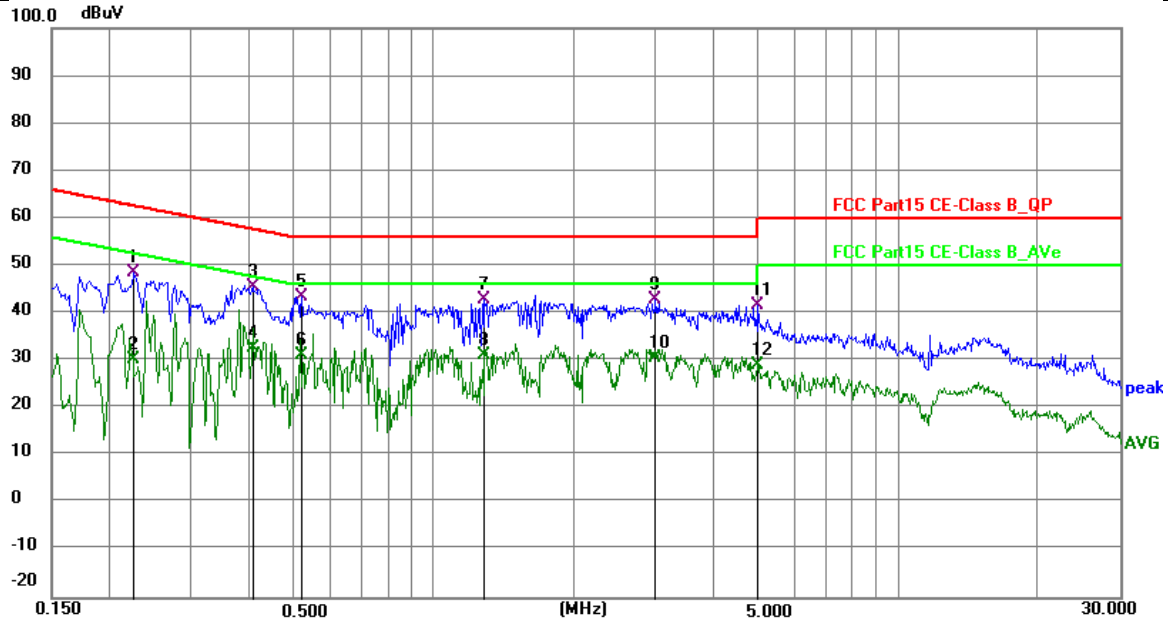

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2265	39.01	9.63	48.64	62.58	-13.94	QP	P	
2	0.2265	20.52	9.63	30.15	52.58	-22.43	AVG	P	
3 *	0.4063	35.91	9.62	45.53	57.72	-12.19	QP	P	
4	0.4063	23.01	9.62	32.63	47.72	-15.09	AVG	P	
5	0.5190	33.89	9.62	43.51	56.00	-12.49	QP	P	
6	0.5190	21.61	9.62	31.23	46.00	-14.77	AVG	P	
7	1.2884	33.30	9.64	42.94	56.00	-13.06	QP	P	
8	1.2884	21.61	9.64	31.25	46.00	-14.75	AVG	P	
9	2.9940	33.18	9.65	42.83	56.00	-13.17	QP	P	
10	2.9940	20.98	9.65	30.63	46.00	-15.37	AVG	P	
11	5.0010	32.04	9.68	41.72	60.00	-18.28	QP	P	
12	5.0010	19.24	9.68	28.92	50.00	-21.08	AVG	P	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.


APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX AC80 Mode Channel 155 (UNII-3)	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

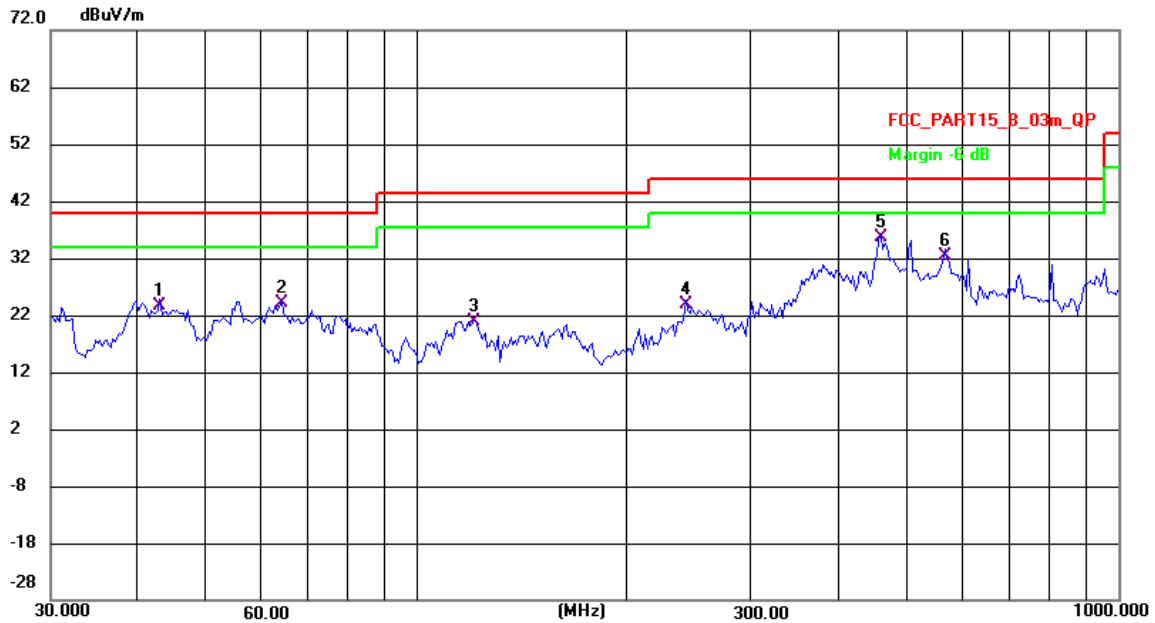


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	42.9305	45.75	-22.17	23.58	40.00	-16.42	QP	P	
2	64.0800	47.16	-23.15	24.01	40.00	-15.99	QP	P	
3	120.6117	43.69	-22.73	20.96	43.50	-22.54	QP	P	
4	241.8377	47.85	-23.91	23.94	46.00	-22.06	QP	P	
5 *	458.3987	53.25	-17.61	35.64	46.00	-10.36	QP	P	
6	565.9775	47.36	-14.89	32.47	46.00	-13.53	QP	P	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AC80 Mode Channel 155 (UNII-3)	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

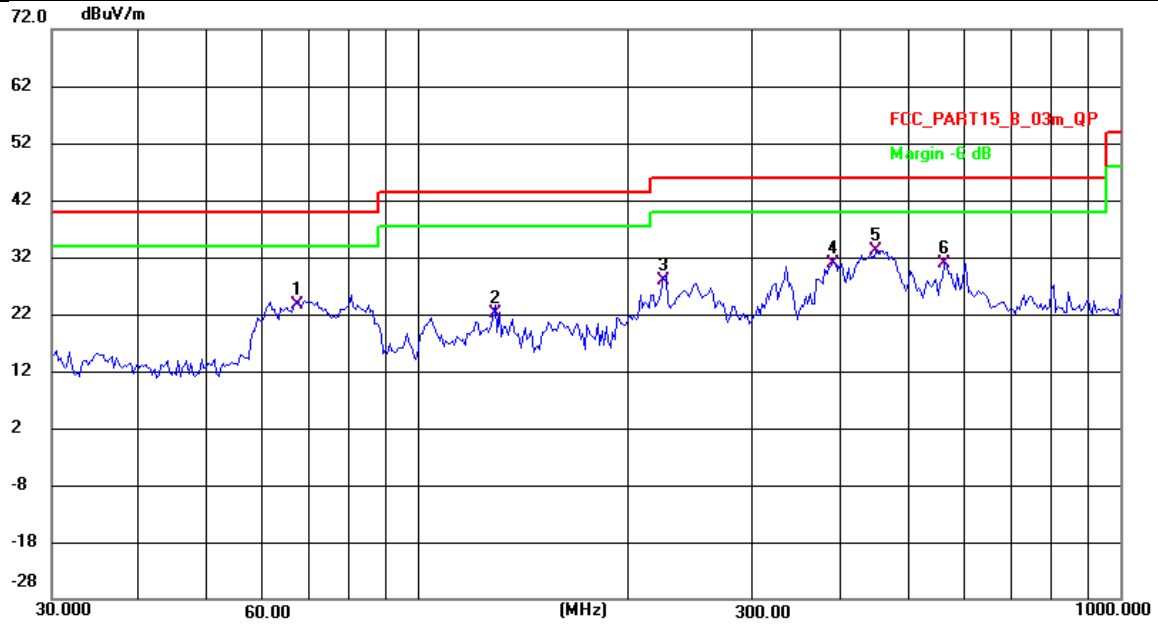

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	67.3108	47.32	-23.63	23.69	40.00	-16.31	QP	P	
2	128.4861	44.19	-22.18	22.01	43.50	-21.49	QP	P	
3	223.8481	53.11	-25.15	27.96	46.00	-18.04	QP	P	
4	389.9874	50.41	-19.55	30.86	46.00	-15.14	QP	P	
5 *	448.8361	50.86	-17.81	33.05	46.00	-12.95	QP	P	
6	562.0143	45.92	-15.03	30.89	46.00	-15.11	QP	P	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Result of Band edges.

TestMode	Antenna	ChName	Freq(MHz)	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	Low	5180	-40.81	≤ -27	PASS
		High	5320	-40.77	≤ -27	PASS
		Low	5500	-38.41	≤ -27	PASS
		High	5700	-39.25	≤ -27	PASS
11N20SISO	Ant1	Low	5180	-41.3	≤ -27	PASS
		High	5320	-40.44	≤ -27	PASS
		Low	5500	-40.15	≤ -27	PASS
		High	5700	-40.72	≤ -27	PASS
11N40SISO	Ant1	Low	5190	-41.67	≤ -27	PASS
		High	5310	-40.86	≤ -27	PASS
		Low	5510	-38.87	≤ -27	PASS
		High	5670	-40.12	≤ -27	PASS
11AC20SISO	Ant1	Low	5180	-41.61	≤ -27	PASS
		High	5320	-40.24	≤ -27	PASS
		Low	5500	-40.05	≤ -27	PASS
		High	5700	-40.09	≤ -27	PASS
11AC40SISO	Ant1	Low	5190	-40.64	≤ -27	PASS
		High	5310	-40.53	≤ -27	PASS
		Low	5510	-40.08	≤ -27	PASS
		High	5670	-40.91	≤ -27	PASS
11AC80SISO	Ant1	Low	5210	-41.23	≤ -27	PASS
		High	5290	-39.53	≤ -27	PASS
		Low	5530	-40.43	≤ -27	PASS
		High	5610	-34.86	≤ -27	PASS


TestMode	Antenna	ChName	Freq(MHz)	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	Low	5745	5650~5700	-41.68	≤7.41	PASS
				5700~5720	-40.75	≤13.31	PASS
				5720~5725	-38.7	≤27.00	PASS
				5760~5650	-42.53	≤-27	PASS
		High	5825	5850~5855	-40.96	≤23.83	PASS
				5855~5875	-40.9	≤11.36	PASS
				5875~5925	-41.11	≤-1.28	PASS
				5925~5935	-42.26	≤-27	PASS
11N20SISO	Ant1	Low	5745	5650~5700	-41.25	≤-17.63	PASS
				5700~5720	-41.54	≤14.34	PASS
				5720~5725	-42.09	≤16.74	PASS
				5760~5650	-42.3	≤-27	PASS
		High	5825	5850~5855	-41.23	≤21.60	PASS
				5855~5875	-41.71	≤15.25	PASS
				5875~5925	-41.04	≤8.13	PASS
				5925~5935	-40.22	≤-27	PASS
11N40SISO	Ant1	Low	5755	5650~5700	-40.49	≤-1.74	PASS
				5700~5720	-41.69	≤15.47	PASS
				5720~5725	-41.42	≤22.14	PASS
				5780~5650	-41.75	≤-27	PASS
		High	5795	5850~5855	-42.32	≤24.57	PASS
				5855~5875	-41.32	≤11.38	PASS
				5875~5925	-40.76	≤-13.92	PASS
				5925~5935	-41.97	≤-27	PASS
11AC20SISO	Ant1	Low	5745	5650~5700	-41	≤-25.52	PASS
				5700~5720	-41.31	≤14.20	PASS
				5720~5725	-42.02	≤24.34	PASS
				5760~5650	-41.68	≤-27	PASS
		High	5825	5850~5855	-41.44	≤18.92	PASS
				5855~5875	-41.35	≤14.16	PASS
				5875~5925	-39.91	≤-5.62	PASS
				5925~5935	-41.35	≤-27	PASS
11AC40SISO	Ant1	Low	5755	5650~5700	-41.73	≤-5.22	PASS
				5700~5720	-37.82	≤15.25	PASS
				5720~5725	-37.89	≤21.25	PASS
				5780~5650	-41.61	≤-27	PASS
		High	5795	5850~5855	-41.72	≤25.12	PASS
				5855~5875	-41.24	≤14.59	PASS
				5875~5925	-41.25	≤8.02	PASS
				5925~5935	-41.7	≤-27	PASS
11AC80SISO	Ant1	Low	5775	5650~5700	-41.36	≤-1.61	PASS
				5700~5720	-40.11	≤14.98	PASS
				5720~5725	-41.98	≤22.84	PASS
				5800~5650	-41.18	≤-27	PASS
		High	5775	5850~5855	-41.75	≤22.34	PASS
				5855~5875	-41.8	≤10.48	PASS
				5875~5925	-41.43	≤5.89	PASS
				5925~5935	-41.8	≤-27	PASS

11A_Ant1_Low_5180

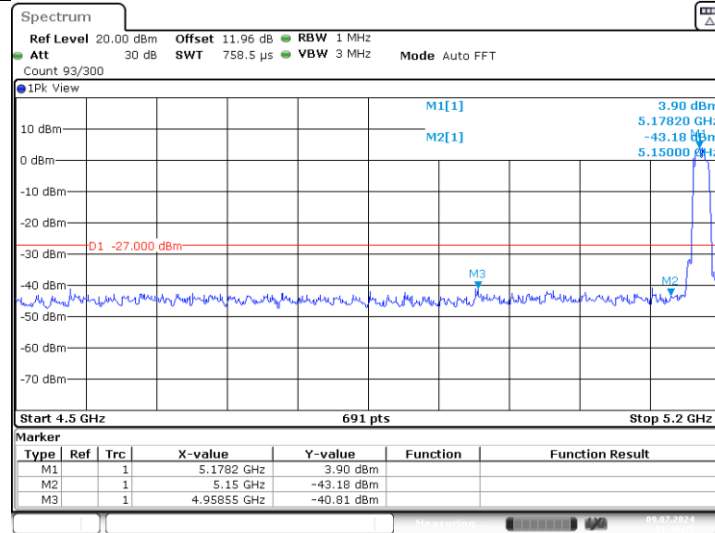


Date: 9.JUL.2024 11:48:45

11A_Ant1_High_5320

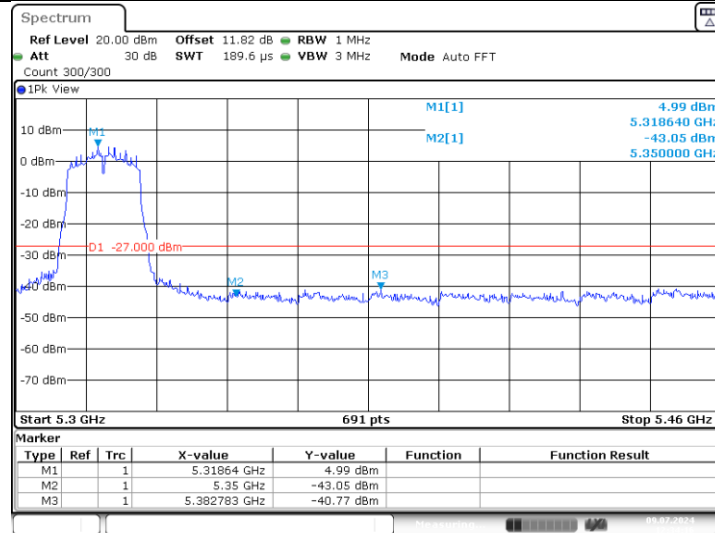


Date: 9.JUL.2024 12:34:16

11A_Ant1_Low_5500

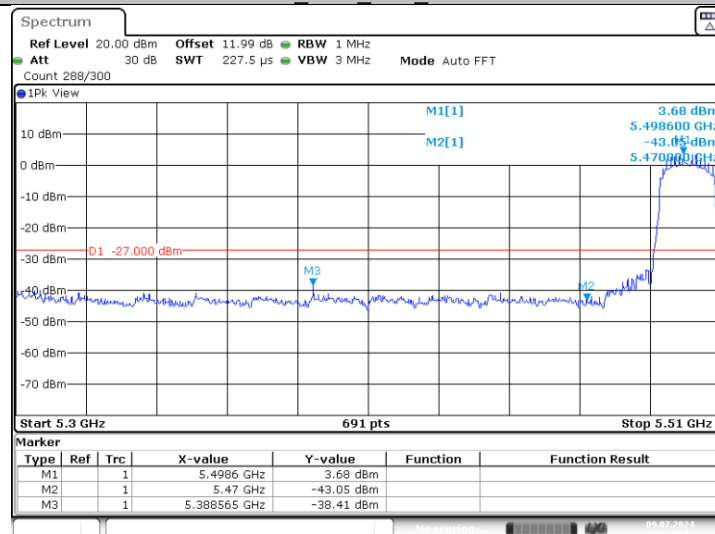


Date: 9.JUL.2024 12:40:43

11A_Ant1_High_5700

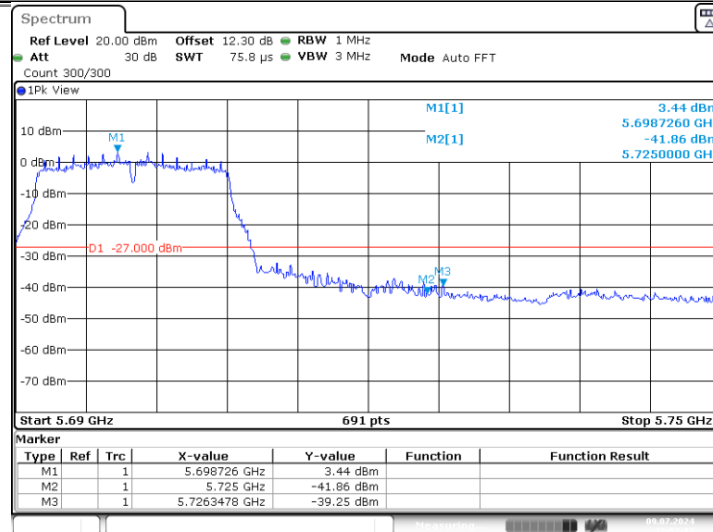


Date: 9.JUL.2024 12:52:12

11N20SISO Ant1 Low 5180

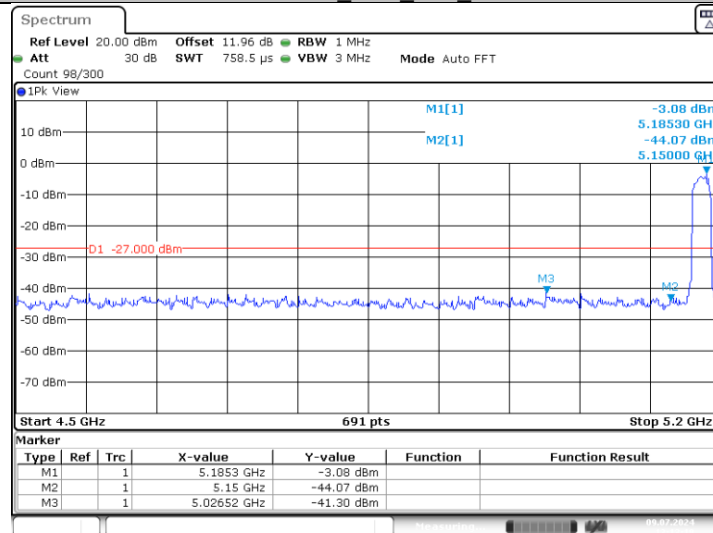


Date: 9.JUL.2024 13:13:19

11N20SISO Ant1 High 5320

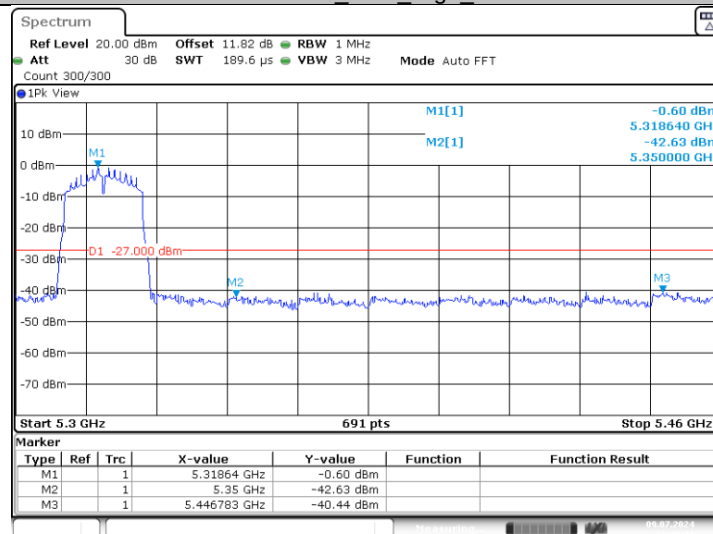


Date: 9.JUL.2024 13:40:32


11N20SISO Ant1 Low 5500

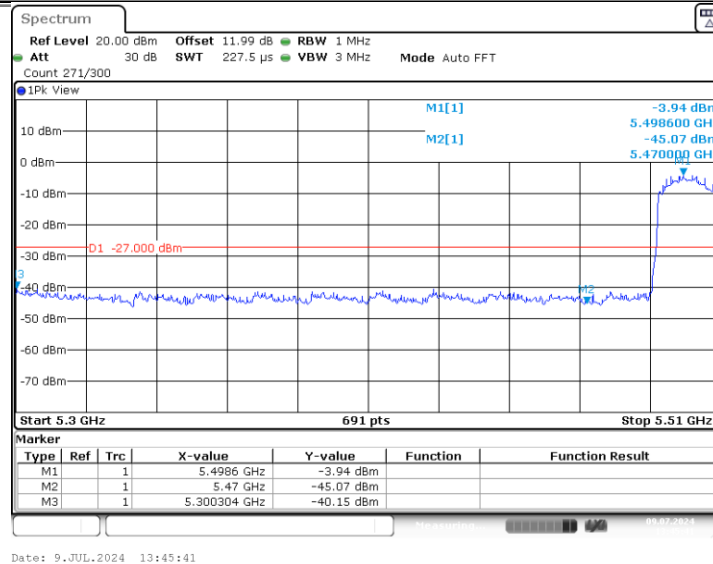


11N20SISO_Ant1_High_5700

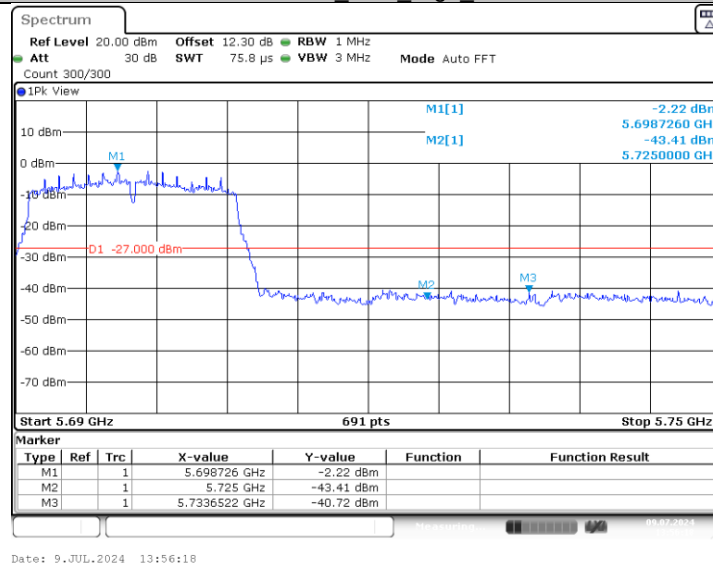


11N40SISO_Ant1_Low_5190

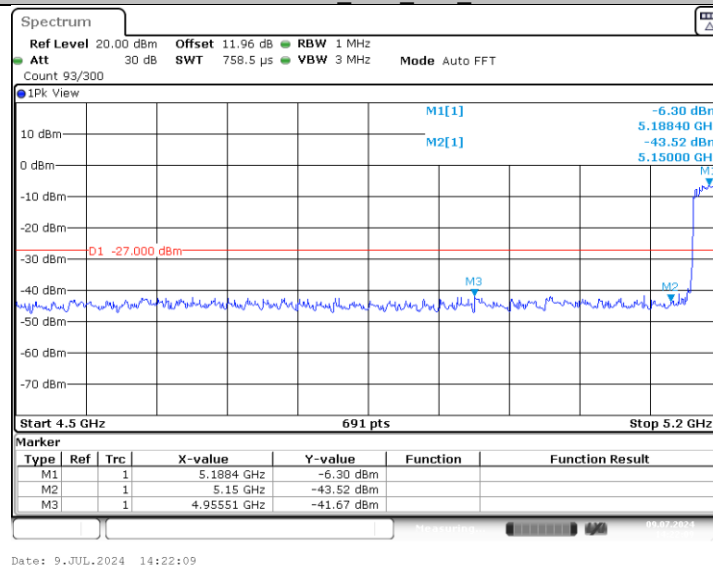


11N40SISO_Ant1_High_5310

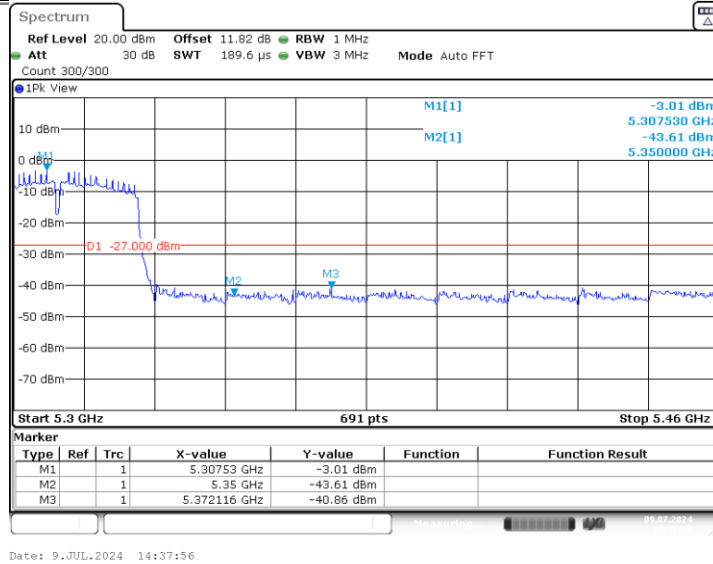


11N40SISO_Ant1_Low_5510

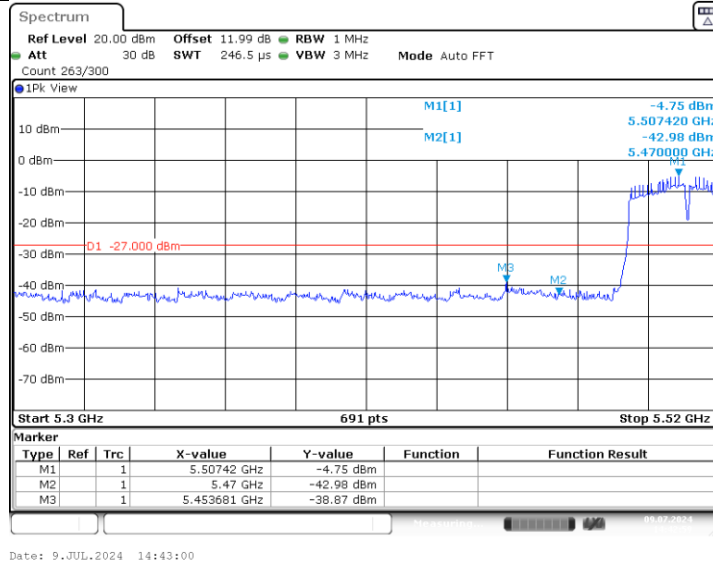


11N40SISO_Ant1_High_5670

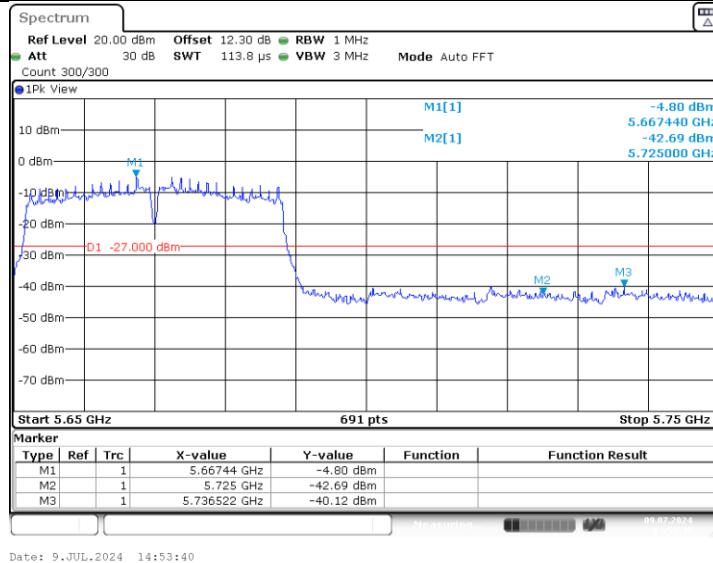


11AC20SISO_Ant1_Low_5180

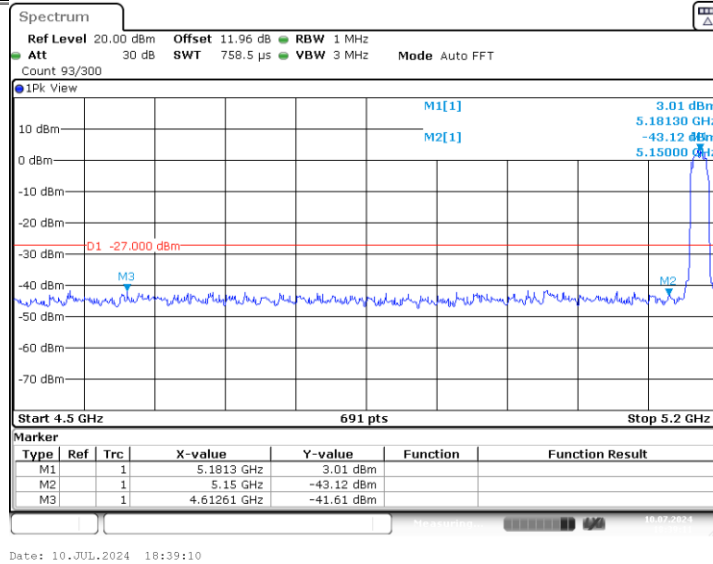


11AC20SISO_Ant1_High_5320

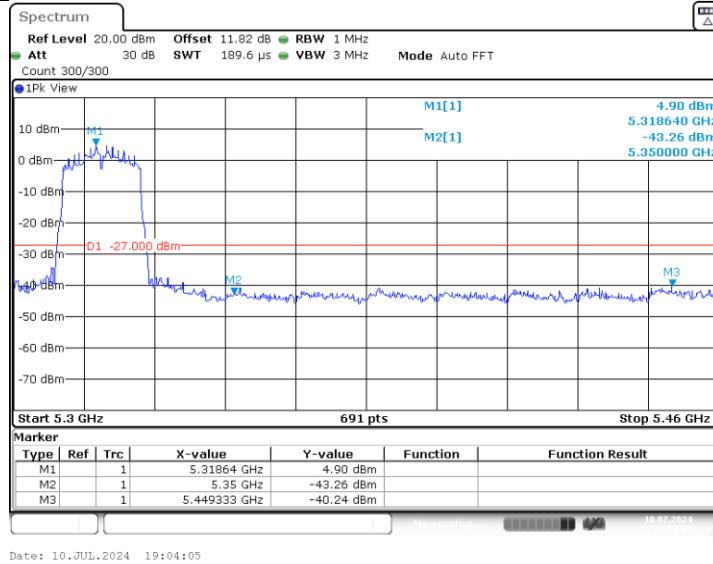


11AC20SISO_Ant1_Low_5500

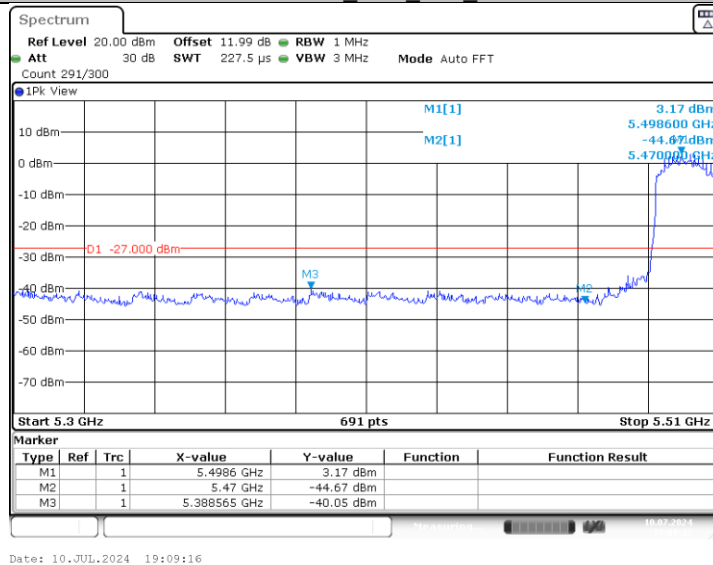


11AC20SISO_Ant1_High_5700

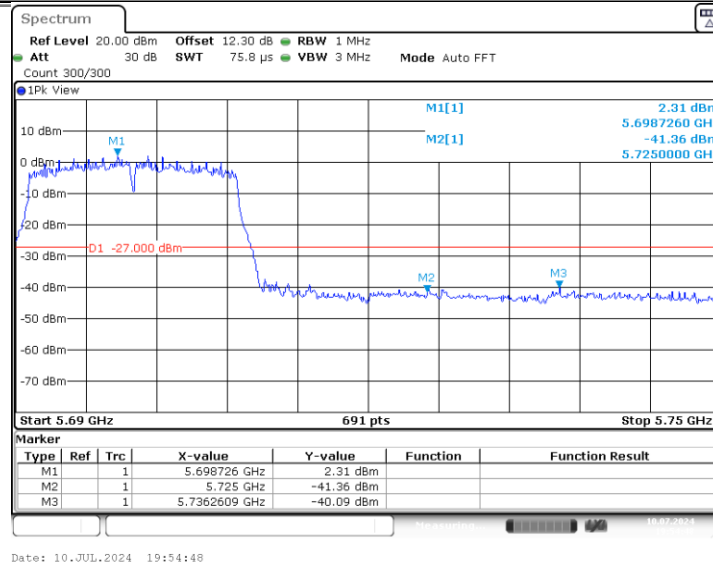


11AC40SISO_Ant1_Low_5190

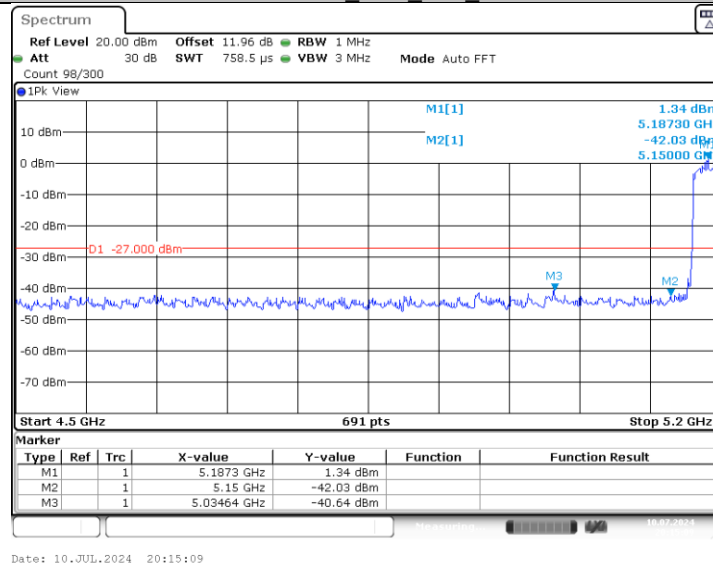

11AC40SISO_Ant1_High_5310

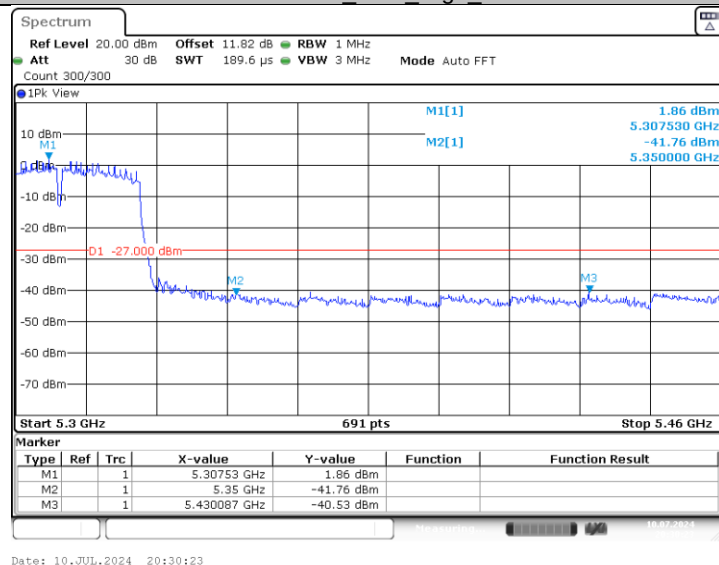


11AC40SISO_Ant1_Low_5510

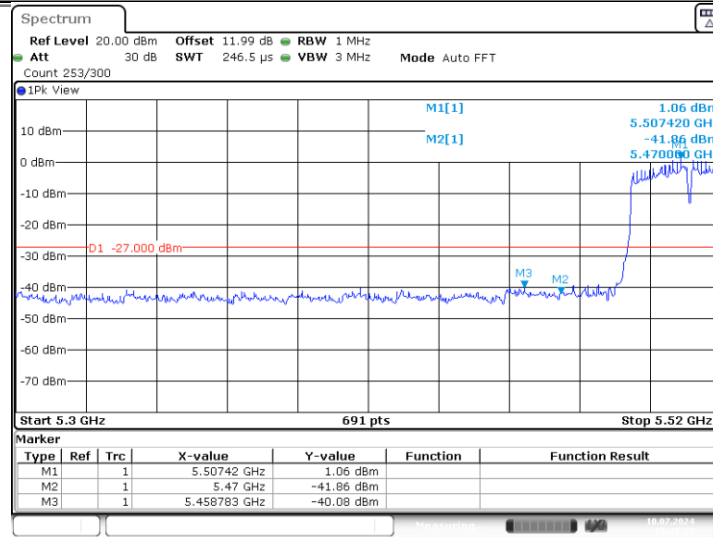


Date: 10.JUL.2024 20:35:23

11AC40SISO_Ant1_High_5670

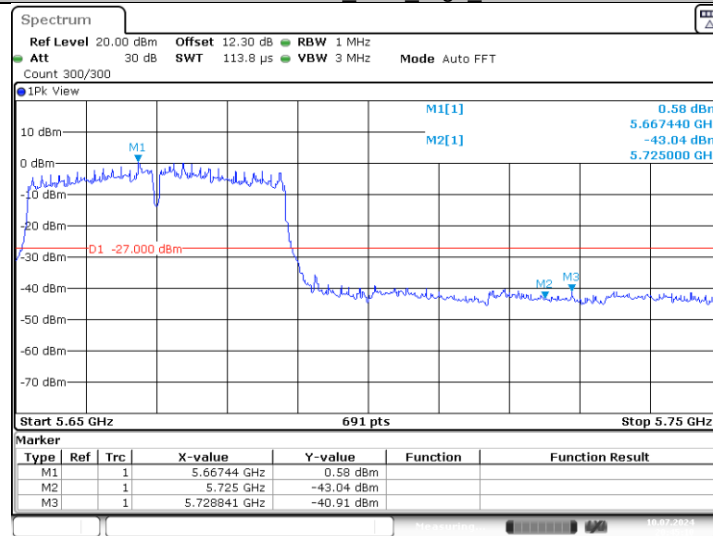


Date: 10.JUL.2024 20:45:10

11AC80SISO_Ant1_Low_5210

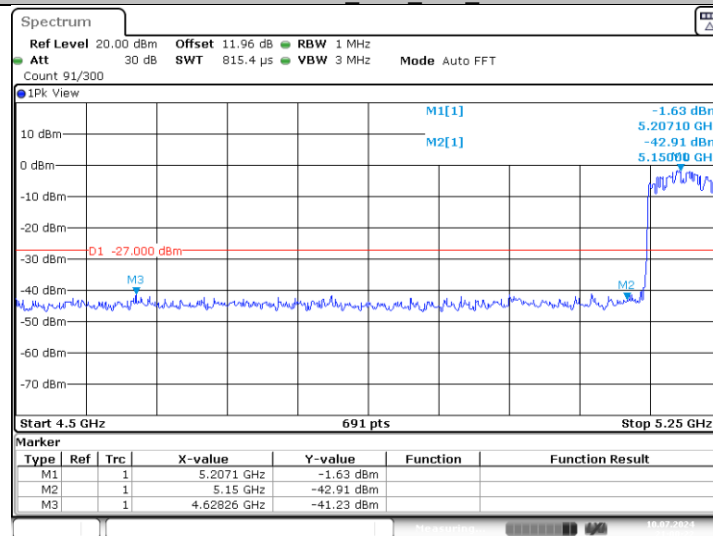


Date: 10.JUL.2024 21:00:22


11AC80SISO_Ant1_High_5290

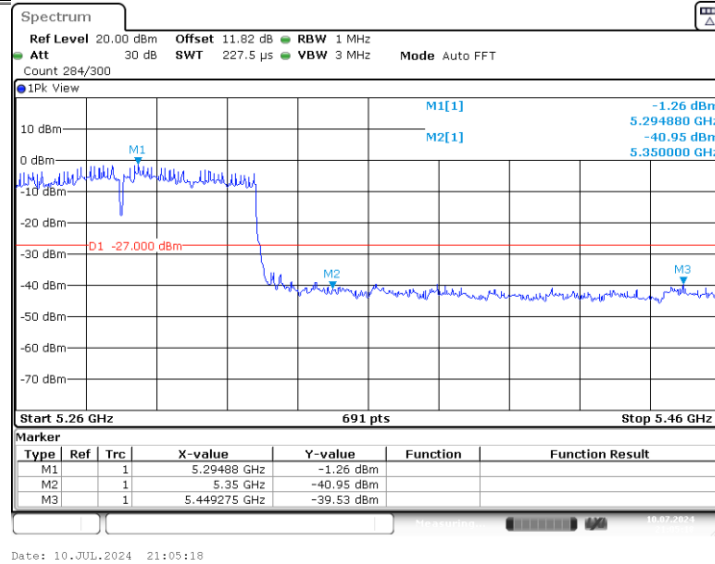


11AC80SISO_Ant1_Low_5530

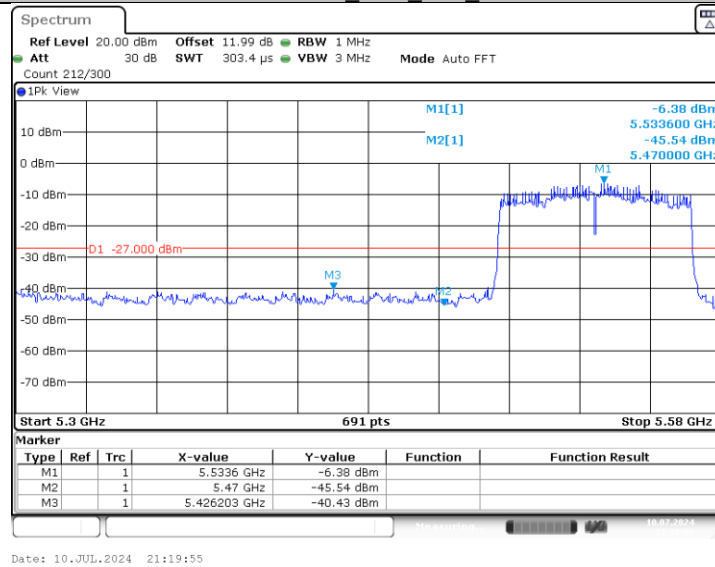

11AC80SISO_Ant1_High_5610

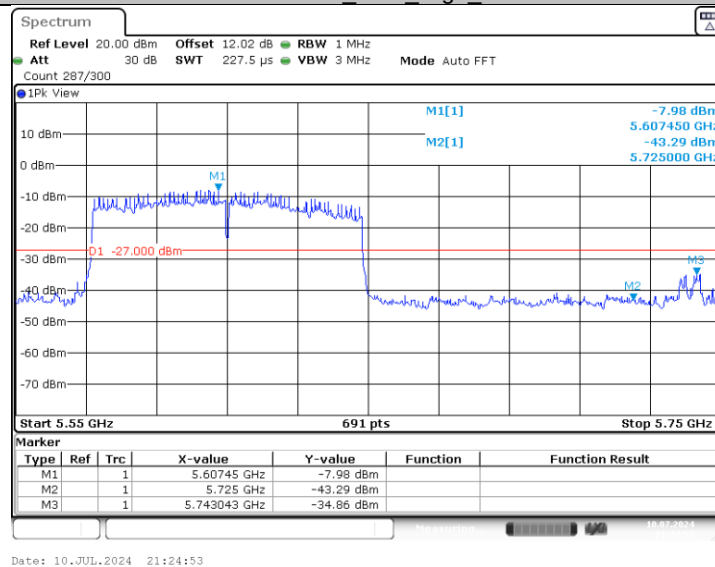


11A_Ant1_Low_5745

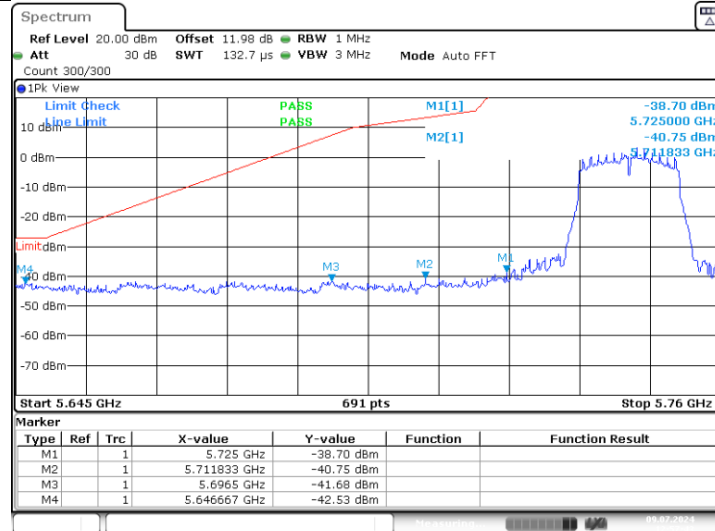


Date: 9.JUL.2024 12:57:43

11A_Ant1_High_5825

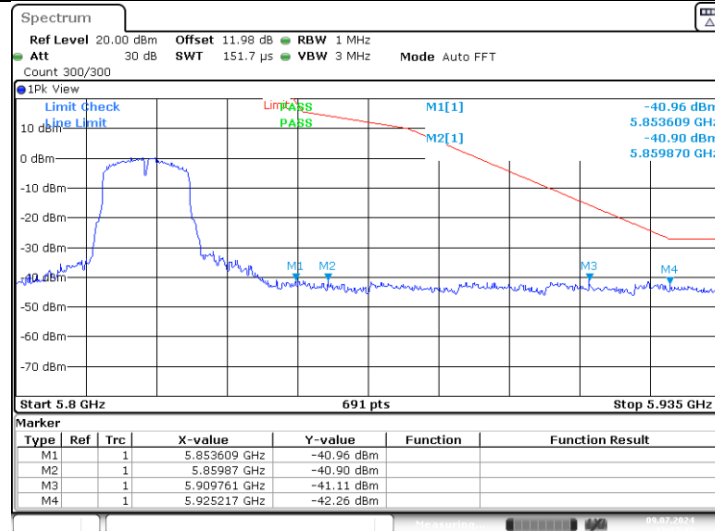


Date: 9.JUL.2024 13:07:43

11N20SISO_Ant1_Low_5745

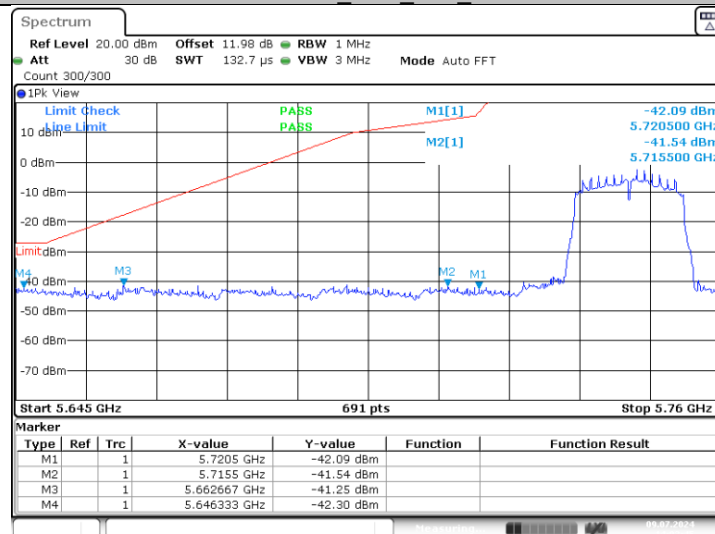


Date: 9.JUL.2024 14:02:45


11N20SISO_Ant1_High_5825

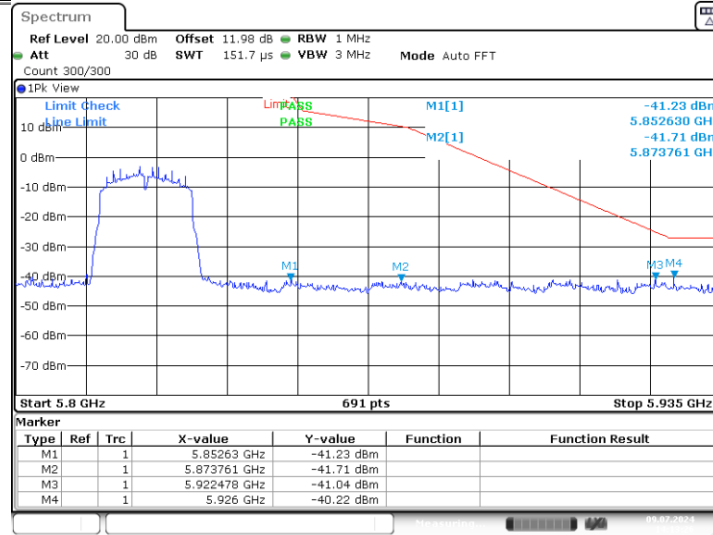


11N40SISO Ant1 Low 5755

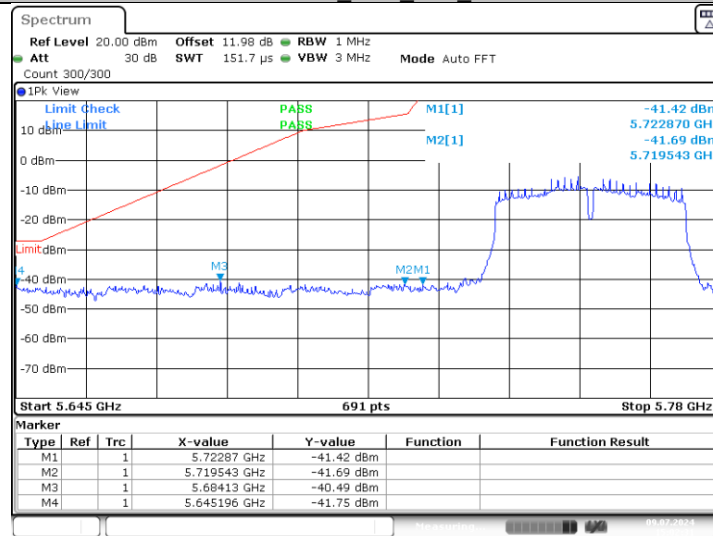


11N40SISO Ant1 High 5795

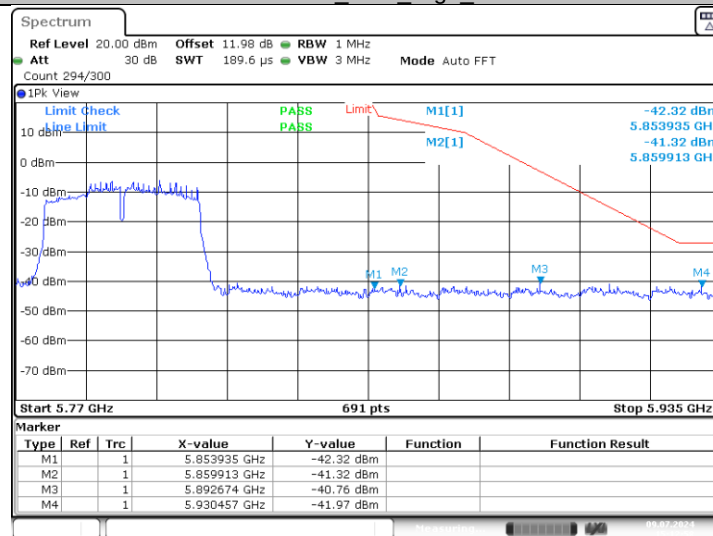


11AC20SISO Ant1 Low 5745

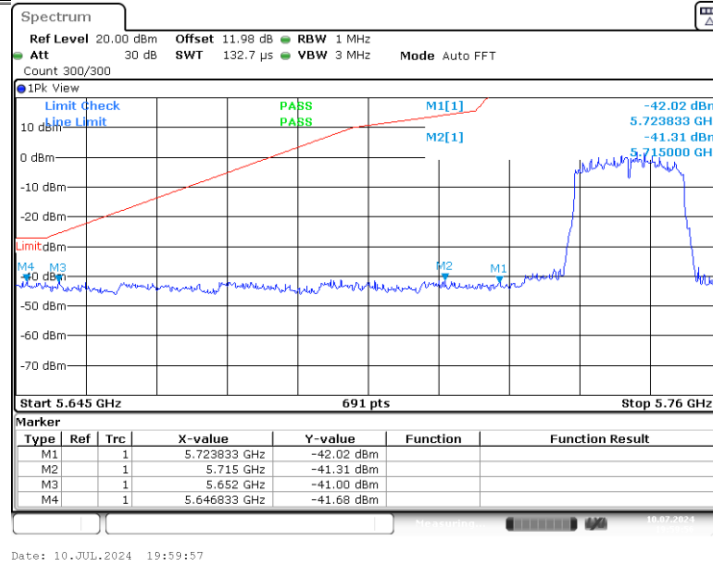


11AC20SISO_Ant1_High_5825

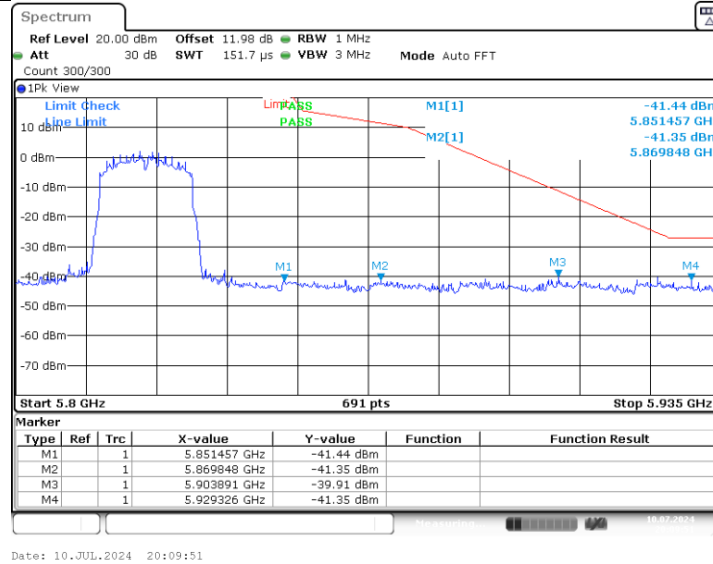


11AC40SISO_Ant1_Low_5755

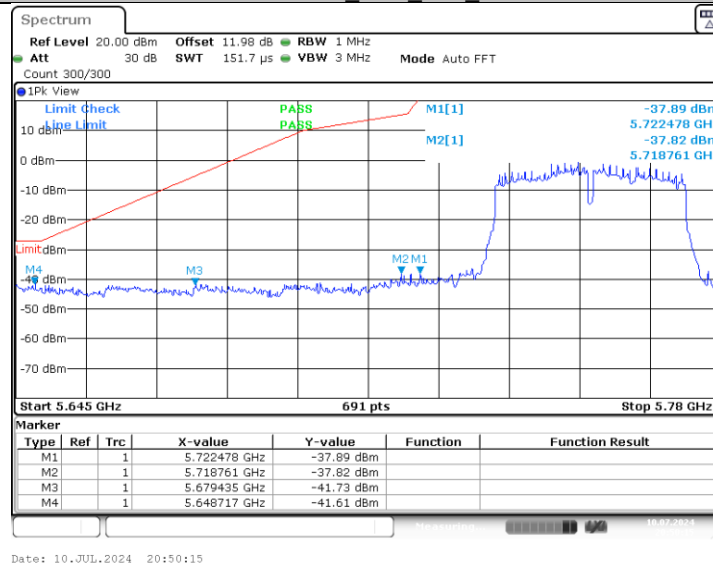


11AC40SISO_Ant1_High_5795

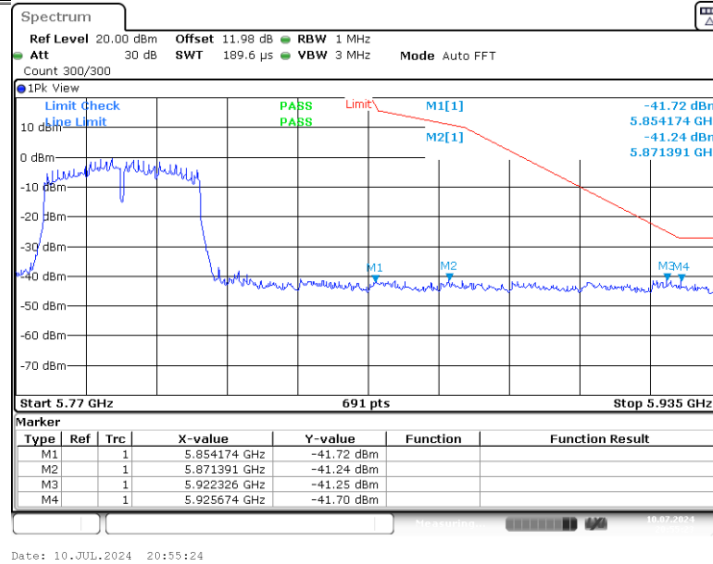

11AC80SISO_Ant1_Low_5775

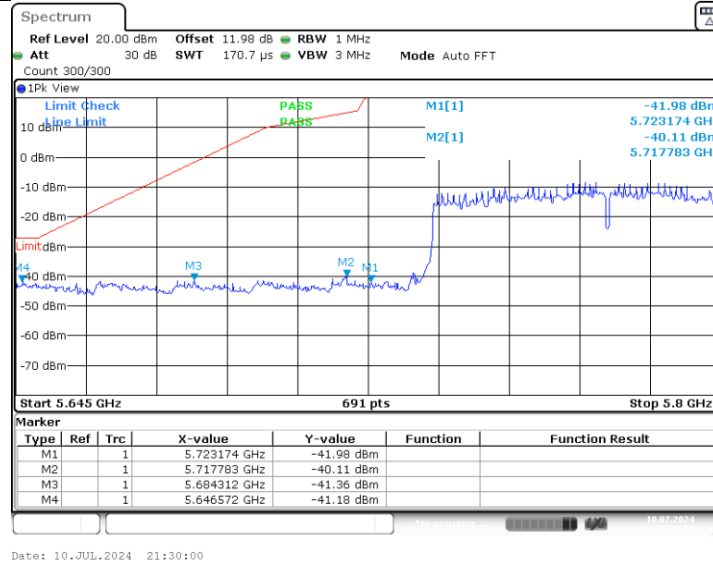

11AC80SISO_Ant1_High_5775

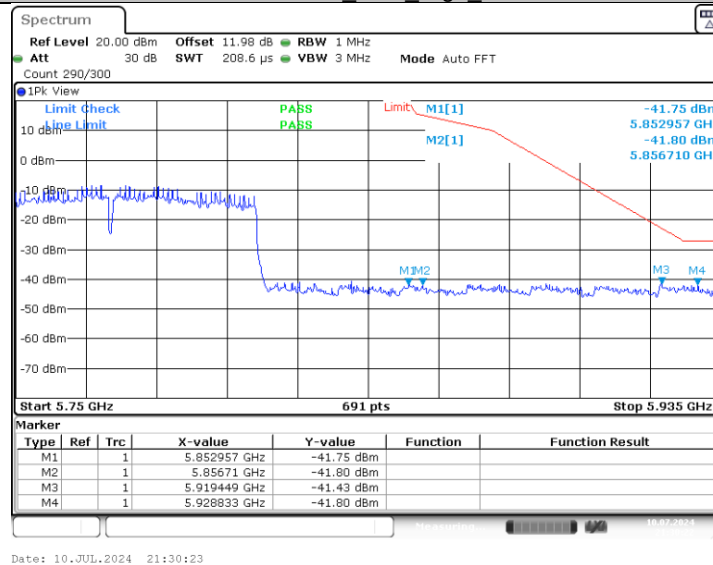

ABOVE 1000 MHz

Note: All the modes have been tested and recorded worst mode in the report.

UNII-1

11A Channel 36 / 5180 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
10658	H	44.31	---	9.03	53.34	---	74	54	-20.66
15529	H	43.93	---	9.87	53.80	---	74	54	-20.20
---	H	---	---	---	---	---	---	---	---
10658	V	44.15	---	9.03	53.18	---	74	54	-20.82
15546	V	43.65	---	9.88	53.53	---	74	54	-20.47
---	V	---	---	---	---	---	---	---	---
11A Channel 40 / 5200 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
10645	H	42.94	---	9.09	52.03	---	74	54	-21.97
15612	H	42.57	---	9.91	52.48	---	74	54	-21.52
---	H	---	---	---	---	---	---	---	---
10654	V	43.05	---	9.09	52.14	---	74	54	-21.86
15612	V	42.55	---	9.91	52.46	---	74	54	-21.54
---	V	---	---	---	---	---	---	---	---
11A Channel 48 / 5240 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
10681	H	42.97	---	9.24	52.21	---	74	54	-21.79
15723	H	41.98	---	10.01	51.99	---	74	54	-22.01
---	H	---	---	---	---	---	---	---	---
10687	V	42.78	---	9.24	52.02	---	74	54	-21.98
15729	V	41.24	---	10.01	51.25	---	74	54	-22.75
---	V	---	---	---	---	---	---	---	---

UNII-2A

11A Channel 52 / 5260 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
10629	H	44.31	---	9.44	53.75	---	74	54	-20.25
15789	H	40.27	---	10.12	50.39	---	74	54	-23.61
---	H	---	---	---	---	---	---	---	---
10628	V	43.86	---	9.46	53.32	---	74	54	-20.68
15783	V	41.78	---	10.13	51.91	---	74	54	-22.09
---	V	---	---	---	---	---	---	---	---
11A Channel 56 / 5280 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
10667	H	43.28	---	9.51	52.79	---	74	54	-21.21
15846	H	40.78	---	10.51	51.29	---	74	54	-22.71
---	H	---	---	---	---	---	---	---	---
10667	V	44.05	---	9.51	53.56	---	74	54	-20.44
15848	V	41.08	---	10.49	51.57	---	74	54	-22.43
---	V	---	---	---	---	---	---	---	---
11A Channel 64 / 5320 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
10646	H	44.24	---	9.63	53.87	---	74	54	-20.13
15964	H	40.79	---	11.25	52.04	---	74	54	-21.96
---	H	---	---	---	---	---	---	---	---
10649	V	44.31	---	9.63	53.94	---	74	54	-20.06
15958	V	40.57	---	11.23	51.80	---	74	54	-22.20
---	V	---	---	---	---	---	---	---	---

UNII-2C

11A Channel 100 / 5500 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
10656	H	43.65	---	9.15	52.80	---	74	54	-21.20
15798	H	40.14	---	10.25	50.39	---	74	54	-23.61
---	H	---	---	---	---	---	---	---	---
10757	V	42.14	---	9.99	52.13	---	74	54	-21.87
15835	V	39.61	---	10.95	50.56	---	74	54	-23.44
---	V	---	---	---	---	---	---	---	---
11A Channel 116 / 5580 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
10796	H	42.59	---	10.01	52.60	---	74	54	-21.40
15907	H	40.54	---	10.79	51.33	---	74	54	-22.67
---	H	---	---	---	---	---	---	---	---
10967	V	42.58	---	10.05	52.63	---	74	54	-21.37
15993	V	39.08	---	11.93	51.01	---	74	54	-22.99
---	V	---	---	---	---	---	---	---	---
11A Channel 140 / 5700 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
10788	H	42.09	---	10.00	52.09	---	74	54	-21.91
16191	H	39.39	---	12.04	51.43	---	74	54	-22.57
---	H	---	---	---	---	---	---	---	---
10855	V	43.69	---	10.12	53.81	---	74	54	-20.19
16013	V	40.13	---	11.32	51.45	---	74	54	-22.55
---	V	---	---	---	---	---	---	---	---

UNII-3

11A Channel 149 / 5745 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
11493	H	43.32	---	9.81	53.13	---	74	54	-20.87
17738	H	40.07	---	12.96	53.03	---	74	54	-20.97
---	H	---	---	---	---	---	---	---	---
11497	V	42.93	---	9.81	52.74	---	74	54	-21.26
17736	V	39.98	---	12.95	52.93	---	74	54	-21.07
---	V	---	---	---	---	---	---	---	---
11A Channel 153 / 5765 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
11533	H	42.17	---	9.91	52.08	---	74	54	-21.92
17795	H	40.03	---	13.21	53.24	---	74	54	-20.76
---	H	---	---	---	---	---	---	---	---
11537	V	43.07	---	9.92	52.99	---	74	54	-21.01
17798	V	39.85	---	13.22	53.07	---	74	54	-20.93
---	V	---	---	---	---	---	---	---	---
11A Channel 165/ 5825 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
11653	H	42.54	---	10.01	52.55	---	74	54	-21.45
17477	H	39.07	---	14.01	53.08	---	74	54	-20.92
---	H	---	---	---	---	---	---	---	---
11646	V	41.05	---	9.98	51.03	---	74	54	-22.97
17471	V	38.49	---	13.99	52.48	---	74	54	-21.52
---	V	---	---	---	---	---	---	---	---


Notes:

- 1). Radiated emissions measured in frequency range from 9 KHz~10th harmonic or 40GHz (which is less) were made with an instrument using Peak detector mode.
- 2). Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3). Worst case data at 1Mbps at IEEE 802.11a.
- 4). Measured Level = Reading Level + Factor, Margin = Measured Level – Limit


APPENDIXE -BANDWIDTH

TestMode	Antenna	Freq(MHz)	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.84	5170.08	5189.92	---	---
		5200	19.80	5190.08	5209.88	---	---
		5240	19.72	5230.12	5249.84	---	---
		5260	19.96	5250.08	5270.04	---	---
		5300	19.80	5290.04	5309.84	---	---
		5320	19.96	5310.00	5329.96	---	---
		5500	19.80	5490.04	5509.84	---	---
		5600	19.84	5590.16	5610.00	---	---
		5700	19.72	5690.12	5709.84	---	---
		5745	20.92	5734.20	5755.12	---	---
		5785	19.88	5775.08	5794.96	---	---
11N20SISO	Ant1	5825	20.08	5814.92	5835.00	---	---
		5180	20.08	5169.96	5190.04	---	---
		5200	20.32	5189.84	5210.16	---	---
		5240	20.12	5230.08	5250.20	---	---
		5260	20.32	5249.80	5270.12	---	---
		5300	20.16	5290.00	5310.16	---	---
		5320	20.12	5310.04	5330.16	---	---
		5500	20.24	5489.88	5510.12	---	---
		5600	20.48	5589.76	5610.24	---	---
		5700	20.00	5690.12	5710.12	---	---
		5745	20.08	5735.00	5755.08	---	---
11N40SISO	Ant1	5785	20.04	5775.00	5795.04	---	---
		5825	20.00	5815.00	5835.00	---	---
		5190	40.88	5169.52	5210.40	---	---
		5230	40.80	5209.52	5250.32	---	---
		5270	40.72	5249.68	5290.40	---	---
		5310	41.28	5289.44	5330.72	---	---
		5510	40.96	5489.52	5530.48	---	---
		5590	40.88	5569.60	5610.48	---	---
		5670	39.84	5650.08	5689.92	---	---
		5755	40.64	5734.60	5775.24	---	---
		5795	40.96	5774.52	5815.48	---	---
11AC20SISO	Ant1	5180	19.96	5170.04	5190.00	---	---
		5200	19.96	5190.00	5209.96	---	---
		5240	19.88	5230.00	5249.88	---	---
		5260	19.80	5250.24	5270.04	---	---
		5300	20.04	5289.96	5310.00	---	---
		5320	19.96	5310.04	5330.00	---	---
		5500	19.80	5490.08	5509.88	---	---
		5600	20.24	5589.80	5610.04	---	---
		5700	20.00	5690.04	5710.04	---	---
		5745	20.00	5734.96	5754.96	---	---
		5785	19.92	5775.04	5794.96	---	---
11AC40SISO	Ant1	5825	20.08	5814.88	5834.96	---	---
		5190	40.16	5170.08	5210.24	---	---
		5230	40.32	5209.92	5250.24	---	---
		5270	40.16	5249.92	5290.08	---	---
		5310	39.60	5290.16	5329.76	---	---
		5510	40.00	5489.84	5529.84	---	---
		5590	39.68	5570.08	5609.76	---	---
		5670	39.92	5650.40	5690.32	---	---
		5755	40.24	5734.92	5775.16	---	---
		5795	40.08	5775.00	5815.08	---	---
11AC80SISO	Ant1	5210	79.84	5170.00	5249.84	---	---
		5290	80.00	5250.00	5330.00	---	---
		5530	80.32	5489.84	5570.16	---	---
		5610	80.00	5570.00	5650.00	---	---
		5775	79.84	5735.00	5814.84	---	---


11A_Ant1_5180

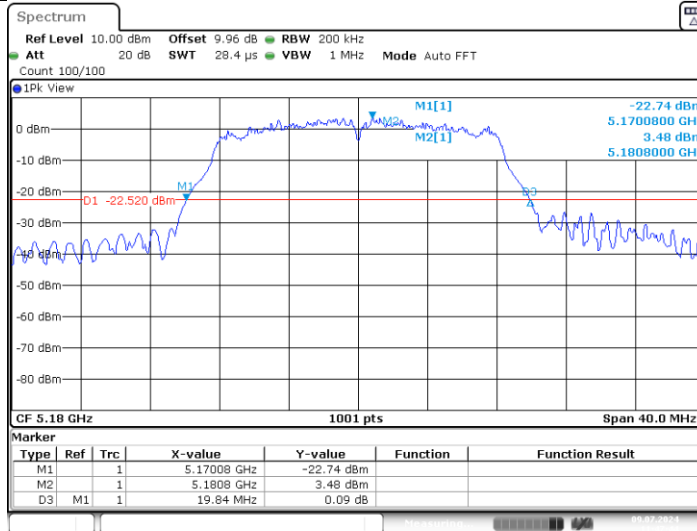


11A_Ant1_5200

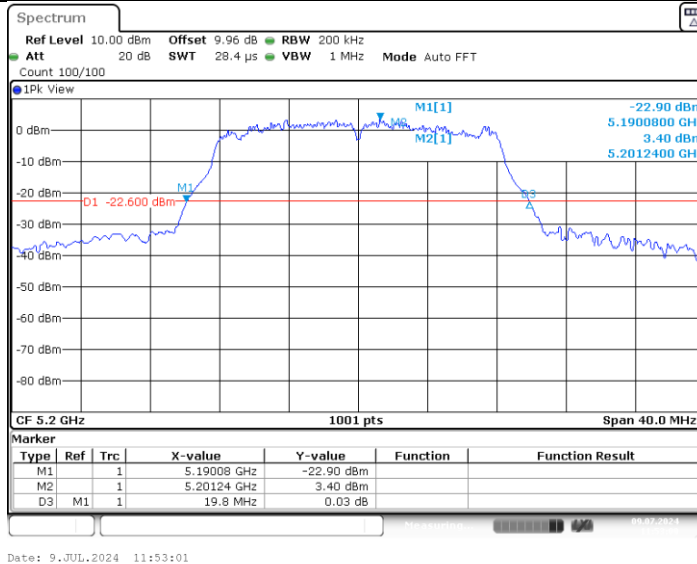


11A_Ant1_5240

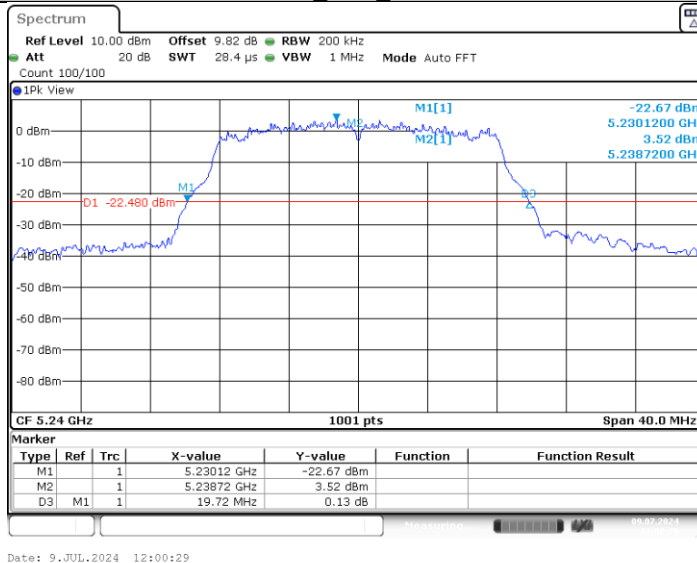


11A_Ant1_5260

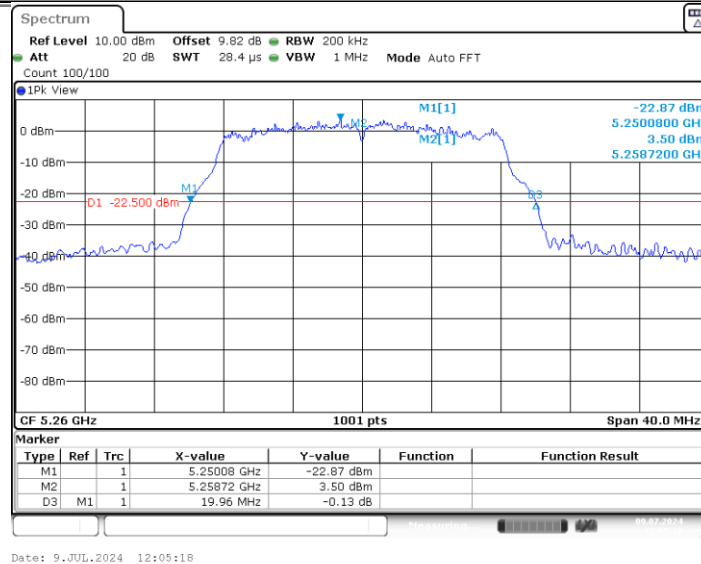


11A_Ant1_5300

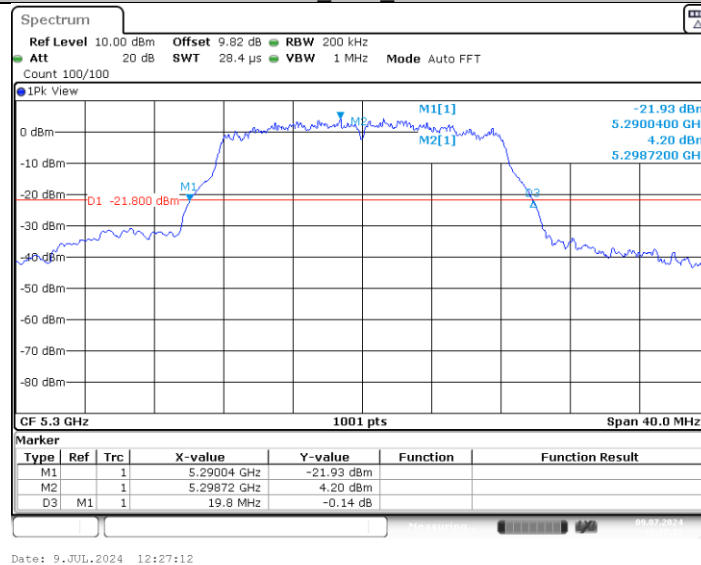


11A_Ant1_5320

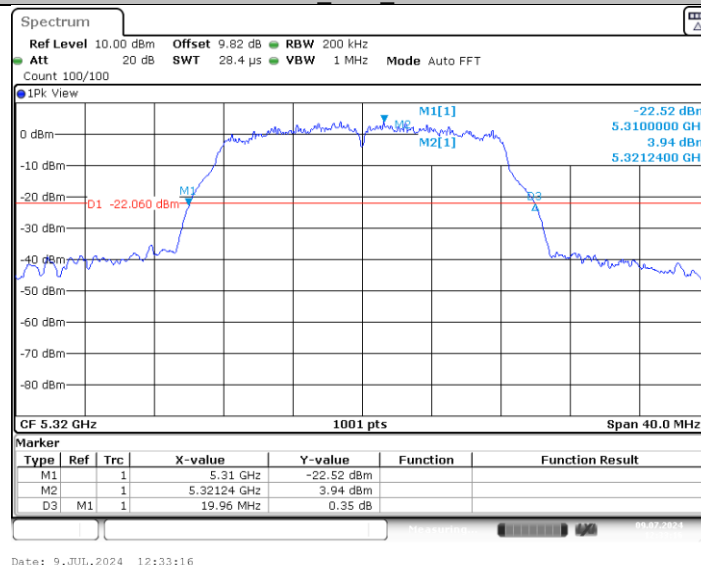


11A_Ant1_5500

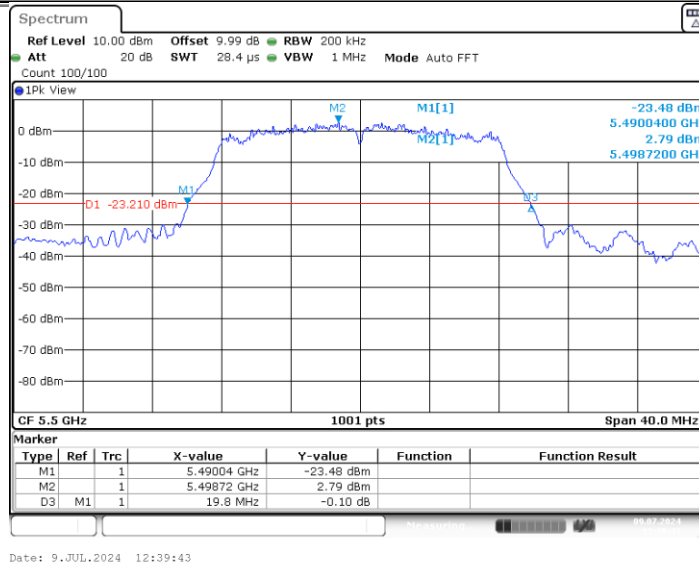


11A_Ant1_5600

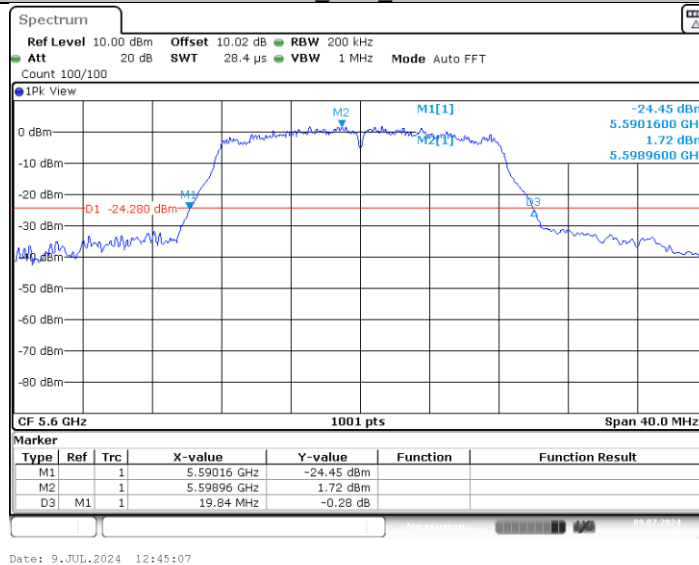


11A_Ant1_5700

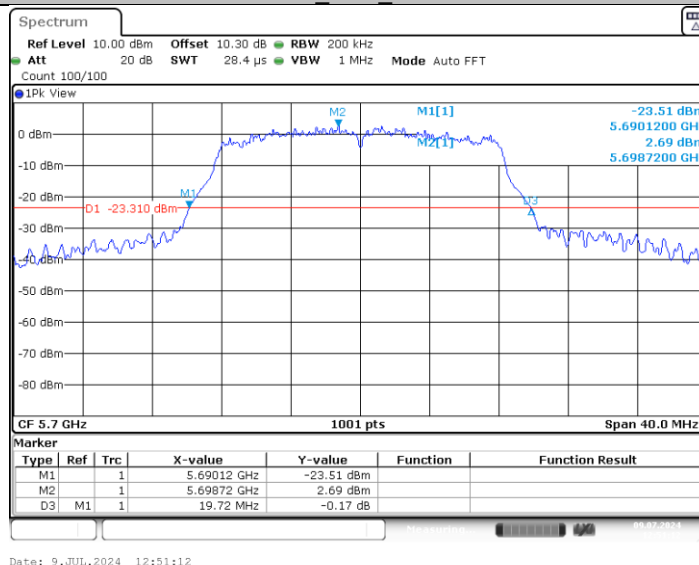


11A_Ant1_5745

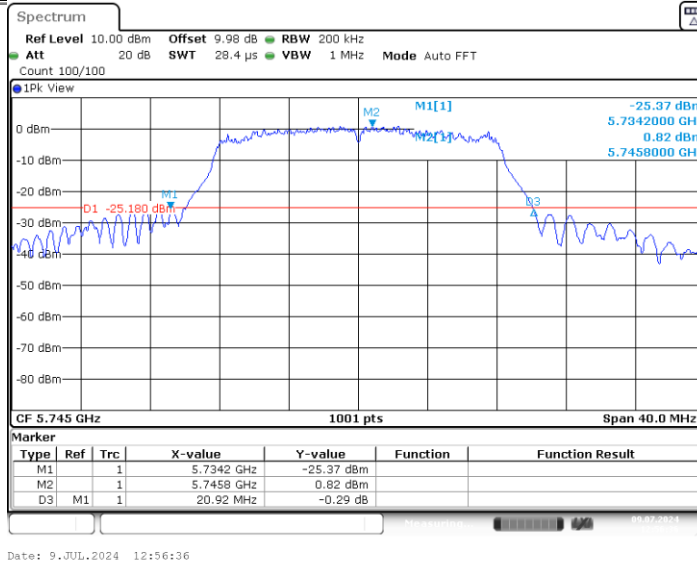


11A_Ant1_5785

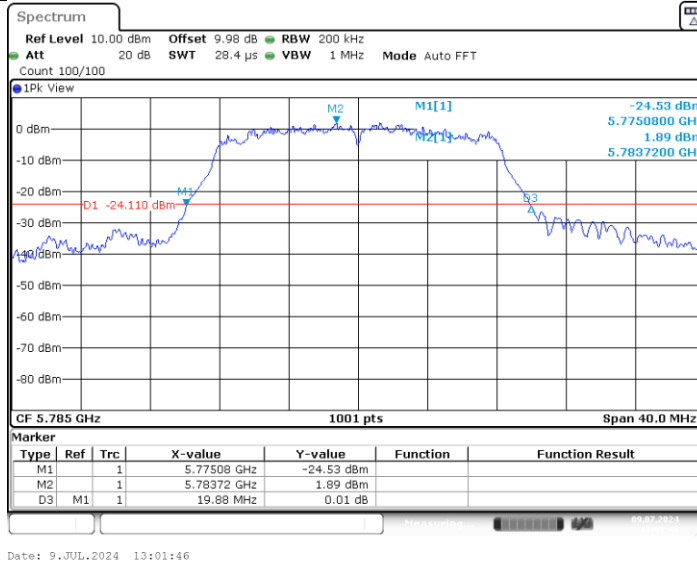


11A_Ant1_5825

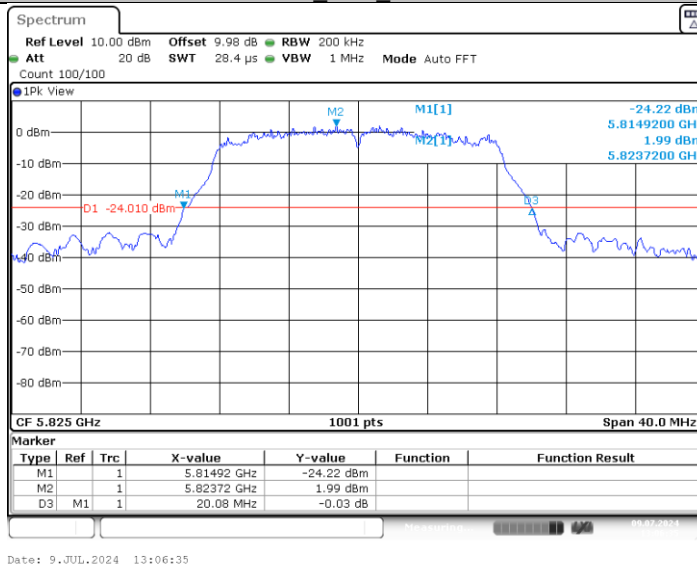


11N20SISO_Ant1_5180

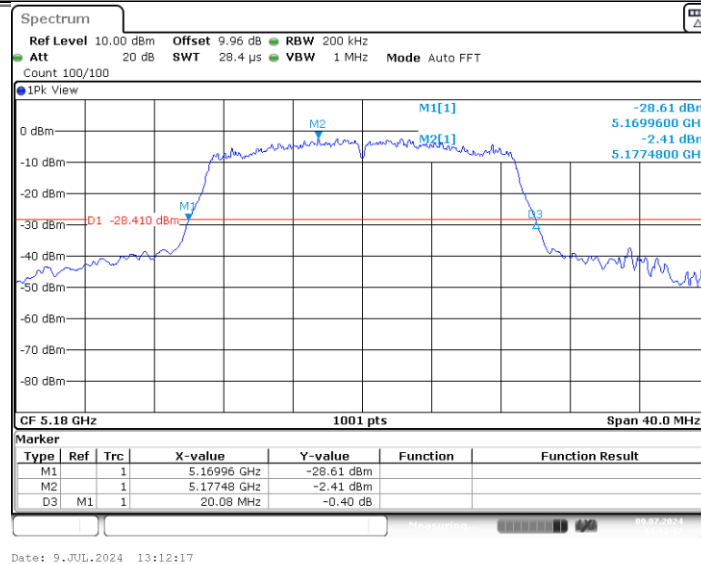


11N20SISO_Ant1_5200

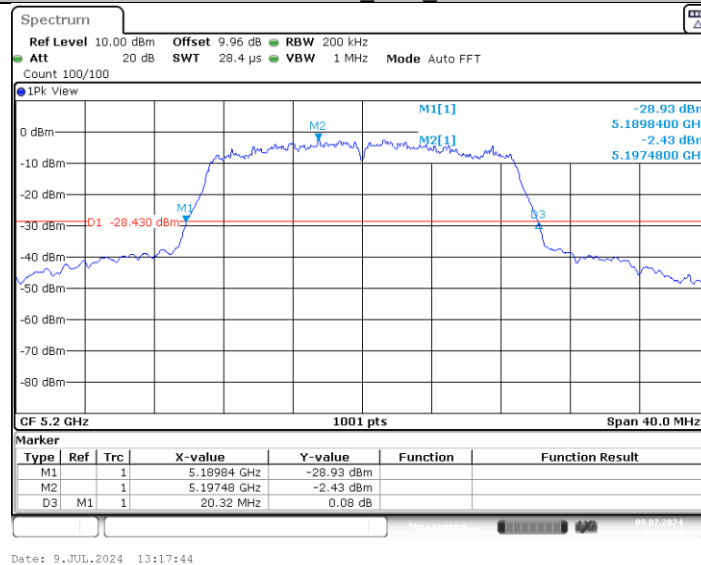


11N20SISO_Ant1_5240

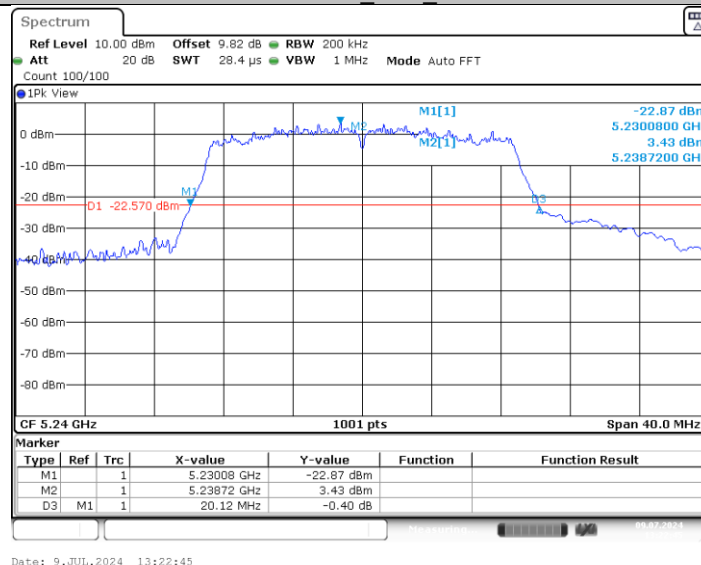


11N20SISO_Ant1_5260

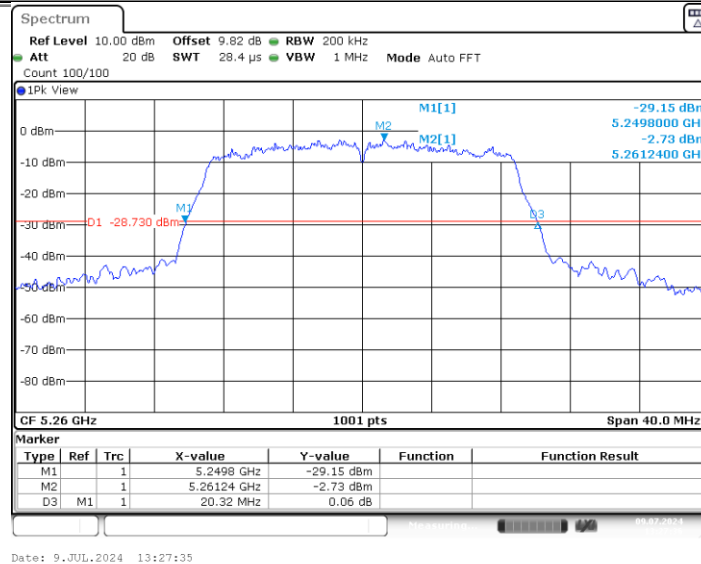


11N20SISO_Ant1_5300

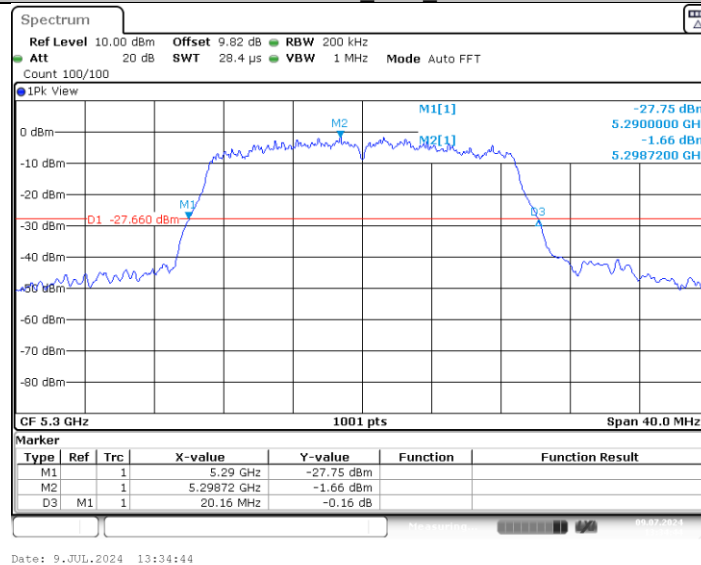


11N20SISO_Ant1_5320

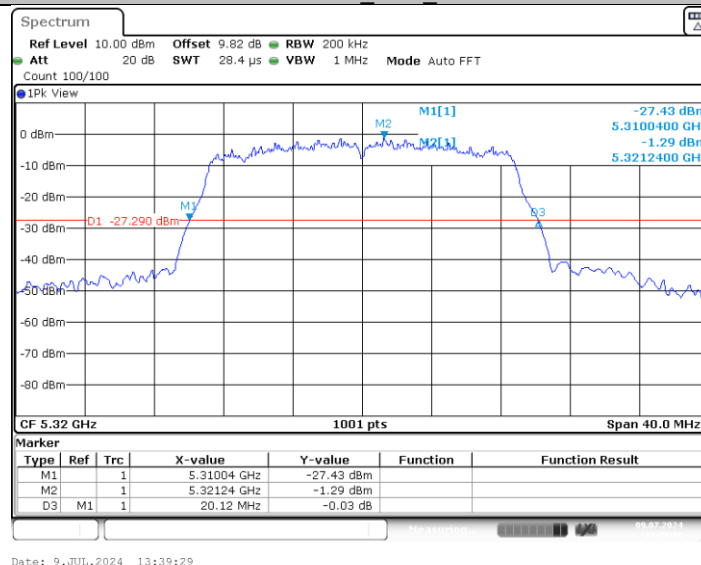


11N20SISO_Ant1_5500

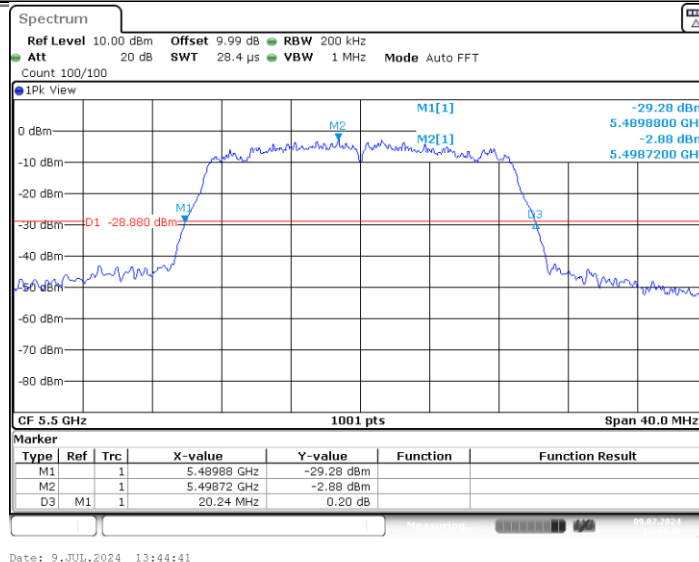


11N20SISO_Ant1_5600

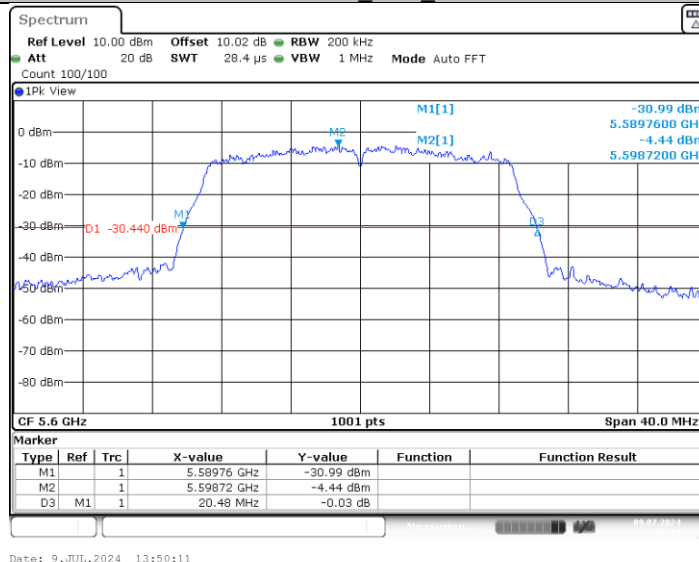


11N20SISO_Ant1_5700

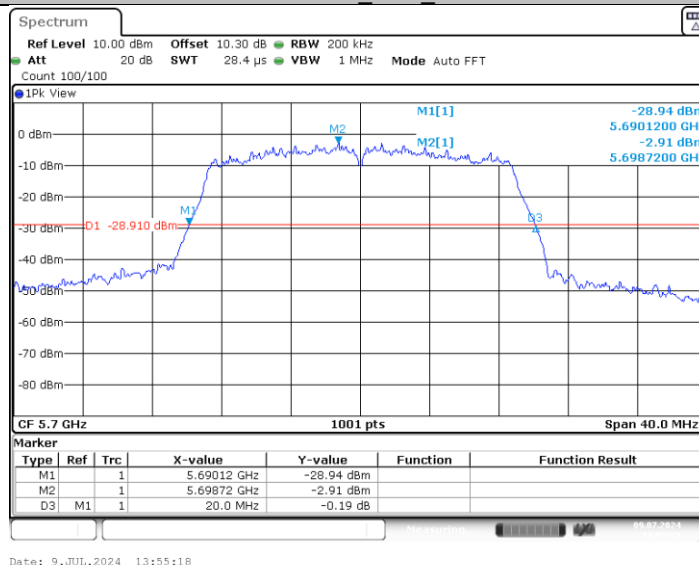


11N20SISO_Ant1_5745

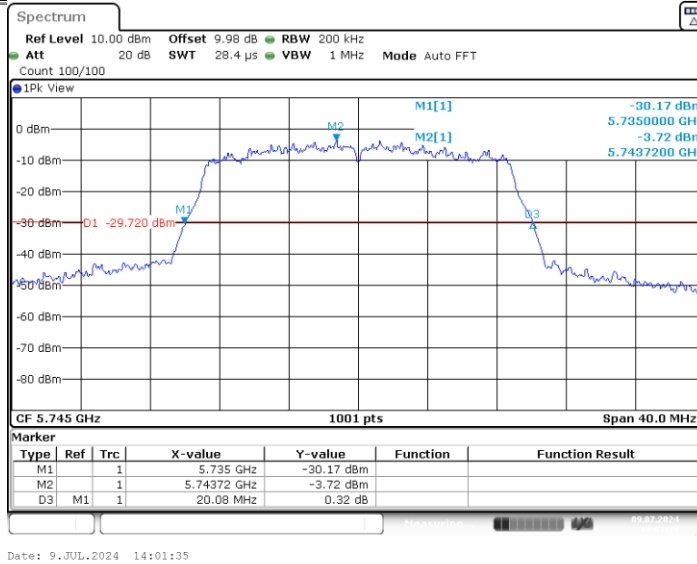


11N20SISO_Ant1_5785

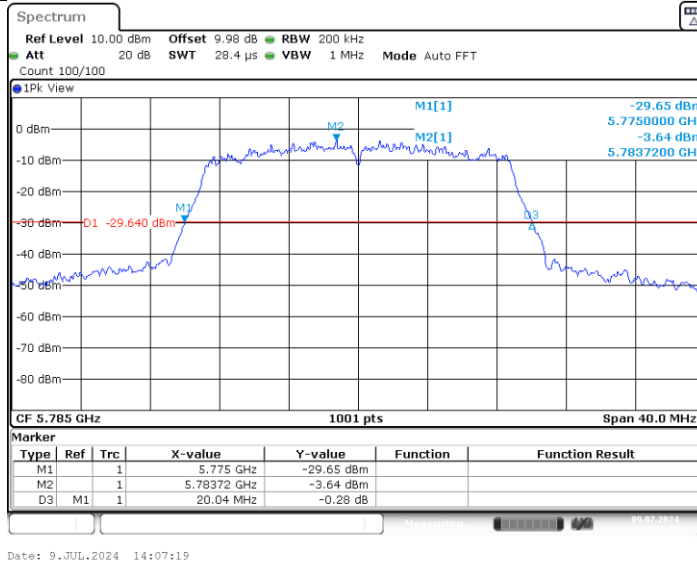


11N20SISO_Ant1_5825

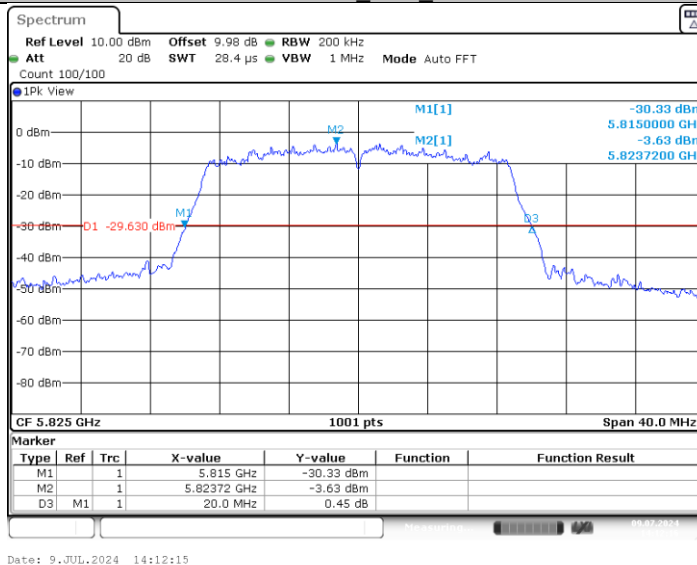


11N40SISO_Ant1_5190

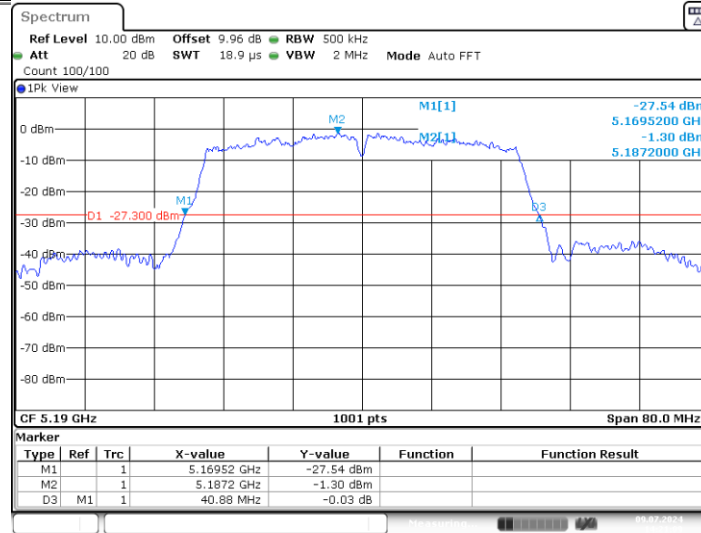


11N40SISO_Ant1_5230

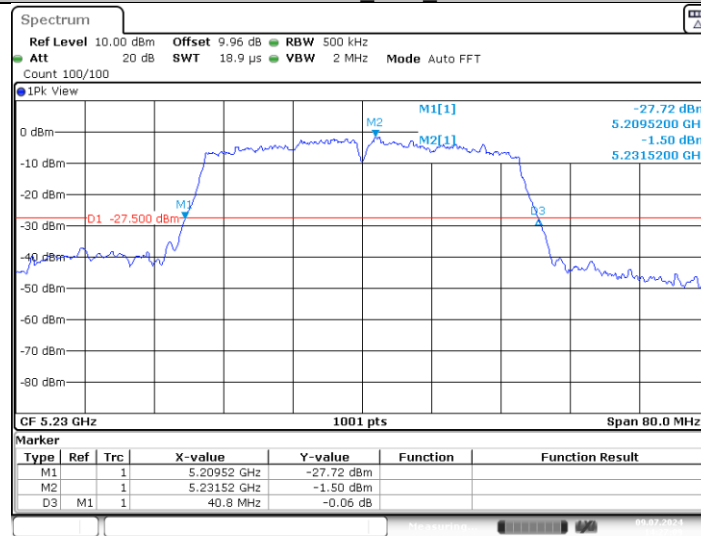


11N40SISO_Ant1_5270

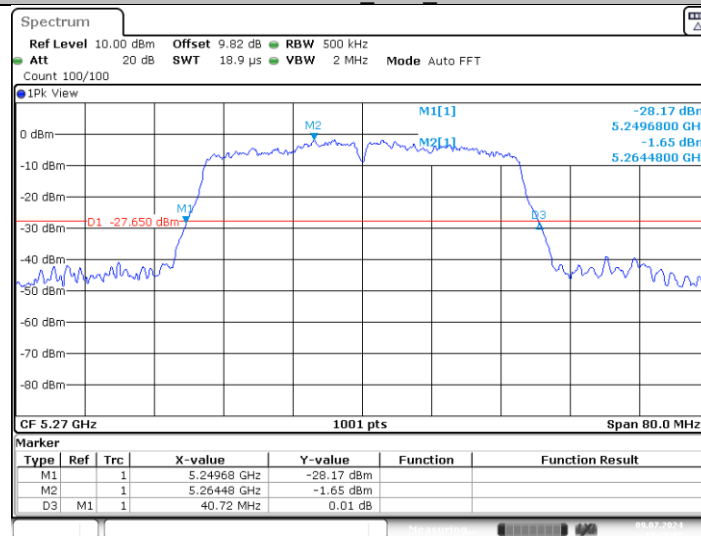


11N40SISO_Ant1_5310

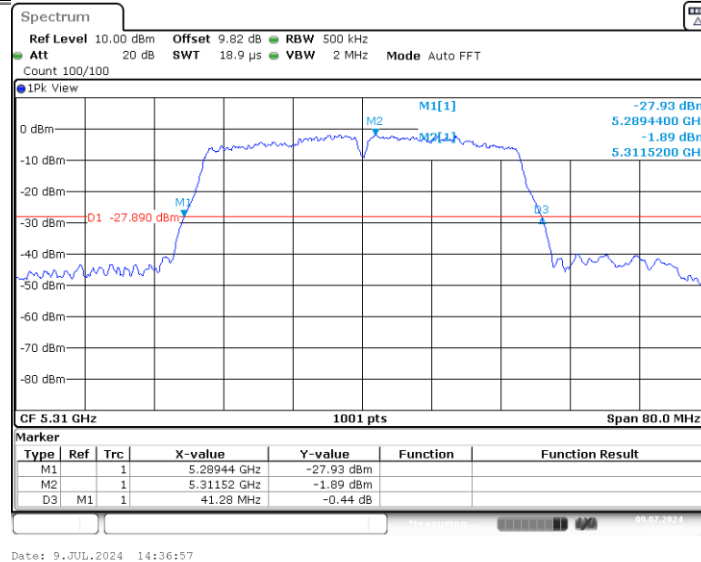


11N40SISO_Ant1_5510

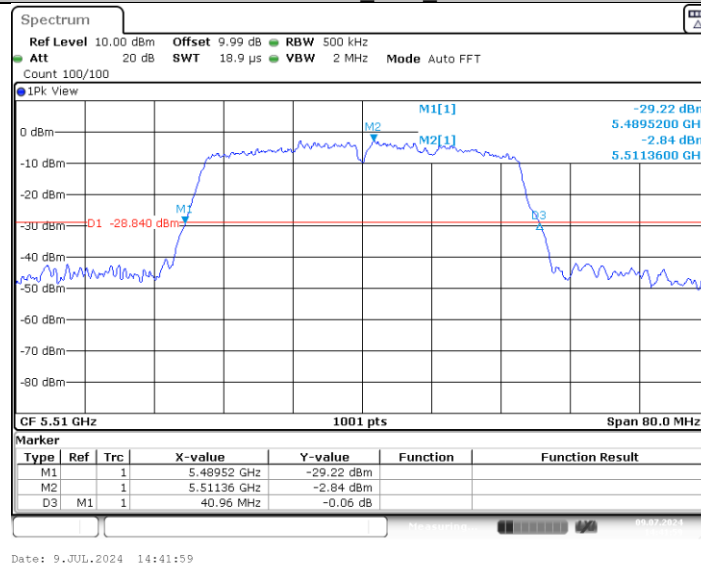


11N40SISO_Ant1_5590

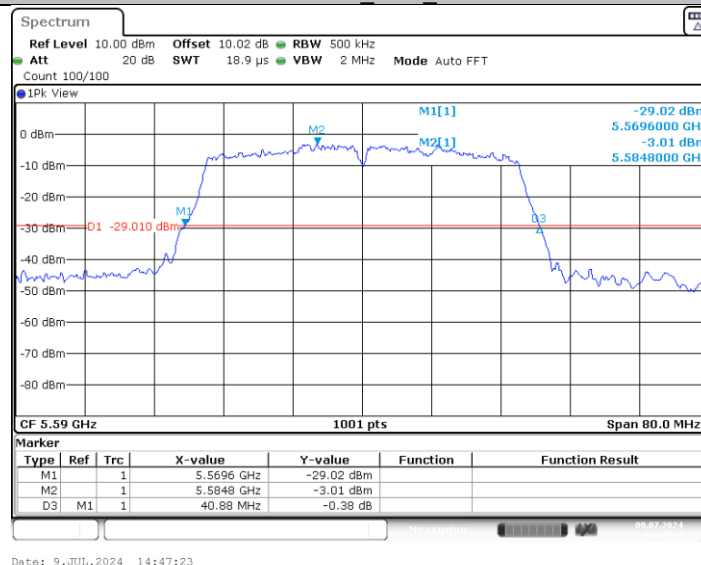


11N40SISO_Ant1_5670

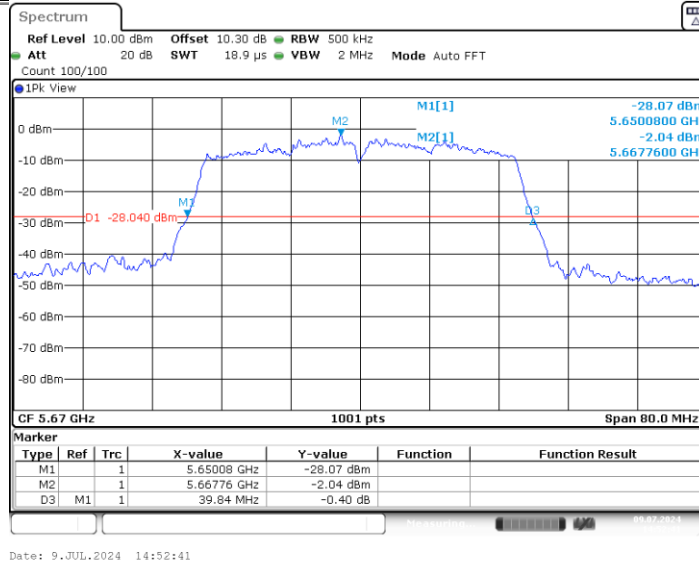


11N40SISO_Ant1_5755

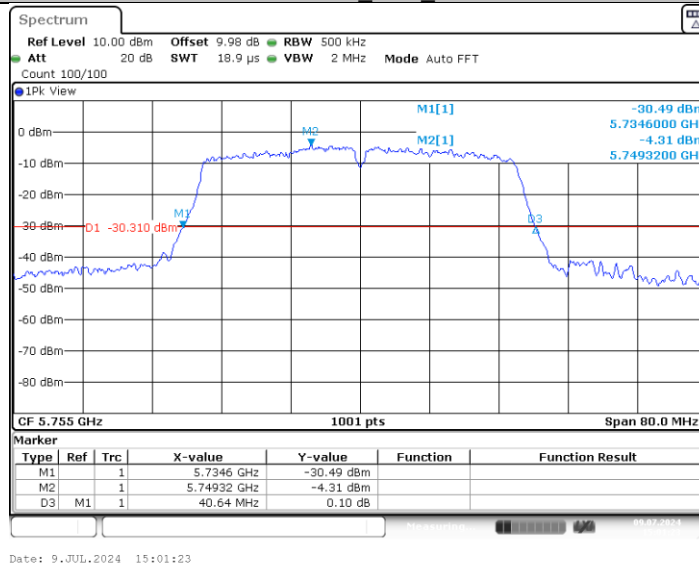


11N40SISO_Ant1_5795

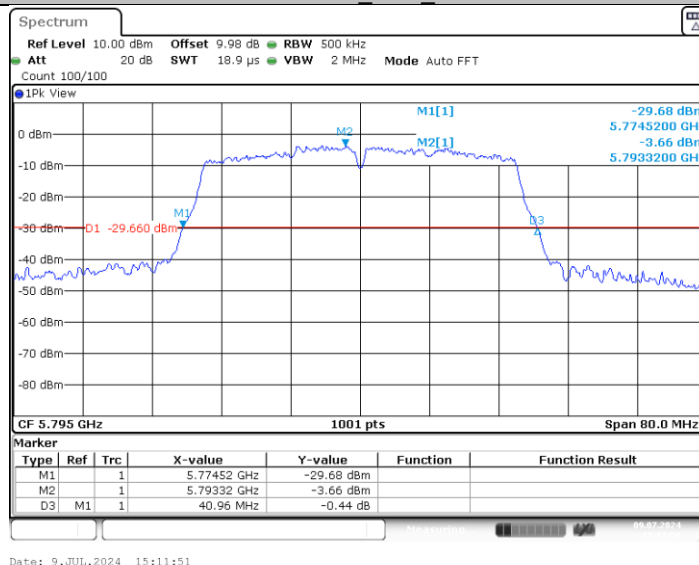


11AC20SISO_Ant1_5180

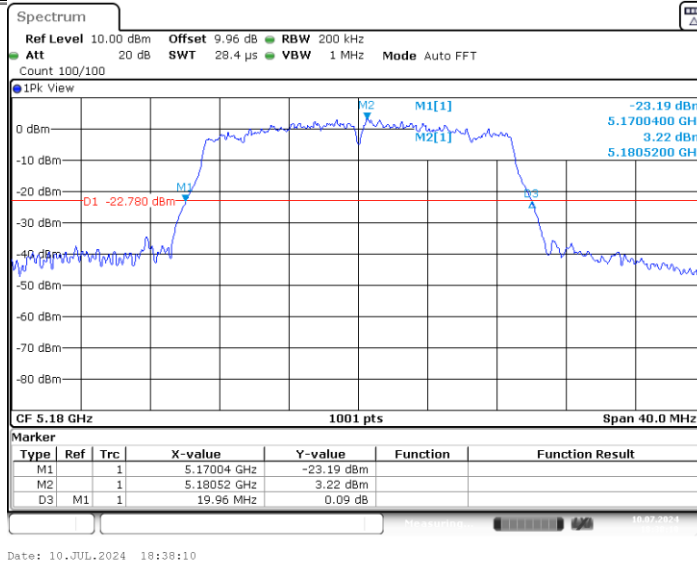


11AC20SISO_Ant1_5200

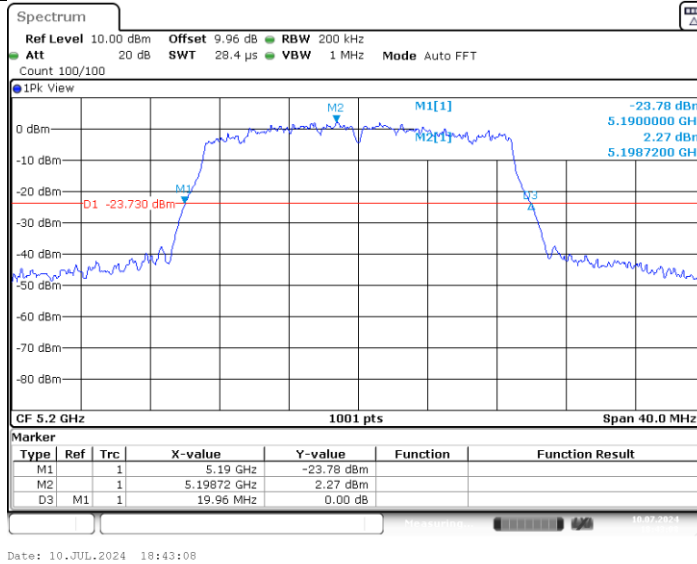


11AC20SISO_Ant1_5240

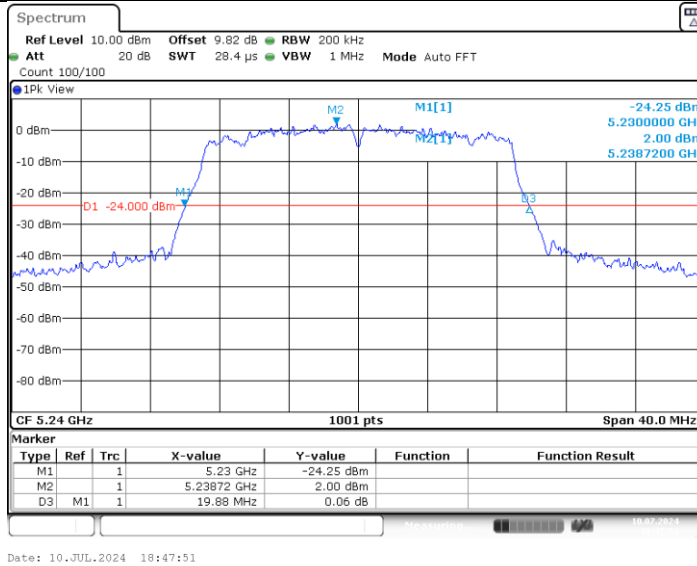


11AC20SISO_Ant1_5260

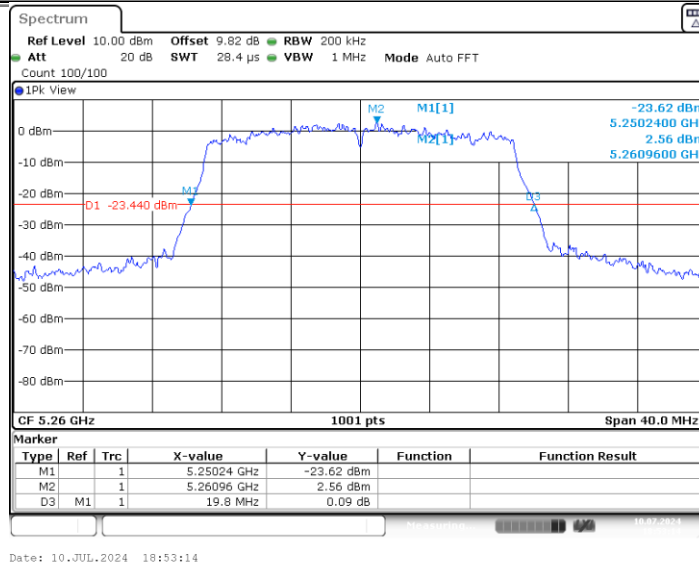


11AC20SISO_Ant1_5300

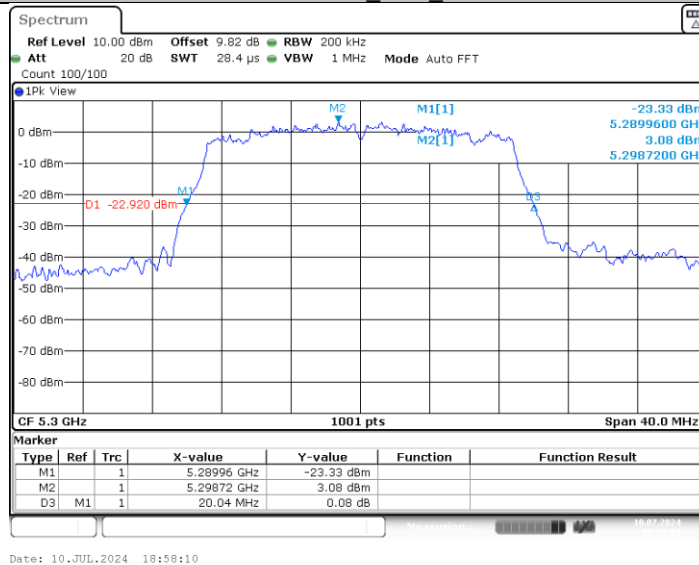


11AC20SISO_Ant1_5320

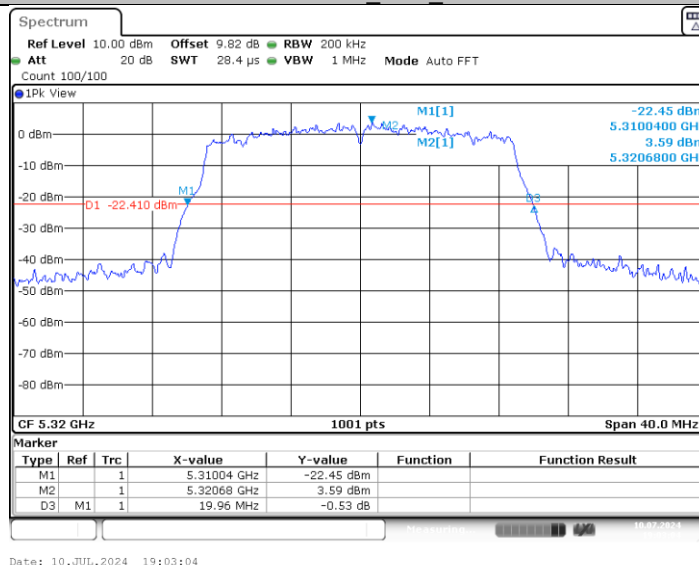


11AC20SISO_Ant1_5500

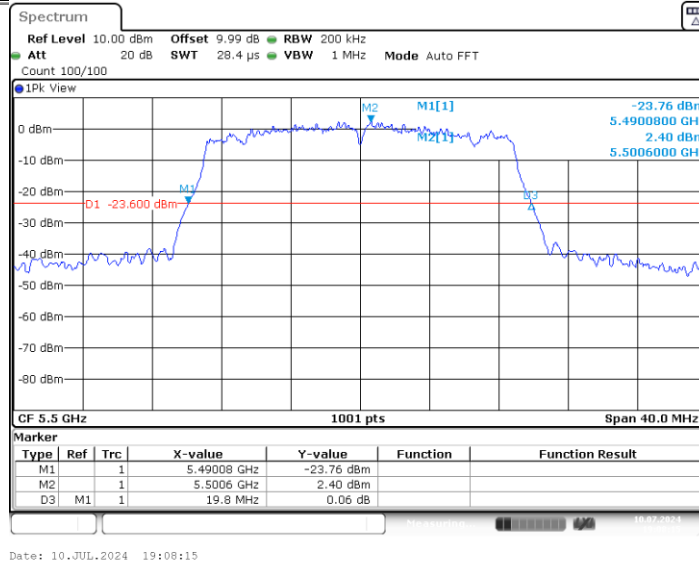


11AC20SISO_Ant1_5600

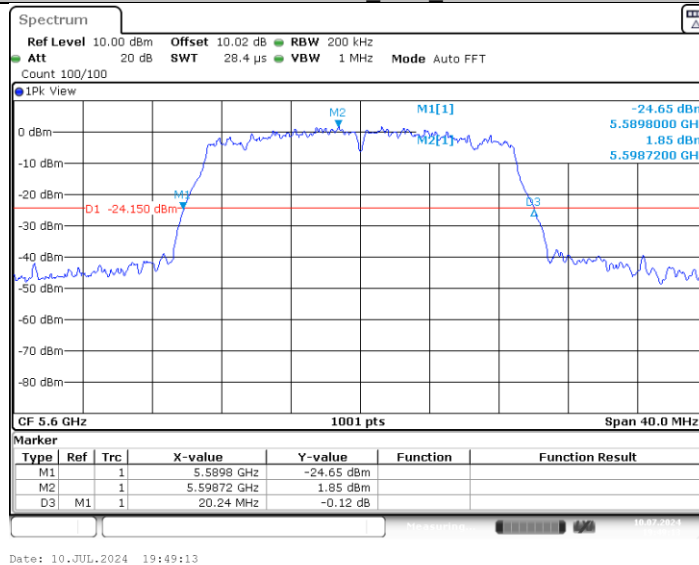


11AC20SISO_Ant1_5700

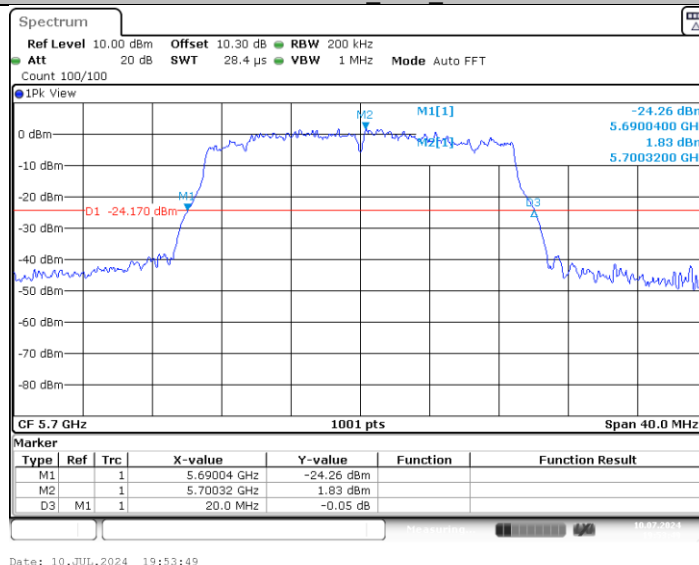


11AC20SISO_Ant1_5745

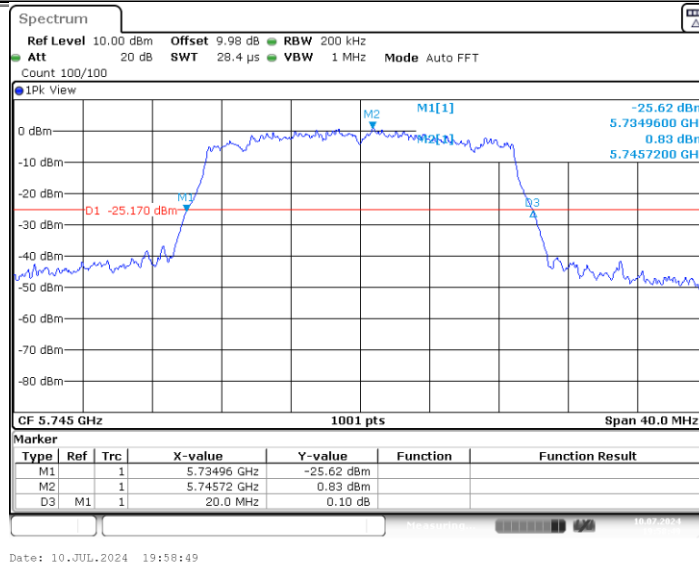


11AC20SISO_Ant1_5785

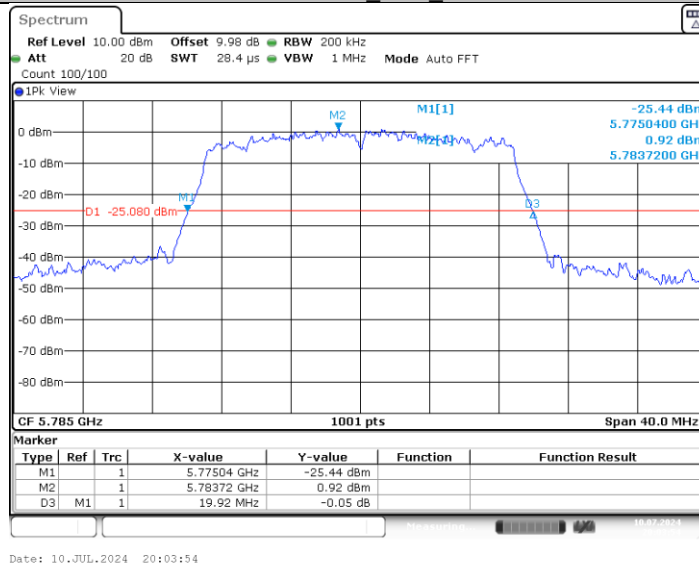


11AC20SISO_Ant1_5825

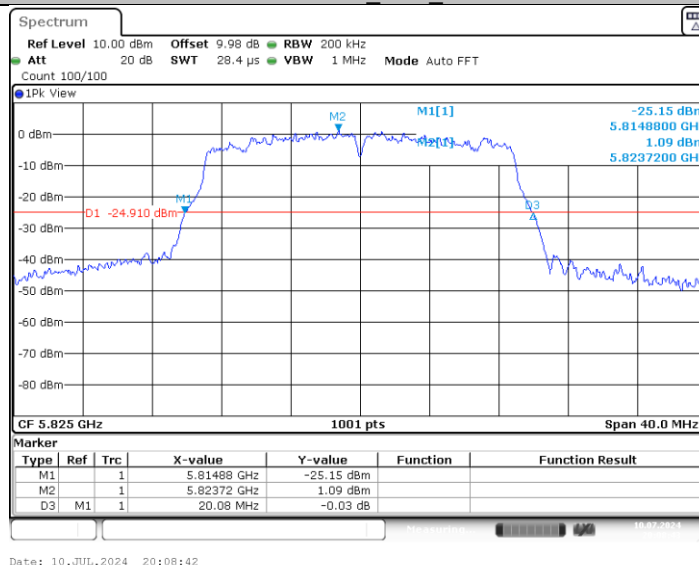


11AC40SISO_Ant1_5190

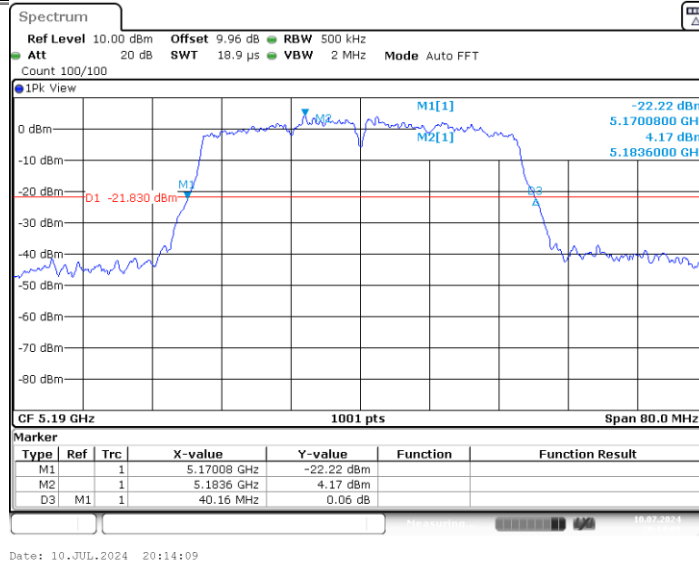


11AC40SISO_Ant1_5230

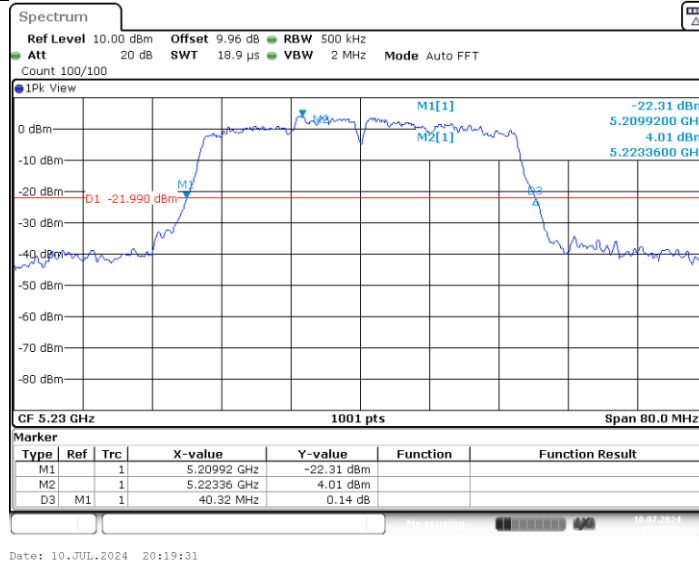


11AC40SISO_Ant1_5270

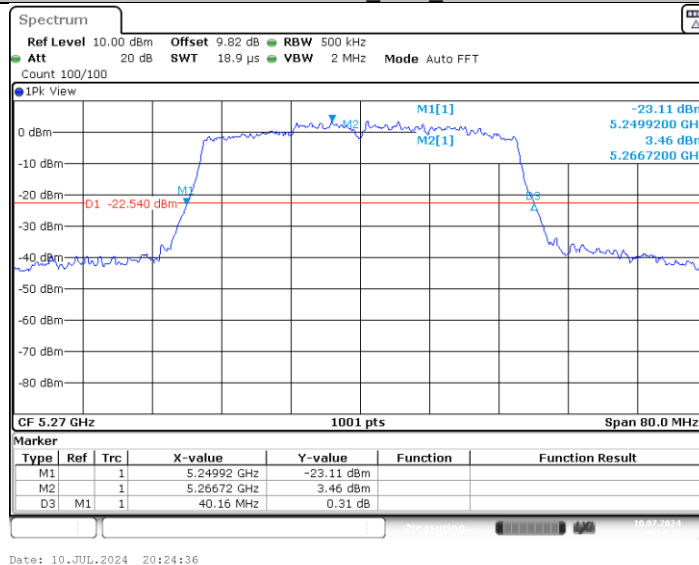


11AC40SISO_Ant1_5310

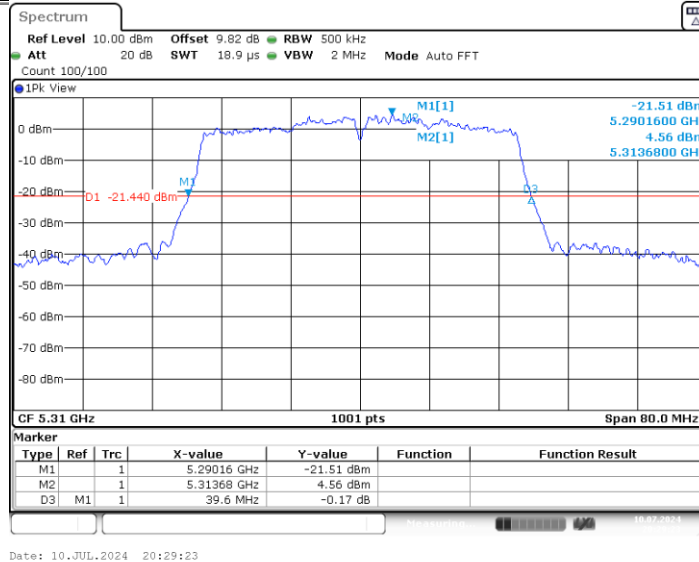


11AC40SISO_Ant1_5510

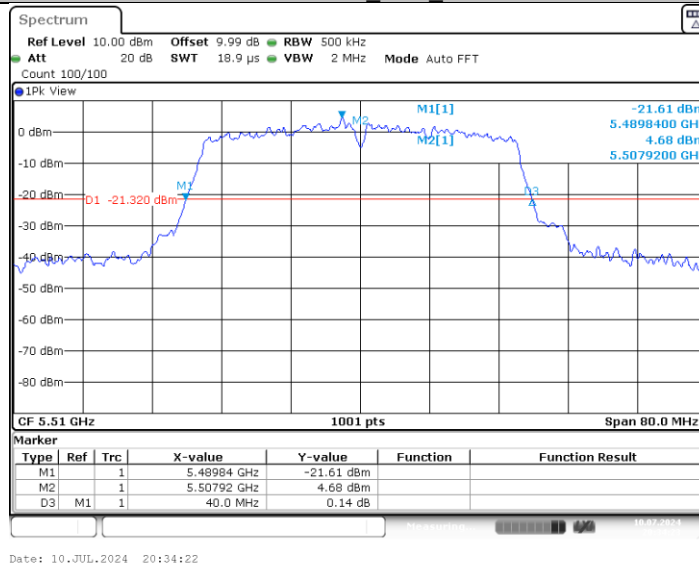


11AC40SISO_Ant1_5590

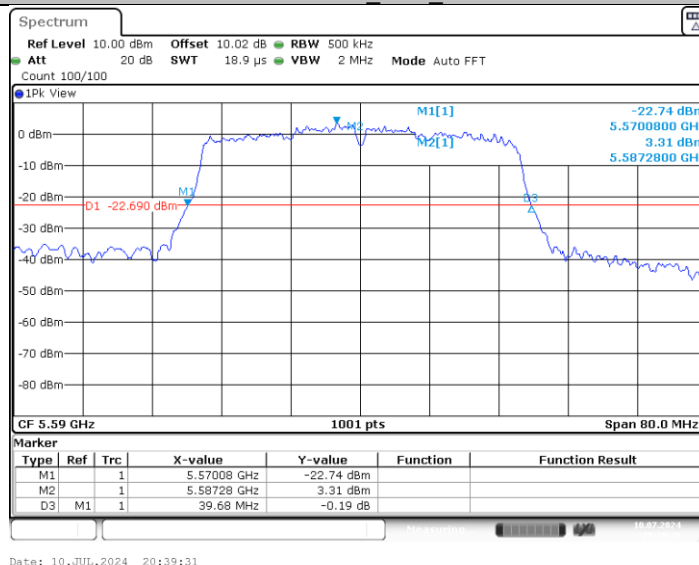


11AC40SISO_Ant1_5670

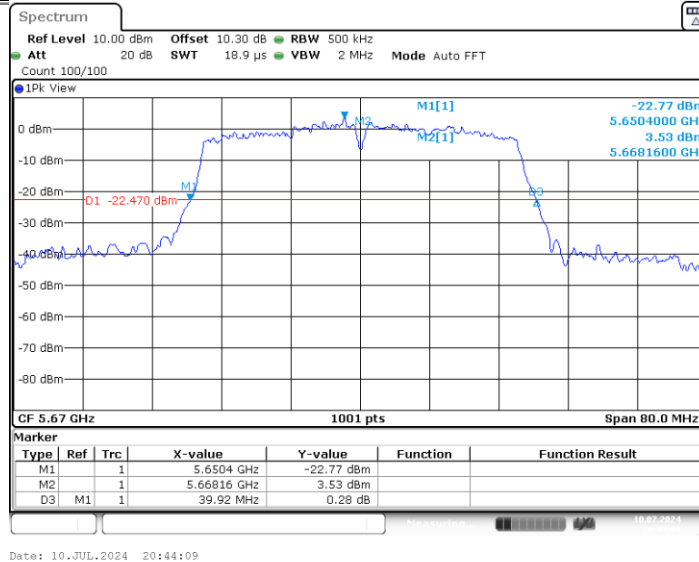

11AC40SISO_Ant1_5755

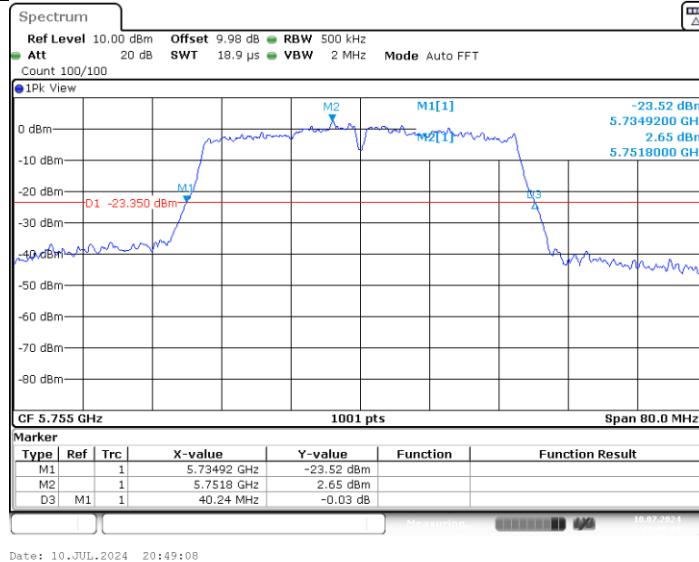

11AC40SISO_Ant1_5795

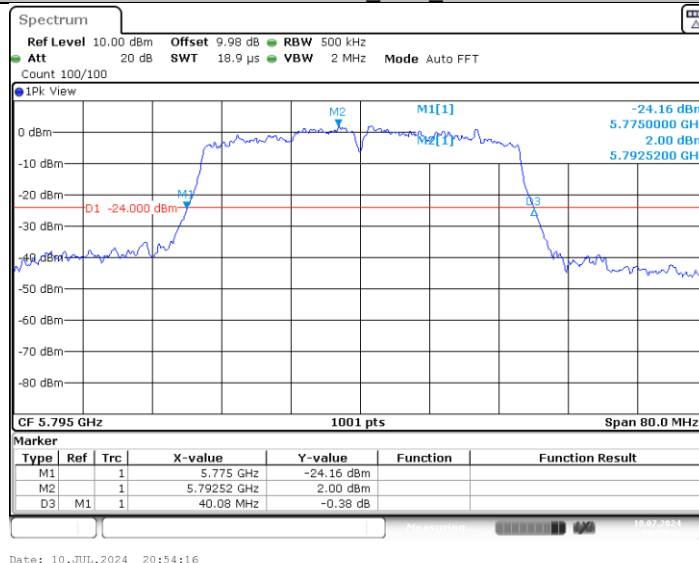

11AC80SISO_Ant1_5210