



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

# TEST REPORT

## FCC Part 27

Report Reference No.: CTA250402007010

FCC ID.: 2AU3D-RCAPRIME

Compiled by

( position+printed name+signature) : File administrators Zoey Cao

Supervised by

( position+printed name+signature) : Project Engineer Ace Chai

Approved by

( position+printed name+signature) : RF Manager Eric Wang

Date of issue: Apr. 28, 2025

Zoey Cao  
Shenzhen CTA Testing Technology Co., Ltd.  
Ace Chai  
Approved  
Eric Wang

Testing Laboratory Name: Shenzhen CTA Testing Technology Co., Ltd.

Address: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: United Creation Technology Corp.,Ltd

Address: A801, Building 5, Shenzhen Software Industry Base, No.11,13,15, Haitian 1st Road, Binhai Community, Yuehai Street, Nanshan District, Shenzhen, China

Test specification:

FCC CFR Title 47 Part 2, Part 27

Standard: ANSI/TIA-603-E-2016  
KDB 971168 D01

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: 4G smart phone

Trade Mark: RCA

Manufacturer: United Creation Technology Corp.,Ltd

Model/Type reference: Prime

Ratings: DC 3.85V From battery and DC 5.0V From external circuit

Modulation: QPSK, 16QAM

Frequency: E-UTRA Band 71

Result: PASS

# TEST REPORT

Equipment under Test : 4G smart phone

Model /Type : Prime

Listed Models : N/A

Applicant : **United Creation Technology Corp.,Ltd**

Address : A801, Building 5, Shenzhen Software Industry Base, No.11,13,15,Haitian 1st Road, Binhai Community, Yuehai Street, Nanshan District, Shenzhen, China

Manufacturer : **United Creation Technology Corp.,Ltd**

Address : A801, Building 5, Shenzhen Software Industry Base, No.11,13,15,Haitian 1st Road, Binhai Community, Yuehai Street, Nanshan District, Shenzhen, China

| Test result | Pass * |
|-------------|--------|
|-------------|--------|

\* In the configuration tested, the EUT complied with the standards specified page 4.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|     |  |    |
|-----|--|----|
| 1   | SUMMARY .....  | 4  |
| 1.1 | TEST STANDARDS .....   | 4  |
| 1.2 | Test Description .....   | 4  |
| 1.3 | Address of the test laboratory .....                             | 4  |
| 1.4 | Test Facility .....  | 4  |
| 1.5 | Statement of the measurement uncertainty .....                   | 5  |
| 2   | GENERAL INFORMATION .....  | 6  |
| 2.1 | Environmental conditions .....                                   | 6  |
| 2.2 | General Description of EUT .....                                 | 6  |
| 2.3 | Description of Test Modes and Test Frequency .....               | 6  |
| 2.4 | Equipments Used during the Test .....                            | 7  |
| 2.5 | Related Submittal(s) / Grant (s) .....                           | 8  |
| 2.6 | Modifications .....  | 8  |
| 3   | TEST CONDITIONS AND RESULTS .....                                | 9  |
| 3.1 | Output Power .....   | 9  |
| 3.2 | Peak-to-Average Ratio (PAR) .....                                | 15 |
| 3.3 | Occupied Bandwidth and Emission Bandwidth .....                  | 16 |
| 3.4 | Band Edge compliance .....                                       | 17 |
| 3.5 | Spurious Emission .....  | 18 |
| 3.6 | Frequency Stability under Temperature & Voltage Variations ..... | 23 |
| 4   | Test Setup Photos of the EUT .....                               | 25 |
| 5   | Photos of the EUT .....  | 25 |

## 1 SUMMARY

### 1.1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[FCC Part 27](#): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

[ANSI/TIA-603-E-2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015](#): IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[FCC-KDB971168D01](#) Power Meas License Digital Systems

### 1.2 Test Description

| Test Item                              | Section in CFR 47           | Result |
|--|-----------------------------|--------|
| RF Output Power                        | §2.1046,<br>§27.50 (c) (10) | Pass   |
| Peak-to-Average Ratio                  | §2.1046,<br>§27.50(d)       | Pass   |
| 99% & -26 dB Occupied Bandwidth        | §2.1049                     | Pass   |
| Spurious Emissions at Antenna Terminal | §2.1051,<br>§27.53(g)       | Pass   |
| Field Strength of Spurious Radiation   | §2.1055<br>§27.53(g)        | Pass   |
| Out of band emission, Band Edge        | §2.1051,<br>§27.53(g)       | Pass   |
| Frequency stability                    | §2.1053,<br>§27.54          | Pass   |

### 1.3 Address of the test laboratory

**Shenzhen CTA Testing Technology Co., Ltd.**

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

The 3m-Semi anechoic test site fulfills CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

### 1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 517856 Designation Number: CN1318**

Shenzhen CTA Testing Technology Co., Ltd. Has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

**Industry Canada Registration Number. Is: 27890 CAB identifier: CN0127**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

**A2LA-Lab Cert. No.: 6534.01**

Shenzhen CTA Testing Technology Co., Ltd. Has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfills CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

## 1.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen CTA Testing Technology Co., Ltd. Quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen CTA Testing Technology Co., Ltd. Is reported:

| Test                                | Range      | Measurement Uncertainty | Notes |
|-------------------------------------|------------|-------------------------|-------|
| Radiated Emission                   | 30~1000MHz | 4.10 dB                 | (1)   |
| Radiated Emission                   | 1~18GHz    | 4.32 dB                 | (1)   |
| Radiated Emission                   | 18-40GHz   | 5.54 dB                 | (1)   |
| Conducted Disturbance               | 0.15~30MHz | 3.12 dB                 | (1)   |
| Conducted Power                     | 9KHz~18GHz | 0.61 dB                 | (1)   |
| Spurious RF Conducted Emission      | 9KHz~40GHz | 1.22 dB                 | (1)   |
| Band Edge Compliance of RF Emission | 9KHz~40GHz | 1.22 dB                 | (1)   |
| Occupied Bandwidth                  | 9KHz~40GHz | -                       | (1)   |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

## 2 GENERAL INFORMATION

### 2.1 Environmental conditions

|                                |   |               |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | Apr. 02, 2025 |
| Testing commenced on           | : | Apr. 02, 2025 |
| Testing concluded on           | : | Apr. 28, 2025 |

During the measurement the environmental conditions were within the listed ranges:

|                     |         |
|---------------------|---------|
| Normal Temperature: | 25°C    |
| Relative Humidity:  | 55 %    |
| Air Pressure:       | 101 kPa |

### 2.2 General Description of EUT

|                       |   |
|-----------------------|---|
| Product Name:         | 4G smart phone  |
| Model/Type reference: | Prime   |
| Power supply:         | DC 3.85V From battery and DC 5.0V From external circuit                       |
| Adapter information:  | Model: Prime<br>Input: AC 100-240V 50/60Hz 0.5A<br>Output: DC 5.0V 2.0A 10.0W |
| Hardware version:     | T341_9230_MB_D4UF_V1.0  |
| Software version:     | RCA_Prime_V01_20241223  |
| Testing sample ID :   | CTA250402007-1# (Engineer sample)<br>CTA250402007-2# (Normal sample)          |

#### LTE

|                        |                                     |
|------------------------|-------------------------------------|
| Operation Band:        | E-UTRA Band 71                      |
| Support Bandwidth:     | Band 71: 5MHz, 10MHz, 15MHz, 20MHz, |
| TX/RX Frequency Range: | E-UTRA Band 71(663MHz-698 MHz)      |
| Modulation Type:       | QPSK, 16QAM                         |
| Release Version:       | Release 9                           |
| Category:              | Cat 4                               |
| Antenna Type:          | PIFA antenna                        |
| Antenna Gain:          | -0.2 dBi                            |

Note: For more details, refer to the user's manual of the EUT.

### 2.3 Description of Test Modes and Test Frequency

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

## 2.4 Equipments Used during the Test

| Test Equipment                      | Manufacturer   | Model No.       | Equipment No.  | Calibration Date | Calibration Due Date |
|-------------------------------------|----------------|-----------------|----------------|------------------|----------------------|
| LISN                                | R&S            | ENV216          | CTA-308        | 2024/08/03       | 2025/08/02           |
| LISN                                | R&S            | ENV216          | CTA-314        | 2024/08/03       | 2025/08/02           |
| EMI Test Receiver                   | R&S            | ESPI            | CTA-307        | 2024/08/03       | 2025/08/02           |
| EMI Test Receiver                   | R&S            | ESCI            | CTA-306        | 2024/08/03       | 2025/08/02           |
| Spectrum Analyzer                   | Agilent        | N9020A          | CTA-301        | 2024/08/03       | 2025/08/02           |
| Spectrum Analyzer                   | R&S            | FSU             | CTA-337        | 2024/08/03       | 2025/08/02           |
| Vector Signal generator             | Agilent        | N5182A          | CTA-305        | 2024/08/03       | 2025/08/02           |
| Analog Signal Generator             | R&S            | SML03           | CTA-304        | 2024/08/03       | 2025/08/02           |
| WIDEBAND RADIO COMMUNICATION TESTER | CMW500         | R&S             | CTA-302        | 2024/08/03       | 2025/08/02           |
| Temperature and humidity meter      | Chigo          | ZG-7020         | CTA-326        | 2024/08/03       | 2025/08/02           |
| Ultra-Broadband Antenna             | Schwarzbeck    | VULB9163        | CTA-310        | 2023/10/17       | 2026/10/16           |
| Horn Antenna                        | Schwarzbeck    | BBHA 9120D      | CTA-309        | 2023/10/13       | 2026/10/12           |
| Loop Antenna                        | Zhinan         | ZN30900C        | CTA-311        | 2023/10/17       | 2026/10/16           |
| Broadband Horn Antenna              | A-INFOMW       | LB-180500H-2.4F | CTA-336        | 2023/09/13       | 2026/09/12           |
| Amplifier                           | Schwarzbeck    | BBV 9745        | CTA-312        | 2024/08/03       | 2025/08/02           |
| Amplifier                           | Taiwan chengyi | EMC051845B      | CTA-313        | 2024/08/03       | 2025/08/02           |
| Directional coupler                 | NARDA          | 4226-10         | CTA-303        | 2024/08/03       | 2025/08/02           |
| High-Pass Filter                    | XingBo         | XBLBQ-GTA18     | CTA-402        | 2024/08/03       | 2025/08/02           |
| High-Pass Filter                    | XingBo         | XBLBQ-GTA27     | CTA-403        | 2024/08/03       | 2025/08/02           |
| Automated filter bank               | Tonscend       | JS0806-F        | CTA-404        | 2024/08/03       | 2025/08/02           |
| Power Sensor                        | Agilent        | U2021XA         | CTA-405        | 2024/08/03       | 2025/08/02           |
| Amplifier                           | Schwarzbeck    | BBV9719         | CTA-406        | 2024/08/03       | 2025/08/02           |
| Test Equipment                      | Manufacturer   | Model No.       | Version number | Calibration Date | Calibration Due Date |
| EMI Test Software                   | Tonscend       | TS®JS32-RE      | 5.0.0.2        | N/A              | N/A                  |
| EMI Test Software                   | Tonscend       | TS®JS32-CE      | 5.0.0.1        | N/A              | N/A                  |
| RF Test Software                    | Tonscend       | TS®JS1120-3     | 3.1.65         | N/A              | N/A                  |

|                  |          |           |        |     |     |
|------------------|----------|-----------|--------|-----|-----|
| RF Test Software | Tonscend | TS®JS1120 | 3.1.46 | N/A | N/A |
|------------------|----------|-----------|--------|-----|-----|

## 2.5 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for filing to comply with of the FCC Part 27 Rules.

## 2.6 Modifications

No modifications were implemented to meet testing criteria.

### 3 TEST CONDITIONS AND RESULTS


#### 3.1 Output Power

##### LIMIT


According to § 27.50 C(10): Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP."

##### TEST CONFIGURATION

###### Conducted Power Measurement

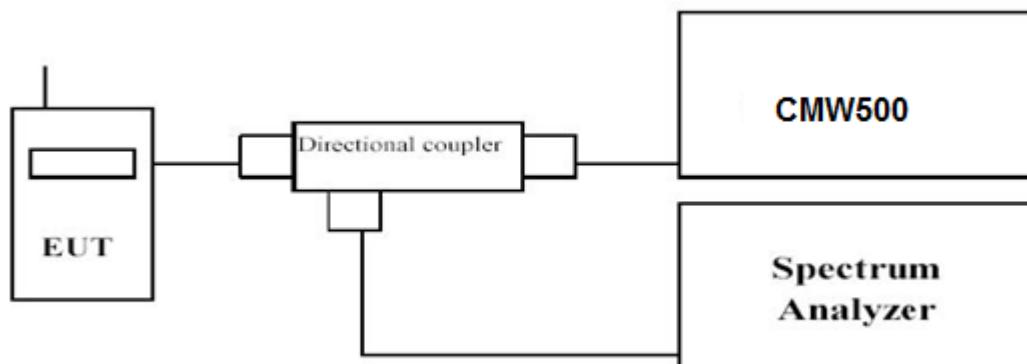

###### Radiated Power Measurement:

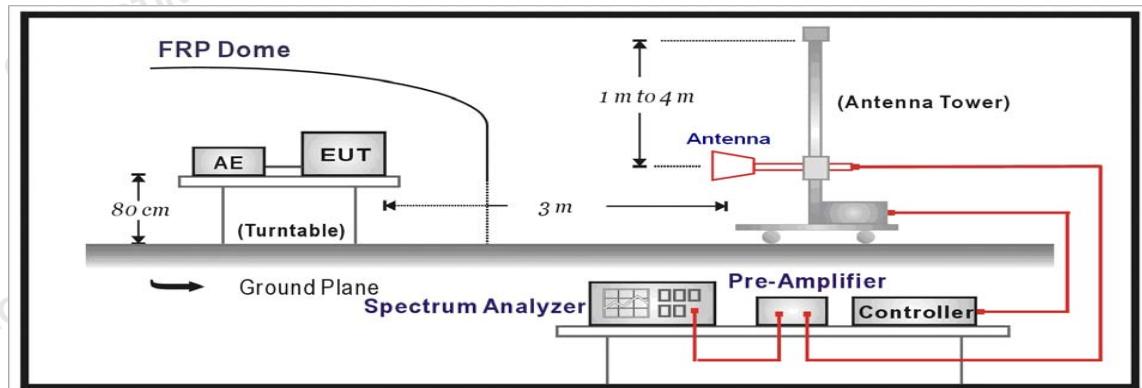

##### TEST PROCEDURE

The EUT was setup according to ANSI/TIA-603-E-2016

##### **Conducted Power Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

##### **Radiated Power Measurement:**

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.

- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The maximum signal level detected by the measuring receiver shall be noted.
- i) The transmitter shall be replaced by a substitution antenna.
- j) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k) The substitution antenna shall be connected to a calibrated signal generator.
- l) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q) Test site anechoic chamber refer to ANSI C63.4.

**TEST RESULTS****Conducted Measurement:**

| LTE Band 71 |            |         |           |                        |        |        |
|-------------|------------|---------|-----------|------------------------|--------|--------|
| BW (MHz)    | Modulation | RB Size | RB Offset | Channel/Frequency(MHz) |        |        |
|             |            |         |           | 133222                 | 133322 | 133372 |
|             |            |         |           | 673                    | 683    | 688    |
| 20          | QPSK       | 1       | 0         | 23.80                  | 23.52  | 23.75  |
| 20          | QPSK       | 1       | 49        | 24.10                  | 23.39  | 23.73  |
| 20          | QPSK       | 1       | 99        | 23.43                  | 23.42  | 24.01  |
| 20          | QPSK       | 50      | 0         | 22.37                  | 22.55  | 22.41  |
| 20          | QPSK       | 50      | 24        | 22.21                  | 22.73  | 22.43  |
| 20          | QPSK       | 50      | 50        | 22.64                  | 22.22  | 22.20  |
| 20          | QPSK       | 100     | 0         | 22.56                  | 22.35  | 22.27  |
| 20          | 16QAM      | 1       | 0         | 22.64                  | 22.19  | 22.69  |
| 20          | 16QAM      | 1       | 49        | 22.40                  | 22.27  | 22.24  |
| 20          | 16QAM      | 1       | 99        | 22.30                  | 22.61  | 22.07  |
| 20          | 16QAM      | 50      | 0         | 21.35                  | 21.54  | 21.55  |
| 20          | 16QAM      | 50      | 24        | 21.35                  | 21.53  | 21.30  |
| 20          | 16QAM      | 50      | 50        | 21.41                  | 21.50  | 21.72  |
| 20          | 16QAM      | 100     | 0         | 21.45                  | 21.56  | 21.49  |
| BW (MHz)    | Modulation | RB Size | RB Offset | Channel/Frequency(MHz) |        |        |
|             |            |         |           | 133197                 | 133297 | 133397 |
|             |            |         |           | 670.5                  | 680.5  | 690.5  |
| 15          | QPSK       | 1       | 0         | 23.78                  | 23.38  | 23.96  |
| 15          | QPSK       | 1       | 37        | 23.31                  | 23.62  | 23.55  |
| 15          | QPSK       | 1       | 74        | 23.50                  | 23.96  | 23.98  |
| 15          | QPSK       | 36      | 0         | 22.30                  | 22.23  | 22.37  |
| 15          | QPSK       | 36      | 20        | 22.46                  | 22.52  | 22.53  |
| 15          | QPSK       | 36      | 39        | 22.36                  | 22.46  | 22.33  |
| 15          | QPSK       | 75      | 0         | 22.27                  | 22.40  | 22.51  |
| 15          | 16QAM      | 1       | 0         | 22.13                  | 22.49  | 22.36  |
| 15          | 16QAM      | 1       | 37        | 22.65                  | 22.38  | 22.32  |
| 15          | 16QAM      | 1       | 74        | 22.20                  | 22.46  | 22.45  |
| 15          | 16QAM      | 36      | 0         | 21.59                  | 21.54  | 21.53  |
| 15          | 16QAM      | 36      | 20        | 21.70                  | 21.23  | 21.35  |
| 15          | 16QAM      | 36      | 39        | 21.60                  | 21.55  | 21.36  |
| 15          | 16QAM      | 75      | 0         | 21.60                  | 21.31  | 21.47  |

| BW<br>(MHz) | Modulation | RB Size | RB Offset | Channel/Frequency(MHz) |        |        |
|-------------|------------|---------|-----------|------------------------|--------|--------|
|             |            |         |           | 133172                 | 133297 | 133422 |
|             |            |         |           | 668                    | 680.5  | 693    |
| 10          | QPSK       | 1       | 0         | 23.69                  | 23.81  | 24.00  |
| 10          | QPSK       | 1       | 25        | 23.41                  | 23.34  | 23.23  |
| 10          | QPSK       | 1       | 49        | 23.67                  | 23.33  | 23.15  |
| 10          | QPSK       | 25      | 0         | 22.70                  | 22.39  | 22.37  |
| 10          | QPSK       | 25      | 12        | 22.49                  | 22.17  | 22.58  |
| 10          | QPSK       | 25      | 25        | 22.57                  | 22.66  | 22.33  |
| 10          | QPSK       | 50      | 0         | 22.41                  | 22.69  | 22.23  |
| 10          | 16QAM      | 1       | 0         | 22.45                  | 22.22  | 22.03  |
| 10          | 16QAM      | 1       | 25        | 22.48                  | 22.25  | 22.59  |
| 10          | 16QAM      | 1       | 49        | 22.13                  | 22.34  | 22.37  |
| 10          | 16QAM      | 25      | 0         | 21.47                  | 21.45  | 21.36  |
| 10          | 16QAM      | 25      | 12        | 21.52                  | 21.41  | 21.62  |
| 10          | 16QAM      | 25      | 25        | 21.38                  | 21.77  | 21.55  |
| 10          | 16QAM      | 50      | 0         | 21.49                  | 21.45  | 21.56  |
| BW<br>(MHz) | Modulation | RB Size | RB Offset | Channel/Frequency(MHz) |        |        |
|             |            |         |           | 133147                 | 133297 | 133447 |
|             |            |         |           | 665.5                  | 680.5  | 695.5  |
| 5           | QPSK       | 1       | 0         | 24.02                  | 23.62  | 23.46  |
| 5           | QPSK       | 1       | 12        | 23.57                  | 23.35  | 24.07  |
| 5           | QPSK       | 1       | 24        | 23.99                  | 23.98  | 23.41  |
| 5           | QPSK       | 12      | 0         | 22.49                  | 22.51  | 22.56  |
| 5           | QPSK       | 12      | 7         | 22.46                  | 22.59  | 22.30  |
| 5           | QPSK       | 12      | 13        | 22.25                  | 22.42  | 22.34  |
| 5           | QPSK       | 25      | 0         | 22.38                  | 22.15  | 22.25  |
| 5           | 16QAM      | 1       | 0         | 22.46                  | 22.42  | 22.22  |
| 5           | 16QAM      | 1       | 12        | 22.41                  | 22.73  | 22.26  |
| 5           | 16QAM      | 1       | 24        | 22.35                  | 22.21  | 22.18  |
| 5           | 16QAM      | 12      | 0         | 21.56                  | 21.36  | 21.43  |
| 5           | 16QAM      | 12      | 7         | 21.62                  | 21.46  | 21.75  |
| 5           | 16QAM      | 12      | 13        | 21.39                  | 21.70  | 21.53  |
| 5           | 16QAM      | 25      | 0         | 21.49                  | 21.54  | 21.47  |

**Radiated Measurement:**

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 71; recorded worst case for each Channel Bandwidth of LTE FDD Band 71.
2.  $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dB)$
3.  $ERP = EIRP - 2.15dB$  as EIRP by subtracting the gain of the dipole.

**LTE FDD Band 71\_Channel Bandwidth 5MHz\_QPSK**

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | Correction (dB) | $P_{Ag}$ (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|-----------------|---------------|-----------|-------------|-------------|--------------|
| 666.50          | -20.18          | 2.31          | 8.16                   | 2.15            | 36.6          | 20.12     | 34.77       | -14.65      | V            |
| 680.50          | -19.70          | 2.34          | 8.19                   | 2.15            | 36.6          | 20.60     | 34.77       | -14.17      | V            |
| 695.50          | -20.18          | 2.38          | 8.23                   | 2.15            | 36.6          | 20.12     | 34.77       | -14.65      | V            |

**LTE FDD Band 71\_Channel Bandwidth 10MHz\_QPSK**

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | Correction (dB) | $P_{Ag}$ (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|-----------------|---------------|-----------|-------------|-------------|--------------|
| 668.00          | -20.16          | 2.31          | 8.16                   | 2.15            | 36.6          | 20.14     | 34.77       | -14.63      | V            |
| 680.50          | -19.51          | 2.34          | 8.19                   | 2.15            | 36.6          | 20.79     | 34.77       | -13.98      | V            |
| 693.00          | -19.30          | 2.38          | 8.23                   | 2.15            | 36.6          | 21.00     | 34.77       | -13.77      | V            |

**LTE FDD Band 71\_Channel Bandwidth 15MHz\_QPSK**

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | Correction (dB) | $P_{Ag}$ (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|-----------------|---------------|-----------|-------------|-------------|--------------|
| 670.50          | -19.36          | 2.31          | 8.16                   | 2.15            | 36.6          | 20.94     | 34.77       | -13.83      | V            |
| 680.50          | -19.41          | 2.34          | 8.19                   | 2.15            | 36.6          | 20.89     | 34.77       | -13.88      | V            |
| 690.50          | -19.26          | 2.38          | 8.23                   | 2.15            | 36.6          | 21.04     | 34.77       | -13.73      | V            |

**LTE FDD Band 71\_Channel Bandwidth 20MHz\_QPSK**

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | Correction (dB) | $P_{Ag}$ (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|-----------------|---------------|-----------|-------------|-------------|--------------|
| 673.00          | -19.92          | 2.31          | 8.16                   | 2.15            | 36.6          | 20.38     | 34.77       | -14.39      | V            |
| 683.00          | -20.20          | 2.34          | 8.19                   | 2.15            | 36.6          | 20.10     | 34.77       | -14.67      | V            |
| 688.00          | -20.33          | 2.38          | 8.23                   | 2.15            | 36.6          | 19.97     | 34.77       | -14.80      | V            |

**LTE FDD Band 71\_Channel Bandwidth 5MHz\_16QAM**

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | Correction (dB) | $P_{Ag}$ (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|-----------------|---------------|-----------|-------------|-------------|--------------|
| 666.50          | -20.92          | 2.31          | 8.16                   | 2.15            | 36.6          | 19.38     | 34.77       | -15.39      | V            |
| 680.50          | -20.87          | 2.34          | 8.19                   | 2.15            | 36.6          | 19.43     | 34.77       | -15.34      | V            |
| 695.50          | -19.19          | 2.38          | 8.23                   | 2.15            | 36.6          | 21.11     | 34.77       | -13.66      | V            |

**LTE FDD Band 71\_Channel Bandwidth 10MHz\_16QAM**

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | Correction (dB) | $P_{Ag}$ (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|-----------------|---------------|-----------|-------------|-------------|--------------|
| 668.00          | -19.60          | 2.31          | 8.16                   | 2.15            | 36.6          | 20.70     | 34.77       | -14.07      | V            |
| 680.50          | -19.62          | 2.34          | 8.19                   | 2.15            | 36.6          | 20.68     | 34.77       | -14.09      | V            |
| 693.00          | -19.56          | 2.38          | 8.23                   | 2.15            | 36.6          | 20.74     | 34.77       | -14.03      | V            |

## LTE FDD Band 71\_Channel Bandwidth 15MHz\_16QAM

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | Correction (dB) | P <sub>Ag</sub> (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|----------------------|-----------|-------------|-------------|--------------|
| 670.50          | -19.52                 | 2.31                 | 8.16                            | 2.15            | 36.6                 | 20.78     | 34.77       | -13.99      | V            |
| 680.50          | -19.17                 | 2.34                 | 8.19                            | 2.15            | 36.6                 | 21.13     | 34.77       | -13.64      | V            |
| 690.50          | -20.27                 | 2.38                 | 8.23                            | 2.15            | 36.6                 | 20.03     | 34.77       | -14.74      | V            |

## LTE FDD Band 71\_Channel Bandwidth 20MHz\_16QAM


| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | Correction (dB) | P <sub>Ag</sub> (dB) | ERP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|-----------------|----------------------|-----------|-------------|-------------|--------------|
| 673.00          | -19.24                 | 2.31                 | 8.16                            | 2.15            | 36.6                 | 21.06     | 34.77       | -13.71      | V            |
| 683.00          | -19.63                 | 2.34                 | 8.19                            | 2.15            | 36.6                 | 20.67     | 34.77       | -14.10      | V            |
| 688.00          | -20.69                 | 2.38                 | 8.23                            | 2.15            | 36.6                 | 19.61     | 34.77       | -15.16      | V            |

### 3.2 Peak-to-Average Ratio (PAR)

#### LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

#### TEST CONFIGURATION

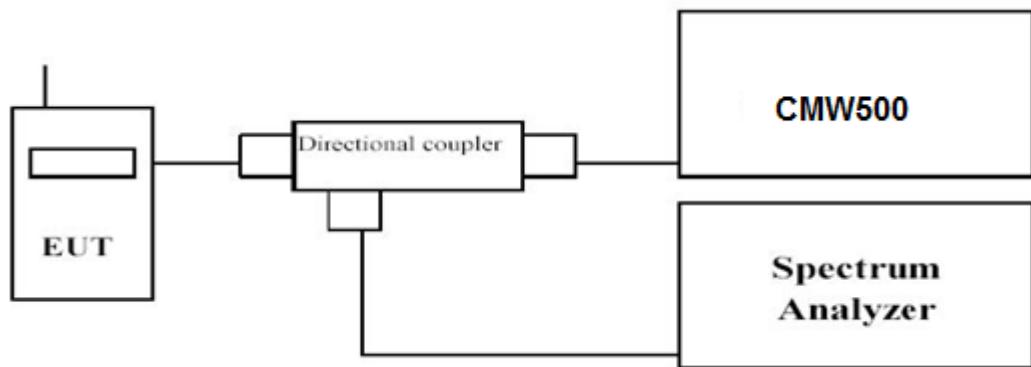

#### TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms,
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

#### TEST RESULTS

-----Passed-----


*Please refer to the appendix test data.*

### 3.3 Occupied Bandwidth and Emission Bandwidth

#### LIMIT

N/A

#### TEST CONFIGURATION

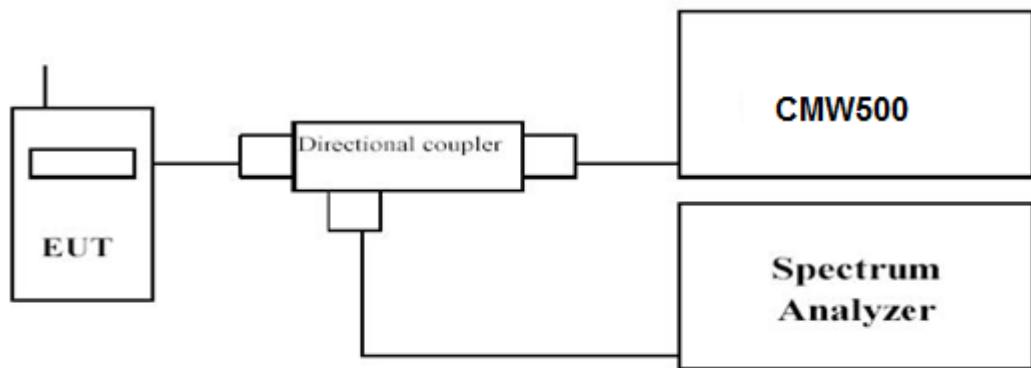

#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW,  $VBW \geq 3$  times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

#### TEST RESULTS

-----Passed-----


*Please refer to the appendix test data.*

### 3.4 Band Edge compliance

#### LIMIT

According to Part §27.53(g): For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

#### TEST CONFIGURATION

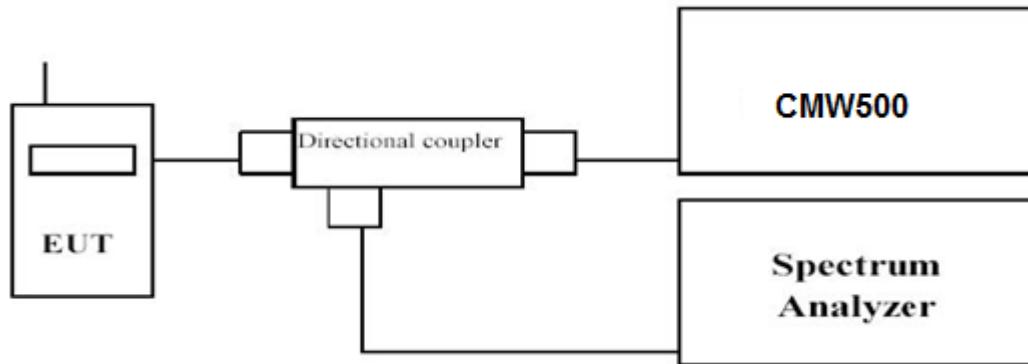

#### TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

#### TEST RESULTS

-----Passed-----

*Please refer to the appendix test data.*


### 3.5 Spurious Emission

#### LIMIT


According to Part §27.53(g): For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

#### TEST CONFIGURATION

Conducted Spurious Measurement:

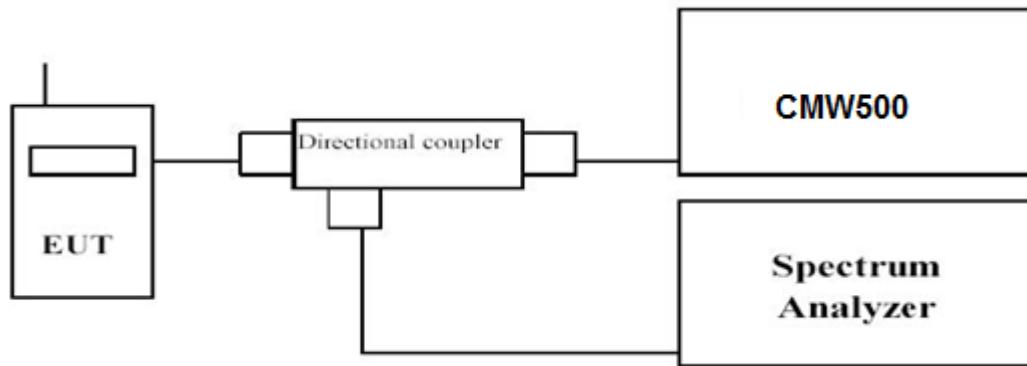


Radiated Spurious Measurement:

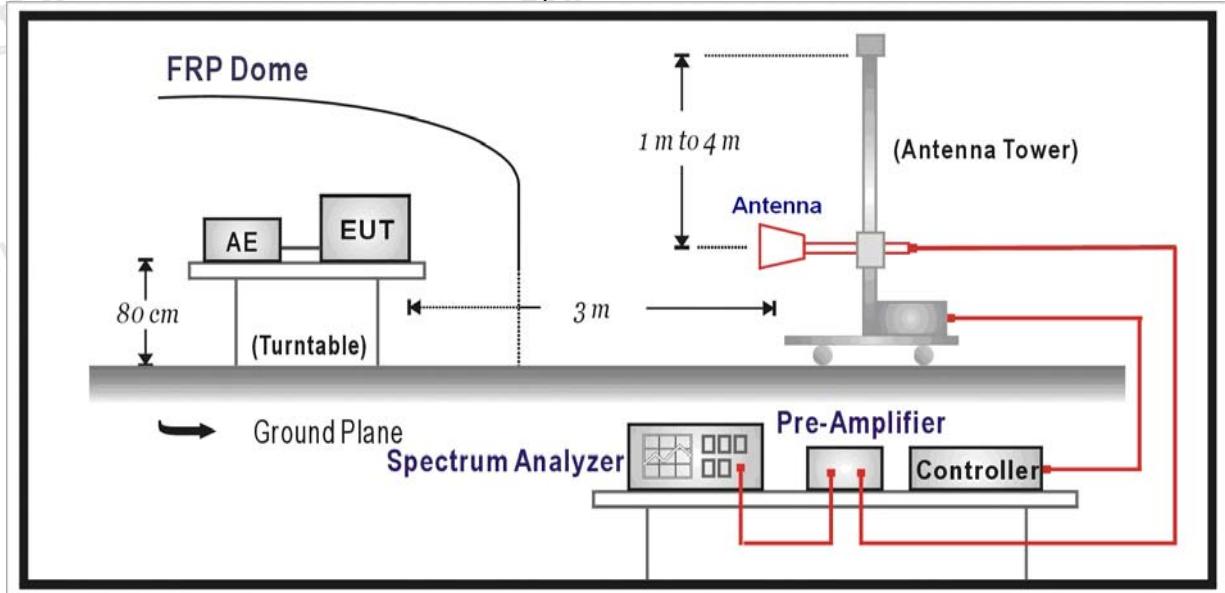


#### TEST CONFIGURATION

Conducted Spurious Measurement:

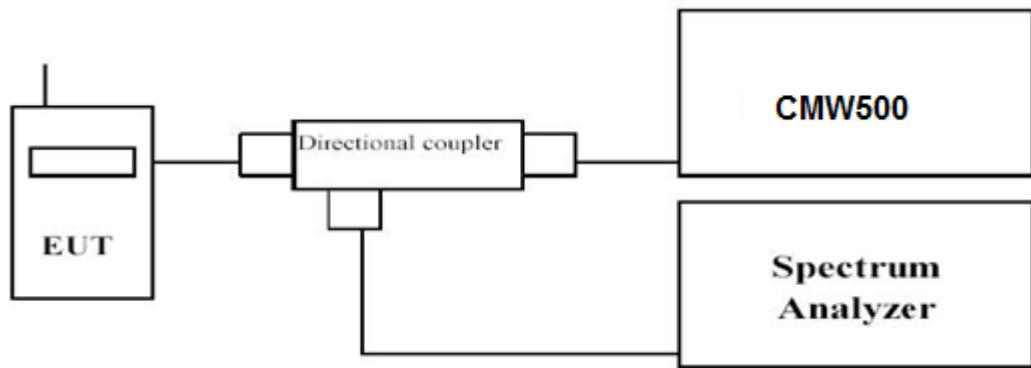

Radiated Spurious Measurement:

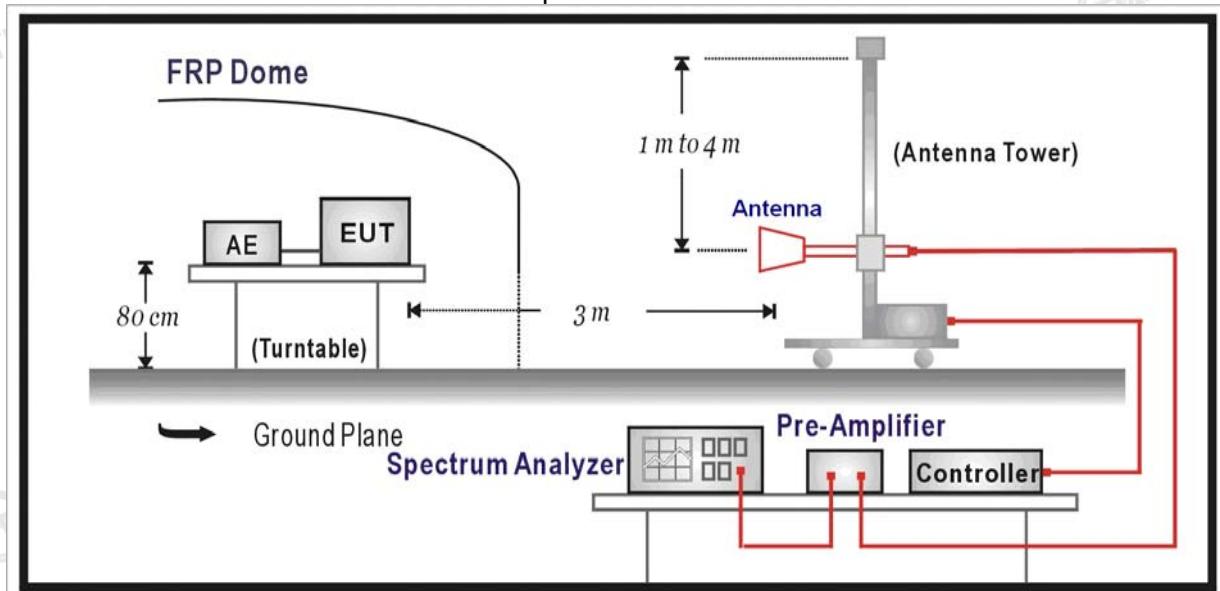

## TEST PROCEDURE

The EUT was setup according to ANSI/TIA-603-E-2016

### **Conducted Spurious Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

**Radiated Spurious Measurement:**

- a. The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c. The output of the test antenna shall be connected to the measuring receiver.
- d. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.
- r. Test site anechoic chamber refer to ANSI C63.4.

**TEST RESULTS**

**Conducted Measurement:**

-----Passed-----

*Please refer to the appendix test data.*

**Radiated Measurement:****Remark:**

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 71; recorded worst case for each Channel Bandwidth of LTE FDD Band 71 @ QPSK
2.  $EIRP = PMea(dBm) - Pcl(dB) + Ga(dBi)$
3. We were not recorded other points as values lower than limits.
4. Margin = Limit - EIRP

*LTE FDD Band 71 Channel Bandwidth 20MHz QPSK Low Channel*

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | Distance (m) | Ga Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|--------------|---------------------|-----------------|-------------|-------------|--------------|
| 1346.00         | -42.49     | 2.83     | 3.00         | 7.24                | -38.08          | -13.00      | -25.08      | H            |
| 2019.00         | -52.14     | 2.91     | 3.00         | 9.51                | -45.54          | -13.00      | -32.54      | H            |
| 1346.00         | -44.60     | 2.83     | 3.00         | 7.24                | -40.19          | -13.00      | -27.19      | V            |
| 2019.00         | -48.75     | 2.91     | 3.00         | 9.51                | -42.15          | -13.00      | -29.15      | V            |

*LTE FDD Band 71 Channel Bandwidth 20MHz QPSK Middle Channel*

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | Distance (m) | Ga Antenna Gain(dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|--------------|---------------------|------------|-------------|-------------|--------------|
| 1366.00         | -42.36     | 2.83     | 3.00         | 7.24                | -37.95     | -13.00      | -24.95      | H            |
| 2049.00         | -52.48     | 2.91     | 3.00         | 9.51                | -45.88     | -13.00      | -32.88      | H            |
| 1366.00         | -44.06     | 2.83     | 3.00         | 7.24                | -39.65     | -13.00      | -26.65      | V            |
| 2049.00         | -51.38     | 2.91     | 3.00         | 9.51                | -44.78     | -13.00      | -31.78      | V            |

*LTE FDD 7 Channel Bandwidth 20MHz QPSK High Channel*

| Frequency (MHz) | PMea (dBm) | Pcl (dB) | Distance (m) | Ga Antenna Gain(dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------|----------|--------------|---------------------|------------|-------------|-------------|--------------|
| 1376.00         | -44.10     | 2.83     | 3.00         | 7.24                | -39.69     | -13.00      | -26.69      | H            |
| 2064.00         | -55.34     | 2.91     | 3.00         | 9.51                | -48.74     | -13.00      | -35.74      | H            |
| 1376.00         | -45.33     | 2.83     | 3.00         | 7.24                | -40.92     | -13.00      | -27.92      | V            |
| 2064.00         | -54.53     | 2.91     | 3.00         | 9.51                | -47.93     | -13.00      | -34.93      | V            |

**Notes:**


1. All channel bandwidth were tested, the report recorded the worst data.
2.  $EIRP = PMea(dBm) - Pcl(dB) + PAg(dB) + Ga(dBi)$
3. ERP = EIRP - 2.15dBi as EIRP by subtracting the gain of the dipole.
4. Margin = EIRP - Limit
5. We measured all modes and only recorded the worst case.

### 3.6 Frequency Stability under Temperature & Voltage Variations

#### LIMIT

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

#### TEST CONFIGURATION

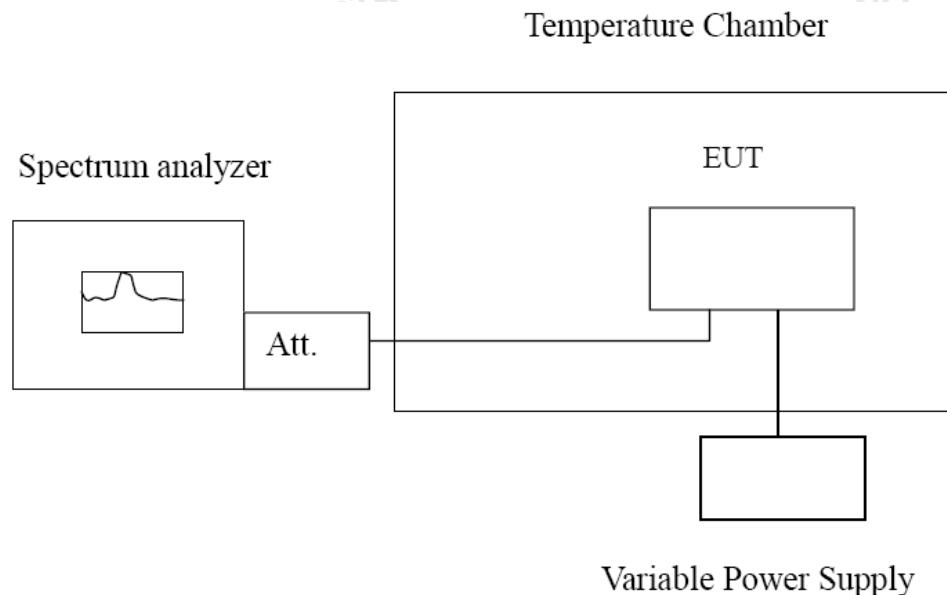

#### TEST PROCEDURE

The EUT was setup according to ANSI/TIA-603-E-2016

##### **Frequency Stability under Temperature Variations:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE Band 17, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1 Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

##### **Frequency Stability under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

## TEST RESULTS

-----Passed-----

*Please refer to the appendix test data.*

## **4 Test Setup Photos of the EUT**

Please refer to separated files for Test Setup Photos of the EUT.

## **5 Photos of the EUT**

Please refer to separated files for External Photos & Internal Photos of the EUT.

\*\*\*\*\* End of Report \*\*\*\*\*