

承 认 书

SPECIFICATION FOR APPROVAL

客 户 名 称

CUSTOMER NAME:

产 品 名 称

PRODUCT NAME: 2.4G -2dBi 小 SMA 铜头公针黑色天线

客 户 料 号

CUSTOMER P/N:

电子料号

P/N:

REV: A

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
CHECKED BY:		
AUDITOR BY:		
APPROVED BY:		
DATE:	2016-07-06	

Shenzhen Xiangboyi Technology Co. Ltd

Tel: (+86)0755-29369912 Fax: (+86)0755-61624200

R & D Center: 101, floor 1, Wencheng building, Yousong Cultural Innovation Park, No. 95, Yousong Road, Longhua District, Shenzhen.

Production Base: 5 / F, building B, Huazhi chuangu, No. 7, Yuhua street, 138 Industrial Zone, Tangxia Town, Dongguan City.


Contents

<i>Item</i>	<i>Description</i>
一、	规格表
二、	成品图
三、	测试报告

一、规格表:

产品主要技术参数


主要技术指标		Main technical specifications	
频率范围 (MHZ)	2400-2500	Frequency Range (MHZ)	2400-2500
特性阻抗(Ω)	50	Impedance(Ω)	50
增益(dBi)	2 $\pm$ 0.5	Gain(dBi)	2 $\pm$ 0.5
输出电压 驻波比	≤ 1.92	VSWR	≤ 1.92
最大功率	10W	Admitted Power	10W
极化方式	垂直极化	Polarization	Linear,Vertical
方向性	全向性	Radiation	Omni-directional
连接方式	SMA	Connector Type	SMA
物理性能		Physical Properties	
天线外套材料	TPEE	Antenna cover	TPEE
工作温度	-20℃~+70℃	Operating Temp	-20℃~+70℃
保存温度	-20℃~+70℃	Storage Temp	-20℃~+70℃

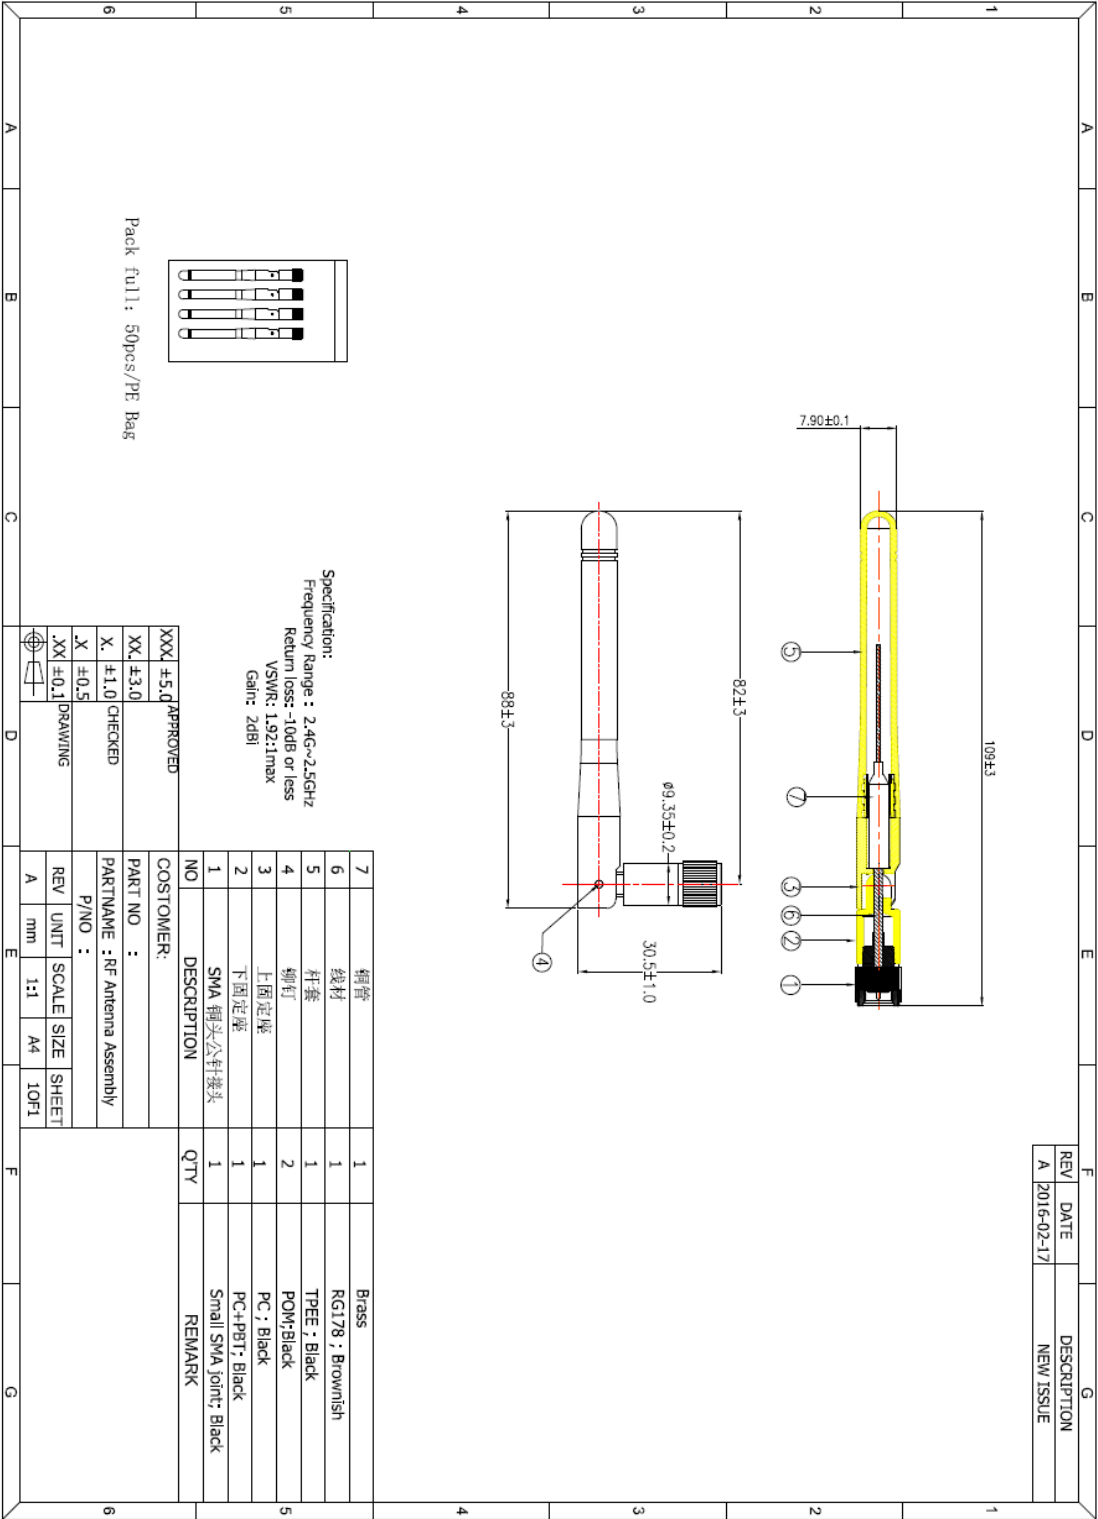


11、成品图:


三、测试报告

3.1: 网络分析仪测试报告

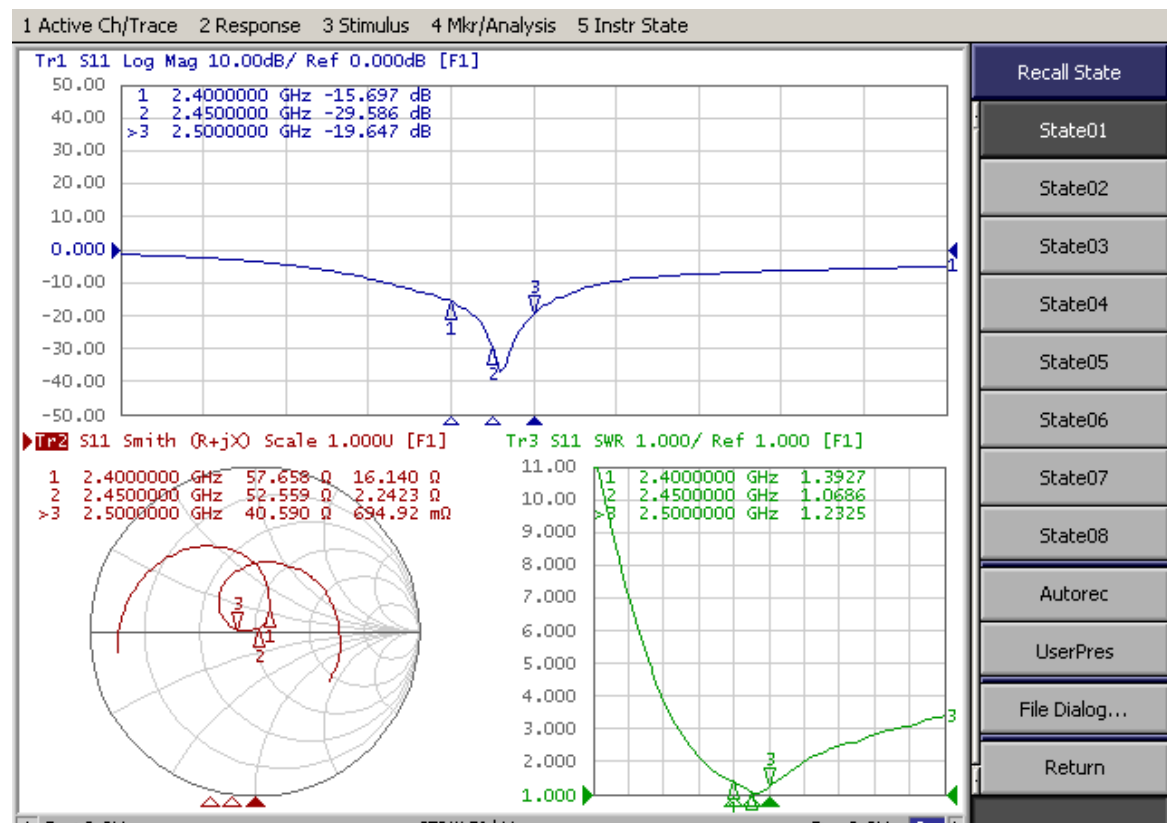


3.2: 暗室 2D、3DRadiation Pattern

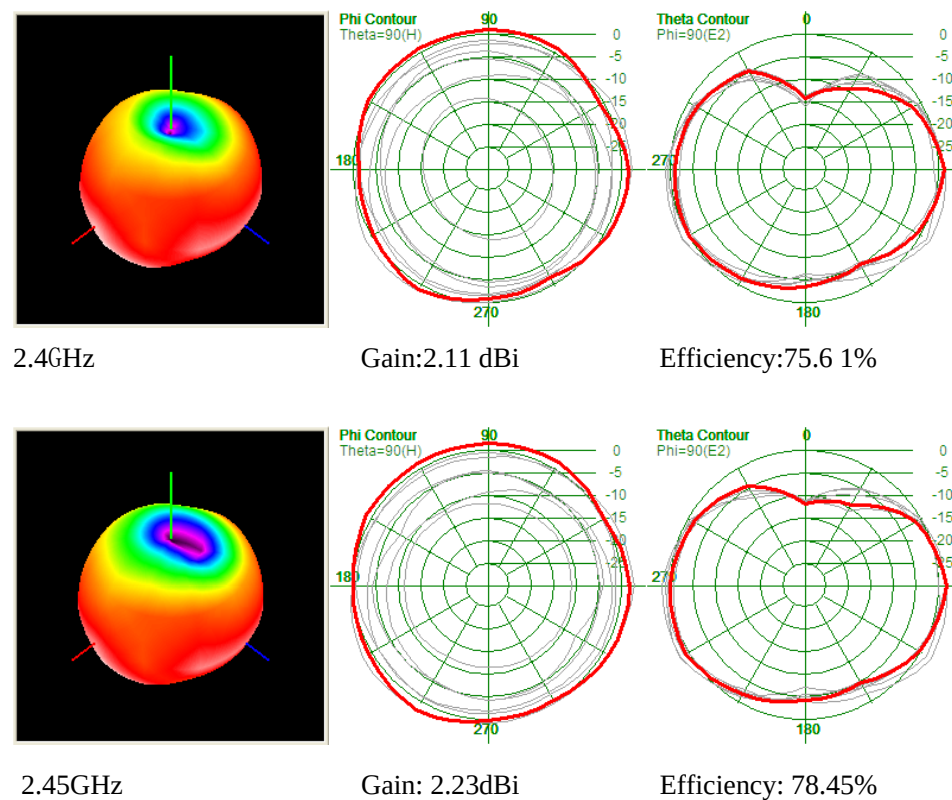




2.5GHz



Gain: 2.36dBi



Efficiency: 79.32%