
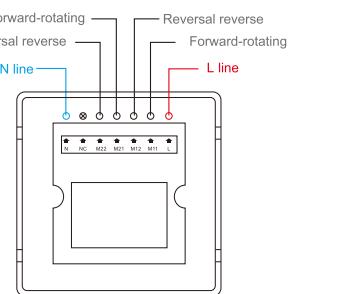

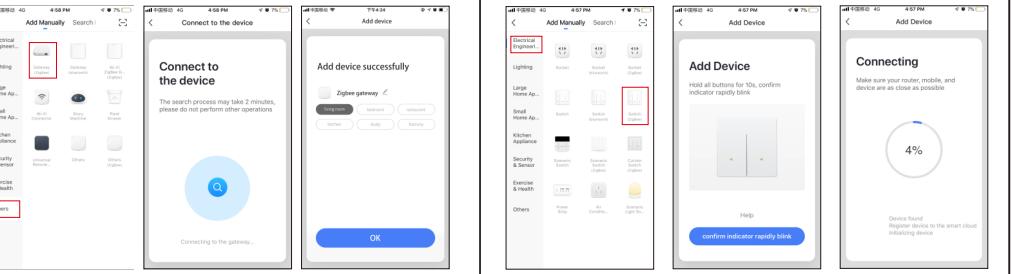
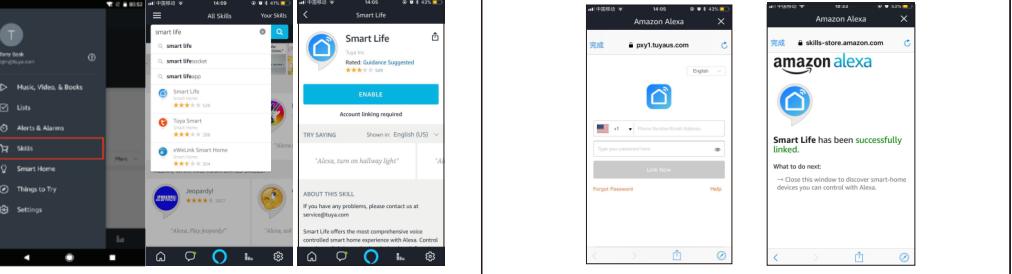
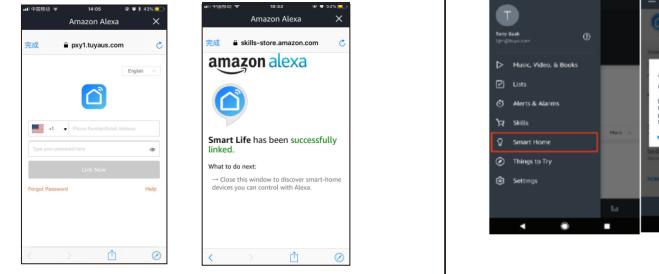



<h2>Smart Zigbee Touch Switch</h2> <h3>User's Guide</h3> <p>* Please read the instructions carefully before using the product and keep it in a safe place.</p> <p>(UK-Z-NL)</p>	<h4>Product parameters</h4> <p>Input voltage: 100-240V AC 50-60Hz Maximum Load: 800W Connecting method: zigbee Power supply mode: single fire line power supply Wireless power consumption: ≤0.3W Working humidity: 5~90% Operating temperature: -20~40°C Panel size: 86*86*34mm Carton size: 100*100*40mm</p>	<h4>Installation Notes(Light switch)</h4> <p>Precautions</p> <ol style="list-style-type: none"> <li>1. Please ensure that the gateway works normally (green light is always on);</li> <li>2. Please use the regular light bulb to work (the irregular light bulb is easy to produce flashing state);</li> <li>3. Power must be cut off before installation and operated by a professional electrician.</li> </ol>  <p>Connect the wires as shown above, tighten the screws and check for firmness.</p>	<h4>Installation Notes(Curtain switch)</h4> <p>Precautions</p>  <p>Connect the wires as shown above, tighten the screws and check for firmness.</p>	<h4>Installation Notes(Scene switch)</h4> <p>Precautions</p>  <p>Connect the wires as shown above, tighten the screws and check for firmness.</p>	<h4>Device pairing step</h4> <p>Download APP</p> <ol style="list-style-type: none"> <li>1. Please scan the QR code below to download the Smart Life app.</li> </ol>  <ol style="list-style-type: none"> <li>2. You can also go to the app market to search for "smart life" download apps.</li> </ol> <p><b>Registered</b></p> <ol style="list-style-type: none"> <li>1. If you don't have an APP account yet, you can choose to register and you can use your mobile phone number. Or register with a mailbox number.</li> <li>2. Go to the registration page to register, then click on the verification code and enter the verification code. Set the password and click OK to register.</li> </ol> <p>5</p>
---	--	---	--	--	--

<h4>Add gateway</h4> <p>Open the app, click "Add Device" and find it in other sections. "Zigbee", connect the gateway to the power supply, and the home router. Connected, the mobile phone and the gateway are on the same network, and the confirmation indicator (green light) is always on. If the indicator is in other states, press and hold the reset button until the green light is on, click "OK" "The indicator light is always on" Start pairing</p>  <p>6 7 8</p>	<h4>Add device</h4> <p>Go to the app, click "Add Device" on the homepage, look for it in the electrician column. Go to the device "Zigbee", select the added gateway, long press any switch After pressing the button for more than 10 seconds, the button light starts to flash, click "Confirm indicator flashes" Start connecting until the device is added successfully. Set the device name and function according to the prompts. Scenes.</p>  <p>6 7 8</p>	<h4>Binding Alexa</h4> <p>Bind the Smart Life account to "Alexa"</p> <ol style="list-style-type: none"> <li>1. Click on "SKILLS" in the menu and search for "Smart Life". Select "Smart Life" in the search results and click "ENABLE" to enable the skill.</li> </ol>  <p>6 7 8</p>	<p>2. After clicking the bind account, in the new page, Enter your Smart Life application account and password, and Choose the country of your account correctly, then click "Log in now" to bind your "Smart Life" account. After the binding is successful, click "OK" to return Main interface.</p>  <p>9 10</p>	<h4>FCC Statement</h4> <p>This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none"> <li>• Reorient or relocate the receiving antenna.</li> <li>• Increase the separation between the equipment and receiver.</li> <li>• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.</li> <li>• Consult the dealer or an experienced radio/TV technician for help.</li> </ul> <p>Caution: Any changes or modifications to this device not explicitly approved by the manufacturer could void your authority to operate this equipment.</p> <p>This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:</p> <ol style="list-style-type: none"> <li>(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.</li></ol> <p>This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.</p>
--	---	--	---	---