



# RF TEST REPORT

**Applicant** Smawave Technology Co. ,Ltd

**FCC ID** 2AU8HSMC411-A

**Product** LTE-A Hotspot

**Brand** Smawave

**Model** SMC411-a

**Report No.** R2011A0794-R3V2

**Issue Date** December 31, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

**TA Technology (Shanghai) Co., Ltd.**

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## TABLE OF CONTENT

1. Test Laboratory.....	5
1.1. Notes of the test report.....	5
1.2. Test facility.....	5
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
2.1. Applicant and Manufacturer Information.....	6
2.2. General information.....	6
3. Applied Standards.....	8
4. Test Configuration.....	9
5. Test Case Results.....	10
5.1. Maximum output power.....	10
5.2. 99% Bandwidth and 6dB Bandwidth.....	14
5.3. Band Edge.....	20
5.4. Power Spectral Density.....	24
5.5. Spurious RF Conducted Emissions.....	37
5.6. Unwanted Emission.....	41
5.7. Conducted Emission.....	73
6. Main Test Instruments.....	76
ANNEX A: The EUT Appearance.....	77
ANNEX B: Test Setup Photos.....	78



Version	Revision description	Issue Date
Rev.0	/	December 28, 2020
Rev.1	Update information for USB.	December 30, 2020
Rev.2	Update information in page 6.	December 31, 2020
Note: This revised report (Report No. R2011A0794-R3V2) supersedes and replaces the previously issued report (Report No. R2011A0794-R3V1). Please discard or destroy the previously issued report and dispose of it accordingly.		



## Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Maximum output power	15.247(b)(3)	PASS
2	99% Bandwidth and 6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Unwanted Emissions	15.247(d),15.205,15.209	PASS
7	Conducted Emissions	15.207	PASS
Date of Testing: November 18, 2020 ~ December 28, 2020			
Date of Sample Received: November 18, 2020			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			



## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.

Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong

City: Shanghai

Post code: 201201

Country: P. R. China

Contact: Xu Kai

Telephone: +86-021-50791141/2/3

Fax: +86-021-50791141/2/3-8000

Website: <http://www.ta-shanghai.com>

E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)



## 2. General Description of Equipment under Test

### 2.1. Applicant and Manufacturer Information

Applicant	Smawave Technology Co. ,Ltd
Applicant address	3/F, Building 8, 1001 North Qinzhou Road, Xuhui District, Shanghai, China
Manufacturer	Smawave Technology Co. ,Ltd
Manufacturer address	3/F, Building 8, 1001 North Qinzhou Road, Xuhui District, Shanghai, China

### 2.2. General information

EUT Description					
Model	SMC411-a				
IMEI	862165040847046				
Hardware Version	V1.0				
Software Version	SG628_V1.0.4				
Power Supply	Battery / AC adapter				
Antenna Type	PCB Antenna				
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)				
Antenna Gain	Antenna 1	Frequency(MHz)	Antenna Gain(dBi)		
		2410	-0.6		
		2420	-0.3		
		2440	0.1		
		2450	0.3		
		2460	0.6		
	Antenna 2	2410	-0.6		
		2420	-0.5		
		2440	0.0		
		2450	0.0		
		2460	0.3		
Antenna Working Conditions	Antenna	Working conditions			
	ANT_WLAN1	WIFI2.4G TX & RX			
	ANT_WLAN0	WIFI2.4G TX & RX			
Additional beamforming gain	NA				
Test Mode	802.11b, 802.11g, 802.11n(HT20/HT40)				
Modulation Type	802.11b: DSSS				



	802.11g/n(HT20/HT40): OFDM
Max. Conducted Power	Wi-Fi 2.4G:18.45dBm
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2462 MHz 802.11n(HT40): 2422 ~ 2452 MHz
<b>EUT Accessory</b>	
Battery	Manufacturer: HUIZHOU DXDRAGON INC. Model: BTE-4001 Output: 3.8V 4000mAh
USB Cable	Manufacturer: Chengdu Jingyue Kaibo Electronics Co., Ltd Model:SJM001
<b>Auxiliary equipment</b>	
Adapter	Manufacturer:SHENZHEN TIANYIN ELECTRONICS CO.,LTD Model:TPA-46050200VU
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant. 2. The EUT don't have standard Adapter, The Adapter used for testing in this report is the after-market accessory.	



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR47 Part 15C (2019) Radio Frequency Devices**

**ANSI C63.10 (2013)**

**Reference standard:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

**KDB 662911 D01 Multiple Transmitter Output v02r01**



## 4. Test Configuration

### Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the loop antenna is vertical, the others are vertical and horizontal. and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate		
	SISO Antenna 1	SISO Antenna 2	MIMO
802.11b	1 Mbps	1 Mbps	1 Mbps
802.11g	6 Mbps	6 Mbps	6 Mbps
802.11n HT20	MCS0	MCS0	MCS8
802.11n HT40	MCS0	MCS0	MCS8

The worst case Antenna mode for each of the following tests for Wi-Fi:

Test Cases	SISO Antenna 1	SISO Antenna 2	MIMO
Maximum conducted output power	O	O	O
99% Bandwidth and 6 dB bandwidth	--	O	--
Band Edge	--	O	--
Power Spectral Density	O	O	O
Spurious RF Conducted Emissions	--	O	--
Unwanted Emissions	--	802.11b/g	802.11n HT20 802.11n HT40
Conducted Emission	--	802.11g	--
Note: "O": test all bands			

**According to RF Output power results in chapter 5.1, SISO Antenna 2 was selected as the worst antenna for conducted test items.**

## 5. Test Case Results

### 5.1. Maximum output power

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT was connected to Power meter with a known loss. The EUT is max power transmission with proper modulation.

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

#### Test Setup



#### Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44$  dB.

**Test Results**

Test Mode	T <sub>on</sub> (ms)	T <sub>(on+off)</sub> (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11b	12.42	12.54	0.99	NA
802.11g	2.06	2.23	0.92	0.34
802.11n HT20	1.92	2.02	0.95	0.21
802.11n HT40	0.94	1.12	0.84	0.76

Note: when Duty cycle  $\geq 0.98$ , Duty cycle correction Factor not required.

**SISO Antenna 1:**

Test Mode	Carrier frequency (MHz)	TP Set	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11b	2412	57	18.14	18.14	30	PASS
	2437	53	16.14	16.14	30	PASS
	2462	45	15.02	15.02	30	PASS
802.11g	2412	52	13.28	13.62	30	PASS
	2437	50	11.78	12.12	30	PASS
	2462	42	10.06	10.40	30	PASS
802.11n HT20	2412	51	13.28	13.49	30	PASS
	2437	50	11.95	12.16	30	PASS
	2462	40	9.12	9.33	30	PASS
802.11n HT40	2422	45	9.52	10.28	30	PASS
	2437	43	8.53	9.29	30	PASS
	2452	36	5.40	6.16	30	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

**SISO Antenna 2:**

Test Mode	Carrier frequency (MHz)	TP Set	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11b	2412	57	18.45	18.45	30	PASS
	2437	48	16.92	18.06	30	PASS
	2462	45	14.22	14.22	30	PASS
802.11g	2412	55	13.02	13.36	30	PASS
	2437	45	12.21	12.55	30	PASS
	2462	42	9.90	10.24	30	PASS
802.11n HT20	2412	51	13.33	13.54	30	PASS
	2437	49	13.24	13.45	30	PASS
	2462	40	8.78	8.99	30	PASS
802.11n HT40	2422	45	10.42	11.18	30	PASS
	2437	43	9.70	10.46	30	PASS
	2452	36	6.07	6.83	30	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor



## MIMO

Test Mode	Carrier frequency (MHz)	MIMO Antenna 1			MIMO Antenna 2			Total Power (dBm)	Limit (dBm)	Conclusion
		TP Set	Average Power Measured (dBm)	Average Power with duty factor (dBm)	TP Set	Average Power Measured (dBm)	Average Power with duty factor (dBm)			
802.11b	2412	50.00	15.07	15.07	50.00	14.72	14.72	17.91	30	PASS
	2437	46.00	12.90	12.90	46.00	14.54	14.54	16.81	30	PASS
	2462	45.00	14.23	14.23	45.00	13.77	13.77	17.02	30	PASS
802.11g	2412	46.00	10.74	11.08	46.00	10.08	10.42	13.77	30	PASS
	2437	42.00	8.05	8.39	42.00	9.70	10.04	12.30	30	PASS
	2462	42.00	9.32	9.66	42.00	8.97	9.31	12.50	30	PASS
802.11n HT20	2412	48.00	11.04	11.25	48.00	10.89	11.10	14.19	30	PASS
	2437	42.00	8.08	8.29	42.00	9.98	10.19	12.36	30	PASS
	2462	40.00	8.19	8.40	40.00	7.68	7.89	11.16	30	PASS
802.11n HT40	2422	45.00	8.37	9.13	45.00	9.45	10.21	12.71	30	PASS
	2437	43.00	7.71	8.47	43.00	8.62	9.38	11.96	30	PASS
	2452	36.00	4.88	5.64	36.00	5.49	6.25	8.97	30	PASS

Note: 1. Average Power with duty factor = Average Power Measured + Duty cycle correction factor

2. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),

The Total Power =  $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$ .

3. The manufacturer declared the transmitter output signals is CDD mode. And  $N_{ss}=2$ . According to KDB 662911 D01 Multiple Transmitter Output v02r01 2)f)(i): If all antennas have the same gain, Directional gain =  $G_{ANT} + \text{Array Gain}$ ,

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{ss})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

4. If antenna gains are not equal, the user may use either of the following methods to calculate directional gain, provided that each transmit antenna is driven by only one spatial stream: Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{ANT}$  set equal to the gain of the antenna having the highest gain.

So directional gain =  $G_{ANT} + \text{Array Gain} = 0.6 + 0 = 0.6\text{dBi} < 6\text{dBi}$ . So the power limit is 30dBm

## 5.2. 99% Bandwidth and 6dB Bandwidth

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer. Dector=Peak, Trace mode=max hold.

The EUT was connected to the spectrum analyzer through a known loss cable. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

### Test Setup



### Limits

Rule Part 15.247 (a) (2) specifies that "Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz."

minimum 6 dB bandwidth	$\geq 500$ kHz
------------------------	----------------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

**Test Results:**

Test Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (MHz)	Conclusion
802.11b	2412	15.562	9.53	0.5	PASS
	2437	15.640	9.57	0.5	PASS
	2462	15.077	9.55	0.5	PASS
802.11g	2412	16.619	16.30	0.5	PASS
	2437	18.053	16.30	0.5	PASS
	2462	16.611	16.34	0.5	PASS
802.11n HT20	2412	17.767	16.91	0.5	PASS
	2437	18.800	17.57	0.5	PASS
	2462	17.754	17.56	0.5	PASS
802.11n HT40	2422	36.058	31.40	0.5	PASS
	2437	36.672	35.14	0.5	PASS
	2452	36.048	35.31	0.5	PASS

## 99%bandwidth


802.11b, Carrier frequency (MHz): 2412




802.11g, Carrier frequency (MHz): 2412



802.11b, Carrier frequency (MHz): 2437

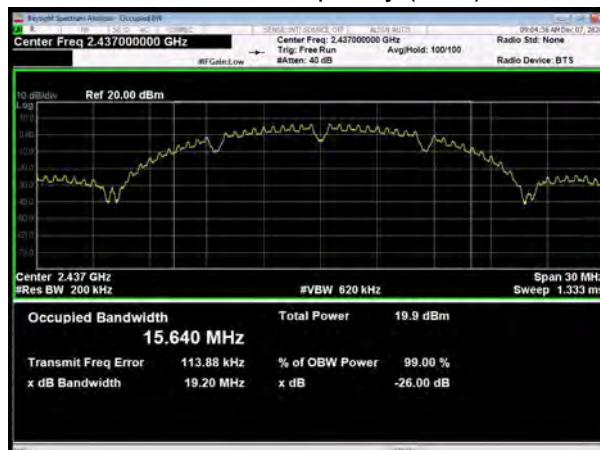

802.11g, Carrier frequency (MHz): 2437

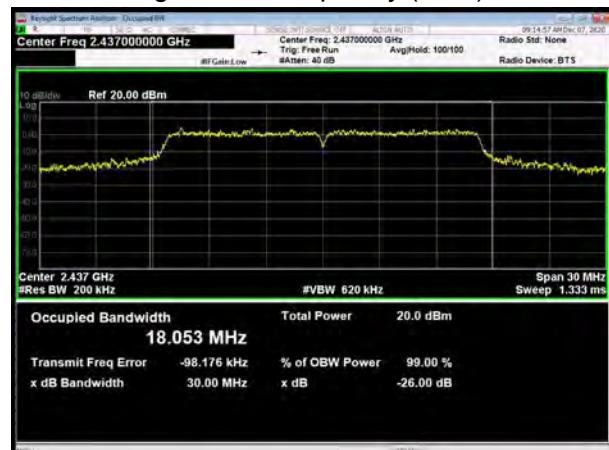

802.11b, Carrier frequency (MHz): 2462



802.11g, Carrier frequency (MHz): 2462





## 802.11n(HT20), Carrier frequency (MHz): 2412



## 802.11n(HT40), Carrier frequency (MHz): 2422




## 802.11n(HT20), Carrier frequency (MHz): 2437



## 802.11n(HT40), Carrier frequency (MHz): 2437



## 802.11n(HT20), Carrier frequency (MHz): 2462

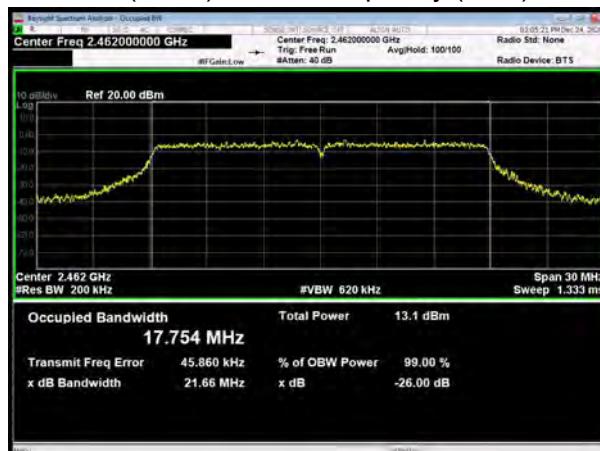

## 802.11n(HT40), Carrier frequency (MHz): 2452



**6 dB bandwidth**


802.11b, Carrier frequency (MHz): 2412




802.11g, Carrier frequency (MHz): 2412




802.11b, Carrier frequency (MHz): 2437

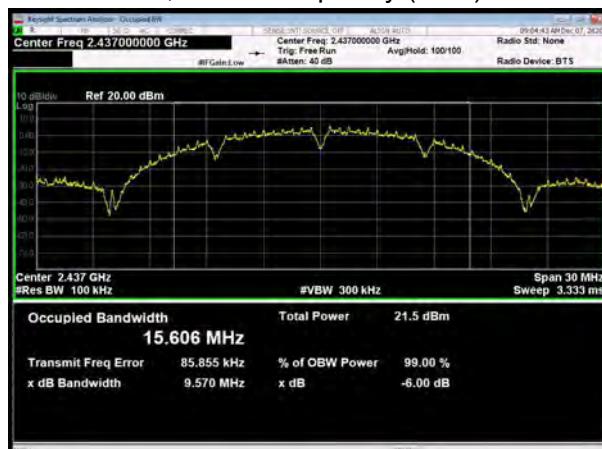

802.11g, Carrier frequency (MHz): 2437

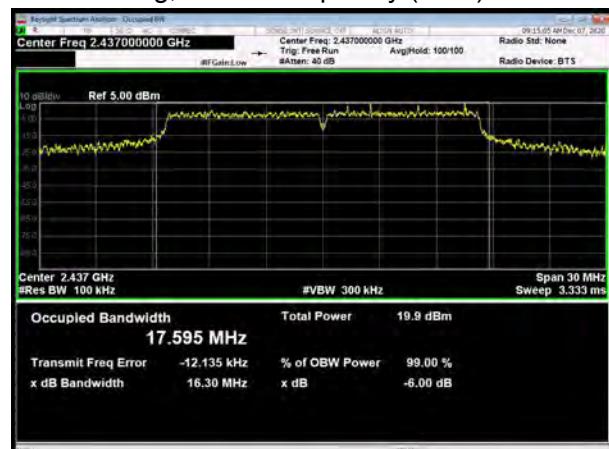

802.11b, Carrier frequency (MHz): 2462

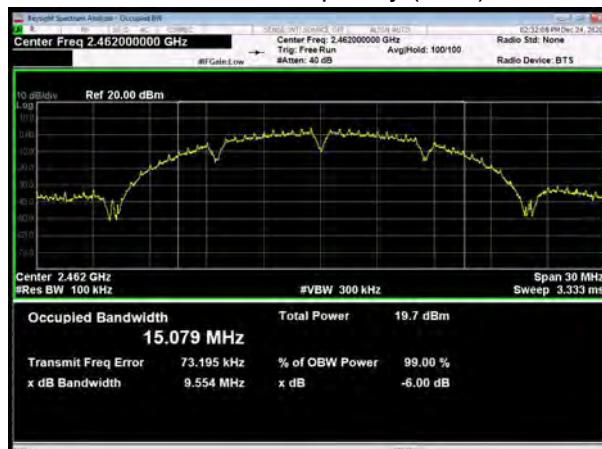

802.11g, Carrier frequency (MHz): 2462





## 802.11n(HT20), Carrier frequency (MHz): 2412



## 802.11n(HT40), Carrier frequency (MHz): 2422



## 802.11n(HT20), Carrier frequency (MHz): 2437



## 802.11n(HT40), Carrier frequency (MHz): 2437



## 802.11n(HT20), Carrier frequency (MHz): 2462



## 802.11n(HT40), Carrier frequency (MHz): 2452



### 5.3. Band Edge


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

#### Test Setup



#### Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
2GHz-3GHz	1.407 dB

## Test Results: PASS

802.11b, Channel No.: 1



802.11b, Channel No.: 11



802.11g, Channel No.: 1



802.11g, Channel No.: 11







802.11n(HT20), Channel No.: 1



802.11n(HT20), Channel No.: 11

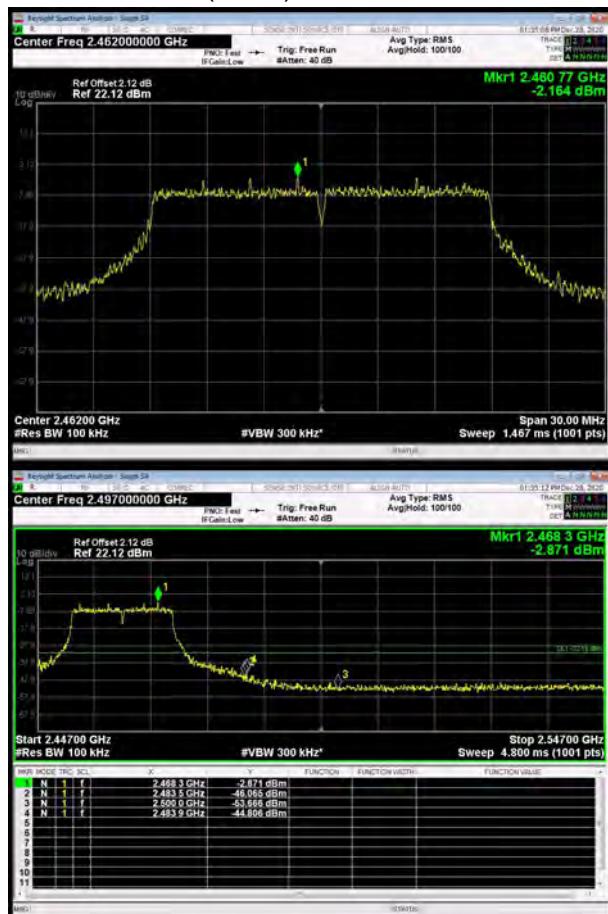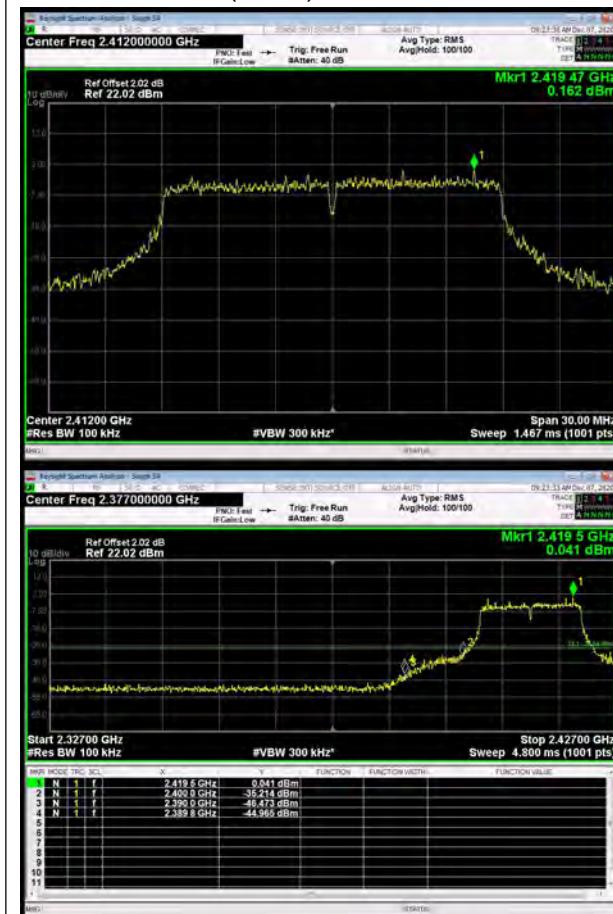



## 802.11n(HT40), Channel No.: 3



## 802.11n(HT40), Channel No.: 9





## 5.4. Power Spectral Density

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation.

Method AVGPSD-1 was used for this test.

- a) Set instrument center frequency to DTS channel center frequency
- b) Set span to at least 1.5 times the OBW
- c) Set RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- d) Set VBW  $\geq [3 \times \text{RBW}]$
- e) Detector=power averaging(rms) or sample detector(when rms not available)
- f) Ensure that the number of measurement points in the sweep  $2[2 \times \text{span}/\text{RBW}]$
- g) Sweep time auto couple
- h) Employ trace averaging(rms) mode over a minimum of 100 traces
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat(note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

Method AVGPSD-2 was used for this test.


- a) Measure the duty cycle(D)of the transmitter output signal as described in 11.6
- b) Set instrument center frequency to DTS channel center frequency
- c) Set span to at least 1.5 times the OBW
- d) Set RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- e) Set VBW  $\geq [3 \times \text{RBW}]$
- f) Detector= power averaging(rms) or sample detector (when rms not available)
- g) Ensure that the number of measurement points in the sweep  $2[2 \times \text{span}/\text{RBW}]$
- h) Sweep time =auto couple
- i) Do not use sweep triggering; allow sweep to "free run"
- j) Employ trace averaging(rms) mode over a minimum of 100 traces
- k) Use the peak marker function to determine the maximum amplitude level
- l) Add  $[10 \log(1/D)]$ , where D is the duty cycle measured in step a), to the measured PSD to

compute the average PSD during the actual transmission time

m) If measured value exceeds requirement specified by regulatory agency then reduce RBW (but  $\leq$  3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

### Test setup



### Limits

Rule Part 15.247(e) specifies that "For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission."

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.75\text{dB}$ .

**Test Results:****SISO Antenna 1**

Test Mode	Channel Number	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-13.06	-13.06	8	PASS
	6	-15.22	-15.22	8	PASS
	11	-15.57	-15.57	8	PASS
802.11g	1	-19.95	-19.61	8	PASS
	6	-20.54	-20.20	8	PASS
	11	-22.61	-22.27	8	PASS
802.11n HT20	1	-20.75	-20.54	8	PASS
	6	-21.50	-21.29	8	PASS
	11	-24.47	-24.26	8	PASS
802.11n HT40	3	-25.63	-24.87	8	PASS
	6	-26.86	-26.10	8	PASS
	9	-29.22	-28.46	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor



## SISO Antenna 2

Test Mode	Channel Number	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-13.28	-13.28	8	PASS
	6	-15.18	-15.18	8	PASS
	11	-17.27	-17.27	8	PASS
802.11g	1	-20.11	-19.77	8	PASS
	6	-20.72	-20.38	8	PASS
	11	-23.74	-23.40	8	PASS
802.11n HT20	1	-20.74	-20.53	8	PASS
	6	-25.47	-25.26	8	PASS
	11	-25.55	-25.34	8	PASS
802.11n HT40	3	-23.99	-23.23	8	PASS
	6	-25.99	-25.23	8	PASS
	9	-29.98	-29.22	8	PASS

Note: Power Spectral Density =Read Value+ Duty cycle correction factor



## MIMO

Test Mode	Channel Number	Power Spectral Density				Total PSD	Limit (dBm / 3kHz)	Conclusion			
		Antenna 1		Antenna 2							
		Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)						
802.11b	1	-15.59	-15.59	-17.79	-17.79	-13.55	8	PASS			
	6	-17.97	-17.97	-14.68	-14.68	-13.01	8	PASS			
	11	-17.29	-17.29	-16.77	-16.77	-14.01	8	PASS			
802.11g	1	-22.77	-22.43	-23.80	-23.46	-19.90	8	PASS			
	6	-24.70	-24.36	-22.23	-21.89	-19.94	8	PASS			
	11	-23.72	-23.38	-24.29	-23.95	-20.65	8	PASS			
802.11n HT20	1	-23.04	-22.83	-24.05	-23.84	-20.30	8	PASS			
	6	-25.23	-25.02	-22.76	-22.54	-20.60	8	PASS			
	11	-25.24	-25.03	-25.67	-25.46	-22.23	8	PASS			
802.11n HT40	3	-26.72	-25.96	-24.78	-24.02	-21.87	8	PASS			
	6	-27.73	-26.97	-25.50	-24.74	-22.70	8	PASS			
	9	-30.81	-30.05	-30.38	-29.62	-26.82	8	PASS			

Note: 1. Power Spectral Density = Read Value + Duty cycle correction factor

2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a), the power spectral density =  $10\log(10^{(\text{PSD antenna1 in dBm}/10)} + 10^{(\text{PSD antenna2 in dBm}/10)})$

3. The manufacturer declared the transmitter output signals is CDD mode. And  $N_{ss}=2$ . According to KDB 662911 D01 Multiple Transmitter Output v02r01 2)f)(i): If all antennas have the same gain, Directional gain =  $G_{ANT} + \text{Array Gain}$ . For PSD measurements on all devices, Array Gain =  $10\log(N_{ant}/N_{ss})$  dB.

4. If antenna gains are not equal, the user may use either of the following methods to calculate directional gain, provided that each transmit antenna is driven by only one spatial stream: Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{ANT}$  set equal to the gain of the antenna having the highest gain.

so directional gain =  $G_{ANT} + \text{Array Gain} = 0.6 + 10\log(2/2) = 0.6 < 6\text{dBi}$ , So the power limit is 8dBm.




## SISO Antenna 1

802.11b, Channel No.: 1




802.11g, Channel No.: 1

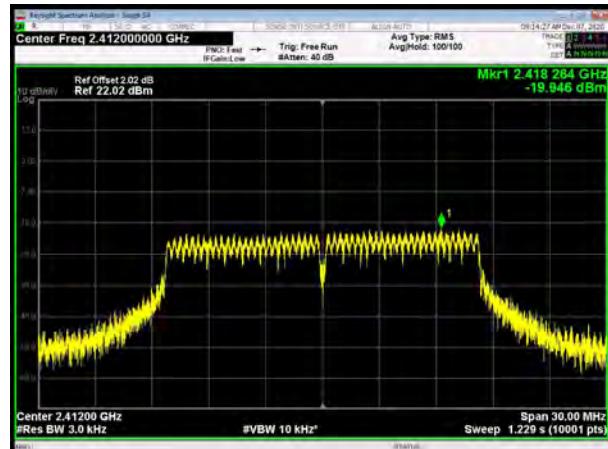

802.11b, Channel No.: 6




802.11g, Channel No.: 6

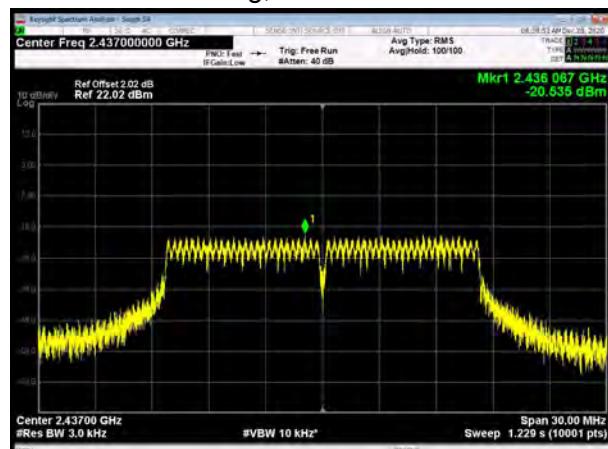


802.11b, Channel No.: 11




802.11g, Channel No.: 11

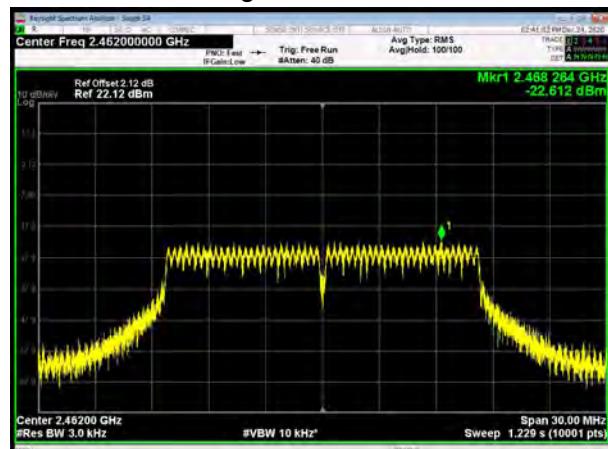


802.11n(HT20), Channel No. 1

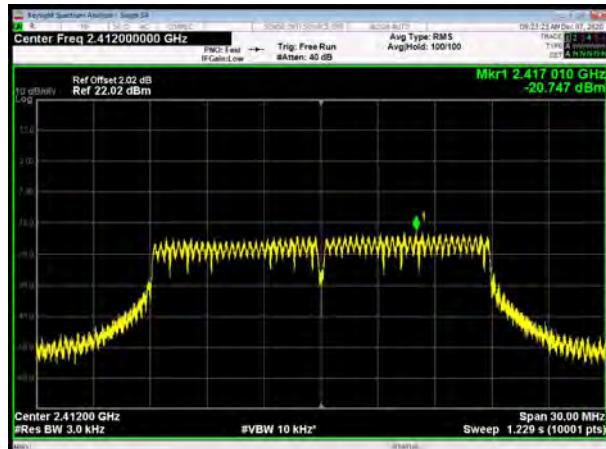


802.11n(HT40), Channel No. 3

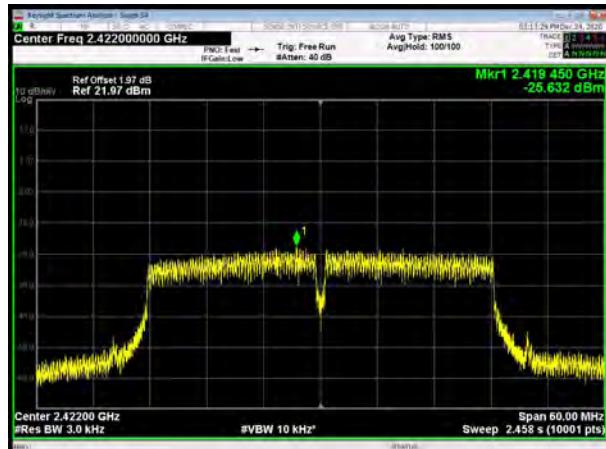


802.11n(HT20), Channel No. 6

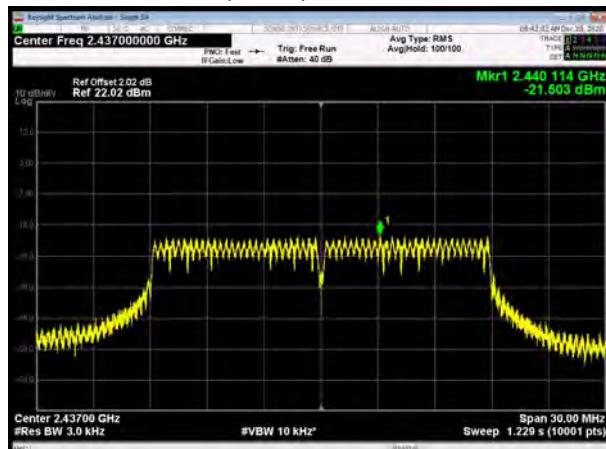


802.11n(HT40), Channel No. 6

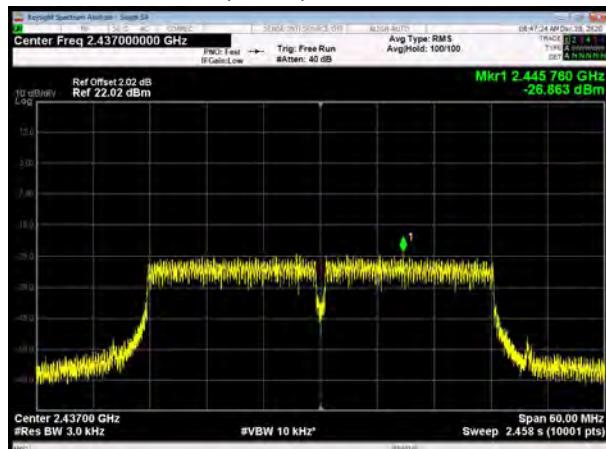

802.11n(HT20), Channel No. 11

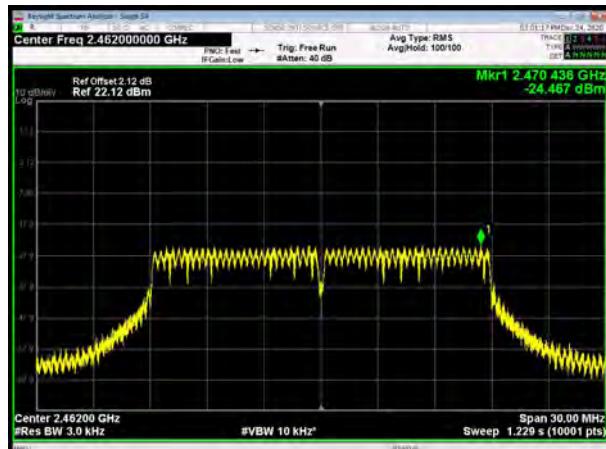

802.11n(HT40), Channel No. 9

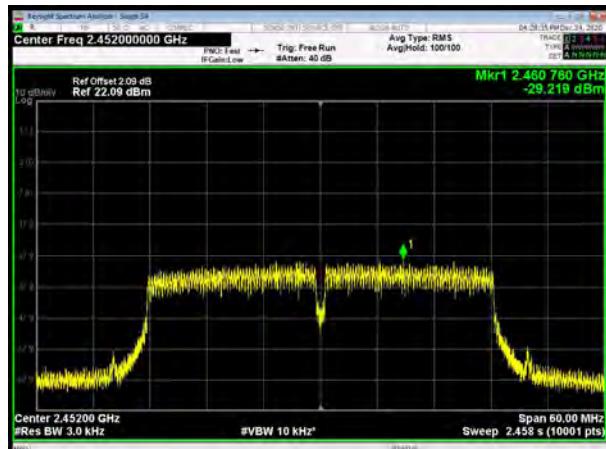




## SISO Antenna 2

802.11b, Channel No.: 1




802.11g, Channel No.: 1

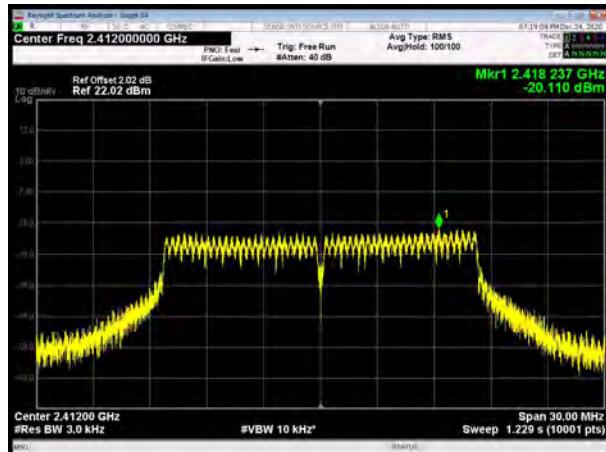


802.11b, Channel No.: 6




802.11g, Channel No.: 6

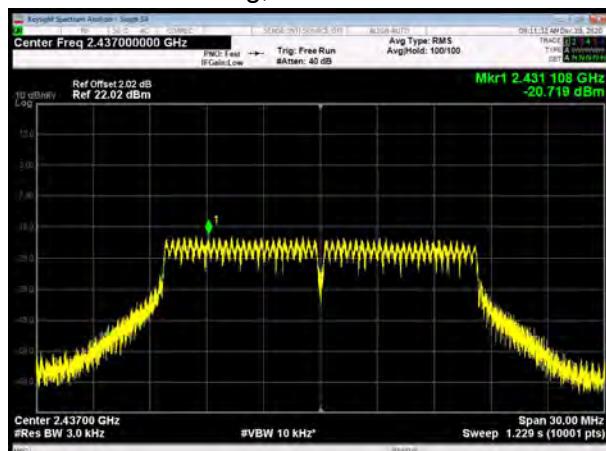

802.11b, Channel No.: 11

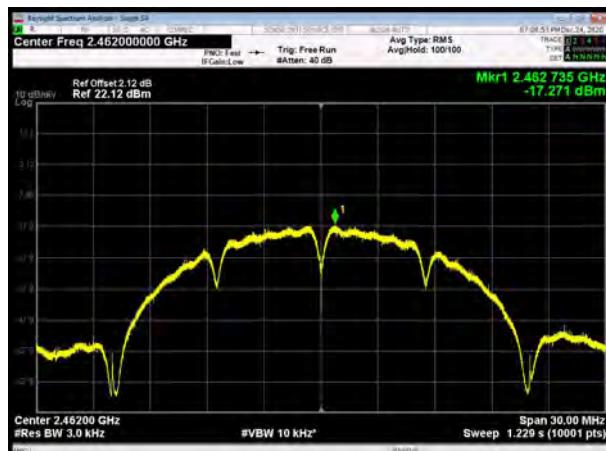


802.11g, Channel No.: 11

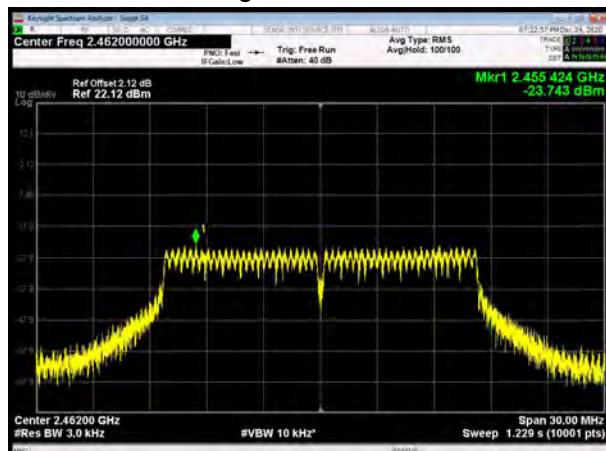





802.11n(HT20), Channel No. 1

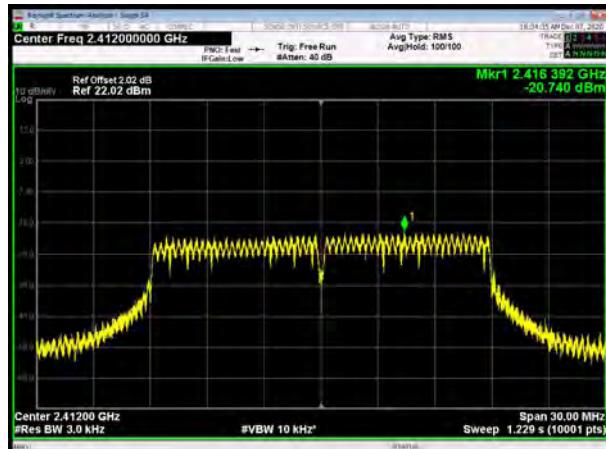


802.11n(HT40), Channel No. 3

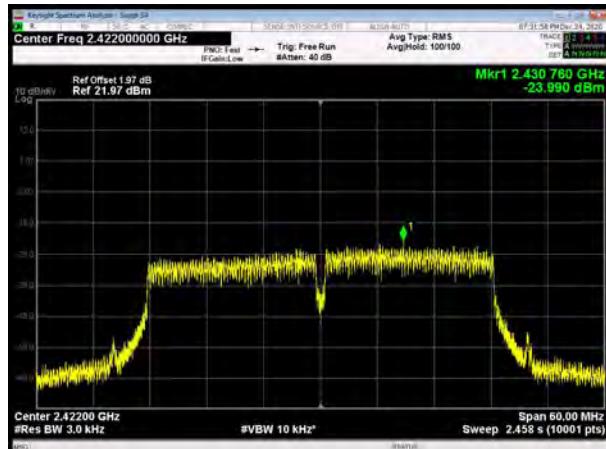


802.11n(HT20), Channel No. 6

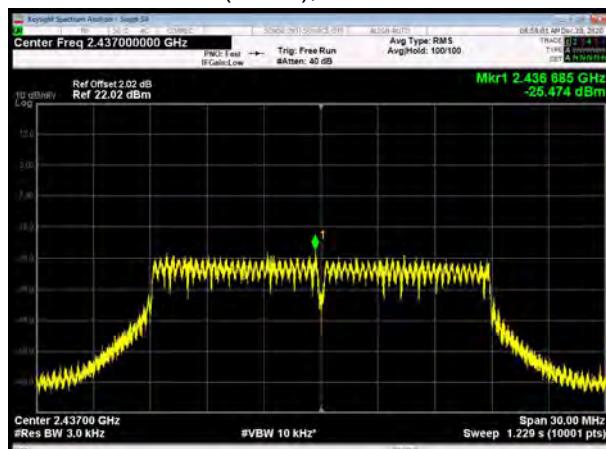


802.11n(HT40), Channel No. 6

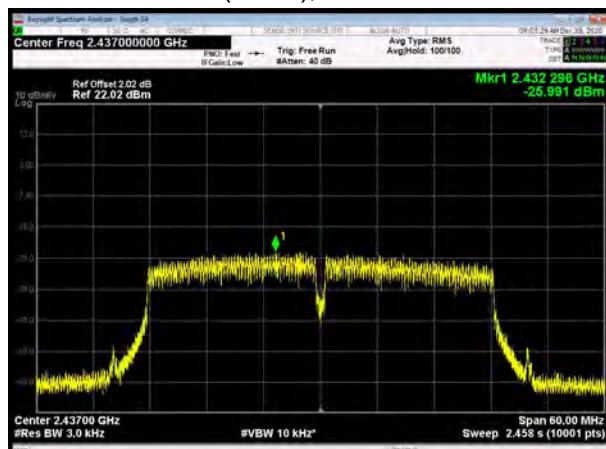

802.11n(HT20), Channel No. 11

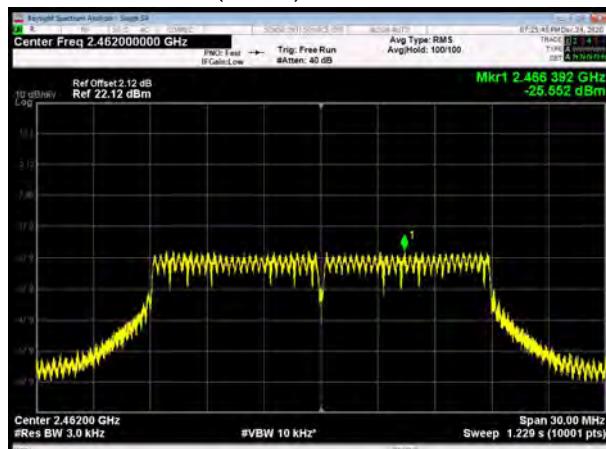

802.11n(HT40), Channel No. 9

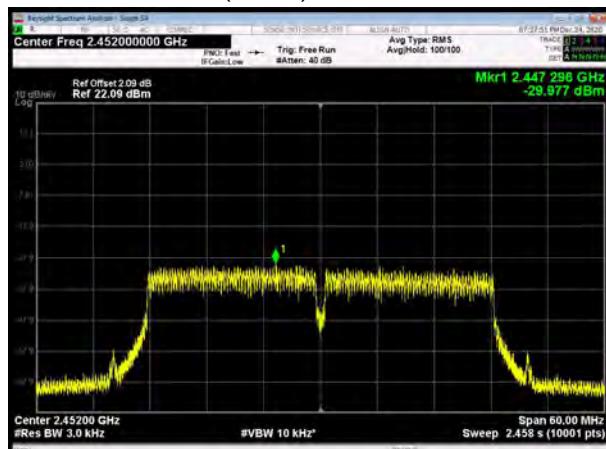




## MIMO Antenna 1

802.11b, Channel No.: 1




802.11g, Channel No.: 1

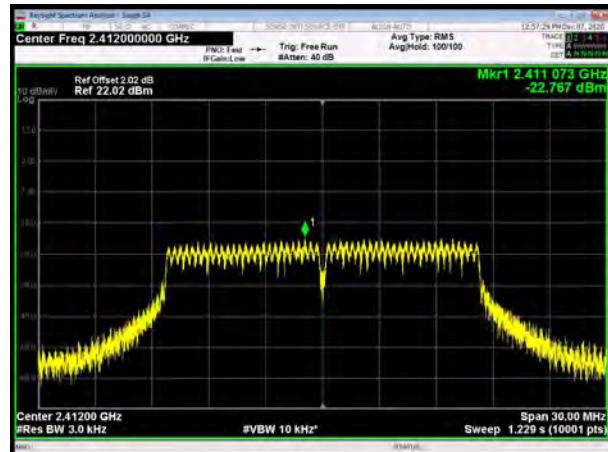

802.11b, Channel No.: 6




802.11g, Channel No.: 6

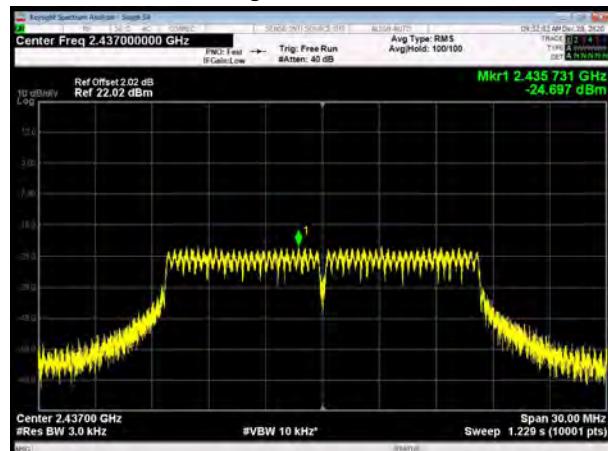

802.11b, Channel No.: 11




802.11g, Channel No.: 11

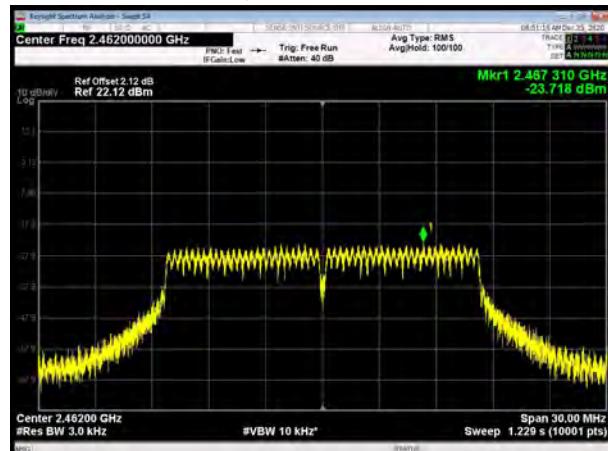





802.11n(HT20), Channel No. 1

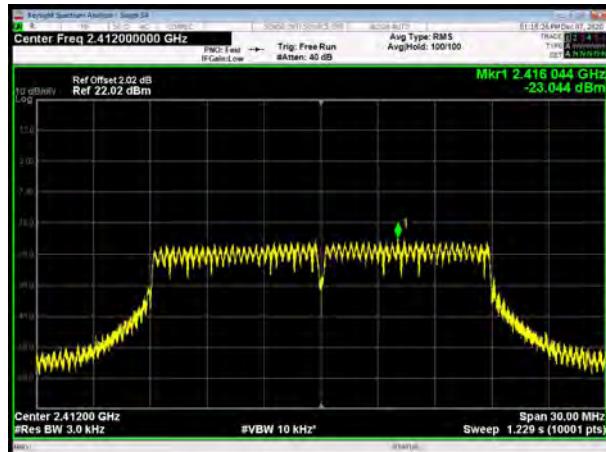


802.11n(HT40), Channel No. 3

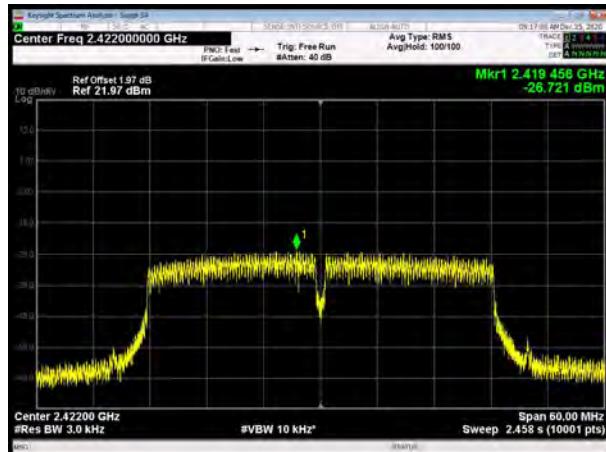


802.11n(HT20), Channel No. 6

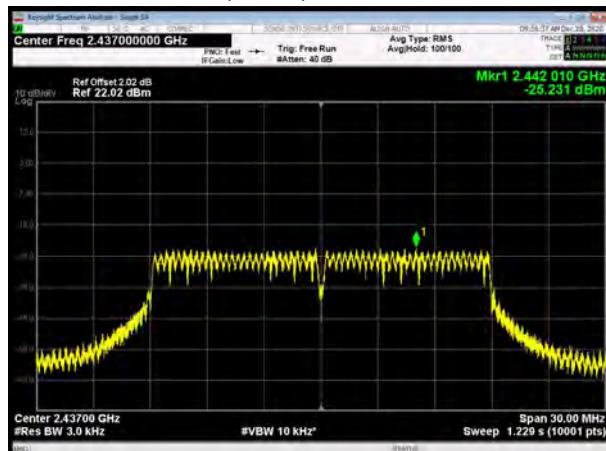


802.11n(HT40), Channel No. 6

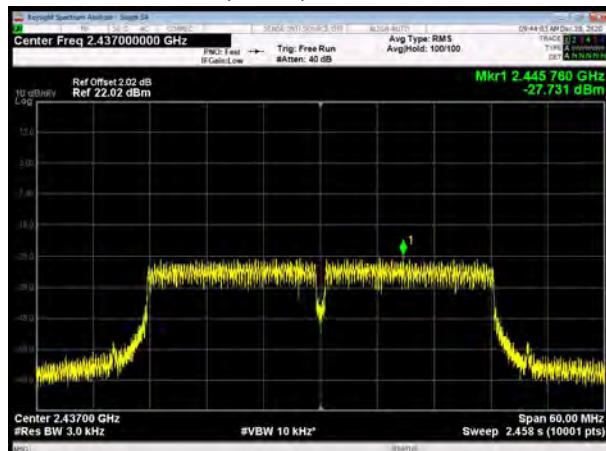

802.11n(HT20), Channel No. 11

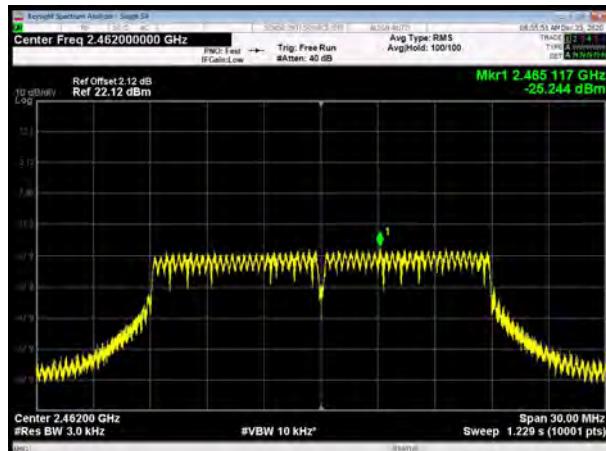

802.11n(HT40), Channel No. 9

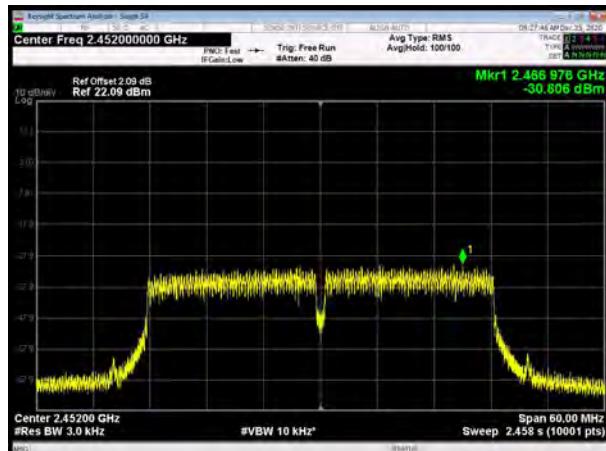




## MIMO Antenna 2

802.11b, Channel No.: 1




802.11g, Channel No.: 1

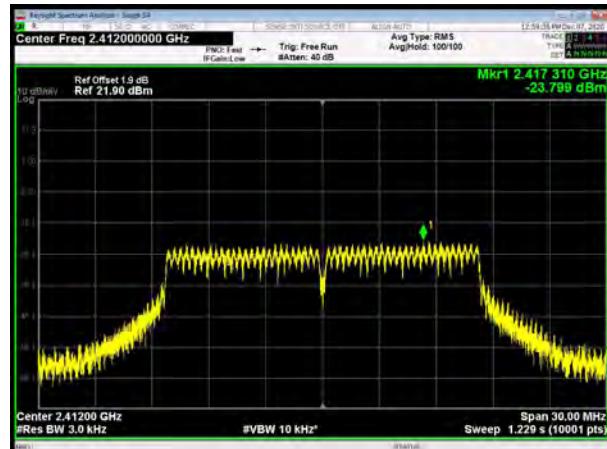

802.11b, Channel No.: 6




802.11g, Channel No.: 6

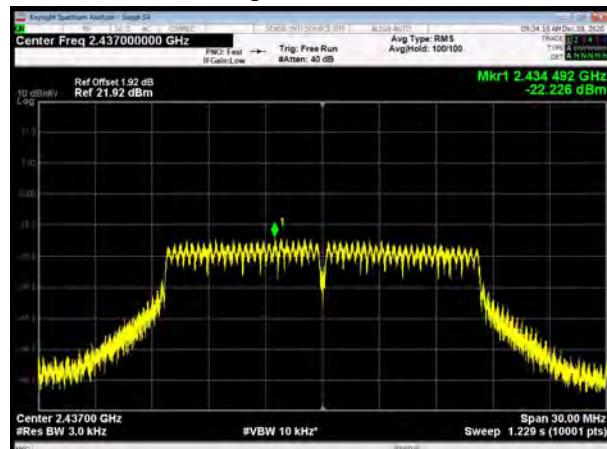

802.11b, Channel No.: 11




802.11g, Channel No.: 11

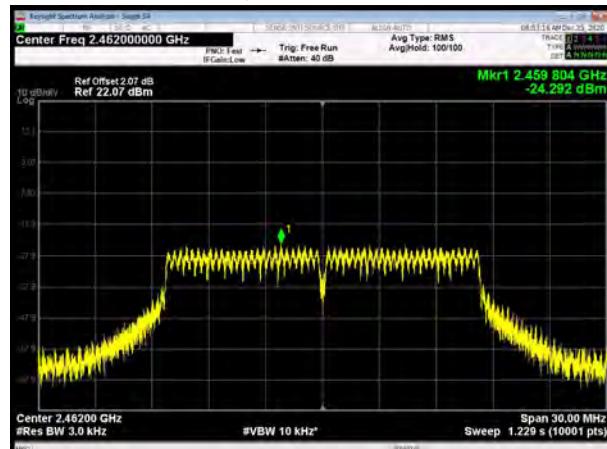





802.11n(HT20), Channel No. 1

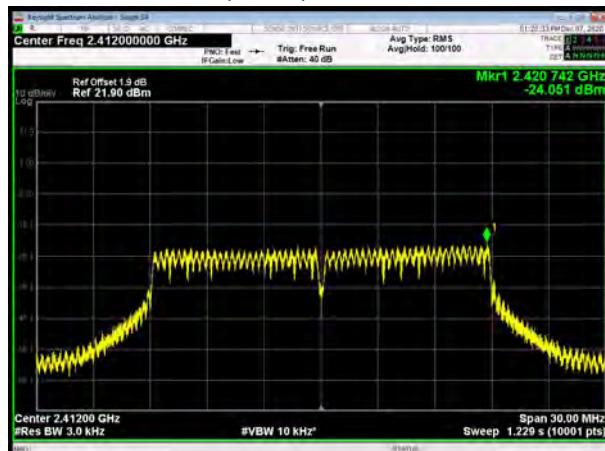


802.11n(HT40), Channel No. 3

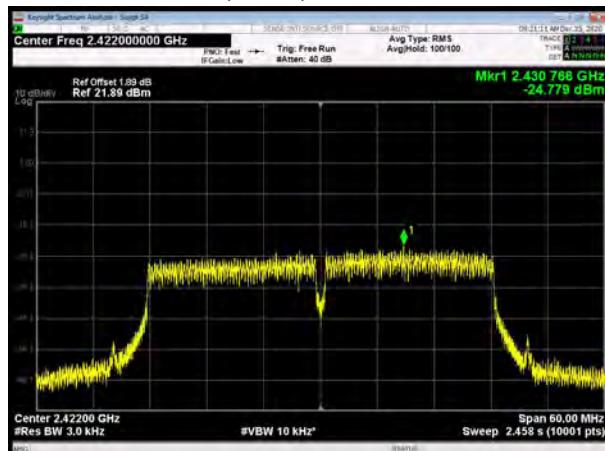


802.11n(HT20), Channel No. 6

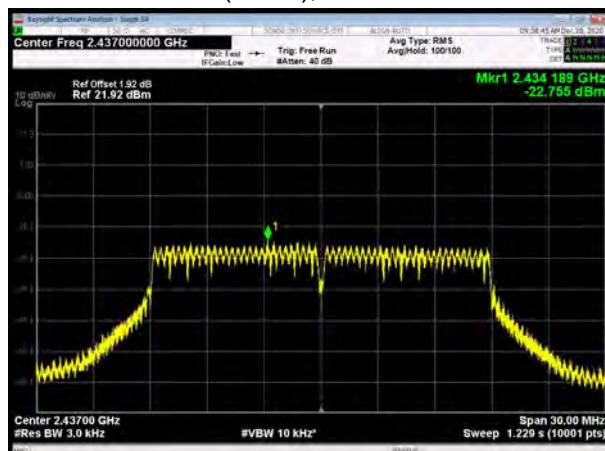


802.11n(HT40), Channel No. 6

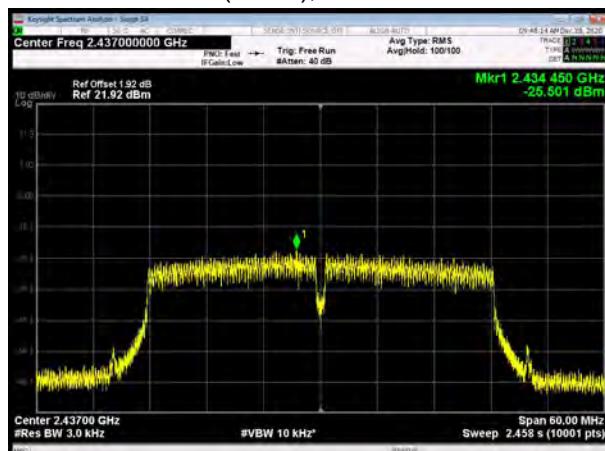

802.11n(HT20), Channel No. 11

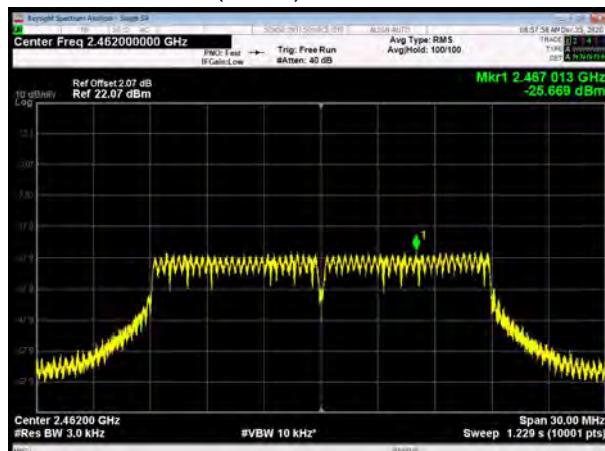

802.11n(HT40), Channel No. 9

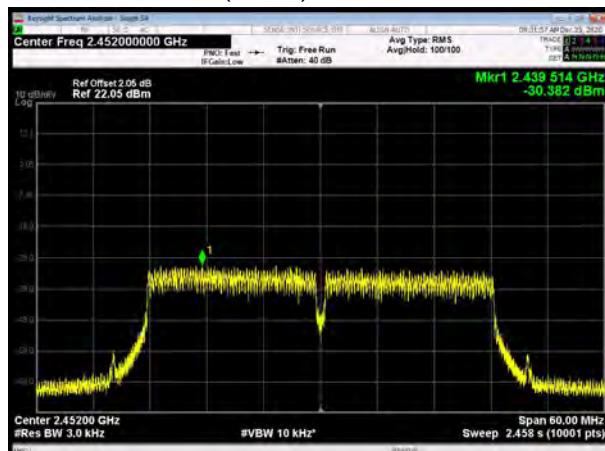



## 5.5. Spurious RF Conducted Emissions

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

### Test setup



### Limits

Rule Part 15.247(d) specifies that "In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB."

Test Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412	7.95	-22.05
	2437	6.93	-23.07
	2462	7.31	-22.69
802.11g	2412	0.28	-29.72
	2437	3.28	-26.72
	2462	5.92	-24.08
802.11n HT20	2412	1.13	-28.87
	2437	4.90	-25.10
	2462	4.91	-25.09
802.11n HT40	2422	-2.90	-32.90
	2437	2.18	-27.82
	2452	-0.15	-30.15



### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB




## Test Results:


802.11b, Channel No.: 1

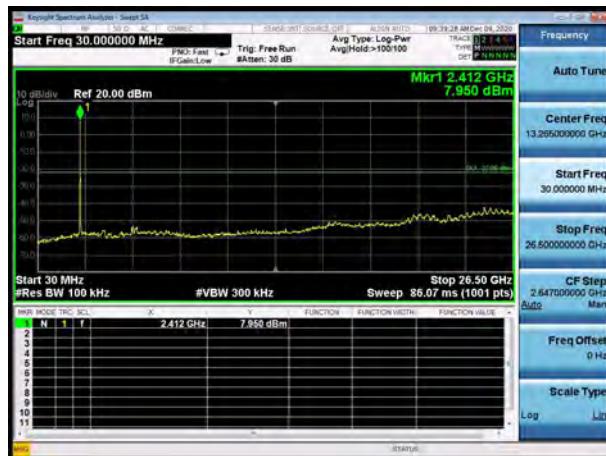


802.11g, Channel No.: 1

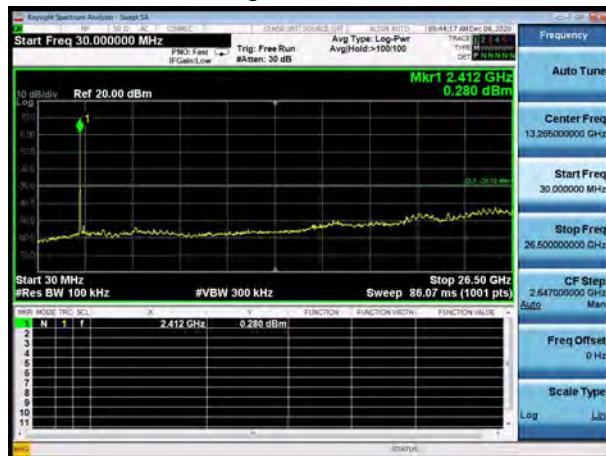


802.11b, Channel No.: 6

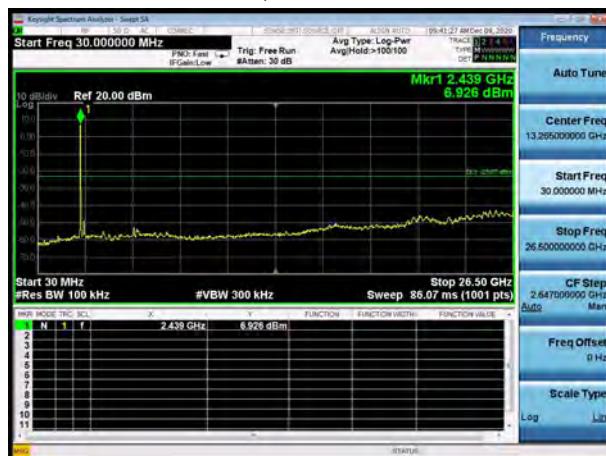


802.11g, Channel No.: 6

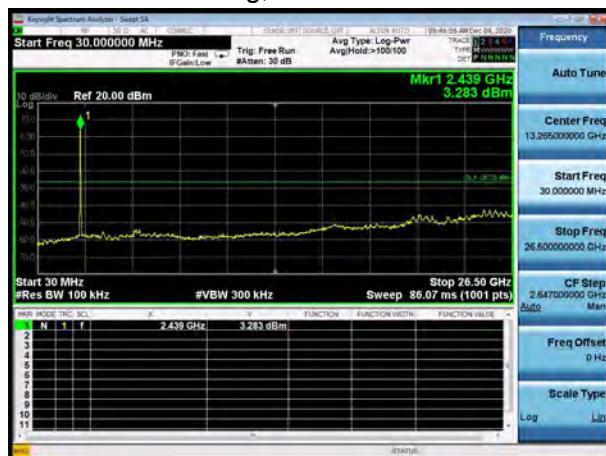

802.11b, Channel No.: 11

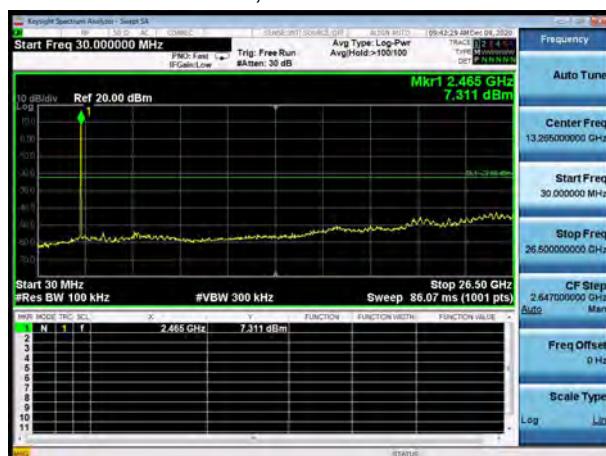


802.11g, Channel No.: 11

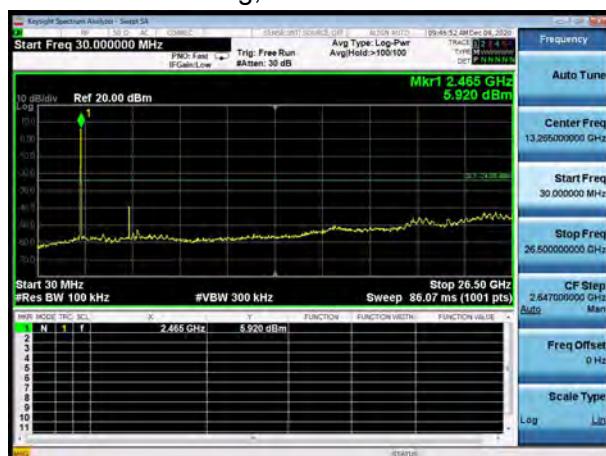





802.11n(HT20), Channel No. 1

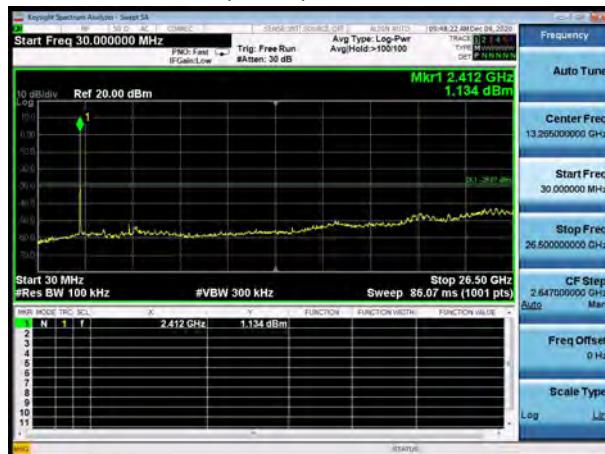


802.11n(HT40), Channel No. 3

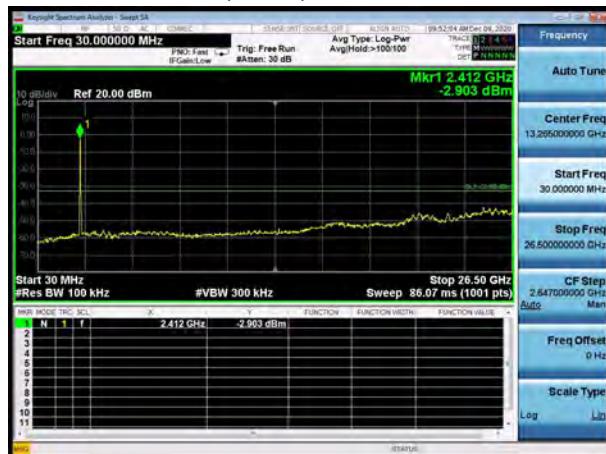


802.11n(HT20), Channel No. 6

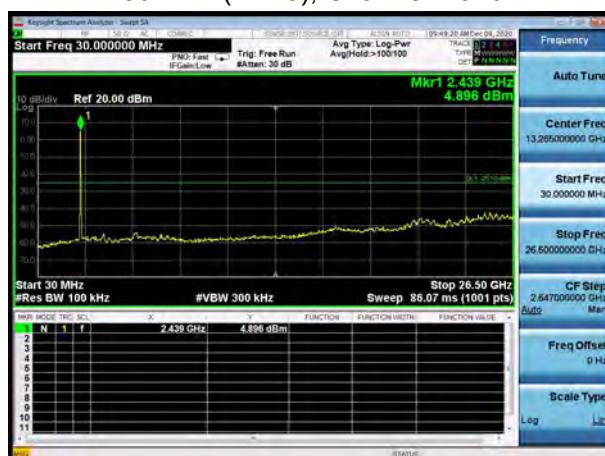


802.11n(HT40), Channel No. 6

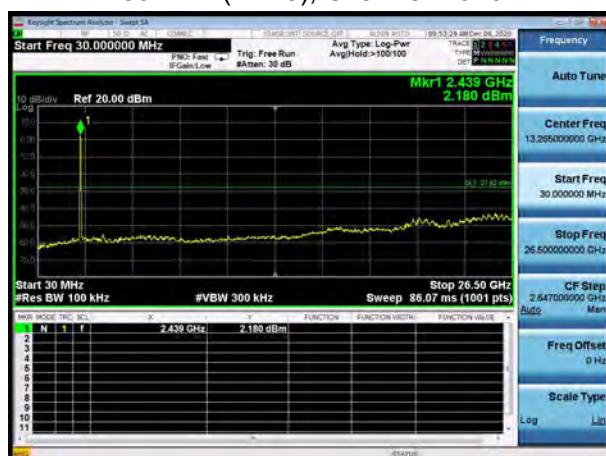

802.11n(HT20), Channel No. 11

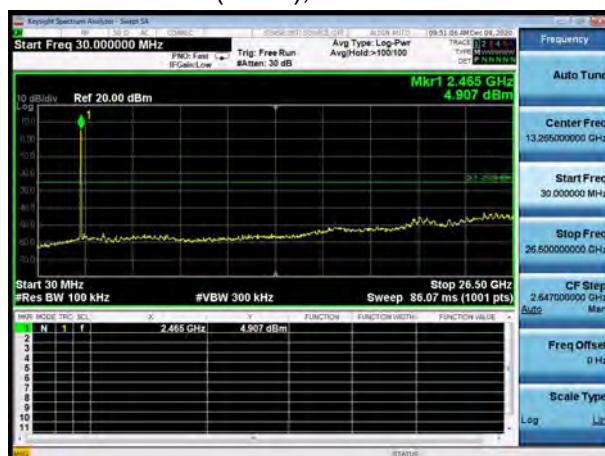

802.11n(HT40), Channel No. 9

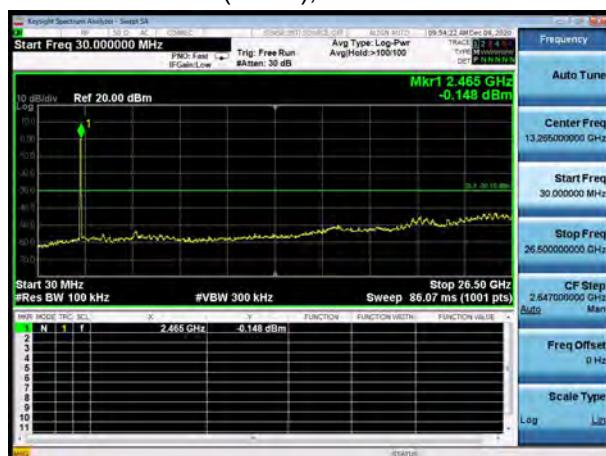



## 5.6. Unwanted Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration. Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10-2013.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage



averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of  $1 / D$ , where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)




g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

The test is in transmitting mode.

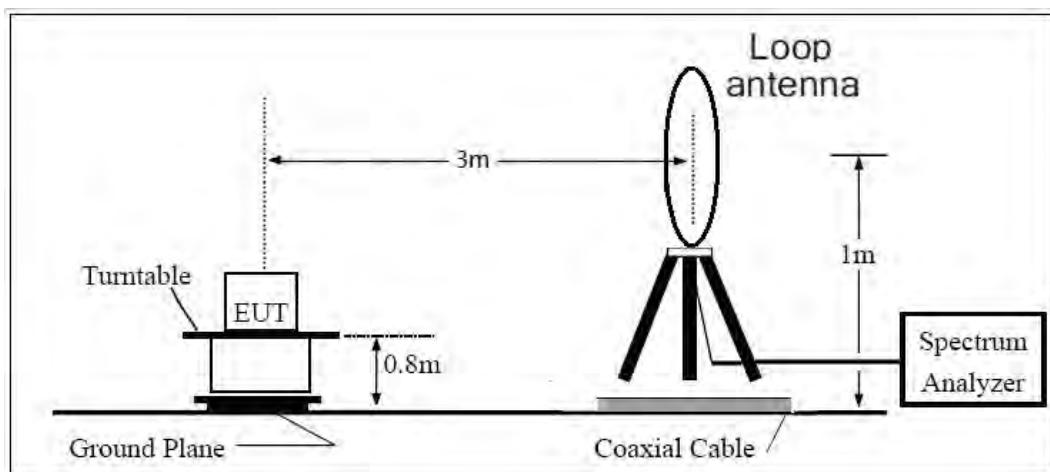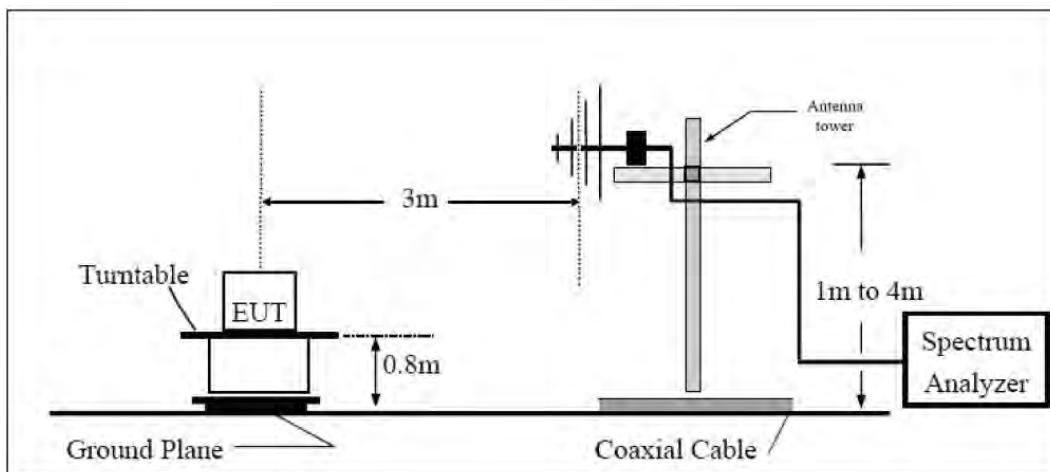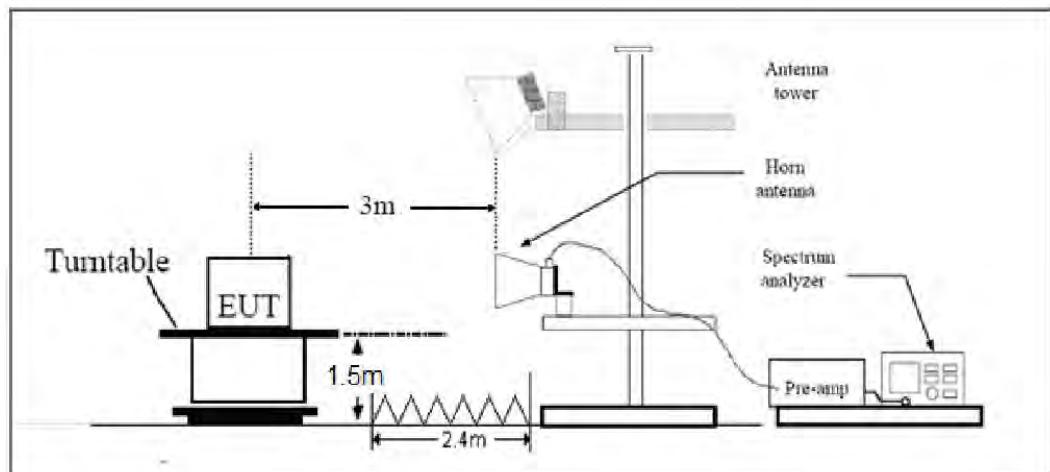**Test setup****9KHz ~ 30MHz****30MHz ~ 1GHz****Above 1GHz**

Note: Area side:2.4mX3.6m

**Limits**

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

**§15.35(b)**

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			




### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB

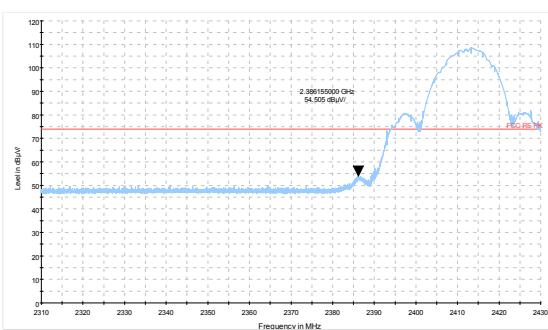**Test Results:**


802.11b-Channel 1 Peak

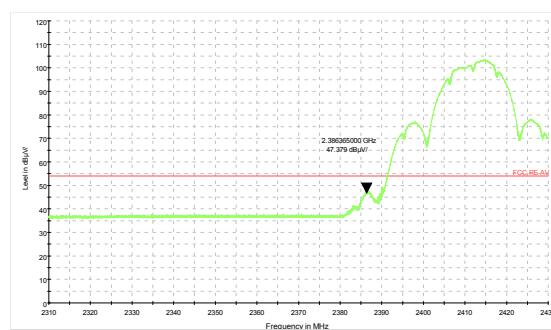


802.11b-Channel 1 Average

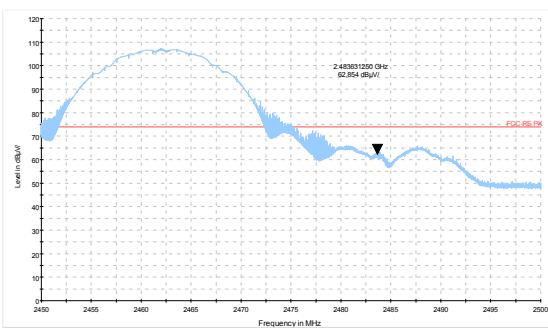


802.11b-Channel 11 Peak

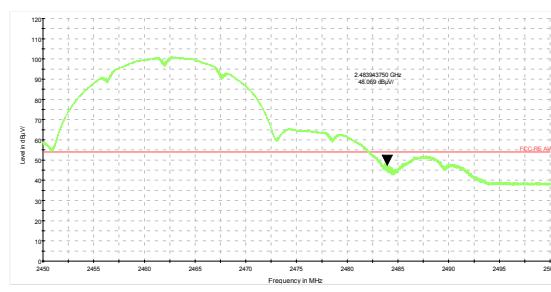


802.11b-Channel 11 Average

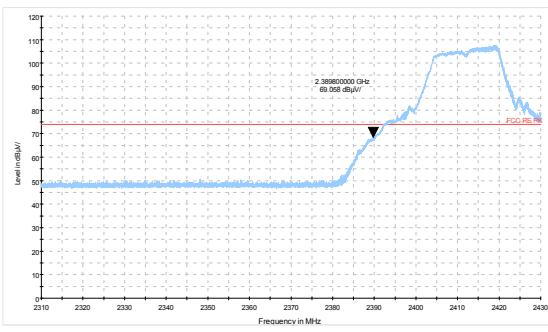


802.11g-Channel 1 Peak

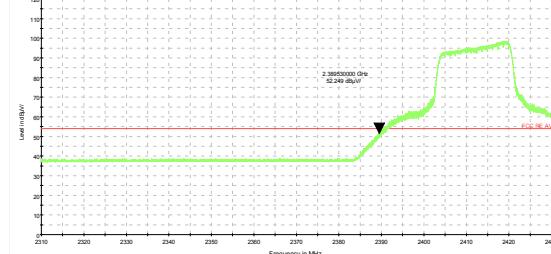


802.11g-Channel 1 Average

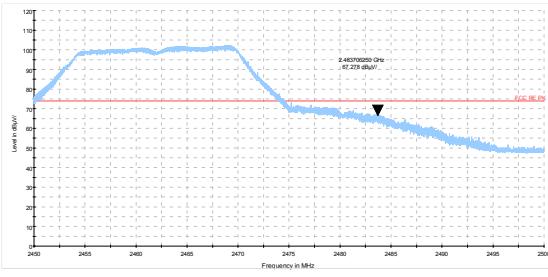

802.11g-Channel 11 Peak

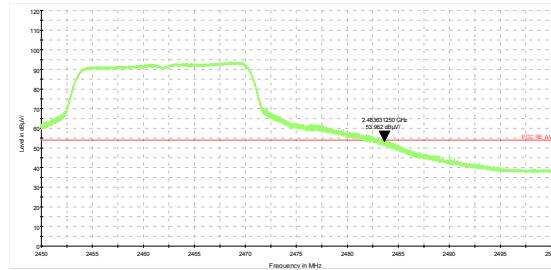

802.11g-Channel 11 Average

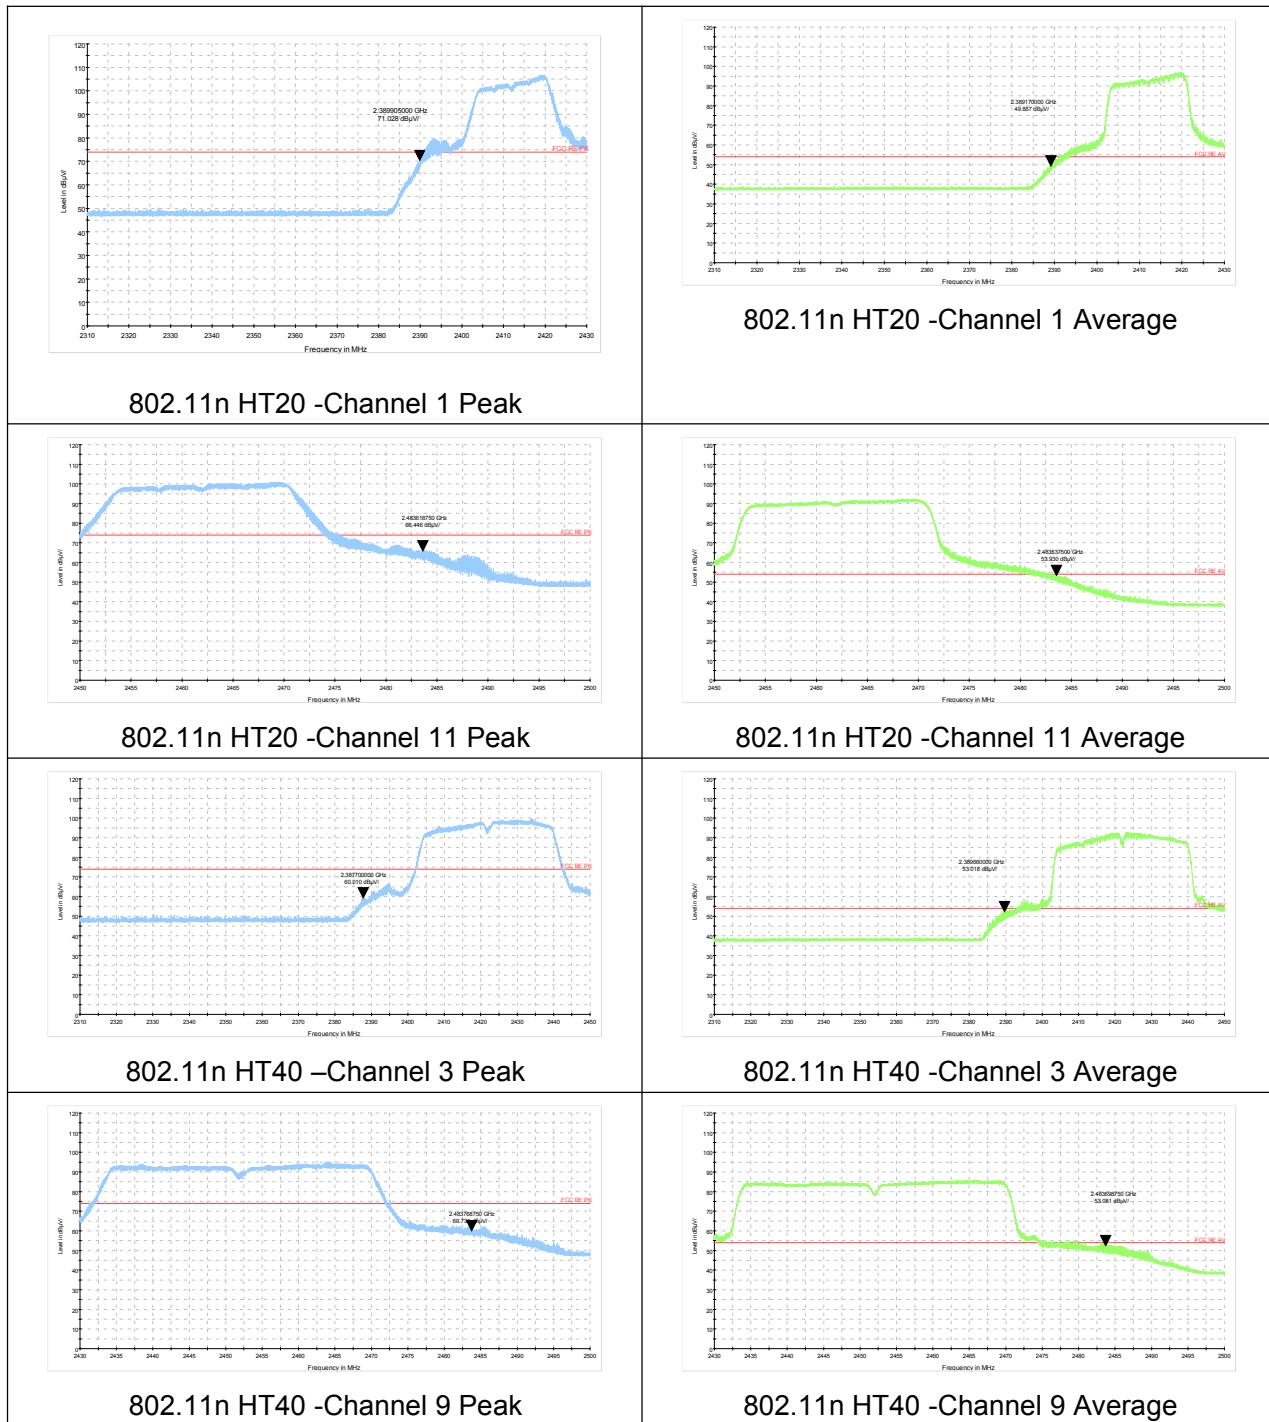

## Result of RE

### Test result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz and 18GHz-26.5GHz are more than 20dB below the limit are not reported.


The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

After the pretest, MIMO was selected as the worst antenna for 802.11n HT20/ HT40. SISO Antenna 2 was selected as the worst antenna for 802.11b/g.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11g CH6 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

### Continuous TX mode:

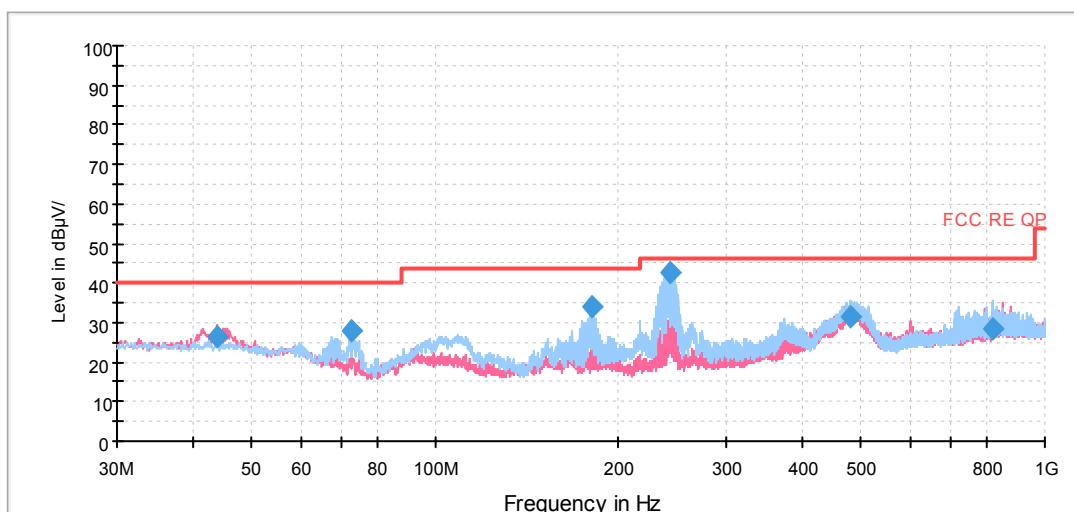


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
43.741250	26.3	114.0	V	344.0	-12.9	13.7	40.0
72.841250	27.9	225.0	H	223.0	-19.5	12.1	40.0
181.158750	33.9	175.0	H	239.0	-19.8	9.6	43.5
243.121250	42.4	125.0	H	245.0	-17.3	3.6	46.0
479.553750	31.5	225.0	H	88.0	-12.4	14.5	46.0
824.101250	28.2	100.0	H	138.0	-6.7	17.8	46.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)


2. Margin = Limit – Quasi-Peak

## 802.11b CH1

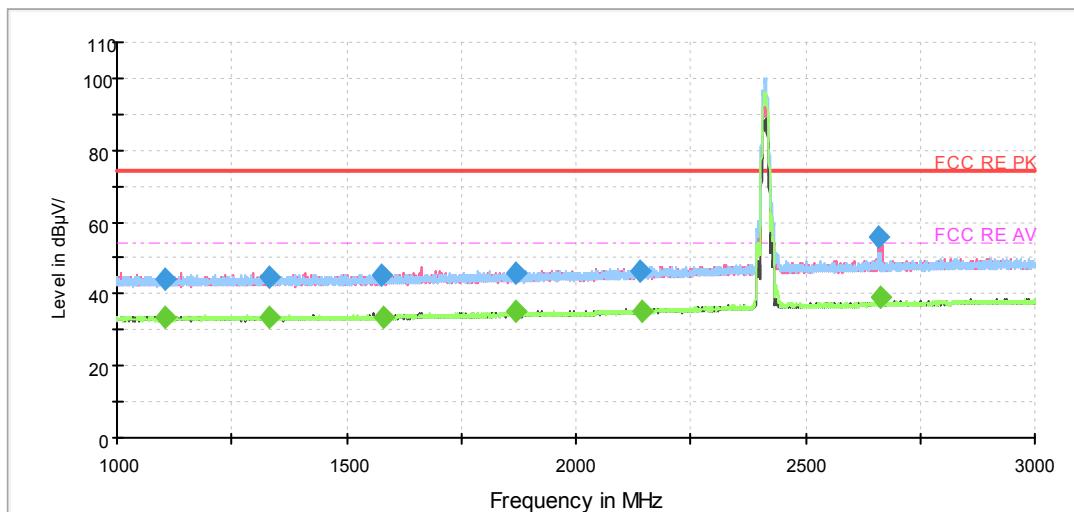

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

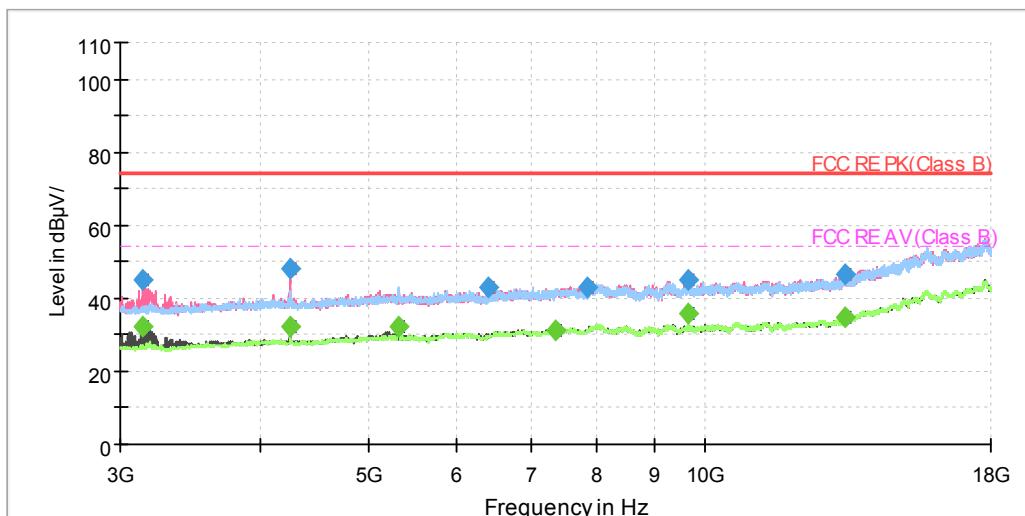

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1105.500000	44.2	100.0	H	206.0	-1.4	29.8	74.0
1333.500000	44.7	100.0	H	268.0	-0.9	29.3	74.0
1575.750000	45.3	100.0	H	0.0	-0.1	28.7	74.0
1867.750000	45.5	200.0	H	356.0	0.8	28.5	74.0
2141.500000	46.2	200.0	V	1.0	1.9	27.8	74.0
2660.250000	56.1	100.0	V	264.0	3.9	17.9	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1103.000000	33.3	100.0	V	356.0	-1.4	20.7	54.0
1331.500000	33.6	100.0	V	358.0	-0.9	20.4	54.0
1581.500000	33.8	100.0	H	226.0	-0.1	20.2	54.0
1870.250000	35.0	200.0	V	50.0	0.8	19.0	54.0
2144.000000	35.4	100.0	V	292.0	1.9	18.6	54.0
2662.500000	39.1	100.0	V	165.0	3.9	14.9	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11b CH6

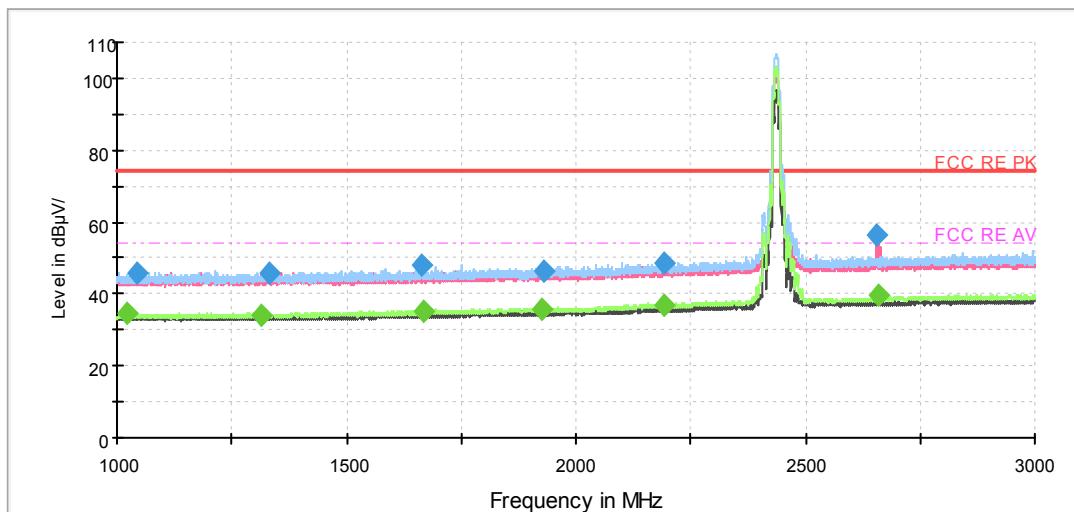

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

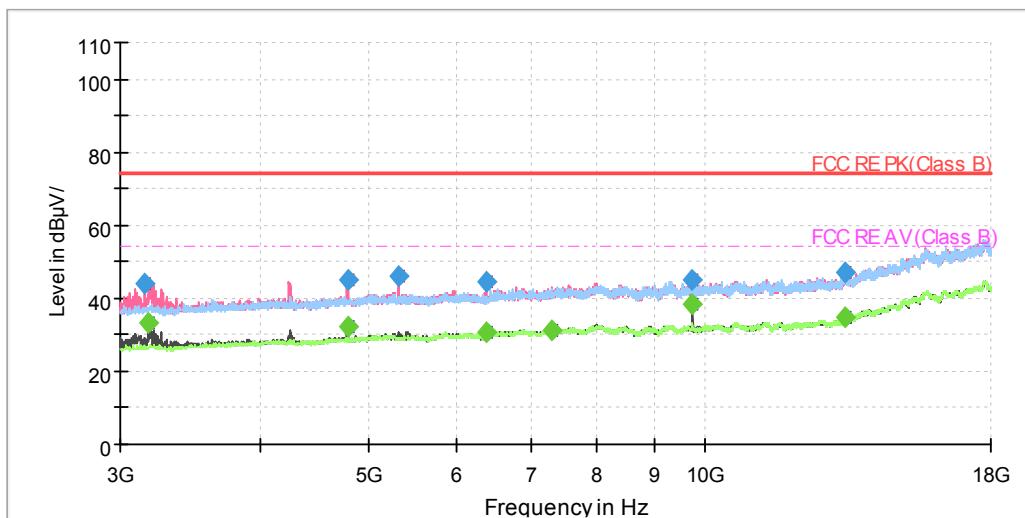

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1045.750000	45.8	100.0	H	168.0	-1.7	28.2	74.0
1331.250000	45.9	100.0	V	0.0	-0.9	28.1	74.0
1664.500000	48.0	200.0	V	177.0	0.2	26.0	74.0
1929.000000	46.3	200.0	H	265.0	1.0	27.7	74.0
2192.750000	48.7	200.0	H	357.0	2.2	25.3	74.0
2655.250000	56.6	100.0	V	175.0	3.9	17.4	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1020.500000	34.5	200.0	H	347.0	-1.8	19.5	54.0
1316.500000	34.2	200.0	H	347.0	-0.9	19.8	54.0
1669.000000	35.0	100.0	H	243.0	0.3	19.0	54.0
1927.750000	35.5	100.0	H	168.0	1.0	18.5	54.0
2194.250000	36.8	200.0	H	359.0	2.2	17.2	54.0
2658.750000	39.4	200.0	V	167.0	3.9	14.6	54.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

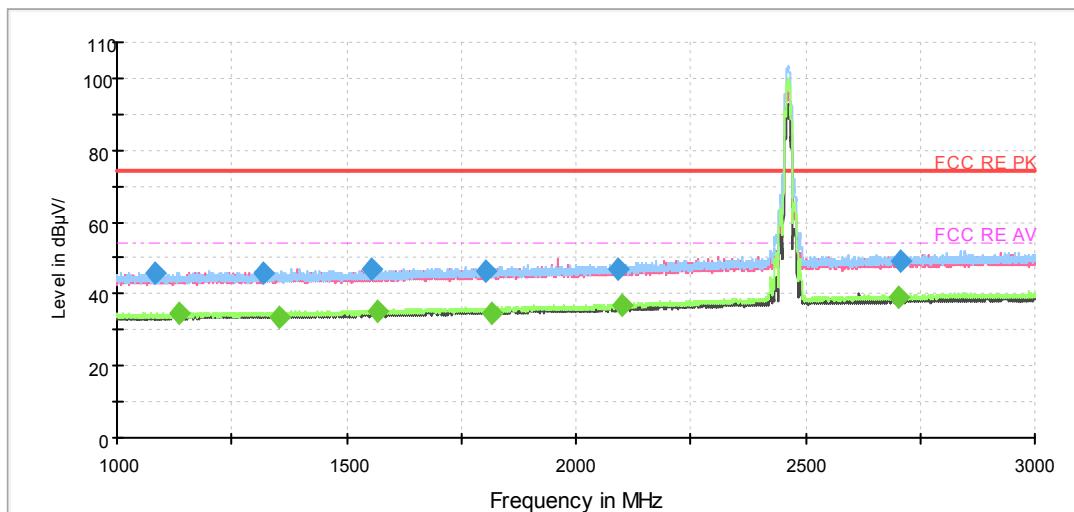

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

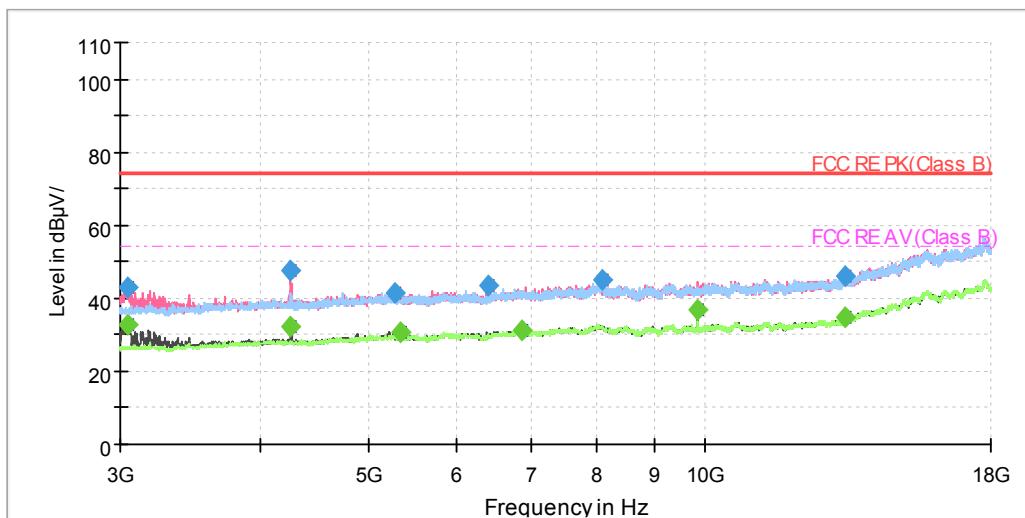

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1113.250000	45.9	100.0	H	175.0	-1.4	28.1	74.0
1348.500000	46.7	200.0	H	347.0	-0.9	27.3	74.0
1666.750000	51.1	200.0	V	204.0	0.2	22.9	74.0
2046.500000	48.1	200.0	V	325.0	1.4	25.9	74.0
2271.750000	49.7	200.0	H	324.0	2.7	24.3	74.0
2656.750000	55.5	200.0	V	174.0	3.9	18.5	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1159.500000	34.6	200.0	H	255.0	-1.3	19.4	54.0
1372.250000	34.7	200.0	H	0.0	-0.8	19.3	54.0
1663.250000	36.8	200.0	V	214.0	0.2	17.2	54.0
2034.250000	34.5	100.0	V	341.0	1.3	19.5	54.0
2240.250000	36.8	200.0	H	0.0	2.4	17.2	54.0
2665.500000	39.6	100.0	V	174.0	3.9	14.4	54.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

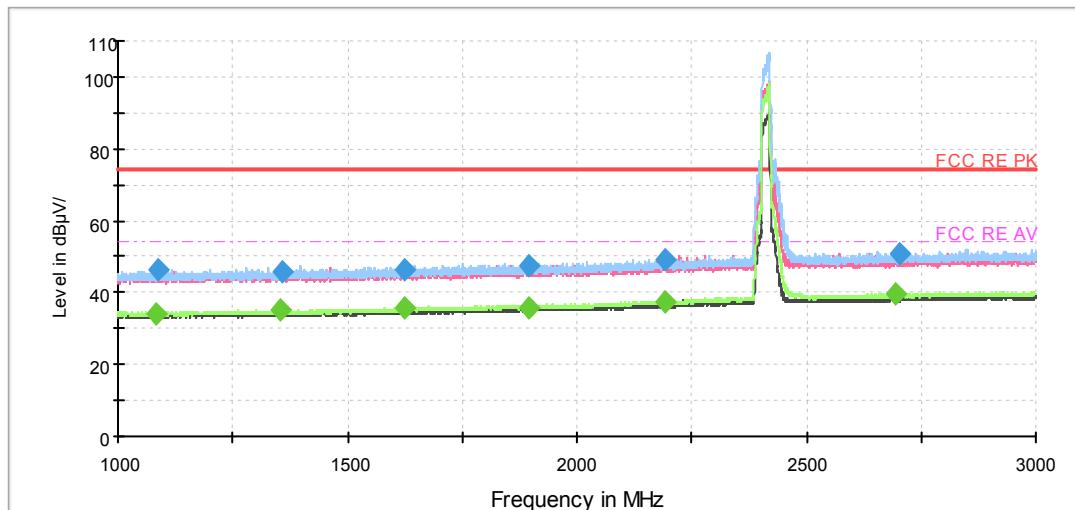

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

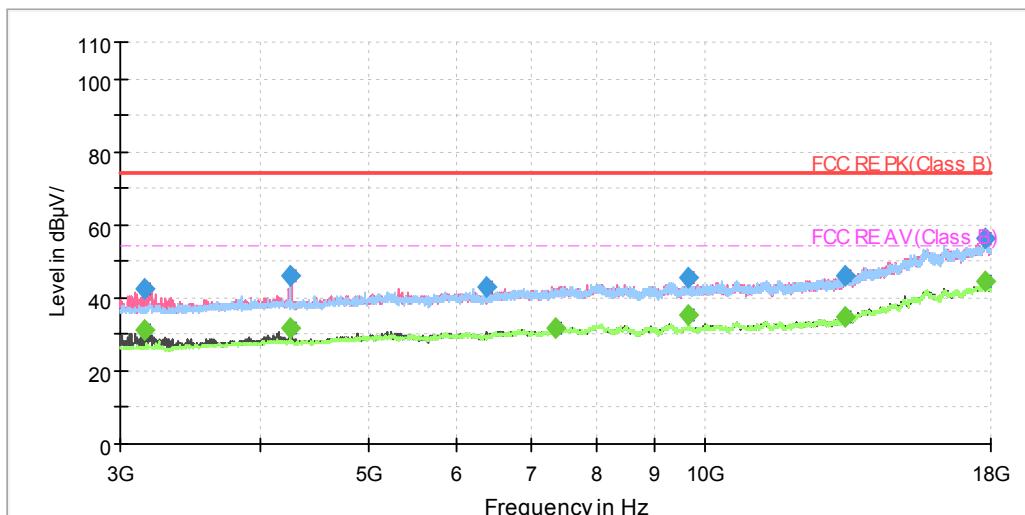

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1124.000000	46.2	200.0	H	0.0	-1.3	27.8	74.0
1363.250000	46.9	100.0	H	0.0	-0.8	27.1	74.0
1643.750000	46.1	100.0	V	242.0	0.2	27.9	74.0
1897.000000	46.6	100.0	V	0.0	0.9	27.4	74.0
2165.250000	48.5	100.0	H	8.0	2.0	25.5	74.0
2654.750000	56.0	100.0	V	164.0	3.9	18.0	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1103.500000	34.3	100.0	H	109.0	-1.4	19.7	54.0
1344.750000	34.3	200.0	H	326.0	-0.9	19.7	54.0
1633.000000	35.0	200.0	H	175.0	0.1	19.0	54.0
1892.000000	35.9	200.0	H	0.0	0.8	18.1	54.0
2157.000000	37.2	100.0	H	41.0	2.0	16.8	54.0
2658.500000	39.5	100.0	H	0.0	3.9	14.5	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11g CH6

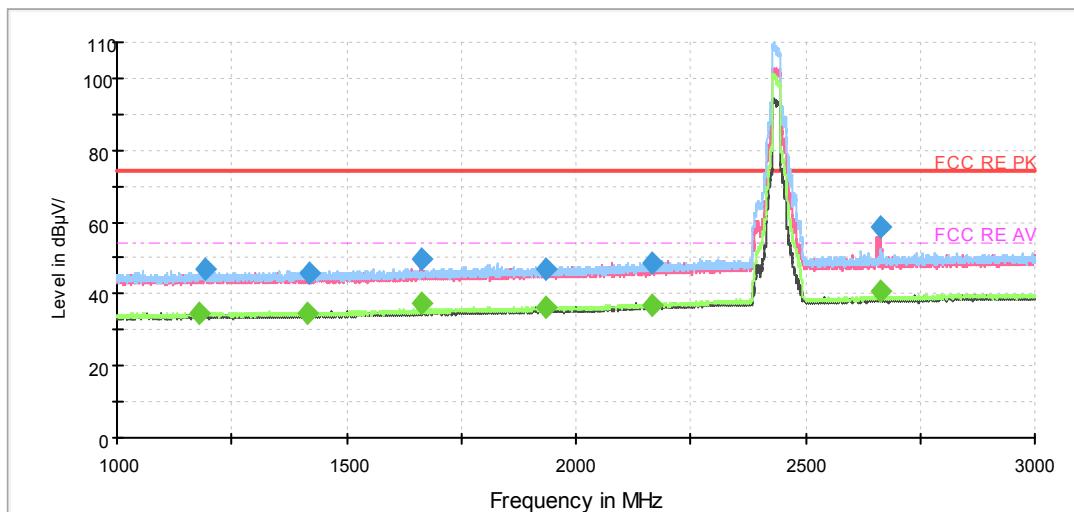

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

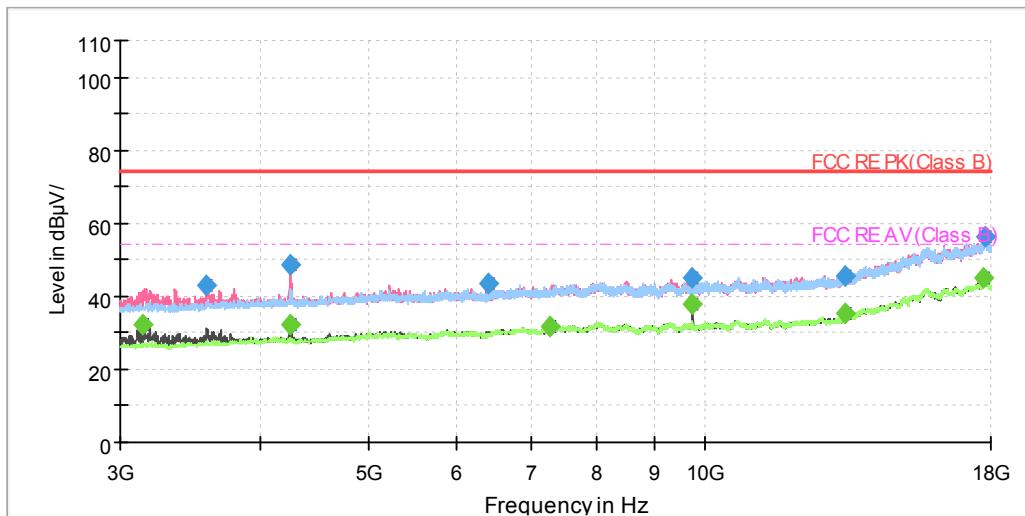

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1191.750000	46.7	100.0	H	10.0	-1.2	27.3	74.0
1418.750000	45.7	100.0	V	0.0	-0.7	28.3	74.0
1661.750000	49.8	200.0	V	204.0	0.2	24.2	74.0
1934.000000	47.1	100.0	H	6.0	1.0	26.9	74.0
2167.500000	48.8	100.0	V	353.0	2.1	25.2	74.0
2663.500000	58.4	100.0	V	175.0	3.9	15.6	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1180.000000	34.6	200.0	H	0.0	-1.3	19.4	54.0
1413.750000	34.7	100.0	V	359.0	-0.7	19.3	54.0
1661.750000	37.3	200.0	V	204.0	0.2	16.7	54.0
1934.000000	36.1	200.0	H	151.0	1.0	17.9	54.0
2167.250000	36.8	100.0	V	359.0	2.1	17.2	54.0
2663.500000	40.9	100.0	V	175.0	3.9	13.1	54.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

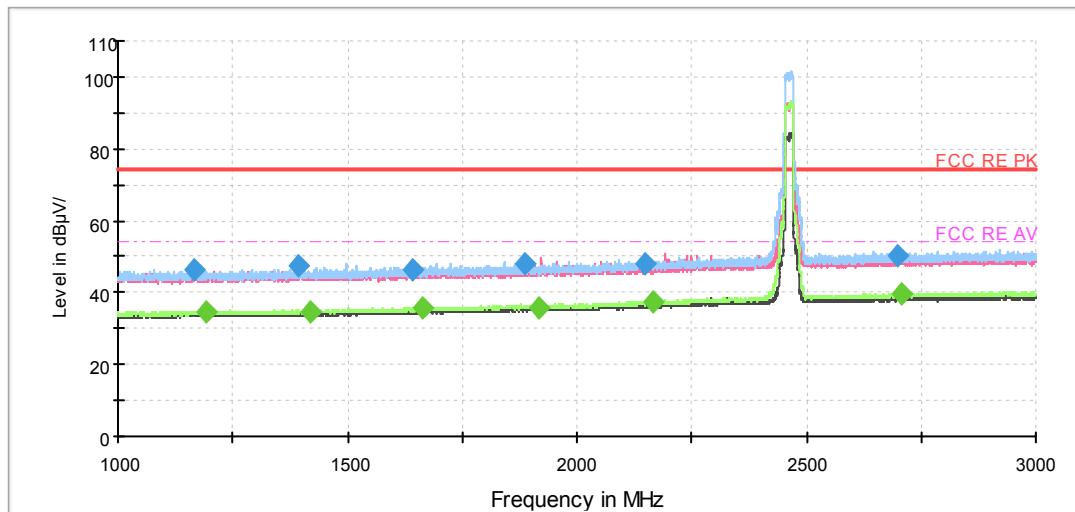

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

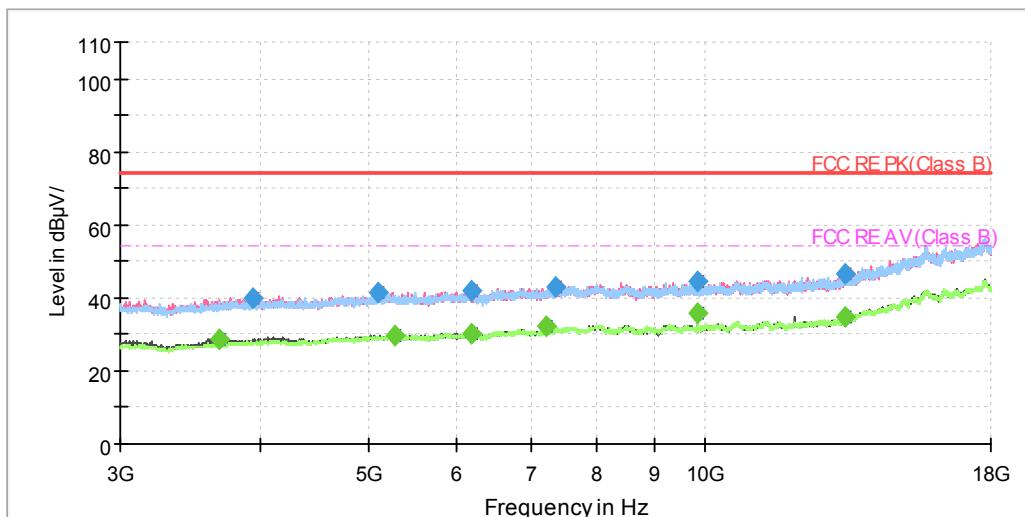

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1168.000000	46.3	100.0	H	158.0	-1.3	27.7	74.0
1395.000000	47.3	100.0	V	332.0	-0.7	26.7	74.0
1643.250000	46.5	100.0	H	42.0	0.2	27.5	74.0
1888.250000	48.3	100.0	H	0.0	0.8	25.7	74.0
2147.000000	47.8	100.0	H	3.0	1.9	26.2	74.0
2700.750000	50.2	200.0	H	289.0	4.0	23.8	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1192.750000	34.8	200.0	H	356.0	-1.2	19.2	54.0
1420.000000	34.7	100.0	H	149.0	-0.7	19.3	54.0
1662.750000	35.5	200.0	H	350.0	0.2	18.5	54.0
1917.000000	35.8	100.0	H	133.0	1.0	18.2	54.0
2166.500000	37.3	200.0	H	0.0	2.1	16.7	54.0
2705.750000	39.5	100.0	H	42.0	4.0	14.5	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH1

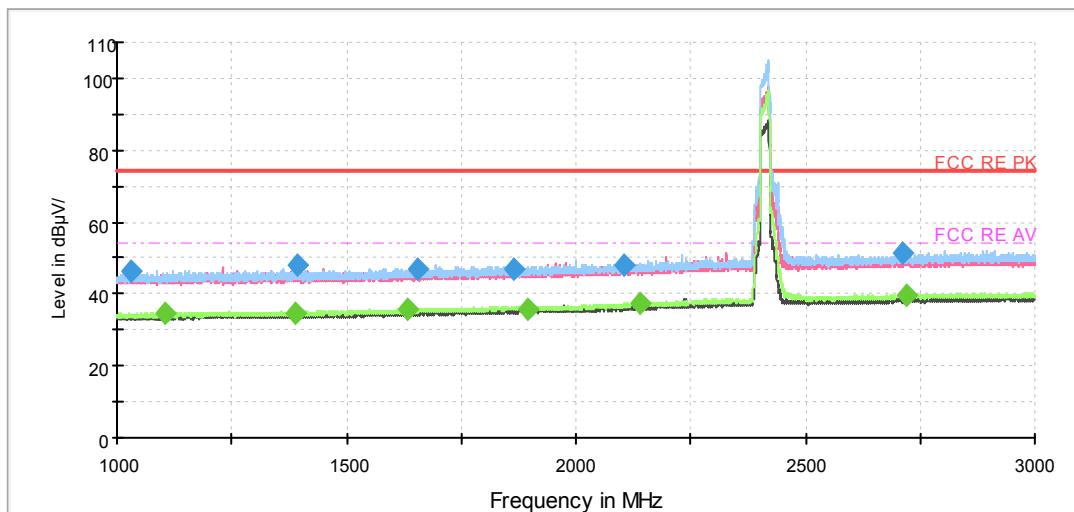

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

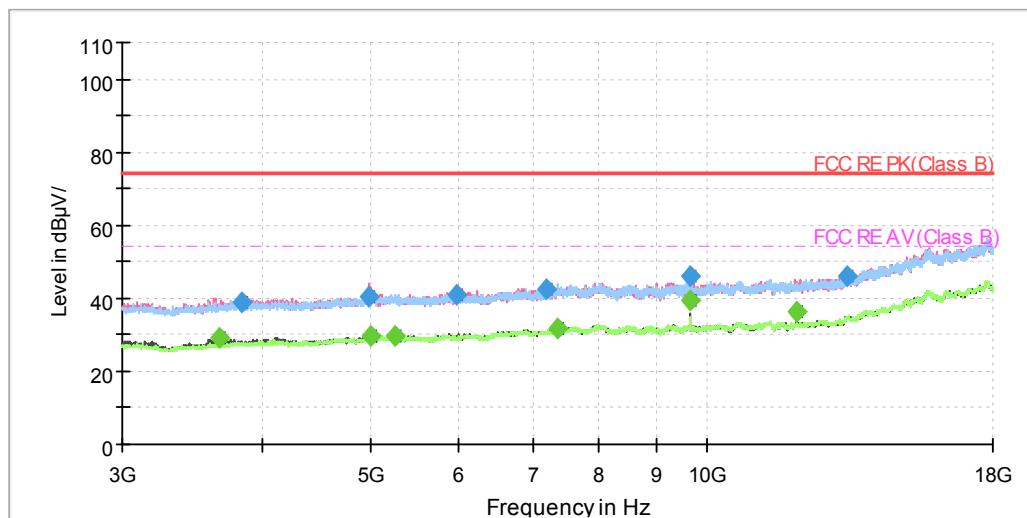

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1030.750000	46.4	200.0	V	0.0	-1.8	27.6	74.0
1395.000000	47.8	100.0	V	265.0	-0.7	26.2	74.0
1653.250000	46.9	100.0	H	15.0	0.2	27.1	74.0
1865.250000	47.0	100.0	H	8.0	0.8	27.0	74.0
2103.000000	48.3	200.0	H	343.0	1.7	25.7	74.0
2711.500000	51.2	100.0	H	190.0	4.1	22.8	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1106.500000	34.9	200.0	H	154.0	-1.4	19.1	54.0
1388.750000	34.6	100.0	H	98.0	-0.7	19.4	54.0
1634.000000	35.5	100.0	H	11.0	0.1	18.5	54.0
1896.250000	35.9	200.0	H	290.0	0.9	18.1	54.0
2138.750000	37.4	100.0	H	65.0	1.9	16.6	54.0
2719.250000	39.4	100.0	H	48.0	4.1	14.6	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH6

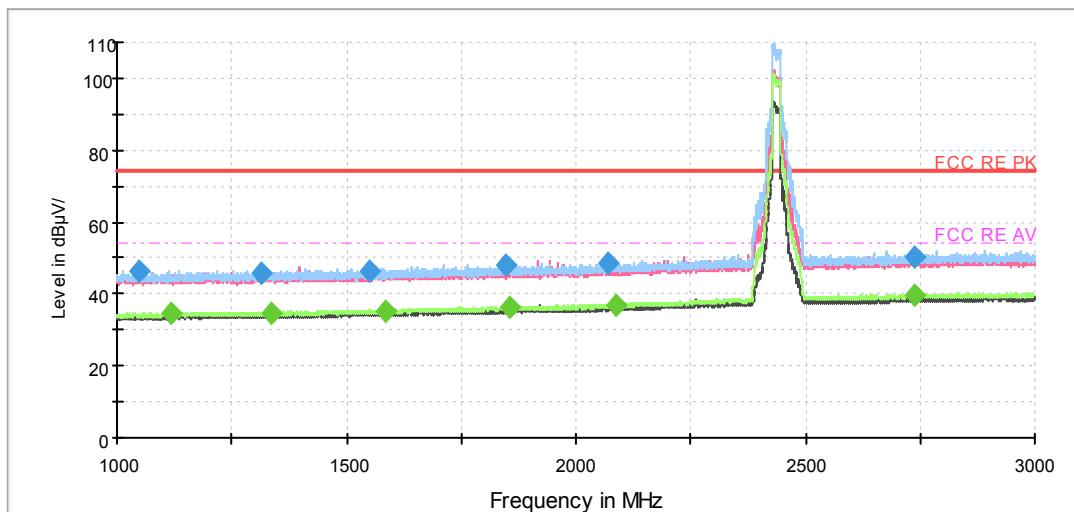

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

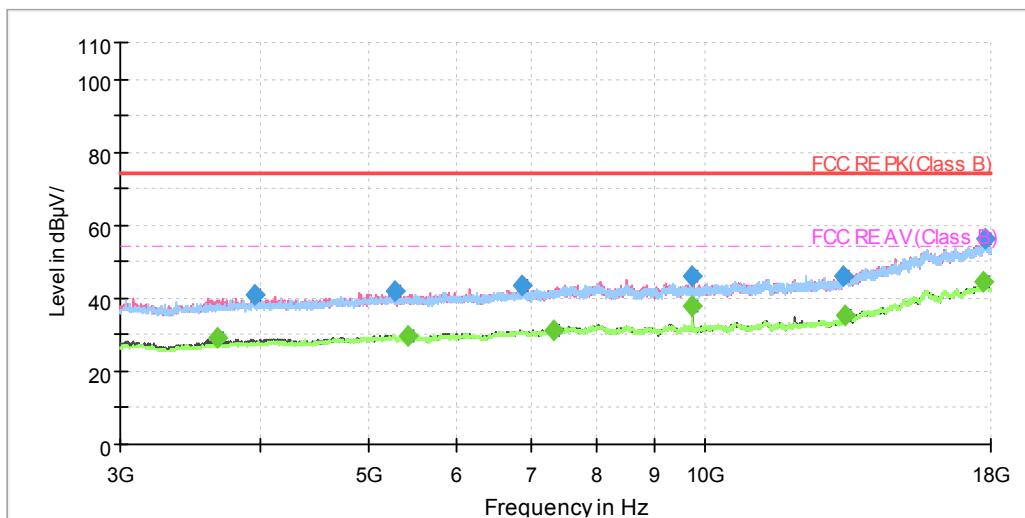

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1048.250000	46.4	100.0	H	0.0	-1.7	27.6	74.0
1316.500000	46.0	100.0	H	2.0	-0.9	28.0	74.0
1549.500000	46.6	200.0	V	134.0	-0.2	27.4	74.0
1845.000000	48.0	100.0	V	357.0	0.7	26.0	74.0
2072.000000	48.6	100.0	H	164.0	1.5	25.4	74.0
2739.500000	50.5	100.0	H	0.0	4.1	23.5	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1115.750000	34.8	100.0	H	5.0	-1.4	19.2	54.0
1337.000000	34.6	200.0	H	358.0	-0.9	19.4	54.0
1587.000000	35.0	200.0	H	100.0	-0.1	19.0	54.0
1856.000000	36.5	100.0	H	5.0	0.8	17.5	54.0
2085.250000	36.8	200.0	H	354.0	1.6	17.2	54.0
2739.000000	39.4	100.0	H	64.0	4.1	14.6	54.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

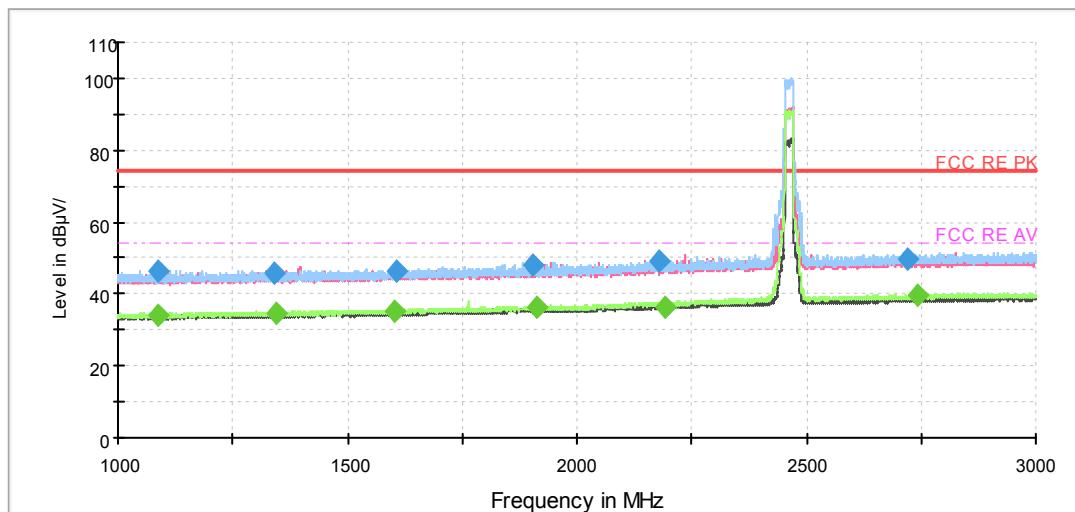

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

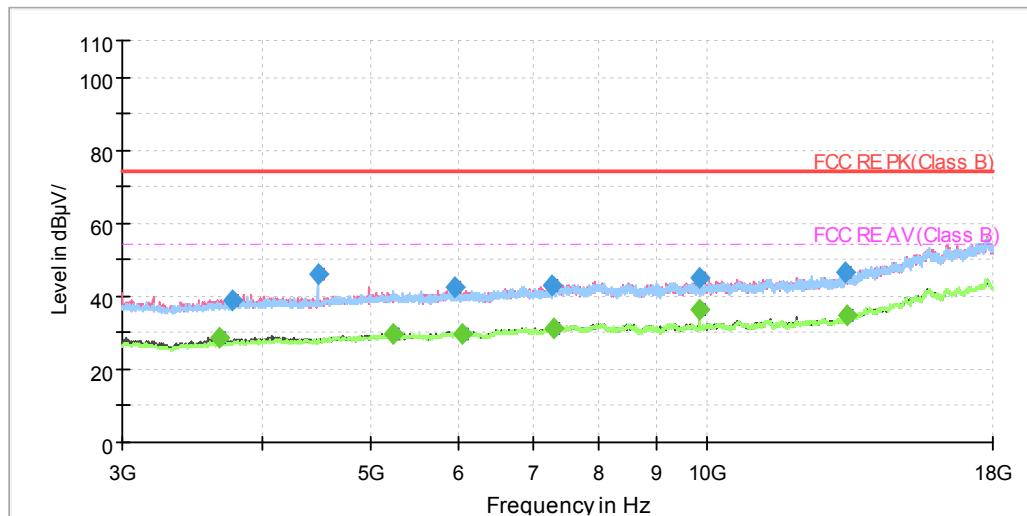

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1088.250000	46.5	100.0	H	30.0	-1.4	27.5	74.0
1341.750000	45.9	200.0	H	0.0	-0.9	28.1	74.0
1606.250000	46.5	200.0	H	265.0	0.0	27.5	74.0
1903.000000	48.1	200.0	H	324.0	0.9	25.9	74.0
2179.250000	48.9	200.0	H	344.0	2.1	25.1	74.0
2720.500000	49.5	100.0	V	200.0	4.1	24.5	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1085.500000	34.2	100.0	H	2.0	-1.4	19.8	54.0
1343.000000	34.6	100.0	H	30.0	-0.9	19.4	54.0
1603.750000	35.4	200.0	H	348.0	0.0	18.6	54.0
1911.000000	36.3	200.0	H	356.0	0.9	17.7	54.0
2190.000000	36.4	100.0	V	0.0	2.2	17.6	54.0
2742.500000	39.6	100.0	H	0.0	4.1	14.4	54.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH3

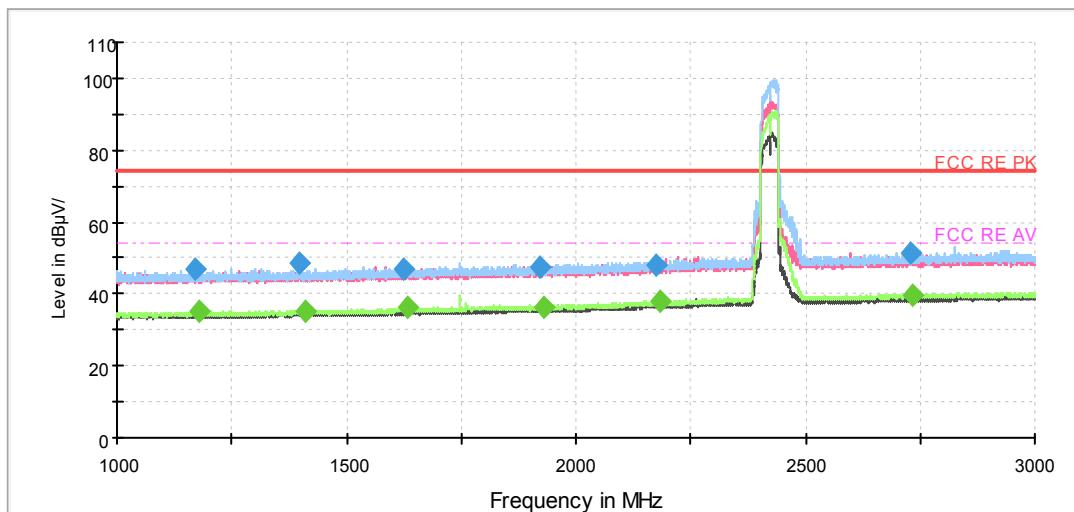

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

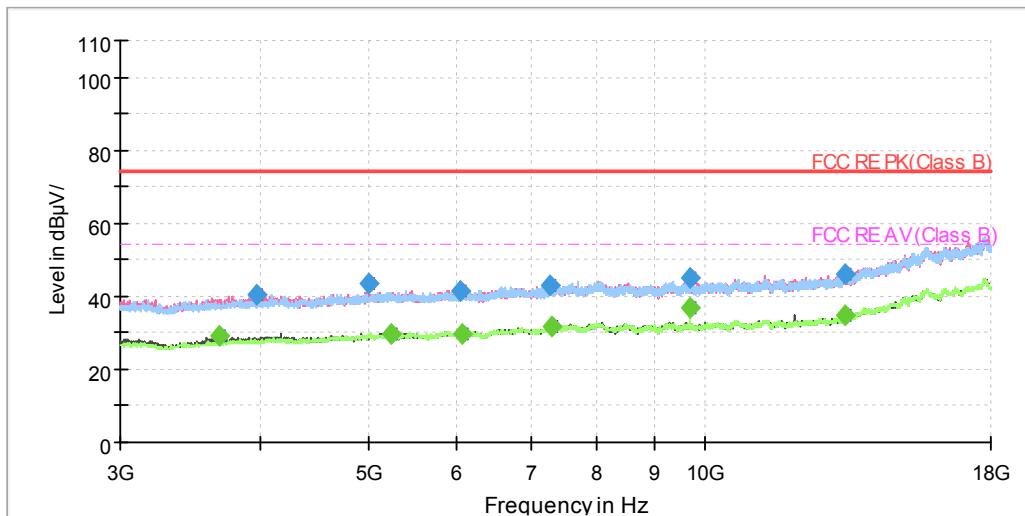

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1170.500000	46.7	100.0	H	124.0	-1.3	27.3	74.0
1397.250000	48.8	100.0	V	122.0	-0.7	25.2	74.0
1624.250000	46.9	200.0	H	0.0	0.1	27.1	74.0
1921.000000	47.7	100.0	V	329.0	1.0	26.3	74.0
2173.000000	47.9	200.0	H	331.0	2.1	26.1	74.0
2729.250000	51.2	200.0	H	278.0	4.1	22.8	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1177.750000	35.1	200.0	H	359.0	-1.3	18.9	54.0
1410.250000	35.3	100.0	H	1.0	-0.7	18.7	54.0
1634.000000	36.1	100.0	H	1.0	0.1	17.9	54.0
1931.500000	36.1	100.0	V	342.0	1.0	17.9	54.0
2182.750000	37.7	100.0	H	167.0	2.1	16.3	54.0
2735.750000	39.4	100.0	H	8.0	4.1	14.6	54.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

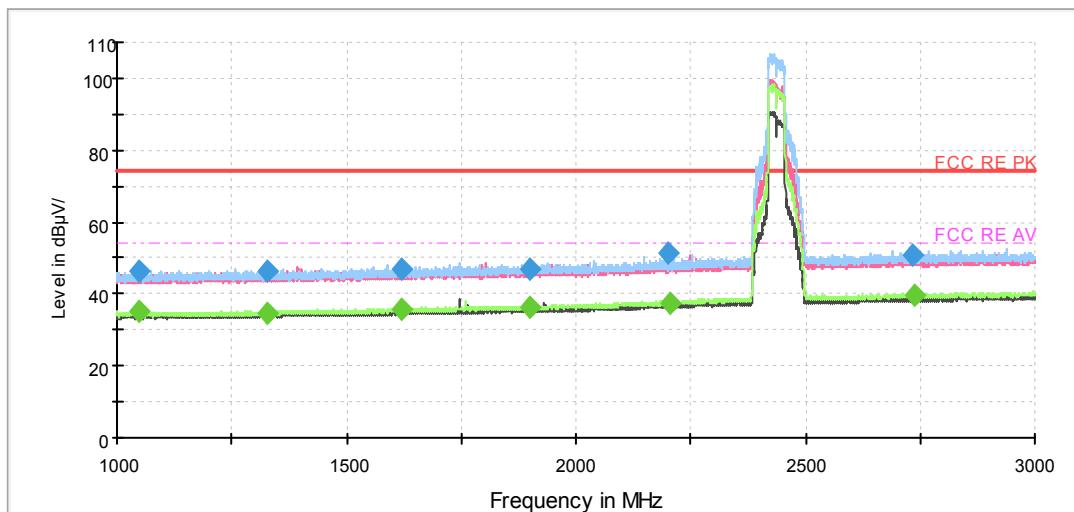

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

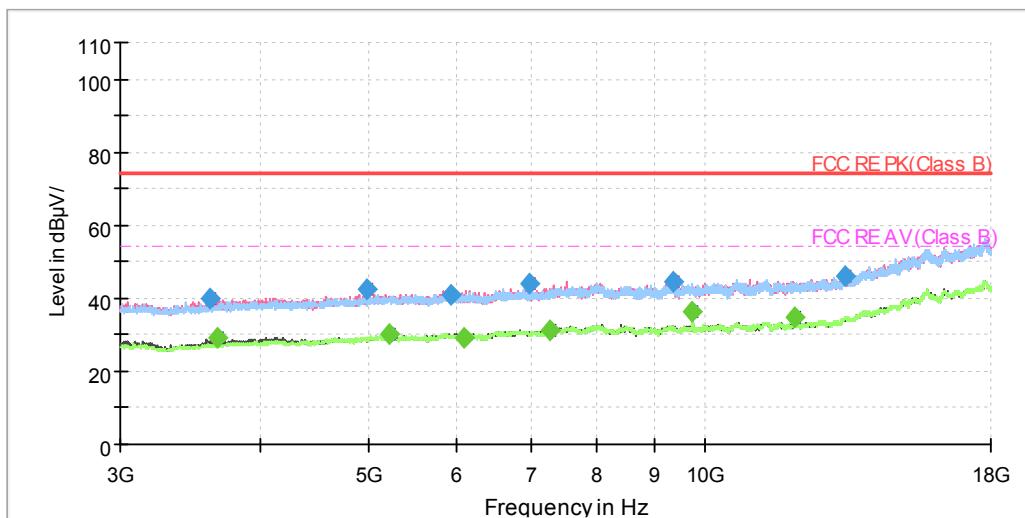

Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1049.500000	46.3	200.0	H	339.0	-1.7	27.7	74.0
1329.250000	46.6	100.0	H	185.0	-0.9	27.4	74.0
1620.250000	47.0	200.0	H	0.0	0.1	27.0	74.0
1897.750000	46.9	200.0	H	284.0	0.9	27.1	74.0
2199.500000	51.2	100.0	V	0.0	2.2	22.8	74.0
2733.750000	51.0	100.0	H	22.0	4.1	23.0	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1048.000000	35.1	200.0	H	352.0	-1.7	18.9	54.0
1329.250000	34.7	100.0	H	185.0	-0.9	19.3	54.0
1621.500000	35.9	200.0	H	164.0	0.1	18.1	54.0
1899.250000	36.5	200.0	H	0.0	0.9	17.5	54.0
2203.250000	37.7	100.0	H	0.0	2.2	16.3	54.0
2737.500000	39.4	100.0	H	9.0	4.1	14.6	54.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

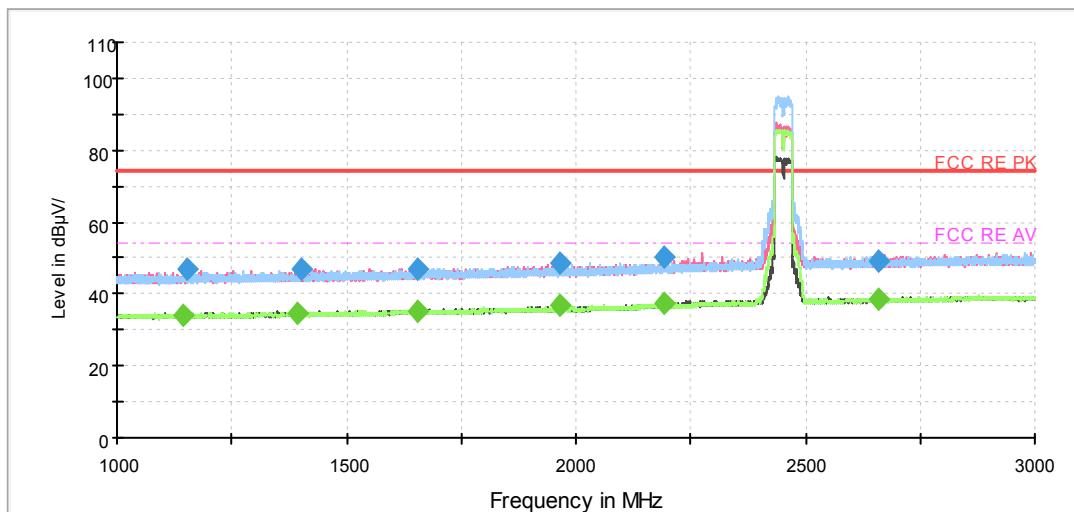

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

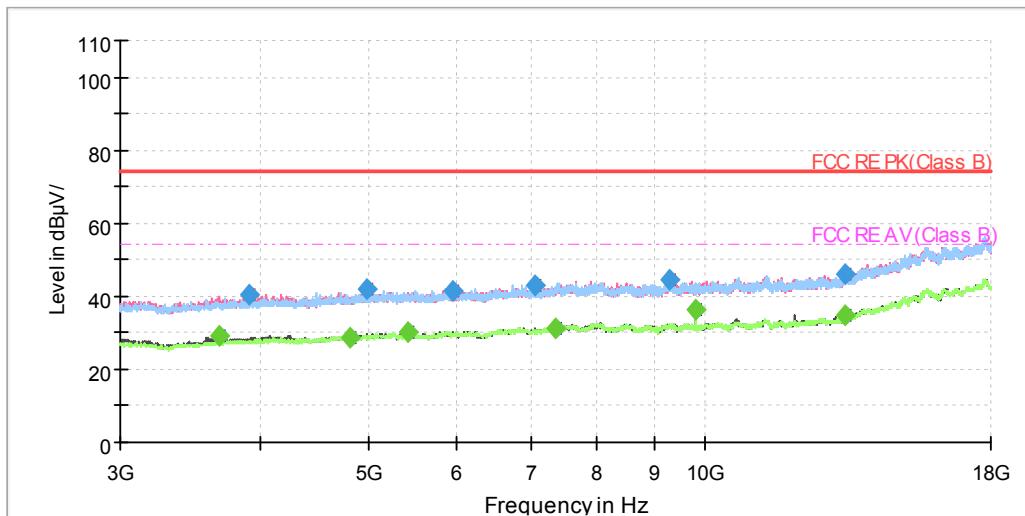

Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1154.750000	46.7	200.0	H	355.0	-1.3	27.3	74.0
1400.000000	46.8	100.0	V	293.0	-0.7	27.2	74.0
1653.000000	47.0	100.0	V	333.0	0.2	27.0	74.0
1963.750000	48.8	100.0	V	325.0	1.0	25.2	74.0
2192.750000	50.3	100.0	V	351.0	2.2	23.7	74.0
2658.500000	49.3	100.0	V	4.0	3.9	24.7	74.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1143.750000	34.2	100.0	H	62.0	-1.3	19.8	54.0
1395.000000	34.7	100.0	V	0.0	-0.7	19.3	54.0
1656.250000	35.0	100.0	V	72.0	0.2	19.0	54.0
1966.250000	36.7	100.0	V	245.0	1.0	17.3	54.0
2193.000000	37.4	100.0	V	309.0	2.2	16.6	54.0
2660.750000	38.7	200.0	H	342.0	3.9	15.3	54.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 5.7. Conducted Emission

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.

### Test Setup

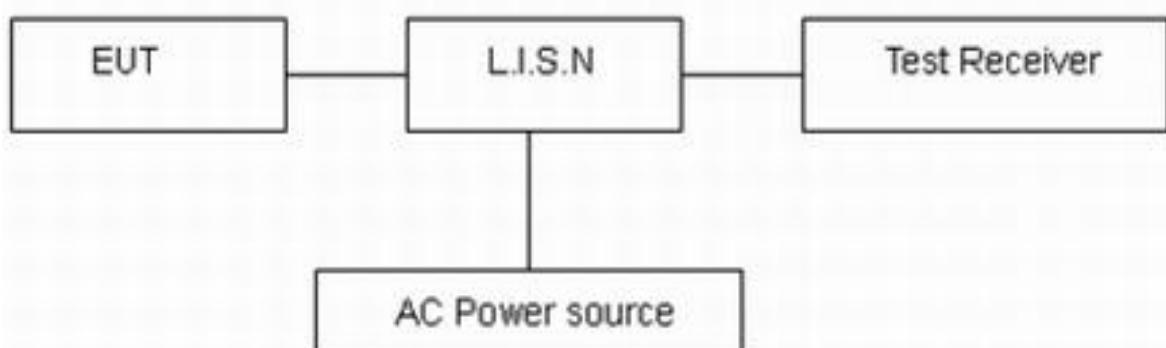

Note: AC Power source is used to change the voltage 110V/60Hz.

### Limits

Frequency (MHz)	Conducted Limits(dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50


\*: Decreases with the logarithm of the frequency.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 2.69$  dB.

**Test Results:**


Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all channels, 802.11g CH6 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

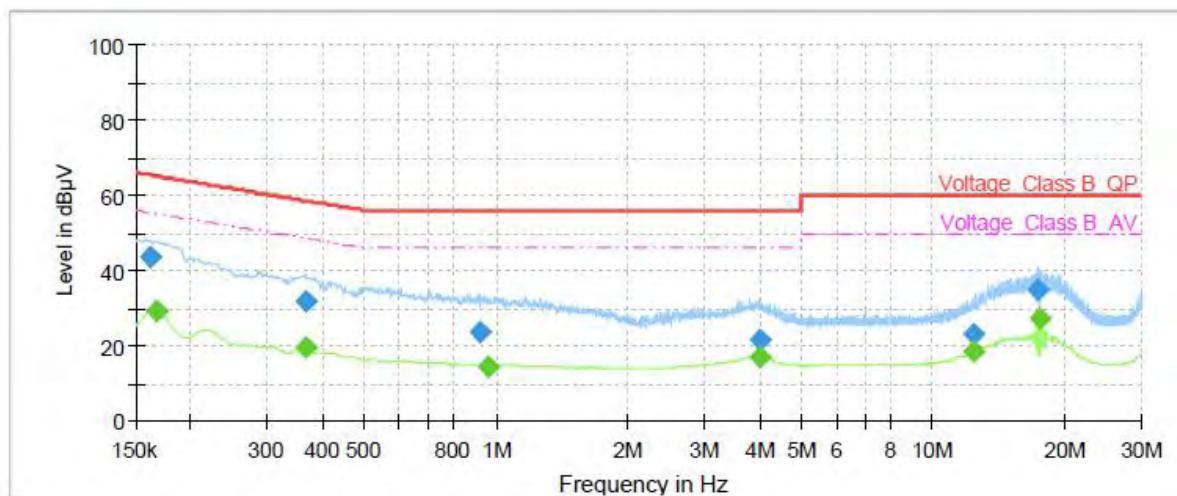

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.16	43.55	---	65.40	21.85	70.0	9.000	L1	ON	21
0.17	---	28.98	55.06	26.08	70.0	9.000	L1	ON	21
0.37	---	19.51	48.59	29.08	70.0	9.000	L1	ON	21
0.37	31.79	---	58.59	26.80	70.0	9.000	L1	ON	21
0.92	23.64	---	56.00	32.36	70.0	9.000	L1	ON	20
0.96	---	14.56	46.00	31.44	70.0	9.000	L1	ON	20
4.00	21.57	---	56.00	34.43	70.0	9.000	L1	ON	19
4.03	---	17.04	46.00	28.96	70.0	9.000	L1	ON	19
12.37	23.12	---	60.00	36.88	70.0	9.000	L1	ON	20
12.40	---	18.33	50.00	31.67	70.0	9.000	L1	ON	20
17.43	34.72	---	60.00	25.28	70.0	9.000	L1	ON	20
17.49	---	27.12	50.00	22.88	70.0	9.000	L1	ON	20

**Remark: Correct factor=cable loss + LISN factor**

L line Conducted Emission from 150 KHz to 30 MHz

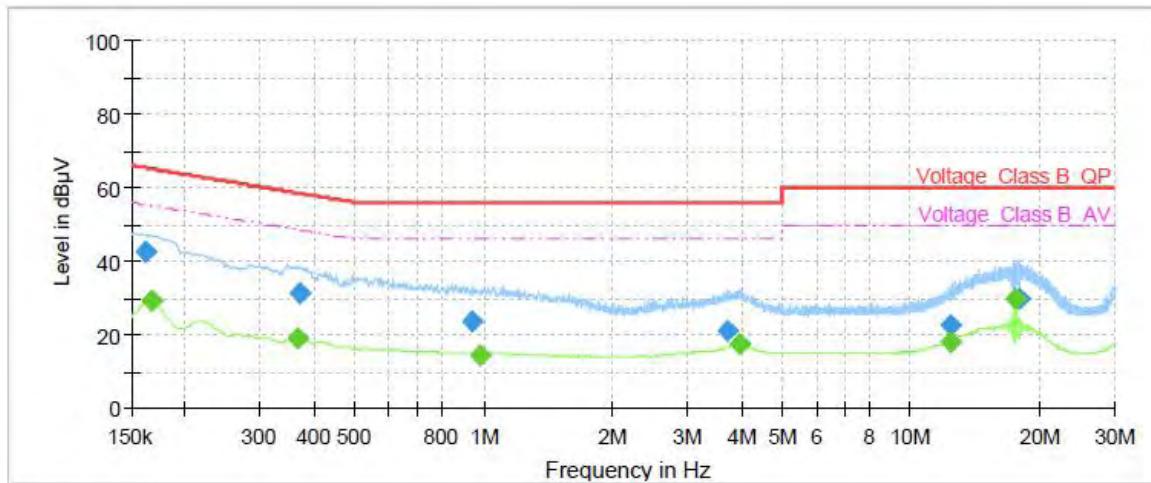

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.16	42.77	---	65.40	22.63	70.0	9.000	N	ON	21
0.17	---	29.20	55.06	25.86	70.0	9.000	N	ON	21
0.37	---	18.96	48.59	29.63	70.0	9.000	N	ON	21
0.37	31.30	---	58.49	27.19	70.0	9.000	N	ON	21
0.94	23.43	---	56.00	32.57	70.0	9.000	N	ON	20
0.98	---	14.53	46.00	31.47	70.0	9.000	N	ON	20
3.71	20.91	---	56.00	35.09	70.0	9.000	N	ON	19
3.96	---	17.34	46.00	28.66	70.0	9.000	N	ON	19
12.36	22.78	---	60.00	37.22	70.0	9.000	N	ON	20
12.40	---	18.13	50.00	31.87	70.0	9.000	N	ON	20
17.48	---	29.74	50.00	20.26	70.0	9.000	N	ON	20
17.95	29.97	---	60.00	30.03	70.0	9.000	N	ON	20

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz



## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
				2020-12-13	2021-12-12
EMI Test Receiver	R&S	ESCI	100948	2020-05-18	2021-05-17
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2021-12-15
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
EMI Test Receiver	R&S	ESR	101667	2020-05-18	2021-05-17
LISN	R&S	ENV216	101171	2018-12-15	2021-12-14
Spectrum Analyzer	Agilent	N9010A	MY47191109	2020-05-18	2021-05-17
Power Meter	R&S	NRP2	104306	2020-05-18	2021-05-17
Power Sensor	R&S	NRP-Z21	104799	2020-05-18	2021-05-17
20dB Attenuator	Star River Highlight	UCL-TS2S-20	18013001	2019-12-15	2020-12-14
				2020-12-13	2021-12-12
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2020-12-11
				2020-12-10	2021-06-09
Software	R&S	EMC32	9.26.0	/	/

\*\*\*\*\*END OF REPORT\*\*\*\*\*



## ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



## ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.