



RF TEST REPORT

Applicant Shanghai Smawave Technology Co. ,Ltd
FCC ID 2AU8HSRG411-A
Product LTE CPE
Brand Smawave
Model SRG411-a
Report No. R2001A0010-R9V1
Issue Date May 7, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15E (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

| | |
|---|-----|
| 1. Test Laboratory..... | 4 |
| 1.1. Notes of the test report..... | 4 |
| 1.2. Testing Location..... | 4 |
| 2. General Description of Equipment under Test..... | 5 |
| 2.1. Applicant and Manufacturer Information..... | 5 |
| 2.2. General information..... | 5 |
| 3. Applied Standards..... | 6 |
| 4. Test Configuration..... | 7 |
| 5. Test Case Results..... | 9 |
| 5.1. Occupied Bandwidth..... | 9 |
| 5.2. Average Power Output –Conducted..... | 20 |
| 5.3. Frequency Stability..... | 30 |
| 5.4. Power Spectral Density..... | 33 |
| 5.5. Unwanted Emission..... | 65 |
| 5.6. Conducted Emission..... | 110 |
| 6. Main Test Instruments..... | 113 |



Summary of measurement results

| Number | Test Case | Clause in FCC rules | Verdict |
|---|--------------------------------|---------------------|---------|
| 1 | Average conducted output power | 15.407(a) | PASS |
| 2 | Occupied bandwidth | 15.407(e) | PASS |
| 3 | Frequency stability | 15.407(g) | PASS |
| 4 | Power spectral density | 15.407(a) | PASS |
| 5 | Unwanted Emissions | 15.407(b) | PASS |
| 6 | Conducted Emissions | 15.207 | PASS |
| Date of Testing: February 19, 2020~ March 30, 2020 | | | |
| Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. | | | |

Note: This revised report (Report No.: R2001A0010-R9V1) supersedes and replaces the previously issued report (Report No.:R2001A0010-R9). Please discard or destroy the previously issued report and dispose of it accordingly.



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com



2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

| | |
|----------------------|--|
| Applicant | Shanghai Smawave Technology Co. ,Ltd |
| Applicant address | 3/F, Building 8, 1001 North Qinzhou Road , Xuhui District, Shanghai, China |
| Manufacturer | Shanghai Smawave Technology Co. ,Ltd |
| Manufacturer address | 3/F, Building 8, 1001 North Qinzhou Road , Xuhui District, Shanghai, China |

2.2. General information

| EUT Description | |
|---|--|
| Model | SRG411-a |
| SN | 1# |
| Hardware Version | V1.0 |
| Software Version | SG625 |
| Power Supply | DC Power |
| Antenna Type | External Antenna |
| Antenna Gain | 5.00 dBi |
| Directional Gain | NA |
| Test Mode(s) | U-NII-1(5150MHz-5250MHz) U-NII-3(5725MHz-5850MHz) |
| Modulation Type | 802.11a/n (HT20/HT40) : OFDM 802.11ac (VHT20/VHT40/VHT80): OFDM |
| Max. Conducted Power | 20.36dBm |
| Operating Frequency Range(s) | U-NII-1: 5150-5250MHz U-NII-3: 5725-5850MHz |
| Operating temperature range: | -40 ° C to 70° C |
| Operating voltage range: | 9V to 14V |
| State DC voltage: | 12V |
| Note:1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant. | |



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15E (2019) Unlicensed National Information Infrastructure Devices

ANSI C63.10 (2013)

Reference standard:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

| Band | Data Rate | | |
|----------------|-----------|-----------|--------|
| | Antenna 1 | Antenna 2 | MIMO |
| 802.11a | 6 Mbps | 6 Mbps | 6 Mbps |
| 802.11n HT20 | MCS0 | MCS0 | MCS8 |
| 802.11n HT40 | MCS0 | MCS0 | MCS8 |
| 802.11ac VHT20 | MCS0 | MCS0 | MCS8 |
| 802.11ac VHT40 | MCS0 | MCS0 | MCS8 |
| 802.11ac VHT80 | MCS0 | MCS0 | MCS8 |

The worst case Antenna mode for each of the following tests for Wi-Fi:

| Test Cases | Antenna 1 | Antenna 2 | MIMO |
|--------------------------------|-----------|-----------|------|
| Average conducted output power | O | O | O |
| Occupied bandwidth | -- | O | -- |
| Frequency stability | -- | O | -- |
| Power Spectral Density | O | O | O |
| Unwanted Emissions | -- | O | -- |
| Conducted Emissions | -- | O | -- |

Note: "O": test all bands

According to RF Output power results in chapter 5.1, SISO Antenna 2 was selected as the worst SISO antenna.

**Wireless Technology and Frequency Range**

| Wireless Technology | Bandwidth | Channel | Frequency |
|---------------------|-----------|---------|-----------|
| Wi-Fi | U-NII-1 | 20 MHz | 36 |
| | | | 40 |
| | | | 44 |
| | | | 48 |
| | | 40 MHz | 38 |
| | | | 46 |
| | U-NII-3 | 80 MHz | 42 |
| | | 20 MHz | 149 |
| | | | 153 |
| | | | 157 |
| | | | 161 |
| | | 40 MHz | 165 |
| | | | 151 |
| | | | 159 |
| | | 80 MHz | 155 |

5. Test Case Results

5.1. Occupied Bandwidth

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.


For U-NII-1/U-NII-2A/U-NII-2C, set RBW \approx 1% OCB kHz, VBW \geq 3 \times RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

For U-NII-3, Set RBW = 100 kHz, VBW \geq 3 \times RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

Use the 99 % power bandwidth function of the instrument

Test Setup



Limits

Rule FCC Part §15.407(e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Measurement Uncertainty







The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

**Test Results:****U-NII-1**

| Network Standards | Carrier frequency (MHz) | 99% bandwidth (MHz) | Minimum 26 dB bandwidth (MHz) | Conclusion |
|-------------------|-------------------------|---------------------|-------------------------------|------------|
| 802.11a | 5180 | 16.497 | 20.68 | PASS |
| | 5200 | 16.527 | 21.98 | PASS |
| | 5240 | 16.553 | 22.19 | PASS |
| 802.11n HT20 | 5180 | 17.625 | 21.68 | PASS |
| | 5200 | 17.654 | 21.81 | PASS |
| | 5240 | 17.665 | 22.38 | PASS |
| 802.11n HT40 | 5190 | 36.407 | 53.64 | PASS |
| | 5230 | 36.642 | 58.23 | PASS |
| 802.11ac VHT20 | 5180 | 17.622 | 21.23 | PASS |
| | 5200 | 17.695 | 24.37 | PASS |
| | 5240 | 17.717 | 24.98 | PASS |
| 802.11ac VHT40 | 5190 | 36.488 | 56.78 | PASS |
| | 5230 | 36.698 | 58.93 | PASS |
| 802.11ac VHT80 | 5210 | 75.898 | 113.20 | PASS |

U-NII-3

| Network Standards | Carrier frequency (MHz) | 99% bandwidth (MHz) | Minimum 6 dB bandwidth (MHz) | Limit (kHz) | Conclusion |
|-------------------|-------------------------|---------------------|------------------------------|-------------|------------|
| 802.11a | 5745 | 16.471 | 16.44 | 500 | PASS |
| | 5785 | 16.466 | 16.34 | 500 | PASS |
| | 5825 | 16.471 | 16.43 | 500 | PASS |
| 802.11n HT20 | 5745 | 17.633 | 17.33 | 500 | PASS |
| | 5785 | 17.609 | 17.08 | 500 | PASS |
| | 5825 | 17.606 | 17.35 | 500 | PASS |
| 802.11n HT40 | 5755 | 36.343 | 36.15 | 500 | PASS |
| | 5795 | 36.324 | 36.13 | 500 | PASS |
| 802.11ac VHT20 | 5745 | 17.609 | 17.16 | 500 | PASS |
| | 5785 | 17.586 | 16.96 | 500 | PASS |
| | 5825 | 17.580 | 17.09 | 500 | PASS |
| 802.11ac VHT40 | 5755 | 36.359 | 36.14 | 500 | PASS |
| | 5795 | 36.329 | 36.08 | 500 | PASS |
| 802.11ac VHT80 | 5775 | 75.631 | 75.35 | 500 | PASS |

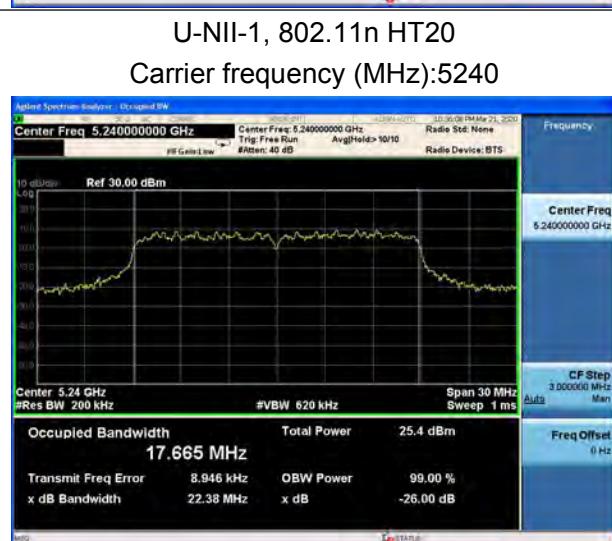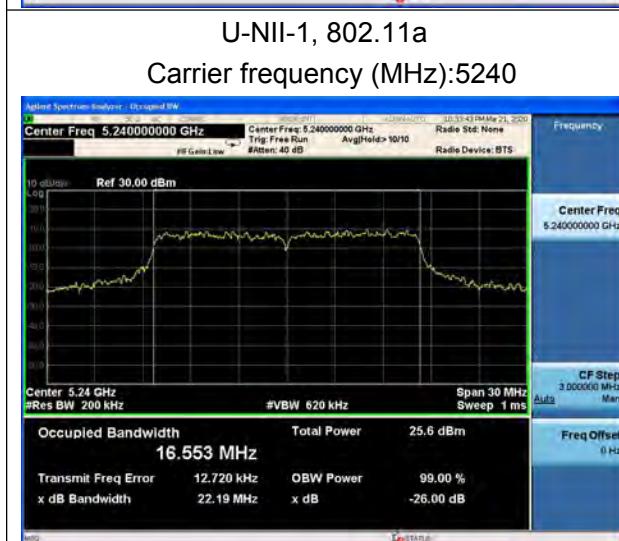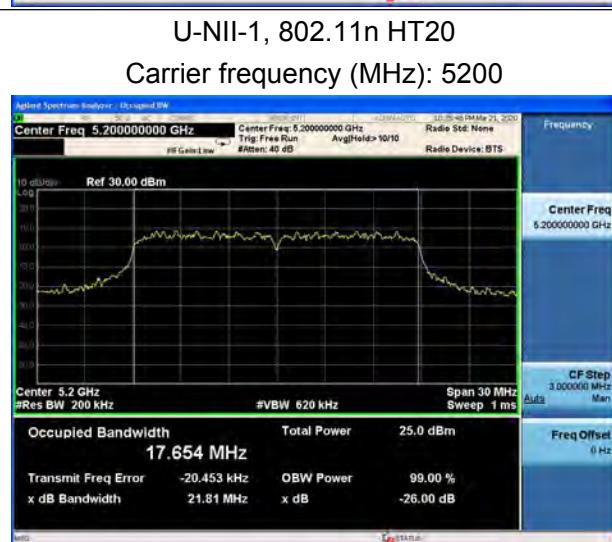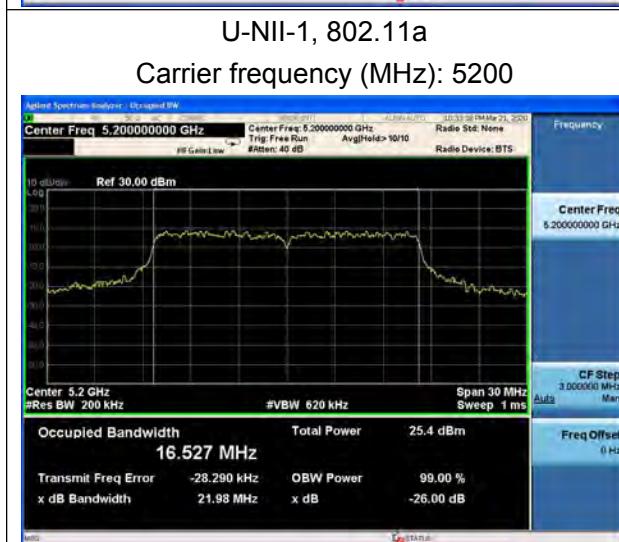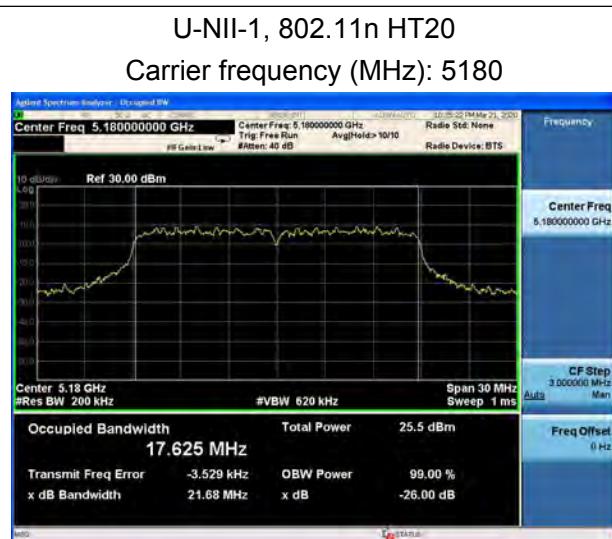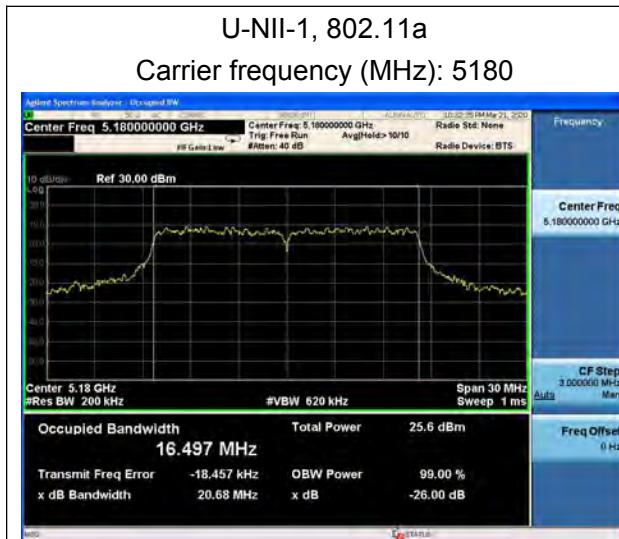

U-NII-1, 802.11n HT40

Carrier frequency (MHz): 5190



U-NII-1, 802.11ac VHT20

Carrier frequency (MHz): 5180




U-NII-1, 802.11n HT40

Carrier frequency (MHz): 5230




U-NII-1, 802.11ac VHT20

Carrier frequency (MHz): 5200

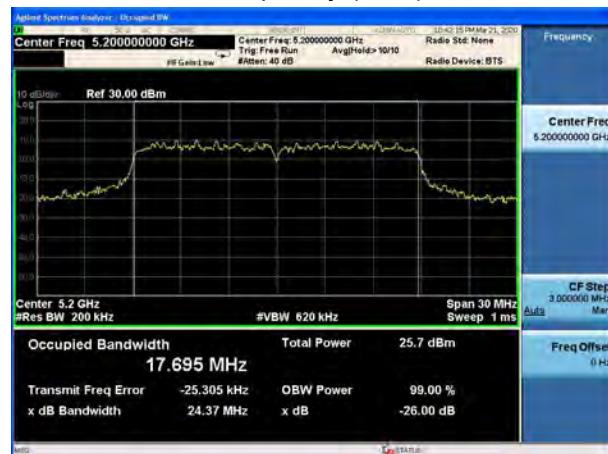


U-NII-1, 802.11ac VHT40

Carrier frequency (MHz): 5190

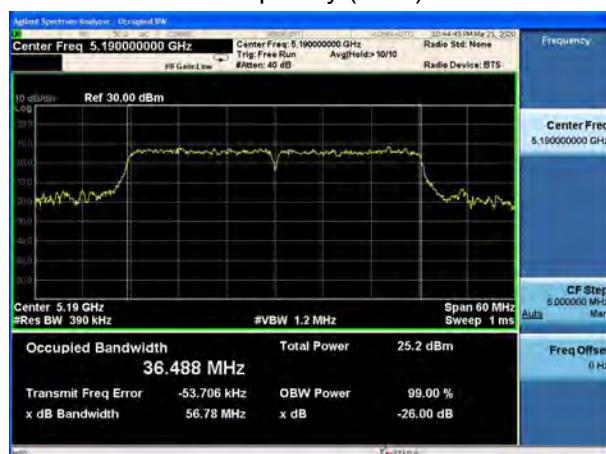


U-NII-1, 802.11ac VHT20

Carrier frequency (MHz): 5240

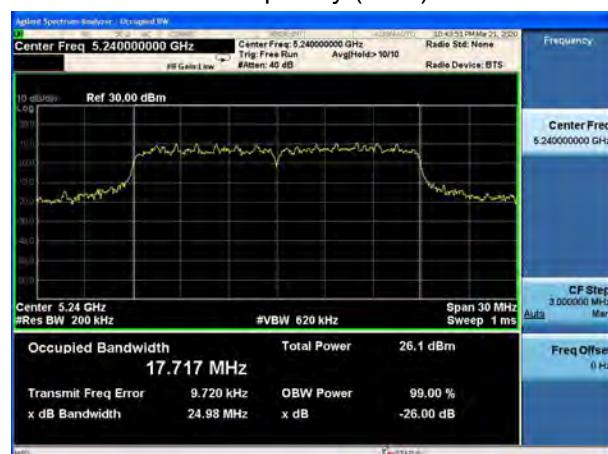

U-NII-1, 802.11ac VHT40

Carrier frequency (MHz): 5230

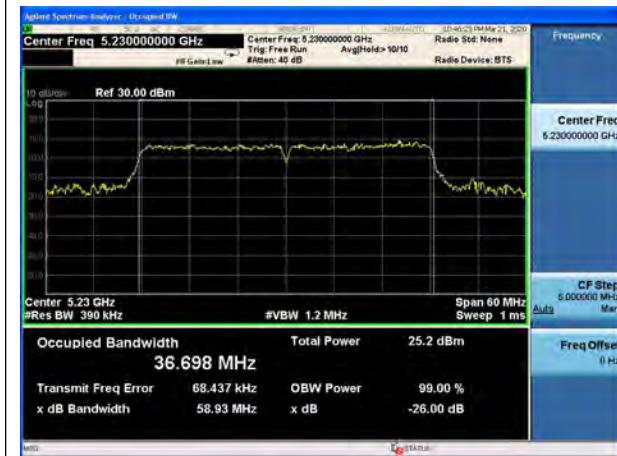

U-NII-1, 802.11ac VHT80


Carrier frequency (MHz): 5210



99% bandwidth


U-NII-3, 802.11a

Carrier frequency (MHz): 5745

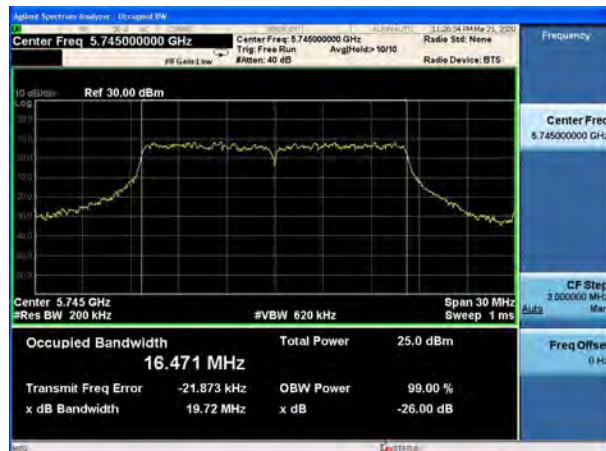


U-NII-3, 802.11n HT20

Carrier frequency (MHz): 5745

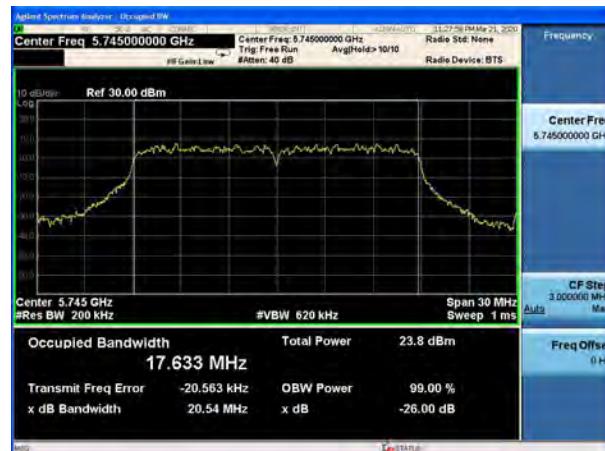


U-NII-3, 802.11a

Carrier frequency (MHz): 5785

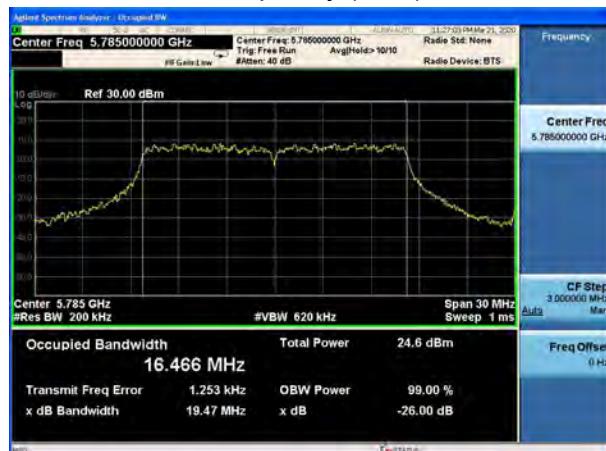


U-NII-3, 802.11n HT20

Carrier frequency (MHz): 5785

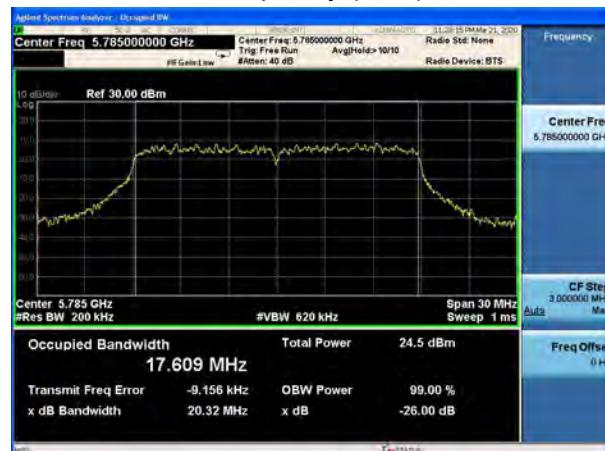


U-NII-3, 802.11a

Carrier frequency (MHz): 5825

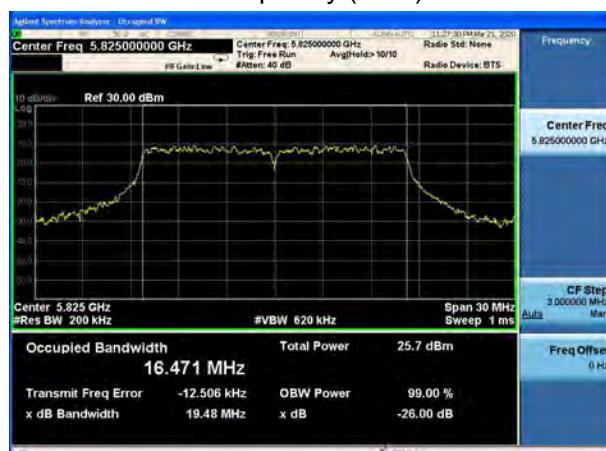

U-NII-3, 802.11n HT20

Carrier frequency (MHz): 5825

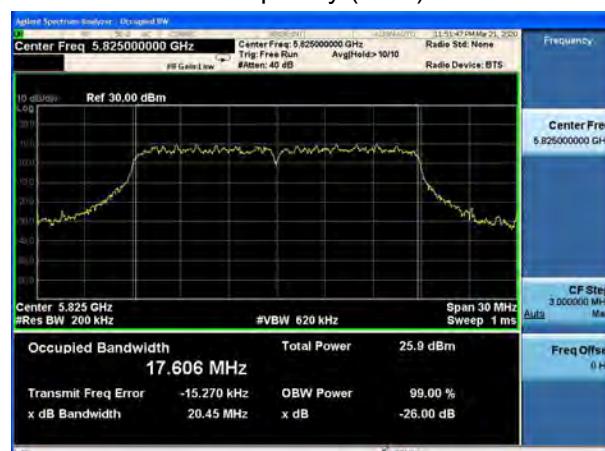


U-NII-3, 802.11n HT40

Carrier frequency (MHz): 5755




U-NII-3, 802.11ac VHT20

Carrier frequency (MHz): 5745

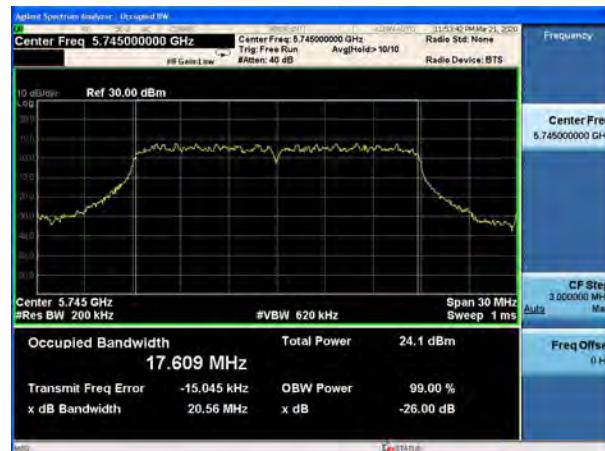


U-NII-3, 802.11n HT40

Carrier frequency (MHz): 5795

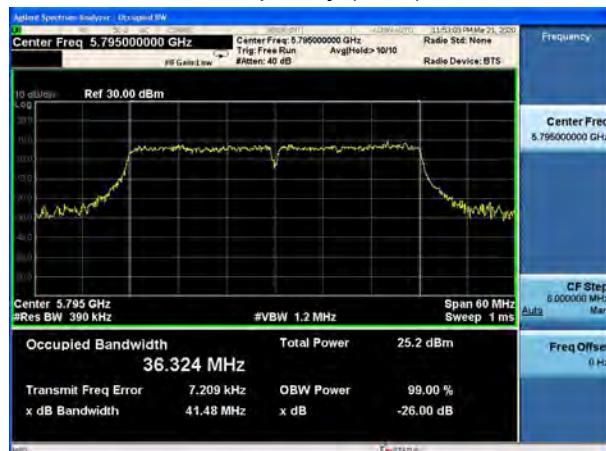


U-NII-3, 802.11ac VHT20

Carrier frequency (MHz): 5785

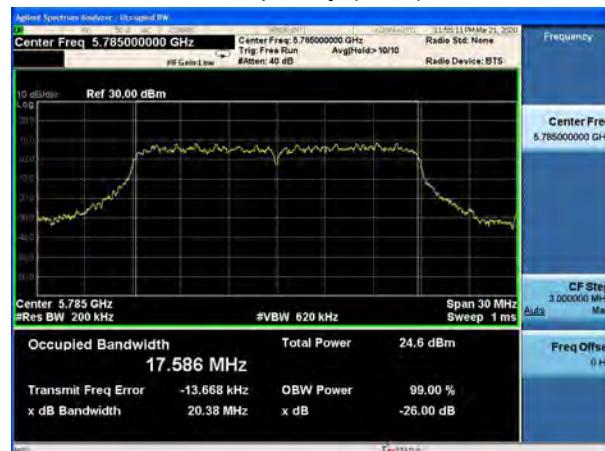


U-NII-3, 802.11ac VHT40


Carrier frequency (MHz): 5755

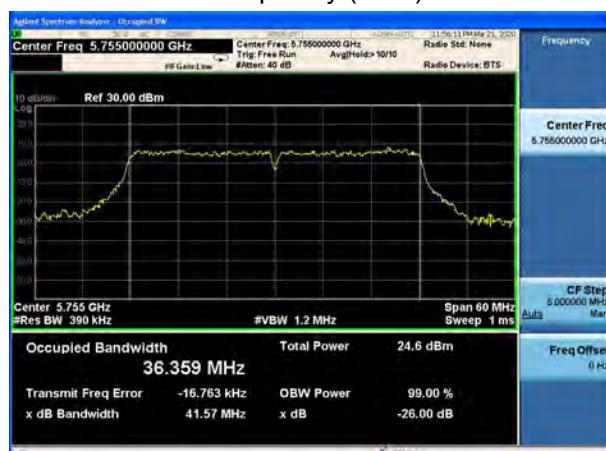

U-NII-3, 802.11ac VHT20

Carrier frequency (MHz): 5825

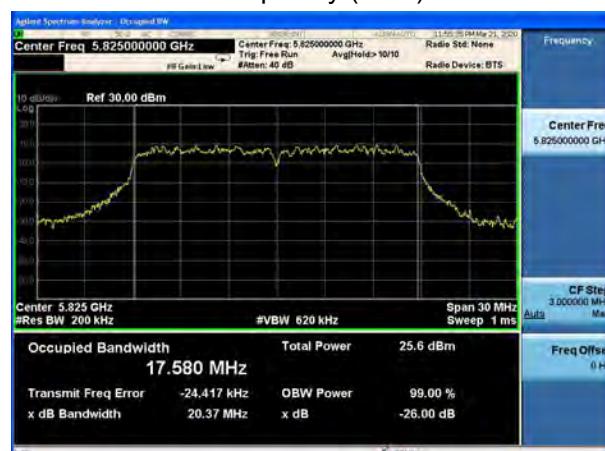


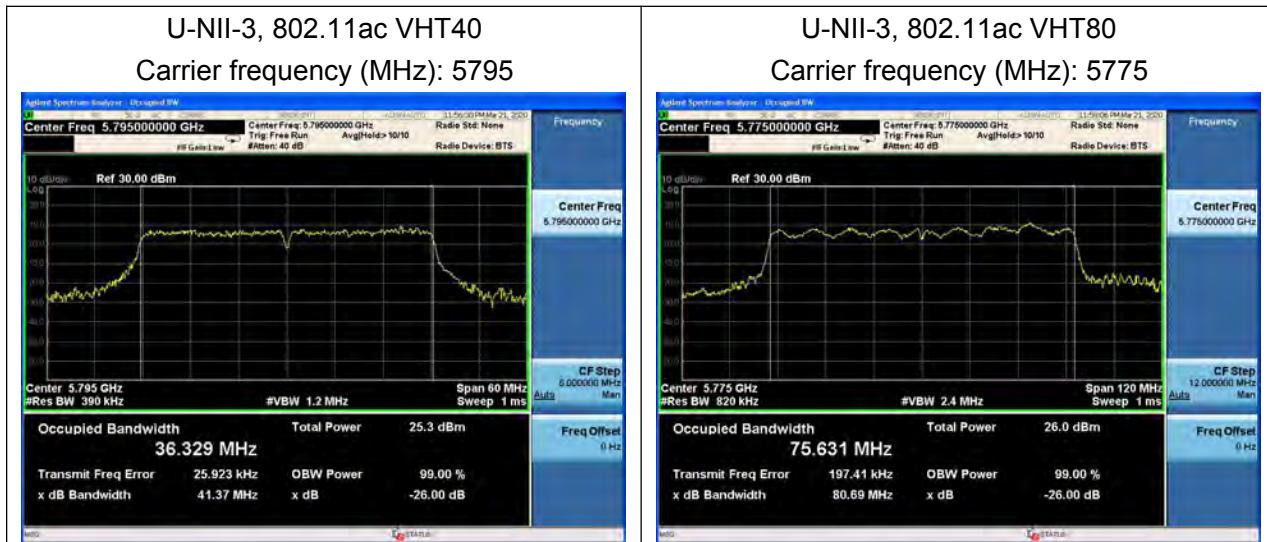

Minimum 6 dB bandwidth


U-NII-3, 802.11a

Carrier frequency (MHz): 5745

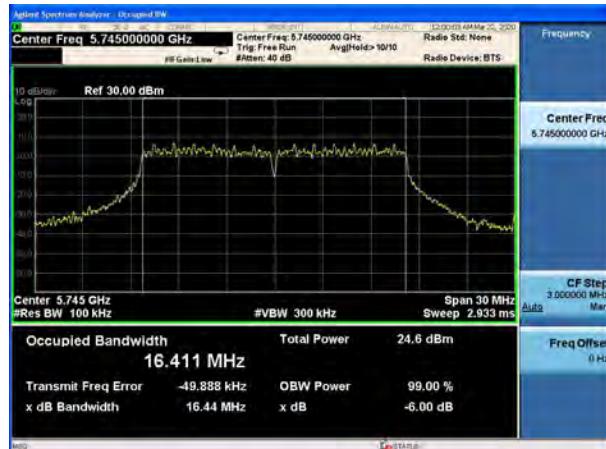


U-NII-3, 802.11n HT20

Carrier frequency (MHz): 5745

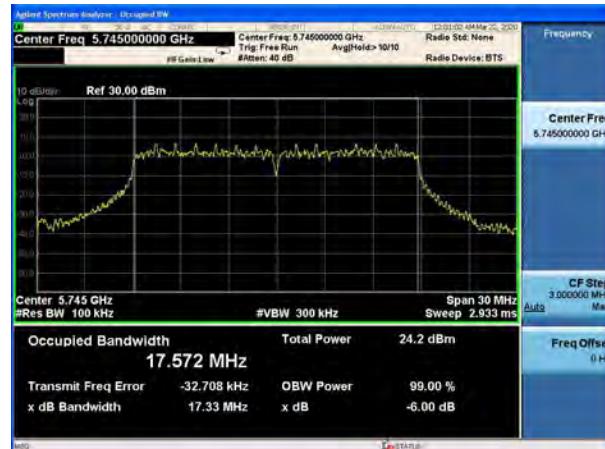


U-NII-3, 802.11a

Carrier frequency (MHz): 5785

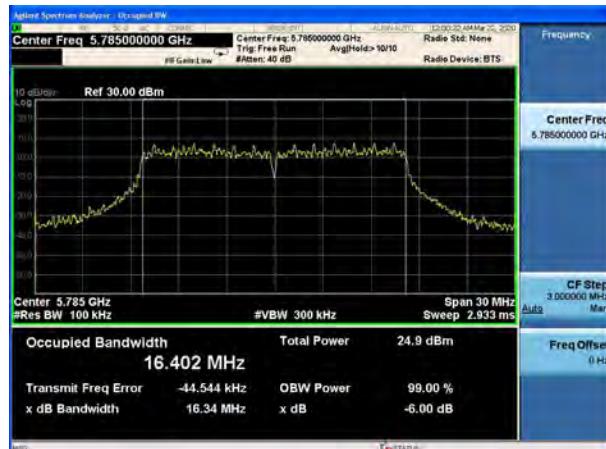


U-NII-3, 802.11n HT20

Carrier frequency (MHz): 5785

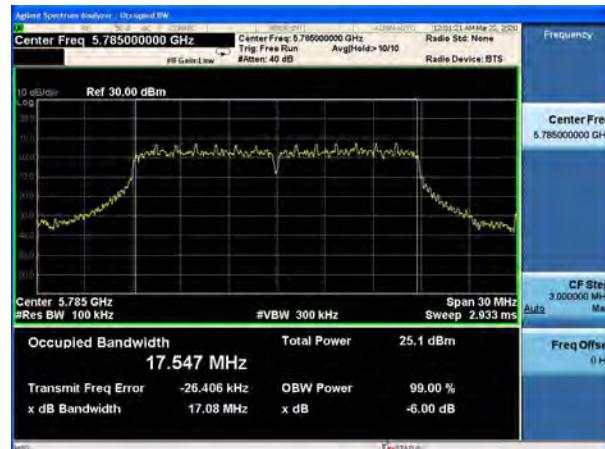


U-NII-3, 802.11a

Carrier frequency (MHz): 5825

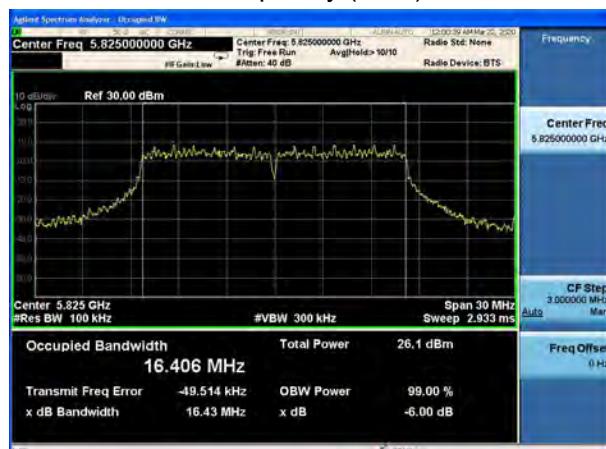


U-NII-3, 802.11n HT20

Carrier frequency (MHz): 5825

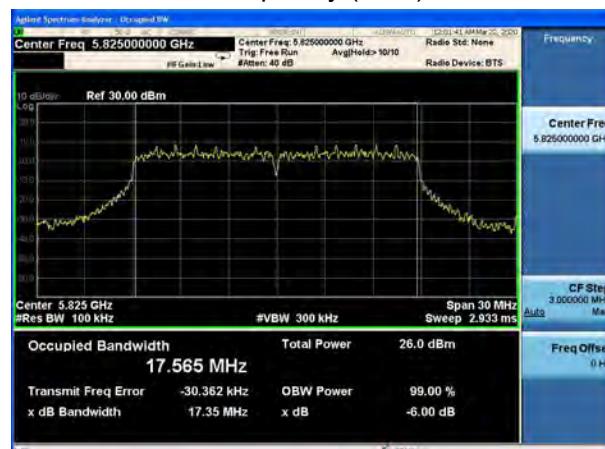


U-NII-3, 802.11n HT40

Carrier frequency (MHz): 5755

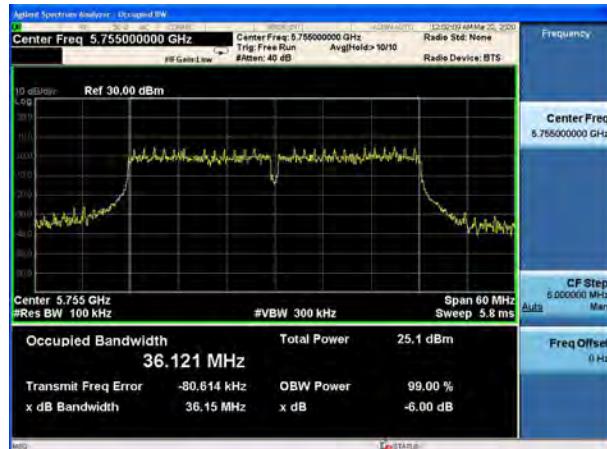


U-NII-3, 802.11ac VHT20

Carrier frequency (MHz): 5745

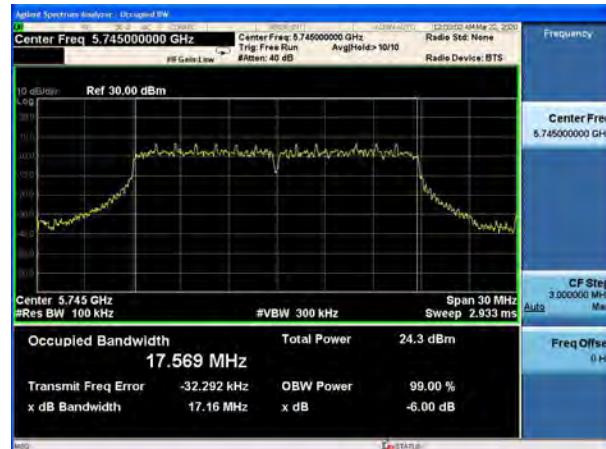


U-NII-3, 802.11n HT40

Carrier frequency (MHz): 5795

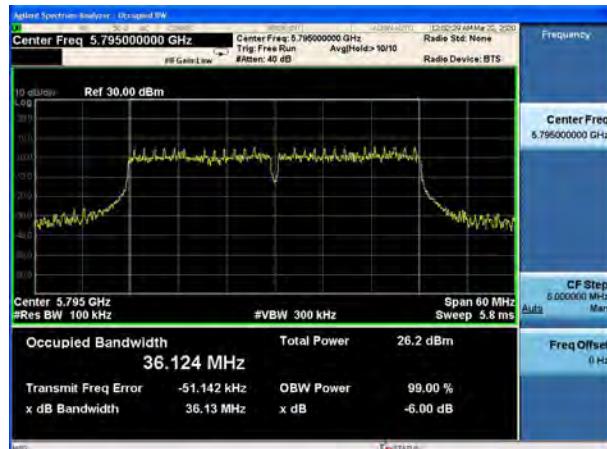


U-NII-3, 802.11ac VHT20

Carrier frequency (MHz): 5785

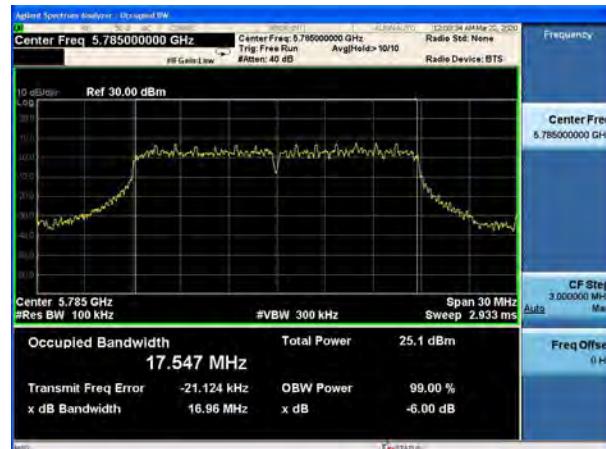


U-NII-3, 802.11ac VHT40

Carrier frequency (MHz): 5755

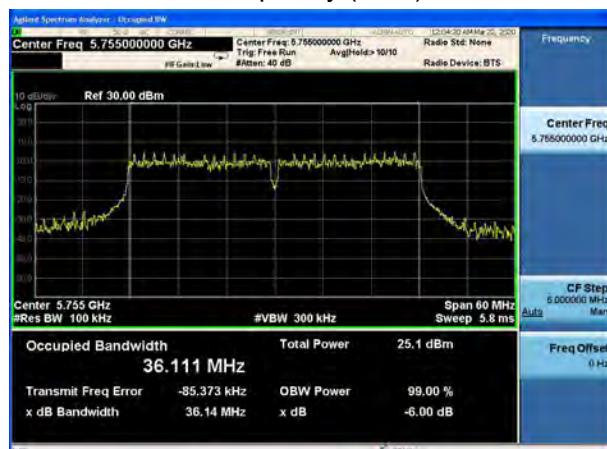


U-NII-3, 802.11ac VHT20

Carrier frequency (MHz): 5825

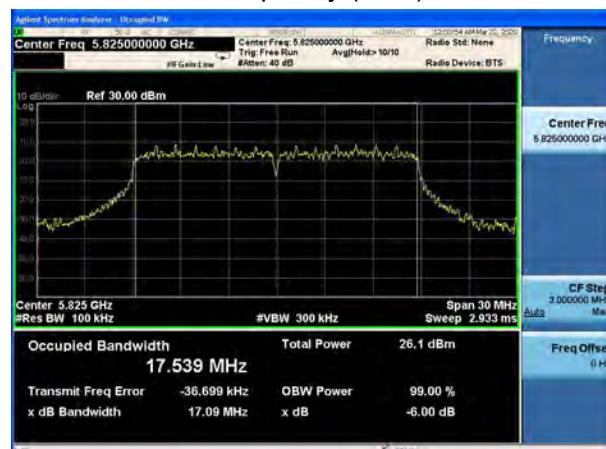


U-NII-3, 802.11ac VHT40

Carrier frequency (MHz): 5795

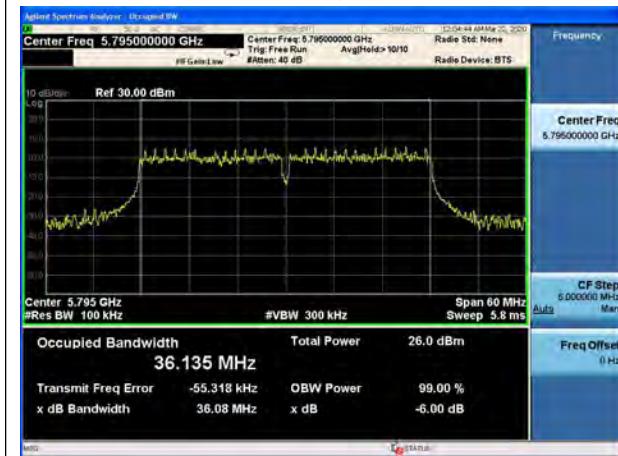

U-NII-3, 802.11ac VHT80

Carrier frequency (MHz): 5775

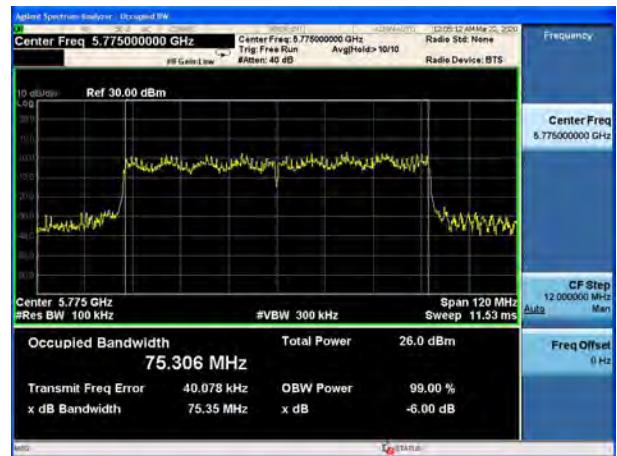

5.2. Average Power Output –Conducted

Ambient condition


| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Methods of Measurement

During the process of the testing, The EUT was connected to the average power meter through an external attenuator and a known loss cable. The EUT is max power transmission with proper modulation. We use Maximum average Conducted Output Power Level Method in KDB789033 for this test

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

Test Setup

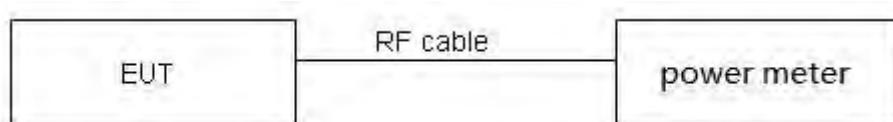

Limits

Rule FCC Part 15.407(a)(1)(2)(3)

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23



dB_i, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dB_i. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dB_i. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dB_i are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB_i.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dB_i are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB_i.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dB_i are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB_i.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

**Test Results**

| Band | T _{on} (ms) | T _(on+off) (ms) | Duty cycle | Duty cycle correction Factor(dB) |
|----------------|----------------------|----------------------------|------------|----------------------------------|
| 802.11a | 0.25 | 0.36 | 0.69 | 1.62 |
| 802.11n HT20 | 0.23 | 0.33 | 0.70 | 1.55 |
| 802.11n HT40 | 0.13 | 0.22 | 0.57 | 2.43 |
| 802.11ac VHT20 | 0.25 | 0.32 | 0.77 | 1.16 |
| 802.11ac VHT40 | 0.13 | 0.23 | 0.56 | 2.55 |
| 802.11ac VHT80 | 0.23 | 0.35 | 0.65 | 1.86 |

Note: when Duty cycle>0.98, Duty cycle correction Factor not required.

| SISO Antenna 1 Power Index | | | | | | |
|----------------------------|------|-------|-------|-------|-------|-------|
| Packet Type | CH36 | CH40 | CH48 | CH149 | CH157 | CH165 |
| 802.11a | 56 | 57 | 56 | 57 | 57 | 54 |
| 802.11n HT20 | 57 | 61 | 60 | 57 | 57 | 54 |
| 802.11ac VHT20 | 60 | 60 | 60 | 58 | 58 | 55 |
| Packet Type | CH38 | CH46 | CH151 | CH159 | / | / |
| 802.11n HT40 | 56 | 56 | 57 | 57 | / | / |
| 802.11ac VHT40 | 59 | 59 | 57 | 57 | / | / |
| Packet Type | CH42 | CH155 | / | / | / | / |
| 802.11ac VHT80 | 59 | 58 | / | / | / | / |

| SISO Antenna 2 Power Index | | | | | | |
|----------------------------|------|-------|-------|-------|-------|-------|
| Packet Type | CH36 | CH40 | CH48 | CH149 | CH157 | CH165 |
| 802.11a | 54 | 56 | 53 | 51 | 49 | 47 |
| 802.11n HT20 | 54 | 56 | 54 | 51 | 49 | 48 |
| 802.11ac VHT20 | 55 | 57 | 55 | 52 | 50 | 48 |
| Packet Type | CH38 | CH46 | CH151 | CH159 | / | / |
| 802.11n HT40 | 54 | 53 | 50 | 48 | / | / |
| 802.11ac VHT40 | 55 | 54 | 50 | 47 | / | / |
| Packet Type | CH42 | CH155 | / | / | / | / |
| 802.11ac VHT80 | 54 | 50 | / | / | / | / |



| MIMO Antenna Power Index | | | | | | |
|--------------------------|------|-------|-------|-------|-------|-------|
| Packet Type | CH36 | CH40 | CH48 | CH149 | CH157 | CH165 |
| 802.11a | 54 | 55 | 53 | 50 | 48 | 49 |
| 802.11n HT20 | 53 | 54 | 53 | 51 | 50 | 47 |
| 802.11ac VHT20 | 52 | 52 | 52 | 51 | 51 | 48 |
| Packet Type | CH38 | CH46 | CH151 | CH159 | / | / |
| 802.11n HT40 | 51 | 51 | 50 | 47 | / | / |
| 802.11ac VHT40 | 51 | 51 | 50 | 47 | / | / |
| Packet Type | CH42 | CH155 | / | / | / | / |
| 802.11ac VHT80 | 52 | 50 | / | / | / | / |



Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

SISO Antenna 1**U-NII-1**

| Network Standards | Channel/ Frequency (MHz) | Average Power Measured (dBm) | Average Power with duty factor (dBm) | Limit (dBm) | Conclusion |
|-------------------|--------------------------------|---------------------------------------|---|----------------|------------|
| 802.11a | 36/5180 | 18.15 | 19.77 | 24 | PASS |
| | 40/5200 | 18.07 | 19.69 | 24 | PASS |
| | 48/5240 | 18.12 | 19.74 | 24 | PASS |
| 802.11n HT20 | 36/5180 | 18.14 | 19.69 | 24 | PASS |
| | 40/5200 | 18.13 | 19.68 | 24 | PASS |
| | 48/5240 | 18.27 | 19.82 | 24 | PASS |
| 802.11n HT40 | 38/5190 | 17.47 | 19.90 | 24 | PASS |
| | 46/5230 | 17.32 | 19.75 | 24 | PASS |
| 802.11ac VHT20 | 36/5180 | 18.53 | 19.69 | 24 | PASS |
| | 40/5200 | 18.28 | 19.44 | 24 | PASS |
| | 48/5240 | 18.61 | 19.77 | 24 | PASS |
| 802.11ac VHT40 | 38/5190 | 17.53 | 20.08 | 24 | PASS |
| | 46/5230 | 17.29 | 19.84 | 24 | PASS |
| 802.11ac VHT80 | 42/5210 | 18.01 | 19.87 | 24 | PASS |

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor



U-NII-3

| Network Standards | Channel/ Frequency (MHz) | Average Power Measured (dBm) | Average Power with duty factor (dBm) | Limit (dBm) | Conclusion |
|-------------------|--------------------------------|------------------------------------|---|----------------|------------|
| 802.11a | 149/5745 | 18.22 | 19.84 | 30 | PASS |
| | 157/5785 | 18.33 | 19.95 | 30 | PASS |
| | 165/5825 | 18.29 | 19.91 | 30 | PASS |
| 802.11n HT20 | 149/5745 | 18.32 | 19.87 | 30 | PASS |
| | 157/5785 | 18.36 | 19.91 | 30 | PASS |
| | 165/5825 | 18.31 | 19.86 | 30 | PASS |
| 802.11n HT40 | 151/5755 | 17.54 | 19.97 | 30 | PASS |
| | 159/5795 | 17.17 | 19.60 | 30 | PASS |
| 802.11ac VHT20 | 149/5745 | 18.43 | 19.59 | 30 | PASS |
| | 157/5785 | 18.78 | 19.94 | 30 | PASS |
| | 165/5825 | 18.64 | 19.80 | 30 | PASS |
| 802.11ac VHT40 | 151/5755 | 17.42 | 19.97 | 30 | PASS |
| | 159/5795 | 17.51 | 20.06 | 30 | PASS |
| 802.11ac VHT80 | 155/5775 | 18.19 | 20.05 | 30 | PASS |

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor



SISO Antenna 2

U-NII-1

| Network Standards | Channel/ Frequency (MHz) | Average Power Measured (dBm) | Average Power with duty factor (dBm) | Limit (dBm) | Conclusion |
|-------------------|--------------------------------|---------------------------------------|---|----------------|------------|
| 802.11a | 36/5180 | 18.15 | 19.91 | 24 | PASS |
| | 40/5200 | 18.30 | 20.06 | 24 | PASS |
| | 48/5240 | 17.98 | 19.74 | 24 | PASS |
| 802.11n HT20 | 36/5180 | 18.09 | 19.64 | 24 | PASS |
| | 40/5200 | 18.34 | 19.89 | 24 | PASS |
| | 48/5240 | 18.32 | 19.87 | 24 | PASS |
| 802.11n HT40 | 38/5190 | 17.48 | 19.91 | 24 | PASS |
| | 46/5230 | 17.93 | 20.36 | 24 | PASS |
| 802.11ac VHT20 | 36/5180 | 18.42 | 19.58 | 24 | PASS |
| | 40/5200 | 18.56 | 19.72 | 24 | PASS |
| | 48/5240 | 18.67 | 19.83 | 24 | PASS |
| 802.11ac VHT40 | 38/5190 | 17.53 | 20.08 | 24 | PASS |
| | 46/5230 | 17.46 | 20.01 | 24 | PASS |
| 802.11ac VHT80 | 42/5210 | 18.05 | 19.91 | 24 | PASS |

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor



U-NII-3

| Network Standards | Channel/ Frequency (MHz) | Average Power Measured (dBm) | Average Power with duty factor (dBm) | Limit (dBm) | Conclusion |
|-------------------|--------------------------------|------------------------------------|---|----------------|------------|
| 802.11a | 149/5745 | 17.92 | 19.68 | 30 | PASS |
| | 157/5785 | 18.25 | 20.01 | 30 | PASS |
| | 165/5825 | 18.17 | 19.93 | 30 | PASS |
| 802.11n HT20 | 149/5745 | 18.07 | 19.62 | 30 | PASS |
| | 157/5785 | 18.13 | 19.68 | 30 | PASS |
| | 165/5825 | 18.54 | 20.09 | 30 | PASS |
| 802.11n HT40 | 151/5755 | 17.40 | 19.83 | 30 | PASS |
| | 159/5795 | 17.71 | 20.14 | 30 | PASS |
| 802.11ac VHT20 | 149/5745 | 18.55 | 19.71 | 30 | PASS |
| | 157/5785 | 18.63 | 19.79 | 30 | PASS |
| | 165/5825 | 18.72 | 19.88 | 30 | PASS |
| 802.11ac VHT40 | 151/5755 | 17.47 | 20.02 | 30 | PASS |
| | 159/5795 | 17.53 | 20.08 | 30 | PASS |
| 802.11ac VHT80 | 155/5775 | 18.16 | 20.02 | 30 | PASS |

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor



MIMO

U-NII-1

| Network Standards | Channel/ Frequency (MHz) | MIMO Antenna 1 | | MIMO Antenna 2 | | Total Power (dBm) | Limit (dBm) | Conclusion |
|--------------------|--------------------------|------------------------------|--------------------------------------|------------------------------|--------------------------------------|-------------------|-------------|------------|
| | | Average Power Measured (dBm) | Average Power with duty factor (dBm) | Average Power Measured (dBm) | Average Power with duty factor (dBm) | | | |
| U-NII-1 802.11a | 36/5180 | 15.08 | 16.84 | 15.48 | 17.24 | 20.06 | 24.00 | PASS |
| | 44/5220 | 15.25 | 17.01 | 15.25 | 17.01 | 20.02 | 24.00 | PASS |
| | 48/5240 | 15.37 | 17.13 | 15.11 | 16.87 | 20.01 | 24.00 | PASS |
| 802.11n HT20 | 36/5180 | 15.13 | 16.68 | 15.35 | 16.90 | 19.80 | 24.00 | PASS |
| | 44/5220 | 14.97 | 16.52 | 15.16 | 16.71 | 19.63 | 24.00 | PASS |
| | 48/5240 | 15.21 | 16.76 | 15.48 | 17.03 | 19.91 | 24.00 | PASS |
| 802.11n HT40 | 38/5190 | 14.25 | 16.68 | 14.55 | 16.98 | 19.84 | 24.00 | PASS |
| | 46/5230 | 14.76 | 17.19 | 14.80 | 17.23 | 20.22 | 24.00 | PASS |
| 802.11ac VHT20 | 36/5180 | 15.54 | 16.70 | 14.76 | 15.92 | 19.34 | 24.00 | PASS |
| | 44/5220 | 15.02 | 16.18 | 15.03 | 16.19 | 19.20 | 24.00 | PASS |
| | 48/5240 | 15.62 | 16.78 | 15.75 | 16.91 | 19.86 | 24.00 | PASS |
| 802.11ac VHT40 | 38/5190 | 14.32 | 16.87 | 14.46 | 17.01 | 19.95 | 24.00 | PASS |
| | 46/5230 | 14.65 | 17.20 | 14.63 | 17.18 | 20.20 | 24.00 | PASS |
| 802.11ac VHT80 | 42/5210 | 15.05 | 16.91 | 15.27 | 17.13 | 20.03 | 24.00 | PASS |

Note: 1. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),

The Total Power = $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$.

2. The manufacturer declared the transmitter output signals is CDD mode And $N_{ss}=1$. According to KDB 662911 D01

Multiple Transmitter Output v02r01 2)f(i): If all antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$,

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{ss})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

So directional gain = $G_{ANT} + \text{Array Gain} < 6\text{dBi}$. So the power limit is 24dBm.



U-NII-3

| Network Standards | Channel/ Frequency (MHz) | MIMO Antenna 1 | | MIMO Antenna 2 | | Total Power (dBm) | Limit (dBm) | Conclusion |
|--------------------|--------------------------|------------------------------|--------------------------------------|------------------------------|--------------------------------------|-------------------|-------------|------------|
| | | Average Power Measured (dBm) | Average Power with duty factor (dBm) | Average Power Measured (dBm) | Average Power with duty factor (dBm) | | | |
| U-NII-1 802.11a | 149/5745 | 13.86 | 15.62 | 15.14 | 16.90 | 19.32 | 30.00 | PASS |
| | 157/5785 | 12.63 | 14.39 | 15.85 | 17.61 | 19.30 | 30.00 | PASS |
| | 165/5825 | 15.12 | 16.88 | 15.23 | 16.99 | 19.95 | 30.00 | PASS |
| 802.11n HT20 | 149/5745 | 14.57 | 16.12 | 15.46 | 17.01 | 19.60 | 30.00 | PASS |
| | 157/5785 | 14.80 | 16.35 | 15.86 | 17.41 | 19.93 | 30.00 | PASS |
| | 165/5825 | 14.37 | 15.92 | 15.63 | 17.18 | 19.61 | 30.00 | PASS |
| 802.11n HT40 | 151/5755 | 14.27 | 16.70 | 14.86 | 17.29 | 20.02 | 30.00 | PASS |
| | 159/5795 | 14.05 | 16.48 | 14.54 | 16.97 | 19.74 | 30.00 | PASS |
| 802.11ac VHT20 | 149/5745 | 14.66 | 15.82 | 15.47 | 16.63 | 19.26 | 30.00 | PASS |
| | 157/5785 | 14.87 | 16.03 | 15.65 | 16.81 | 19.45 | 30.00 | PASS |
| | 165/5825 | 14.96 | 16.12 | 15.53 | 16.69 | 19.43 | 30.00 | PASS |
| 802.11ac VHT40 | 151/5755 | 14.14 | 16.69 | 14.79 | 17.34 | 20.03 | 30.00 | PASS |
| | 159/5795 | 14.12 | 16.67 | 14.46 | 17.01 | 19.85 | 30.00 | PASS |
| 802.11ac VHT80 | 155/5775 | 15.06 | 16.92 | 15.48 | 17.34 | 20.15 | 30.00 | PASS |

Note: 1. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),
The Total Power = $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$.
2. The manufacturer declared the transmitter output signals is CDD mode And $N_{ss}=1$. According to KDB 662911 D01 Multiple Transmitter Output v02r01 2)f)(i): If all antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$, For power measurements on IEEE 802.11 devices,
Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;
Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;
Array Gain = $5 \log(N_{ANT}/N_{ss})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.
So directional gain = $G_{ANT} + \text{Array Gain} < 6\text{dBi}$. So the power limit is 30dBm.

5.3. Frequency Stability

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

1. Frequency stability with respect to ambient temperature

- a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.
- b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.
- c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.
- e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- g) Measure the frequency at each of frequencies specified in 5.6.
- h) Switch OFF the EUT but do not switch OFF the oscillator heater.
- i) Lower the chamber temperature by not more than 10°C, and allow the temperature inside the chamber to stabilize.
- j) Repeat step f) through step i) down to the lowest specified temperature.

2. Frequency stability when varying supply voltage

Unless otherwise specified, these tests shall be made at ambient room temperature (+15°C to +25 °C). An antenna shall be connected to the antenna output terminals of the EUT if possible. If the EUT is equipped with or uses an adjustable-length antenna, then it shall be fully extended.

- a) Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency-measuring instrument.



- b) Tune the EUT to one of the number of frequencies required in 5.6. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- c) Measure the frequency at each of the frequencies specified in 5.6.
- d) Repeat the above procedure at 85% and 115% of the nominal supply voltage.

Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936\text{Hz}$

**Test Results**

| Voltage (V) | Temperature (°C) | U-NII-1 Test Results | | | |
|----------------|---------------------|----------------------|-------------|-------------|-------------|
| | | 5200MHz | | | |
| | | 1min | 2min | 5min | 10min |
| 12 | -40 | 5199.999661 | 5199.992322 | 5199.985429 | 5199.976474 |
| 12 | -20 | 5199.995526 | 5199.983314 | 5199.979078 | 5199.968531 |
| 12 | 0 | 5199.988963 | 5199.983032 | 5199.972706 | 5199.964472 |
| 12 | 10 | 5199.980543 | 5199.981123 | 5199.971862 | 5199.956269 |
| 12 | 20 | 5199.972905 | 5199.972469 | 5199.966377 | 5199.946795 |
| 12 | 30 | 5199.966181 | 5199.963360 | 5199.961779 | 5199.944632 |
| 12 | 60 | 5199.963099 | 5199.957231 | 5199.957880 | 5199.941140 |
| 12 | 70 | 5199.963070 | 5199.954084 | 5199.955171 | 5199.932550 |
| 9 | 25 | 5199.957644 | 5199.950447 | 5199.954376 | 5199.930161 |
| 14 | 25 | 5199.952524 | 5199.947932 | 5199.946765 | 5199.929105 |
| MHz | | -0.047476 | -0.052068 | -0.053235 | -0.070895 |
| PPM | | -9.130003 | -10.013069 | -10.237487 | -13.633605 |

| Voltage (V) | Temperature (°C) | U-NII-3 Test Results | | | |
|----------------|---------------------|----------------------|-------------|-------------|-------------|
| | | 5785MHz | | | |
| | | 1min | 2min | 5min | 10min |
| 12 | -40 | 5784.993036 | 5784.992081 | 5784.987447 | 5784.982242 |
| 12 | -20 | 5784.984174 | 5784.982447 | 5784.980746 | 5784.973054 |
| 12 | 0 | 5784.976541 | 5784.976071 | 5784.979033 | 5784.965478 |
| 12 | 10 | 5784.969068 | 5784.966677 | 5784.971262 | 5784.961313 |
| 12 | 20 | 5784.959705 | 5784.963798 | 5784.968947 | 5784.956797 |
| 12 | 30 | 5784.951246 | 5784.954625 | 5784.961439 | 5784.953280 |
| 12 | 60 | 5784.945581 | 5784.952341 | 5784.954618 | 5784.949587 |
| 12 | 70 | 5784.936860 | 5784.945033 | 5784.954479 | 5784.945911 |
| 9 | 25 | 5784.931278 | 5784.944834 | 5784.946948 | 5784.941005 |
| 14 | 25 | 5784.923877 | 5784.937084 | 5784.944945 | 5784.931231 |
| MHz | | -0.076123 | -0.062916 | -0.055055 | -0.068769 |
| PPM | | -13.158687 | -10.875783 | -9.516913 | -11.887390 |

5.4. Power Spectral Density

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement


The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.

Set RBW = 500 kHz, VBW =1.5MHz for the band 5.725-5.85 GHz

Set RBW = 1 MHz, VBW =3MHz for the band 5.150-5.250 GHz

The conducted PSD is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

Test setup



Limits

Rule FCC Part 15.407(a)(1)/ Part 15.407(a)(2) / Part 15.407(a)(3)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

| Frequency Bands/MHz | Limits |
|---------------------|-----------|
| 5150-5250 | 11dBm/MHz |



| | |
|-----------|--------------|
| 5725-5850 | 30dBm/500kHz |
|-----------|--------------|

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

**Test Results:**

Note: Power Spectral Density =Read Value+Duty cycle correction factor

SISO Antenna 1**U-NII-1**

| Network Standards | Channel Number | Read Value (dBm /MHz) | Power Spectral Density (dBm /MHz) | Limit (dBm /MHz) | Conclusion |
|-------------------|----------------|-----------------------|-----------------------------------|------------------|------------|
| 802.11a | 36 | 6.112 | 7.73 | 11 | PASS |
| | 40 | 5.741 | 7.36 | 11 | PASS |
| | 48 | 6.355 | 7.97 | 11 | PASS |
| 802.11n HT20 | 36 | 5.586 | 7.14 | 11 | PASS |
| | 40 | 6.851 | 8.40 | 11 | PASS |
| | 48 | 7.365 | 8.92 | 11 | PASS |
| 802.11n HT40 | 38 | 3.210 | 5.64 | 11 | PASS |
| | 46 | 4.296 | 6.73 | 11 | PASS |
| 802.11ac VHT20 | 36 | 8.604 | 9.76 | 11 | PASS |
| | 40 | 8.537 | 9.70 | 11 | PASS |
| | 48 | 9.436 | 10.60 | 11 | PASS |
| 802.11ac VHT40 | 38 | 4.736 | 7.28 | 11 | PASS |
| | 46 | 5.584 | 8.13 | 11 | PASS |
| 802.11ac VHT80 | 42 | 3.782 | 5.64 | 11 | PASS |



U-NII-3

| Network Standards | Channel Number | Read Value (dBm/500kHz) | Power Spectral Density (dBm/500kHz) | Limit (dBm/500kHz) | Conclusion |
|-------------------|----------------|-------------------------|-------------------------------------|--------------------|------------|
| 802.11a | 149 | 5.216 | 6.83 | 30 | PASS |
| | 157 | 3.669 | 5.29 | 30 | PASS |
| | 165 | 2.801 | 4.42 | 30 | PASS |
| 802.11n HT20 | 149 | 5.208 | 6.76 | 30 | PASS |
| | 157 | 5.171 | 6.72 | 30 | PASS |
| | 165 | 4.993 | 6.55 | 30 | PASS |
| 802.11n HT40 | 151 | 2.026 | 4.46 | 30 | PASS |
| | 159 | 2.028 | 4.46 | 30 | PASS |
| 802.11ac VHT20 | 149 | 5.643 | 6.80 | 30 | PASS |
| | 157 | 5.476 | 6.64 | 30 | PASS |
| | 165 | 5.351 | 6.51 | 30 | PASS |
| 802.11ac VHT40 | 151 | 2.459 | 5.00 | 30 | PASS |
| | 159 | 3.049 | 5.59 | 30 | PASS |
| 802.11ac VHT80 | 155 | 0.414 | 2.28 | 30 | PASS |



SISO Antenna 2

U-NII-1

| Network Standards | Channel Number | Read Value (dBm /MHz) | Power Spectral Density (dBm /MHz) | Limit (dBm /MHz) | Conclusion |
|-------------------|----------------|-----------------------|-----------------------------------|------------------|------------|
| 802.11a | 36 | 6.174 | 7.93 | 11 | PASS |
| | 40 | 6.998 | 8.76 | 11 | PASS |
| | 48 | 5.982 | 7.74 | 11 | PASS |
| 802.11n HT20 | 36 | 5.819 | 7.37 | 11 | PASS |
| | 40 | 6.665 | 8.22 | 11 | PASS |
| | 48 | 6.766 | 8.32 | 11 | PASS |
| 802.11n HT40 | 38 | 2.270 | 4.70 | 11 | PASS |
| | 46 | 3.165 | 5.60 | 11 | PASS |
| 802.11ac VHT20 | 36 | 6.535 | 7.70 | 11 | PASS |
| | 40 | 6.475 | 7.64 | 11 | PASS |
| | 48 | 6.924 | 8.08 | 11 | PASS |
| 802.11ac VHT40 | 38 | 3.384 | 5.93 | 11 | PASS |
| | 46 | 3.428 | 5.97 | 11 | PASS |
| 802.11ac VHT80 | 42 | 1.103 | 2.96 | 11 | PASS |



U-NII-3

| Network Standards | Channel Number | Read Value (dBm/500kHz) | Power Spectral Density (dBm/500kHz) | Limit (dBm/500kHz) | Conclusion |
|-------------------|----------------|-------------------------|-------------------------------------|--------------------|------------|
| 802.11a | 149 | 2.712 | 4.47 | 30 | PASS |
| | 157 | 3.115 | 4.88 | 30 | PASS |
| | 165 | 3.366 | 5.13 | 30 | PASS |
| 802.11n HT20 | 149 | 3.169 | 4.72 | 30 | PASS |
| | 157 | 3.259 | 4.81 | 30 | PASS |
| | 165 | 4.040 | 5.59 | 30 | PASS |
| 802.11n HT40 | 151 | 0.539 | 2.97 | 30 | PASS |
| | 159 | 0.344 | 2.77 | 30 | PASS |
| 802.11ac VHT20 | 149 | 3.368 | 4.53 | 30 | PASS |
| | 157 | 4.840 | 6.00 | 30 | PASS |
| | 165 | 3.604 | 4.76 | 30 | PASS |
| 802.11ac VHT40 | 151 | 0.178 | 2.72 | 30 | PASS |
| | 159 | -0.298 | 2.25 | 30 | PASS |
| 802.11ac VHT80 | 155 | -0.992 | 0.87 | 30 | PASS |



MIMO

U-NII-1

| Network Standards | Channel/ Frequency (MHz) | Power Spectral Density | | | | Total Power (dBm /MHz) | Limit (dBm /MHz) | Conclusion | | | |
|-------------------|--------------------------|------------------------|----------------|----------------------|----------------|------------------------|------------------|------------|--|--|--|
| | | Antenna 1 | | Antenna 2 | | | | | | | |
| | | Read Value (dBm/MHz) | PSD (dBm /MHz) | Read Value (dBm/MHz) | PSD (dBm /MHz) | | | | | | |
| 802.11a | 36/5180 | 5.42 | 7.18 | 5.30 | 7.06 | 10.13 | 11.00 | PASS | | | |
| | 40/5200 | 5.31 | 7.07 | 5.07 | 6.83 | 9.96 | 11.00 | PASS | | | |
| | 48/5240 | 5.78 | 7.54 | 5.03 | 6.79 | 10.19 | 11.00 | PASS | | | |
| 802.11n HT20 | 36/5180 | 3.64 | 5.19 | 3.83 | 5.38 | 8.30 | 11.00 | PASS | | | |
| | 40/5200 | 4.27 | 5.82 | 4.06 | 5.61 | 8.73 | 11.00 | PASS | | | |
| | 48/5240 | 4.74 | 6.29 | 4.74 | 6.29 | 9.30 | 11.00 | PASS | | | |
| 802.11n HT40 | 38/5190 | -0.13 | 2.31 | -0.18 | 2.25 | 5.29 | 11.00 | PASS | | | |
| | 46/5230 | 0.25 | 2.68 | 0.33 | 2.76 | 5.73 | 11.00 | PASS | | | |
| 802.11ac VHT20 | 36/5180 | 3.74 | 4.90 | 3.87 | 5.03 | 7.97 | 11.00 | PASS | | | |
| | 40/5200 | 3.21 | 4.37 | 3.63 | 4.79 | 7.59 | 11.00 | PASS | | | |
| | 48/5240 | 4.90 | 6.06 | 4.44 | 5.60 | 8.85 | 11.00 | PASS | | | |
| 802.11ac VHT40 | 38/5190 | -0.35 | 2.19 | 0.48 | 3.02 | 5.64 | 11.00 | PASS | | | |
| | 46/5230 | 1.01 | 3.55 | 0.66 | 3.21 | 6.39 | 11.00 | PASS | | | |
| 802.11ac VHT80 | 42/5210 | -0.57 | 1.29 | -0.80 | 1.07 | 4.19 | 11.00 | PASS | | | |

Note: 1. Power Spectral Density =Read Value+Duty cycle correction factor
2. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a),the power spectral density= $10\log(10^{(\text{PSD antenna1 in dBm}/10)}+10^{(\text{PSD antenna2 in dBm}/10)})$
3. The manufacturer declared the transmitter output signals is CDD mode And Nss=1. According to KDB 662911 D01 Multiple Transmitter Output v02r01 2)f)(i): If all antennas have the same gain, Directional gain = GANT + Array Gain, For PSD measurements on all devices,Array Gain= $10\log(N_{\text{ant}}/\text{Nss})$ dB,so directional gain=GANT+Array Gain<6 dBi. So the PSD limit is 11dBm.



| Network Standards | Channel/Frequency (MHz) | Power Spectral Density | | | | | Limit (dBm /MHz) | Conclusion | | |
|-------------------|-------------------------|------------------------|----------------|----------------------|----------------|------------------------|------------------|------------|--|--|
| | | Antenna 1 | | Antenna 2 | | Total Power (dBm /MHz) | | | | |
| | | Read Value (dBm/MHz) | PSD (dBm /MHz) | Read Value (dBm/MHz) | PSD (dBm /MHz) | | | | | |
| 802.11a | 149/5745 | 0.74 | 2.50 | 1.64 | 3.40 | 5.98 | 30.00 | PASS | | |
| | 157/5785 | 0.50 | 2.26 | 1.12 | 2.88 | 5.59 | 30.00 | PASS | | |
| | 165/5825 | 1.21 | 2.97 | 2.16 | 3.92 | 6.48 | 30.00 | PASS | | |
| 802.11n HT20 | 149/5745 | 1.02 | 2.57 | 1.39 | 2.94 | 5.77 | 30.00 | PASS | | |
| | 157/5785 | 1.15 | 2.71 | 1.91 | 3.46 | 6.11 | 30.00 | PASS | | |
| | 165/5825 | 0.70 | 2.25 | 2.81 | 4.36 | 6.45 | 30.00 | PASS | | |
| 802.11n HT40 | 151/5755 | -2.40 | 0.03 | -2.01 | 0.42 | 3.24 | 30.00 | PASS | | |
| | 159/5795 | -2.07 | 0.36 | -1.28 | 1.15 | 3.79 | 30.00 | PASS | | |
| 802.11ac VHT20 | 149/5745 | 1.72 | 2.88 | 1.37 | 2.53 | 5.72 | 30.00 | PASS | | |
| | 157/5785 | 2.18 | 3.34 | 2.23 | 3.39 | 6.37 | 30.00 | PASS | | |
| | 165/5825 | 1.43 | 2.59 | 1.11 | 2.27 | 5.45 | 30.00 | PASS | | |
| 802.11ac VHT40 | 151/5755 | -2.00 | 0.54 | -1.51 | 1.03 | 3.81 | 30.00 | PASS | | |
| | 159/5795 | -0.67 | 1.88 | -1.46 | 1.09 | 4.51 | 30.00 | PASS | | |
| 802.11ac VHT80 | 155/5775 | -3.61 | -1.75 | -2.02 | -0.15 | 2.13 | 30.00 | PASS | | |

Note: 1. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),
The Total Power = $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$.
2. The manufacturer declared the transmitter output signals is CDD mode And NSS=1. According to KDB 662911 D01 Multiple Transmitter Output v02r01 2)f)(i): If all antennas have the same gain, Directional gain = GANT + Array Gain, For PSD measurements on all devices, Array Gain= $10\log(N_{\text{ant}}/\text{NSS})$ dB, so directional gain=GANT+ Array Gain<6 dBi. So the PSD limit is 30dBm.



SISO Antenna 1

U-NII-1, 802.11a, Channel No.: 36



U-NII-1, 802.11n HT20, Channel No.: 36



U-NII-1, 802.11a, Channel No.: 40



U-NII-1, 802.11n HT20, Channel No.: 40



U-NII-1, 802.11a, Channel No.: 48




U-NII-1, 802.11n HT20, Channel No.: 48



U-NII-1, 802.11n HT40, Channel No.: 38



U-NII-1, 802.11ac VHT20, Channel No.: 36

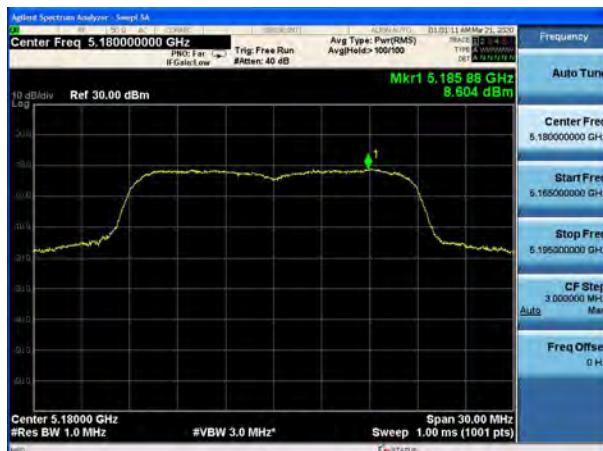

U-NII-1, 802.11n HT40, Channel No.: 46



U-NII-1, 802.11ac VHT20, Channel No.: 40




U-NII-1, 802.11ac VHT40, Channel No.: 38




U-NII-1, 802.11ac VHT20, Channel No.: 48



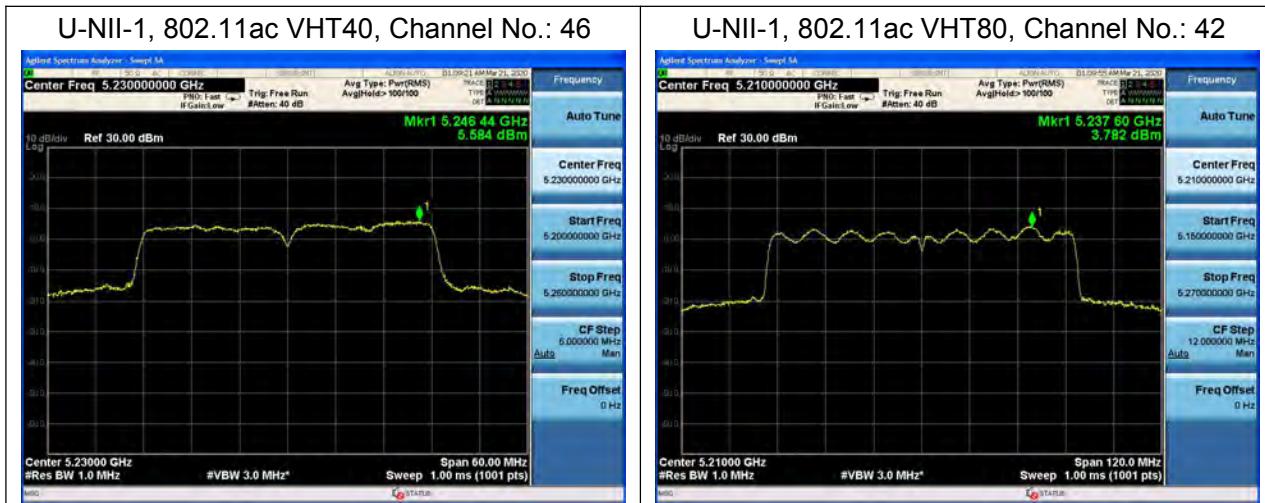





U-NII-3, 802.11a, Channel No.: 149

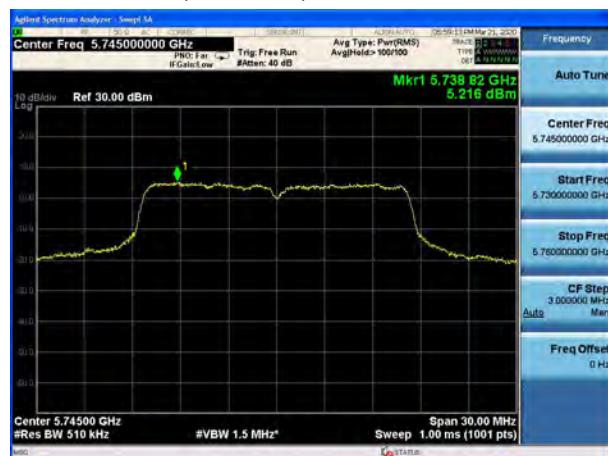


U-NII-3, 802.11n HT20, Channel No.: 149

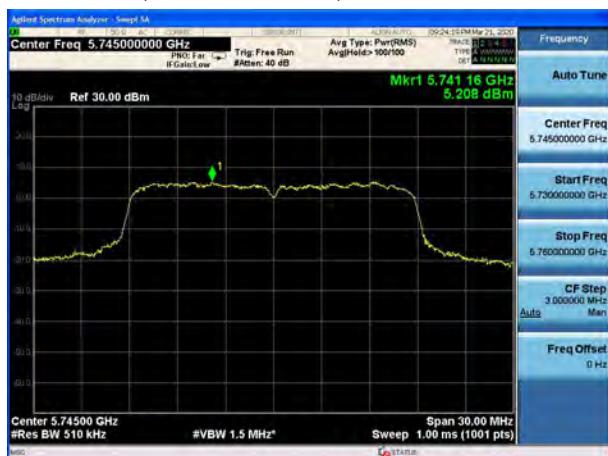


U-NII-3, 802.11a, Channel No.: 157

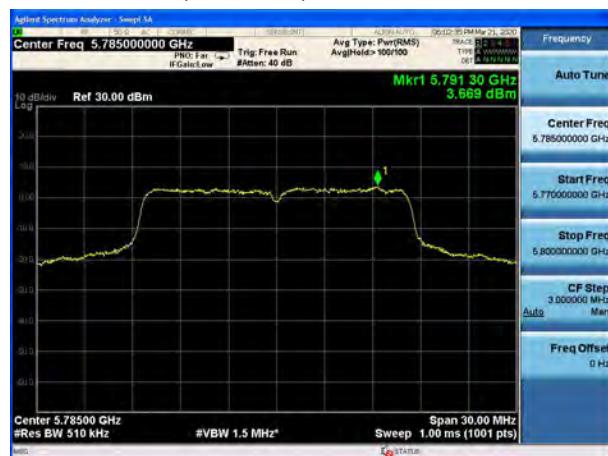


U-NII-3, 802.11n HT20, Channel No.: 157

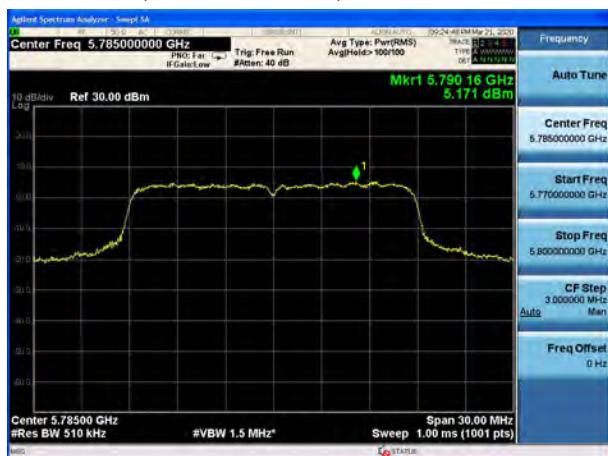

U-NII-3, 802.11a, Channel No.: 165

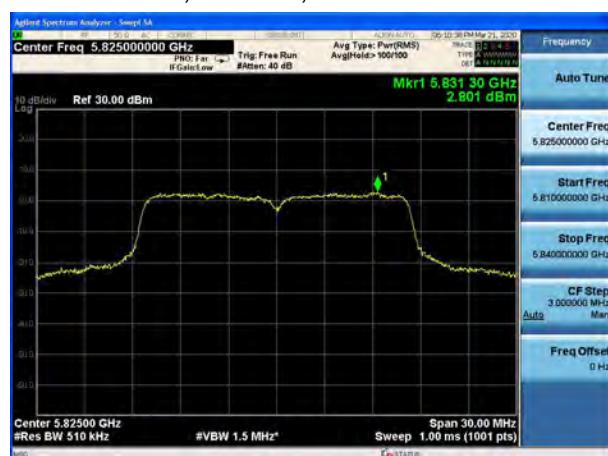

U-NII-3, 802.11n HT20, Channel No.: 165

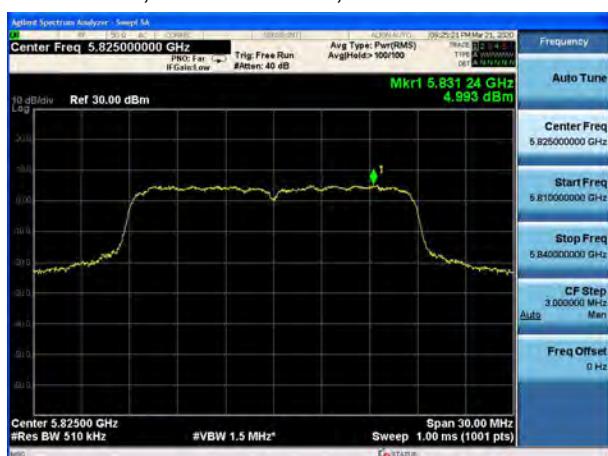



U-NII-3, 802.11n HT40, Channel No.: 151



U-NII-3, 802.11ac VHT20, Channel No.: 149




U-NII-3, 802.11n HT40, Channel No.: 159




U-NII-3, 802.11ac VHT20, Channel No.: 157




U-NII-3, 802.11ac VHT40, Channel No.: 151

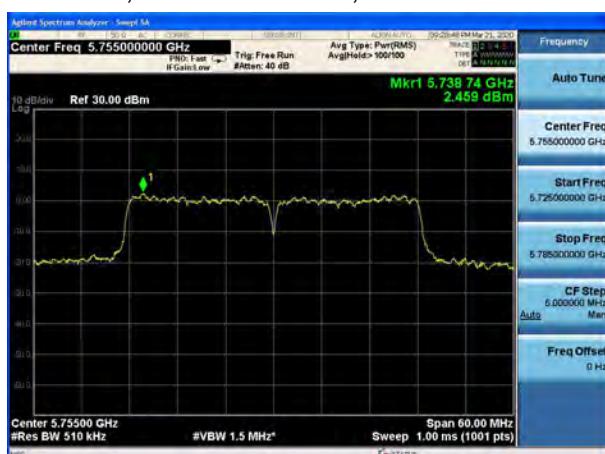

U-NII-3, 802.11ac VHT20, Channel No.: 165

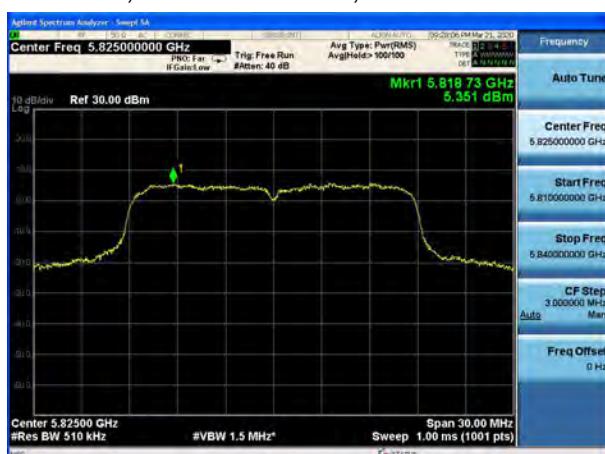

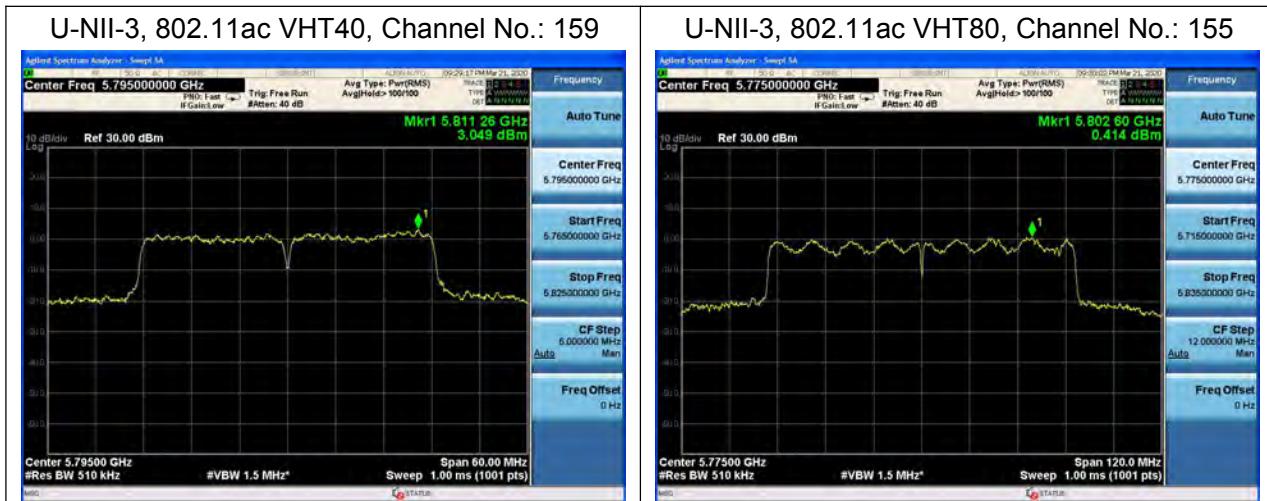




SISO Antenna 2

U-NII-1, 802.11a, Channel No.: 36



U-NII-1, 802.11n HT20, Channel No.: 36

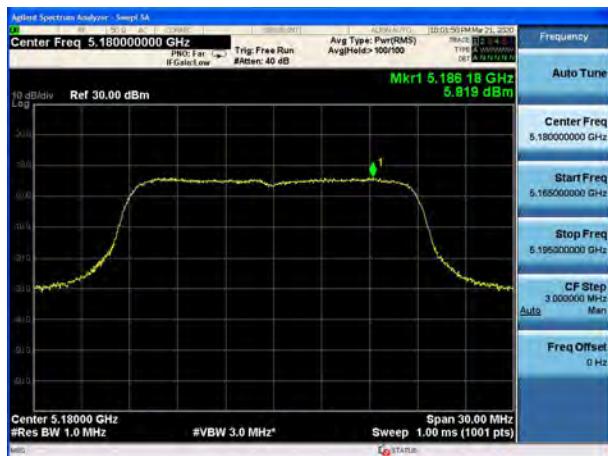

U-NII-1, 802.11a, Channel No.: 40




U-NII-1, 802.11n HT20, Channel No.: 40



U-NII-1, 802.11a, Channel No.: 48




U-NII-1, 802.11n HT20, Channel No.: 48

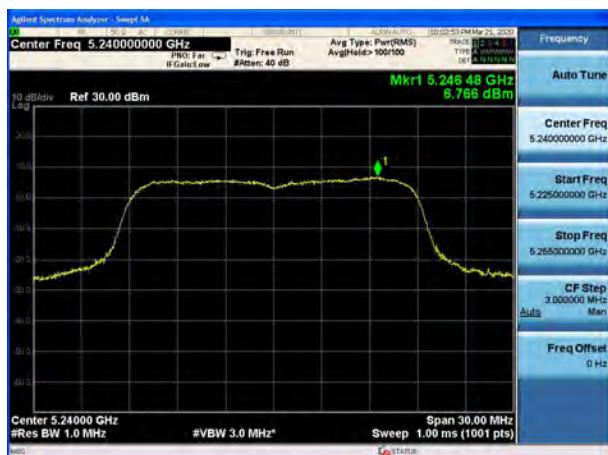

U-NII-1, 802.11n HT40, Channel No.: 38



U-NII-1, 802.11ac VHT20, Channel No.: 36

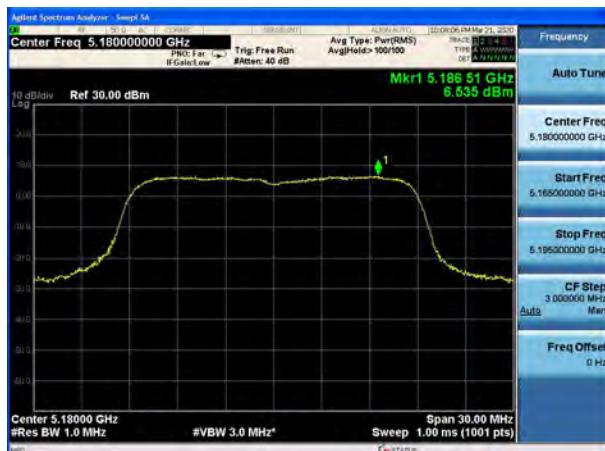

U-NII-1, 802.11n HT40, Channel No.: 46



U-NII-1, 802.11ac VHT20, Channel No.: 40



U-NII-1, 802.11ac VHT40, Channel No.: 38




U-NII-1, 802.11ac VHT20, Channel No.: 48



U-NII-1, 802.11ac VHT40, Channel No.: 46




U-NII-1, 802.11ac VHT80, Channel No.: 42

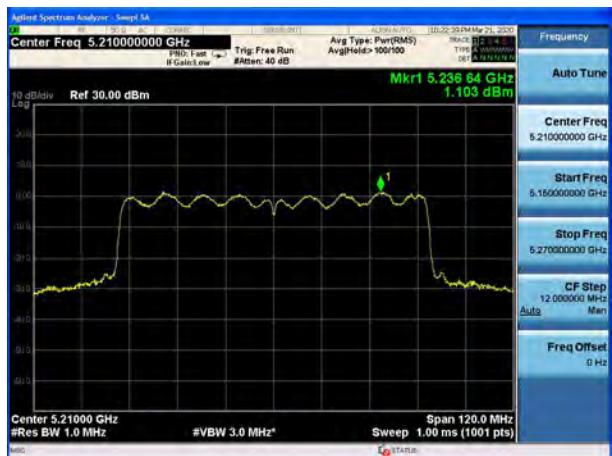





U-NII-3, 802.11a, Channel No.: 149

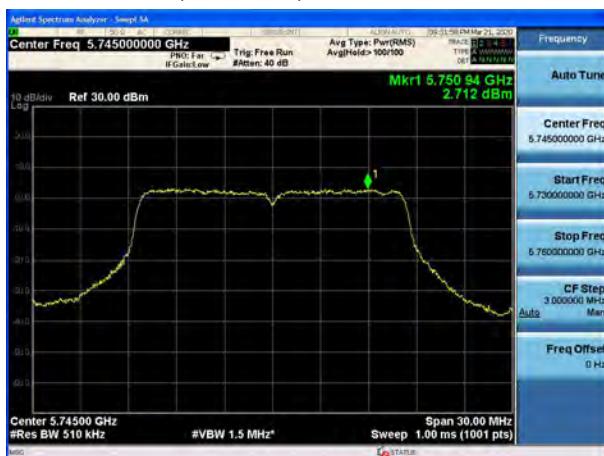


U-NII-3, 802.11n HT20, Channel No.: 149

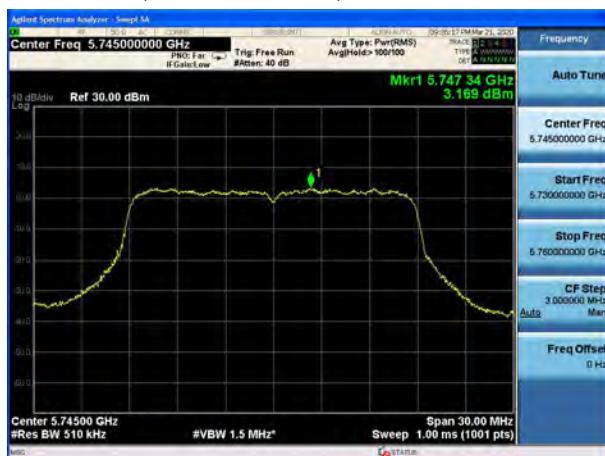


U-NII-3, 802.11a, Channel No.: 157

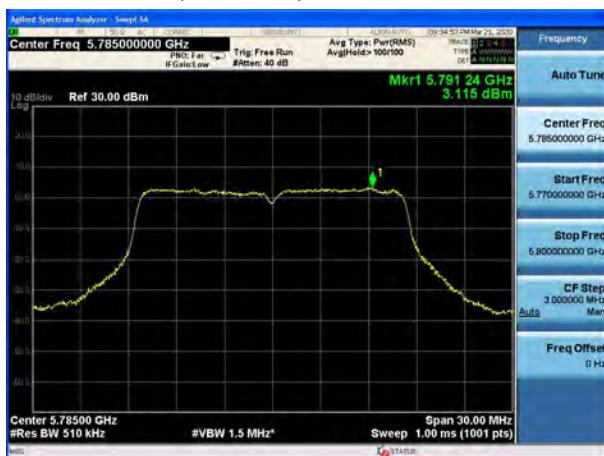


U-NII-3, 802.11n HT20, Channel No.: 157

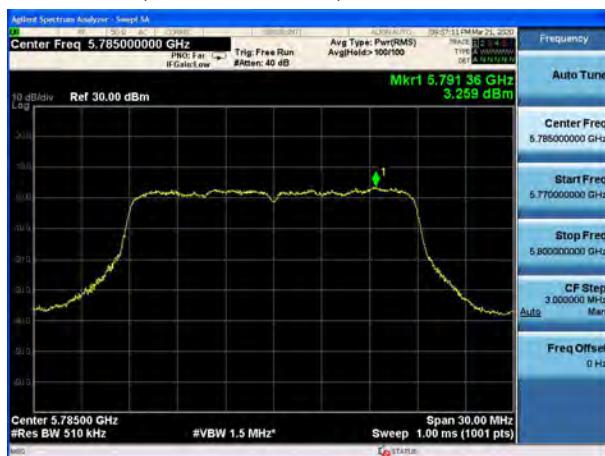


U-NII-3, 802.11a, Channel No.: 165

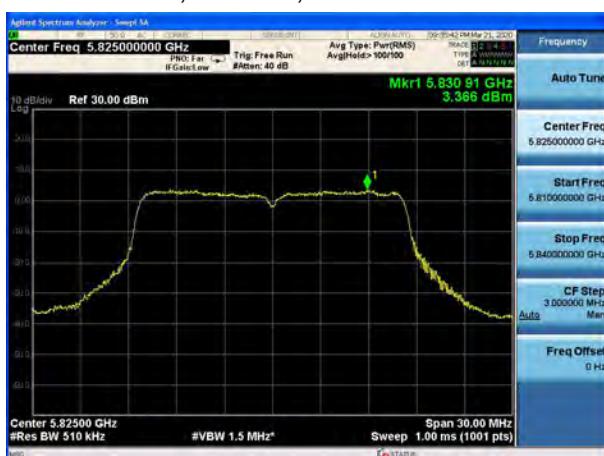

U-NII-3, 802.11n HT20, Channel No.: 165

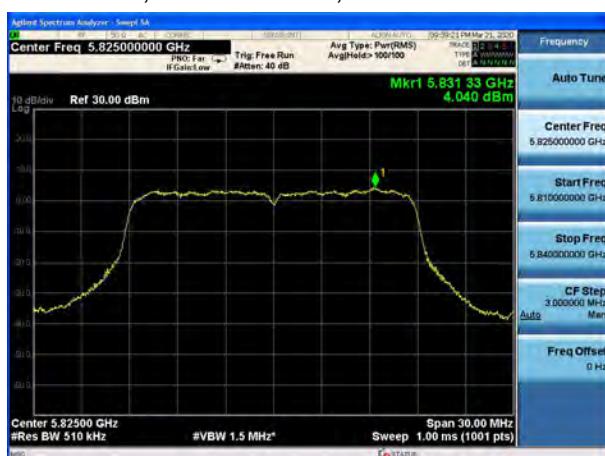


U-NII-3, 802.11n HT40, Channel No.: 151

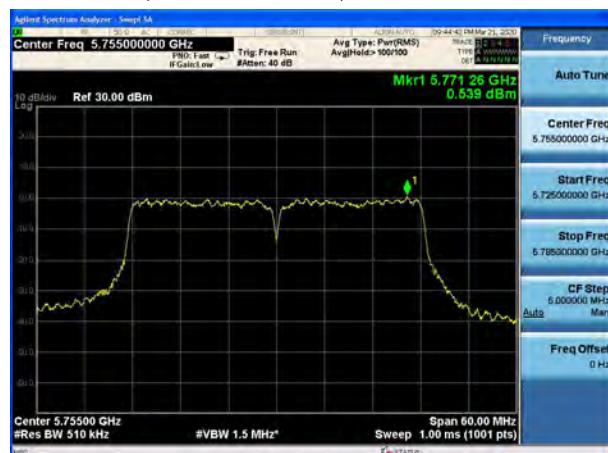

U-NII-3, 802.11ac VHT20, Channel No.: 149



U-NII-3, 802.11n HT40, Channel No.: 159

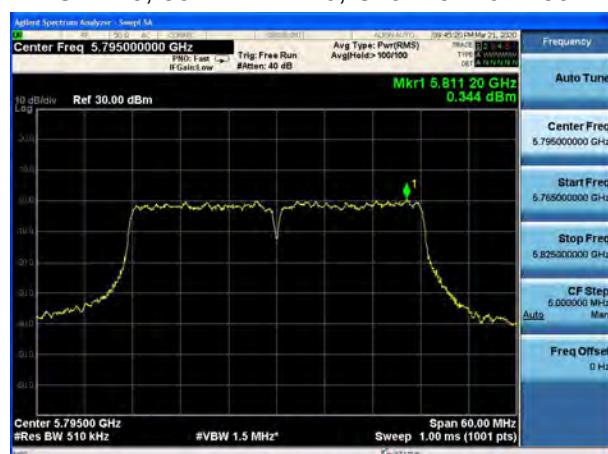

U-NII-3, 802.11ac VHT20, Channel No.: 157




U-NII-3, 802.11ac VHT40, Channel No.: 151









U-NII-3, 802.11ac VHT20, Channel No.: 165




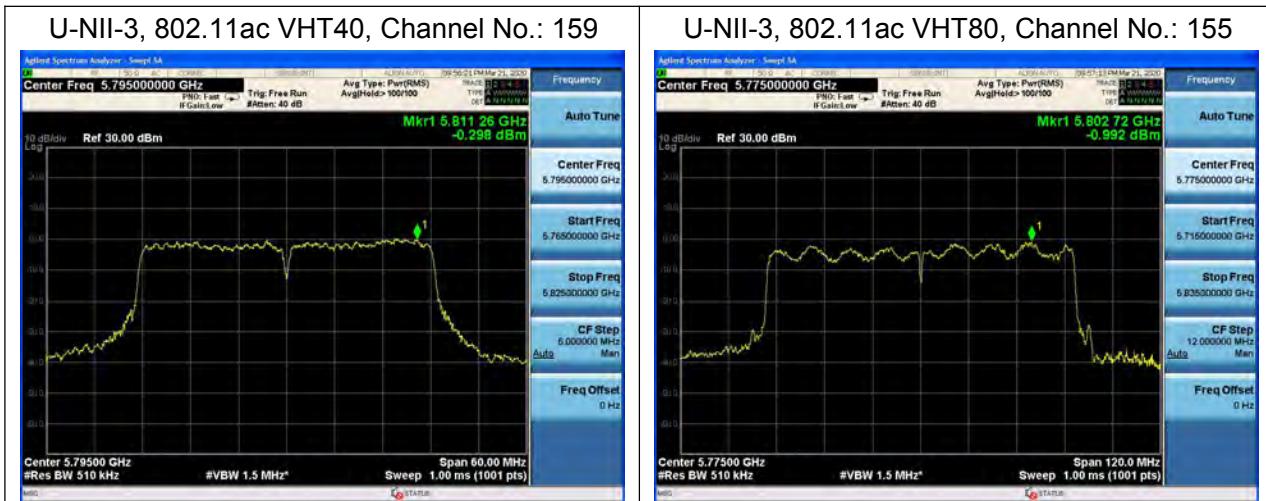

MIMO Antenna 1

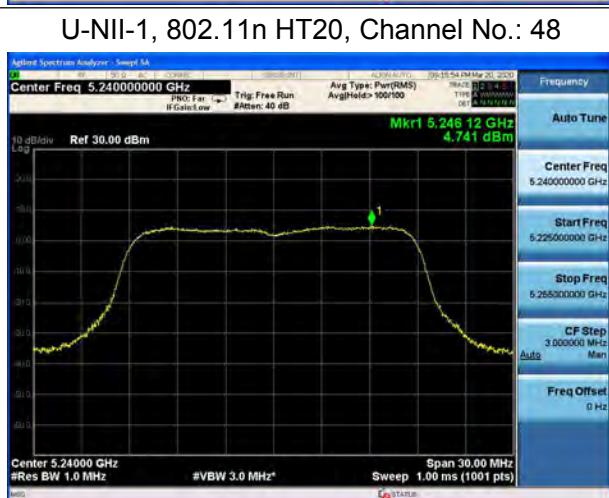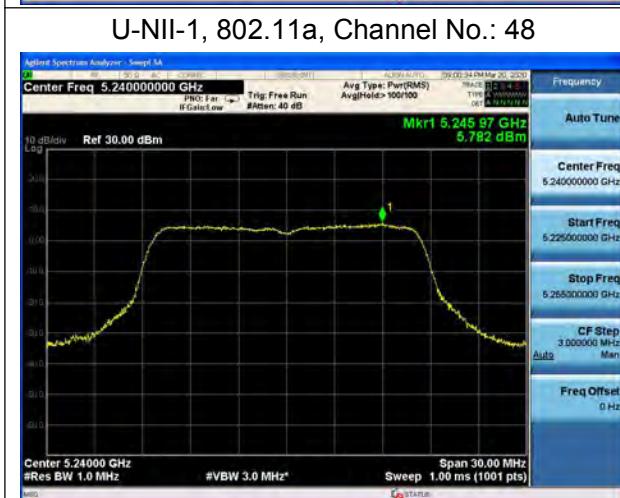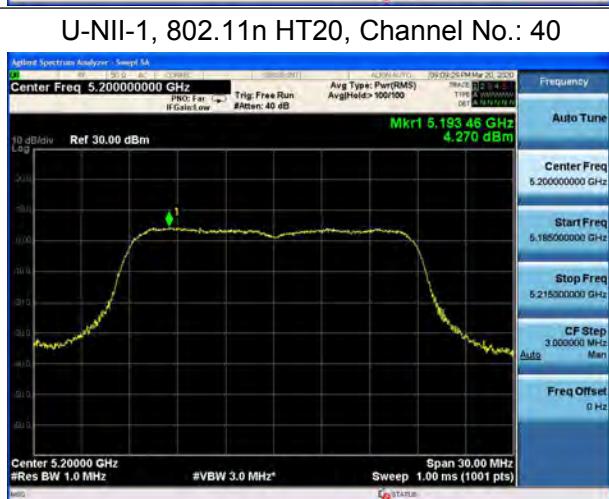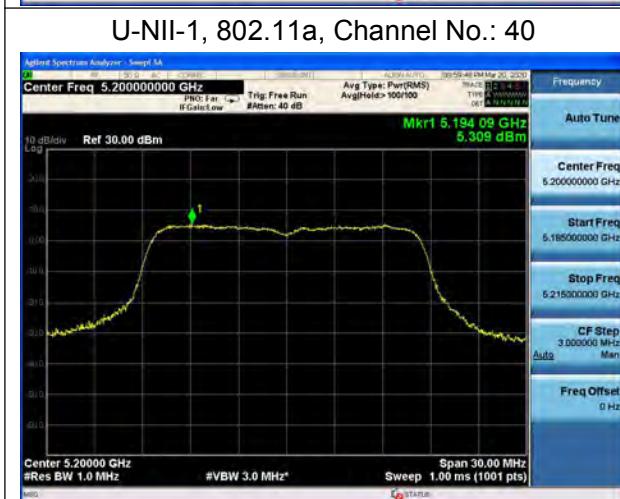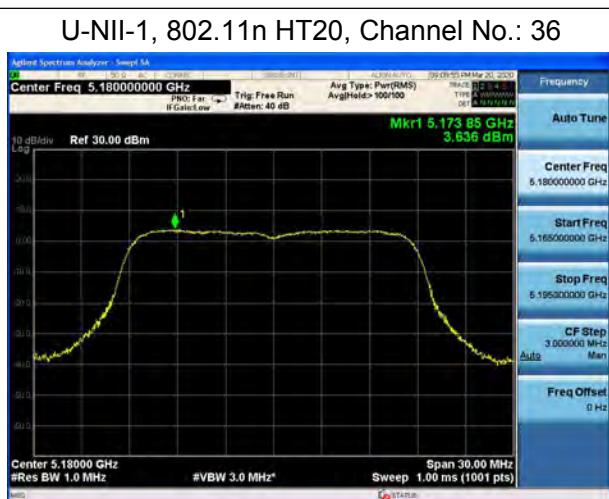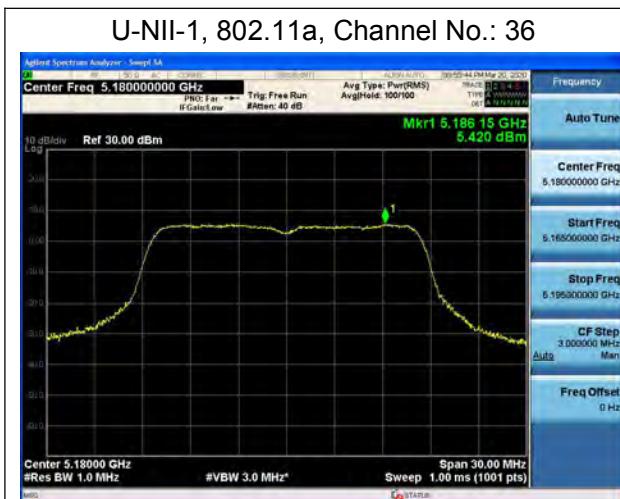


U-NII-1, 802.11n HT40, Channel No.: 38

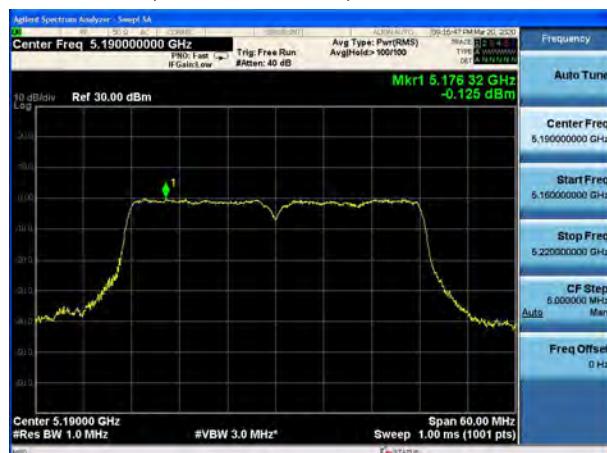

U-NII-1, 802.11ac VHT20, Channel No.: 36




U-NII-1, 802.11n HT40, Channel No.: 46

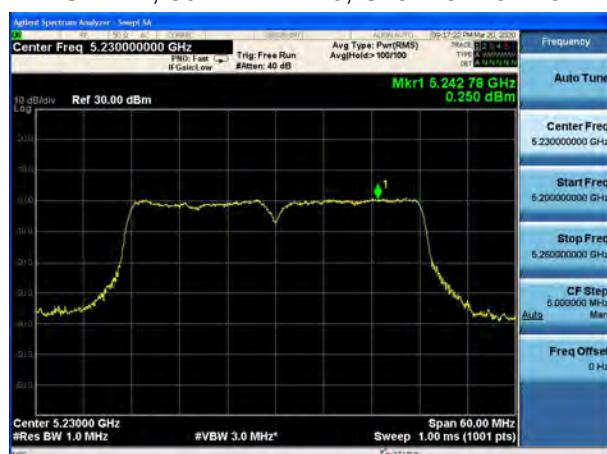

U-NII-1, 802.11ac VHT20, Channel No.: 40



U-NII-1, 802.11ac VHT40, Channel No.: 38

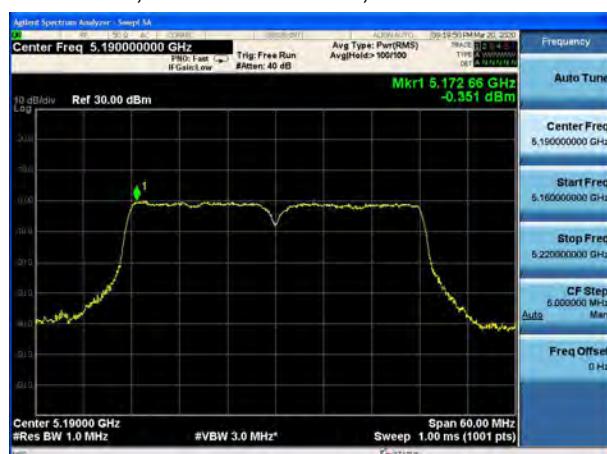


U-NII-1, 802.11ac VHT20, Channel No.: 48




U-NII-1, 802.11ac VHT40, Channel No.: 46



U-NII-1, 802.11ac VHT80, Channel No.: 42

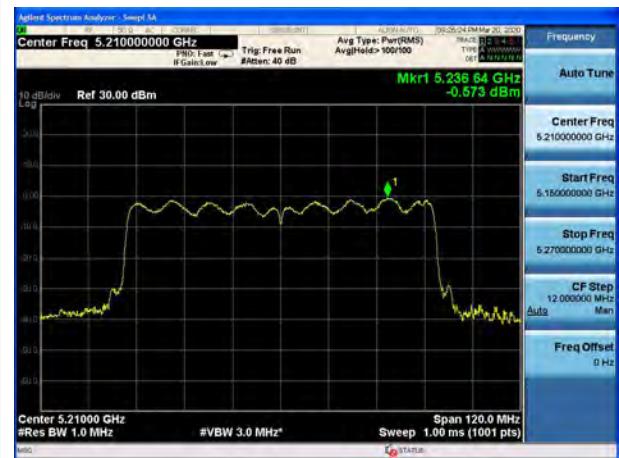


U-NII-3, 802.11a, Channel No.: 149

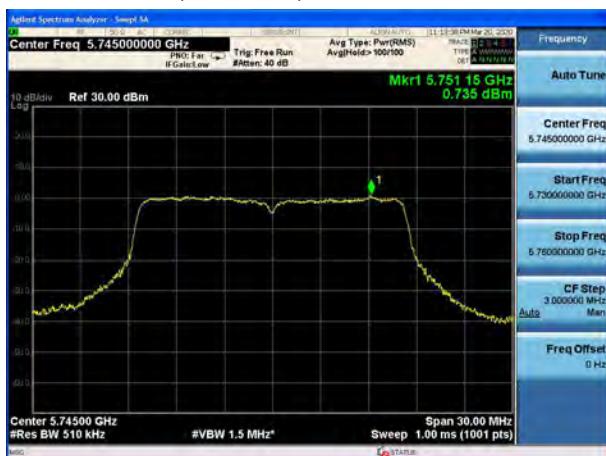

U-NII-3, 802.11n HT20, Channel No.: 149



U-NII-3, 802.11a, Channel No.: 157

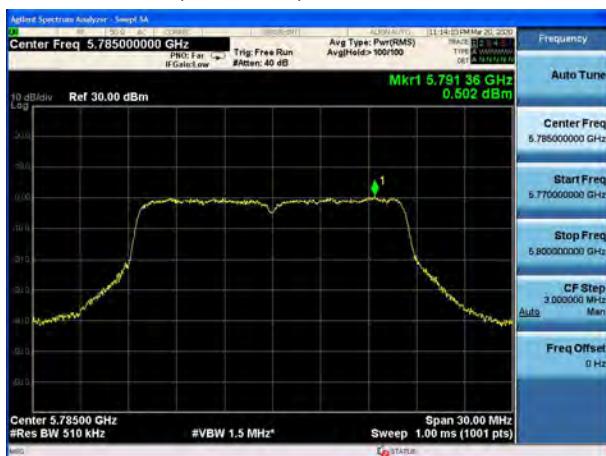


U-NII-3, 802.11n HT20, Channel No.: 157




U-NII-3, 802.11a, Channel No.: 165




U-NII-3, 802.11n HT20, Channel No.: 165

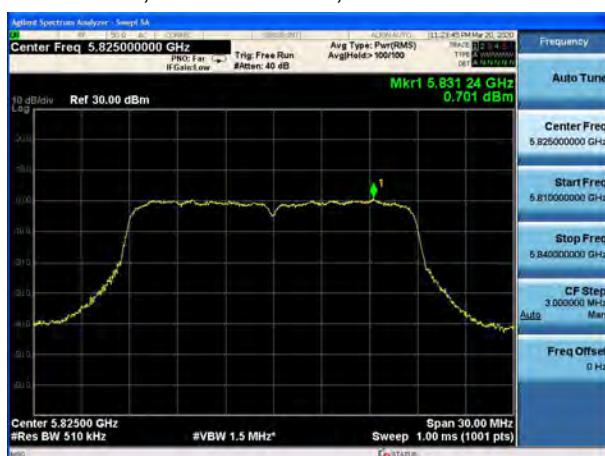


U-NII-3, 802.11n HT40, Channel No.: 151

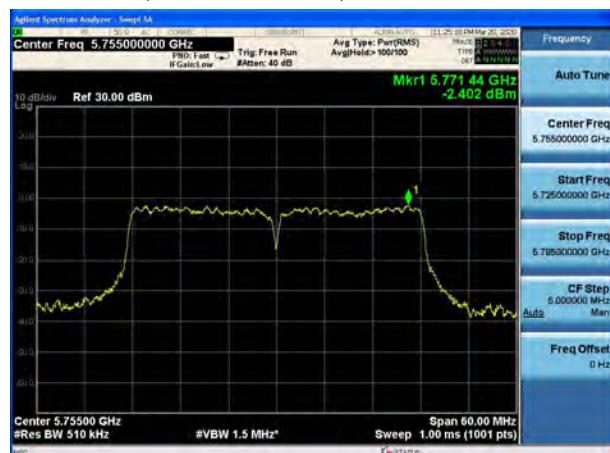

U-NII-3, 802.11n HT40, Channel No.: 159

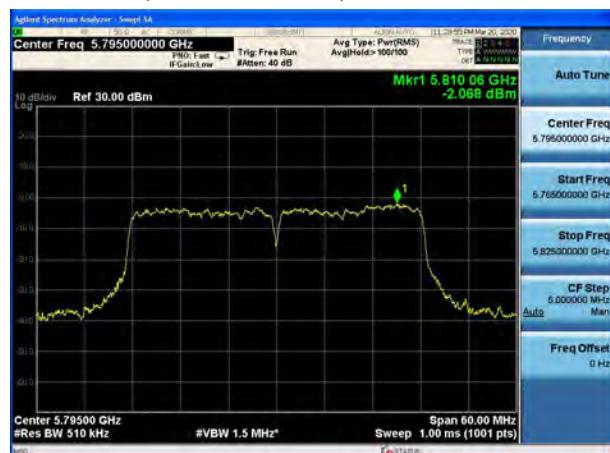


U-NII-3, 802.11ac VHT40, Channel No.: 151

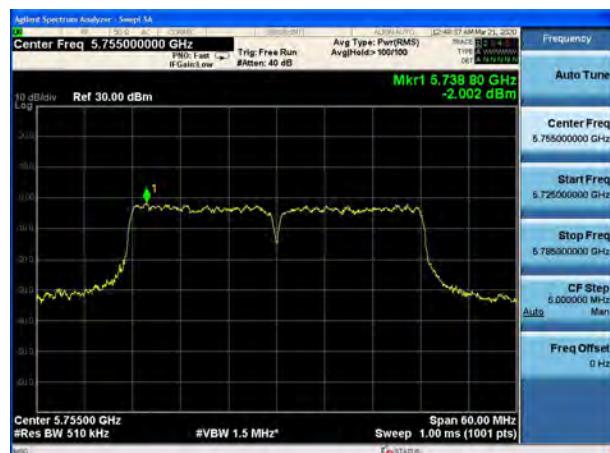


U-NII-3, 802.11ac VHT20, Channel No.: 149




U-NII-3, 802.11ac VHT20, Channel No.: 157

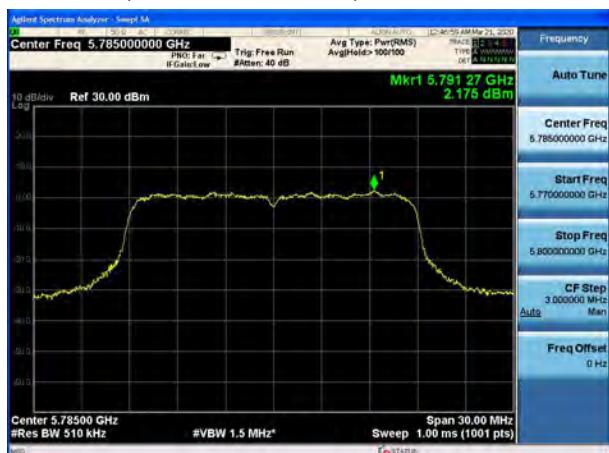

U-NII-3, 802.11ac VHT20, Channel No.: 165

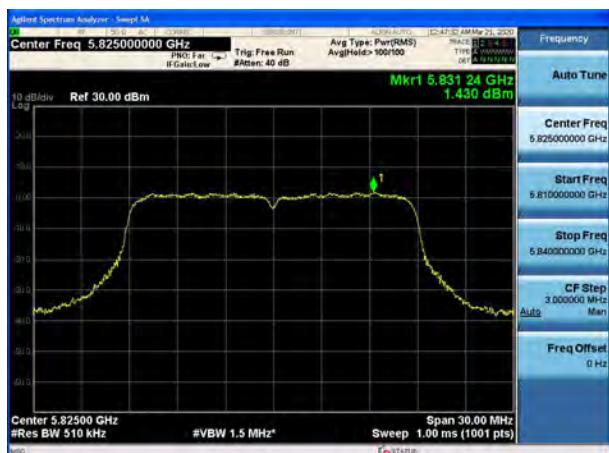

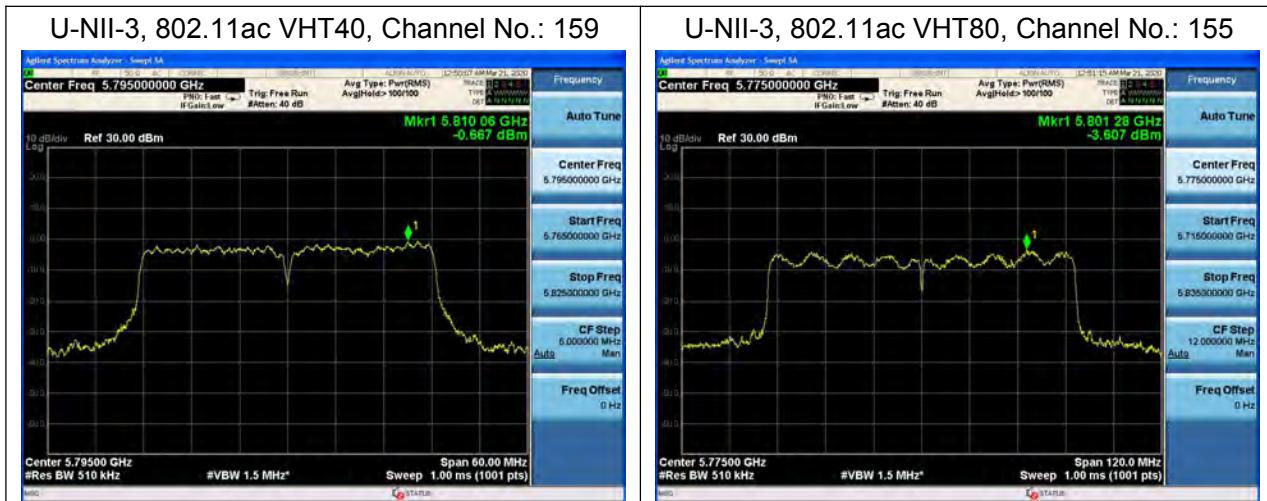



MIMO Antenna 2

U-NII-1, 802.11a, Channel No.: 36




U-NII-1, 802.11n HT20, Channel No.: 36




U-NII-1, 802.11a, Channel No.: 40




U-NII-1, 802.11n HT20, Channel No.: 40

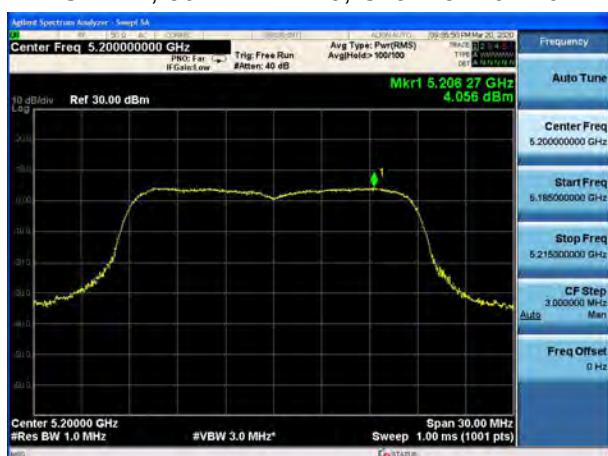


U-NII-1, 802.11a, Channel No.: 48

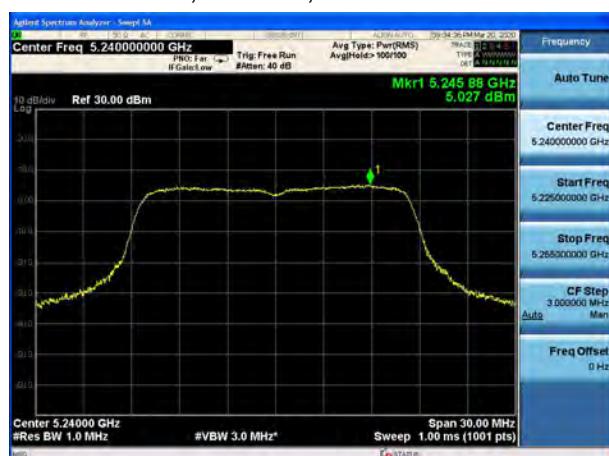


U-NII-1, 802.11n HT20, Channel No.: 48

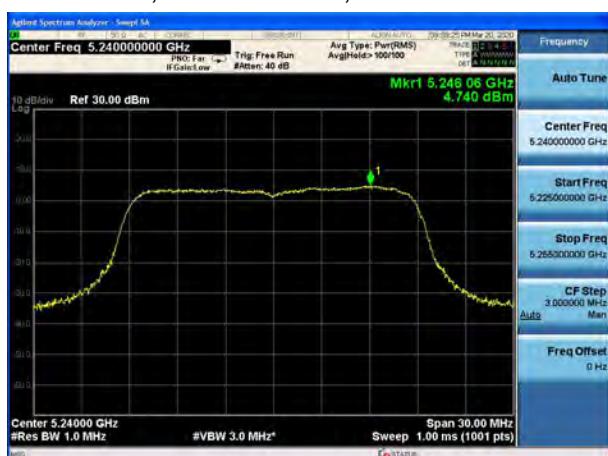

U-NII-1, 802.11n HT40, Channel No.: 38

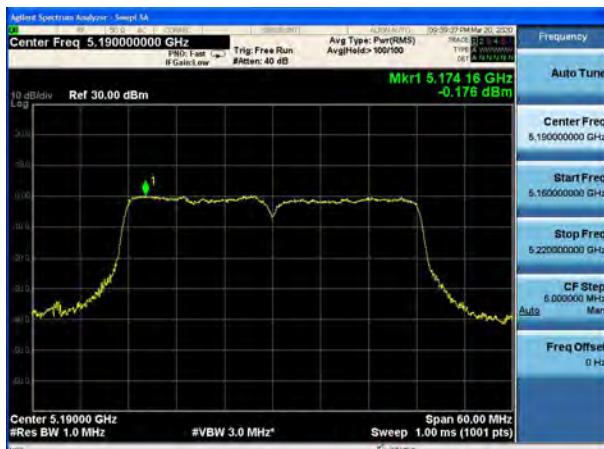

U-NII-1, 802.11ac VHT20, Channel No.: 36

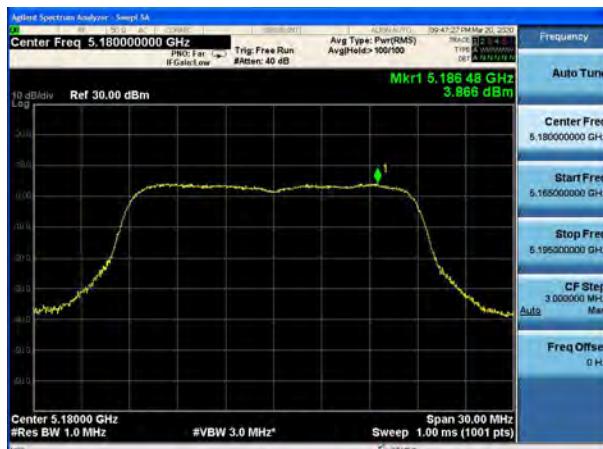

U-NII-1, 802.11n HT40, Channel No.: 46




U-NII-1, 802.11ac VHT20, Channel No.: 40



U-NII-1, 802.11ac VHT40, Channel No.: 38



U-NII-1, 802.11ac VHT20, Channel No.: 48

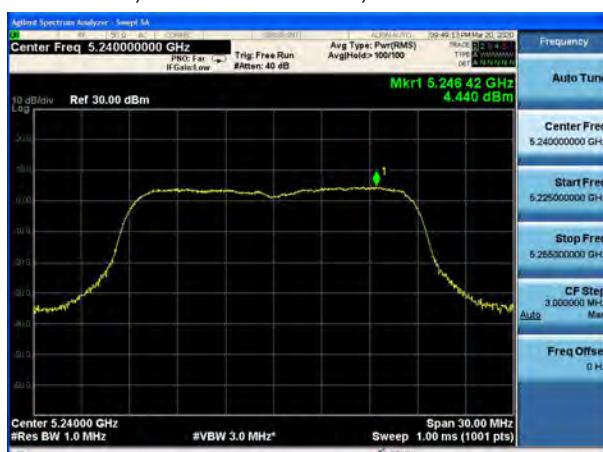

U-NII-1, 802.11ac VHT40, Channel No.: 46



U-NII-1, 802.11ac VHT80, Channel No.: 42






U-NII-3, 802.11a, Channel No.: 149



U-NII-3, 802.11n HT20, Channel No.: 149

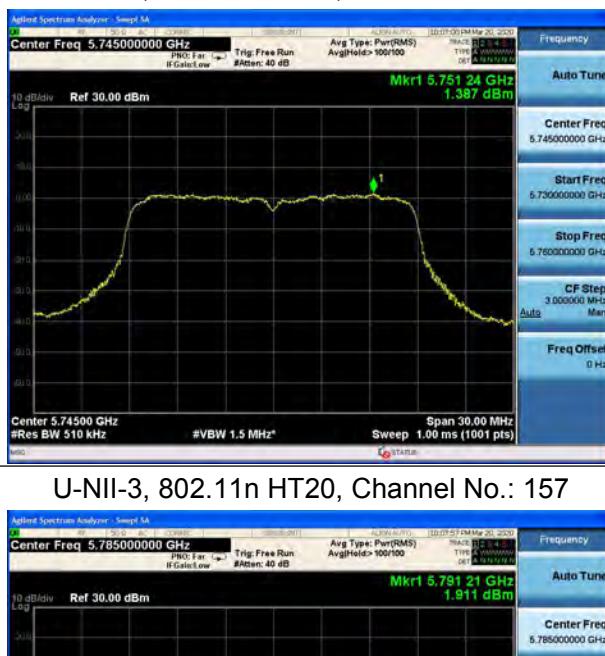


U-NII-3, 802.11a, Channel No.: 157




U-NII-3, 802.11n HT20, Channel No.: 157




U-NII-3, 802.11a, Channel No.: 165

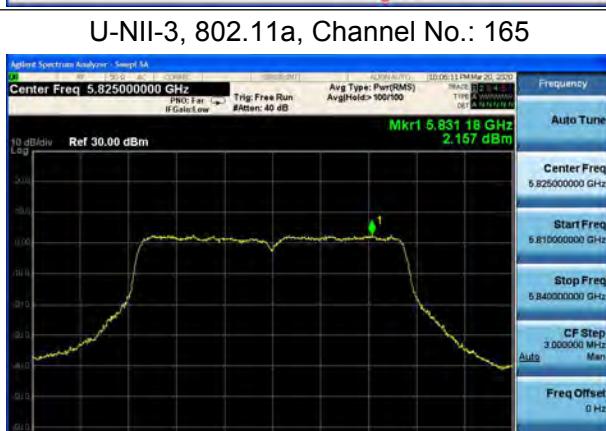


U-NII-3, 802.11n HT20, Channel No.: 165

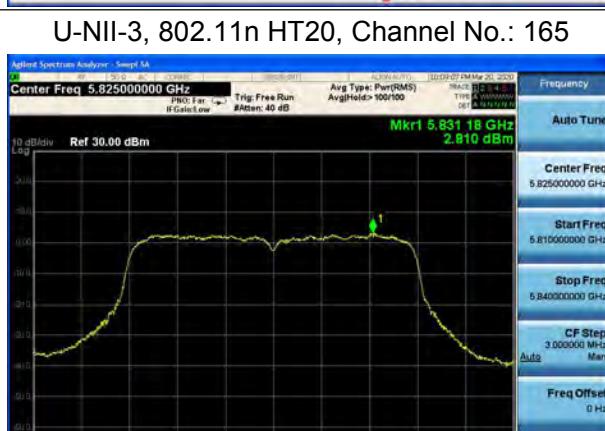

U-NII-3, 802.11n HT40, Channel No.: 151

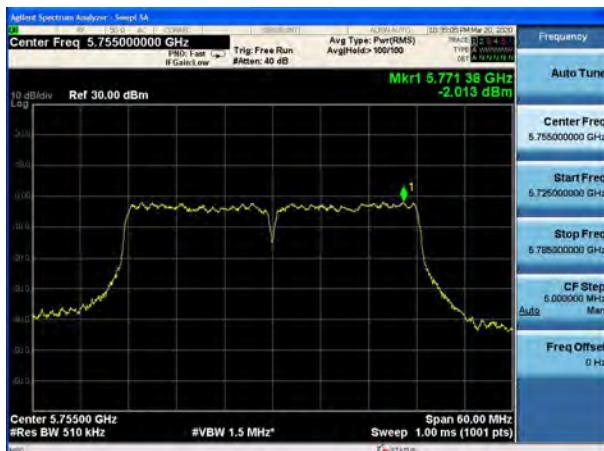


U-NII-3, 802.11ac VHT20, Channel No.: 149

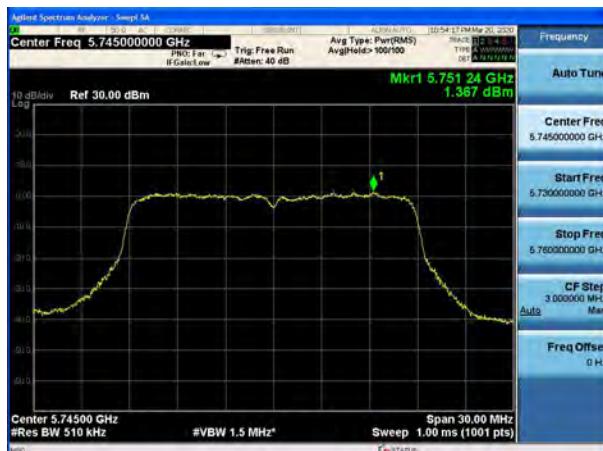


U-NII-3, 802.11n HT40, Channel No.: 159




U-NII-3, 802.11ac VHT20, Channel No.: 157

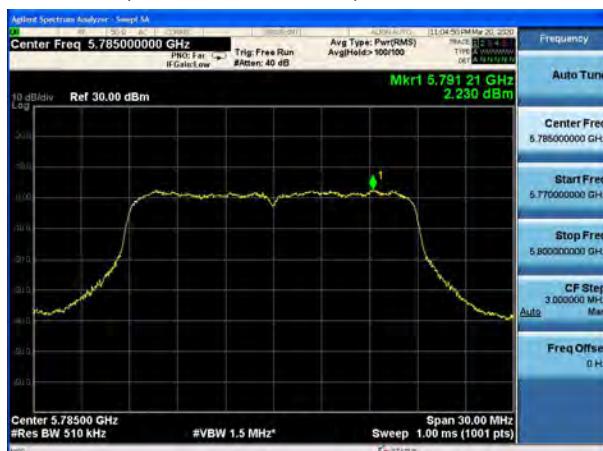


U-NII-3, 802.11ac VHT40, Channel No.: 151

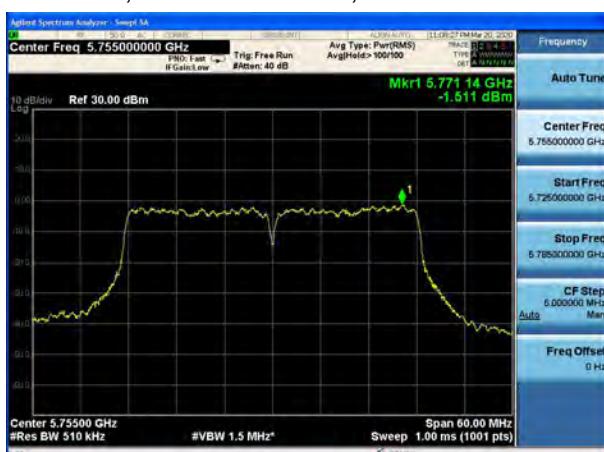

U-NII-3, 802.11ac VHT20, Channel No.: 165

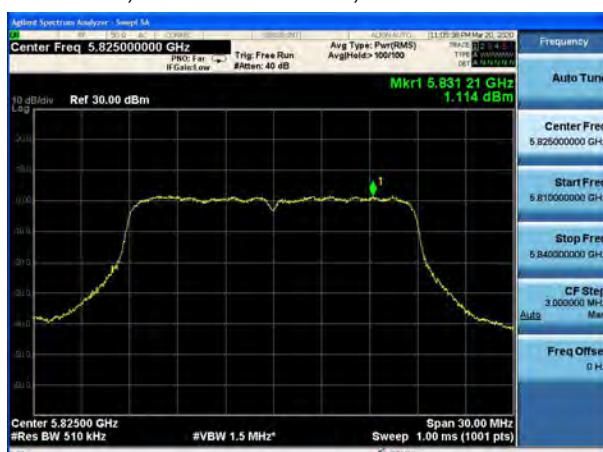

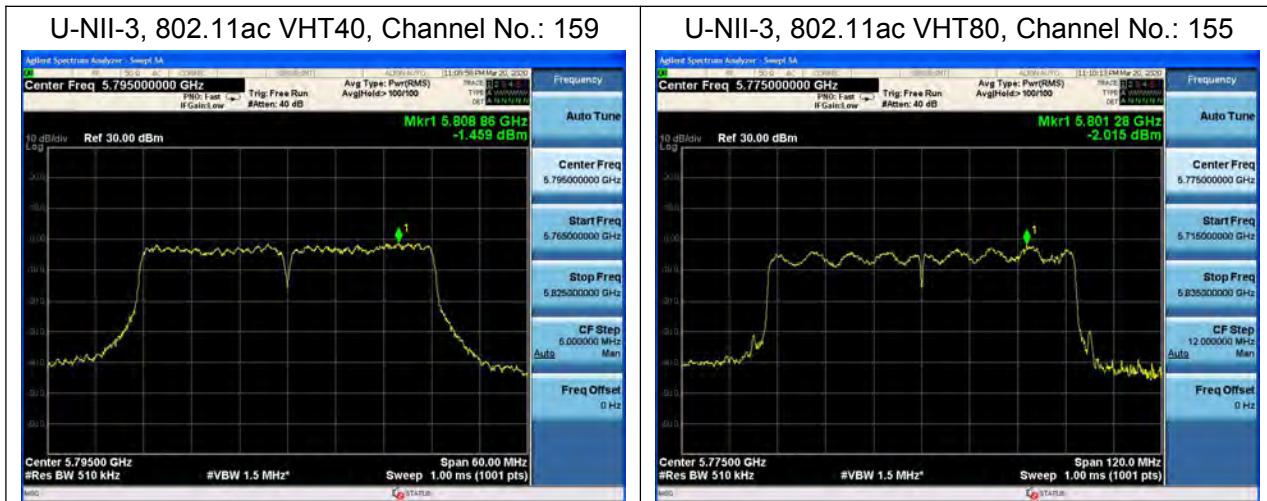



5.5. Unwanted Emission

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration. Sweep the whole frequency band range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz (detector: Peak):

I) Peak emission levels are measured by setting the instrument as follows:

- 1) RBW = 1 MHz.
- 2) VBW $\geq [3 \times RBW]$
- 3) Detector = peak.
- 4) Sweep time = auto.
- 5) Trace mode = max hold.

6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately $1 / D$, where D is the duty cycle.

II) Average emission levels are measured by setting the instrument as follows:

- a) RBW = 1 MHz.
- b) VBW $\geq [3 \times RBW]$.
- c) Detector = RMS (power averaging), if $[span / (\# \text{ of points in sweep})] \leq RBW / 2$. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)



e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.


3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Reduce the video bandwidth until no significant variations in the displayed signal are observed in subsequent traces, provided the video bandwidth is no less than 1 Hz. For regulatory requirements that specify averaging only over the transmit duration (e.g., digital transmission system [DTS] and Unlicensed National Information Infrastructure [U-NII]), the video bandwidth shall be greater than $[1 / (\text{minimum transmitter on time})]$ and no less than 1 Hz.


The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the loop antenna is vertical, others antenna are vertical and horizontal.

The test is in transmitting mode.


9KHz~~~30MHz

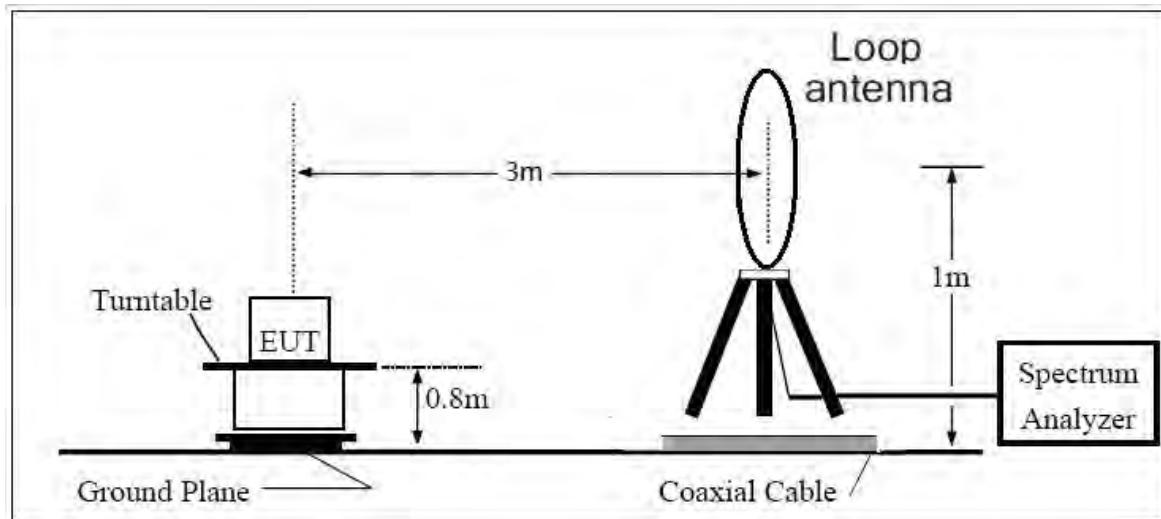

30MHz~~~ 1GHz

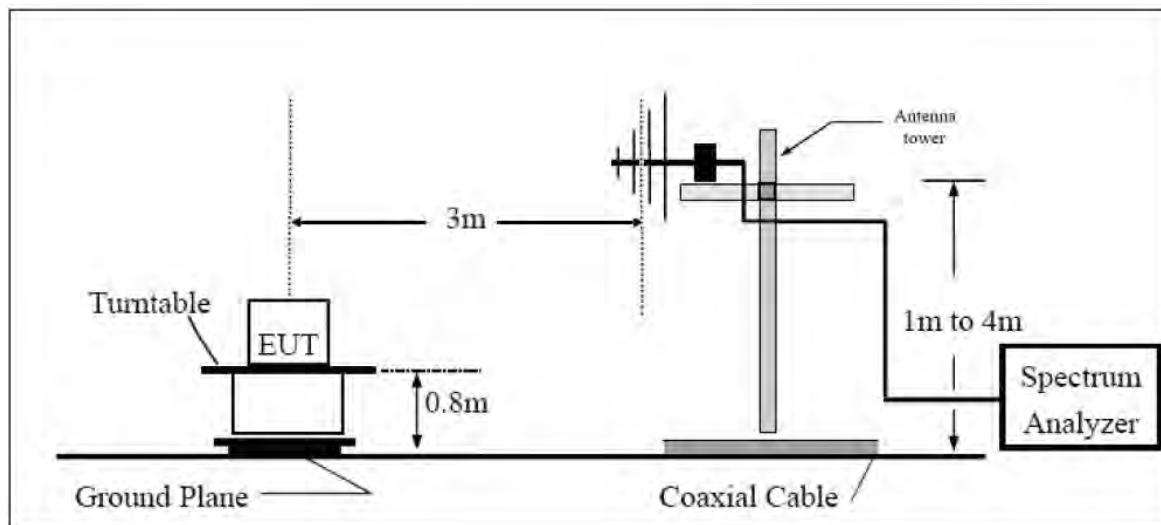

Above 1GHz

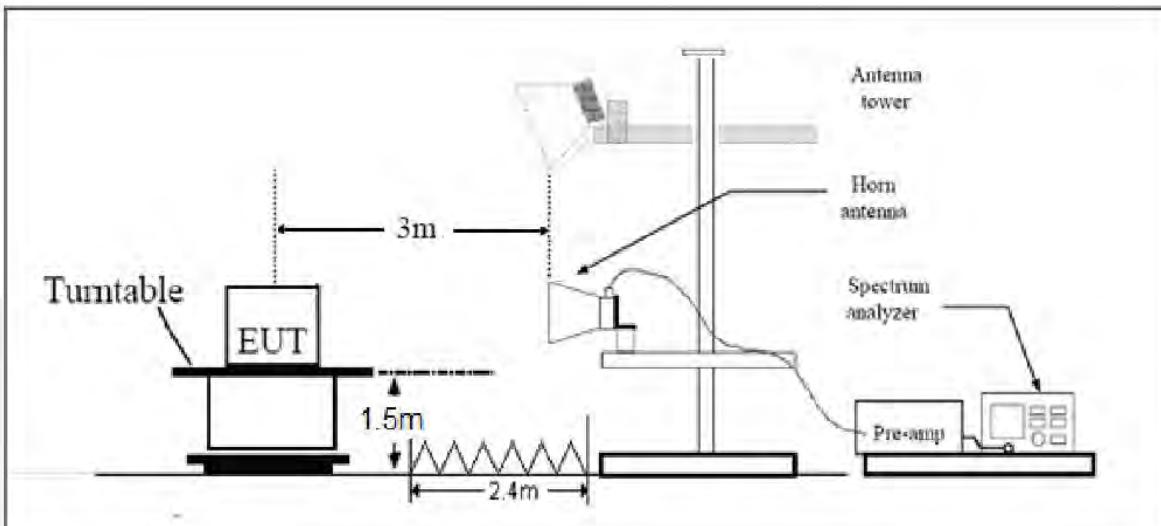

Note: Area side:2.4mX3.6m



Limits

- (1) For transmitters operating in the 5725-5850 MHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dB μ V/m).
- (3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dB μ V/m).
- (4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dB μ V/m).

Note: the following formula is used to convert the EIRP to field strength

§1. $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$, where E = field strength and

d = distance at which field strength limit is specified in the rules;

§2. $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3$ meters

- (5) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table.

| Frequency of emission (MHz) | Field strength(uV/m) | Field strength(dBuV/m) |
|-----------------------------|----------------------|------------------------|
| 0.009–0.490 | 2400/F(kHz) | / |
| 0.490–1.705 | 24000/F(kHz) | / |
| 1.705–30.0 | 30 | / |
| 30–88 | 100 | 40 |
| 88–216 | 150 | 43.5 |
| 216–960 | 200 | 46 |
| Above960 | 500 | 54 |



| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


| Frequency | Uncertainty |
|---------------|-------------|
| 9KHz-30MHz | 3.55 dB |
| 30MHz-200MHz | 4.02 dB |
| 200MHz-1GHz | 3.28 dB |
| 1GHz-18G | 3.70 dB |
| 18GHz-26.5GHz | 5.78 dB |
| 26.5G-40GHz | 5.82 dB |

Test Results:


The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for V20MHz/V40MHz, therefore investigated worst case to representative mode in test report.

The signal beyond the limit is carrier.


U-NII-1

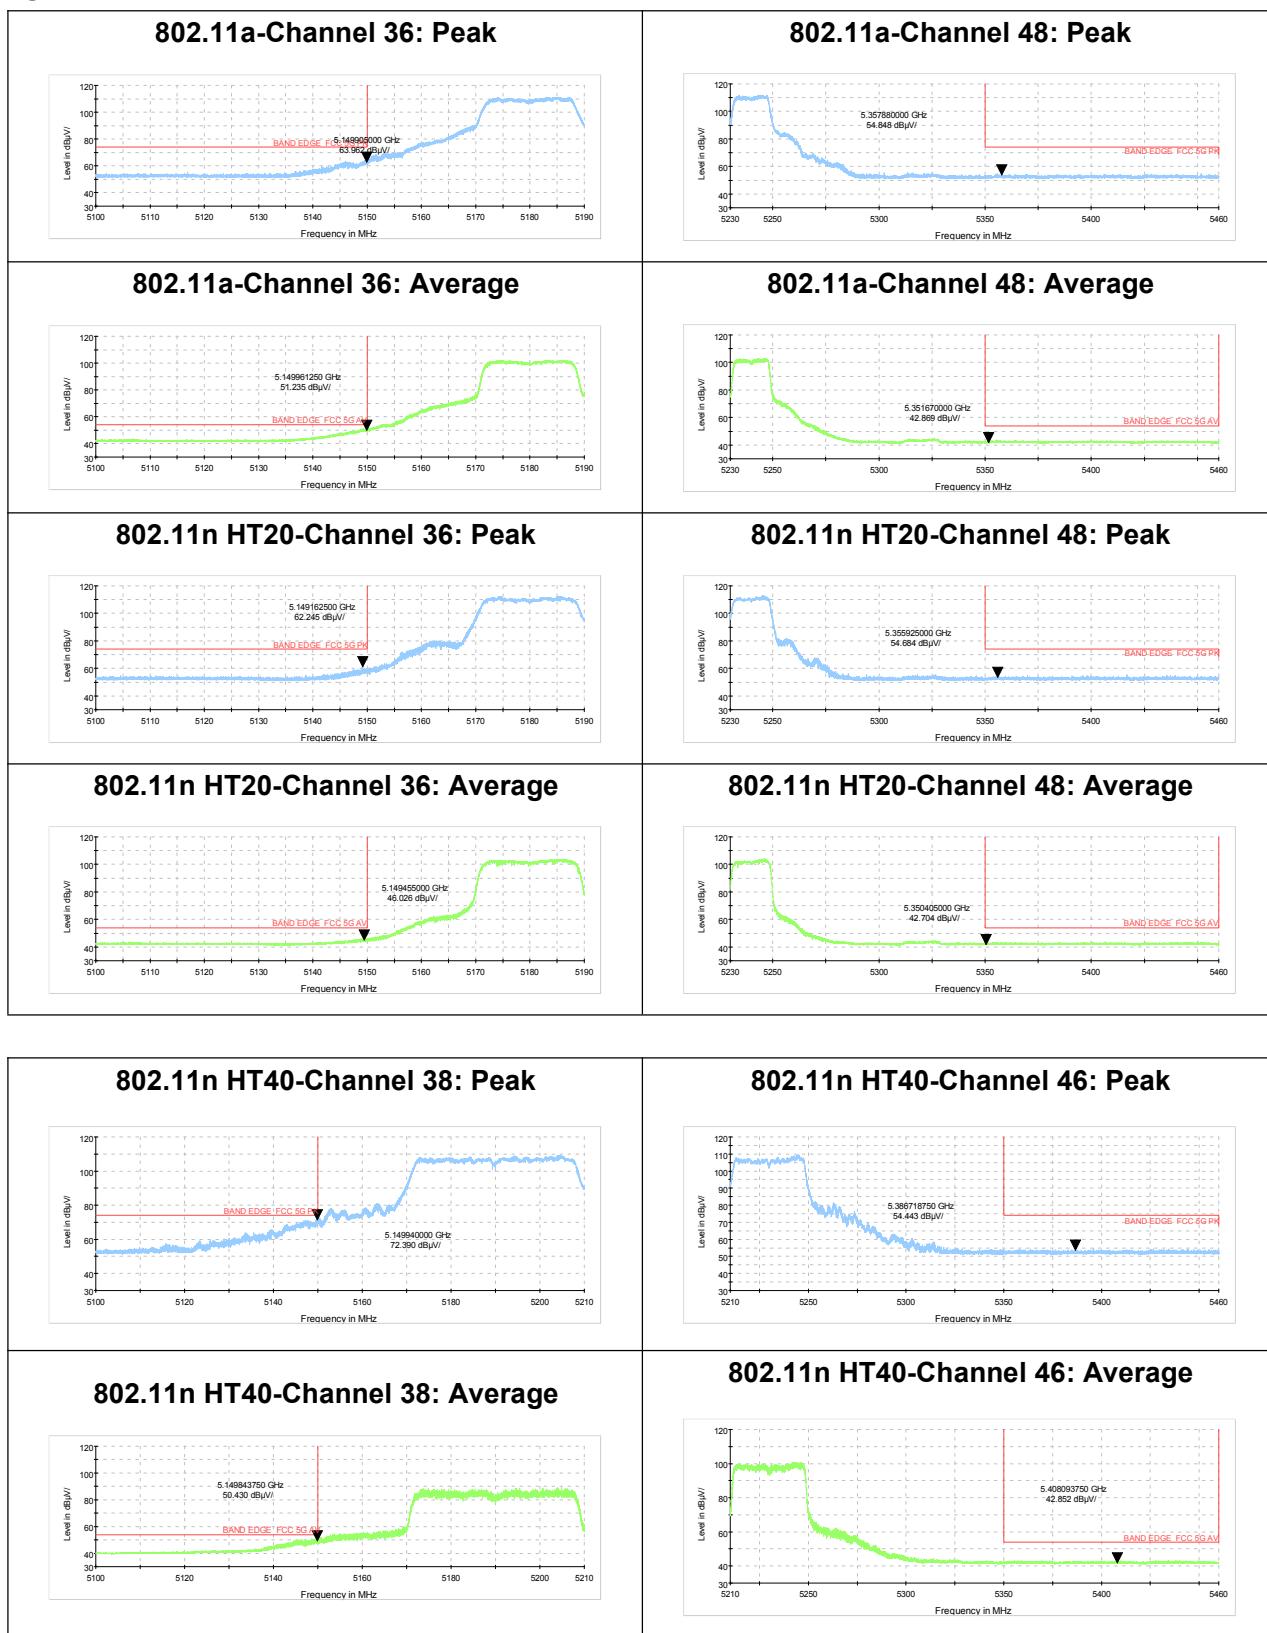








802.11ac VHT80 –Channel 42: Peak

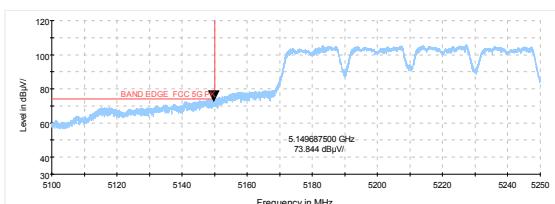

802.11ac VHT80- Channel 42: Average

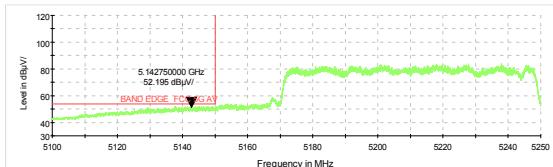

U-NII-3

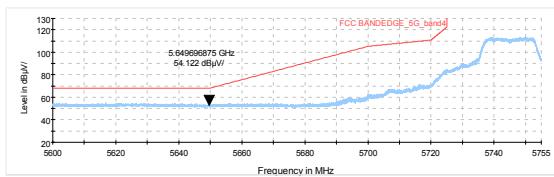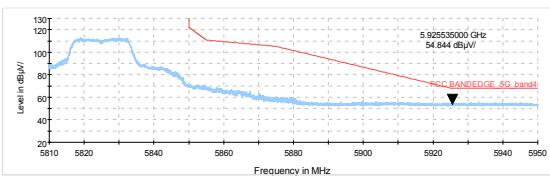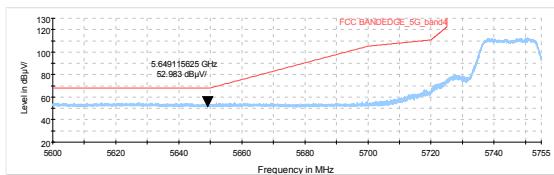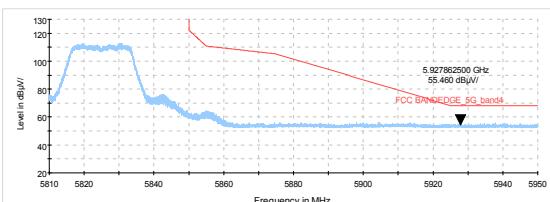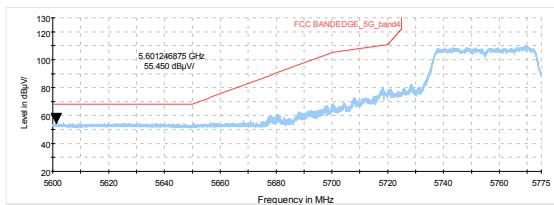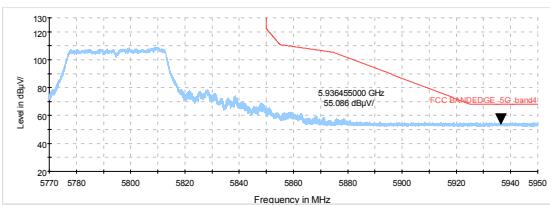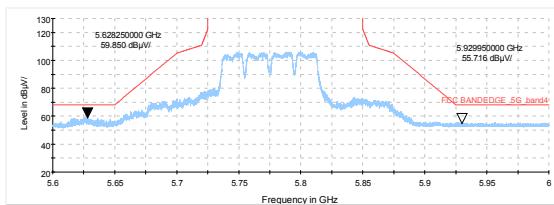802.11a-Channel 149: Peak**802.11a-Channel 165: Peak****802.11n HT20-Channel 149: Peak****802.11n HT20-Channel 165: Peak****802.11n HT40-Channel 151: Peak****802.11n HT40-Channel 159: Peak****802.11ac VHT80- Channel 155: Peak**

**Result of RE****Test result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz and 26.5GHz-40GHz are more than 20dB below the limit are not reported.

After the pretest, SISO Antenna 2 was selected as the worst SISO antenna.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11a, Channel 36 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Continuous TX mode:


Radiates Emission from 30MHz to 1GHz

| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)


2. Margin = Limit – Quasi-Peak

802.11a CH36

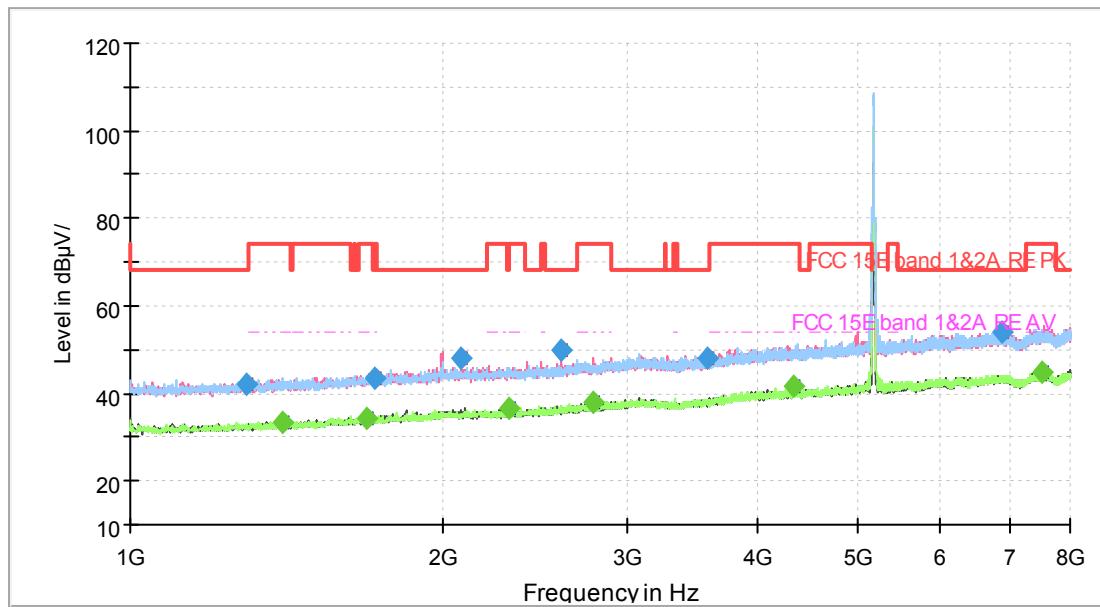

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

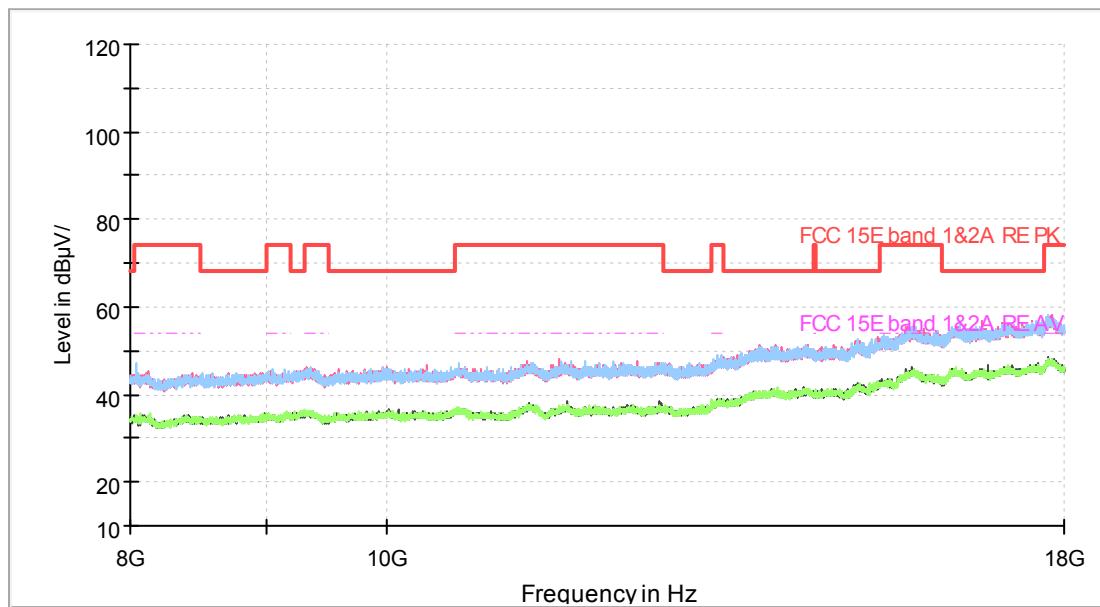


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1293.125000 | 41.94 | --- | 68.20 | 26.26 | 100.0 | V | 1.0 | 0.4 |
| 1400.750000 | --- | 33.56 | 54.00 | 20.44 | 100.0 | V | 177.0 | 1.0 |
| 1684.250000 | --- | 34.42 | 54.00 | 19.58 | 100.0 | V | 76.0 | 2.2 |
| 1714.000000 | 43.44 | --- | 68.20 | 24.76 | 100.0 | V | 33.0 | 2.5 |
| 2076.250000 | 47.98 | --- | 68.20 | 20.22 | 100.0 | V | 220.0 | 4.0 |
| 2310.750000 | --- | 36.54 | 54.00 | 17.46 | 200.0 | H | 281.0 | 4.9 |
| 2595.125000 | 49.67 | --- | 68.20 | 18.53 | 100.0 | V | 280.0 | 5.9 |
| 2781.500000 | --- | 38.04 | 54.00 | 15.96 | 100.0 | V | 357.0 | 6.8 |
| 3578.625000 | 47.85 | --- | 68.20 | 20.35 | 200.0 | H | 0.0 | 9.2 |
| 4346.875000 | --- | 41.40 | 54.00 | 12.60 | 100.0 | V | 145.0 | 11.5 |
| 6867.750000 | 54.05 | --- | 68.20 | 14.15 | 100.0 | V | 197.0 | 16.0 |
| 7523.125000 | --- | 44.74 | 54.00 | 9.26 | 100.0 | H | 299.0 | 17.4 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH40

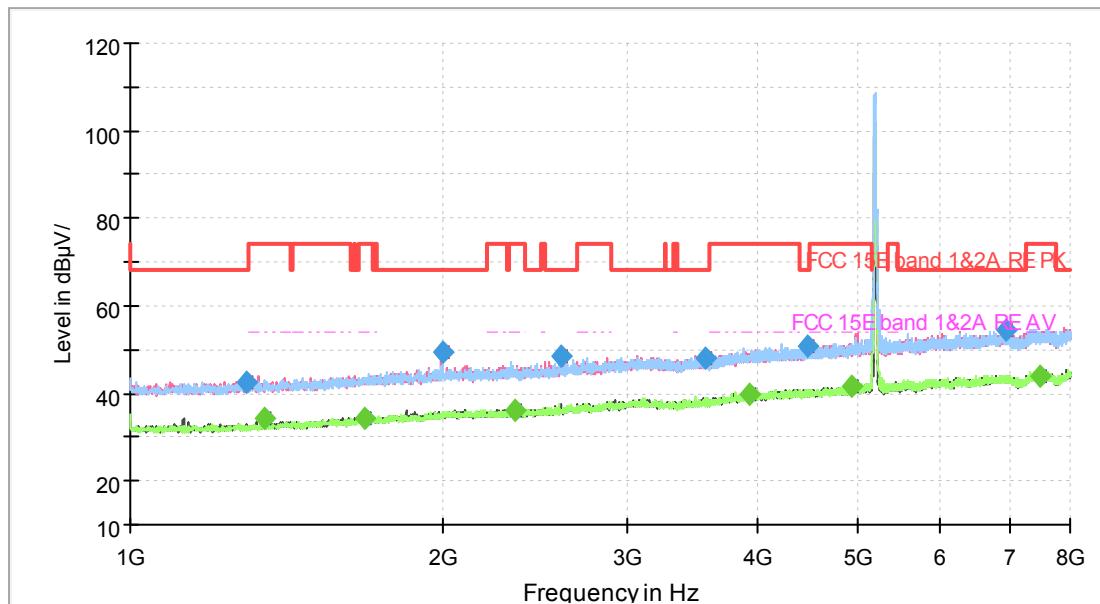

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

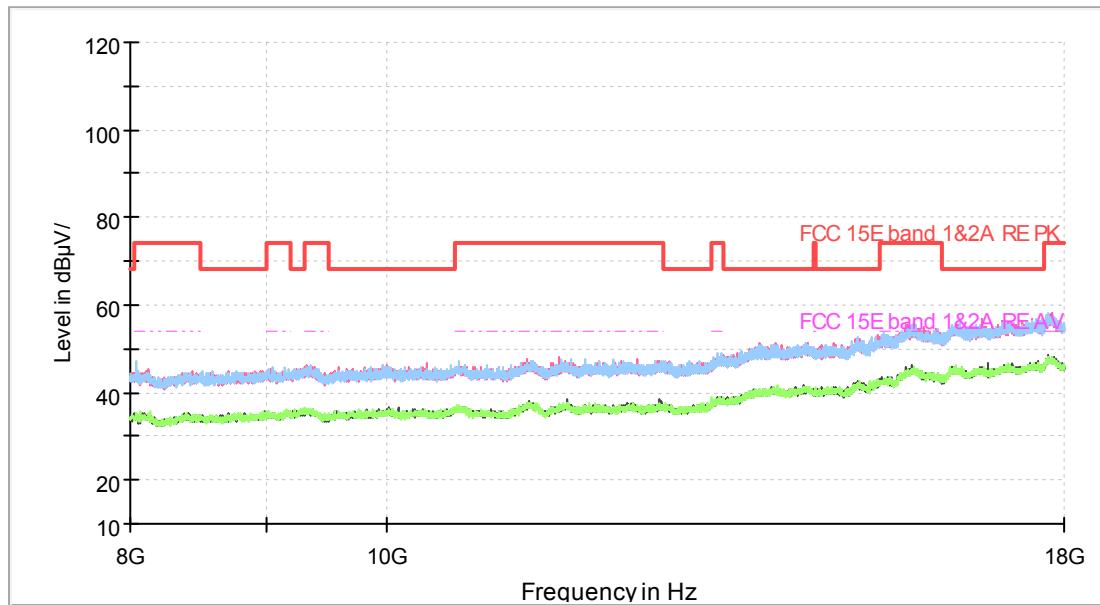


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1294.000000 | 42.31 | --- | 68.20 | 25.89 | 200.0 | H | 32.0 | 0.4 |
| 1343.000000 | --- | 34.09 | 54.00 | 19.91 | 200.0 | V | 329.0 | 0.7 |
| 1679.000000 | --- | 34.48 | 54.00 | 19.52 | 100.0 | V | 31.0 | 2.2 |
| 1995.750000 | 49.62 | --- | 68.20 | 18.58 | 200.0 | V | 58.0 | 3.9 |
| 2347.500000 | --- | 36.11 | 54.00 | 17.89 | 200.0 | H | 56.0 | 5.0 |
| 2594.250000 | 48.64 | --- | 68.20 | 19.56 | 100.0 | V | 258.0 | 5.9 |
| 3562.000000 | 48.06 | --- | 68.20 | 20.14 | 100.0 | H | 312.0 | 9.2 |
| 3943.500000 | --- | 40.01 | 54.00 | 14.00 | 100.0 | H | 333.0 | 10.6 |
| 4466.750000 | 50.77 | --- | 68.20 | 17.43 | 100.0 | V | 35.0 | 11.6 |
| 4940.125000 | --- | 41.68 | 54.00 | 12.32 | 100.0 | V | 127.0 | 13.0 |
| 6931.625000 | 54.56 | --- | 68.20 | 13.64 | 100.0 | V | 262.0 | 16.2 |
| 7484.625000 | --- | 44.01 | 54.00 | 9.99 | 100.0 | V | 0.0 | 17.3 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH48

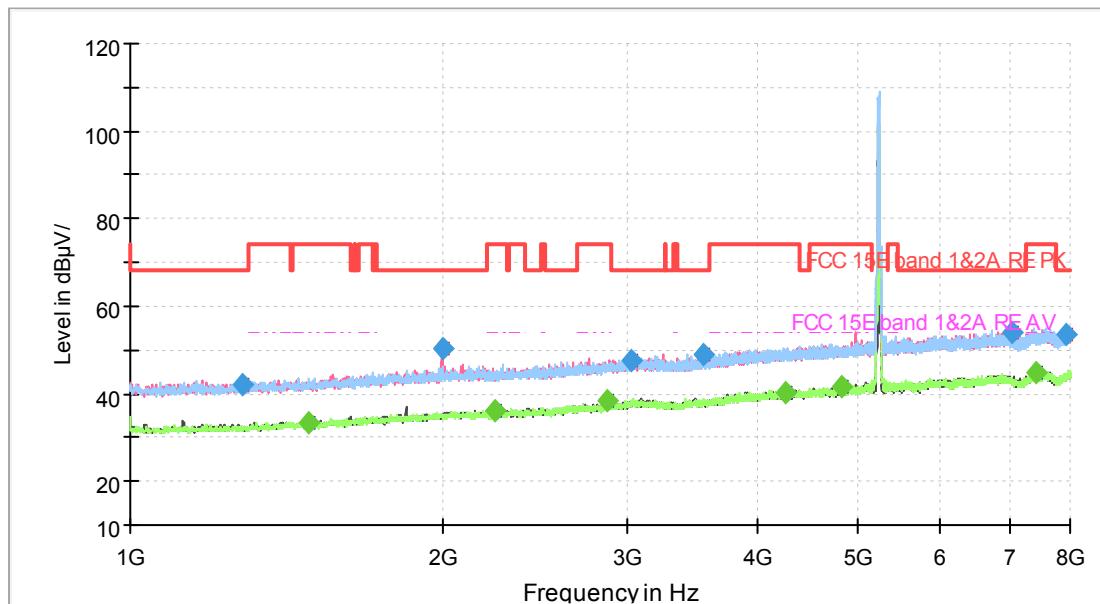

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

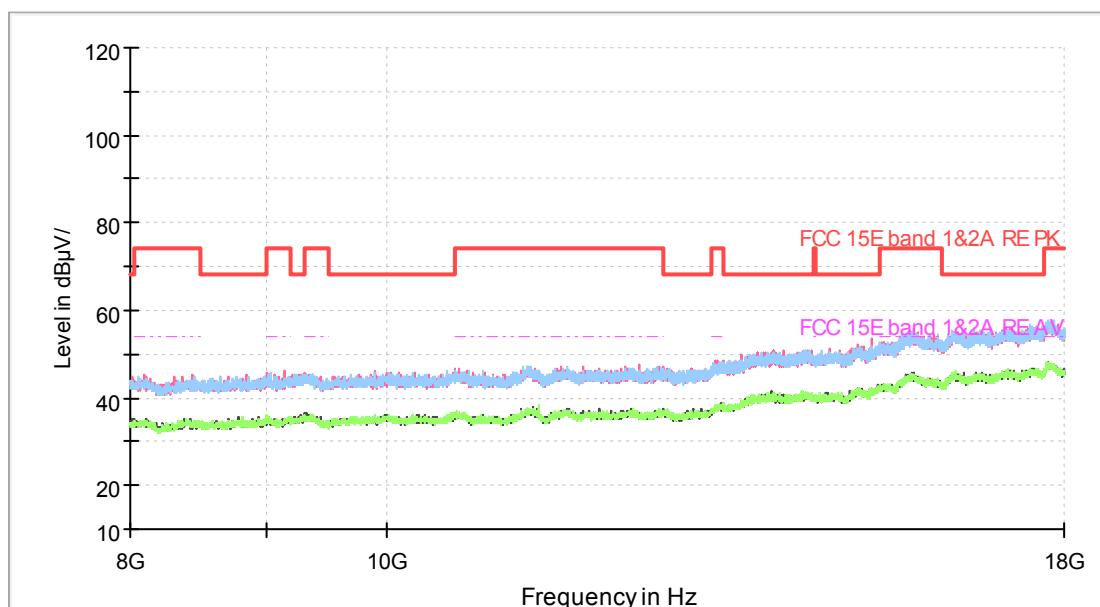


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1279.125000 | 42.01 | --- | 68.20 | 26.19 | 100.0 | V | 153.0 | 0.4 |
| 1485.625000 | --- | 33.57 | 54.00 | 20.43 | 100.0 | V | 20.0 | 1.4 |
| 1996.625000 | 50.30 | --- | 68.20 | 17.90 | 100.0 | V | 69.0 | 3.9 |
| 2237.250000 | --- | 35.94 | 54.00 | 18.06 | 100.0 | V | 12.0 | 4.4 |
| 2876.000000 | --- | 38.42 | 54.00 | 15.58 | 100.0 | V | 73.0 | 7.5 |
| 3036.125000 | 47.77 | --- | 68.20 | 20.43 | 200.0 | H | 27.0 | 8.5 |
| 3548.875000 | 49.13 | --- | 68.20 | 19.07 | 200.0 | V | 351.0 | 9.1 |
| 4266.375000 | --- | 40.22 | 54.00 | 13.78 | 200.0 | H | 248.0 | 11.3 |
| 4829.875000 | --- | 41.82 | 54.00 | 12.18 | 200.0 | V | 100.0 | 12.6 |
| 7042.750000 | 54.12 | --- | 68.20 | 14.08 | 200.0 | V | 351.0 | 16.3 |
| 7427.750000 | --- | 44.64 | 54.00 | 9.36 | 100.0 | V | 121.0 | 17.2 |
| 7917.750000 | 53.73 | --- | 68.20 | 14.47 | 200.0 | V | 314.0 | 17.7 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH149

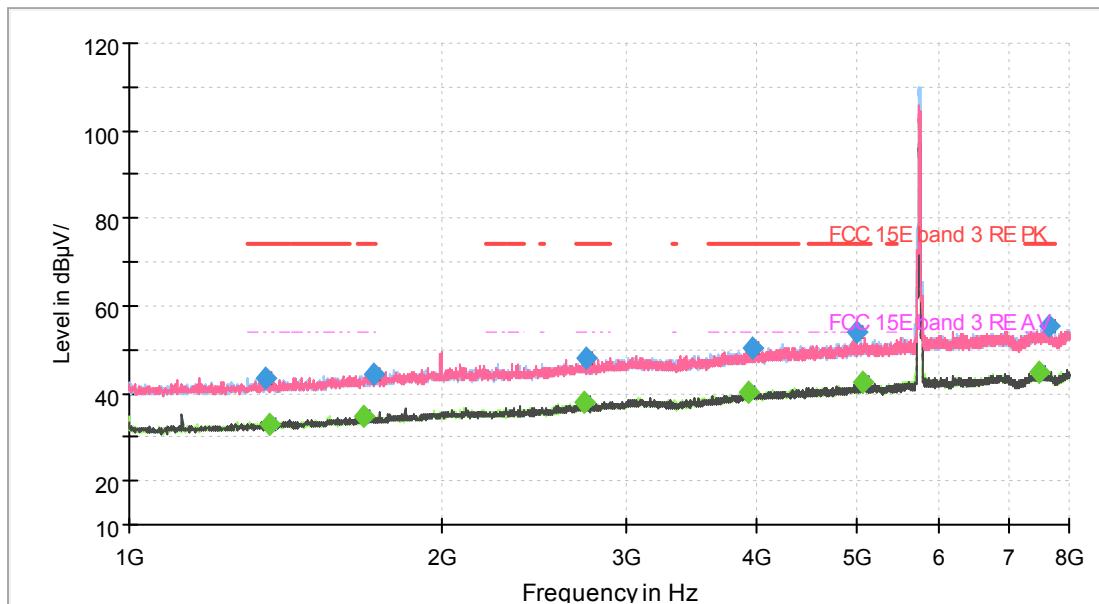

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

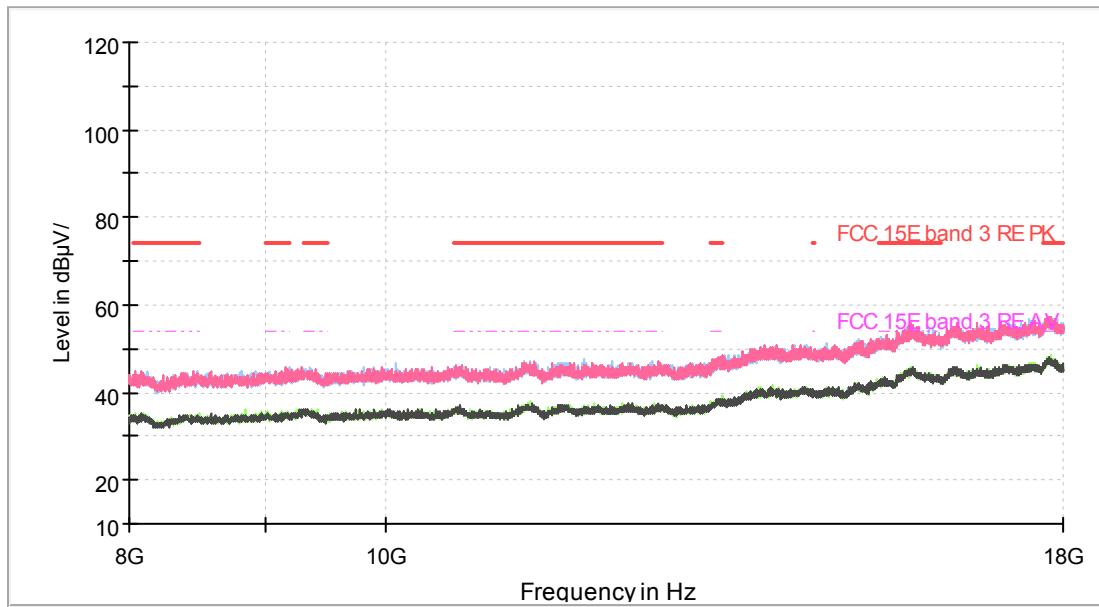


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1354.375000 | 43.58 | --- | 74.00 | 30.42 | 100.0 | V | 274.0 | 0.8 |
| 1364.000000 | --- | 32.81 | 54.00 | 21.19 | 100.0 | V | 166.0 | 0.8 |
| 1677.250000 | --- | 34.66 | 54.00 | 19.34 | 100.0 | H | 75.0 | 2.2 |
| 1720.125000 | 44.54 | --- | 74.00 | 29.46 | 200.0 | H | 0.0 | 2.4 |
| 2739.500000 | --- | 37.76 | 54.00 | 16.24 | 200.0 | H | 0.0 | 6.8 |
| 2750.875000 | 48.10 | --- | 74.00 | 25.90 | 100.0 | V | 268.0 | 6.7 |
| 3929.500000 | --- | 40.22 | 54.00 | 13.78 | 100.0 | V | 303.0 | 10.6 |
| 3963.625000 | 50.32 | --- | 74.00 | 23.68 | 200.0 | H | 308.0 | 10.7 |
| 4997.875000 | 54.10 | --- | 74.00 | 19.90 | 100.0 | V | 229.0 | 12.9 |
| 5060.000000 | --- | 42.50 | 54.00 | 11.50 | 200.0 | V | 218.0 | 13.3 |
| 7483.750000 | --- | 44.77 | 54.00 | 9.23 | 200.0 | H | 359.0 | 17.3 |
| 7644.750000 | 55.15 | --- | 74.00 | 18.85 | 200.0 | V | 261.0 | 17.7 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH157

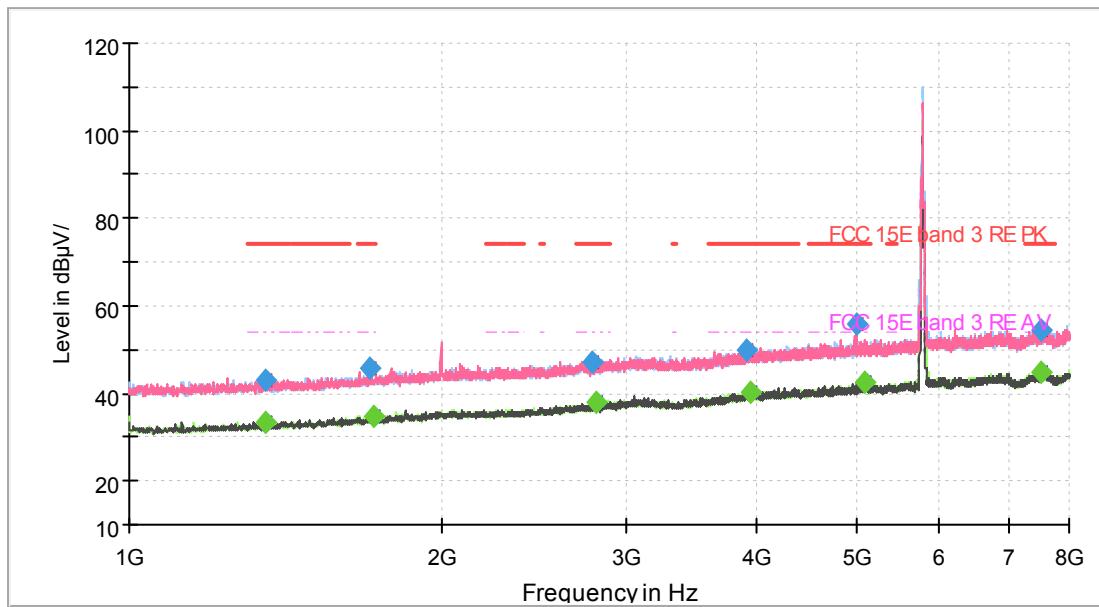

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

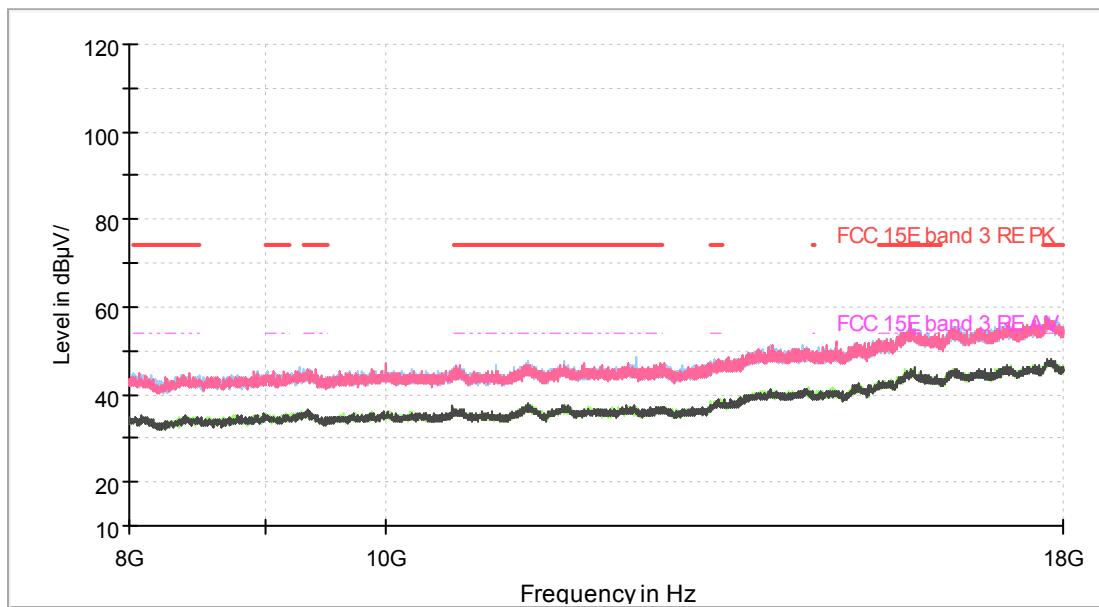


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1352.625000 | 42.99 | --- | 74.00 | 31.01 | 200.0 | H | 44.0 | 0.8 |
| 1354.375000 | --- | 33.28 | 54.00 | 20.72 | 100.0 | V | 60.0 | 0.8 |
| 1705.250000 | 45.60 | --- | 74.00 | 28.40 | 200.0 | H | 26.0 | 2.6 |
| 1721.000000 | --- | 34.70 | 54.00 | 19.30 | 200.0 | V | 195.0 | 2.4 |
| 2790.250000 | 47.29 | --- | 74.00 | 26.71 | 200.0 | V | 261.0 | 6.9 |
| 2809.500000 | --- | 37.86 | 54.00 | 16.14 | 100.0 | V | 0.0 | 7.0 |
| 3916.375000 | 49.89 | --- | 74.00 | 24.11 | 200.0 | V | 292.0 | 10.6 |
| 3959.250000 | --- | 40.21 | 54.00 | 13.79 | 200.0 | H | 157.0 | 10.6 |
| 4995.250000 | 55.73 | --- | 74.00 | 18.27 | 100.0 | V | 226.0 | 12.8 |
| 5081.000000 | --- | 42.49 | 54.00 | 11.51 | 100.0 | V | 0.0 | 13.5 |
| 7519.625000 | --- | 45.03 | 54.00 | 8.97 | 200.0 | H | 20.0 | 17.3 |
| 7532.750000 | 54.52 | --- | 74.00 | 19.48 | 100.0 | V | 182.0 | 17.4 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH165

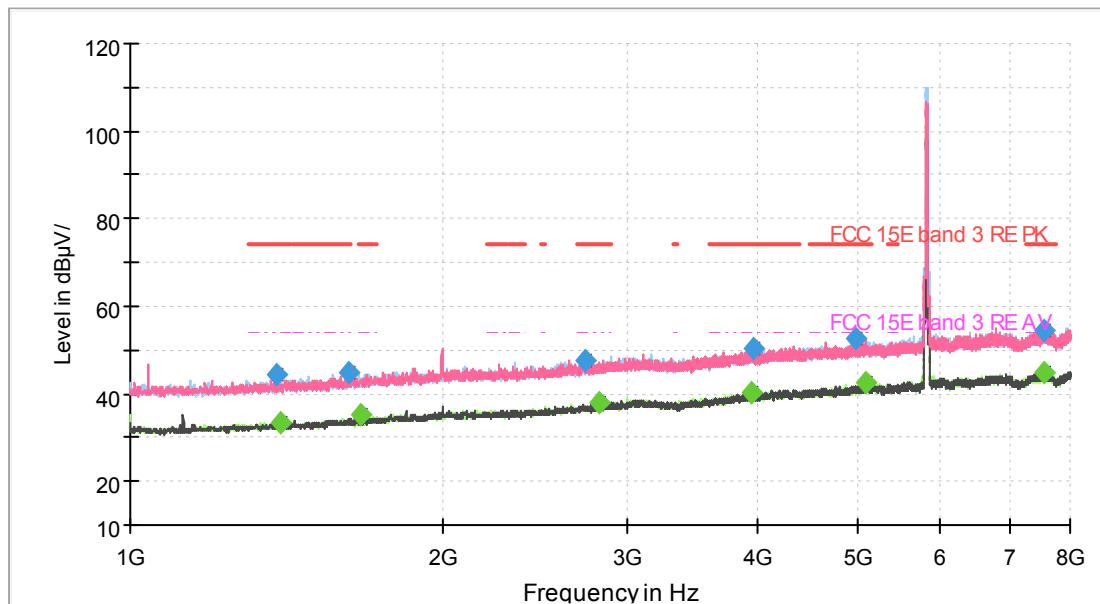

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

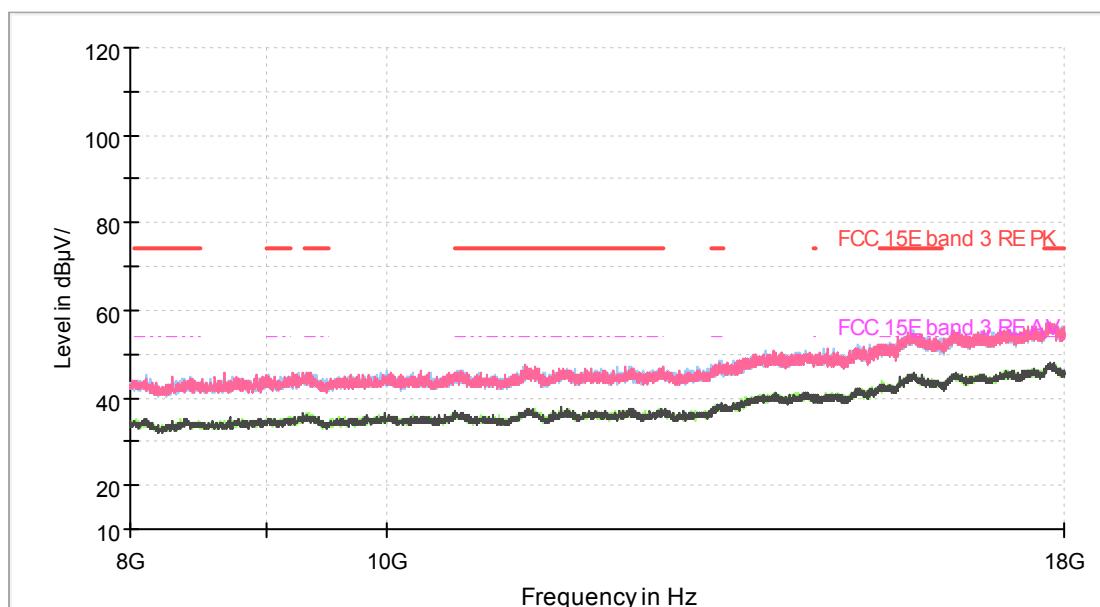


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1379.750000 | 44.17 | --- | 74.00 | 29.83 | 100.0 | H | 146.0 | 0.8 |
| 1394.625000 | --- | 33.23 | 54.00 | 20.77 | 100.0 | V | 80.0 | 0.9 |
| 1623.875000 | 44.83 | --- | 74.00 | 29.17 | 100.0 | H | 0.0 | 2.0 |
| 1665.000000 | --- | 35.04 | 54.00 | 18.96 | 200.0 | H | 285.0 | 2.2 |
| 2731.625000 | 47.56 | --- | 74.00 | 26.44 | 100.0 | H | 206.0 | 6.8 |
| 2819.125000 | --- | 37.83 | 54.00 | 16.17 | 200.0 | H | 324.0 | 7.0 |
| 3947.875000 | --- | 40.46 | 54.00 | 13.54 | 200.0 | H | 290.0 | 10.6 |
| 3975.000000 | 50.29 | --- | 74.00 | 23.71 | 100.0 | H | 128.0 | 10.7 |
| 4985.625000 | 52.77 | --- | 74.00 | 21.23 | 100.0 | V | 226.0 | 12.9 |
| 5086.250000 | --- | 42.34 | 54.00 | 11.66 | 200.0 | H | 0.0 | 13.5 |
| 7544.125000 | --- | 44.73 | 54.00 | 9.27 | 100.0 | H | 219.0 | 17.4 |
| 7544.125000 | 54.61 | --- | 74.00 | 19.39 | 200.0 | H | 42.0 | 17.4 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH36

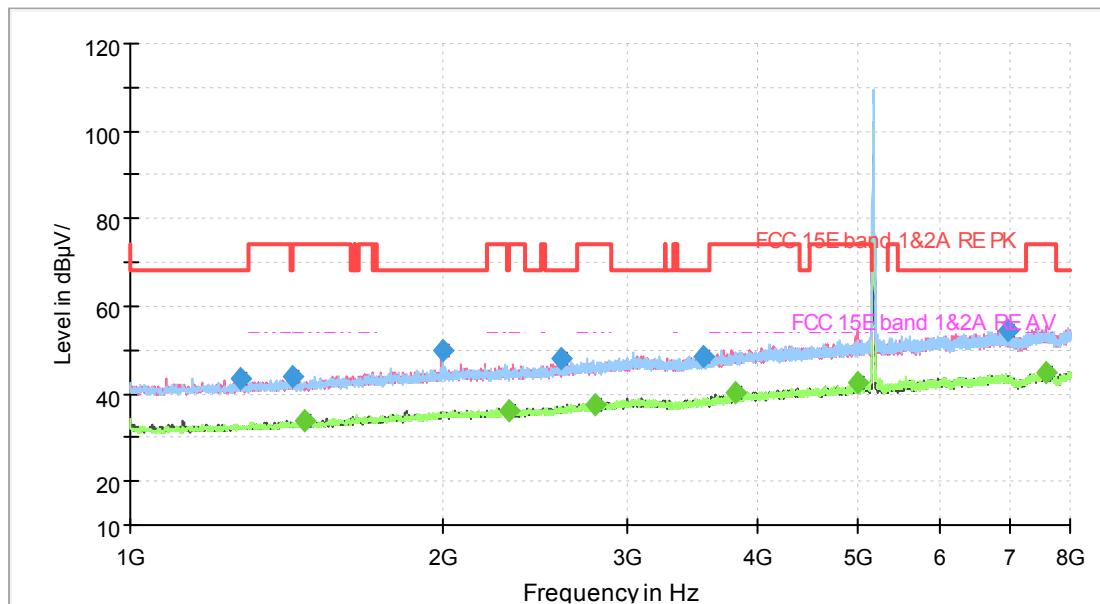

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

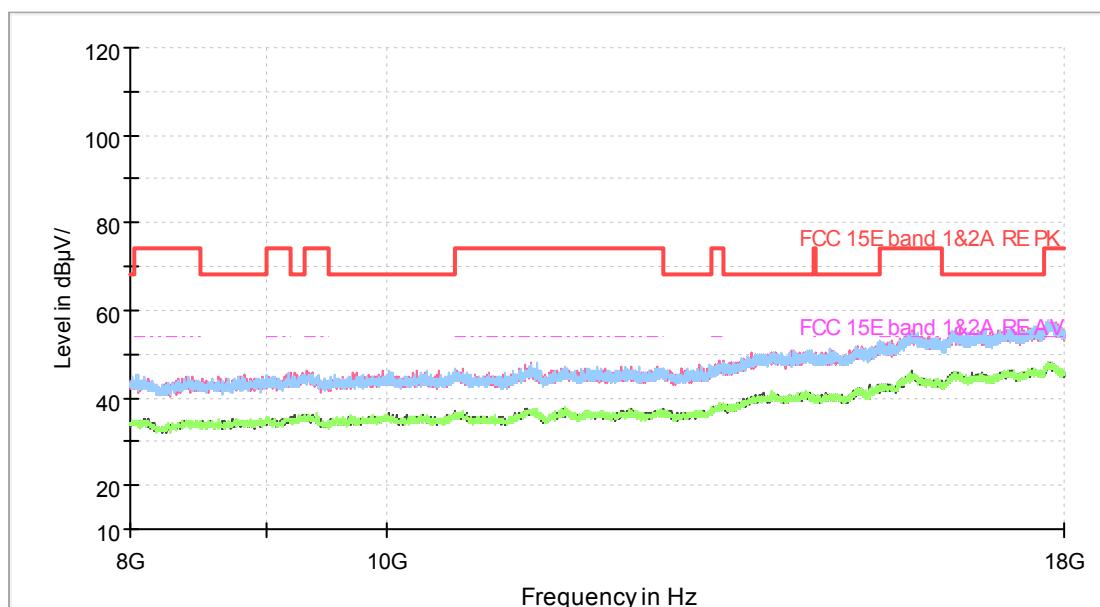


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1278.250000 | 43.32 | --- | 68.20 | 24.88 | 200.0 | H | 278.0 | 0.4 |
| 1431.375000 | 44.01 | --- | 68.20 | 24.19 | 200.0 | H | 282.0 | 1.0 |
| 1470.750000 | --- | 34.02 | 54.00 | 19.98 | 100.0 | V | 270.0 | 1.2 |
| 1998.375000 | 49.76 | --- | 68.20 | 18.44 | 200.0 | V | 63.0 | 3.9 |
| 2314.250000 | --- | 36.15 | 54.00 | 17.85 | 200.0 | H | 250.0 | 5.0 |
| 2594.250000 | 48.02 | --- | 68.20 | 20.18 | 200.0 | H | 214.0 | 5.9 |
| 2799.000000 | --- | 37.27 | 54.00 | 16.73 | 100.0 | H | 0.0 | 7.0 |
| 3549.750000 | 48.68 | --- | 68.20 | 19.52 | 200.0 | V | 0.0 | 9.1 |
| 3818.375000 | --- | 40.07 | 54.00 | 13.93 | 200.0 | V | 264.0 | 10.3 |
| 4997.000000 | --- | 42.62 | 54.00 | 11.38 | 100.0 | V | 218.0 | 12.9 |
| 6971.875000 | 54.41 | --- | 68.20 | 13.79 | 200.0 | H | 219.0 | 16.3 |
| 7581.750000 | --- | 44.75 | 54.00 | 9.25 | 200.0 | V | 272.0 | 17.5 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH40

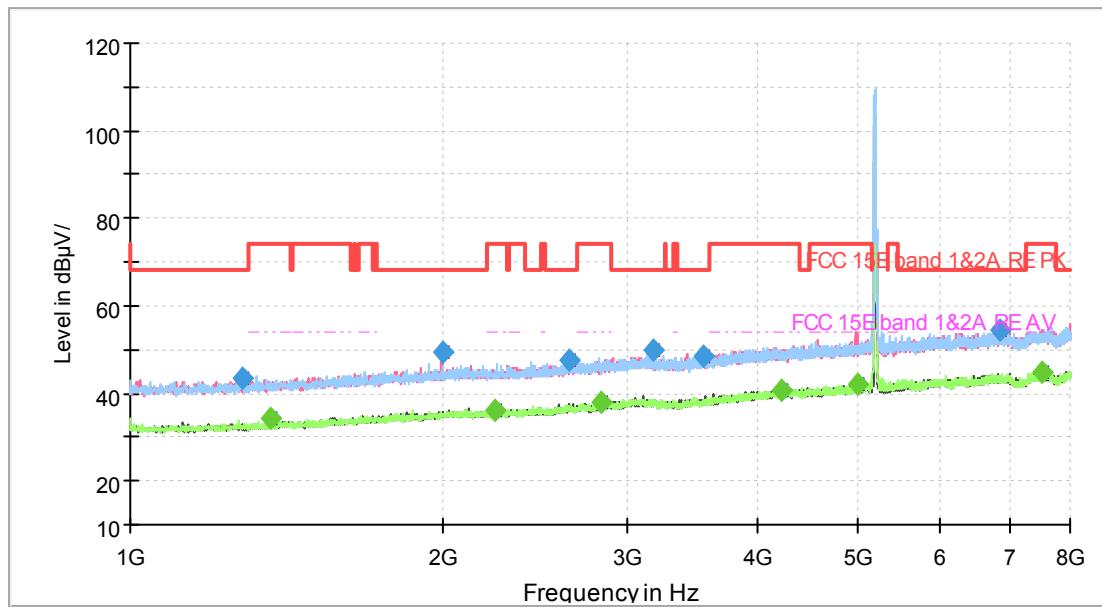

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

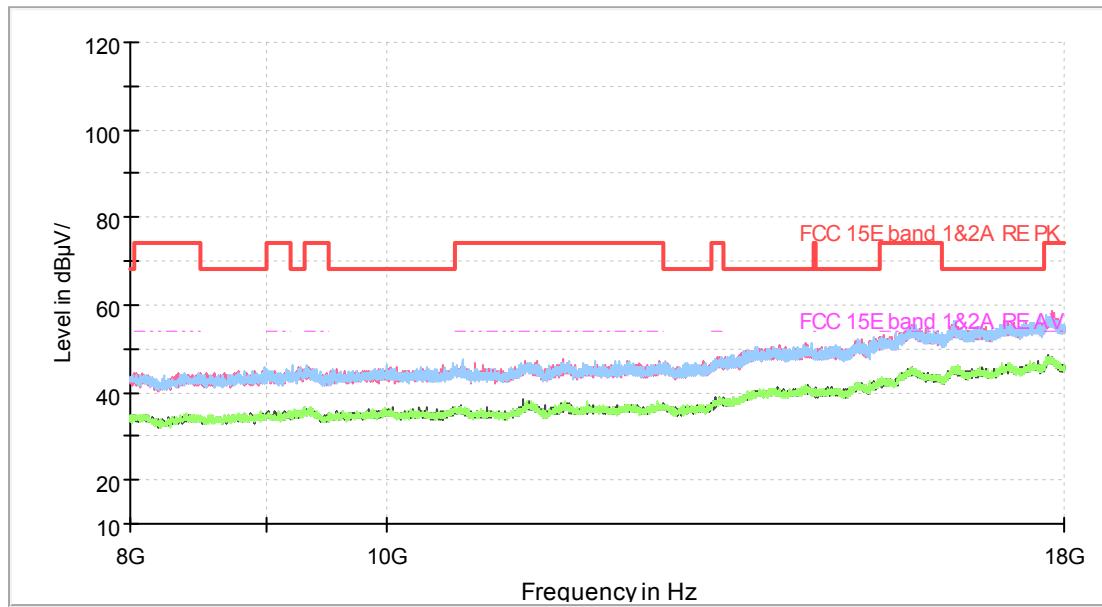


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1284.375000 | 43.57 | --- | 68.20 | 24.63 | 200.0 | V | 0.0 | 0.4 |
| 1364.000000 | --- | 34.45 | 54.00 | 19.55 | 200.0 | V | 188.0 | 0.8 |
| 1997.500000 | 49.30 | --- | 68.20 | 18.90 | 200.0 | V | 58.0 | 3.9 |
| 2243.375000 | --- | 35.90 | 54.00 | 18.10 | 100.0 | V | 109.0 | 4.5 |
| 2644.125000 | 47.74 | --- | 68.20 | 20.46 | 100.0 | V | 307.0 | 6.3 |
| 2834.000000 | --- | 38.13 | 54.00 | 15.87 | 200.0 | H | 242.0 | 7.0 |
| 3184.000000 | 49.75 | --- | 68.20 | 18.45 | 200.0 | V | 228.0 | 8.5 |
| 3554.125000 | 48.63 | --- | 68.20 | 19.57 | 100.0 | V | 231.0 | 9.1 |
| 4219.125000 | --- | 40.74 | 54.00 | 13.26 | 100.0 | V | 0.0 | 11.0 |
| 4997.000000 | --- | 42.07 | 54.00 | 11.93 | 200.0 | H | 353.0 | 12.9 |
| 6837.125000 | 54.33 | --- | 68.20 | 13.87 | 100.0 | V | 36.0 | 16.0 |
| 7510.875000 | --- | 44.98 | 54.00 | 9.02 | 200.0 | V | 168.0 | 17.3 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH48

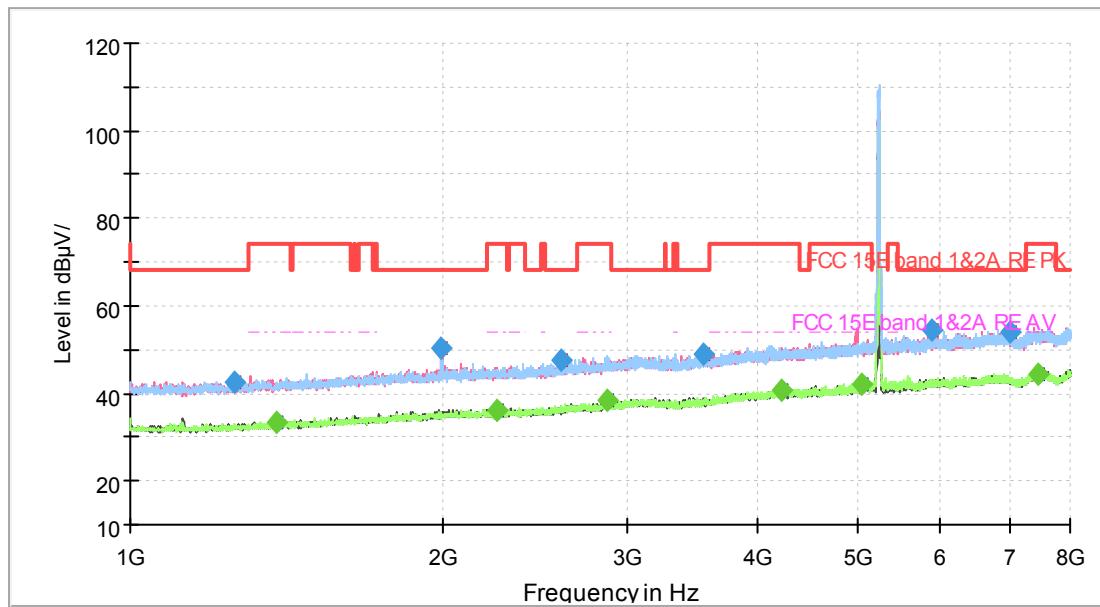

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

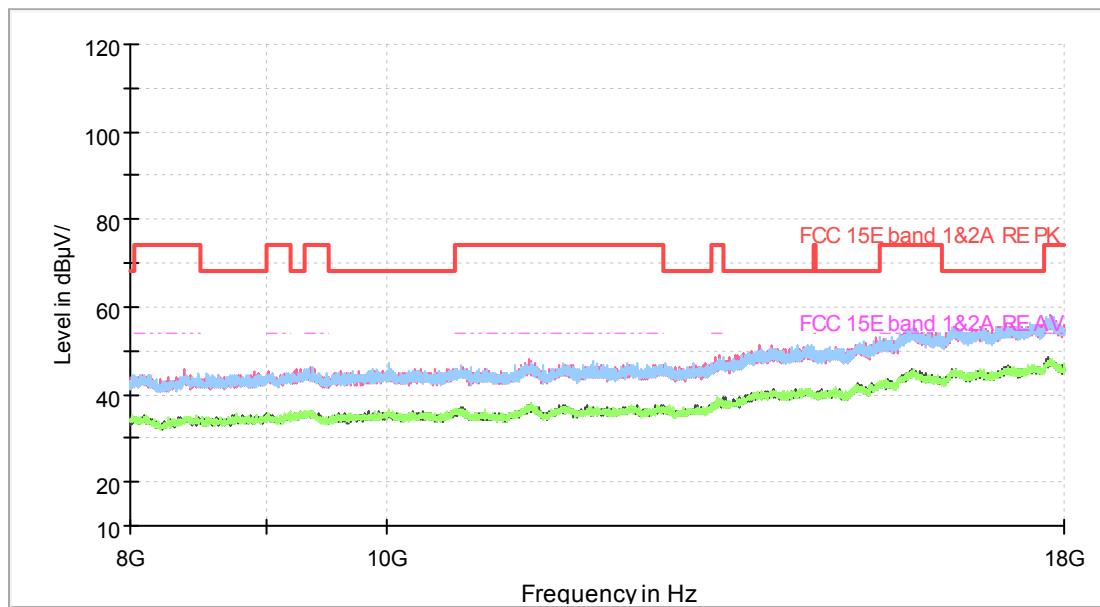


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1261.625000 | 42.35 | --- | 68.20 | 25.85 | 100.0 | V | 334.0 | 0.3 |
| 1383.250000 | --- | 33.26 | 54.00 | 20.74 | 200.0 | V | 55.0 | 0.8 |
| 1992.250000 | 50.20 | --- | 68.20 | 18.00 | 200.0 | V | 287.0 | 3.8 |
| 2247.750000 | --- | 36.05 | 54.00 | 17.95 | 200.0 | V | 38.0 | 4.6 |
| 2593.375000 | 47.59 | --- | 68.20 | 20.61 | 100.0 | H | 187.0 | 5.9 |
| 2876.000000 | --- | 38.30 | 54.00 | 15.70 | 100.0 | V | 220.0 | 7.5 |
| 3560.250000 | 48.94 | --- | 68.20 | 19.26 | 200.0 | V | 42.0 | 9.2 |
| 4226.125000 | --- | 40.87 | 54.00 | 13.13 | 100.0 | V | 346.0 | 11.1 |
| 5052.125000 | --- | 42.24 | 54.00 | 11.76 | 100.0 | V | 117.0 | 13.3 |
| 5899.125000 | 54.56 | --- | 68.20 | 13.64 | 200.0 | H | 300.0 | 14.7 |
| 7013.000000 | 54.16 | --- | 68.20 | 14.04 | 100.0 | V | 326.0 | 16.3 |
| 7468.000000 | --- | 44.27 | 54.00 | 9.73 | 100.0 | V | 270.0 | 17.3 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH149

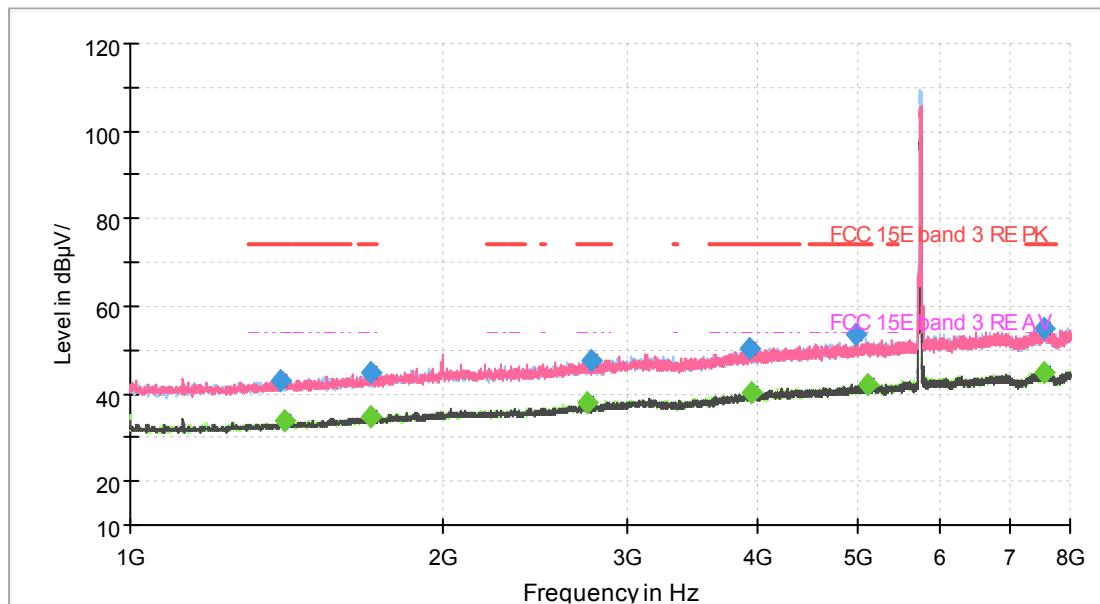

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

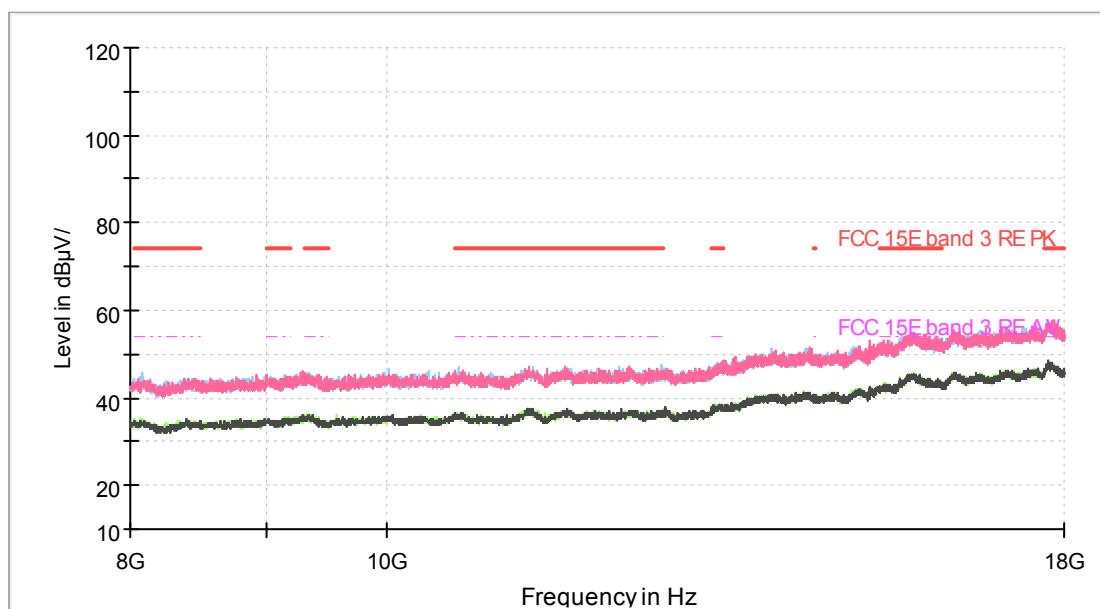


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1393.750000 | 43.22 | --- | 74.00 | 30.78 | 200.0 | V | 215.0 | 0.9 |
| 1406.000000 | --- | 33.63 | 54.00 | 20.37 | 200.0 | V | 332.0 | 1.0 |
| 1702.625000 | 44.70 | --- | 74.00 | 29.30 | 100.0 | V | 118.0 | 2.5 |
| 1704.375000 | --- | 34.78 | 54.00 | 19.22 | 100.0 | H | 302.0 | 2.6 |
| 2745.625000 | --- | 38.02 | 54.00 | 15.98 | 100.0 | V | 50.0 | 6.7 |
| 2776.250000 | 47.62 | --- | 74.00 | 26.38 | 200.0 | H | 294.0 | 6.7 |
| 3937.375000 | 50.22 | --- | 74.00 | 23.78 | 200.0 | H | 83.0 | 10.6 |
| 3949.625000 | --- | 40.43 | 54.00 | 13.57 | 200.0 | H | 0.0 | 10.6 |
| 4984.750000 | 53.70 | --- | 74.00 | 20.30 | 100.0 | V | 214.0 | 12.9 |
| 5111.625000 | --- | 42.28 | 54.00 | 11.72 | 200.0 | V | 147.0 | 13.5 |
| 7544.125000 | --- | 44.89 | 54.00 | 9.11 | 200.0 | H | 0.0 | 17.4 |
| 7558.125000 | 54.99 | --- | 74.00 | 19.01 | 100.0 | V | 50.0 | 17.5 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH157

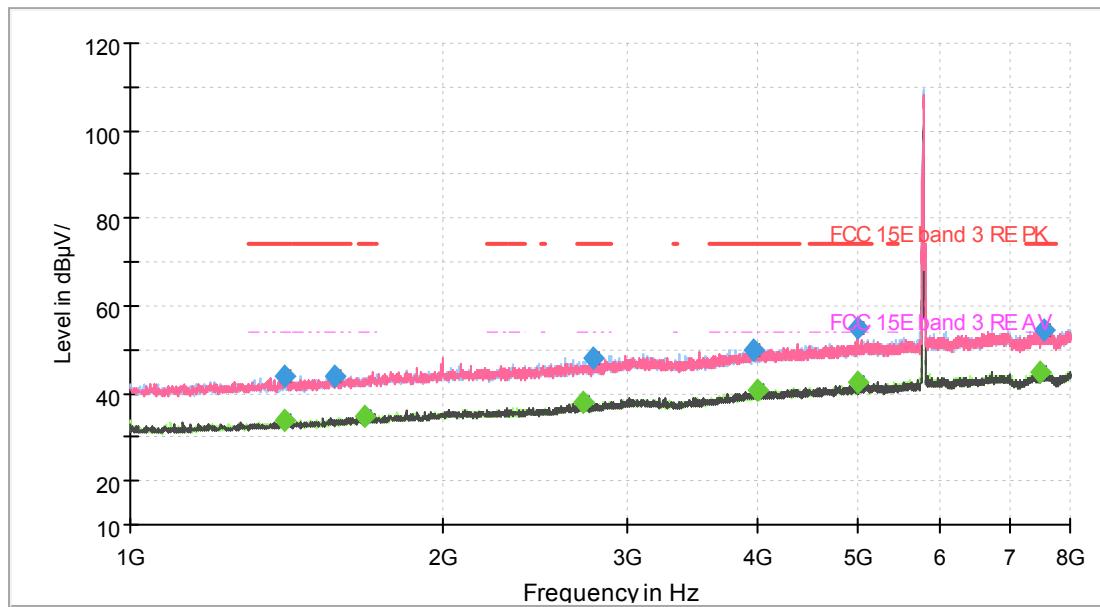

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

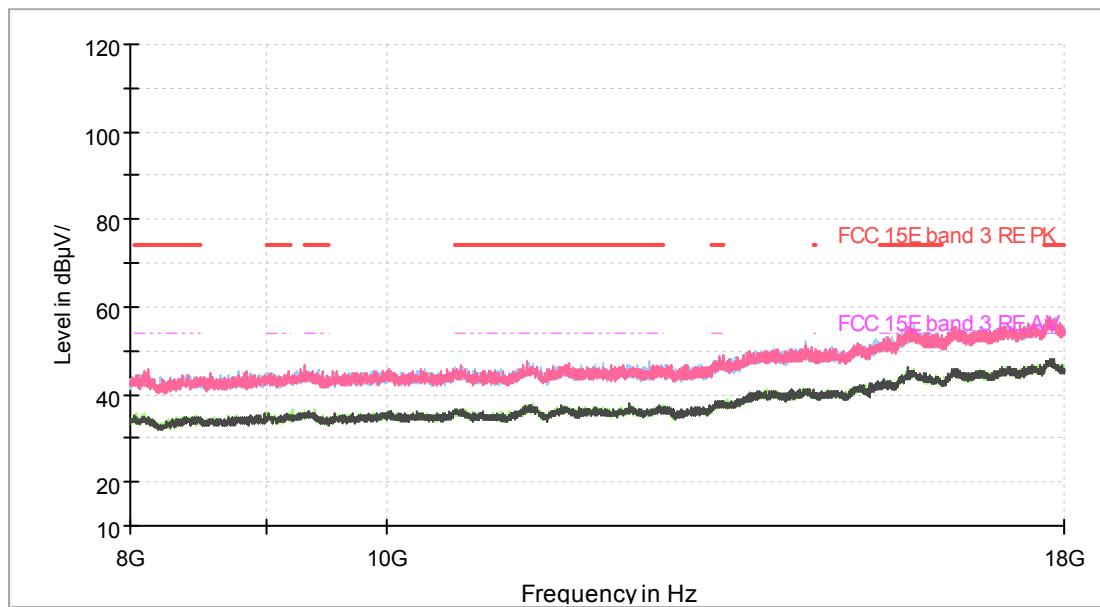


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1406.000000 | --- | 33.79 | 54.00 | 20.21 | 100.0 | V | 4.0 | 1.0 |
| 1409.500000 | 43.78 | --- | 74.00 | 30.22 | 200.0 | H | 24.0 | 1.1 |
| 1574.000000 | 44.03 | --- | 74.00 | 29.97 | 100.0 | V | 122.0 | 1.8 |
| 1679.000000 | --- | 34.54 | 54.00 | 19.46 | 100.0 | V | 354.0 | 2.2 |
| 2724.625000 | --- | 37.77 | 54.00 | 16.23 | 100.0 | H | 74.0 | 6.8 |
| 2790.250000 | 48.09 | --- | 74.00 | 25.91 | 200.0 | V | 0.0 | 6.9 |
| 3968.875000 | 49.95 | --- | 74.00 | 24.05 | 200.0 | H | 104.0 | 10.7 |
| 3998.625000 | --- | 40.70 | 54.00 | 13.30 | 100.0 | V | 96.0 | 10.7 |
| 4989.125000 | --- | 42.62 | 54.00 | 11.38 | 200.0 | V | 318.0 | 12.8 |
| 4995.250000 | 54.79 | --- | 74.00 | 19.21 | 100.0 | V | 215.0 | 12.8 |
| 7475.875000 | --- | 44.72 | 54.00 | 9.28 | 200.0 | H | 226.0 | 17.3 |
| 7549.375000 | 54.39 | --- | 74.00 | 19.61 | 200.0 | H | 55.0 | 17.4 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH165

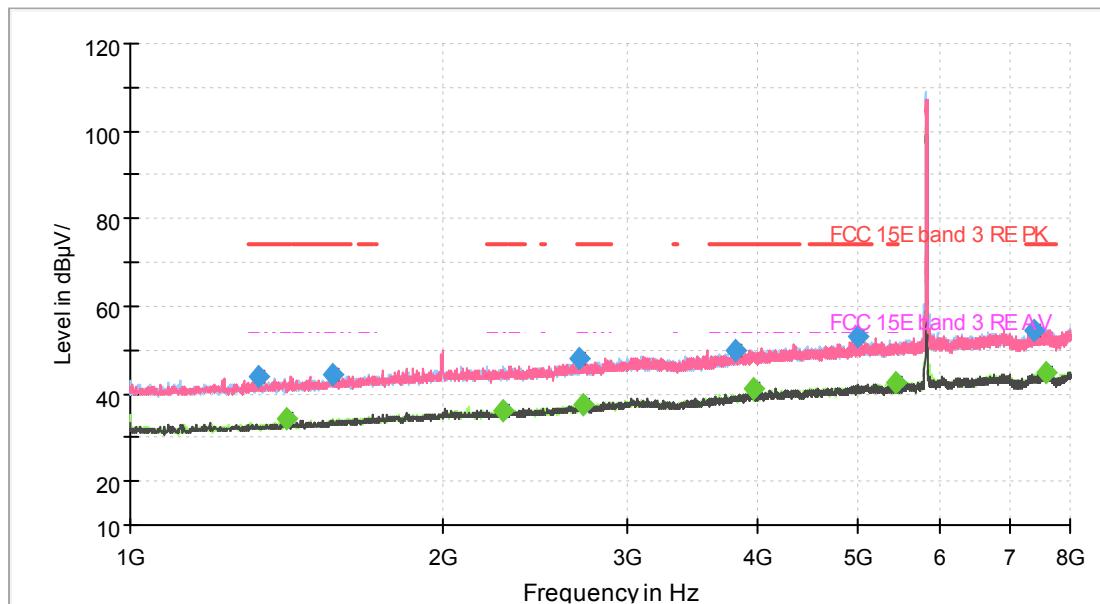

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

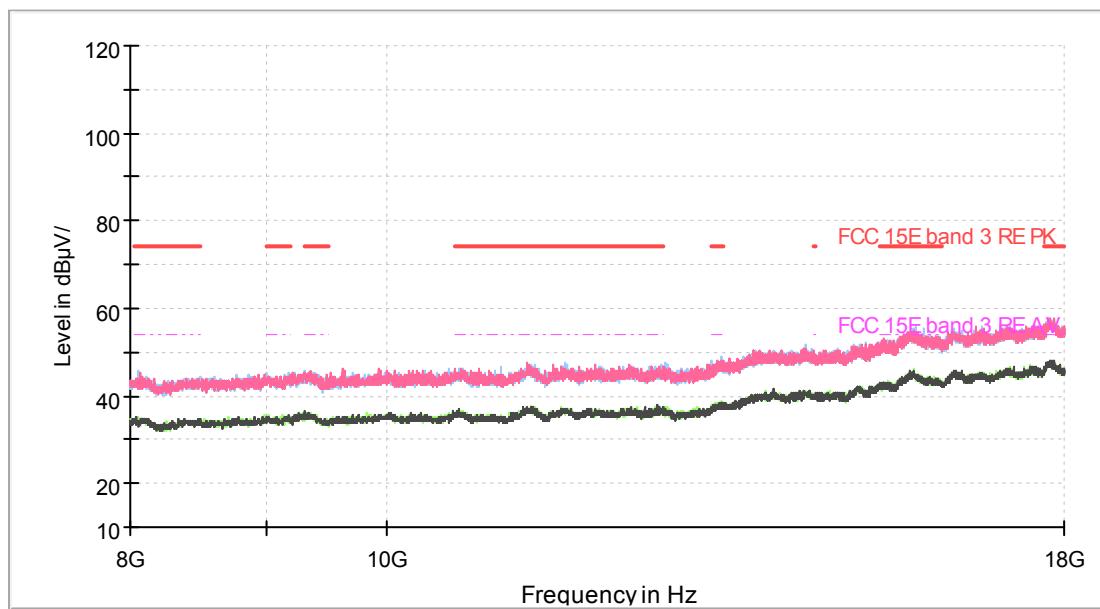


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1328.125000 | 43.72 | --- | 74.00 | 30.28 | 100.0 | H | 0.0 | 0.7 |
| 1413.000000 | --- | 34.32 | 54.00 | 19.68 | 100.0 | V | 214.0 | 1.1 |
| 1567.875000 | 44.57 | --- | 74.00 | 29.43 | 100.0 | H | 324.0 | 1.8 |
| 2282.750000 | --- | 35.98 | 54.00 | 18.02 | 200.0 | V | 0.0 | 4.8 |
| 2700.125000 | 47.99 | --- | 74.00 | 26.01 | 100.0 | V | 272.0 | 6.4 |
| 2728.125000 | --- | 37.71 | 54.00 | 16.29 | 100.0 | V | 44.0 | 6.8 |
| 3818.375000 | 49.99 | --- | 74.00 | 24.01 | 200.0 | H | 195.0 | 10.3 |
| 3973.250000 | --- | 41.04 | 54.00 | 12.96 | 100.0 | V | 305.0 | 10.7 |
| 4995.250000 | 53.20 | --- | 74.00 | 20.81 | 100.0 | V | 226.0 | 12.8 |
| 5439.750000 | --- | 42.34 | 54.00 | 11.66 | 100.0 | H | 135.0 | 13.7 |
| 7385.750000 | 54.52 | --- | 74.00 | 19.48 | 200.0 | V | 0.0 | 17.2 |
| 7581.750000 | --- | 44.69 | 54.00 | 9.31 | 200.0 | V | 189.0 | 17.5 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH38

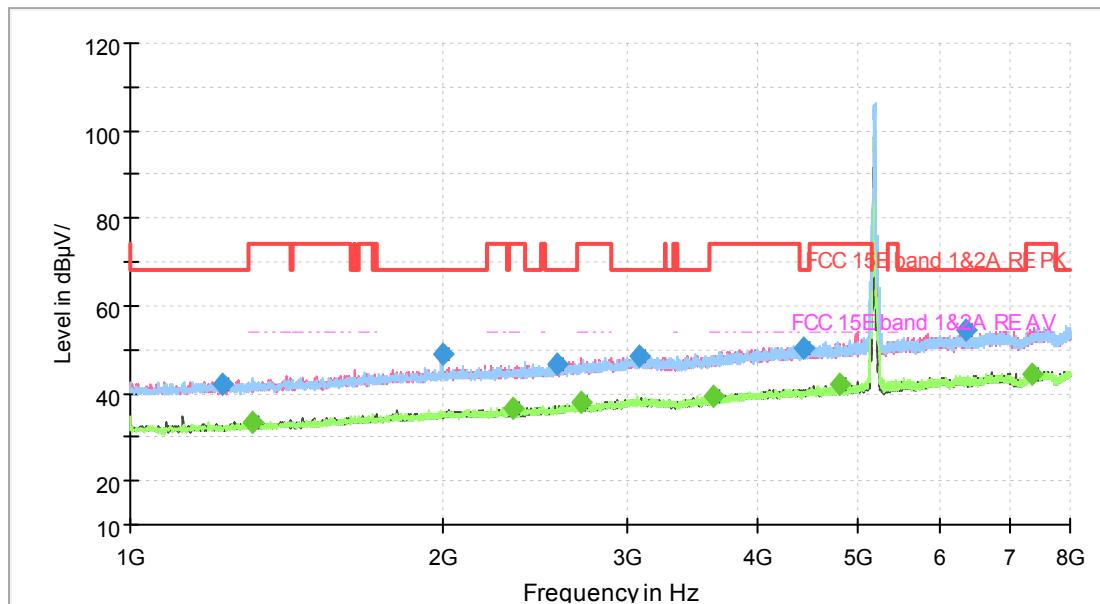

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

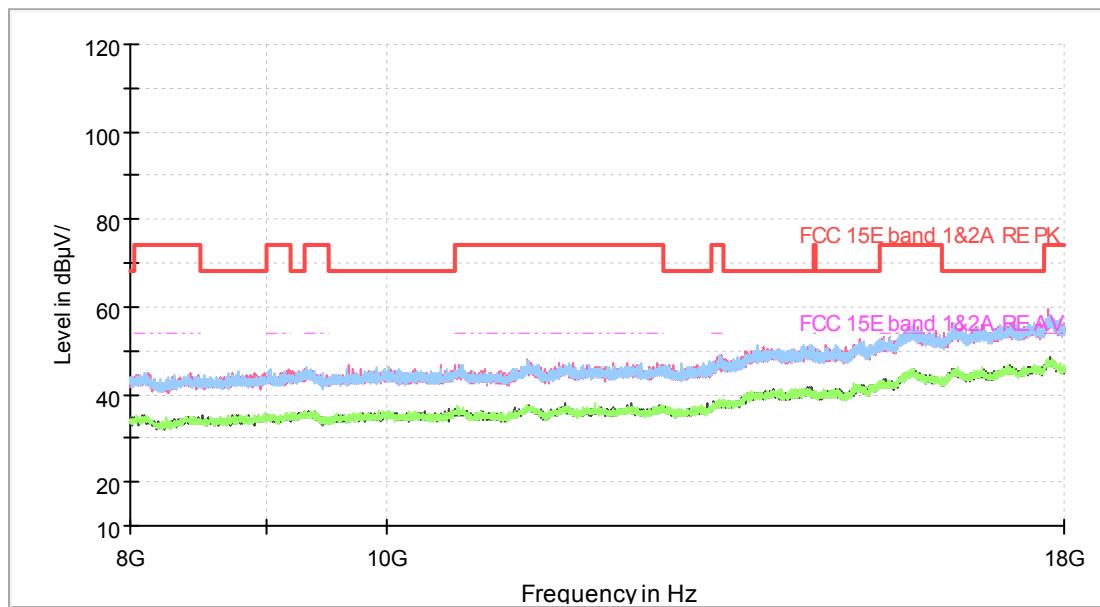


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1226.625000 | 42.20 | --- | 68.20 | 26.00 | 100.0 | V | 152.0 | 0.0 |
| 1313.250000 | --- | 33.38 | 54.00 | 20.62 | 200.0 | V | 193.0 | 0.7 |
| 1998.375000 | 48.93 | --- | 68.20 | 19.27 | 100.0 | H | 249.0 | 3.9 |
| 2327.375000 | --- | 36.51 | 54.00 | 17.49 | 100.0 | V | 308.0 | 5.0 |
| 2566.250000 | 46.72 | --- | 68.20 | 21.48 | 200.0 | V | 79.0 | 6.0 |
| 2717.625000 | --- | 38.01 | 54.00 | 15.99 | 100.0 | H | 23.0 | 6.7 |
| 3086.875000 | 48.43 | --- | 68.20 | 19.77 | 200.0 | V | 314.0 | 8.4 |
| 3636.375000 | --- | 39.38 | 54.00 | 14.62 | 200.0 | H | 29.0 | 9.5 |
| 4443.125000 | 50.28 | --- | 68.20 | 17.92 | 200.0 | H | 191.0 | 11.5 |
| 4801.000000 | --- | 42.24 | 54.00 | 11.76 | 100.0 | V | 284.0 | 12.7 |
| 6341.000000 | 54.58 | --- | 68.20 | 13.62 | 100.0 | V | 192.0 | 15.4 |
| 7355.125000 | --- | 44.60 | 54.00 | 9.40 | 100.0 | H | 285.0 | 17.2 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH46

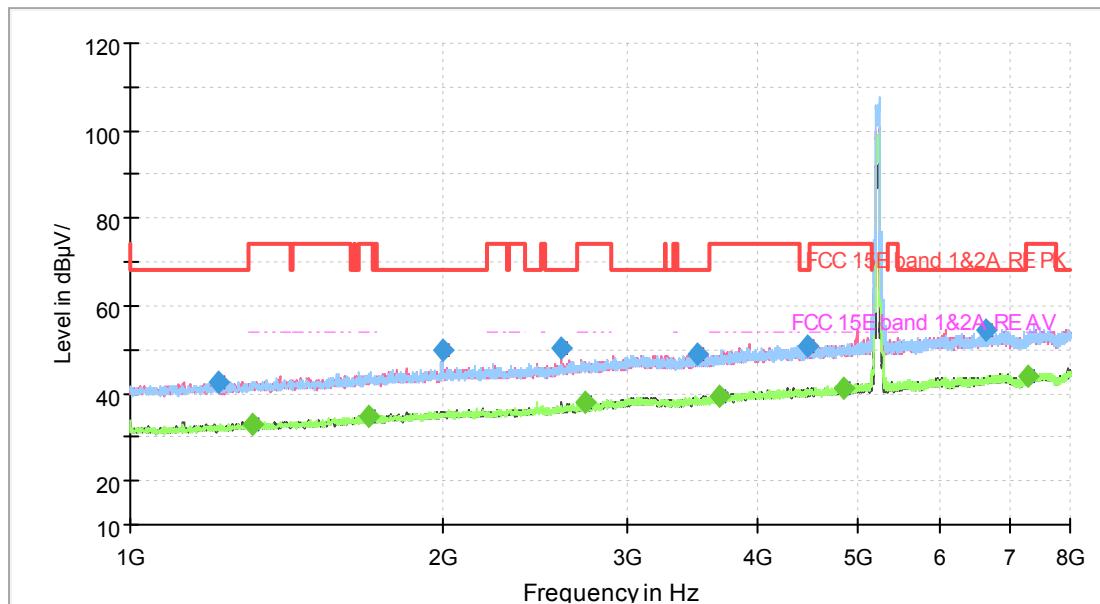

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

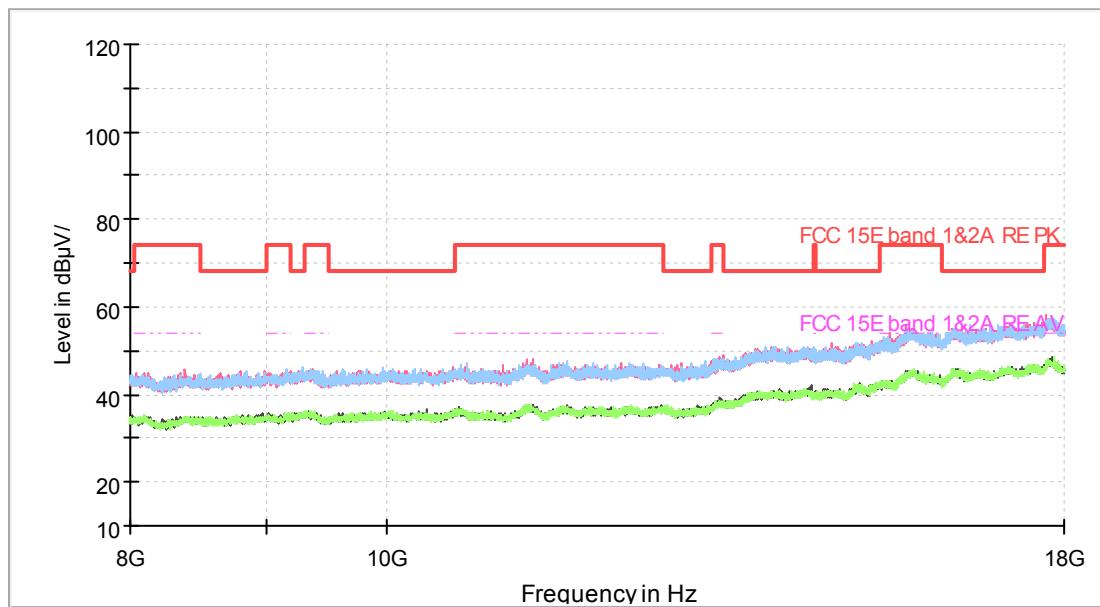


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1217.000000 | 42.71 | --- | 68.20 | 25.49 | 200.0 | V | 330.0 | 0.0 |
| 1308.875000 | --- | 32.88 | 54.00 | 21.12 | 200.0 | V | 177.0 | 0.6 |
| 1696.500000 | --- | 34.91 | 54.00 | 19.09 | 100.0 | V | 59.0 | 2.4 |
| 1998.375000 | 50.06 | --- | 68.20 | 18.14 | 200.0 | V | 64.0 | 3.9 |
| 2593.375000 | 50.48 | --- | 68.20 | 17.72 | 200.0 | V | 272.0 | 5.9 |
| 2732.500000 | --- | 37.89 | 54.00 | 16.11 | 100.0 | V | 160.0 | 6.8 |
| 3506.875000 | 48.99 | --- | 68.20 | 19.21 | 200.0 | V | 177.0 | 8.9 |
| 3677.500000 | --- | 39.35 | 54.00 | 14.65 | 200.0 | H | 5.0 | 9.7 |
| 4470.250000 | 50.92 | --- | 68.20 | 17.28 | 200.0 | V | 43.0 | 11.6 |
| 4838.625000 | --- | 41.28 | 54.00 | 12.72 | 200.0 | V | 109.0 | 12.6 |
| 6653.375000 | 54.66 | --- | 68.20 | 13.54 | 200.0 | H | 0.0 | 15.9 |
| 7304.375000 | --- | 43.88 | 54.00 | 10.12 | 200.0 | H | 38.0 | 17.0 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH151

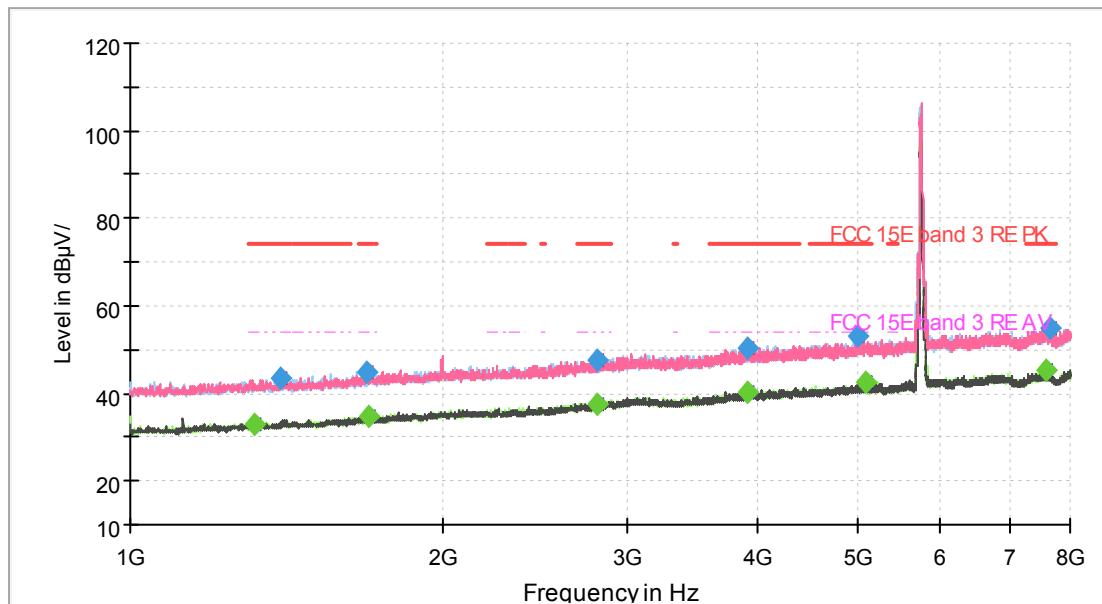

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

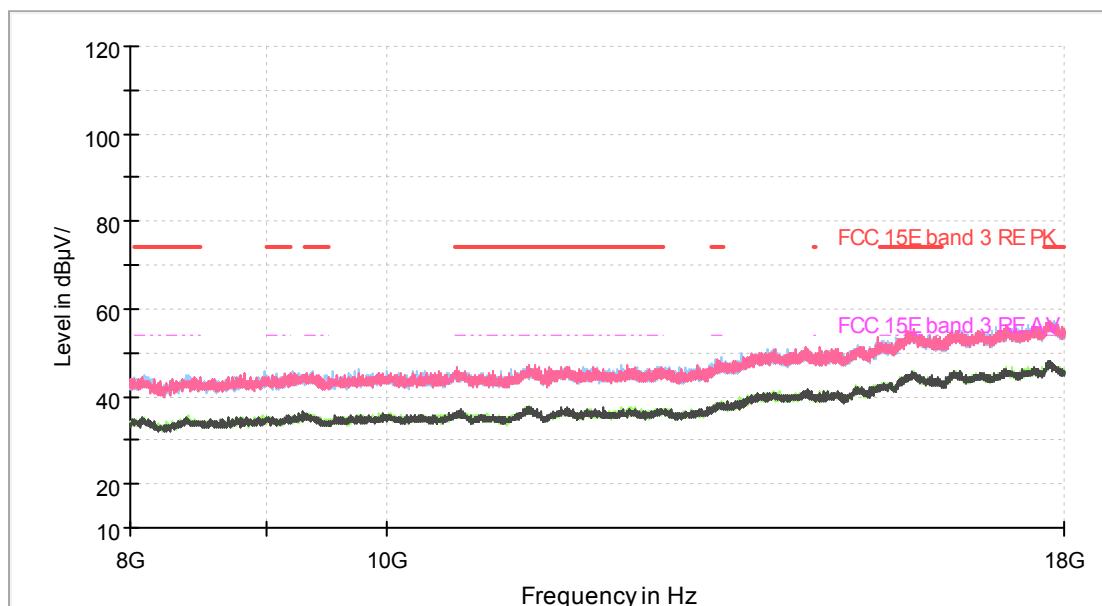


Radiates Emission from 8GHz to 18GHz




| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1314.125000 | --- | 32.94 | 54.00 | 21.06 | 100.0 | H | 6.0 | 0.7 |
| 1392.875000 | 43.38 | --- | 74.00 | 30.62 | 200.0 | H | 223.0 | 0.9 |
| 1684.250000 | 44.67 | --- | 74.00 | 29.33 | 100.0 | V | 113.0 | 2.2 |
| 1693.875000 | --- | 34.72 | 54.00 | 19.28 | 200.0 | H | 210.0 | 2.4 |
| 2806.000000 | 47.61 | --- | 74.00 | 26.39 | 200.0 | V | 76.0 | 7.0 |
| 2809.500000 | --- | 37.65 | 54.00 | 16.35 | 200.0 | V | 193.0 | 7.0 |
| 3914.625000 | --- | 40.29 | 54.00 | 13.71 | 200.0 | V | 8.0 | 10.5 |
| 3922.500000 | 50.43 | --- | 74.00 | 23.57 | 200.0 | V | 94.0 | 10.6 |
| 4997.875000 | 53.17 | --- | 74.00 | 20.83 | 100.0 | V | 265.0 | 12.9 |
| 5079.250000 | --- | 42.38 | 54.00 | 11.62 | 200.0 | V | 248.0 | 13.5 |
| 7594.000000 | --- | 45.38 | 54.00 | 8.62 | 100.0 | V | 165.0 | 17.6 |
| 7639.500000 | 54.75 | --- | 74.00 | 19.25 | 100.0 | V | 227.0 | 17.7 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

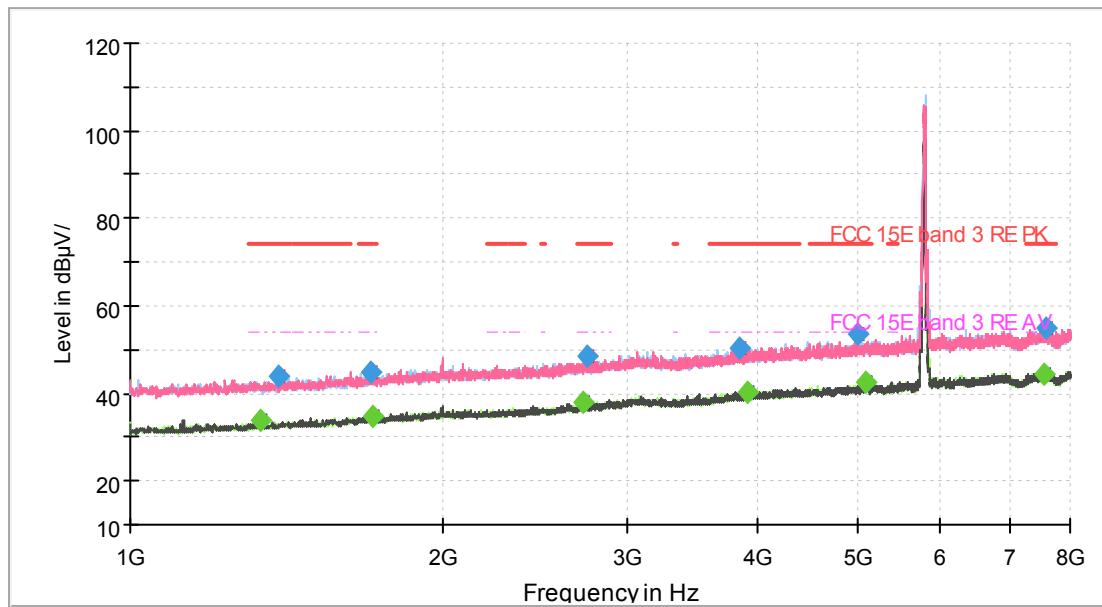802.11n (HT40) CH159

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

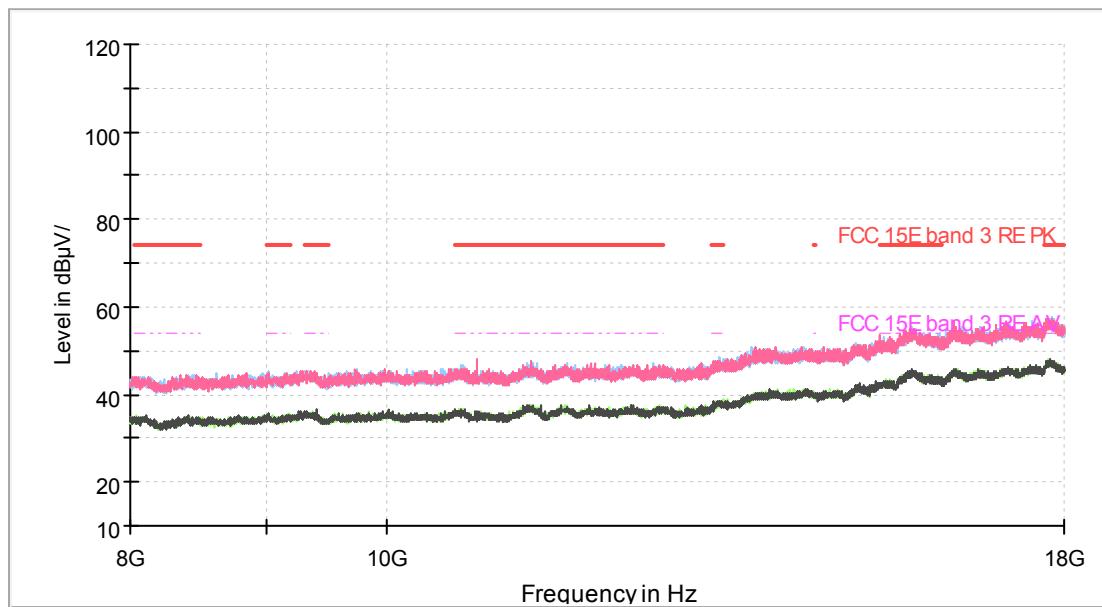


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1332.500000 | --- | 33.87 | 54.00 | 20.13 | 200.0 | H | 35.0 | 0.7 |
| 1387.625000 | 43.75 | --- | 74.00 | 30.25 | 100.0 | H | 130.0 | 0.8 |
| 1700.875000 | 45.04 | --- | 74.00 | 28.96 | 100.0 | V | 105.0 | 2.5 |
| 1708.750000 | --- | 34.60 | 54.00 | 19.40 | 200.0 | V | 26.0 | 2.5 |
| 2722.000000 | --- | 37.86 | 54.00 | 16.14 | 200.0 | H | 59.0 | 6.8 |
| 2753.500000 | 48.33 | --- | 74.00 | 25.67 | 100.0 | V | 99.0 | 6.7 |
| 3848.125000 | 50.16 | --- | 74.00 | 23.84 | 100.0 | H | 147.0 | 10.3 |
| 3914.625000 | --- | 40.38 | 54.00 | 13.62 | 100.0 | H | 265.0 | 10.5 |
| 4999.625000 | 53.49 | --- | 74.00 | 20.51 | 100.0 | V | 263.0 | 12.9 |
| 5089.750000 | --- | 42.52 | 54.00 | 11.48 | 200.0 | V | 230.0 | 13.6 |
| 7536.250000 | --- | 44.55 | 54.00 | 9.45 | 100.0 | V | 245.0 | 17.4 |
| 7575.625000 | 55.11 | --- | 74.00 | 18.89 | 100.0 | H | 203.0 | 17.5 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (HT80) CH42

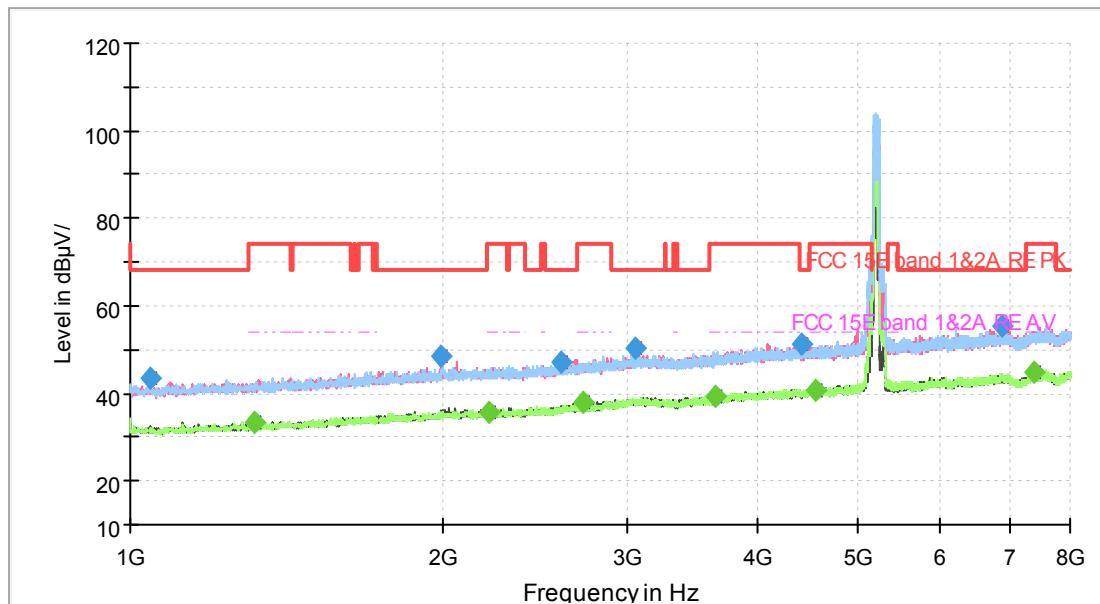

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

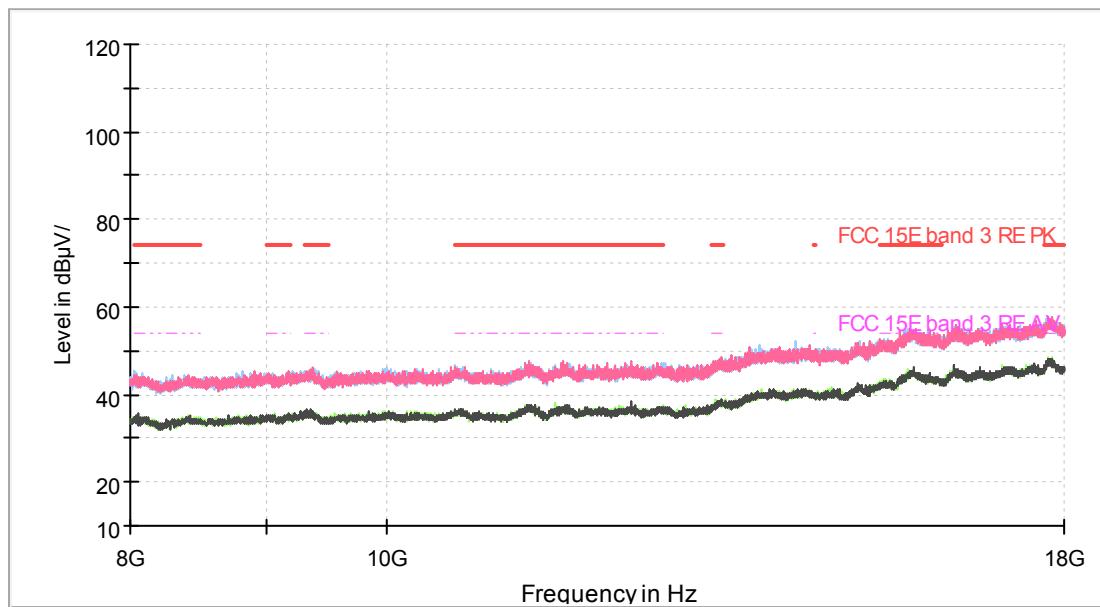


Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1045.500000 | 43.57 | --- | 68.20 | 24.63 | 100.0 | H | 262.0 | -1.0 |
| 1315.000000 | --- | 33.33 | 54.00 | 20.67 | 100.0 | H | 116.0 | 0.7 |
| 1992.250000 | 48.46 | --- | 68.20 | 19.74 | 200.0 | V | 88.0 | 3.8 |
| 2208.375000 | --- | 35.89 | 54.00 | 18.11 | 200.0 | V | 317.0 | 4.4 |
| 2598.625000 | 47.29 | --- | 68.20 | 20.91 | 200.0 | V | 242.0 | 5.9 |
| 2720.250000 | --- | 37.89 | 54.00 | 16.11 | 100.0 | V | 0.0 | 6.8 |
| 3059.750000 | 50.12 | --- | 68.20 | 18.08 | 100.0 | H | 0.0 | 8.3 |
| 3646.000000 | --- | 39.12 | 54.00 | 14.88 | 200.0 | V | 354.0 | 9.6 |
| 4423.875000 | 51.09 | --- | 68.20 | 17.11 | 100.0 | V | 158.0 | 11.4 |
| 4556.875000 | --- | 40.59 | 54.00 | 13.41 | 200.0 | V | 213.0 | 11.9 |
| 6891.375000 | 55.21 | --- | 68.20 | 12.99 | 100.0 | H | 133.0 | 16.1 |
| 7377.000000 | --- | 45.02 | 54.00 | 8.98 | 100.0 | V | 239.0 | 17.2 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (HT80) CH155

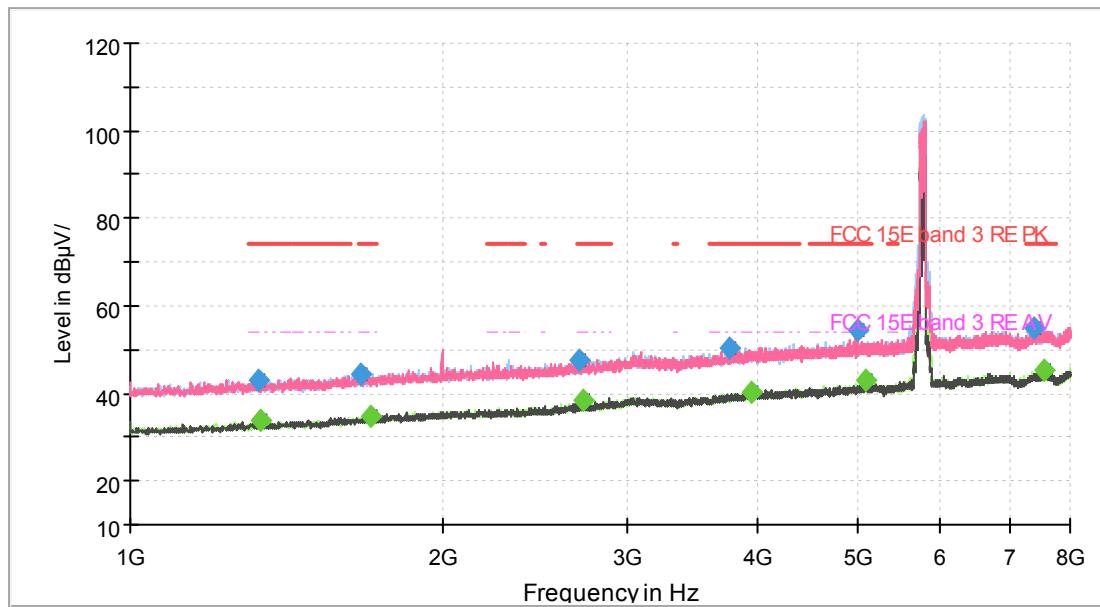

Radiates Emission from 1GHz to 8GHz

Note: The signal beyond the limit is carrier.

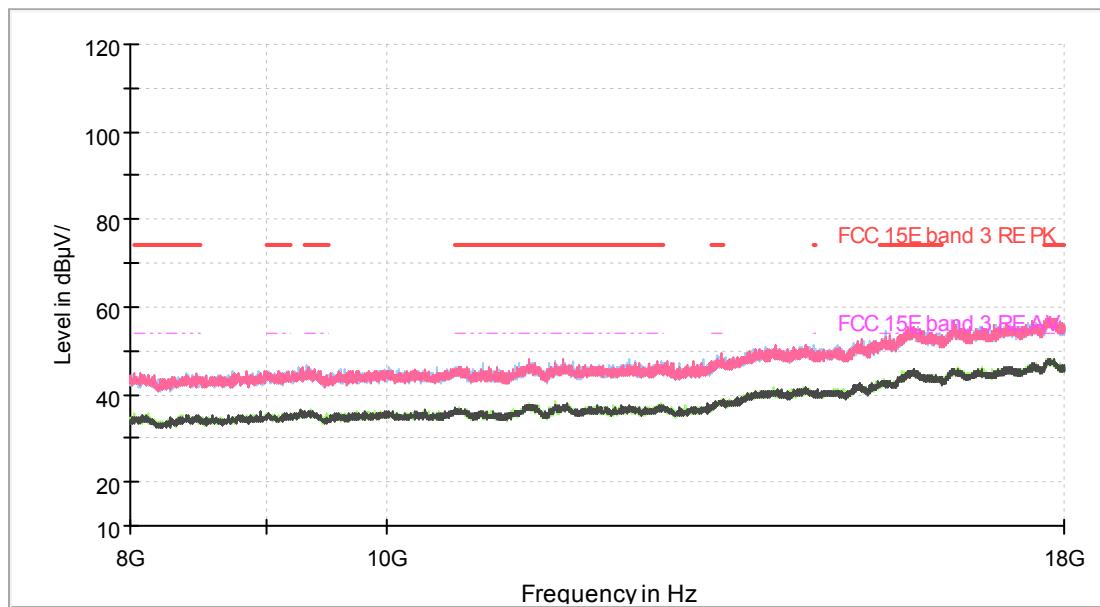

Radiates Emission from 8GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-------------|--------------|---------------|--------------|
| 1328.125000 | 43.07 | --- | 74.00 | 30.93 | 200.0 | V | 182.0 | 0.7 |
| 1331.625000 | --- | 33.65 | 54.00 | 20.35 | 200.0 | H | 182.0 | 0.7 |
| 1662.375000 | 44.15 | --- | 74.00 | 29.85 | 200.0 | V | 201.0 | 2.2 |
| 1704.375000 | --- | 34.66 | 54.00 | 19.34 | 200.0 | H | 189.0 | 2.6 |
| 2701.875000 | 47.78 | --- | 74.00 | 26.22 | 100.0 | V | 0.0 | 6.4 |
| 2726.375000 | --- | 38.25 | 54.00 | 15.75 | 200.0 | V | 0.0 | 6.8 |
| 3771.125000 | 50.39 | --- | 74.00 | 23.61 | 200.0 | V | 207.0 | 10.0 |
| 3948.750000 | --- | 40.26 | 54.00 | 13.74 | 100.0 | H | 0.0 | 10.6 |
| 4992.625000 | 54.56 | --- | 74.00 | 19.44 | 100.0 | V | 224.0 | 12.8 |
| 5081.000000 | --- | 42.78 | 54.00 | 11.22 | 200.0 | H | 324.0 | 13.5 |
| 7370.000000 | 54.74 | --- | 74.00 | 19.26 | 200.0 | H | 152.0 | 17.2 |
| 7558.125000 | --- | 45.18 | 54.00 | 8.82 | 100.0 | V | 69.0 | 17.5 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

5.6. Conducted Emission

Ambient condition


| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Methods of Measurement

The EUT IS placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the LISN Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9kHz, VBW is set to 30kHz The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

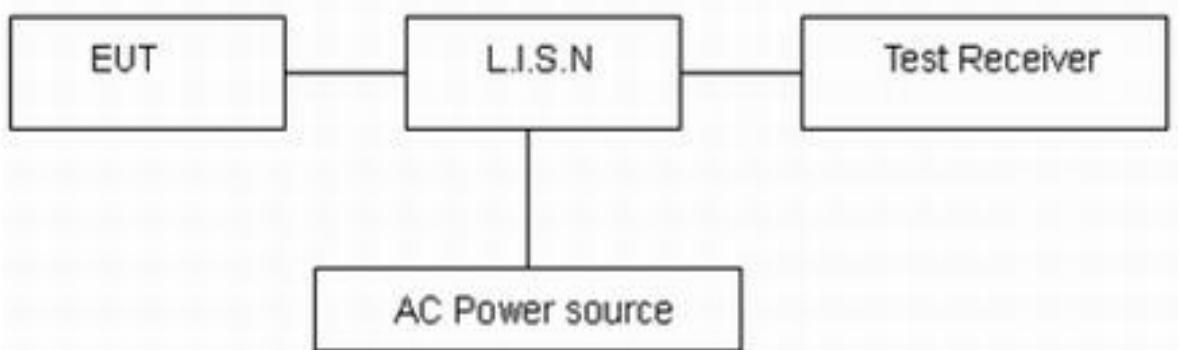

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

| Frequency (MHz) | Conducted Limits(dB μ V) | |
|--------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 to 56 * | 56 to 46* |
| 0.5 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |


*: Decreases with the logarithm of the frequency.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

Test Results:


Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes with all channels, 802.11a, Channel 36 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

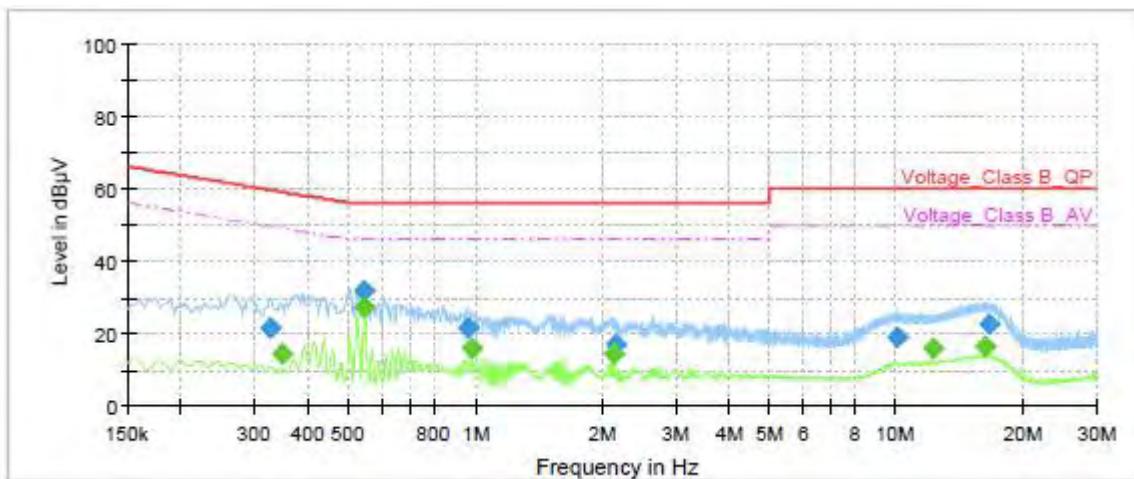

| Frequency (MHz) | QuasiPeak (dB μ V) | Average (dB μ V) | Limit (dB μ V) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------------|----------------------|--------------------|-------------|-----------------|-----------------|------|--------|------------|
| 0.33 | 21.31 | --- | 59.57 | 38.26 | 1000.0 | 9.000 | L1 | ON | 19 |
| 0.35 | --- | 14.10 | 49.01 | 34.91 | 1000.0 | 9.000 | L1 | ON | 19 |
| 0.55 | --- | 27.43 | 46.00 | 18.57 | 1000.0 | 9.000 | L1 | ON | 19 |
| 0.55 | 31.56 | --- | 56.00 | 24.44 | 1000.0 | 9.000 | L1 | ON | 19 |
| 0.96 | 21.60 | --- | 56.00 | 34.40 | 1000.0 | 9.000 | L1 | ON | 19 |
| 0.98 | --- | 15.90 | 46.00 | 30.10 | 1000.0 | 9.000 | L1 | ON | 19 |
| 2.14 | --- | 14.49 | 46.00 | 31.51 | 1000.0 | 9.000 | L1 | ON | 19 |
| 2.15 | 16.78 | --- | 56.00 | 39.22 | 1000.0 | 9.000 | L1 | ON | 19 |
| 10.06 | 19.05 | --- | 60.00 | 40.95 | 1000.0 | 9.000 | L1 | ON | 19 |
| 12.24 | --- | 15.72 | 50.00 | 34.28 | 1000.0 | 9.000 | L1 | ON | 19 |
| 16.23 | --- | 16.53 | 50.00 | 33.47 | 1000.0 | 9.000 | L1 | ON | 19 |
| 16.55 | 22.41 | --- | 60.00 | 37.59 | 1000.0 | 9.000 | L1 | ON | 20 |

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 KHz to 30 MHz

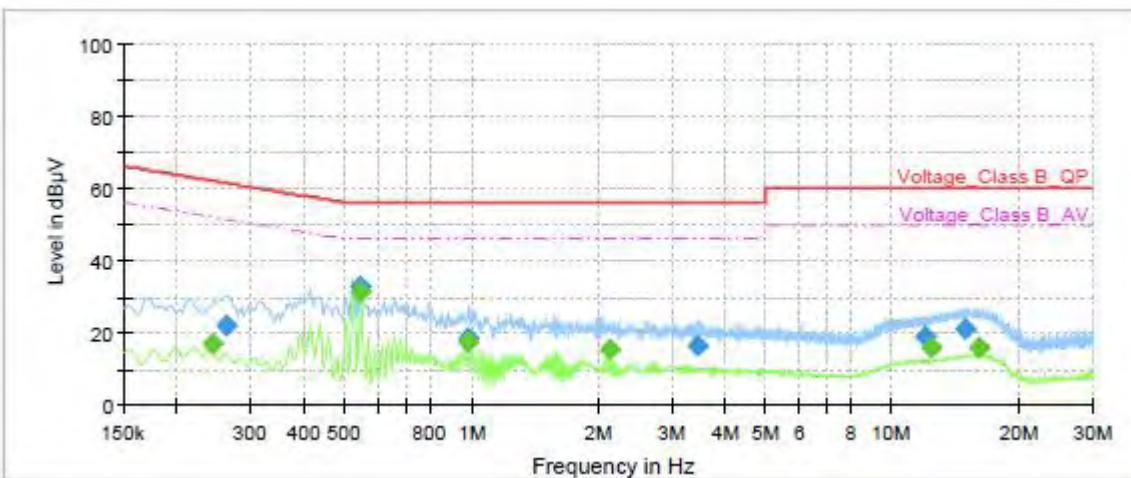

| Frequency (MHz) | QuasiPeak (dB μ V) | Average (dB μ V) | Limit (dB μ V) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------------|----------------------|--------------------|-------------|-----------------|-----------------|------|--------|------------|
| 0.24 | --- | 16.72 | 52.02 | 35.30 | 1000.0 | 9.000 | N | ON | 19 |
| 0.26 | 22.19 | --- | 61.35 | 39.16 | 1000.0 | 9.000 | N | ON | 19 |
| 0.55 | --- | 31.33 | 46.00 | 14.67 | 1000.0 | 9.000 | N | ON | 19 |
| 0.55 | 33.06 | --- | 56.00 | 22.94 | 1000.0 | 9.000 | N | ON | 19 |
| 0.98 | --- | 17.29 | 46.00 | 28.71 | 1000.0 | 9.000 | N | ON | 19 |
| 0.99 | 18.61 | --- | 56.00 | 37.39 | 1000.0 | 9.000 | N | ON | 19 |
| 2.14 | --- | 15.20 | 46.00 | 30.80 | 1000.0 | 9.000 | N | ON | 19 |
| 3.47 | 16.37 | --- | 56.00 | 39.63 | 1000.0 | 9.000 | N | ON | 19 |
| 12.03 | 18.86 | --- | 60.00 | 41.14 | 1000.0 | 9.000 | N | ON | 19 |
| 12.40 | --- | 15.79 | 50.00 | 34.21 | 1000.0 | 9.000 | N | ON | 19 |
| 14.86 | 20.77 | --- | 60.00 | 39.23 | 1000.0 | 9.000 | N | ON | 19 |
| 16.11 | --- | 16.14 | 50.00 | 33.86 | 1000.0 | 9.000 | N | ON | 19 |

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz



6. Main Test Instruments

| Name | Manufacturer | Type | Serial Number | Calibration Date | Expiration Date |
|--------------------------------------|--------------|-------------------|-----------------|------------------|-----------------|
| Spectrum Analyzer | R&S | FSV40 | 15195-01-00 | 2019-05-19 | 2020-05-18 |
| EMI Test Receiver | R&S | ESCI | 100948 | 2019-05-19 | 2020-05-18 |
| Loop Antenna | SCHWARZBECK | FMZB1519 | 1519-047 | 2017-09-26 | 2020-09-25 |
| TRILOG Broadband Antenna | SCHWARZBECK | VULB 9163 | 9163-201 | 2017-11-18 | 2020-11-17 |
| Double Ridged Waveguide Horn Antenna | R&S | HF907 | 100126 | 2018-07-07 | 2020-07-06 |
| Standard Gain Horn | ETS-Lindgren | 3160-09 | 00102643 | 2018-06-20 | 2020-06-19 |
| Standard Gain Horn | STEATITE | QSH-SL-26-40-K-15 | 16779 | 2017-07-20 | 2020-07-19 |
| Broadband Horn Antenna | SCHWARZBECK | BBHA 9120D | 430 | 2018-07-07 | 2020-07-06 |
| EMI Test Receiver | R&S | ESR | 101667 | 2019-05-19 | 2020-05-18 |
| LISN | R&S | ENV216 | 101171 | 2018-12-15 | 2021-12-14 |
| Spectrum Analyzer | KEYSIGHT | N9020A | MY54420163 | 2019-12-15 | 2020-12-14 |
| RF Cable | Agilent | SMA 15cm | 0001 | 2019-12-13 | 2020-06-12 |
| TEMPERATURE CHAMBER | WEISS | VT4002 | 582261194500 10 | 2019-12-15 | 2020-12-14 |
| AV Power Meter | R&S | NRP | 104306 | 2019-05-19 | 2020-05-18 |
| Power Probe | R&S | NRP-Z21 | 104799 | 2019-05-19 | 2020-05-18 |
| DC Power Supply | GWINSTEK | GPS-3030D | GEP882653 | 2019-05-19 | 2020-05-18 |
| Software | R&S | EMC32 | 9.26.0 | / | / |

*****END OF REPORT*****