

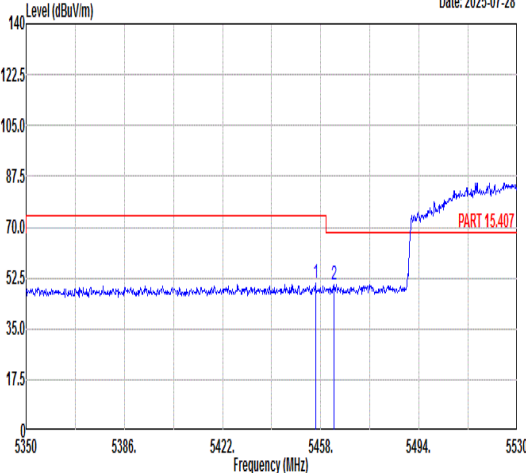
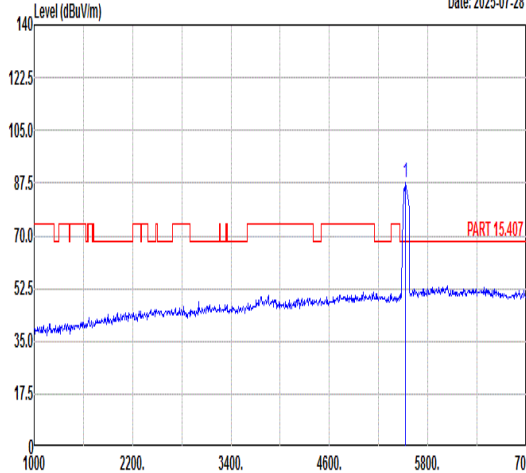


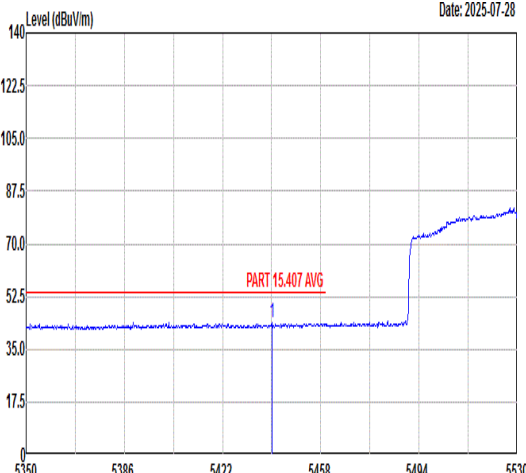

Mode	27																																																			
	Band Edge - L																																																			
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_5530MHz																																																			
ANT	22																																																			
Pol.	Vertical	Fundamental																																																		
Peak	Level (dBuV/m) Date: 2025-07-28  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5456.02</td><td>50.62</td><td>74.00</td><td>-23.38</td><td>38.87</td><td>35.47</td><td>9.69</td><td>33.41</td><td>390</td><td>234 PEAK</td></tr><tr><td>2 5462.86</td><td>50.17</td><td>68.30</td><td>-18.13</td><td>38.41</td><td>35.48</td><td>9.69</td><td>33.41</td><td>390</td><td>234 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5456.02	50.62	74.00	-23.38	38.87	35.47	9.69	33.41	390	234 PEAK	2 5462.86	50.17	68.30	-18.13	38.41	35.48	9.69	33.41	390	234 PEAK	Level (dBuV/m) Date: 2025-07-28  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5530.00</td><td>87.86</td><td>-----</td><td>-----</td><td>76.01</td><td>35.54</td><td>9.72</td><td>33.41</td><td>390</td><td>234 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5530.00	87.86	-----	-----	76.01	35.54	9.72	33.41	390	234 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																										
1 5456.02	50.62	74.00	-23.38	38.87	35.47	9.69	33.41	390	234 PEAK																																											
2 5462.86	50.17	68.30	-18.13	38.41	35.48	9.69	33.41	390	234 PEAK																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																											
1 5530.00	87.86	-----	-----	76.01	35.54	9.72	33.41	390	234 PEAK																																											
Avg	Level (dBuV/m) Date: 2025-07-28  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5440.18</td><td>44.03</td><td>54.00</td><td>-9.97</td><td>32.30</td><td>35.46</td><td>9.68</td><td>33.41</td><td>390</td><td>234 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5440.18	44.03	54.00	-9.97	32.30	35.46	9.68	33.41	390	234 AVERAGE	Level (dBuV/m) Date: 2025-07-28  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5530.00</td><td>79.92</td><td>-----</td><td>-----</td><td>68.07</td><td>35.54</td><td>9.72</td><td>33.41</td><td>390</td><td>234 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5530.00	79.92	-----	-----	68.07	35.54	9.72	33.41	390	234 AVERAGE										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																											
1 5440.18	44.03	54.00	-9.97	32.30	35.46	9.68	33.41	390	234 AVERAGE																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																											
1 5530.00	79.92	-----	-----	68.07	35.54	9.72	33.41	390	234 AVERAGE																																											

Mode	27																																																							
	Band Edge - R																																																							
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_5530MHz																																																							
ANT	22																																																							
Pol.	Vertical	Fundamental																																																						
Peak	Date: 2025-07-28 Level (dBuV/m) 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 Frequency (MHz) 5530 5577 5624 5671 5718 5765 Part 15.407 ↑ <table><tr><th></th><th>Limit</th><th>Margn</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5762.65</td><td>52.62</td><td>68.30</td><td>-15.68</td><td>40.10</td><td>35.87</td><td>10.10</td><td>33.45</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>390</td><td>deg</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>234 PEAK</td></tr></table>		Limit	Margn	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	1	5762.65	52.62	68.30	-15.68	40.10	35.87	10.10	33.45								390	deg									234 PEAK	Blank
	Limit	Margn	Read	Ant	Cable	Preamp	APos	TPos																																																
Freq	Level	Line	(dB)	Level Factor	Loss Factor			Remark																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm																																																
1	5762.65	52.62	68.30	-15.68	40.10	35.87	10.10	33.45																																																
							390	deg																																																
								234 PEAK																																																

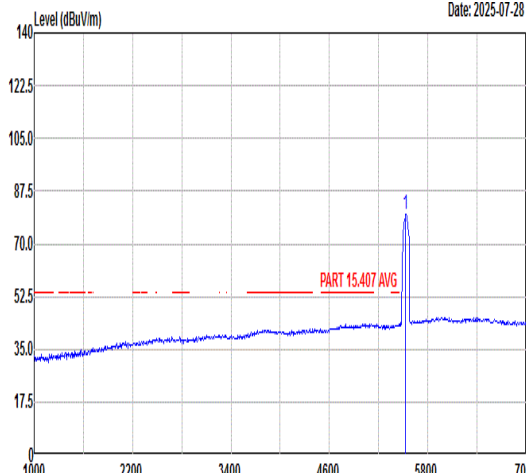

Mode	28																																																																																																							
	Band Edge - L																																																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_5610MHz																																																																																																							
ANT	22																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																	
Peak	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5354.68</td><td>51.18</td><td>74.00</td><td>-22.82</td><td>39.81</td><td>35.41</td><td>9.39</td><td>33.43</td><td>200</td><td>42 PEAK</td></tr><tr><td>2</td><td>5467.26</td><td>50.14</td><td>68.30</td><td>-18.16</td><td>38.38</td><td>35.48</td><td>9.69</td><td>33.41</td><td>200</td><td>42 PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5354.68	51.18	74.00	-22.82	39.81	35.41	9.39	33.43	200	42 PEAK	2	5467.26	50.14	68.30	-18.16	38.38	35.48	9.69	33.41	200	42 PEAK	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>90.87</td><td>-----</td><td>-----</td><td>78.93</td><td>35.61</td><td>9.75</td><td>33.42</td><td>200</td><td>42 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	90.87	-----	-----	78.93	35.61	9.75	33.42	200	42 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5354.68	51.18	74.00	-22.82	39.81	35.41	9.39	33.43	200	42 PEAK																																																																																														
2	5467.26	50.14	68.30	-18.16	38.38	35.48	9.69	33.41	200	42 PEAK																																																																																														
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5610.00	90.87	-----	-----	78.93	35.61	9.75	33.42	200	42 PEAK																																																																																														
Avg	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5451.66</td><td>43.70</td><td>54.00</td><td>-10.30</td><td>31.96</td><td>35.47</td><td>9.68</td><td>33.41</td><td>200</td><td>42 AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5451.66	43.70	54.00	-10.30	31.96	35.47	9.68	33.41	200	42 AVERAGE	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>82.67</td><td>-----</td><td>-----</td><td>70.67</td><td>35.65</td><td>9.77</td><td>33.42</td><td>200</td><td>42 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	82.67	-----	-----	70.67	35.65	9.77	33.42	200	42 AVERAGE											
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5451.66	43.70	54.00	-10.30	31.96	35.47	9.68	33.41	200	42 AVERAGE																																																																																														
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5610.00	82.67	-----	-----	70.67	35.65	9.77	33.42	200	42 AVERAGE																																																																																														





Mode	28																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_5610MHz																																									
ANT	22																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-07-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5737.72</td><td>51.96</td><td>68.30</td><td>-16.34</td><td>39.53</td><td>35.83</td><td>10.05</td><td>33.45</td><td>200</td><td>42 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5737.72	51.96	68.30	-16.34	39.53	35.83	10.05	33.45	200	42 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																	
1 5737.72	51.96	68.30	-16.34	39.53	35.83	10.05	33.45	200	42 PEAK																																	





Mode	28																																																																																																
	Band Edge - L																																																																																																
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_5610MHz																																																																																																
ANT	22																																																																																																
Pol.	Vertical	Fundamental																																																																																															
Peak	Level (dBuV/m) Date: 2025-07-28 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5350 5402 5454 5506 5558 5610 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5384.32</td><td>50.47</td><td>74.00</td><td>-23.53</td><td>38.92</td><td>35.43</td><td>9.54</td><td>33.42</td><td>400</td><td>65</td><td>PEAK</td></tr><tr><td>2</td><td>5466.48</td><td>50.88</td><td>68.30</td><td>-17.42</td><td>39.12</td><td>35.48</td><td>9.69</td><td>33.41</td><td>400</td><td>65</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5384.32	50.47	74.00	-23.53	38.92	35.43	9.54	33.42	400	65	PEAK	2	5466.48	50.88	68.30	-17.42	39.12	35.48	9.69	33.41	400	65	PEAK	Level (dBuV/m) Date: 2025-07-28 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5610.00</td><td>82.52</td><td>-----</td><td>70.45</td><td>35.68</td><td>9.82</td><td>33.43</td><td>400</td><td>65</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	82.52	-----	70.45	35.68	9.82	33.43	400	65	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5384.32	50.47	74.00	-23.53	38.92	35.43	9.54	33.42	400	65	PEAK																																																																																						
2	5466.48	50.88	68.30	-17.42	39.12	35.48	9.69	33.41	400	65	PEAK																																																																																						
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5610.00	82.52	-----	70.45	35.68	9.82	33.43	400	65	PEAK																																																																																							
Avg	Level (dBuV/m) Date: 2025-07-28 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5350 5402 5454 5506 5558 5610 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5439.44</td><td>43.73</td><td>54.00</td><td>-10.27</td><td>32.00</td><td>35.46</td><td>9.68</td><td>33.41</td><td>400</td><td>65</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5439.44	43.73	54.00	-10.27	32.00	35.46	9.68	33.41	400	65	AVERAGE	Level (dBuV/m) Date: 2025-07-28 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5610.00</td><td>73.55</td><td>-----</td><td>61.48</td><td>35.68</td><td>9.82</td><td>33.43</td><td>400</td><td>65</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	73.55	-----	61.48	35.68	9.82	33.43	400	65	AVERAGE												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5439.44	43.73	54.00	-10.27	32.00	35.46	9.68	33.41	400	65	AVERAGE																																																																																						
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5610.00	73.55	-----	61.48	35.68	9.82	33.43	400	65	AVERAGE																																																																																							

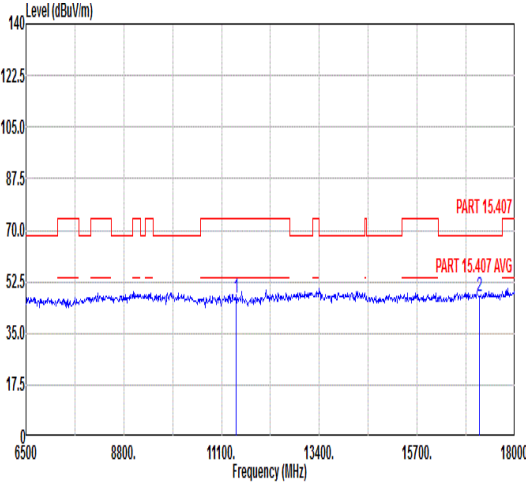
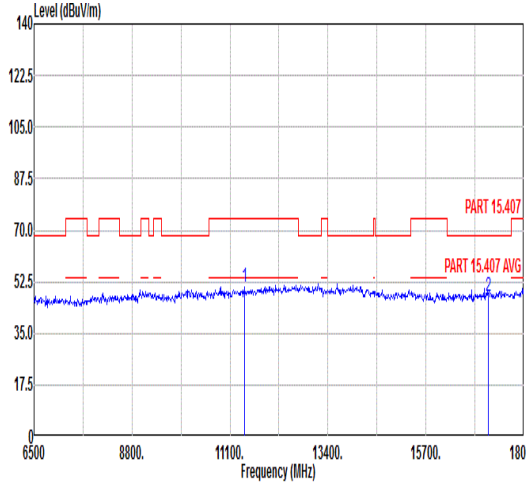


Mode	29																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-2C_5.47-5.85_802.11a_CH144																																																																																																																									
ANT	22																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg																																																																																																																										
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 11440.00</td><td>46.97</td><td>74.00</td><td>-27.03</td><td>58.81</td><td>39.13</td><td>12.84</td><td>63.81</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 17160.00</td><td>47.72</td><td>68.30</td><td>-20.58</td><td>54.56</td><td>42.48</td><td>15.66</td><td>64.98</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 11440.00	46.97	74.00	-27.03	58.81	39.13	12.84	63.81	---	---	Peak	2 17160.00	47.72	68.30	-20.58	54.56	42.48	15.66	64.98	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 11440.00</td><td>50.68</td><td>74.00</td><td>-23.32</td><td>62.52</td><td>39.13</td><td>12.84</td><td>63.81</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 17160.00</td><td>47.51</td><td>68.30</td><td>-20.79</td><td>54.35</td><td>42.48</td><td>15.66</td><td>64.98</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 11440.00	50.68	74.00	-23.32	62.52	39.13	12.84	63.81	---	---	Peak	2 17160.00	47.51	68.30	-20.79	54.35	42.48	15.66	64.98	---	---
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1 11440.00	46.97	74.00	-27.03	58.81	39.13	12.84	63.81	---	---	Peak																																																																																																																
2 17160.00	47.72	68.30	-20.58	54.56	42.48	15.66	64.98	---	---	Peak																																																																																																																
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1 11440.00	50.68	74.00	-23.32	62.52	39.13	12.84	63.81	---	---	Peak																																																																																																																
2 17160.00	47.51	68.30	-20.79	54.35	42.48	15.66	64.98	---	---	Peak																																																																																																																

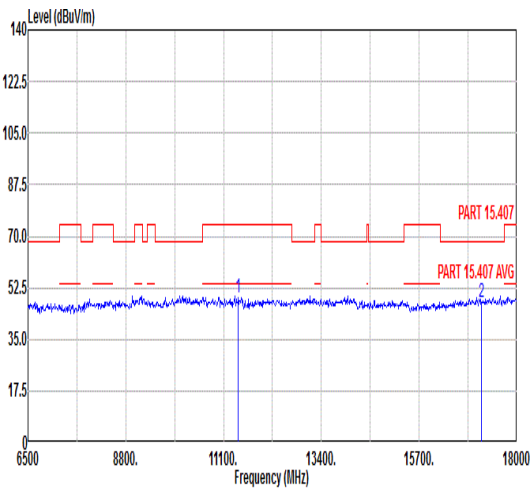
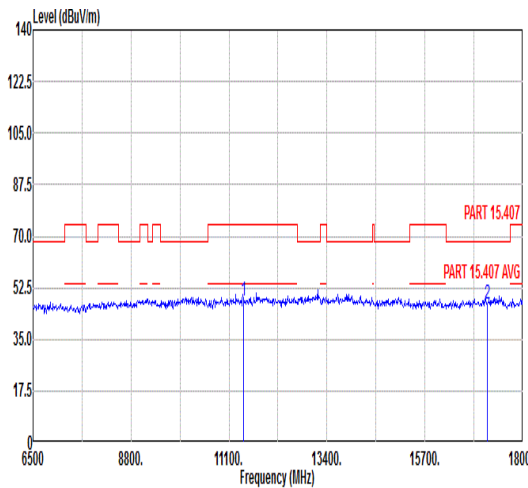


Mode	30																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.85_802.11ax HE20_CH144_Full																																																																																																																																	
ANT	22																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 11440.00</td><td>49.06</td><td>74.00</td><td>-24.94</td><td>60.90</td><td>39.13</td><td>12.84</td><td>63.81</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 17160.00</td><td>47.47</td><td>68.30</td><td>-20.83</td><td>54.31</td><td>42.48</td><td>15.66</td><td>64.98</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 11440.00	49.06	74.00	-24.94	60.90	39.13	12.84	63.81	---	---	Peak		2 17160.00	47.47	68.30	-20.83	54.31	42.48	15.66	64.98	---	---	Peak		<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 11440.00</td><td>48.34</td><td>74.00</td><td>-25.66</td><td>60.18</td><td>39.13</td><td>12.84</td><td>63.81</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 17160.00</td><td>46.89</td><td>68.30</td><td>-21.41</td><td>53.73</td><td>42.48</td><td>15.66</td><td>64.98</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 11440.00	48.34	74.00	-25.66	60.18	39.13	12.84	63.81	---	---	Peak		2 17160.00	46.89	68.30	-21.41	53.73	42.48	15.66	64.98	---	---	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 11440.00	49.06	74.00	-24.94	60.90	39.13	12.84	63.81	---	---	Peak																																																																																																																								
2 17160.00	47.47	68.30	-20.83	54.31	42.48	15.66	64.98	---	---	Peak																																																																																																																								
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 11440.00	48.34	74.00	-25.66	60.18	39.13	12.84	63.81	---	---	Peak																																																																																																																								
2 17160.00	46.89	68.30	-21.41	53.73	42.48	15.66	64.98	---	---	Peak																																																																																																																								

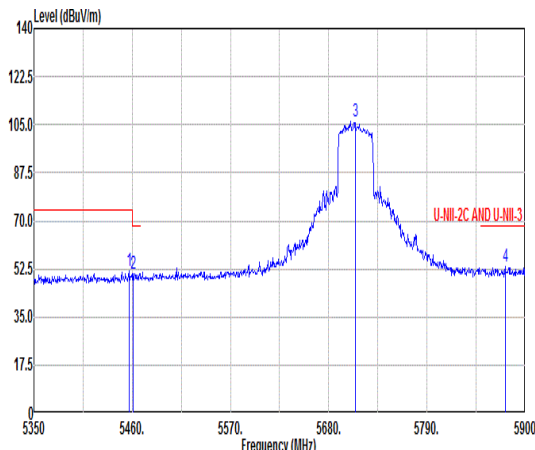
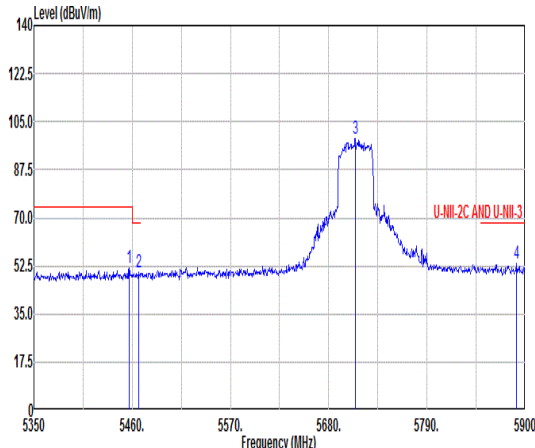


Mode	31																																																																						
	Band Edge																																																																						
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_Full_5710MHz																																																																						
ANT	22																																																																						
Pol.	Horizontal					Fundamental																																																																	
Peak	Blank																																																																						
			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5456.70	51.80	74.00	-22.20	40.05	35.47	9.69	33.41	100	91 Peak	2	5461.10	50.94	68.30	-17.36	39.18	35.48	9.69	33.41	100	91 Peak	3	5710.00	106.45	-----	-----	94.11	35.79	9.99	33.44	100	91 Peak	4	5877.45	53.20	68.30	-15.10	40.31	36.03	10.34	33.48	100
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																															
1	5456.70	51.80	74.00	-22.20	40.05	35.47	9.69	33.41	100	91 Peak																																																													
2	5461.10	50.94	68.30	-17.36	39.18	35.48	9.69	33.41	100	91 Peak																																																													
3	5710.00	106.45	-----	-----	94.11	35.79	9.99	33.44	100	91 Peak																																																													
4	5877.45	53.20	68.30	-15.10	40.31	36.03	10.34	33.48	100	91 Peak																																																													
Peak	Blank																																																																						
			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5456.70	51.56	74.00	-22.44	39.81	35.47	9.69	33.41	100	286 Peak	2	5467.70	50.07	68.30	-18.23	38.31	35.48	9.69	33.41	100	286 Peak	3	5710.00	98.73	-----	-----	86.39	35.79	9.99	33.44	100	286 Peak	4	5890.65	53.22	68.30	-15.08	40.28	36.05	10.37	33.48	100
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																															
1	5456.70	51.56	74.00	-22.44	39.81	35.47	9.69	33.41	100	286 Peak																																																													
2	5467.70	50.07	68.30	-18.23	38.31	35.48	9.69	33.41	100	286 Peak																																																													
3	5710.00	98.73	-----	-----	86.39	35.79	9.99	33.44	100	286 Peak																																																													
4	5890.65	53.22	68.30	-15.08	40.28	36.05	10.37	33.48	100	286 Peak																																																													

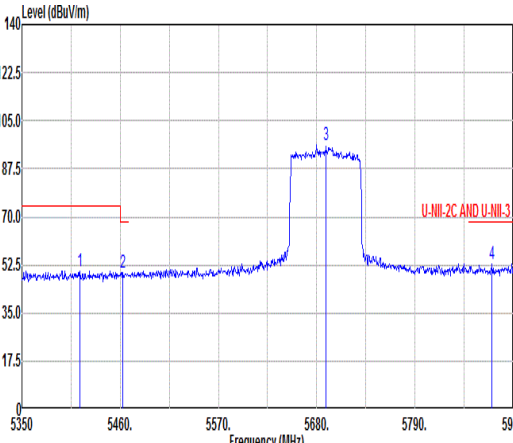
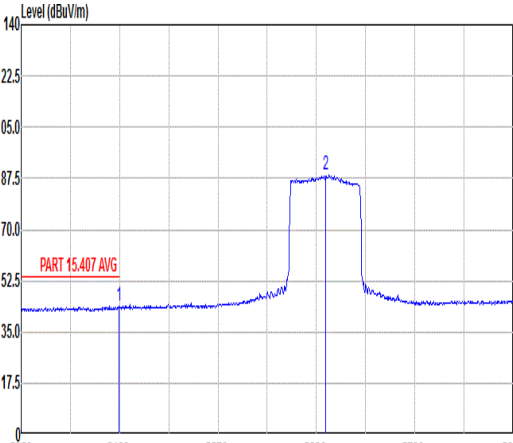


Mode	32																																																																																
	Band Edge																																																																																
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_Full_5690MHz																																																																																
ANT	22																																																																																
Pol.	Horizontal					Fundamental																																																																											
Peak	Blank					<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>5414.90</td><td>50.23</td><td>74.00</td><td>-23.77</td><td>38.54</td><td>35.45</td><td>9.66</td><td>33.42</td><td>100</td><td>94 Peak</td></tr><tr><td>2</td><td>5462.75</td><td>49.84</td><td>68.30</td><td>-18.46</td><td>38.08</td><td>35.48</td><td>9.69</td><td>33.41</td><td>100</td><td>94 Peak</td></tr><tr><td>3</td><td>5690.00</td><td>96.08</td><td>-----</td><td>-----</td><td>83.80</td><td>35.77</td><td>9.95</td><td>33.44</td><td>100</td><td>94 Peak</td></tr><tr><td>4</td><td>5876.35</td><td>52.62</td><td>68.30</td><td>-15.68</td><td>39.73</td><td>36.03</td><td>10.34</td><td>33.48</td><td>100</td><td>94 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5414.90	50.23	74.00	-23.77	38.54	35.45	9.66	33.42	100	94 Peak	2	5462.75	49.84	68.30	-18.46	38.08	35.48	9.69	33.41	100	94 Peak	3	5690.00	96.08	-----	-----	83.80	35.77	9.95	33.44	100	94 Peak	4	5876.35	52.62	68.30	-15.68	39.73	36.03	10.34	33.48	100	94 Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1	5414.90	50.23	74.00	-23.77	38.54	35.45	9.66	33.42	100	94 Peak																																																																							
2	5462.75	49.84	68.30	-18.46	38.08	35.48	9.69	33.41	100	94 Peak																																																																							
3	5690.00	96.08	-----	-----	83.80	35.77	9.95	33.44	100	94 Peak																																																																							
4	5876.35	52.62	68.30	-15.68	39.73	36.03	10.34	33.48	100	94 Peak																																																																							
Avg	Blank					<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>5459.45</td><td>44.02</td><td>54.00</td><td>-9.98</td><td>32.26</td><td>35.48</td><td>9.69</td><td>33.41</td><td>100</td><td>94 Peak</td></tr><tr><td>2</td><td>5690.00</td><td>88.55</td><td>-----</td><td>-----</td><td>76.27</td><td>35.77</td><td>9.95</td><td>33.44</td><td>100</td><td>94 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5459.45	44.02	54.00	-9.98	32.26	35.48	9.69	33.41	100	94 Peak	2	5690.00	88.55	-----	-----	76.27	35.77	9.95	33.44	100	94 Average																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1	5459.45	44.02	54.00	-9.98	32.26	35.48	9.69	33.41	100	94 Peak																																																																							
2	5690.00	88.55	-----	-----	76.27	35.77	9.95	33.44	100	94 Average																																																																							

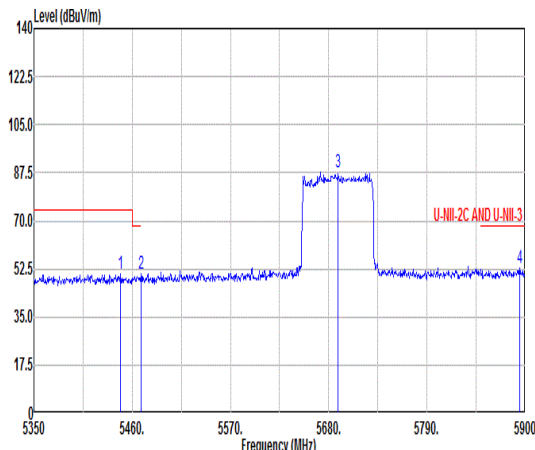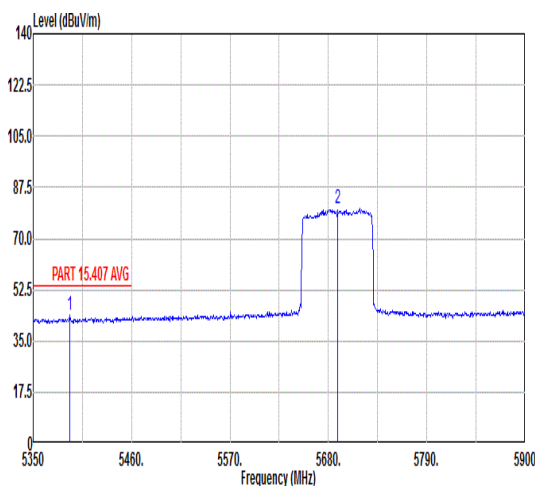

Mode	32																																																																																					
	Band Edge																																																																																					
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_Full_5690MHz																																																																																					
ANT	22																																																																																					
Pol.	Vertical					Fundamental																																																																																
Peak	Blank					<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5446.80</td><td>50.49</td><td>74.00</td><td>-23.51</td><td>38.75</td><td>35.47</td><td>9.68</td><td>33.41</td><td>100</td><td>113</td><td>Peak</td></tr><tr><td>2</td><td>5469.90</td><td>50.48</td><td>68.30</td><td>-17.82</td><td>38.72</td><td>35.48</td><td>9.69</td><td>33.41</td><td>100</td><td>113</td><td>Peak</td></tr><tr><td>3</td><td>5690.00</td><td>87.47</td><td>-----</td><td>-----</td><td>75.19</td><td>35.77</td><td>9.95</td><td>33.44</td><td>100</td><td>113</td><td>Peak</td></tr><tr><td>4</td><td>5893.40</td><td>52.79</td><td>68.30</td><td>-15.51</td><td>39.85</td><td>36.05</td><td>10.37</td><td>33.48</td><td>100</td><td>113</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5446.80	50.49	74.00	-23.51	38.75	35.47	9.68	33.41	100	113	Peak	2	5469.90	50.48	68.30	-17.82	38.72	35.48	9.69	33.41	100	113	Peak	3	5690.00	87.47	-----	-----	75.19	35.77	9.95	33.44	100	113	Peak	4	5893.40	52.79	68.30	-15.51	39.85	36.05	10.37	33.48	100	113	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5446.80	50.49	74.00	-23.51	38.75	35.47	9.68	33.41	100	113	Peak																																																																											
2	5469.90	50.48	68.30	-17.82	38.72	35.48	9.69	33.41	100	113	Peak																																																																											
3	5690.00	87.47	-----	-----	75.19	35.77	9.95	33.44	100	113	Peak																																																																											
4	5893.40	52.79	68.30	-15.51	39.85	36.05	10.37	33.48	100	113	Peak																																																																											
Avg	Blank					<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5391.25</td><td>43.69</td><td>54.00</td><td>-10.31</td><td>32.10</td><td>35.43</td><td>9.58</td><td>33.42</td><td>100</td><td>113</td><td>Peak</td></tr><tr><td>2</td><td>5690.00</td><td>80.21</td><td>-----</td><td>-----</td><td>67.93</td><td>35.77</td><td>9.95</td><td>33.44</td><td>100</td><td>113</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5391.25	43.69	54.00	-10.31	32.10	35.43	9.58	33.42	100	113	Peak	2	5690.00	80.21	-----	-----	67.93	35.77	9.95	33.44	100	113	Average																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5391.25	43.69	54.00	-10.31	32.10	35.43	9.58	33.42	100	113	Peak																																																																											
2	5690.00	80.21	-----	-----	67.93	35.77	9.95	33.44	100	113	Average																																																																											

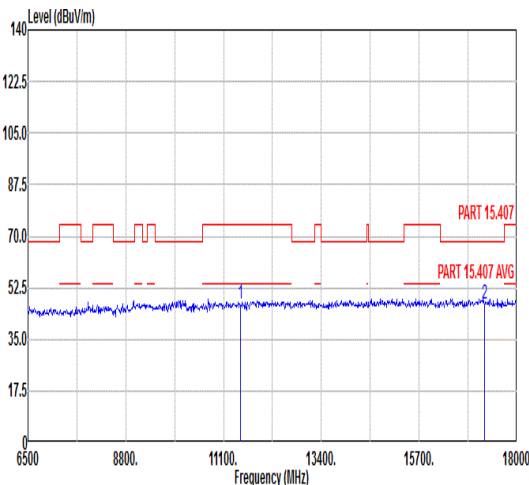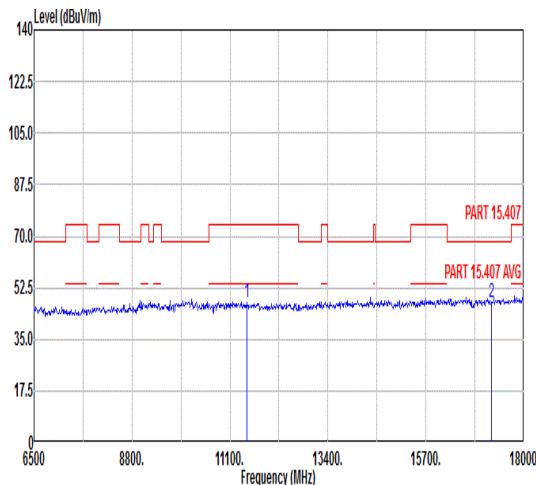

Mode	33																																																																																							
	Harmonic																																																																																							
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																							
ANT	22																																																																																							
Pol.	Horizontal							Vertical																																																																																
Peak Avg																																																																																								
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>11490.00</td><td>47.10</td><td>74.00</td><td>-26.90</td><td>59.62</td><td>38.45</td><td>12.87</td><td>63.84</td><td>---</td><td>---</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>2</td><td>17235.00</td><td>46.98</td><td>68.30</td><td>-21.32</td><td>53.49</td><td>42.83</td><td>15.72</td><td>65.06</td><td>---</td><td>---</td><td>Peak</td><td></td><td></td><td></td></tr></table>																Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11490.00	47.10	74.00	-26.90	59.62	38.45	12.87	63.84	---	---	Peak				2	17235.00	46.98	68.30	-21.32	53.49	42.83	15.72	65.06	---	---	Peak			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	11490.00	47.10	74.00	-26.90	59.62	38.45	12.87	63.84	---	---	Peak																																																																													
2	17235.00	46.98	68.30	-21.32	53.49	42.83	15.72	65.06	---	---	Peak																																																																													
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>11490.00</td><td>47.33</td><td>74.00</td><td>-26.67</td><td>59.85</td><td>38.45</td><td>12.87</td><td>63.84</td><td>---</td><td>---</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>2</td><td>17235.00</td><td>47.80</td><td>68.30</td><td>-20.50</td><td>54.31</td><td>42.83</td><td>15.72</td><td>65.06</td><td>---</td><td>---</td><td>Peak</td><td></td><td></td><td></td></tr></table>																Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11490.00	47.33	74.00	-26.67	59.85	38.45	12.87	63.84	---	---	Peak				2	17235.00	47.80	68.30	-20.50	54.31	42.83	15.72	65.06	---	---	Peak				
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	11490.00	47.33	74.00	-26.67	59.85	38.45	12.87	63.84	---	---	Peak																																																																													
2	17235.00	47.80	68.30	-20.50	54.31	42.83	15.72	65.06	---	---	Peak																																																																													



Mode	34																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																																	
ANT	22																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11570.00</td><td>46.93</td><td>74.00</td><td>-27.07</td><td>59.43</td><td>38.47</td><td>12.93</td><td>63.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17355.00</td><td>48.70</td><td>68.30</td><td>-19.60</td><td>55.11</td><td>42.97</td><td>15.81</td><td>65.19</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11570.00	46.93	74.00	-27.07	59.43	38.47	12.93	63.90	---	---	Peak	2	17355.00	48.70	68.30	-19.60	55.11	42.97	15.81	65.19	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11570.00</td><td>46.60</td><td>74.00</td><td>-27.40</td><td>59.10</td><td>38.47</td><td>12.93</td><td>63.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17355.00</td><td>48.27</td><td>68.30</td><td>-20.03</td><td>54.68</td><td>42.97</td><td>15.81</td><td>65.19</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11570.00	46.60	74.00	-27.40	59.10	38.47	12.93	63.90	---	---	Peak	2	17355.00	48.27	68.30	-20.03	54.68	42.97	15.81	65.19	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11570.00	46.93	74.00	-27.07	59.43	38.47	12.93	63.90	---	---	Peak																																																																																																																							
2	17355.00	48.70	68.30	-19.60	55.11	42.97	15.81	65.19	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11570.00	46.60	74.00	-27.40	59.10	38.47	12.93	63.90	---	---	Peak																																																																																																																							
2	17355.00	48.27	68.30	-20.03	54.68	42.97	15.81	65.19	---	---	Peak																																																																																																																							



Mode	35																																																																						
	Harmonic																																																																						
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																						
ANT	22																																																																						
Pol.	Horizontal						Vertical																																																																
Peak Avg																																																																							
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11650.00</td><td>47.33</td><td>74.00</td><td>-26.67</td><td>59.80</td><td>38.49</td><td>12.99</td><td>63.95</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17475.00</td><td>48.52</td><td>68.30</td><td>-19.78</td><td>54.84</td><td>43.10</td><td>15.90</td><td>65.32</td><td>---</td><td>---</td><td>Peak</td></tr></table>														Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11650.00	47.33	74.00	-26.67	59.80	38.49	12.99	63.95	---	---	Peak	2	17475.00	48.52	68.30	-19.78	54.84	43.10	15.90	65.32	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1	11650.00	47.33	74.00	-26.67	59.80	38.49	12.99	63.95	---	---	Peak																																																												
2	17475.00	48.52	68.30	-19.78	54.84	43.10	15.90	65.32	---	---	Peak																																																												
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11650.00</td><td>47.17</td><td>74.00</td><td>-26.83</td><td>59.64</td><td>38.49</td><td>12.99</td><td>63.95</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17475.00</td><td>48.48</td><td>68.30</td><td>-19.82</td><td>54.80</td><td>43.10</td><td>15.90</td><td>65.32</td><td>---</td><td>---</td><td>Peak</td></tr></table>														Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11650.00	47.17	74.00	-26.83	59.64	38.49	12.99	63.95	---	---	Peak	2	17475.00	48.48	68.30	-19.82	54.80	43.10	15.90	65.32	---	---	Peak	
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1	11650.00	47.17	74.00	-26.83	59.64	38.49	12.99	63.95	---	---	Peak																																																												
2	17475.00	48.48	68.30	-19.82	54.80	43.10	15.90	65.32	---	---	Peak																																																												





Mode	36																																																																																																																																			
	Band Edge																																																																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_5745MHz																																																																																																																																			
ANT	22																																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																																													
Peak	Level (dBuV/m) Date: 2025-08-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5646.11</td><td>53.01</td><td>68.30</td><td>-15.29</td><td>40.89</td><td>35.70</td><td>9.85</td><td>33.43</td><td>100</td><td>309</td><td>PEAK</td></tr><tr><td>2</td><td>5651.62</td><td>51.40</td><td>69.50</td><td>-18.10</td><td>39.26</td><td>35.71</td><td>9.86</td><td>33.43</td><td>100</td><td>309</td><td>PEAK</td></tr><tr><td>3</td><td>5718.90</td><td>63.90</td><td>110.49</td><td>-46.59</td><td>51.52</td><td>35.81</td><td>10.01</td><td>33.44</td><td>100</td><td>309</td><td>PEAK</td></tr><tr><td>4</td><td>5721.08</td><td>66.63</td><td>113.25</td><td>-46.62</td><td>54.25</td><td>35.81</td><td>10.01</td><td>33.44</td><td>100</td><td>309</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5646.11	53.01	68.30	-15.29	40.89	35.70	9.85	33.43	100	309	PEAK	2	5651.62	51.40	69.50	-18.10	39.26	35.71	9.86	33.43	100	309	PEAK	3	5718.90	63.90	110.49	-46.59	51.52	35.81	10.01	33.44	100	309	PEAK	4	5721.08	66.63	113.25	-46.62	54.25	35.81	10.01	33.44	100	309	PEAK	Level (dBuV/m) Date: 2025-08-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>100.29</td><td>-----</td><td>-----</td><td>87.81</td><td>35.85</td><td>10.08</td><td>33.45</td><td>100</td><td>309</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	100.29	-----	-----	87.81	35.85	10.08	33.45	100	309	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5646.11	53.01	68.30	-15.29	40.89	35.70	9.85	33.43	100	309	PEAK																																																																																																																									
2	5651.62	51.40	69.50	-18.10	39.26	35.71	9.86	33.43	100	309	PEAK																																																																																																																									
3	5718.90	63.90	110.49	-46.59	51.52	35.81	10.01	33.44	100	309	PEAK																																																																																																																									
4	5721.08	66.63	113.25	-46.62	54.25	35.81	10.01	33.44	100	309	PEAK																																																																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5745.00	100.29	-----	-----	87.81	35.85	10.08	33.45	100	309	PEAK																																																																																																																									
Avg	Blank						Level (dBuV/m) Date: 2025-08-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>91.17</td><td>-----</td><td>-----</td><td>78.72</td><td>35.84</td><td>10.06</td><td>33.45</td><td>100</td><td>309</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	91.17	-----	-----	78.72	35.84	10.06	33.45	100	309	AVERAGE																																																																														
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5745.00	91.17	-----	-----	78.72	35.84	10.06	33.45	100	309	AVERAGE																																																																																																																									



Mode	36																																																																																																																			
	Band Edge																																																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_5745MHz																																																																																																																			
ANT	22																																																																																																																			
Pol.	Vertical					Fundamental																																																																																																														
Peak	Level (dBuV/m) Date: 2025-08-10 1 2 34 PEAK_BE(B4)_16-24 5600 5629 5658 5687 5716 5745 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5601.45</td><td>52.67</td><td>68.30</td><td>-15.63</td><td>40.69</td><td>35.64</td><td>9.76</td><td>33.42</td><td>119 78 PEAK</td></tr><tr><td>2</td><td>5650.32</td><td>52.05</td><td>68.53</td><td>-16.48</td><td>39.91</td><td>35.71</td><td>9.86</td><td>33.43</td><td>119 78 PEAK</td></tr><tr><td>3</td><td>5719.63</td><td>73.56</td><td>110.70</td><td>-37.14</td><td>61.18</td><td>35.81</td><td>10.01</td><td>33.44</td><td>119 78 PEAK</td></tr><tr><td>4</td><td>5721.08</td><td>74.81</td><td>113.25</td><td>-38.44</td><td>62.43</td><td>35.81</td><td>10.01</td><td>33.44</td><td>119 78 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5601.45	52.67	68.30	-15.63	40.69	35.64	9.76	33.42	119 78 PEAK	2	5650.32	52.05	68.53	-16.48	39.91	35.71	9.86	33.43	119 78 PEAK	3	5719.63	73.56	110.70	-37.14	61.18	35.81	10.01	33.44	119 78 PEAK	4	5721.08	74.81	113.25	-38.44	62.43	35.81	10.01	33.44	119 78 PEAK	Level (dBuV/m) Date: 2025-08-10 1 PART 15.407 1000 2200 3400 4600 5800 7000 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>107.20</td><td>-----</td><td>-----</td><td>94.75</td><td>35.84</td><td>10.06</td><td>33.45</td><td>119 78 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5745.00	107.20	-----	-----	94.75	35.84	10.06	33.45	119 78 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	5601.45	52.67	68.30	-15.63	40.69	35.64	9.76	33.42	119 78 PEAK																																																																																																											
2	5650.32	52.05	68.53	-16.48	39.91	35.71	9.86	33.43	119 78 PEAK																																																																																																											
3	5719.63	73.56	110.70	-37.14	61.18	35.81	10.01	33.44	119 78 PEAK																																																																																																											
4	5721.08	74.81	113.25	-38.44	62.43	35.81	10.01	33.44	119 78 PEAK																																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	5745.00	107.20	-----	-----	94.75	35.84	10.06	33.45	119 78 PEAK																																																																																																											
Avg	Blank					Level (dBuV/m) Date: 2025-08-10 1 PART 15.407 AVG 1000 2200 3400 4600 5800 7000 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>98.26</td><td>-----</td><td>-----</td><td>85.81</td><td>35.84</td><td>10.06</td><td>33.45</td><td>119 78 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5745.00	98.26	-----	-----	85.81	35.84	10.06	33.45	119 78 AVERAGE																																																																						
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	5745.00	98.26	-----	-----	85.81	35.84	10.06	33.45	119 78 AVERAGE																																																																																																											

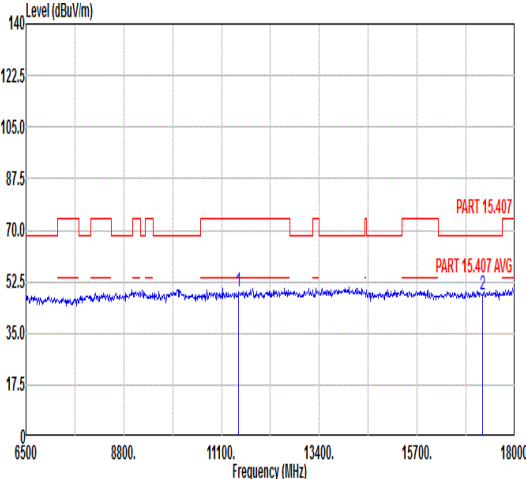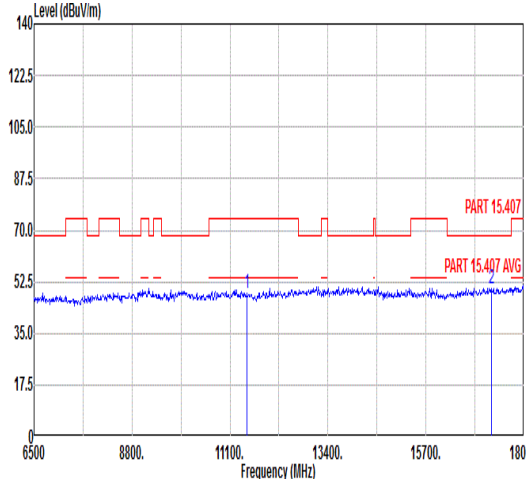

Mode	36																																																																																																																														
	Harmonic																																																																																																																														
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_5745MHz																																																																																																																														
ANT	22																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																								
Peak Avg																																																																																																																															
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11490.00</td><td>49.19</td><td>74.00</td><td>-24.81</td><td>60.97</td><td>39.19</td><td>12.87</td><td>63.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17235.00</td><td>47.94</td><td>68.30</td><td>-20.36</td><td>54.72</td><td>42.56</td><td>15.72</td><td>65.06</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11490.00	49.19	74.00	-24.81	60.97	39.19	12.87	63.84	---	---	Peak	2	17235.00	47.94	68.30	-20.36	54.72	42.56	15.72	65.06	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11490.00</td><td>48.49</td><td>74.00</td><td>-25.51</td><td>60.27</td><td>39.19</td><td>12.87</td><td>63.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17235.00</td><td>49.93</td><td>68.30</td><td>-18.37</td><td>56.71</td><td>42.56</td><td>15.72</td><td>65.06</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11490.00	48.49	74.00	-25.51	60.27	39.19	12.87	63.84	---	---	Peak	2	17235.00	49.93	68.30	-18.37	56.71	42.56	15.72	65.06	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	11490.00	49.19	74.00	-24.81	60.97	39.19	12.87	63.84	---	---	Peak																																																																																																																				
2	17235.00	47.94	68.30	-20.36	54.72	42.56	15.72	65.06	---	---	Peak																																																																																																																				
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	11490.00	48.49	74.00	-25.51	60.27	39.19	12.87	63.84	---	---	Peak																																																																																																																				
2	17235.00	49.93	68.30	-18.37	56.71	42.56	15.72	65.06	---	---	Peak																																																																																																																				






Mode	37																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_5785MHz																																																																																																																																	
ANT	22																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 11570.00</td><td>48.71</td><td>74.00</td><td>-25.29</td><td>60.40</td><td>39.28</td><td>12.93</td><td>63.90</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 17355.00</td><td>48.41</td><td>68.30</td><td>-19.89</td><td>55.10</td><td>42.69</td><td>15.81</td><td>65.19</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 11570.00	48.71	74.00	-25.29	60.40	39.28	12.93	63.90	---	---	Peak		2 17355.00	48.41	68.30	-19.89	55.10	42.69	15.81	65.19	---	---	Peak		<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 11570.00</td><td>48.03</td><td>74.00</td><td>-25.97</td><td>59.72</td><td>39.28</td><td>12.93</td><td>63.90</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 17355.00</td><td>50.18</td><td>68.30</td><td>-18.12</td><td>56.87</td><td>42.69</td><td>15.81</td><td>65.19</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 11570.00	48.03	74.00	-25.97	59.72	39.28	12.93	63.90	---	---	Peak		2 17355.00	50.18	68.30	-18.12	56.87	42.69	15.81	65.19	---	---	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 11570.00	48.71	74.00	-25.29	60.40	39.28	12.93	63.90	---	---	Peak																																																																																																																								
2 17355.00	48.41	68.30	-19.89	55.10	42.69	15.81	65.19	---	---	Peak																																																																																																																								
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 11570.00	48.03	74.00	-25.97	59.72	39.28	12.93	63.90	---	---	Peak																																																																																																																								
2 17355.00	50.18	68.30	-18.12	56.87	42.69	15.81	65.19	---	---	Peak																																																																																																																								





Mode	38																																																																																																																							
	Band Edge																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_5825MHz																																																																																																																							
ANT	22																																																																																																																							
Pol.	Horizontal					Fundamental																																																																																																																		
Peak	Level (dBuV/m) Date: 2025-08-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5855.00</td><td>61.11</td><td>110.80</td><td>-49.69</td><td>48.29</td><td>36.00</td><td>10.29</td><td>33.47</td><td>200</td><td>51 PEAK</td></tr><tr><td>2 5855.13</td><td>65.01</td><td>110.76</td><td>-45.75</td><td>52.19</td><td>36.00</td><td>10.29</td><td>33.47</td><td>200</td><td>51 PEAK</td></tr><tr><td>3 5924.38</td><td>51.74</td><td>68.76</td><td>-17.02</td><td>38.69</td><td>36.09</td><td>10.44</td><td>33.48</td><td>200</td><td>51 PEAK</td></tr><tr><td>4 5926.63</td><td>53.63</td><td>68.30</td><td>-14.67</td><td>40.58</td><td>36.10</td><td>10.44</td><td>33.49</td><td>200</td><td>51 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5855.00	61.11	110.80	-49.69	48.29	36.00	10.29	33.47	200	51 PEAK	2 5855.13	65.01	110.76	-45.75	52.19	36.00	10.29	33.47	200	51 PEAK	3 5924.38	51.74	68.76	-17.02	38.69	36.09	10.44	33.48	200	51 PEAK	4 5926.63	53.63	68.30	-14.67	40.58	36.10	10.44	33.49	200	51 PEAK	Level (dBuV/m) Date: 2025-08-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5825.00</td><td>101.40</td><td>-----</td><td>-----</td><td>88.67</td><td>35.96</td><td>10.24</td><td>33.47</td><td>200</td><td>51 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5825.00	101.40	-----	-----	88.67	35.96	10.24	33.47	200	51 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1 5855.00	61.11	110.80	-49.69	48.29	36.00	10.29	33.47	200	51 PEAK																																																																																																															
2 5855.13	65.01	110.76	-45.75	52.19	36.00	10.29	33.47	200	51 PEAK																																																																																																															
3 5924.38	51.74	68.76	-17.02	38.69	36.09	10.44	33.48	200	51 PEAK																																																																																																															
4 5926.63	53.63	68.30	-14.67	40.58	36.10	10.44	33.49	200	51 PEAK																																																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1 5825.00	101.40	-----	-----	88.67	35.96	10.24	33.47	200	51 PEAK																																																																																																															
Avg	Blank					Level (dBuV/m) Date: 2025-08-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5825.00</td><td>93.16</td><td>-----</td><td>-----</td><td>80.44</td><td>35.95</td><td>10.23</td><td>33.46</td><td>200</td><td>51 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5825.00	93.16	-----	-----	80.44	35.95	10.23	33.46	200	51 AVERAGE																																																																						
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1 5825.00	93.16	-----	-----	80.44	35.95	10.23	33.46	200	51 AVERAGE																																																																																																															

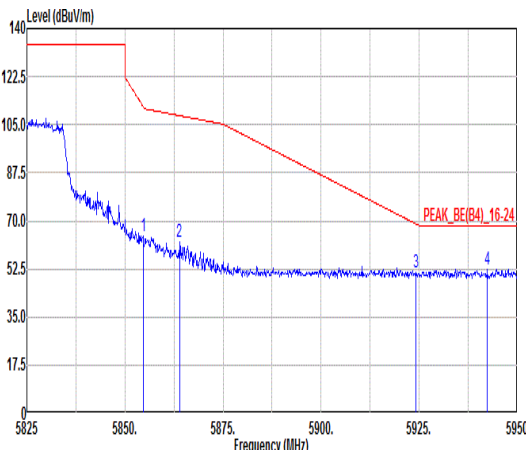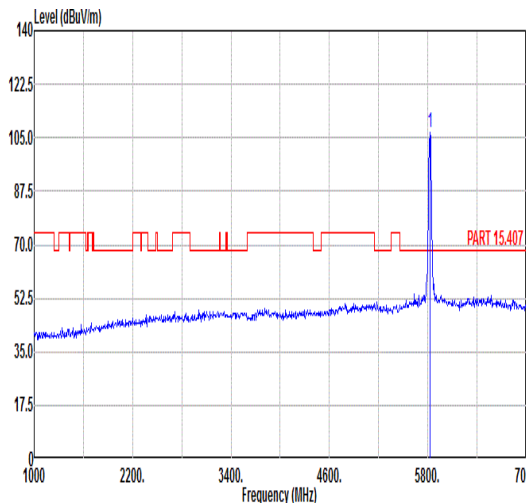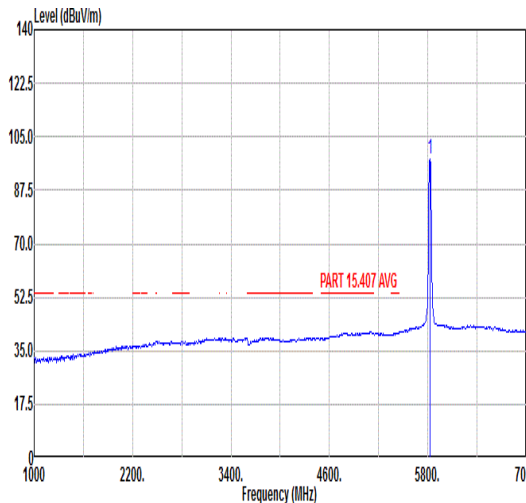

Mode	38																																																																																					
	Band Edge																																																																																					
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_5825MHz																																																																																					
ANT	22																																																																																					
Pol.	Vertical																																																																																					
Peak																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5854.63</td><td>64.38</td><td>111.65</td><td>-47.27</td><td>51.56</td><td>36.00</td><td>10.29</td><td>33.47</td><td>120</td><td>79</td><td>PEAK</td></tr><tr><td>2</td><td>5863.88</td><td>62.35</td><td>108.31</td><td>-45.96</td><td>49.50</td><td>36.01</td><td>10.31</td><td>33.47</td><td>120</td><td>79</td><td>PEAK</td></tr><tr><td>3</td><td>5924.25</td><td>51.36</td><td>68.85</td><td>-17.49</td><td>38.31</td><td>36.09</td><td>10.44</td><td>33.48</td><td>120</td><td>79</td><td>PEAK</td></tr><tr><td>4</td><td>5942.38</td><td>52.49</td><td>68.30</td><td>-15.81</td><td>39.38</td><td>36.12</td><td>10.48</td><td>33.49</td><td>120</td><td>79</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5854.63	64.38	111.65	-47.27	51.56	36.00	10.29	33.47	120	79	PEAK	2	5863.88	62.35	108.31	-45.96	49.50	36.01	10.31	33.47	120	79	PEAK	3	5924.25	51.36	68.85	-17.49	38.31	36.09	10.44	33.48	120	79	PEAK	4	5942.38	52.49	68.30	-15.81	39.38	36.12	10.48	33.49	120	79	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																														
1	5854.63	64.38	111.65	-47.27	51.56	36.00	10.29	33.47	120	79	PEAK																																																																											
2	5863.88	62.35	108.31	-45.96	49.50	36.01	10.31	33.47	120	79	PEAK																																																																											
3	5924.25	51.36	68.85	-17.49	38.31	36.09	10.44	33.48	120	79	PEAK																																																																											
4	5942.38	52.49	68.30	-15.81	39.38	36.12	10.48	33.49	120	79	PEAK																																																																											
Avg	Blank																																																																																					
																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5825.00</td><td>106.80</td><td>-----</td><td>-----</td><td>94.07</td><td>35.96</td><td>10.24</td><td>33.47</td><td>120</td><td>79</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5825.00	106.80	-----	-----	94.07	35.96	10.24	33.47	120	79	PEAK																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																														
1	5825.00	106.80	-----	-----	94.07	35.96	10.24	33.47	120	79	PEAK																																																																											
Avg	Blank																																																																																					
																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5825.00</td><td>97.92</td><td>-----</td><td>-----</td><td>85.20</td><td>35.95</td><td>10.23</td><td>33.46</td><td>120</td><td>79</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5825.00	97.92	-----	-----	85.20	35.95	10.23	33.46	120	79	AVERAGE																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																														
1	5825.00	97.92	-----	-----	85.20	35.95	10.23	33.46	120	79	AVERAGE																																																																											

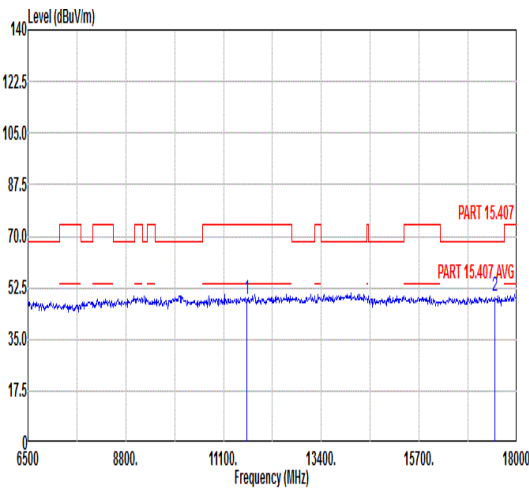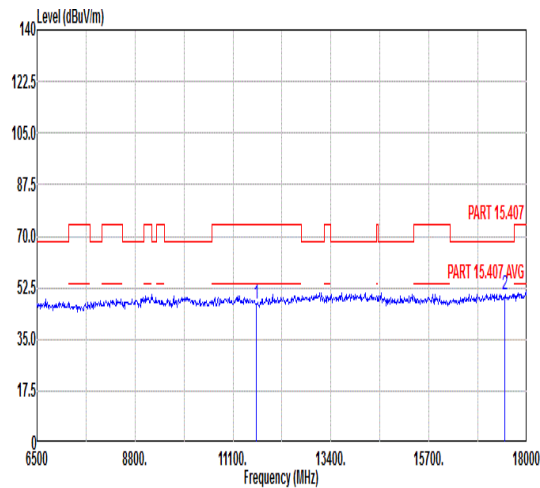

Mode	38																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_5825MHz																																																																																																																											
ANT	22																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																					
Peak Avg																																																																																																																												
	<table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 11650.00</td><td>48.68</td><td>74.00</td><td>-25.32</td><td>60.26</td><td>39.38</td><td>12.99</td><td>63.95</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 17475.00</td><td>49.51</td><td>68.30</td><td>-18.79</td><td>56.11</td><td>42.82</td><td>15.90</td><td>65.32</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 11650.00	48.68	74.00	-25.32	60.26	39.38	12.99	63.95	---	---	Peak	2 17475.00	49.51	68.30	-18.79	56.11	42.82	15.90	65.32	---	---	Peak	<table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 11650.00</td><td>47.04</td><td>74.00</td><td>-26.96</td><td>58.62</td><td>39.38</td><td>12.99</td><td>63.95</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 17475.00</td><td>50.18</td><td>68.30</td><td>-18.12</td><td>56.78</td><td>42.82</td><td>15.90</td><td>65.32</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 11650.00	47.04	74.00	-26.96	58.62	39.38	12.99	63.95	---	---	Peak	2 17475.00	50.18	68.30	-18.12	56.78	42.82	15.90	65.32	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1 11650.00	48.68	74.00	-25.32	60.26	39.38	12.99	63.95	---	---	Peak																																																																																																																		
2 17475.00	49.51	68.30	-18.79	56.11	42.82	15.90	65.32	---	---	Peak																																																																																																																		
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1 11650.00	47.04	74.00	-26.96	58.62	39.38	12.99	63.95	---	---	Peak																																																																																																																		
2 17475.00	50.18	68.30	-18.12	56.78	42.82	15.90	65.32	---	---	Peak																																																																																																																		



Mode	39																																																																																																																				
	Band Edge - L																																																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_5755MHz																																																																																																																				
ANT	22																																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																																			
Peak	Level (dBuV/m) Date: 2025-08-10 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5647.74</td><td>52.20</td><td>68.30</td><td>-16.10</td><td>40.06</td><td>35.71</td><td>9.86</td><td>33.43</td><td>209</td><td>69 PEAK</td></tr><tr><td>2</td><td>5650.53</td><td>50.41</td><td>68.69</td><td>-18.28</td><td>38.27</td><td>35.71</td><td>9.86</td><td>33.43</td><td>209</td><td>69 PEAK</td></tr><tr><td>3</td><td>5719.20</td><td>73.39</td><td>110.57</td><td>-37.18</td><td>61.01</td><td>35.81</td><td>10.01</td><td>33.44</td><td>209</td><td>69 PEAK</td></tr><tr><td>4</td><td>5720.13</td><td>70.31</td><td>111.09</td><td>-40.78</td><td>57.93</td><td>35.81</td><td>10.01</td><td>33.44</td><td>209</td><td>69 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5647.74	52.20	68.30	-16.10	40.06	35.71	9.86	33.43	209	69 PEAK	2	5650.53	50.41	68.69	-18.28	38.27	35.71	9.86	33.43	209	69 PEAK	3	5719.20	73.39	110.57	-37.18	61.01	35.81	10.01	33.44	209	69 PEAK	4	5720.13	70.31	111.09	-40.78	57.93	35.81	10.01	33.44	209	69 PEAK	Level (dBuV/m) Date: 2025-08-10 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5755.00</td><td>98.04</td><td>-----</td><td>-----</td><td>85.52</td><td>35.87</td><td>10.10</td><td>33.45</td><td>209</td><td>69 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5755.00	98.04	-----	-----	85.52	35.87	10.10	33.45	209	69 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																														
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5647.74	52.20	68.30	-16.10	40.06	35.71	9.86	33.43	209	69 PEAK																																																																																																											
2	5650.53	50.41	68.69	-18.28	38.27	35.71	9.86	33.43	209	69 PEAK																																																																																																											
3	5719.20	73.39	110.57	-37.18	61.01	35.81	10.01	33.44	209	69 PEAK																																																																																																											
4	5720.13	70.31	111.09	-40.78	57.93	35.81	10.01	33.44	209	69 PEAK																																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																														
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5755.00	98.04	-----	-----	85.52	35.87	10.10	33.45	209	69 PEAK																																																																																																											
Avg	Blank	Level (dBuV/m) Date: 2025-08-10 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5755.00</td><td>89.84</td><td>-----</td><td>-----</td><td>77.36</td><td>35.85</td><td>10.08</td><td>33.45</td><td>209</td><td>69 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5755.00	89.84	-----	-----	77.36	35.85	10.08	33.45	209	69 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																														
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5755.00	89.84	-----	-----	77.36	35.85	10.08	33.45	209	69 AVERAGE																																																																																																											



Mode	39																																																																																		
	Band Edge - R																																																																																		
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_5755MHz																																																																																		
ANT	22																																																																																		
Pol.	Vertical						Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2025-08-10 Frequency (MHz) <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5854.84</td><td>54.14</td><td>111.17</td><td>-57.03</td><td>41.32</td><td>36.00</td><td>10.29</td><td>33.47</td><td>120</td><td>79</td><td>PEAK</td></tr><tr><td>2</td><td>5873.37</td><td>53.22</td><td>105.66</td><td>-52.44</td><td>40.34</td><td>36.02</td><td>10.33</td><td>33.47</td><td>120</td><td>79</td><td>PEAK</td></tr><tr><td>3</td><td>5924.07</td><td>52.43</td><td>68.99</td><td>-16.56</td><td>39.38</td><td>36.09</td><td>10.44</td><td>33.48</td><td>120</td><td>79</td><td>PEAK</td></tr><tr><td>4</td><td>5927.38</td><td>52.11</td><td>68.30</td><td>-16.19</td><td>39.06</td><td>36.10</td><td>10.44</td><td>33.49</td><td>120</td><td>79</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	Level	Factor	Loss	Factor	cm	deg		1	5854.84	54.14	111.17	-57.03	41.32	36.00	10.29	33.47	120	79	PEAK	2	5873.37	53.22	105.66	-52.44	40.34	36.02	10.33	33.47	120	79	PEAK	3	5924.07	52.43	68.99	-16.56	39.38	36.09	10.44	33.48	120	79	PEAK	4	5927.38	52.11	68.30	-16.19	39.06	36.10	10.44	33.49	120	79	PEAK	Blank				
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	(dB)	Level	Factor	Loss	Factor	cm	deg																																																																									
1	5854.84	54.14	111.17	-57.03	41.32	36.00	10.29	33.47	120	79	PEAK																																																																								
2	5873.37	53.22	105.66	-52.44	40.34	36.02	10.33	33.47	120	79	PEAK																																																																								
3	5924.07	52.43	68.99	-16.56	39.38	36.09	10.44	33.48	120	79	PEAK																																																																								
4	5927.38	52.11	68.30	-16.19	39.06	36.10	10.44	33.49	120	79	PEAK																																																																								





Mode	40									
	Band Edge - L									
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHz									
ANT	22									
Pol.	Horizontal					Fundamental				
Peak										



Mode	40																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHz																																																																																			
ANT	22																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2025-08-10 Frequency (MHz) <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5854.52</td><td>62.64</td><td>111.89</td><td>-49.25</td><td>49.82</td><td>36.00</td><td>10.29</td><td>33.47</td><td>224</td><td>295</td><td>PEAK</td></tr><tr><td>2</td><td>5863.05</td><td>62.81</td><td>108.55</td><td>-45.74</td><td>49.96</td><td>36.01</td><td>10.31</td><td>33.47</td><td>224</td><td>295</td><td>PEAK</td></tr><tr><td>3</td><td>5924.89</td><td>52.35</td><td>68.38</td><td>-16.03</td><td>39.30</td><td>36.09</td><td>10.44</td><td>33.48</td><td>224</td><td>295</td><td>PEAK</td></tr><tr><td>4</td><td>5949.23</td><td>53.37</td><td>68.30</td><td>-14.93</td><td>40.24</td><td>36.13</td><td>10.49</td><td>33.49</td><td>224</td><td>295</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	Level	Factor	Loss	Factor	cm	deg		1	5854.52	62.64	111.89	-49.25	49.82	36.00	10.29	33.47	224	295	PEAK	2	5863.05	62.81	108.55	-45.74	49.96	36.01	10.31	33.47	224	295	PEAK	3	5924.89	52.35	68.38	-16.03	39.30	36.09	10.44	33.48	224	295	PEAK	4	5949.23	53.37	68.30	-14.93	40.24	36.13	10.49	33.49	224	295	PEAK	Blank					
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
	MHz	dBuV/m	dBuV/m	(dB)	Level	Factor	Loss	Factor	cm	deg																																																																										
1	5854.52	62.64	111.89	-49.25	49.82	36.00	10.29	33.47	224	295	PEAK																																																																									
2	5863.05	62.81	108.55	-45.74	49.96	36.01	10.31	33.47	224	295	PEAK																																																																									
3	5924.89	52.35	68.38	-16.03	39.30	36.09	10.44	33.48	224	295	PEAK																																																																									
4	5949.23	53.37	68.30	-14.93	40.24	36.13	10.49	33.49	224	295	PEAK																																																																									

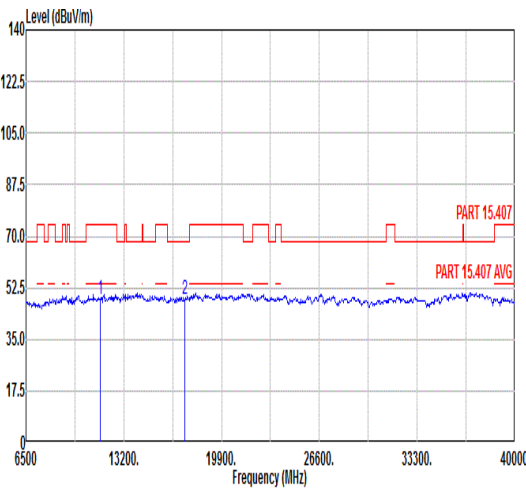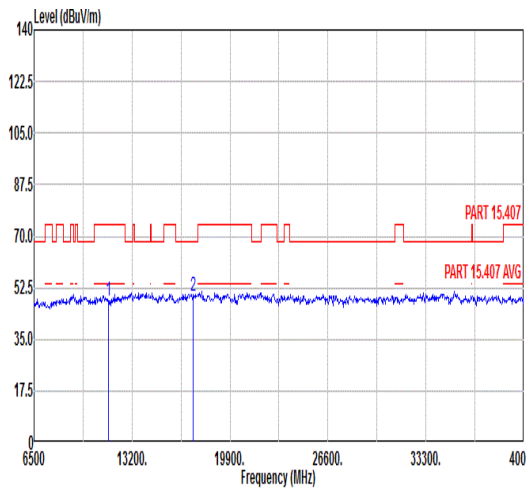

Mode	40																																																																																																																							
	Harmonic																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_5795MHz																																																																																																																							
ANT	22																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11590.00</td><td>48.71</td><td>74.00</td><td>-25.29</td><td>60.36</td><td>39.31</td><td>12.95</td><td>63.91</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17385.00</td><td>48.46</td><td>68.30</td><td>-19.84</td><td>55.13</td><td>42.72</td><td>15.83</td><td>65.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11590.00	48.71	74.00	-25.29	60.36	39.31	12.95	63.91	---	---	Peak	2	17385.00	48.46	68.30	-19.84	55.13	42.72	15.83	65.22	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11590.00</td><td>47.98</td><td>74.00</td><td>-26.02</td><td>59.63</td><td>39.31</td><td>12.95</td><td>63.91</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17385.00</td><td>49.51</td><td>68.30</td><td>-18.79</td><td>56.18</td><td>42.72</td><td>15.83</td><td>65.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11590.00	47.98	74.00	-26.02	59.63	39.31	12.95	63.91	---	---	Peak	2	17385.00	49.51	68.30	-18.79	56.18	42.72	15.83	65.22	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11590.00	48.71	74.00	-25.29	60.36	39.31	12.95	63.91	---	---	Peak																																																																																																													
2	17385.00	48.46	68.30	-19.84	55.13	42.72	15.83	65.22	---	---	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11590.00	47.98	74.00	-26.02	59.63	39.31	12.95	63.91	---	---	Peak																																																																																																													
2	17385.00	49.51	68.30	-18.79	56.18	42.72	15.83	65.22	---	---	Peak																																																																																																													




Mode	41																																																																																																																							
	Band Edge - L																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_5775MHz																																																																																																																							
ANT	22																																																																																																																							
Pol.	Horizontal					Fundamental																																																																																																																		
Peak	Level (dBuV/m) Date: 2025-07-31 PEAK_BE(B4)_T0-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5647.95</td><td>52.38</td><td>68.30</td><td>-15.92</td><td>40.24</td><td>35.71</td><td>9.86</td><td>33.43</td><td>335</td><td>317 PEAK</td></tr><tr><td>2 5650.58</td><td>51.61</td><td>68.73</td><td>-17.12</td><td>39.47</td><td>35.71</td><td>9.86</td><td>33.43</td><td>335</td><td>317 PEAK</td></tr><tr><td>3 5703.25</td><td>53.41</td><td>106.11</td><td>-52.70</td><td>41.10</td><td>35.78</td><td>9.97</td><td>33.44</td><td>335</td><td>317 PEAK</td></tr><tr><td>4 5720.05</td><td>52.02</td><td>110.91</td><td>-58.89</td><td>39.64</td><td>35.81</td><td>10.01</td><td>33.44</td><td>335</td><td>317 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5647.95	52.38	68.30	-15.92	40.24	35.71	9.86	33.43	335	317 PEAK	2 5650.58	51.61	68.73	-17.12	39.47	35.71	9.86	33.43	335	317 PEAK	3 5703.25	53.41	106.11	-52.70	41.10	35.78	9.97	33.44	335	317 PEAK	4 5720.05	52.02	110.91	-58.89	39.64	35.81	10.01	33.44	335	317 PEAK	Level (dBuV/m) Date: 2025-07-31 PART 15.407 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5775.00</td><td>93.34</td><td>-----</td><td>-----</td><td>80.78</td><td>35.89</td><td>10.13</td><td>33.46</td><td>335</td><td>317 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5775.00	93.34	-----	-----	80.78	35.89	10.13	33.46	335	317 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1 5647.95	52.38	68.30	-15.92	40.24	35.71	9.86	33.43	335	317 PEAK																																																																																																															
2 5650.58	51.61	68.73	-17.12	39.47	35.71	9.86	33.43	335	317 PEAK																																																																																																															
3 5703.25	53.41	106.11	-52.70	41.10	35.78	9.97	33.44	335	317 PEAK																																																																																																															
4 5720.05	52.02	110.91	-58.89	39.64	35.81	10.01	33.44	335	317 PEAK																																																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1 5775.00	93.34	-----	-----	80.78	35.89	10.13	33.46	335	317 PEAK																																																																																																															
Avg	Blank					Level (dBuV/m) Date: 2025-07-31 PART 15.407 AVG Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5775.00</td><td>86.30</td><td>-----</td><td>-----</td><td>73.74</td><td>35.89</td><td>10.13</td><td>33.46</td><td>335</td><td>317 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5775.00	86.30	-----	-----	73.74	35.89	10.13	33.46	335	317 AVERAGE																																																																						
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1 5775.00	86.30	-----	-----	73.74	35.89	10.13	33.46	335	317 AVERAGE																																																																																																															



Mode	41																																																																											
	Band Edge - R																																																																											
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_5775MHz																																																																											
ANT	22																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	Level (dBuV/m) Date: 2025-07-31 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.45</td><td>54.25</td><td>112.05</td><td>-57.80</td><td>41.43</td><td>36.00</td><td>10.29</td><td>33.47</td><td>335</td><td>317 PEAK</td></tr><tr><td>2</td><td>5873.00</td><td>52.39</td><td>105.76</td><td>-53.37</td><td>39.51</td><td>36.02</td><td>10.33</td><td>33.47</td><td>335</td><td>317 PEAK</td></tr><tr><td>3</td><td>5924.98</td><td>50.68</td><td>68.32</td><td>-17.64</td><td>37.64</td><td>36.09</td><td>10.44</td><td>33.49</td><td>335</td><td>317 PEAK</td></tr><tr><td>4</td><td>5945.80</td><td>53.07</td><td>68.30</td><td>-15.23</td><td>39.96</td><td>36.12</td><td>10.48</td><td>33.49</td><td>335</td><td>317 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5854.45	54.25	112.05	-57.80	41.43	36.00	10.29	33.47	335	317 PEAK	2	5873.00	52.39	105.76	-53.37	39.51	36.02	10.33	33.47	335	317 PEAK	3	5924.98	50.68	68.32	-17.64	37.64	36.09	10.44	33.49	335	317 PEAK	4	5945.80	53.07	68.30	-15.23	39.96	36.12	10.48	33.49	335	317 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																			
1	5854.45	54.25	112.05	-57.80	41.43	36.00	10.29	33.47	335	317 PEAK																																																																		
2	5873.00	52.39	105.76	-53.37	39.51	36.02	10.33	33.47	335	317 PEAK																																																																		
3	5924.98	50.68	68.32	-17.64	37.64	36.09	10.44	33.49	335	317 PEAK																																																																		
4	5945.80	53.07	68.30	-15.23	39.96	36.12	10.48	33.49	335	317 PEAK																																																																		

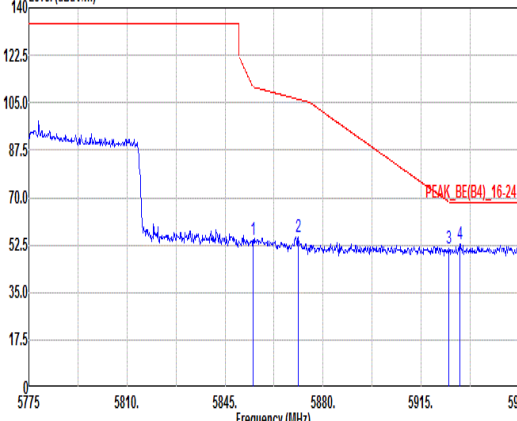

Mode	41																																																																																						
	Band Edge - R																																																																																						
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_5775MHz																																																																																						
ANT	22																																																																																						
Pol.	Vertical						Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-07-31  Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5854.98</td><td>54.53</td><td>110.86</td><td>-56.33</td><td>41.71</td><td>36.00</td><td>10.29</td><td>33.47</td><td>123</td><td>30 PEAK</td></tr><tr><td>2</td><td>5871.08</td><td>55.43</td><td>106.30</td><td>-50.87</td><td>42.55</td><td>36.02</td><td>10.33</td><td>33.47</td><td>123</td><td>30 PEAK</td></tr><tr><td>3</td><td>5924.98</td><td>51.23</td><td>68.32</td><td>-17.09</td><td>38.19</td><td>36.09</td><td>10.44</td><td>33.49</td><td>123</td><td>30 PEAK</td></tr><tr><td>4</td><td>5928.83</td><td>53.05</td><td>68.30</td><td>-15.25</td><td>39.99</td><td>36.10</td><td>10.45</td><td>33.49</td><td>123</td><td>30 PEAK</td></tr></table>								Limit Margin		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5854.98	54.53	110.86	-56.33	41.71	36.00	10.29	33.47	123	30 PEAK	2	5871.08	55.43	106.30	-50.87	42.55	36.02	10.33	33.47	123	30 PEAK	3	5924.98	51.23	68.32	-17.09	38.19	36.09	10.44	33.49	123	30 PEAK	4	5928.83	53.05	68.30	-15.25	39.99	36.10	10.45	33.49	123	30 PEAK	Blank				
		Limit Margin		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																														
1	5854.98	54.53	110.86	-56.33	41.71	36.00	10.29	33.47	123	30 PEAK																																																																													
2	5871.08	55.43	106.30	-50.87	42.55	36.02	10.33	33.47	123	30 PEAK																																																																													
3	5924.98	51.23	68.32	-17.09	38.19	36.09	10.44	33.49	123	30 PEAK																																																																													
4	5928.83	53.05	68.30	-15.25	39.99	36.10	10.45	33.49	123	30 PEAK																																																																													



Mode	42																																																																									
	Band Edge																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial RU_5180MHz																																																																									
ANT	22																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5137.52</td><td>51.97</td><td>74.00</td><td>-22.03</td><td>41.65</td><td>35.28</td><td>8.51</td><td>33.47</td><td>100 34 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5137.52	51.97	74.00	-22.03	41.65	35.28	8.51	33.47	100 34 PEAK	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5170.00</td><td>106.77</td><td>-----</td><td>-----</td><td>96.37</td><td>35.30</td><td>8.57</td><td>33.47</td><td>100 34 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5170.00	106.77	-----	-----	96.37	35.30	8.57	33.47	100 34 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5137.52	51.97	74.00	-22.03	41.65	35.28	8.51	33.47	100 34 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5170.00	106.77	-----	-----	96.37	35.30	8.57	33.47	100 34 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5102.60</td><td>41.82</td><td>54.00</td><td>-12.18</td><td>31.59</td><td>35.26</td><td>8.45</td><td>33.48</td><td>100 34 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5102.60	41.82	54.00	-12.18	31.59	35.26	8.45	33.48	100 34 AVERAGE	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5170.00</td><td>98.70</td><td>-----</td><td>-----</td><td>88.30</td><td>35.30</td><td>8.57</td><td>33.47</td><td>100 34 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5170.00	98.70	-----	-----	88.30	35.30	8.57	33.47	100 34 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5102.60	41.82	54.00	-12.18	31.59	35.26	8.45	33.48	100 34 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5170.00	98.70	-----	-----	88.30	35.30	8.57	33.47	100 34 AVERAGE																																																																		







Mode	42	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial RU_5180MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2025-07-28	







Mode	43																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Partial RU_5320MHz																																																																																	
ANT	22																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5362.14</td><td>52.44</td><td>74.00</td><td>-21.56</td><td>41.02</td><td>35.42</td><td>9.43</td><td>33.43</td><td>100</td><td>55</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5362.14	52.44	74.00	-21.56	41.02	35.42	9.43	33.43	100	55	PEAK	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5326.00</td><td>106.52</td><td>-----</td><td>-----</td><td>95.31</td><td>35.40</td><td>9.24</td><td>33.43</td><td>100</td><td>55</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5326.00	106.52	-----	-----	95.31	35.40	9.24	33.43	100	55	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5362.14	52.44	74.00	-21.56	41.02	35.42	9.43	33.43	100	55	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5326.00	106.52	-----	-----	95.31	35.40	9.24	33.43	100	55	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.74</td><td>41.90</td><td>54.00</td><td>-12.10</td><td>30.14</td><td>35.48</td><td>9.69</td><td>33.41</td><td>100</td><td>55</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5458.74	41.90	54.00	-12.10	30.14	35.48	9.69	33.41	100	55	AVERAGE	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5326.00</td><td>98.91</td><td>-----</td><td>-----</td><td>87.70</td><td>35.40</td><td>9.24</td><td>33.43</td><td>100</td><td>55</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5326.00	98.91	-----	-----	87.70	35.40	9.24	33.43	100	55	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5458.74	41.90	54.00	-12.10	30.14	35.48	9.69	33.41	100	55	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5326.00	98.91	-----	-----	87.70	35.40	9.24	33.43	100	55	AVERAGE																																																																							

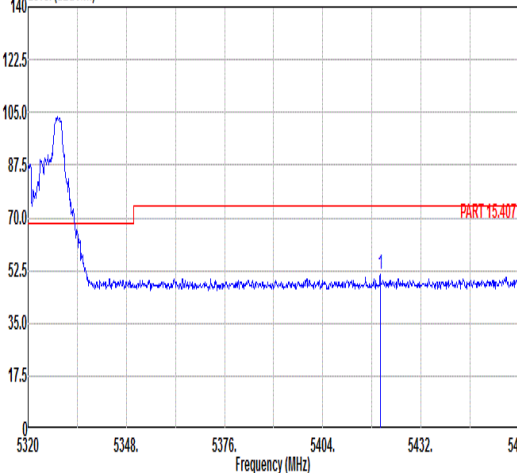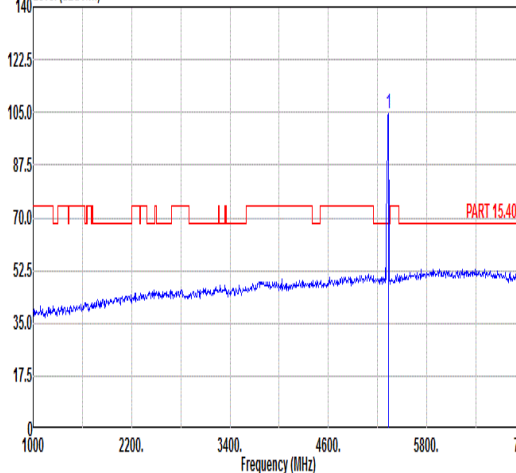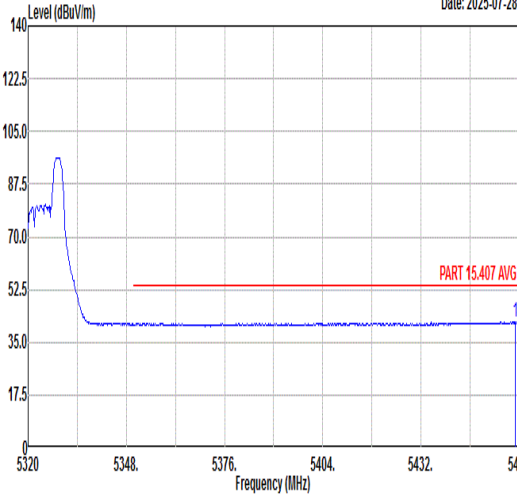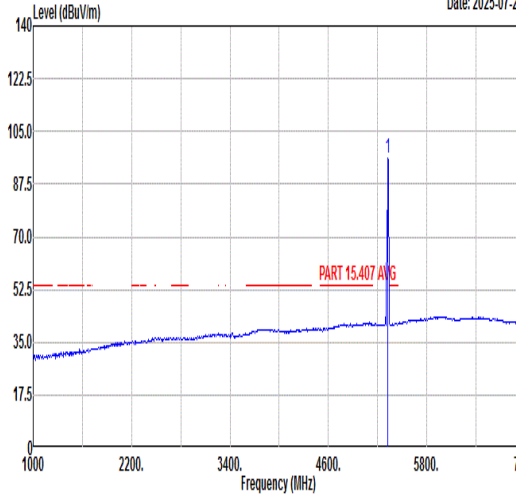

Mode	43																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Partial RU_5320MHz																																																																																	
ANT	22																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-07-28  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5420.38</td><td>51.13</td><td>74.00</td><td>-22.87</td><td>39.43</td><td>35.45</td><td>9.67</td><td>33.42</td><td>379 286 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5420.38	51.13	74.00	-22.87	39.43	35.45	9.67	33.42	379 286 PEAK	Level (dBuV/m) Date: 2025-07-28  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5332.00</td><td>104.81</td><td>-----</td><td>-----</td><td>93.57</td><td>35.40</td><td>9.27</td><td>33.43</td><td>379 286 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5332.00	104.81	-----	-----	93.57	35.40	9.27	33.43	379 286 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5420.38	51.13	74.00	-22.87	39.43	35.45	9.67	33.42	379 286 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5332.00	104.81	-----	-----	93.57	35.40	9.27	33.43	379 286 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2025-07-28  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.88</td><td>41.75</td><td>54.00</td><td>-12.25</td><td>29.99</td><td>35.48</td><td>9.69</td><td>33.41</td><td>379 286 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5458.88	41.75	54.00	-12.25	29.99	35.48	9.69	33.41	379 286 AVERAGE	Level (dBuV/m) Date: 2025-07-28  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5326.00</td><td>95.92</td><td>-----</td><td>-----</td><td>84.71</td><td>35.40</td><td>9.24</td><td>33.43</td><td>379 286 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5326.00	95.92	-----	-----	84.71	35.40	9.24	33.43	379 286 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5458.88	41.75	54.00	-12.25	29.99	35.48	9.69	33.41	379 286 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5326.00	95.92	-----	-----	84.71	35.40	9.24	33.43	379 286 AVERAGE																																																																									

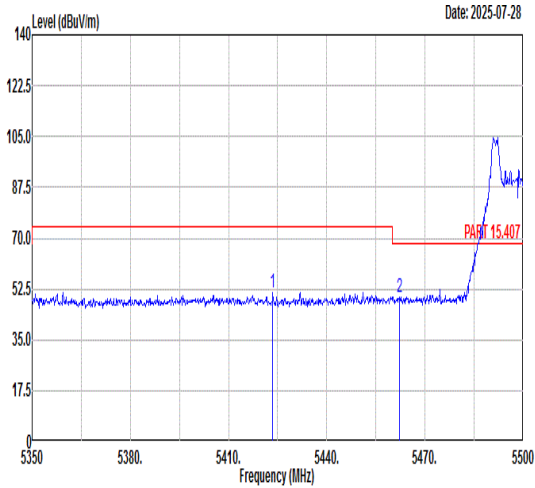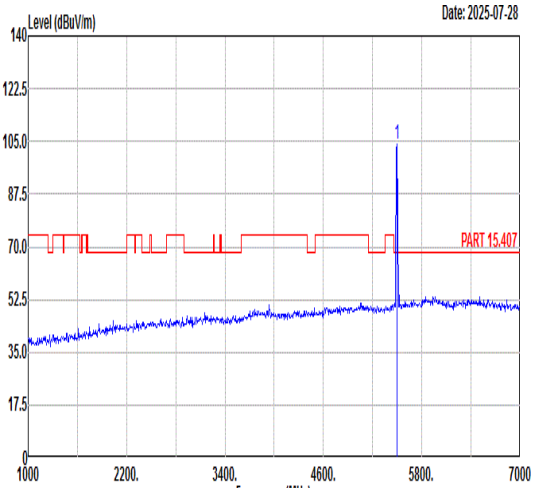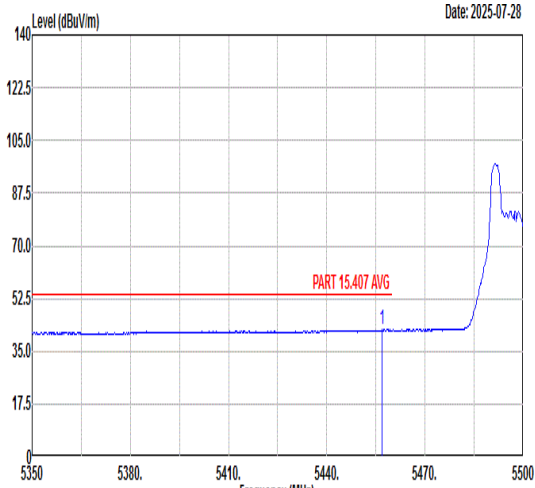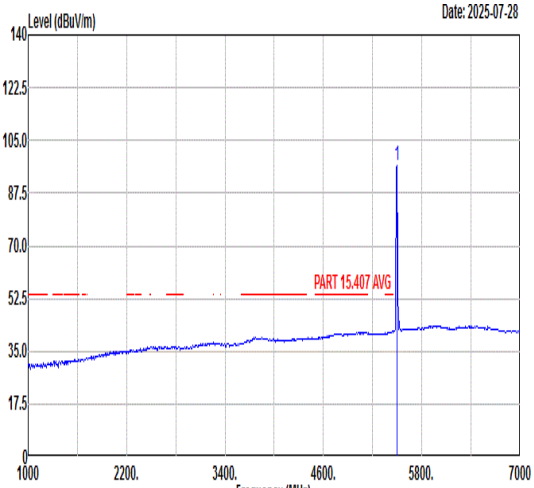

Mode	44																																																																																																						
	Band Edge																																																																																																						
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Partial RU_5500MHz																																																																																																						
ANT	22																																																																																																						
Pol.	Horizontal					Fundamental																																																																																																	
Peak	 Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5423.50</td><td>51.27</td><td>74.00</td><td>-22.73</td><td>39.57</td><td>35.45</td><td>9.67</td><td>33.42</td><td>100</td><td>55 PEAK</td></tr><tr><td>2</td><td>5462.20</td><td>49.67</td><td>68.30</td><td>-18.63</td><td>37.91</td><td>35.48</td><td>9.69</td><td>33.41</td><td>100</td><td>55 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5423.50	51.27	74.00	-22.73	39.57	35.45	9.67	33.42	100	55 PEAK	2	5462.20	49.67	68.30	-18.63	37.91	35.48	9.69	33.41	100	55 PEAK	 Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5494.00</td><td>104.01</td><td>-----</td><td>-----</td><td>92.21</td><td>35.50</td><td>9.70</td><td>33.40</td><td>100</td><td>55 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5494.00	104.01	-----	-----	92.21	35.50	9.70	33.40	100	55 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5423.50	51.27	74.00	-22.73	39.57	35.45	9.67	33.42	100	55 PEAK																																																																																													
2	5462.20	49.67	68.30	-18.63	37.91	35.48	9.69	33.41	100	55 PEAK																																																																																													
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5494.00	104.01	-----	-----	92.21	35.50	9.70	33.40	100	55 PEAK																																																																																													
Avg	 Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5456.95</td><td>42.24</td><td>54.00</td><td>-11.76</td><td>30.49</td><td>35.47</td><td>9.69</td><td>33.41</td><td>100</td><td>55 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5456.95	42.24	54.00	-11.76	30.49	35.47	9.69	33.41	100	55 AVERAGE	 Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5494.00</td><td>96.71</td><td>-----</td><td>-----</td><td>84.91</td><td>35.50</td><td>9.70</td><td>33.40</td><td>100</td><td>55 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5494.00	96.71	-----	-----	84.91	35.50	9.70	33.40	100	55 AVERAGE											
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5456.95	42.24	54.00	-11.76	30.49	35.47	9.69	33.41	100	55 AVERAGE																																																																																													
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5494.00	96.71	-----	-----	84.91	35.50	9.70	33.40	100	55 AVERAGE																																																																																													






Mode	44																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Partial RU_5500MHz																																																																																											
ANT	22																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5404.30</td><td>50.80</td><td>74.00</td><td>-23.20</td><td>39.13</td><td>35.44</td><td>9.65</td><td>33.42</td><td>386 205 PEAK</td></tr><tr><td>2</td><td>5465.35</td><td>50.06</td><td>68.30</td><td>-18.24</td><td>38.30</td><td>35.48</td><td>9.69</td><td>33.41</td><td>386 205 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5404.30	50.80	74.00	-23.20	39.13	35.44	9.65	33.42	386 205 PEAK	2	5465.35	50.06	68.30	-18.24	38.30	35.48	9.69	33.41	386 205 PEAK	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5494.00</td><td>97.68</td><td>-----</td><td>85.88</td><td>35.50</td><td>9.70</td><td>33.40</td><td>386</td><td>205 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5494.00	97.68	-----	85.88	35.50	9.70	33.40	386	205 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5404.30	50.80	74.00	-23.20	39.13	35.44	9.65	33.42	386 205 PEAK																																																																																			
2	5465.35	50.06	68.30	-18.24	38.30	35.48	9.69	33.41	386 205 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5494.00	97.68	-----	85.88	35.50	9.70	33.40	386	205 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.05</td><td>41.68</td><td>54.00</td><td>-12.32</td><td>29.92</td><td>35.48</td><td>9.69</td><td>33.41</td><td>386 205 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.05	41.68	54.00	-12.32	29.92	35.48	9.69	33.41	386 205 AVERAGE	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5494.00</td><td>90.77</td><td>-----</td><td>78.97</td><td>35.50</td><td>9.70</td><td>33.40</td><td>386</td><td>205 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5494.00	90.77	-----	78.97	35.50	9.70	33.40	386	205 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5459.05	41.68	54.00	-12.32	29.92	35.48	9.69	33.41	386 205 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5494.00	90.77	-----	78.97	35.50	9.70	33.40	386	205 AVERAGE																																																																																			



Mode	45	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial RU_5700MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	Level (dBuV/m) Date: 2025-07-28	

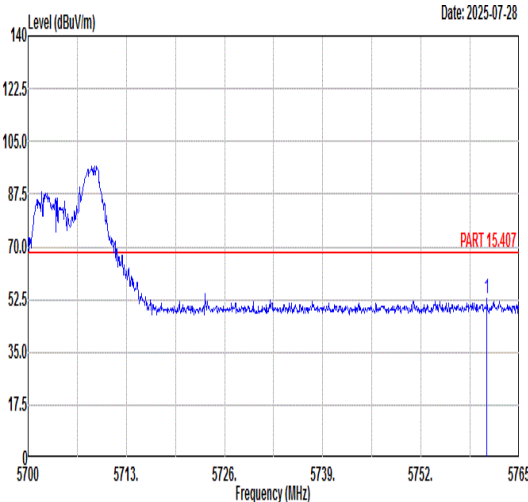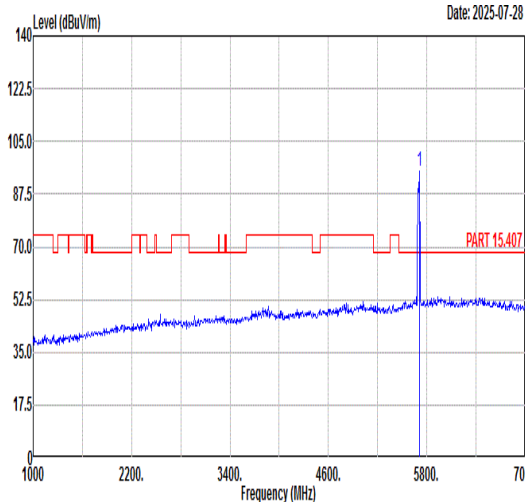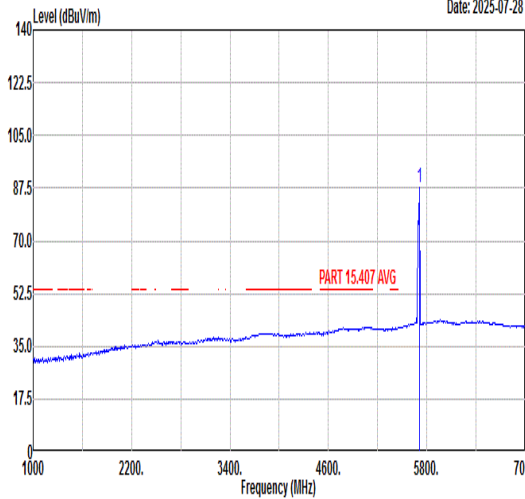

Mode	45																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial RU_5700MHz																																																																																											
ANT	22																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5760.71</td><td>52.67</td><td>68.30</td><td>-15.63</td><td>40.17</td><td>35.86</td><td>10.09</td><td>33.45</td><td>386</td><td>205 PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5760.71	52.67	68.30	-15.63	40.17	35.86	10.09	33.45	386	205 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5710.00</td><td>94.83</td><td>-----</td><td>-----</td><td>82.49</td><td>35.79</td><td>9.99</td><td>33.44</td><td>386</td><td>205 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5710.00	94.83	-----	-----	82.49	35.79	9.99	33.44	386
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5760.71	52.67	68.30	-15.63	40.17	35.86	10.09	33.45	386	205 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5710.00	94.83	-----	-----	82.49	35.79	9.99	33.44	386	205 PEAK																																																																																		
Avg	Blank																																																																																											
							<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5710.00</td><td>87.63</td><td>-----</td><td>-----</td><td>75.29</td><td>35.79</td><td>9.99</td><td>33.44</td><td>386</td><td>205 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5710.00	87.63	-----	-----	75.29	35.79	9.99	33.44	386	205 AVERAGE																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5710.00	87.63	-----	-----	75.29	35.79	9.99	33.44	386	205 AVERAGE																																																																																		



Mode	46																																																																																																																									
	Band Edge																																																																																																																									
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Partial RU_5745MHz																																																																																																																									
ANT	22																																																																																																																									
Pol.	Horizontal	Fundamental																																																																																																																								
Peak	Level (dBuV/m) Date: 2025-07-31 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5600.44</td><td>52.08</td><td>68.30</td><td>-16.22</td><td>40.10</td><td>35.64</td><td>9.76</td><td>33.42</td><td>200</td><td>34</td><td>PEAK</td></tr><tr><td>2</td><td>5650.90</td><td>51.54</td><td>68.96</td><td>-17.42</td><td>39.40</td><td>35.71</td><td>9.86</td><td>33.43</td><td>200</td><td>34</td><td>PEAK</td></tr><tr><td>3</td><td>5701.94</td><td>54.00</td><td>105.74</td><td>-51.74</td><td>41.69</td><td>35.78</td><td>9.97</td><td>33.44</td><td>200</td><td>34</td><td>PEAK</td></tr><tr><td>4</td><td>5720.06</td><td>50.27</td><td>110.94</td><td>-60.67</td><td>37.89</td><td>35.81</td><td>10.01</td><td>33.44</td><td>200</td><td>34</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5600.44	52.08	68.30	-16.22	40.10	35.64	9.76	33.42	200	34	PEAK	2	5650.90	51.54	68.96	-17.42	39.40	35.71	9.86	33.43	200	34	PEAK	3	5701.94	54.00	105.74	-51.74	41.69	35.78	9.97	33.44	200	34	PEAK	4	5720.06	50.27	110.94	-60.67	37.89	35.81	10.01	33.44	200	34	PEAK	Level (dBuV/m) Date: 2025-07-31 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5734.00</td><td>103.31</td><td>-----</td><td>-----</td><td>90.89</td><td>35.83</td><td>10.04</td><td>33.45</td><td>200</td><td>34</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5734.00	103.31	-----	-----	90.89	35.83	10.04	33.45	200	34	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	5600.44	52.08	68.30	-16.22	40.10	35.64	9.76	33.42	200	34	PEAK																																																																																																															
2	5650.90	51.54	68.96	-17.42	39.40	35.71	9.86	33.43	200	34	PEAK																																																																																																															
3	5701.94	54.00	105.74	-51.74	41.69	35.78	9.97	33.44	200	34	PEAK																																																																																																															
4	5720.06	50.27	110.94	-60.67	37.89	35.81	10.01	33.44	200	34	PEAK																																																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	5734.00	103.31	-----	-----	90.89	35.83	10.04	33.45	200	34	PEAK																																																																																																															
Avg	Blank	Level (dBuV/m) Date: 2025-07-31 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5734.00</td><td>95.44</td><td>-----</td><td>-----</td><td>83.02</td><td>35.83</td><td>10.04</td><td>33.45</td><td>200</td><td>34</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5734.00	95.44	-----	-----	83.02	35.83	10.04	33.45	200	34	AVERAGE																																																																														
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	5734.00	95.44	-----	-----	83.02	35.83	10.04	33.45	200	34	AVERAGE																																																																																																															







Mode	47																																																																																																																				
	Band Edge																																																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU_5825MHz																																																																																																																				
ANT	22																																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																																			
Peak	Level (dBuV/m) Date: 2025-07-31 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>52.73</td><td>110.80</td><td>-58.07</td><td>39.91</td><td>36.00</td><td>10.29</td><td>33.47</td><td>100</td><td>169 PEAK</td></tr><tr><td>2</td><td>5873.38</td><td>51.72</td><td>105.65</td><td>-53.93</td><td>38.84</td><td>36.02</td><td>10.33</td><td>33.47</td><td>100</td><td>169 PEAK</td></tr><tr><td>3</td><td>5924.63</td><td>51.66</td><td>68.58</td><td>-16.92</td><td>38.61</td><td>36.09</td><td>10.44</td><td>33.48</td><td>100</td><td>169 PEAK</td></tr><tr><td>4</td><td>5935.25</td><td>52.21</td><td>68.30</td><td>-16.09</td><td>39.13</td><td>36.11</td><td>10.46</td><td>33.49</td><td>100</td><td>169 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5855.00	52.73	110.80	-58.07	39.91	36.00	10.29	33.47	100	169 PEAK	2	5873.38	51.72	105.65	-53.93	38.84	36.02	10.33	33.47	100	169 PEAK	3	5924.63	51.66	68.58	-16.92	38.61	36.09	10.44	33.48	100	169 PEAK	4	5935.25	52.21	68.30	-16.09	39.13	36.11	10.46	33.49	100	169 PEAK	Level (dBuV/m) Date: 2025-07-31 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5836.00</td><td>79.52</td><td>-----</td><td>-----</td><td>66.77</td><td>35.97</td><td>10.25</td><td>33.47</td><td>100</td><td>169 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5836.00	79.52	-----	-----	66.77	35.97	10.25	33.47	100	169 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5855.00	52.73	110.80	-58.07	39.91	36.00	10.29	33.47	100	169 PEAK																																																																																																											
2	5873.38	51.72	105.65	-53.93	38.84	36.02	10.33	33.47	100	169 PEAK																																																																																																											
3	5924.63	51.66	68.58	-16.92	38.61	36.09	10.44	33.48	100	169 PEAK																																																																																																											
4	5935.25	52.21	68.30	-16.09	39.13	36.11	10.46	33.49	100	169 PEAK																																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5836.00	79.52	-----	-----	66.77	35.97	10.25	33.47	100	169 PEAK																																																																																																											
Avg	Blank	Level (dBuV/m) Date: 2025-07-31 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5836.00</td><td>77.53</td><td>-----</td><td>-----</td><td>64.78</td><td>35.97</td><td>10.25</td><td>33.47</td><td>100</td><td>169 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5836.00	77.53	-----	-----	64.78	35.97	10.25	33.47	100	169 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5836.00	77.53	-----	-----	64.78	35.97	10.25	33.47	100	169 AVERAGE																																																																																																											





Mode	47																																																																																																																							
	Band Edge																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU_5825MHz																																																																																																																							
ANT	22																																																																																																																							
Pol.	Vertical					Fundamental																																																																																																																		
Peak	Level (dBuV/m) Date: 2025-07-31 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5854.75</td><td>50.23</td><td>111.37</td><td>-61.14</td><td>37.41</td><td>36.00</td><td>10.29</td><td>33.47</td><td>178</td><td>360° PEAK</td></tr><tr><td>2 5874.88</td><td>50.55</td><td>105.23</td><td>-54.68</td><td>37.67</td><td>36.02</td><td>10.33</td><td>33.47</td><td>178</td><td>360° PEAK</td></tr><tr><td>3 5924.63</td><td>51.76</td><td>68.58</td><td>-16.82</td><td>38.71</td><td>36.09</td><td>10.44</td><td>33.48</td><td>178</td><td>360° PEAK</td></tr><tr><td>4 5945.75</td><td>53.36</td><td>68.30</td><td>-14.94</td><td>40.25</td><td>36.12</td><td>10.48</td><td>33.49</td><td>178</td><td>360° PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5854.75	50.23	111.37	-61.14	37.41	36.00	10.29	33.47	178	360° PEAK	2 5874.88	50.55	105.23	-54.68	37.67	36.02	10.33	33.47	178	360° PEAK	3 5924.63	51.76	68.58	-16.82	38.71	36.09	10.44	33.48	178	360° PEAK	4 5945.75	53.36	68.30	-14.94	40.25	36.12	10.48	33.49	178	360° PEAK	Level (dBuV/m) Date: 2025-07-31 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5836.00</td><td>89.90</td><td>-----</td><td>-----</td><td>77.15</td><td>35.97</td><td>10.25</td><td>33.47</td><td>178</td><td>360° PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5836.00	89.90	-----	-----	77.15	35.97	10.25	33.47	178	360° PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1 5854.75	50.23	111.37	-61.14	37.41	36.00	10.29	33.47	178	360° PEAK																																																																																																															
2 5874.88	50.55	105.23	-54.68	37.67	36.02	10.33	33.47	178	360° PEAK																																																																																																															
3 5924.63	51.76	68.58	-16.82	38.71	36.09	10.44	33.48	178	360° PEAK																																																																																																															
4 5945.75	53.36	68.30	-14.94	40.25	36.12	10.48	33.49	178	360° PEAK																																																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1 5836.00	89.90	-----	-----	77.15	35.97	10.25	33.47	178	360° PEAK																																																																																																															
Avg	Blank					Level (dBuV/m) Date: 2025-07-31 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5836.00</td><td>81.32</td><td>-----</td><td>-----</td><td>68.57</td><td>35.97</td><td>10.25</td><td>33.47</td><td>178</td><td>360° AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5836.00	81.32	-----	-----	68.57	35.97	10.25	33.47	178	360° AVERAGE																																																																						
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1 5836.00	81.32	-----	-----	68.57	35.97	10.25	33.47	178	360° AVERAGE																																																																																																															

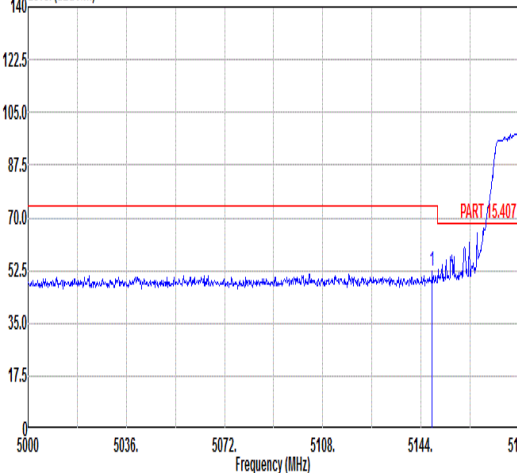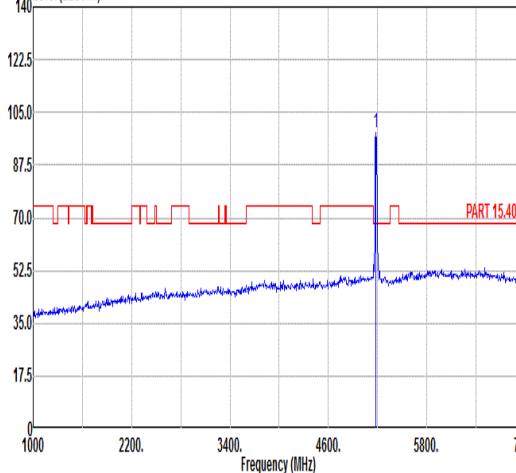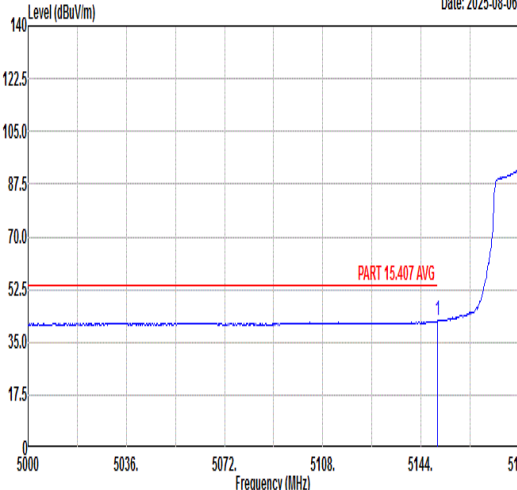
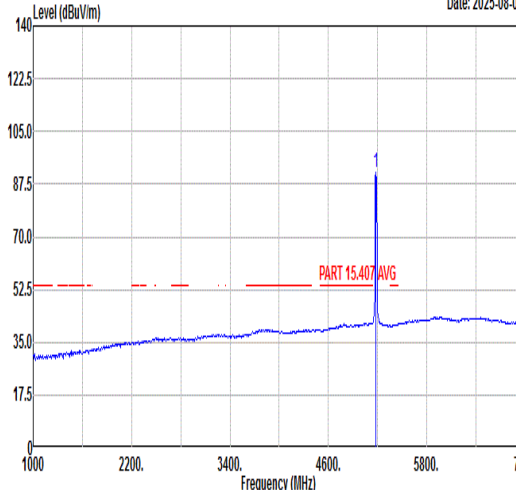


Mode	48																																																																																			
	Band Edge																																																																																			
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																			
ANT	22																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-08-06  500050365072510851445180 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.14</td><td>52.22</td><td>74.00</td><td>-21.78</td><td>41.87</td><td>35.29</td><td>8.53</td><td>33.47</td><td>100</td><td>41 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.14	52.22	74.00	-21.78	41.87	35.29	8.53	33.47	100	41 PEAK	Level (dBuV/m) Date: 2025-08-06  100022003400460058007000 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>98.42</td><td>-----</td><td>-----</td><td>87.98</td><td>35.31</td><td>8.59</td><td>33.46</td><td>100</td><td>41 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	98.42	-----	-----	87.98	35.31	8.59	33.46	100	41 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5148.14	52.22	74.00	-21.78	41.87	35.29	8.53	33.47	100	41 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5180.00	98.42	-----	-----	87.98	35.31	8.59	33.46	100	41 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2025-08-06  500050365072510851445180 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.94</td><td>42.09</td><td>54.00</td><td>-11.91</td><td>31.73</td><td>35.29</td><td>8.54</td><td>33.47</td><td>100</td><td>41 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.94	42.09	54.00	-11.91	31.73	35.29	8.54	33.47	100	41 AVERAGE	Level (dBuV/m) Date: 2025-08-06  100022003400460058007000 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>91.27</td><td>-----</td><td>-----</td><td>80.83</td><td>35.31</td><td>8.59</td><td>33.46</td><td>100</td><td>41 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	91.27	-----	-----	80.83	35.31	8.59	33.46	100	41 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5149.94	42.09	54.00	-11.91	31.73	35.29	8.54	33.47	100	41 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5180.00	91.27	-----	-----	80.83	35.31	8.59	33.46	100	41 AVERAGE																																																																										



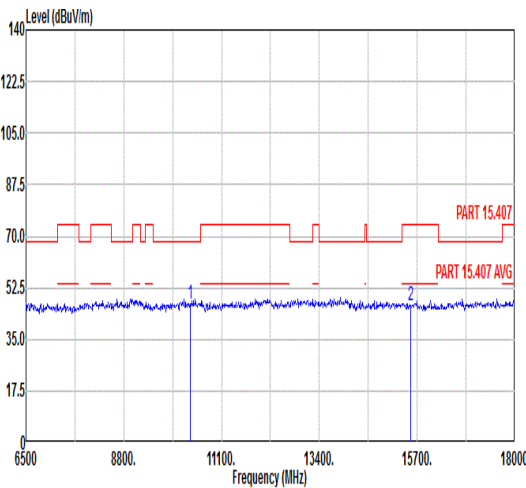
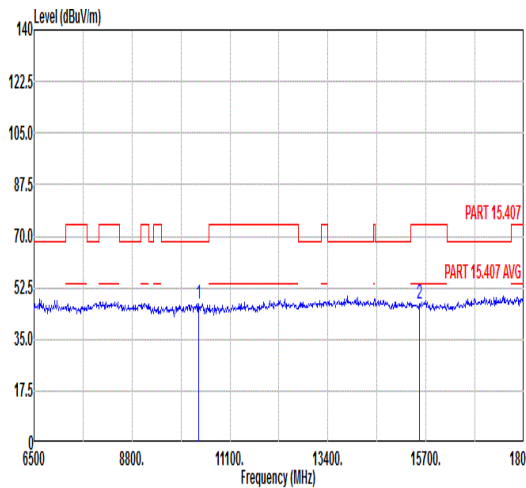


Mode	48																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																																																									
ANT	22																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg																																																																																																																										
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 10360.00</td><td>46.90</td><td>68.30</td><td>-21.40</td><td>60.13</td><td>38.47</td><td>12.06</td><td>63.76</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 15540.00</td><td>46.39</td><td>74.00</td><td>-27.61</td><td>54.87</td><td>41.32</td><td>14.58</td><td>64.38</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 10360.00	46.90	68.30	-21.40	60.13	38.47	12.06	63.76	---	---	Peak	2 15540.00	46.39	74.00	-27.61	54.87	41.32	14.58	64.38	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 10360.00</td><td>47.17</td><td>68.30</td><td>-21.13</td><td>60.40</td><td>38.47</td><td>12.06</td><td>63.76</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 15540.00</td><td>46.81</td><td>74.00</td><td>-27.19</td><td>55.29</td><td>41.32</td><td>14.58</td><td>64.38</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 10360.00	47.17	68.30	-21.13	60.40	38.47	12.06	63.76	---	---	Peak	2 15540.00	46.81	74.00	-27.19	55.29	41.32	14.58	64.38	---	---
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1 10360.00	46.90	68.30	-21.40	60.13	38.47	12.06	63.76	---	---	Peak																																																																																																																
2 15540.00	46.39	74.00	-27.61	54.87	41.32	14.58	64.38	---	---	Peak																																																																																																																
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1 10360.00	47.17	68.30	-21.13	60.40	38.47	12.06	63.76	---	---	Peak																																																																																																																
2 15540.00	46.81	74.00	-27.19	55.29	41.32	14.58	64.38	---	---	Peak																																																																																																																

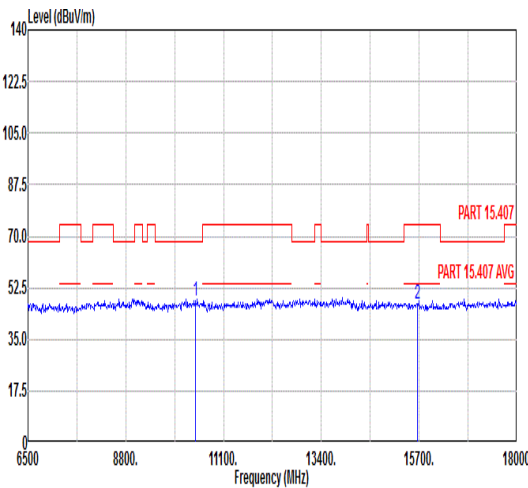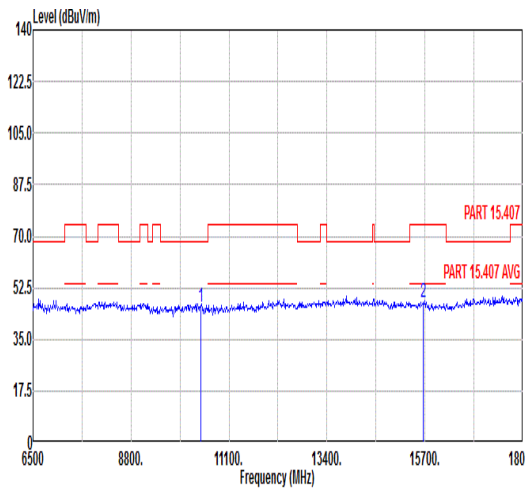

Mode	49																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz																																																																																																																																	
ANT	22																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10440.00</td><td>47.98</td><td>68.30</td><td>-20.32</td><td>61.09</td><td>38.49</td><td>12.12</td><td>63.72</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.02</td><td>74.00</td><td>-26.98</td><td>55.44</td><td>41.40</td><td>14.64</td><td>64.46</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10440.00	47.98	68.30	-20.32	61.09	38.49	12.12	63.72	---	---	Peak	2	15660.00	47.02	74.00	-26.98	55.44	41.40	14.64	64.46	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10440.00</td><td>45.80</td><td>68.30</td><td>-22.50</td><td>58.91</td><td>38.49</td><td>12.12</td><td>63.72</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.32</td><td>74.00</td><td>-26.68</td><td>55.74</td><td>41.40</td><td>14.64</td><td>64.46</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10440.00	45.80	68.30	-22.50	58.91	38.49	12.12	63.72	---	---	Peak	2	15660.00	47.32	74.00	-26.68	55.74	41.40	14.64	64.46	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10440.00	47.98	68.30	-20.32	61.09	38.49	12.12	63.72	---	---	Peak																																																																																																																							
2	15660.00	47.02	74.00	-26.98	55.44	41.40	14.64	64.46	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10440.00	45.80	68.30	-22.50	58.91	38.49	12.12	63.72	---	---	Peak																																																																																																																							
2	15660.00	47.32	74.00	-26.68	55.74	41.40	14.64	64.46	---	---	Peak																																																																																																																							

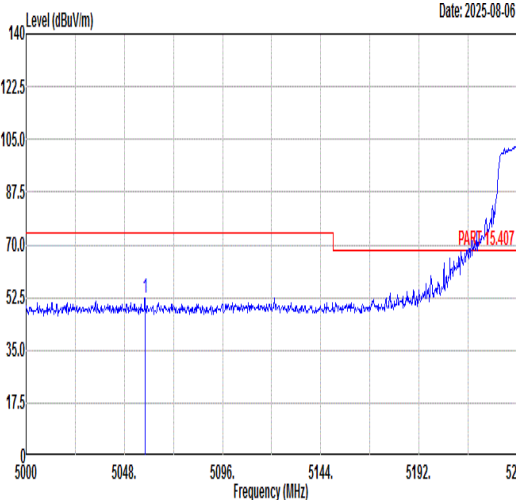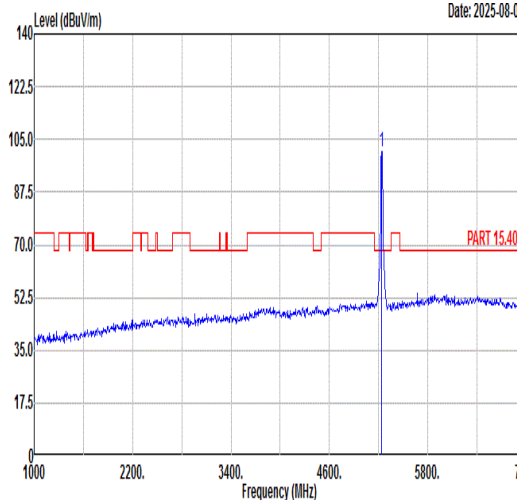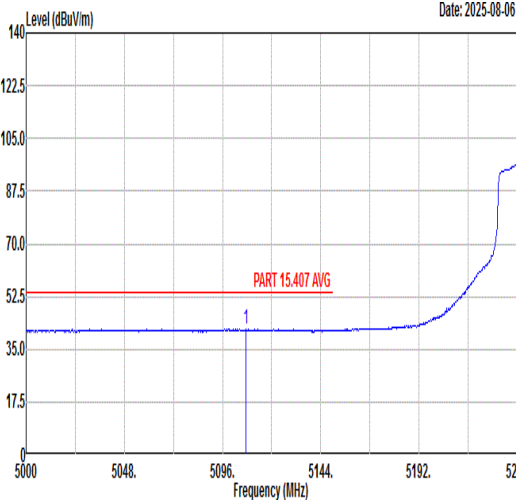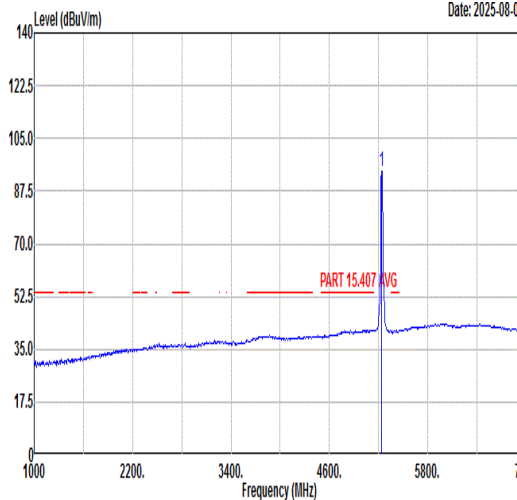

Mode	50																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz																																																																																									
ANT	22																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	 Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a blue trace with a peak at 5240 MHz. A red line indicates the limit at 70.0 dBuV/m. The peak is labeled PART 15.407. The date is 2025-08-06. <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5058.08</td><td>52.34</td><td>74.00</td><td>-21.66</td><td>42.23</td><td>35.23</td><td>8.37</td><td>33.49</td><td>106 46 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5058.08	52.34	74.00	-21.66	42.23	35.23	8.37	33.49	106 46 PEAK	 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a blue trace with a peak at 5240 MHz. A red line indicates the limit at 70.0 dBuV/m. The peak is labeled PART 15.407. The date is 2025-08-06. <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>101.06</td><td>-----</td><td>-----</td><td>90.35</td><td>35.35</td><td>8.81</td><td>33.45</td><td>200 42 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5240.00	101.06	-----	-----	90.35	35.35	8.81	33.45	200 42 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5058.08	52.34	74.00	-21.66	42.23	35.23	8.37	33.49	106 46 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5240.00	101.06	-----	-----	90.35	35.35	8.81	33.45	200 42 PEAK																																																																																	
Avg	 Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a blue trace with a peak at 5240 MHz. A red line indicates the limit at 52.5 dBuV/m. The peak is labeled PART 15.407 AVG. The date is 2025-08-06. <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5107.52</td><td>41.73</td><td>54.00</td><td>-12.27</td><td>31.49</td><td>35.26</td><td>8.46</td><td>33.48</td><td>106 46 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5107.52	41.73	54.00	-12.27	31.49	35.26	8.46	33.48	106 46 AVERAGE	 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a blue trace with a peak at 5240 MHz. A red line indicates the limit at 52.5 dBuV/m. The peak is labeled PART 15.407 AVG. The date is 2025-08-06. <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>94.09</td><td>-----</td><td>-----</td><td>83.38</td><td>35.35</td><td>8.81</td><td>33.45</td><td>200 42 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5240.00	94.09	-----	-----	83.38	35.35	8.81	33.45	200 42 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5107.52	41.73	54.00	-12.27	31.49	35.26	8.46	33.48	106 46 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5240.00	94.09	-----	-----	83.38	35.35	8.81	33.45	200 42 AVERAGE																																																																																	



Mode	50																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz																																																		
ANT	22																																																		
Pol.	Horizontal					Fundamental																																													
Peak	Date: 2025-08-06 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5417.54</td><td>50.56</td><td>74.00</td><td>-23.44</td><td>38.86</td><td>35.45</td><td>9.67</td><td>33.42</td><td>200</td><td>42 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5417.54	50.56	74.00	-23.44	38.86	35.45	9.67	33.42	200	42 PEAK	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	5417.54	50.56	74.00	-23.44	38.86	35.45	9.67	33.42	200	42 PEAK																																									
Avg	Date: 2025-08-06 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.56</td><td>41.46</td><td>54.00</td><td>-12.54</td><td>29.70</td><td>35.48</td><td>9.69</td><td>33.41</td><td>200</td><td>42 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.56	41.46	54.00	-12.54	29.70	35.48	9.69	33.41	200	42 AVERAGE	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	5459.56	41.46	54.00	-12.54	29.70	35.48	9.69	33.41	200	42 AVERAGE																																									





Mode	50																																																													
	Band Edge - L																																																													
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz																																																													
ANT	22																																																													
Pol.	Vertical	Fundamental																																																												
Peak	Level (dBuV/m) Date: 2025-08-06 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5000 5048 5096 5144 5192 5240 Frequency (MHz) Limit Margin Read Ant Cable Preamp APos TPos Remark <table><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5065.28</td><td>50.82</td><td>74.00</td><td>-23.18</td><td>40.69</td><td>35.24</td><td>8.38</td><td>33.49</td><td>392</td><td>203 PEAK</td></tr></table>	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5065.28	50.82	74.00	-23.18	40.69	35.24	8.38	33.49	392	203 PEAK	Level (dBuV/m) Date: 2025-08-06 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) Limit Margin Read Ant Cable Preamp APos TPos Remark <table><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5240.00</td><td>94.77</td><td>-----</td><td>-----</td><td>84.06</td><td>35.35</td><td>8.81</td><td>33.45</td><td>392</td><td>203 PEAK</td></tr></table>	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5240.00	94.77	-----	-----	84.06	35.35	8.81	33.45	392	203 PEAK
	Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																					
1 5065.28	50.82	74.00	-23.18	40.69	35.24	8.38	33.49	392	203 PEAK																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																					
1 5240.00	94.77	-----	-----	84.06	35.35	8.81	33.45	392	203 PEAK																																																					
Avg	Level (dBuV/m) Date: 2025-08-06 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5000 5048 5096 5144 5192 5240 Frequency (MHz) Limit Margin Read Ant Cable Preamp APos TPos Remark <table><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5061.92</td><td>41.43</td><td>54.00</td><td>-12.57</td><td>31.31</td><td>35.24</td><td>8.37</td><td>33.49</td><td>392</td><td>203 AVERAGE</td></tr></table>	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5061.92	41.43	54.00	-12.57	31.31	35.24	8.37	33.49	392	203 AVERAGE	Level (dBuV/m) Date: 2025-08-06 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) Limit Margin Read Ant Cable Preamp APos TPos Remark <table><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5240.00</td><td>88.35</td><td>-----</td><td>-----</td><td>77.64</td><td>35.35</td><td>8.81</td><td>33.45</td><td>392</td><td>203 AVERAGE</td></tr></table>	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5240.00	88.35	-----	-----	77.64	35.35	8.81	33.45	392	203 AVERAGE
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																					
1 5061.92	41.43	54.00	-12.57	31.31	35.24	8.37	33.49	392	203 AVERAGE																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																					
1 5240.00	88.35	-----	-----	77.64	35.35	8.81	33.45	392	203 AVERAGE																																																					



Mode	50																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz																																										
ANT	22																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2025-08-06 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5444.38</td><td>50.60</td><td>74.00</td><td>-23.40</td><td>38.86</td><td>35.47</td><td>9.68</td><td>33.41</td><td>392</td><td>203 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5444.38	50.60	74.00	-23.40	38.86	35.47	9.68	33.41	392	203 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5444.38	50.60	74.00	-23.40	38.86	35.47	9.68	33.41	392	203 PEAK																																	
Avg	Date: 2025-08-06 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5452.96</td><td>41.37</td><td>54.00</td><td>-12.63</td><td>29.63</td><td>35.47</td><td>9.68</td><td>33.41</td><td>392</td><td>203 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5452.96	41.37	54.00	-12.63	29.63	35.47	9.68	33.41	392	203 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5452.96	41.37	54.00	-12.63	29.63	35.47	9.68	33.41	392	203 AVERAGE																																	

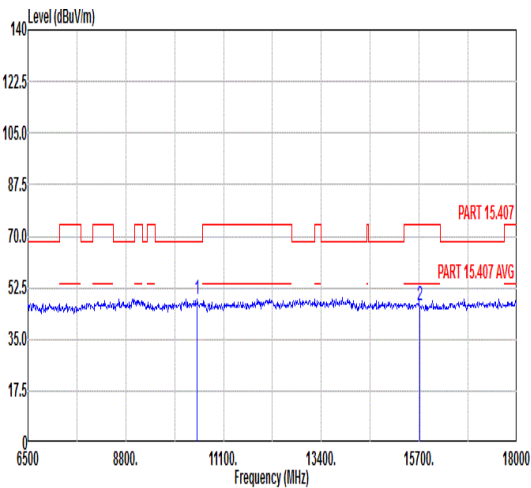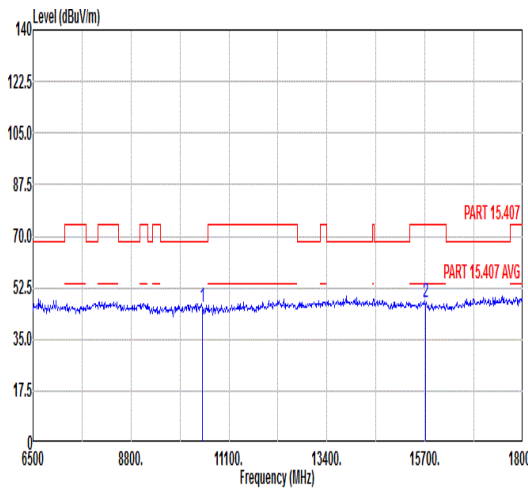

Mode	50																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz																																																																																																																																	
ANT	22																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10480.00</td><td>48.47</td><td>68.30</td><td>-19.83</td><td>61.53</td><td>38.50</td><td>12.15</td><td>63.71</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 15720.00</td><td>46.40</td><td>74.00</td><td>-27.60</td><td>54.81</td><td>41.43</td><td>14.66</td><td>64.50</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10480.00	48.47	68.30	-19.83	61.53	38.50	12.15	63.71	---	---	Peak		2 15720.00	46.40	74.00	-27.60	54.81	41.43	14.66	64.50	---	---	Peak		<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10480.00</td><td>46.07</td><td>68.30</td><td>-22.23</td><td>59.13</td><td>38.50</td><td>12.15</td><td>63.71</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 15720.00</td><td>47.44</td><td>74.00</td><td>-26.56</td><td>55.85</td><td>41.43</td><td>14.66</td><td>64.50</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10480.00	46.07	68.30	-22.23	59.13	38.50	12.15	63.71	---	---	Peak		2 15720.00	47.44	74.00	-26.56	55.85	41.43	14.66	64.50	---	---	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 10480.00	48.47	68.30	-19.83	61.53	38.50	12.15	63.71	---	---	Peak																																																																																																																								
2 15720.00	46.40	74.00	-27.60	54.81	41.43	14.66	64.50	---	---	Peak																																																																																																																								
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 10480.00	46.07	68.30	-22.23	59.13	38.50	12.15	63.71	---	---	Peak																																																																																																																								
2 15720.00	47.44	74.00	-26.56	55.85	41.43	14.66	64.50	---	---	Peak																																																																																																																								



Mode	51																																																		
	Band Edge - L																																																		
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz																																																		
ANT	22																																																		
Pol.	Horizontal																																																		
Peak	Fundamental																																																		
	Level (dBuV/m) Date: 2025-08-06 Frequency (MHz)																																																		
	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5110.50</td><td>51.21</td><td>74.00</td><td>-22.79</td><td>40.96</td><td>35.27</td><td>8.46</td><td>33.48</td><td>200</td><td>42</td><td>PEAK</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5110.50	51.21	74.00	-22.79	40.96	35.27	8.46	33.48	200	42	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																										
1	5110.50	51.21	74.00	-22.79	40.96	35.27	8.46	33.48	200	42	PEAK																																								
Avg	Level (dBuV/m) Date: 2025-08-06 Frequency (MHz)																																																		
	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5055.38</td><td>41.57</td><td>54.00</td><td>-12.43</td><td>31.47</td><td>35.23</td><td>8.36</td><td>33.49</td><td>200</td><td>42</td><td>AVERAGE</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5055.38	41.57	54.00	-12.43	31.47	35.23	8.36	33.49	200	42	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																										
1	5055.38	41.57	54.00	-12.43	31.47	35.23	8.36	33.49	200	42	AVERAGE																																								
Peak	Level (dBuV/m) Date: 2025-08-06 Frequency (MHz)																																																		
	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5260.00</td><td>97.31</td><td>-----</td><td>-----</td><td>86.50</td><td>35.36</td><td>8.90</td><td>33.45</td><td>200</td><td>42</td><td>PEAK</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5260.00	97.31	-----	-----	86.50	35.36	8.90	33.45	200	42	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																										
1	5260.00	97.31	-----	-----	86.50	35.36	8.90	33.45	200	42	PEAK																																								
Avg	Level (dBuV/m) Date: 2025-08-06 Frequency (MHz)																																																		
	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5260.00</td><td>90.50</td><td>-----</td><td>-----</td><td>79.69</td><td>35.36</td><td>8.90</td><td>33.45</td><td>200</td><td>42</td><td>AVERAGE</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5260.00	90.50	-----	-----	79.69	35.36	8.90	33.45	200	42	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																										
1	5260.00	90.50	-----	-----	79.69	35.36	8.90	33.45	200	42	AVERAGE																																								





Mode	51	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2025-08-06 <	





Mode	51																																																	
	Band Edge - R																																																	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz																																																	
ANT	22																																																	
Pol.	Vertical					Fundamental																																												
Peak	Date: 2025-08-06 Level (dBuV/m) Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5448.20</td><td>50.33</td><td>74.00</td><td>-23.67</td><td>38.59</td><td>35.47</td><td>9.68</td><td>33.41</td><td>400</td><td>188</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5448.20	50.33	74.00	-23.67	38.59	35.47	9.68	33.41	400	188	PEAK	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																									
1	5448.20	50.33	74.00	-23.67	38.59	35.47	9.68	33.41	400	188	PEAK																																							
Avg	Date: 2025-08-06 Level (dBuV/m) Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.00</td><td>41.64</td><td>54.00</td><td>-12.36</td><td>29.88</td><td>35.48</td><td>9.69</td><td>33.41</td><td>400</td><td>188</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5459.00	41.64	54.00	-12.36	29.88	35.48	9.69	33.41	400	188	AVERAGE	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																									
1	5459.00	41.64	54.00	-12.36	29.88	35.48	9.69	33.41	400	188	AVERAGE																																							



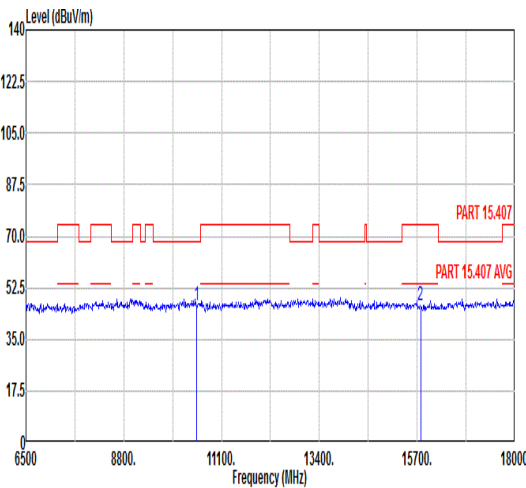
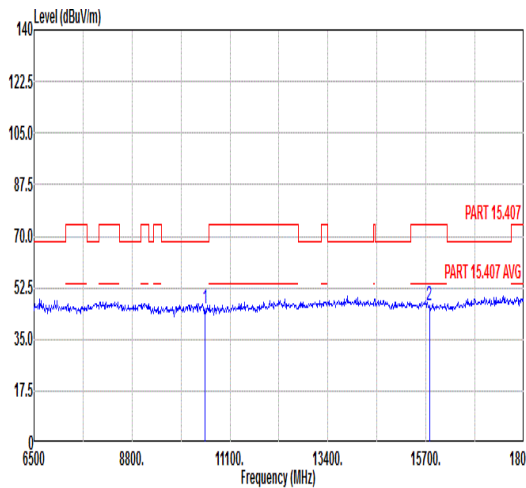


Mode	51																																																																																																																															
	Harmonic																																																																																																																															
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz																																																																																																																															
ANT	22																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																									
Peak Avg																																																																																																																																
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10520.00</td><td>46.31</td><td>68.30</td><td>-21.99</td><td>59.32</td><td>38.50</td><td>12.18</td><td>63.69</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>46.61</td><td>74.00</td><td>-27.39</td><td>55.00</td><td>41.47</td><td>14.69</td><td>64.55</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10520.00	46.31	68.30	-21.99	59.32	38.50	12.18	63.69	---	---	Peak	2	15780.00	46.61	74.00	-27.39	55.00	41.47	14.69	64.55	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10520.00</td><td>45.21</td><td>68.30</td><td>-23.09</td><td>58.22</td><td>38.50</td><td>12.18</td><td>63.69</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>46.38</td><td>74.00</td><td>-27.62</td><td>54.77</td><td>41.47</td><td>14.69</td><td>64.55</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10520.00	45.21	68.30	-23.09	58.22	38.50	12.18	63.69	---	---	Peak	2	15780.00	46.38	74.00	-27.62	54.77	41.47	14.69	64.55	---	---
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	10520.00	46.31	68.30	-21.99	59.32	38.50	12.18	63.69	---	---	Peak																																																																																																																					
2	15780.00	46.61	74.00	-27.39	55.00	41.47	14.69	64.55	---	---	Peak																																																																																																																					
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	10520.00	45.21	68.30	-23.09	58.22	38.50	12.18	63.69	---	---	Peak																																																																																																																					
2	15780.00	46.38	74.00	-27.62	54.77	41.47	14.69	64.55	---	---	Peak																																																																																																																					

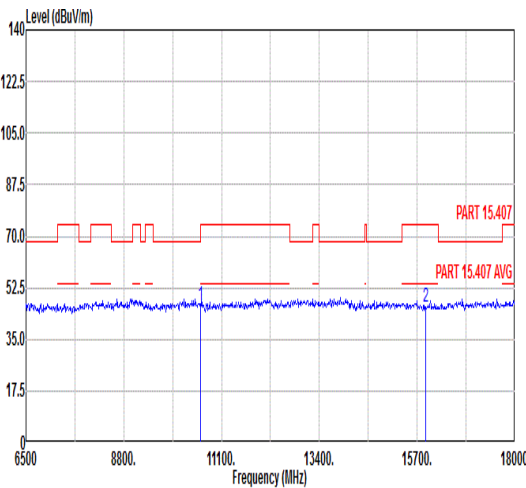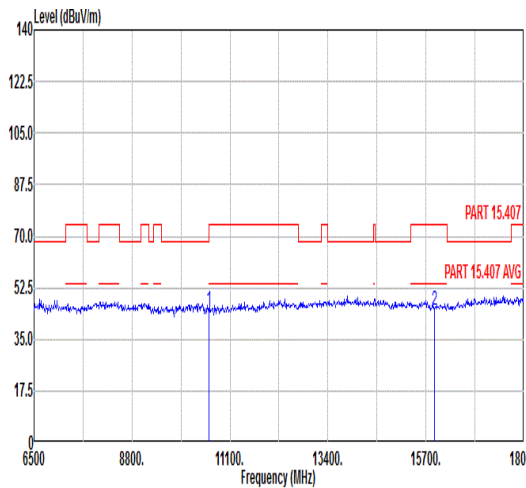

Mode	52																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz																																																																																																																			
ANT	22																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10600.00</td><td>46.51</td><td>74.00</td><td>-27.49</td><td>59.42</td><td>38.52</td><td>12.23</td><td>63.66</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>45.73</td><td>74.00</td><td>-28.27</td><td>54.07</td><td>41.54</td><td>14.75</td><td>64.63</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	46.51	74.00	-27.49	59.42	38.52	12.23	63.66	---	---	Peak	2	15900.00	45.73	74.00	-28.27	54.07	41.54	14.75	64.63	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10600.00</td><td>45.02</td><td>74.00</td><td>-28.98</td><td>57.93</td><td>38.52</td><td>12.23</td><td>63.66</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>45.07</td><td>74.00</td><td>-28.93</td><td>53.41</td><td>41.54</td><td>14.75</td><td>64.63</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	45.02	74.00	-28.98	57.93	38.52	12.23	63.66	---	---	Peak	2	15900.00	45.07	74.00	-28.93	53.41	41.54	14.75	64.63	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10600.00	46.51	74.00	-27.49	59.42	38.52	12.23	63.66	---	---	Peak																																																																																																									
2	15900.00	45.73	74.00	-28.27	54.07	41.54	14.75	64.63	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10600.00	45.02	74.00	-28.98	57.93	38.52	12.23	63.66	---	---	Peak																																																																																																									
2	15900.00	45.07	74.00	-28.93	53.41	41.54	14.75	64.63	---	---	Peak																																																																																																									

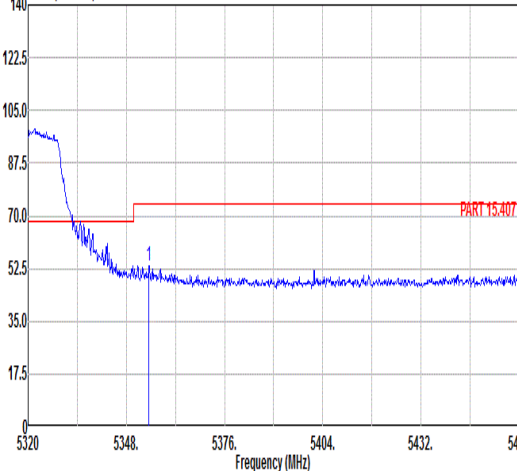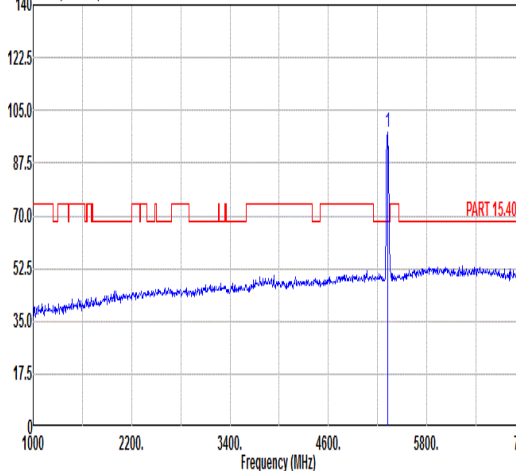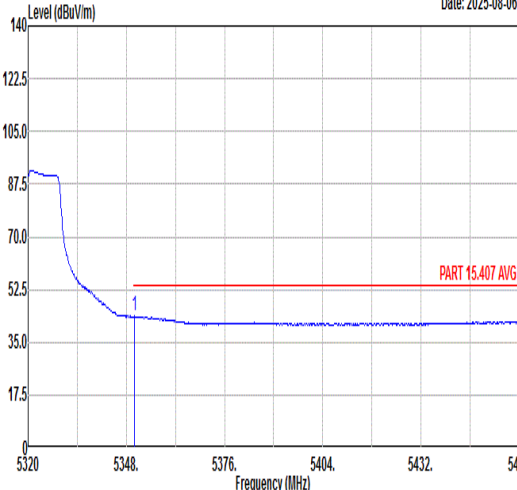
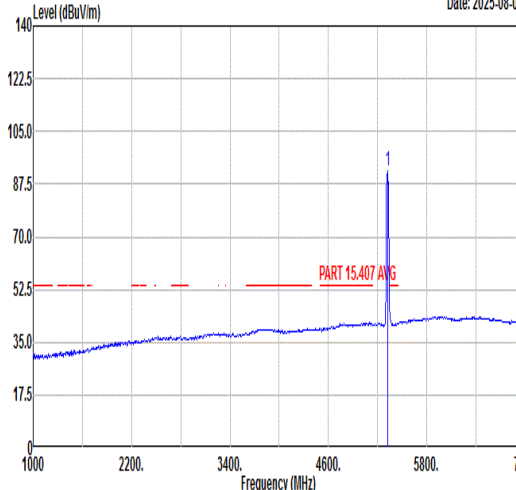


Mode	53										
	Band Edge										
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz										
ANT	22										
Pol.	Horizontal										
Peak	Fundamental										
	Level (dBuV/m) Date: 2025-08-06  Limit Margin Read Ant Cable Preamp APos TPos Remark Freq Level Line (dB) Level Factor Loss Factor MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5354.44 53.47 74.00 -20.53 42.10 35.41 9.39 33.43 400 56 PEAK										
	Level (dBuV/m) Date: 2025-08-06  Limit Margin Read Ant Cable Preamp APos TPos Remark Freq Level Line (dB) Level Factor Loss Factor MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5320.00 97.74 ----- ----- 86.58 35.39 9.21 33.44 400 56 PEAK										
Avg	Level (dBuV/m) Date: 2025-08-06  Limit Margin Read Ant Cable Preamp APos TPos Remark Freq Level Line (dB) Level Factor Loss Factor MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5350.24 43.61 54.00 -10.39 32.26 35.41 9.37 33.43 400 56 AVERAGE										
	Level (dBuV/m) Date: 2025-08-06  Limit Margin Read Ant Cable Preamp APos TPos Remark Freq Level Line (dB) Level Factor Loss Factor MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5320.00 91.71 ----- ----- 80.55 35.39 9.21 33.44 400 56 AVERAGE										







Mode	53	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	</	



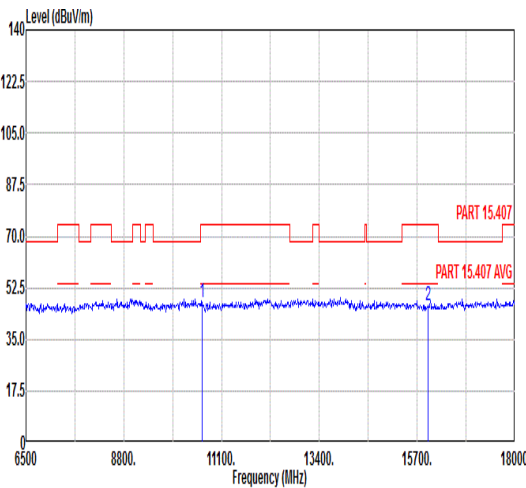
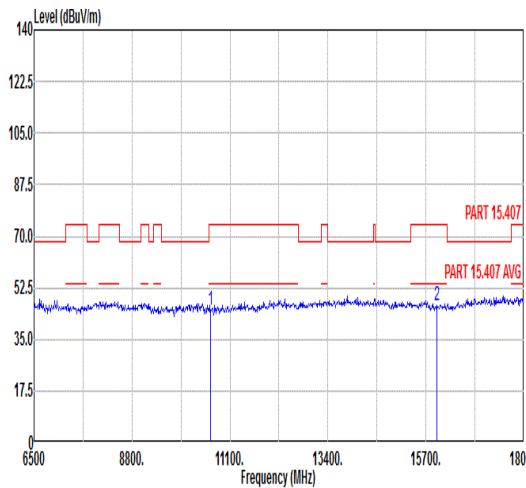


Mode	53																																																																																																																										
	Harmonic																																																																																																																										
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																																																										
ANT	22																																																																																																																										
Pol.	Horizontal						Vertical																																																																																																																				
Peak Avg																																																																																																																											
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 10640.00</td><td>47.42</td><td>74.00</td><td>-26.58</td><td>60.27</td><td>38.53</td><td>12.26</td><td>63.64</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 15960.00</td><td>46.39</td><td>74.00</td><td>-27.61</td><td>54.71</td><td>41.58</td><td>14.77</td><td>64.67</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 10640.00	47.42	74.00	-26.58	60.27	38.53	12.26	63.64	---	---	Peak	2 15960.00	46.39	74.00	-27.61	54.71	41.58	14.77	64.67	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 10640.00</td><td>44.74</td><td>74.00</td><td>-29.26</td><td>57.59</td><td>38.53</td><td>12.26</td><td>63.64</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 15960.00</td><td>46.45</td><td>74.00</td><td>-27.55</td><td>54.77</td><td>41.58</td><td>14.77</td><td>64.67</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 10640.00	44.74	74.00	-29.26	57.59	38.53	12.26	63.64	---	---	Peak	2 15960.00	46.45	74.00	-27.55	54.77	41.58	14.77	64.67	---	---
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1 10640.00	47.42	74.00	-26.58	60.27	38.53	12.26	63.64	---	---	Peak																																																																																																																	
2 15960.00	46.39	74.00	-27.61	54.71	41.58	14.77	64.67	---	---	Peak																																																																																																																	
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1 10640.00	44.74	74.00	-29.26	57.59	38.53	12.26	63.64	---	---	Peak																																																																																																																	
2 15960.00	46.45	74.00	-27.55	54.77	41.58	14.77	64.67	---	---	Peak																																																																																																																	

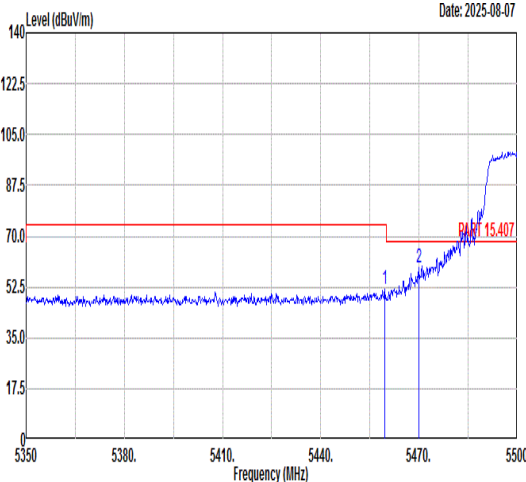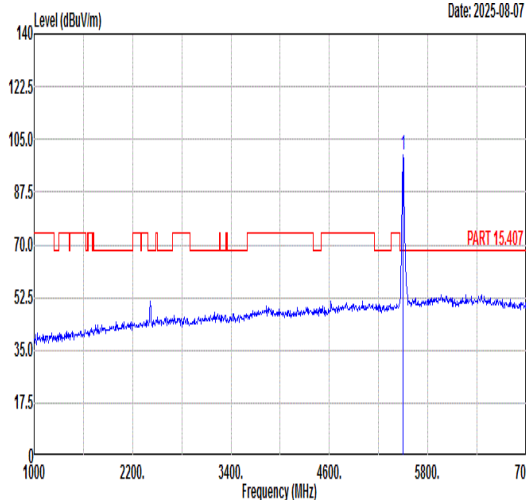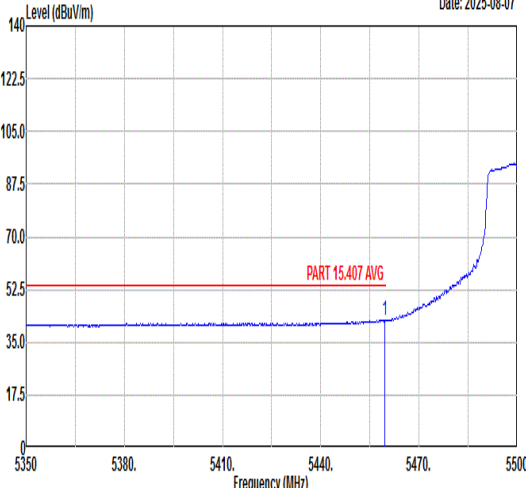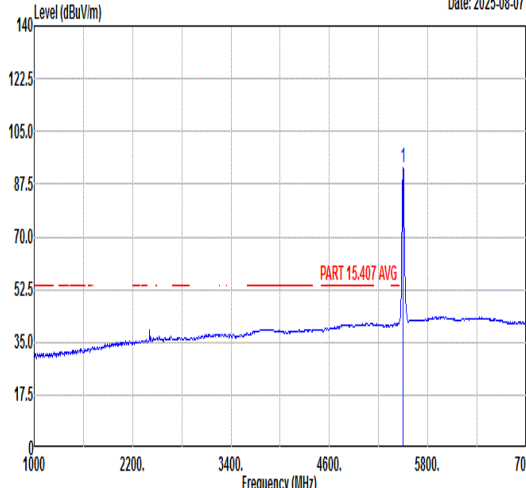

Mode	54																																																																																																																																																																												
	Band Edge																																																																																																																																																																												
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																																																																																												
ANT	22																																																																																																																																																																												
Pol.	Horizontal	Fundamental																																																																																																																																																																											
Peak	Level (dBuV/m) Date: 2025-08-07  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.50</td><td>51.77</td><td>74.00</td><td>-22.23</td><td>40.01</td><td>35.48</td><td>9.69</td><td>33.41</td><td>300 95 PEAK</td></tr><tr><td>2</td><td>5469.85</td><td>59.16</td><td>68.30</td><td>-9.14</td><td>47.40</td><td>35.48</td><td>9.69</td><td>33.41</td><td>300 95 PEAK</td></tr></table> Level (dBuV/m) Date: 2025-08-07  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>99.64</td><td>-----</td><td>-----</td><td>87.83</td><td>35.50</td><td>9.71</td><td>33.40</td><td>300 95 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.50	51.77	74.00	-22.23	40.01	35.48	9.69	33.41	300 95 PEAK	2	5469.85	59.16	68.30	-9.14	47.40	35.48	9.69	33.41	300 95 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	99.64	-----	-----	87.83	35.50	9.71	33.40	300 95 PEAK	Avg	Level (dBuV/m) Date: 2025-08-07  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.50</td><td>42.42</td><td>54.00</td><td>-11.58</td><td>30.66</td><td>35.48</td><td>9.69</td><td>33.41</td><td>300 95 AVERAGE</td></tr></table> Level (dBuV/m) Date: 2025-08-07  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>93.21</td><td>-----</td><td>-----</td><td>81.40</td><td>35.50</td><td>9.71</td><td>33.40</td><td>300 95 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.50	42.42	54.00	-11.58	30.66	35.48	9.69	33.41	300 95 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	93.21	-----	-----	81.40	35.50	9.71	33.40	300 95 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5459.50	51.77	74.00	-22.23	40.01	35.48	9.69	33.41	300 95 PEAK																																																																																																																																																																				
2	5469.85	59.16	68.30	-9.14	47.40	35.48	9.69	33.41	300 95 PEAK																																																																																																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5500.00	99.64	-----	-----	87.83	35.50	9.71	33.40	300 95 PEAK																																																																																																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5459.50	42.42	54.00	-11.58	30.66	35.48	9.69	33.41	300 95 AVERAGE																																																																																																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5500.00	93.21	-----	-----	81.40	35.50	9.71	33.40	300 95 AVERAGE																																																																																																																																																																				

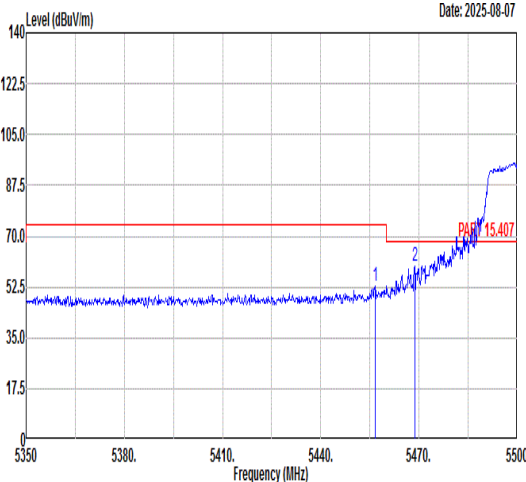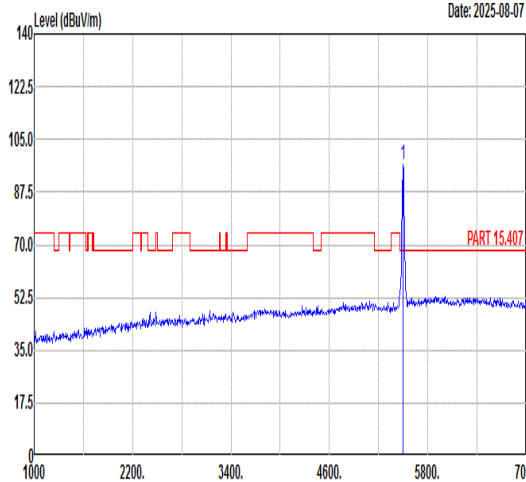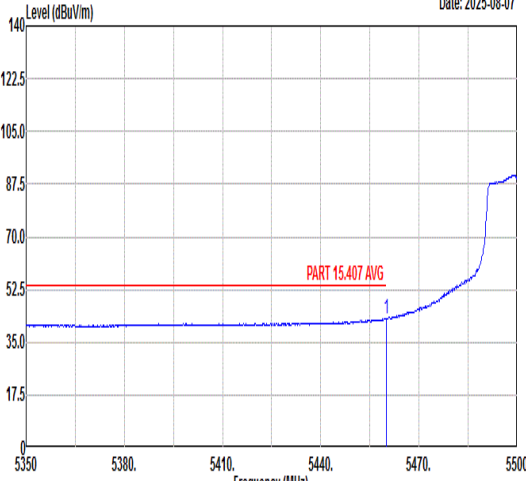
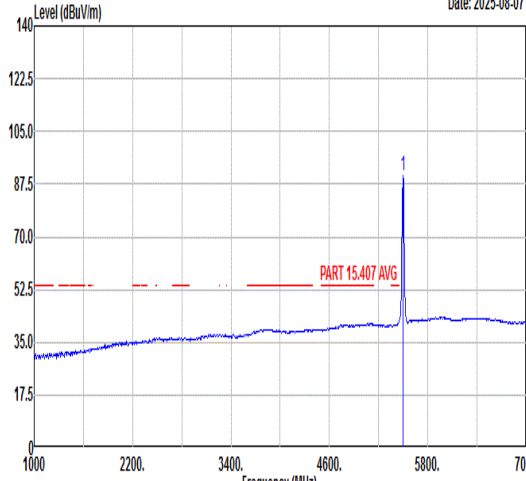


Mode	54																																																																																													
	Band Edge																																																																																													
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																													
ANT	22																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2025-08-07  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5456.65</td><td>52.78</td><td>74.00</td><td>-21.22</td><td>41.03</td><td>35.47</td><td>9.69</td><td>33.41</td><td>396</td><td>256 PEAK</td></tr><tr><td>2</td><td>5468.65</td><td>59.47</td><td>68.30</td><td>-8.83</td><td>47.71</td><td>35.48</td><td>9.69</td><td>33.41</td><td>396</td><td>256 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5456.65	52.78	74.00	-21.22	41.03	35.47	9.69	33.41	396	256 PEAK	2	5468.65	59.47	68.30	-8.83	47.71	35.48	9.69	33.41	396	256 PEAK	Level (dBuV/m) Date: 2025-08-07  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>96.49</td><td>-----</td><td>84.68</td><td>35.50</td><td>9.71</td><td>33.40</td><td>396</td><td>256 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	96.49	-----	84.68	35.50	9.71	33.40	396	256 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5456.65	52.78	74.00	-21.22	41.03	35.47	9.69	33.41	396	256 PEAK																																																																																				
2	5468.65	59.47	68.30	-8.83	47.71	35.48	9.69	33.41	396	256 PEAK																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5500.00	96.49	-----	84.68	35.50	9.71	33.40	396	256 PEAK																																																																																					
Avg	Level (dBuV/m) Date: 2025-08-07  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.95</td><td>42.76</td><td>54.00</td><td>-11.24</td><td>31.00</td><td>35.48</td><td>9.69</td><td>33.41</td><td>396</td><td>256 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.95	42.76	54.00	-11.24	31.00	35.48	9.69	33.41	396	256 AVERAGE	Level (dBuV/m) Date: 2025-08-07  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>90.34</td><td>-----</td><td>78.53</td><td>35.50</td><td>9.71</td><td>33.40</td><td>396</td><td>256 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	90.34	-----	78.53	35.50	9.71	33.40	396	256 AVERAGE											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5459.95	42.76	54.00	-11.24	31.00	35.48	9.69	33.41	396	256 AVERAGE																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5500.00	90.34	-----	78.53	35.50	9.71	33.40	396	256 AVERAGE																																																																																					






Mode	54																																																
	Harmonic																																																
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																
ANT	22																																																
Pol.	Horizontal																																																
Peak Avg																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>11000.00</td><td>46.55</td><td>74.00</td><td>-27.45</td><td>58.93</td><td>38.60</td><td>12.52</td><td>63.50</td><td>--- --- Peak</td></tr><tr><td>2</td><td>16500.00</td><td>46.58</td><td>68.30</td><td>-21.72</td><td>54.21</td><td>41.95</td><td>15.17</td><td>64.75</td><td>--- --- Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	11000.00	46.55	74.00	-27.45	58.93	38.60	12.52	63.50	--- --- Peak	2	16500.00	46.58	68.30	-21.72	54.21	41.95	15.17	64.75	--- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																									
1	11000.00	46.55	74.00	-27.45	58.93	38.60	12.52	63.50	--- --- Peak																																								
2	16500.00	46.58	68.30	-21.72	54.21	41.95	15.17	64.75	--- --- Peak																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>11000.00</td><td>45.33</td><td>74.00</td><td>-28.67</td><td>57.71</td><td>38.60</td><td>12.52</td><td>63.50</td><td>--- --- Peak</td></tr><tr><td>2</td><td>16500.00</td><td>46.59</td><td>68.30</td><td>-21.71</td><td>54.22</td><td>41.95</td><td>15.17</td><td>64.75</td><td>--- --- Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	11000.00	45.33	74.00	-28.67	57.71	38.60	12.52	63.50	--- --- Peak	2	16500.00	46.59	68.30	-21.71	54.22	41.95	15.17	64.75	--- --- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																									
1	11000.00	45.33	74.00	-28.67	57.71	38.60	12.52	63.50	--- --- Peak																																								
2	16500.00	46.59	68.30	-21.71	54.22	41.95	15.17	64.75	--- --- Peak																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>11000.00</td><td>46.55</td><td>74.00</td><td>-27.45</td><td>58.93</td><td>38.60</td><td>12.52</td><td>63.50</td><td>--- --- Peak</td></tr><tr><td>2</td><td>16500.00</td><td>46.58</td><td>68.30</td><td>-21.72</td><td>54.21</td><td>41.95</td><td>15.17</td><td>64.75</td><td>--- --- Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	11000.00	46.55	74.00	-27.45	58.93	38.60	12.52	63.50	--- --- Peak	2	16500.00	46.58	68.30	-21.72	54.21	41.95	15.17	64.75	--- --- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																									
1	11000.00	46.55	74.00	-27.45	58.93	38.60	12.52	63.50	--- --- Peak																																								
2	16500.00	46.58	68.30	-21.72	54.21	41.95	15.17	64.75	--- --- Peak																																								

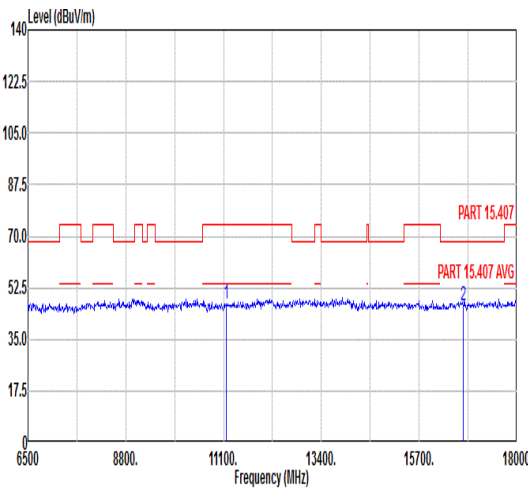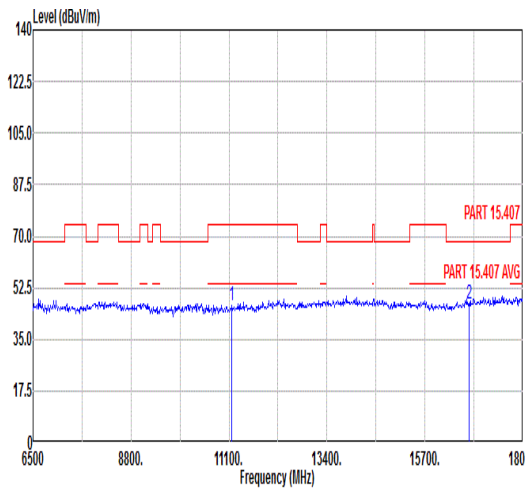

Mode	55																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																																																	
ANT	22																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11160.00</td><td>47.07</td><td>74.00</td><td>-26.93</td><td>59.25</td><td>38.79</td><td>12.64</td><td>63.61</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>46.67</td><td>68.30</td><td>-21.63</td><td>53.97</td><td>42.12</td><td>15.35</td><td>64.77</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11160.00	47.07	74.00	-26.93	59.25	38.79	12.64	63.61	---	---	Peak	2	16740.00	46.67	68.30	-21.63	53.97	42.12	15.35	64.77	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11160.00</td><td>46.28</td><td>74.00</td><td>-27.72</td><td>58.46</td><td>38.79</td><td>12.64</td><td>63.61</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>46.95</td><td>68.30</td><td>-21.35</td><td>54.25</td><td>42.12</td><td>15.35</td><td>64.77</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11160.00	46.28	74.00	-27.72	58.46	38.79	12.64	63.61	---	---	Peak	2	16740.00	46.95	68.30	-21.35	54.25	42.12	15.35	64.77	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11160.00	47.07	74.00	-26.93	59.25	38.79	12.64	63.61	---	---	Peak																																																																																																																							
2	16740.00	46.67	68.30	-21.63	53.97	42.12	15.35	64.77	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11160.00	46.28	74.00	-27.72	58.46	38.79	12.64	63.61	---	---	Peak																																																																																																																							
2	16740.00	46.95	68.30	-21.35	54.25	42.12	15.35	64.77	---	---	Peak																																																																																																																							

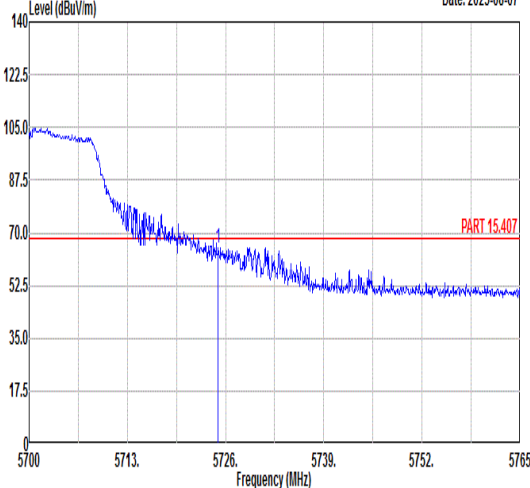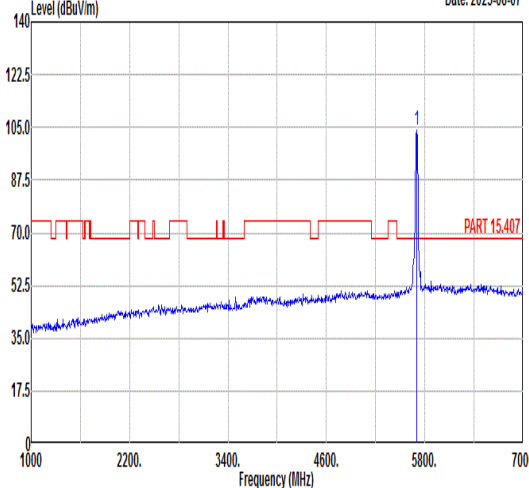
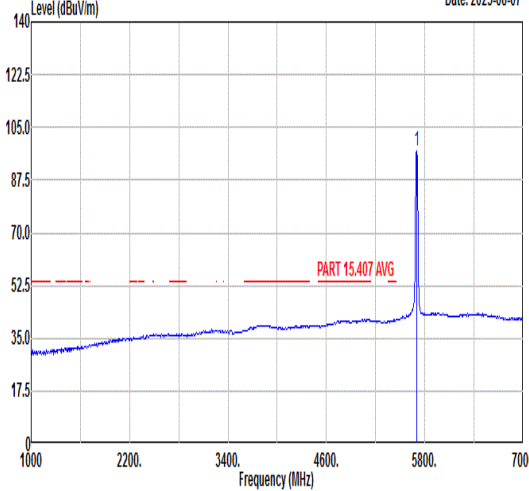


Mode	56																																																																																									
	Band Edge																																																																																									
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																									
ANT	22																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-08-07  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5725.03</td><td>65.20</td><td>68.30</td><td>-3.10</td><td>52.81</td><td>35.82</td><td>10.02</td><td>33.45</td><td>100</td><td>93 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5725.03	65.20	68.30	-3.10	52.81	35.82	10.02	33.45	100	93 PEAK	Level (dBuV/m) Date: 2025-08-07  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5700.00</td><td>104.06</td><td>-----</td><td>-----</td><td>91.74</td><td>35.79</td><td>9.97</td><td>33.44</td><td>100</td><td>93 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5700.00	104.06	-----	-----	91.74	35.79	9.97	33.44	100	93 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5725.03	65.20	68.30	-3.10	52.81	35.82	10.02	33.45	100	93 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5700.00	104.06	-----	-----	91.74	35.79	9.97	33.44	100	93 PEAK																																																																																	
Avg	Blank					Level (dBuV/m) Date: 2025-08-07  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5700.00</td><td>97.42</td><td>-----</td><td>-----</td><td>85.12</td><td>35.78</td><td>9.96</td><td>33.44</td><td>100</td><td>93 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5700.00	97.42	-----	-----	85.12	35.78	9.96	33.44	100	93 AVERAGE																																								
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5700.00	97.42	-----	-----	85.12	35.78	9.96	33.44	100	93 AVERAGE																																																																																	



Mode	56																																																																																	
	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																	
ANT	22																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-08-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5726.20</td><td>59.20</td><td>68.30</td><td>-9.10</td><td>46.81</td><td>35.82</td><td>10.02</td><td>33.45</td><td>355</td><td>257 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5726.20	59.20	68.30	-9.10	46.81	35.82	10.02	33.45	355	257 PEAK	Level (dBuV/m) Date: 2025-08-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5700.00</td><td>96.61</td><td>-----</td><td>-----</td><td>84.31</td><td>35.78</td><td>9.96</td><td>33.44</td><td>355</td><td>257 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5700.00	96.61	-----	-----	84.31	35.78	9.96	33.44	355	257 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5726.20	59.20	68.30	-9.10	46.81	35.82	10.02	33.45	355	257 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5700.00	96.61	-----	-----	84.31	35.78	9.96	33.44	355	257 PEAK																																																																									
Avg	Blank	Level (dBuV/m) Date: 2025-08-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5700.00</td><td>89.53</td><td>-----</td><td>-----</td><td>77.23</td><td>35.78</td><td>9.96</td><td>33.44</td><td>355</td><td>257 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5700.00	89.53	-----	-----	77.23	35.78	9.96	33.44	355	257 AVERAGE																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5700.00	89.53	-----	-----	77.23	35.78	9.96	33.44	355	257 AVERAGE																																																																									

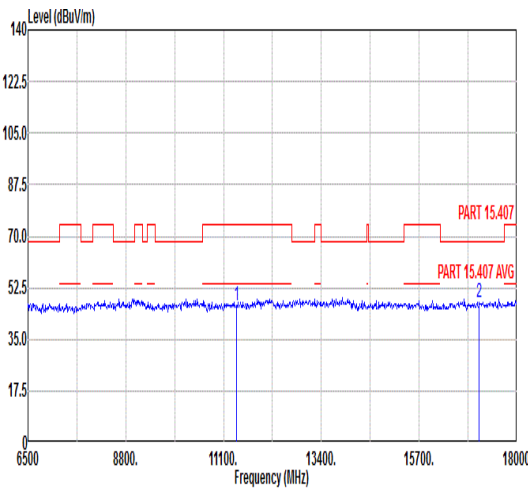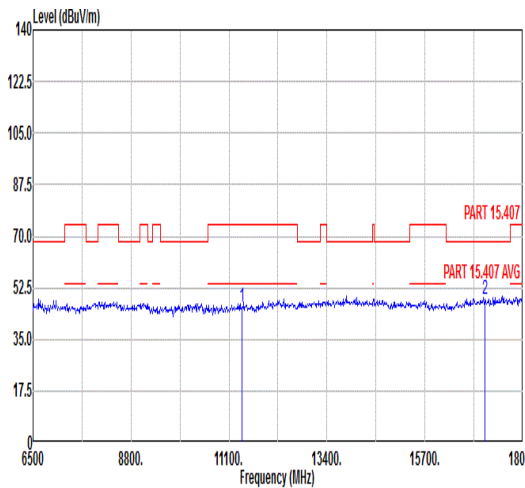

Mode	56																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																																																																
ANT	22																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg																																																																																																																																	
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11400.00</td><td>46.56</td><td>74.00</td><td>-27.44</td><td>58.45</td><td>39.08</td><td>12.81</td><td>63.78</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.55</td><td>68.30</td><td>-20.75</td><td>54.43</td><td>42.41</td><td>15.62</td><td>64.91</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11400.00	46.56	74.00	-27.44	58.45	39.08	12.81	63.78	---	---	Peak	2	17100.00	47.55	68.30	-20.75	54.43	42.41	15.62	64.91	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11400.00</td><td>46.19</td><td>74.00</td><td>-27.81</td><td>58.08</td><td>39.08</td><td>12.81</td><td>63.78</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>48.78</td><td>68.30</td><td>-19.52</td><td>55.66</td><td>42.41</td><td>15.62</td><td>64.91</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11400.00	46.19	74.00	-27.81	58.08	39.08	12.81	63.78	---	---	Peak	2	17100.00	48.78	68.30	-19.52	55.66	42.41	15.62	64.91	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11400.00	46.56	74.00	-27.44	58.45	39.08	12.81	63.78	---	---	Peak																																																																																																																						
2	17100.00	47.55	68.30	-20.75	54.43	42.41	15.62	64.91	---	---	Peak																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11400.00	46.19	74.00	-27.81	58.08	39.08	12.81	63.78	---	---	Peak																																																																																																																						
2	17100.00	48.78	68.30	-19.52	55.66	42.41	15.62	64.91	---	---	Peak																																																																																																																						







Mode	57																																																																											
	Band Edge - L																																																																											
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																											
ANT	22																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	Level (dBuV/m) Date: 2025-08-07 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.91</td><td>57.48</td><td>74.00</td><td>-16.52</td><td>47.12</td><td>35.29</td><td>8.54</td><td>33.47</td><td>100 20 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5149.91	57.48	74.00	-16.52	47.12	35.29	8.54	33.47	100 20 PEAK	Level (dBuV/m) Date: 2025-08-07 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>92.58</td><td>-----</td><td>-----</td><td>82.10</td><td>35.32</td><td>8.62</td><td>33.46</td><td>100 20 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5190.00	92.58	-----	-----	82.10	35.32	8.62	33.46	100 20 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																				
1	5149.91	57.48	74.00	-16.52	47.12	35.29	8.54	33.47	100 20 PEAK																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																				
1	5190.00	92.58	-----	-----	82.10	35.32	8.62	33.46	100 20 PEAK																																																																			
Avg	Level (dBuV/m) Date: 2025-08-07 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.72</td><td>44.05</td><td>54.00</td><td>-9.95</td><td>33.69</td><td>35.29</td><td>8.54</td><td>33.47</td><td>100 20 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5149.72	44.05	54.00	-9.95	33.69	35.29	8.54	33.47	100 20 AVERAGE	Level (dBuV/m) Date: 2025-08-07 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>86.81</td><td>-----</td><td>-----</td><td>76.33</td><td>35.32</td><td>8.62</td><td>33.46</td><td>100 20 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5190.00	86.81	-----	-----	76.33	35.32	8.62	33.46	100 20 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																				
1	5149.72	44.05	54.00	-9.95	33.69	35.29	8.54	33.47	100 20 AVERAGE																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																				
1	5190.00	86.81	-----	-----	76.33	35.32	8.62	33.46	100 20 AVERAGE																																																																			



Mode	57																																																			
	Band Edge - R																																																			
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																			
ANT	22																																																			
Pol.	Horizontal	Fundamental																																																		
Peak	Date: 2025-08-07 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5394.39</td><td>50.20</td><td>74.00</td><td>-23.80</td><td>38.59</td><td>35.44</td><td>9.59</td><td>33.42</td><td>100</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>20 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5394.39	50.20	74.00	-23.80	38.59	35.44	9.59	33.42	100										20 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																											
1	5394.39	50.20	74.00	-23.80	38.59	35.44	9.59	33.42	100																																											
									20 PEAK																																											
Avg	Date: 2025-08-07 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5454.06</td><td>41.82</td><td>54.00</td><td>-12.18</td><td>30.08</td><td>35.47</td><td>9.68</td><td>33.41</td><td>100</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>20 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5454.06	41.82	54.00	-12.18	30.08	35.47	9.68	33.41	100										20 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																											
1	5454.06	41.82	54.00	-12.18	30.08	35.47	9.68	33.41	100																																											
									20 AVERAGE																																											

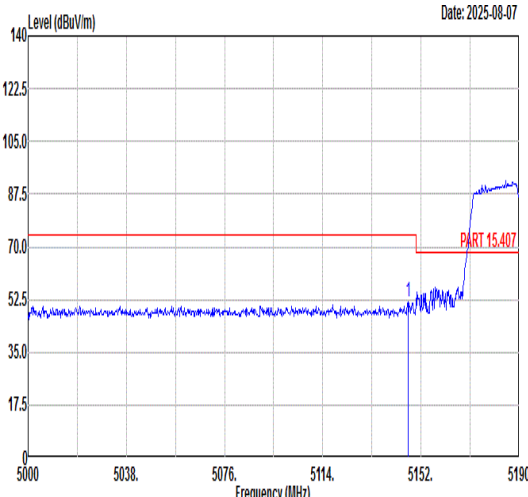
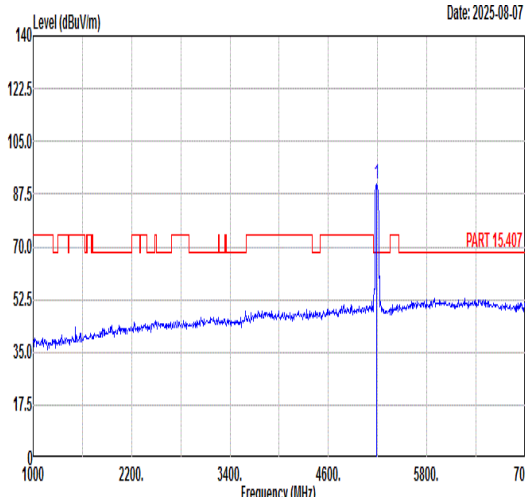
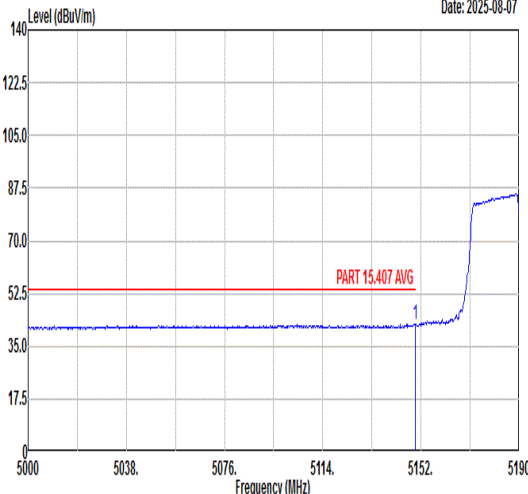
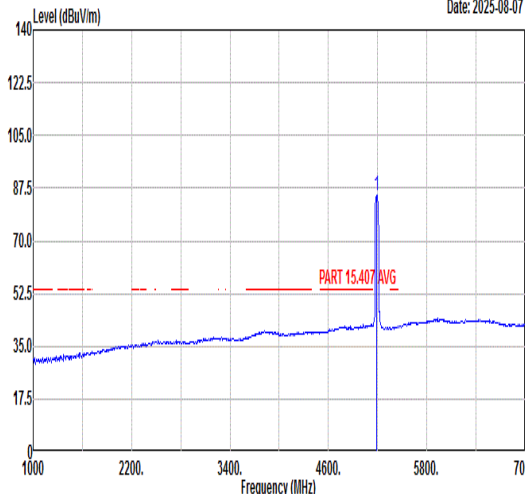


Mode	57																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																																	
ANT	22																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-08-07  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.06</td><td>51.86</td><td>74.00</td><td>-22.14</td><td>41.51</td><td>35.29</td><td>8.53</td><td>33.47</td><td>400 285 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5147.06	51.86	74.00	-22.14	41.51	35.29	8.53	33.47	400 285 PEAK	Level (dBuV/m) Date: 2025-08-07  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>90.71</td><td>-----</td><td>80.25</td><td>35.31</td><td>8.61</td><td>33.46</td><td>400</td><td>285 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	90.71	-----	80.25	35.31	8.61	33.46	400	285 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5147.06	51.86	74.00	-22.14	41.51	35.29	8.53	33.47	400 285 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5190.00	90.71	-----	80.25	35.31	8.61	33.46	400	285 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2025-08-07  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.91</td><td>42.41</td><td>54.00</td><td>-11.59</td><td>32.05</td><td>35.29</td><td>8.54</td><td>33.47</td><td>400 285 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.91	42.41	54.00	-11.59	32.05	35.29	8.54	33.47	400 285 AVERAGE	Level (dBuV/m) Date: 2025-08-07  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>85.02</td><td>-----</td><td>74.56</td><td>35.31</td><td>8.61</td><td>33.46</td><td>400</td><td>285 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	85.02	-----	74.56	35.31	8.61	33.46	400	285 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5149.91	42.41	54.00	-11.59	32.05	35.29	8.54	33.47	400 285 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5190.00	85.02	-----	74.56	35.31	8.61	33.46	400	285 AVERAGE																																																																									



Mode	57																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																		
ANT	22																																																		
Pol.	Vertical					Fundamental																																													
Peak	Date: 2025-08-07 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5453.79</td><td>50.81</td><td>74.00</td><td>-23.19</td><td>39.07</td><td>35.47</td><td>9.68</td><td>33.41</td><td>400</td><td>285 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5453.79	50.81	74.00	-23.19	39.07	35.47	9.68	33.41	400	285 PEAK	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	5453.79	50.81	74.00	-23.19	39.07	35.47	9.68	33.41	400	285 PEAK																																									
Avg	Date: 2025-08-07 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5455.14</td><td>41.79</td><td>54.00</td><td>-12.21</td><td>30.05</td><td>35.47</td><td>9.68</td><td>33.41</td><td>400</td><td>285 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5455.14	41.79	54.00	-12.21	30.05	35.47	9.68	33.41	400	285 AVERAGE	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	5455.14	41.79	54.00	-12.21	30.05	35.47	9.68	33.41	400	285 AVERAGE																																									

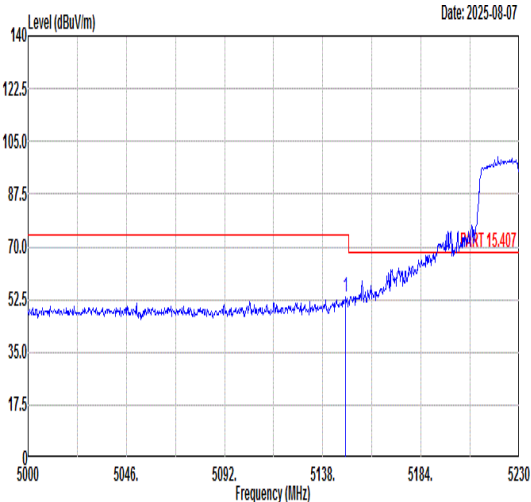
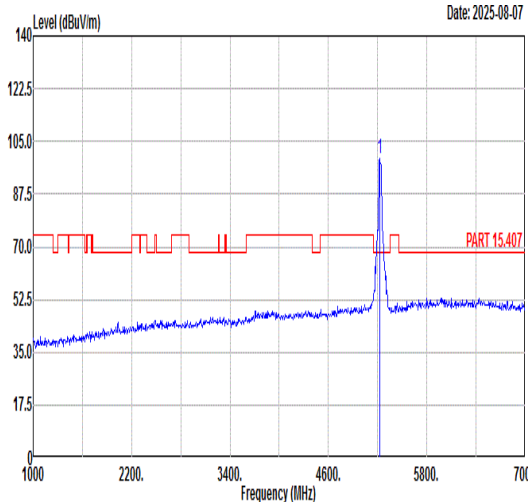
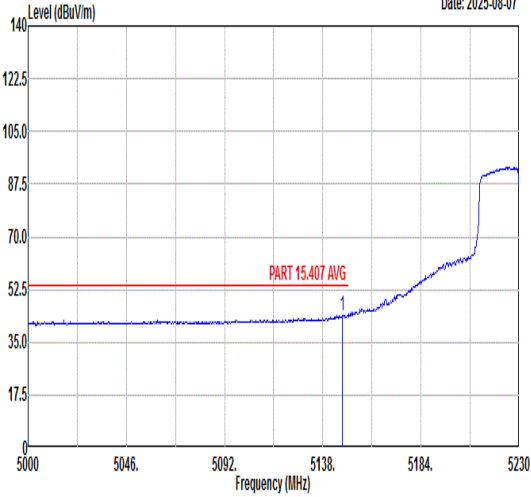
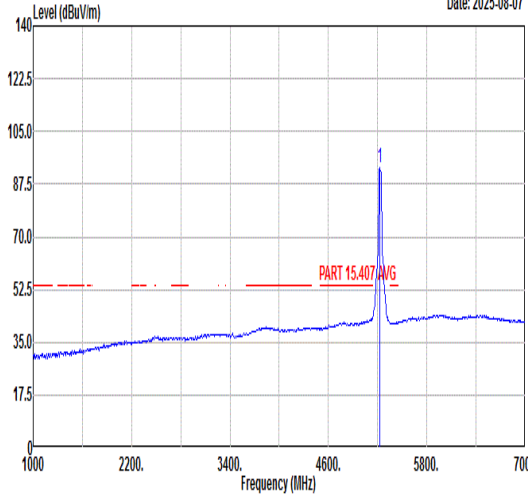


Mode	58																																																																																								
	Band Edge - L																																																																																								
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																																								
ANT	22																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.81</td><td>53.18</td><td>74.00</td><td>-20.82</td><td>42.83</td><td>35.29</td><td>8.53</td><td>33.47</td><td>101 37 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5148.81	53.18	74.00	-20.82	42.83	35.29	8.53	33.47	101 37 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>99.28</td><td>-----</td><td>88.70</td><td>35.33</td><td>8.71</td><td>33.46</td><td>101</td><td>37 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5230.00	99.28	-----	88.70	35.33	8.71	33.46	101
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5148.81	53.18	74.00	-20.82	42.83	35.29	8.53	33.47	101 37 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5230.00	99.28	-----	88.70	35.33	8.71	33.46	101	37 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.20</td><td>44.08</td><td>54.00</td><td>-9.92</td><td>33.73</td><td>35.29</td><td>8.53</td><td>33.47</td><td>101 37 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5147.20	44.08	54.00	-9.92	33.73	35.29	8.53	33.47	101 37 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>92.83</td><td>-----</td><td>82.20</td><td>35.34</td><td>8.74</td><td>33.45</td><td>101</td><td>37 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5230.00	92.83	-----	82.20	35.34	8.74	33.45	101
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5147.20	44.08	54.00	-9.92	33.73	35.29	8.53	33.47	101 37 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5230.00	92.83	-----	82.20	35.34	8.74	33.45	101	37 AVERAGE																																																																																





Mode	58																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																									
ANT	22																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-08-07 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5385.25</td><td>50.93</td><td>74.00</td><td>-23.07</td><td>39.37</td><td>35.43</td><td>9.55</td><td>33.42</td><td>101 37 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5385.25	50.93	74.00	-23.07	39.37	35.43	9.55	33.42	101 37 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5385.25	50.93	74.00	-23.07	39.37	35.43	9.55	33.42	101 37 PEAK																																	
Avg	Date: 2025-08-07 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5453.10</td><td>42.28</td><td>54.00</td><td>-11.72</td><td>30.54</td><td>35.47</td><td>9.68</td><td>33.41</td><td>101 37 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5453.10	42.28	54.00	-11.72	30.54	35.47	9.68	33.41	101 37 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5453.10	42.28	54.00	-11.72	30.54	35.47	9.68	33.41	101 37 AVERAGE																																	

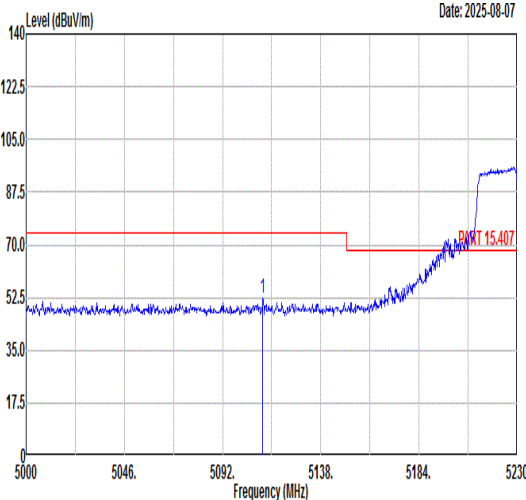
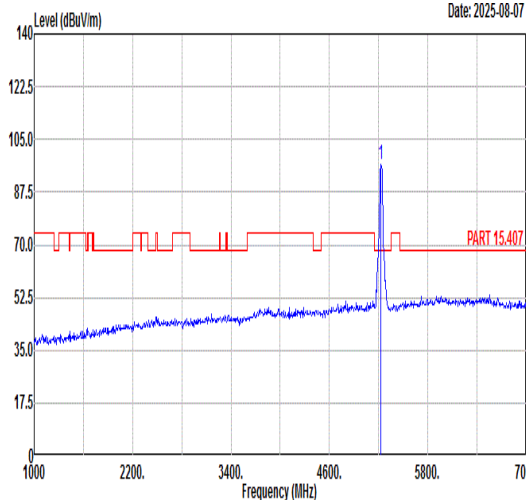
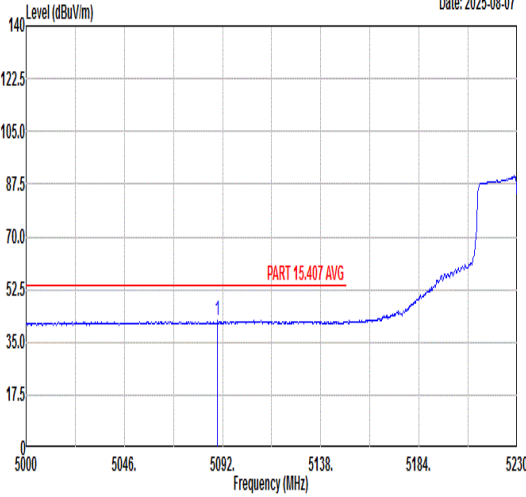
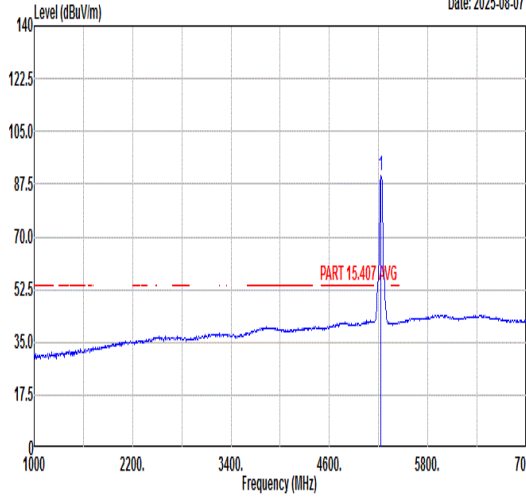


Mode	58																																																																																								
	Band Edge - L																																																																																								
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																																								
ANT	22																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5110.86</td><td>52.43</td><td>74.00</td><td>-21.57</td><td>42.18</td><td>35.27</td><td>8.46</td><td>33.48</td><td>394 287 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5110.86	52.43	74.00	-21.57	42.18	35.27	8.46	33.48	394 287 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>96.59</td><td>-----</td><td>-----</td><td>85.96</td><td>35.34</td><td>8.74</td><td>33.45</td><td>394 287 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	96.59	-----	-----	85.96	35.34	8.74	33.45
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5110.86	52.43	74.00	-21.57	42.18	35.27	8.46	33.48	394 287 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5230.00	96.59	-----	-----	85.96	35.34	8.74	33.45	394 287 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5089.70</td><td>42.13</td><td>54.00</td><td>-11.87</td><td>31.94</td><td>35.25</td><td>8.42</td><td>33.48</td><td>394 287 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5089.70	42.13	54.00	-11.87	31.94	35.25	8.42	33.48	394 287 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>90.22</td><td>-----</td><td>-----</td><td>79.59</td><td>35.34</td><td>8.74</td><td>33.45</td><td>394 287 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	90.22	-----	-----	79.59	35.34	8.74	33.45
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5089.70	42.13	54.00	-11.87	31.94	35.25	8.42	33.48	394 287 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5230.00	90.22	-----	-----	79.59	35.34	8.74	33.45	394 287 AVERAGE																																																																																

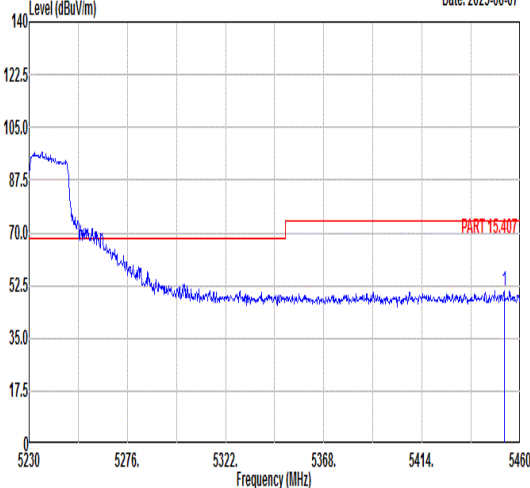
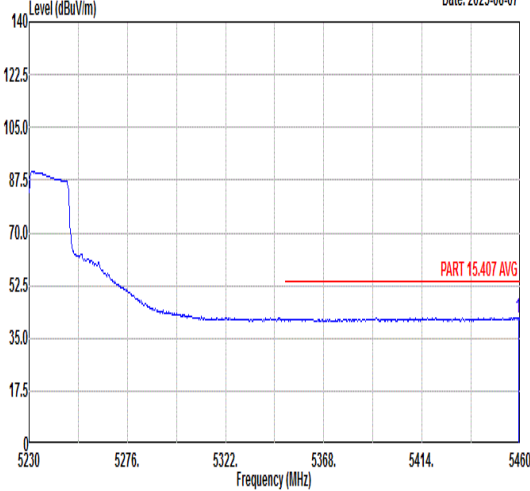


Mode	58																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																										
ANT	22																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2025-08-07 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5452.41</td><td>50.95</td><td>74.00</td><td>-23.05</td><td>39.21</td><td>35.47</td><td>9.68</td><td>33.41</td><td>394</td><td>287 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5452.41	50.95	74.00	-23.05	39.21	35.47	9.68	33.41	394	287 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5452.41	50.95	74.00	-23.05	39.21	35.47	9.68	33.41	394	287 PEAK																																	
Avg	Date: 2025-08-07 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.08</td><td>41.90</td><td>54.00</td><td>-12.10</td><td>30.14</td><td>35.48</td><td>9.69</td><td>33.41</td><td>394</td><td>287 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.08	41.90	54.00	-12.10	30.14	35.48	9.69	33.41	394	287 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5459.08	41.90	54.00	-12.10	30.14	35.48	9.69	33.41	394	287 AVERAGE																																	

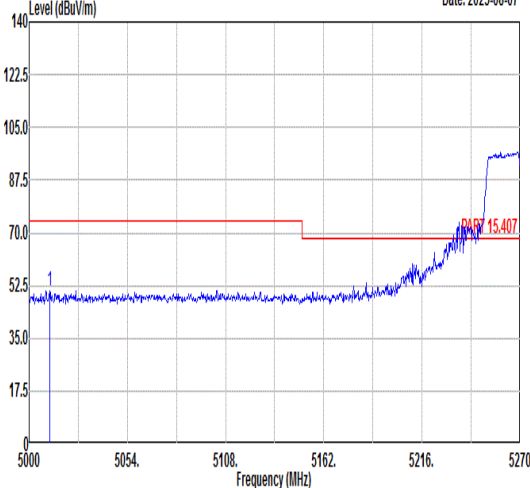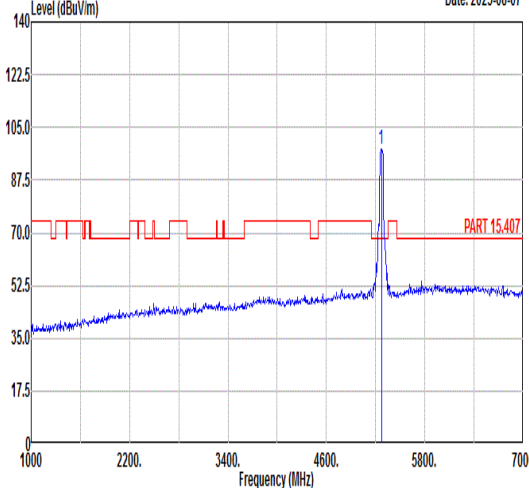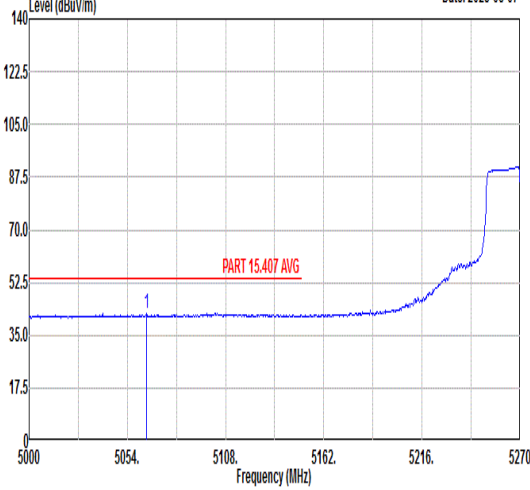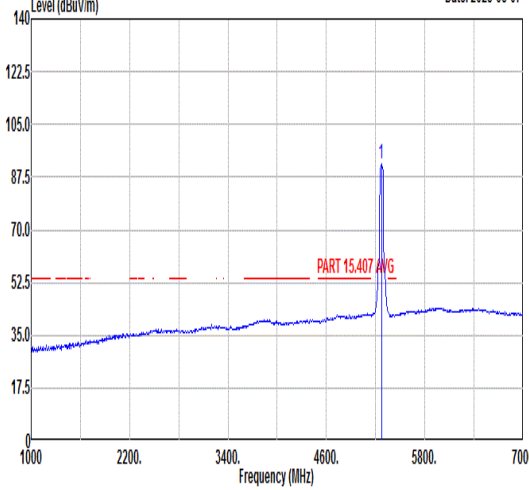

Mode	59																																																																																	
	Band Edge - L																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																																	
ANT	22																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-08-07  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5011.34</td><td>50.90</td><td>74.00</td><td>-23.10</td><td>40.88</td><td>35.21</td><td>8.31</td><td>33.50</td><td>100</td><td>67 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5011.34	50.90	74.00	-23.10	40.88	35.21	8.31	33.50	100	67 PEAK	Level (dBuV/m) Date: 2025-08-07  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5270.00</td><td>97.88</td><td>-----</td><td>-----</td><td>87.04</td><td>35.36</td><td>8.93</td><td>33.45</td><td>100</td><td>67 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5270.00	97.88	-----	-----	87.04	35.36	8.93	33.45	100	67 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5011.34	50.90	74.00	-23.10	40.88	35.21	8.31	33.50	100	67 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5270.00	97.88	-----	-----	87.04	35.36	8.93	33.45	100	67 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2025-08-07  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5064.53</td><td>42.20</td><td>54.00</td><td>-11.80</td><td>32.07</td><td>35.24</td><td>8.38</td><td>33.49</td><td>100</td><td>67 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5064.53	42.20	54.00	-11.80	32.07	35.24	8.38	33.49	100	67 AVERAGE	Level (dBuV/m) Date: 2025-08-07  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5270.00</td><td>91.95</td><td>-----</td><td>-----</td><td>81.08</td><td>35.36</td><td>8.96</td><td>33.45</td><td>100</td><td>67 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5270.00	91.95	-----	-----	81.08	35.36	8.96	33.45	100	67 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5064.53	42.20	54.00	-11.80	32.07	35.24	8.38	33.49	100	67 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5270.00	91.95	-----	-----	81.08	35.36	8.96	33.45	100	67 AVERAGE																																																																									



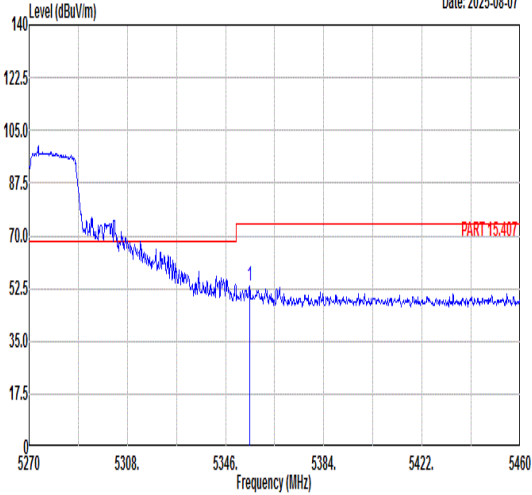
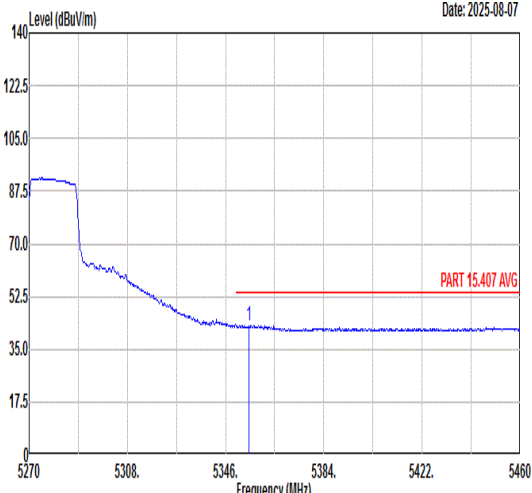


Mode	59																																																		
	Band Edge - R																																																		
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																		
ANT	22																																																		
Pol.	Horizontal					Fundamental																																													
Peak	Date: 2025-08-07 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5355.31</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>42.24</td><td>35.41</td><td>9.39</td><td>33.43</td><td>100</td><td>67 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5355.31	53.61	74.00	-20.39	42.24	35.41	9.39	33.43	100	67 PEAK	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	5355.31	53.61	74.00	-20.39	42.24	35.41	9.39	33.43	100	67 PEAK																																									
Avg	Date: 2025-08-07 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5354.93</td><td>43.00</td><td>54.00</td><td>-11.00</td><td>31.63</td><td>35.41</td><td>9.39</td><td>33.43</td><td>100</td><td>67 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5354.93	43.00	54.00	-11.00	31.63	35.41	9.39	33.43	100	67 AVERAGE	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	5354.93	43.00	54.00	-11.00	31.63	35.41	9.39	33.43	100	67 AVERAGE																																									







Mode	59																																									
	Band Edge - L																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																									
ANT	22																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2025-08-07 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor db db cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5044.55</td><td>51.31</td><td>74.00</td><td>-22.69</td><td>41.23</td><td>35.23</td><td>8.34</td><td>33.49</td><td>365</td><td>293 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5044.55	51.31	74.00	-22.69	41.23	35.23	8.34	33.49	365	293 PEAK	Level (dBuV/m) Date: 2025-08-08 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor db db cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5270.00</td><td>95.73</td><td>-----</td><td>-----</td><td>84.86</td><td>35.36</td><td>8.96</td><td>33.45</td><td>365</td><td>293 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5270.00	95.73	-----	-----	84.86	35.36	8.96	33.45	365	293 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																
1 5044.55	51.31	74.00	-22.69	41.23	35.23	8.34	33.49	365	293 PEAK																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 5270.00	95.73	-----	-----	84.86	35.36	8.96	33.45	365	293 PEAK																																	
Avg	Level (dBuV/m) Date: 2025-08-08 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor db db cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5124.74</td><td>42.13</td><td>54.00</td><td>-11.87</td><td>31.85</td><td>35.27</td><td>8.49</td><td>33.48</td><td>365</td><td>293 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5124.74	42.13	54.00	-11.87	31.85	35.27	8.49	33.48	365	293 AVERAGE	Level (dBuV/m) Date: 2025-08-08 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor db db cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5270.00</td><td>89.62</td><td>-----</td><td>-----</td><td>78.75</td><td>35.36</td><td>8.96</td><td>33.45</td><td>365</td><td>293 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5270.00	89.62	-----	-----	78.75	35.36	8.96	33.45	365	293 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 5124.74	42.13	54.00	-11.87	31.85	35.27	8.49	33.48	365	293 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 5270.00	89.62	-----	-----	78.75	35.36	8.96	33.45	365	293 AVERAGE																																	

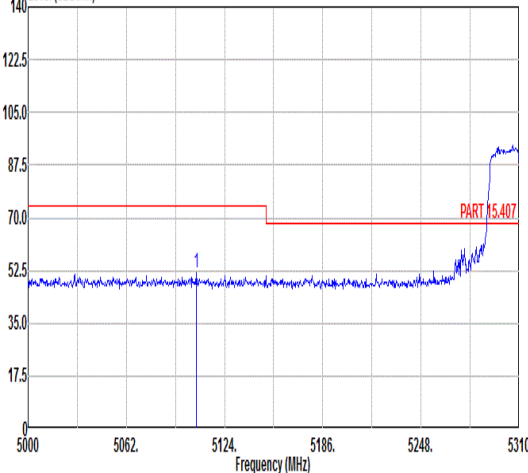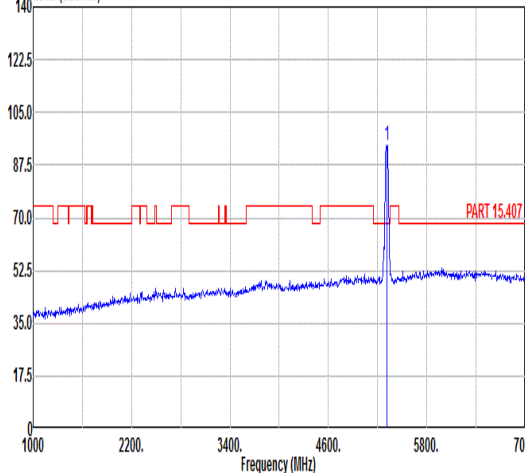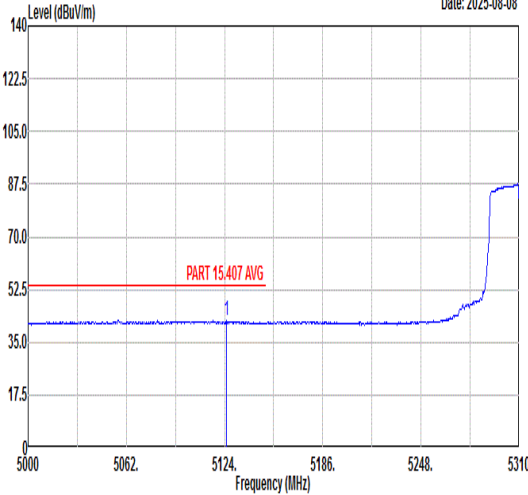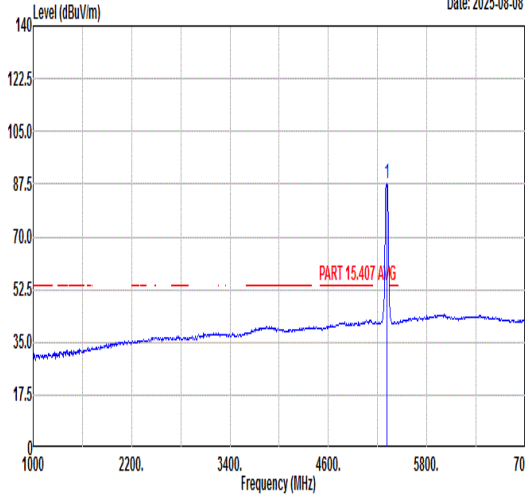

Mode	60																																																																																																									
	Band Edge - L																																																																																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																																									
ANT	22																																																																																																									
Pol.	Horizontal																																																																																																									
Peak	Fundamental																																																																																																									
	Level (dBuV/m) Date: 2025-08-08  Frequency (MHz)											Level (dBuV/m) Date: 2025-08-08  Frequency (MHz)																																																																																														
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5106.33</td><td>51.78</td><td>74.00</td><td>-22.22</td><td>41.55</td><td>35.26</td><td>8.45</td><td>33.48</td><td>100</td><td>65</td><td>PEAK</td></tr></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5106.33	51.78	74.00	-22.22	41.55	35.26	8.45	33.48	100	65	PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>94.19</td><td>-----</td><td>-----</td><td>83.10</td><td>35.38</td><td>9.15</td><td>33.44</td><td>100</td><td>65</td><td>PEAK</td></tr></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5310.00	94.19	-----	-----	83.10	35.38	9.15	33.44	100	65	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5106.33	51.78	74.00	-22.22	41.55	35.26	8.45	33.48	100	65	PEAK																																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5310.00	94.19	-----	-----	83.10	35.38	9.15	33.44	100	65	PEAK																																																																																															
Avg	Level (dBuV/m) Date: 2025-08-08  Frequency (MHz)											Level (dBuV/m) Date: 2025-08-08  Frequency (MHz)																																																																																														
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5125.24</td><td>42.15</td><td>54.00</td><td>-11.85</td><td>31.85</td><td>35.28</td><td>8.49</td><td>33.47</td><td>100</td><td>65</td><td>AVERAGE</td></tr></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5125.24	42.15	54.00	-11.85	31.85	35.28	8.49	33.47	100	65	AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>87.55</td><td>-----</td><td>-----</td><td>76.42</td><td>35.39</td><td>9.18</td><td>33.44</td><td>100</td><td>65</td><td>AVERAGE</td></tr></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5310.00	87.55	-----	-----	76.42	35.39	9.18	33.44	100	65	AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5125.24	42.15	54.00	-11.85	31.85	35.28	8.49	33.47	100	65	AVERAGE																																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5310.00	87.55	-----	-----	76.42	35.39	9.18	33.44	100	65	AVERAGE																																																																																															

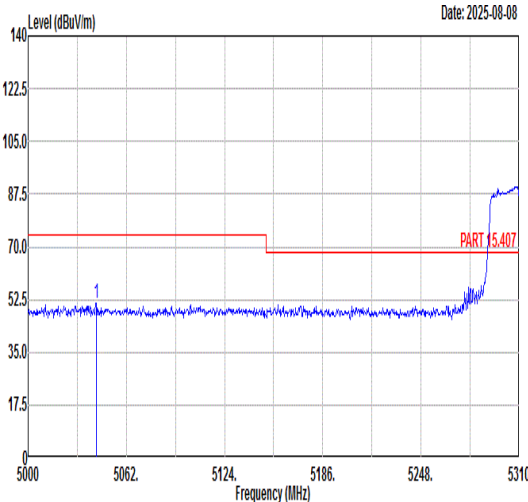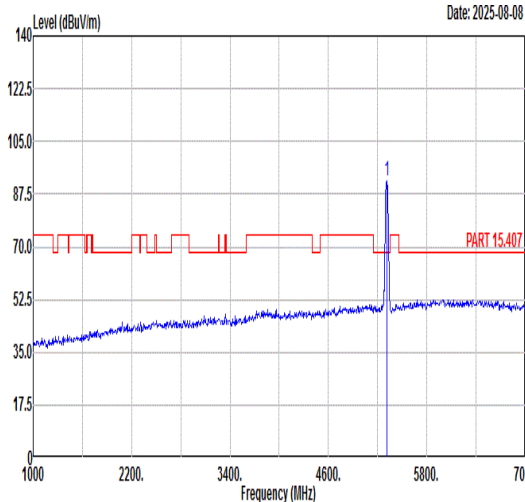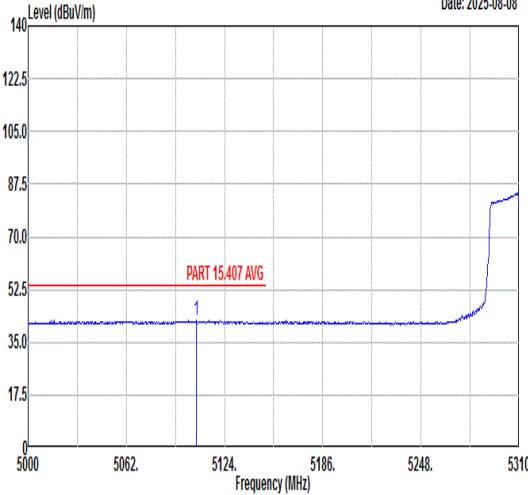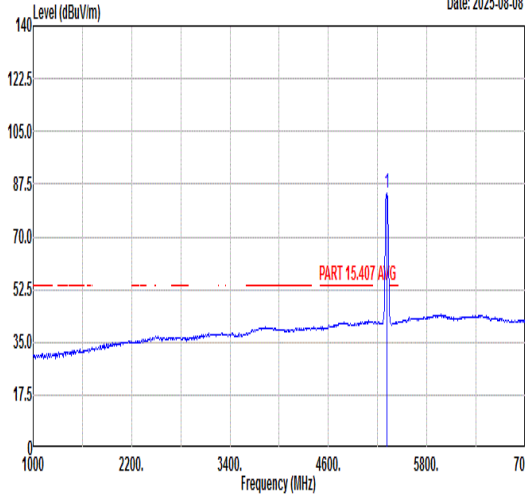

Mode	60																																																																																									
	Band Edge - L																																																																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																									
ANT	22																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5043.09</td><td>51.43</td><td>74.00</td><td>-22.57</td><td>41.35</td><td>35.23</td><td>8.34</td><td>33.49</td><td>380 286 PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5043.09	51.43	74.00	-22.57	41.35	35.23	8.34	33.49	380 286 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>91.76</td><td>-----</td><td>-----</td><td>80.63</td><td>35.39</td><td>9.18</td><td>33.44</td><td>380 286 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5310.00	91.76	-----	-----	80.63	35.39	9.18	33.44
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5043.09	51.43	74.00	-22.57	41.35	35.23	8.34	33.49	380 286 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5310.00	91.76	-----	-----	80.63	35.39	9.18	33.44	380 286 PEAK																																																																																	
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5106.33</td><td>42.22</td><td>54.00</td><td>-11.78</td><td>31.99</td><td>35.26</td><td>8.45</td><td>33.48</td><td>380 286 AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5106.33	42.22	54.00	-11.78	31.99	35.26	8.45	33.48	380 286 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>84.47</td><td>-----</td><td>-----</td><td>73.34</td><td>35.39</td><td>9.18</td><td>33.44</td><td>380 286 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5310.00	84.47	-----	-----	73.34	35.39	9.18	33.44
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5106.33	42.22	54.00	-11.78	31.99	35.26	8.45	33.48	380 286 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5310.00	84.47	-----	-----	73.34	35.39	9.18	33.44	380 286 AVERAGE																																																																																	







Mode	60																																										
	Band Edge - R																																										
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																										
ANT	22																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2025-08-08 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5453.40</td><td>51.01</td><td>74.00</td><td>-22.99</td><td>39.27</td><td>35.47</td><td>9.68</td><td>33.41</td><td>380</td><td>286 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5453.40	51.01	74.00	-22.99	39.27	35.47	9.68	33.41	380	286 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5453.40	51.01	74.00	-22.99	39.27	35.47	9.68	33.41	380	286 PEAK																																	
Avg	Date: 2025-08-08 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.65</td><td>42.75</td><td>54.00</td><td>-11.25</td><td>31.40</td><td>35.41</td><td>9.37</td><td>33.43</td><td>380</td><td>286 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.65	42.75	54.00	-11.25	31.40	35.41	9.37	33.43	380	286 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5350.65	42.75	54.00	-11.25	31.40	35.41	9.37	33.43	380	286 AVERAGE																																	







Mode	61	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	Level (dBuV/m) Date: 2025-08-08 <	

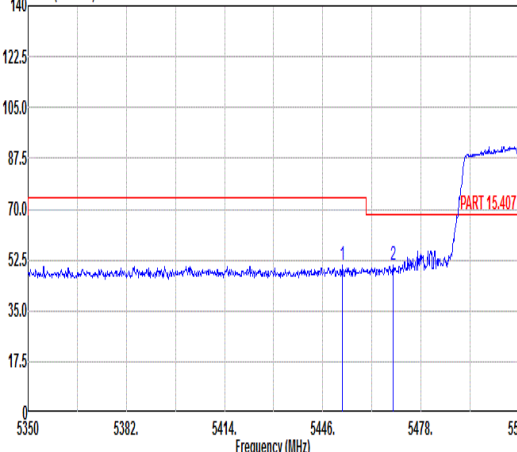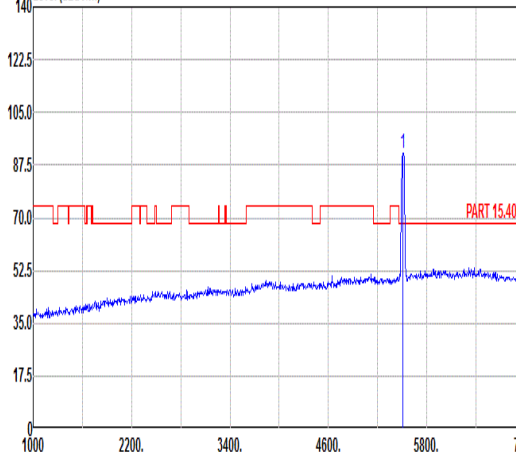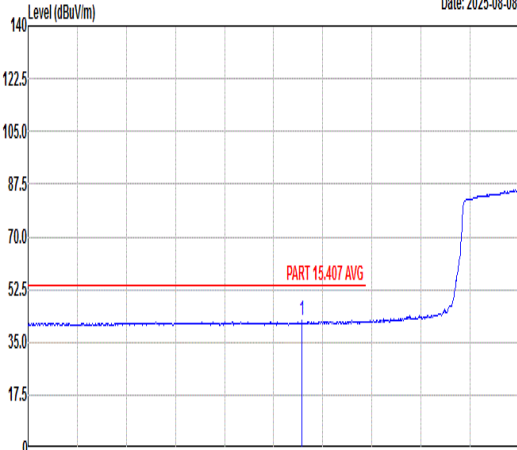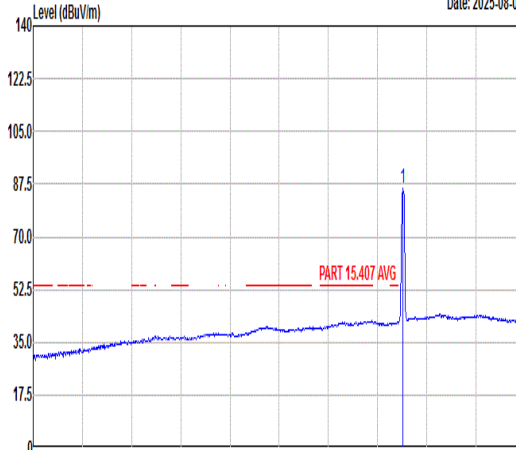

Mode	61																																																																																																																																																																												
	Band Edge - L																																																																																																																																																																												
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																																																																																																												
ANT	22																																																																																																																																																																												
Pol.	Vertical	Fundamental																																																																																																																																																																											
Peak	Level (dBuV/m) Date: 2025-08-08  PART 15.407 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5452.40</td><td>50.78</td><td>74.00</td><td>-23.22</td><td>39.04</td><td>35.47</td><td>9.68</td><td>33.41</td><td>374 252 PEAK</td></tr><tr><td>2</td><td>5468.88</td><td>50.80</td><td>68.30</td><td>-17.50</td><td>39.04</td><td>35.48</td><td>9.69</td><td>33.41</td><td>374 252 PEAK</td></tr></table> Level (dBuV/m) Date: 2025-08-08  PART 15.407 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>91.62</td><td>-----</td><td>79.79</td><td>35.52</td><td>9.71</td><td>33.40</td><td>374</td><td>252 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5452.40	50.78	74.00	-23.22	39.04	35.47	9.68	33.41	374 252 PEAK	2	5468.88	50.80	68.30	-17.50	39.04	35.48	9.69	33.41	374 252 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	91.62	-----	79.79	35.52	9.71	33.40	374	252 PEAK	Avg	Level (dBuV/m) Date: 2025-08-08  PART 15.407 AVG <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5439.28</td><td>42.13</td><td>54.00</td><td>-11.87</td><td>30.40</td><td>35.46</td><td>9.68</td><td>33.41</td><td>374 252 AVERAGE</td></tr></table> Level (dBuV/m) Date: 2025-08-08  PART 15.407 AVG <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>85.87</td><td>-----</td><td>74.04</td><td>35.52</td><td>9.71</td><td>33.40</td><td>374</td><td>252 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5439.28	42.13	54.00	-11.87	30.40	35.46	9.68	33.41	374 252 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	85.87	-----	74.04	35.52	9.71	33.40	374	252 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5452.40	50.78	74.00	-23.22	39.04	35.47	9.68	33.41	374 252 PEAK																																																																																																																																																																				
2	5468.88	50.80	68.30	-17.50	39.04	35.48	9.69	33.41	374 252 PEAK																																																																																																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5510.00	91.62	-----	79.79	35.52	9.71	33.40	374	252 PEAK																																																																																																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5439.28	42.13	54.00	-11.87	30.40	35.46	9.68	33.41	374 252 AVERAGE																																																																																																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5510.00	85.87	-----	74.04	35.52	9.71	33.40	374	252 AVERAGE																																																																																																																																																																				

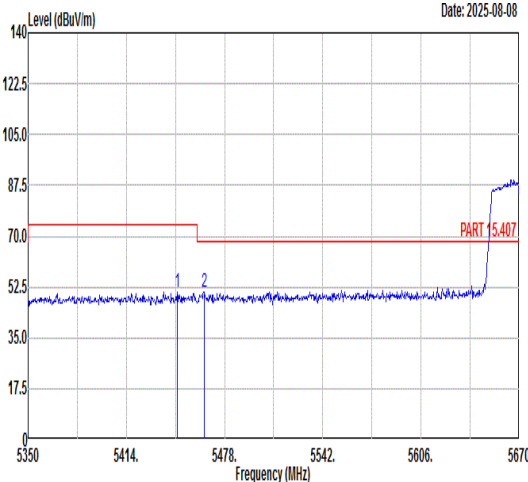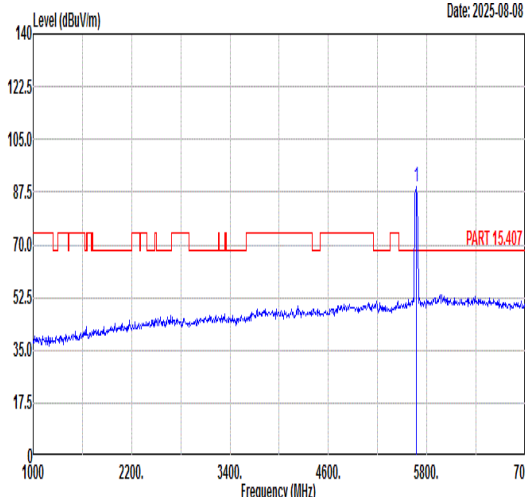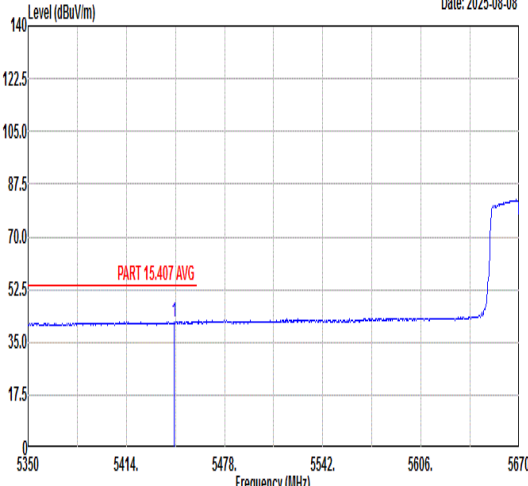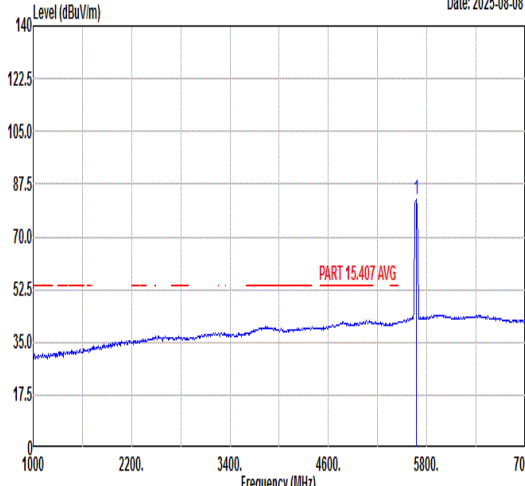

Mode	62																																																																																																										
	Band Edge - L																																																																																																										
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																																										
ANT	22																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																				
Peak																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5446.96</td><td>50.78</td><td>74.00</td><td>-23.22</td><td>39.04</td><td>35.47</td><td>9.68</td><td>33.41</td><td>100</td><td>100</td><td>PEAK</td></tr><tr><td>2</td><td>5464.56</td><td>50.86</td><td>68.30</td><td>-17.44</td><td>39.10</td><td>35.48</td><td>9.69</td><td>33.41</td><td>100</td><td>100</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5446.96	50.78	74.00	-23.22	39.04	35.47	9.68	33.41	100	100	PEAK	2	5464.56	50.86	68.30	-17.44	39.10	35.48	9.69	33.41	100	100	PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5670.00</td><td>89.03</td><td>-----</td><td>-----</td><td>76.82</td><td>35.74</td><td>9.90</td><td>33.43</td><td>100</td><td>100</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	89.03	-----	-----	76.82	35.74	9.90	33.43	100	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5446.96	50.78	74.00	-23.22	39.04	35.47	9.68	33.41	100	100	PEAK																																																																																																
2	5464.56	50.86	68.30	-17.44	39.10	35.48	9.69	33.41	100	100	PEAK																																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5670.00	89.03	-----	-----	76.82	35.74	9.90	33.43	100	100	PEAK																																																																																																
Avg																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5445.36</td><td>41.82</td><td>54.00</td><td>-12.18</td><td>30.08</td><td>35.47</td><td>9.68</td><td>33.41</td><td>100</td><td>100</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5445.36	41.82	54.00	-12.18	30.08	35.47	9.68	33.41	100	100	AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5670.00</td><td>82.30</td><td>-----</td><td>-----</td><td>70.09</td><td>35.74</td><td>9.90</td><td>33.43</td><td>100</td><td>100</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	82.30	-----	-----	70.09	35.74	9.90	33.43	100	100	AVERAGE											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5445.36	41.82	54.00	-12.18	30.08	35.47	9.68	33.41	100	100	AVERAGE																																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5670.00	82.30	-----	-----	70.09	35.74	9.90	33.43	100	100	AVERAGE																																																																																																



Mode	63																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																	
ANT	22																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5123.90</td><td>52.84</td><td>74.00</td><td>-21.16</td><td>42.56</td><td>35.27</td><td>8.49</td><td>33.48</td><td>103 35 PEAK</td></tr></table> Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>93.35</td><td>-----</td><td>82.77</td><td>35.33</td><td>8.71</td><td>33.46</td><td>103</td><td>35 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5123.90	52.84	74.00	-21.16	42.56	35.27	8.49	33.48	103 35 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	93.35	-----	82.77	35.33	8.71	33.46	103	35 PEAK	
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5123.90	52.84	74.00	-21.16	42.56	35.27	8.49	33.48	103 35 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5210.00	93.35	-----	82.77	35.33	8.71	33.46	103	35 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.94</td><td>45.97</td><td>54.00</td><td>-8.03</td><td>35.61</td><td>35.29</td><td>8.54</td><td>33.47</td><td>103 35 AVERAGE</td></tr></table> Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>88.04</td><td>-----</td><td>77.49</td><td>35.33</td><td>8.68</td><td>33.46</td><td>103</td><td>35 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.94	45.97	54.00	-8.03	35.61	35.29	8.54	33.47	103 35 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	88.04	-----	77.49	35.33	8.68	33.46	103	35 AVERAGE	
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5149.94	45.97	54.00	-8.03	35.61	35.29	8.54	33.47	103 35 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5210.00	88.04	-----	77.49	35.33	8.68	33.46	103	35 AVERAGE																																																																									



Mode	63									
	Band Edge - R									
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz									
ANT	22									
Pol.	Horizontal					Fundamental				
Peak	Level (dBuV/m) <									







Mode	63											
	Band Edge - L											
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz											
ANT	22											
Pol.	Vertical						Fundamental					
Peak	Level (dBuV/m) Date: 2025-08-08											



Mode	63	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) <	

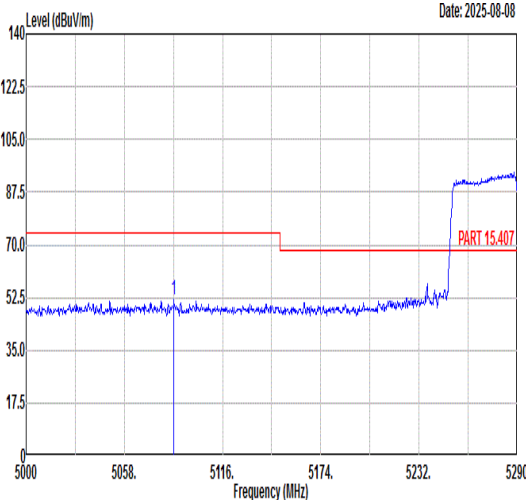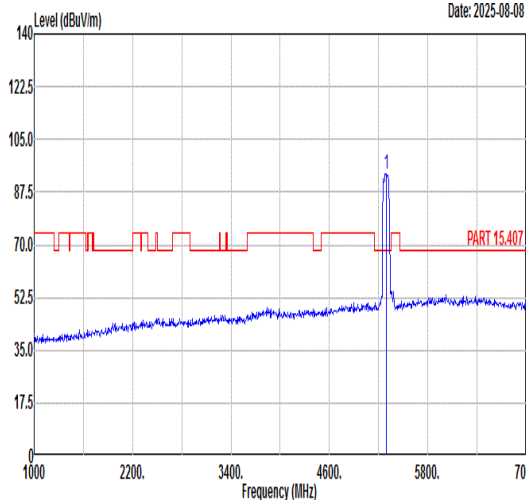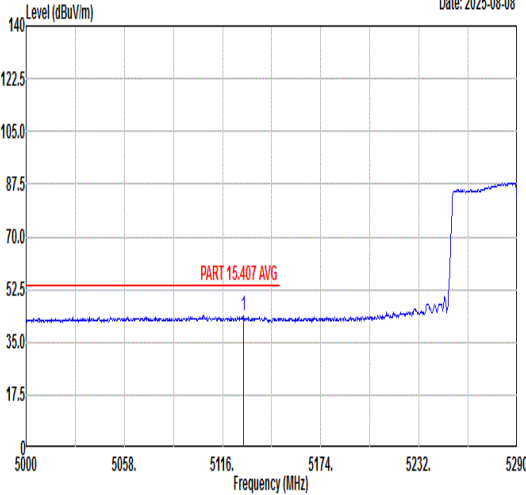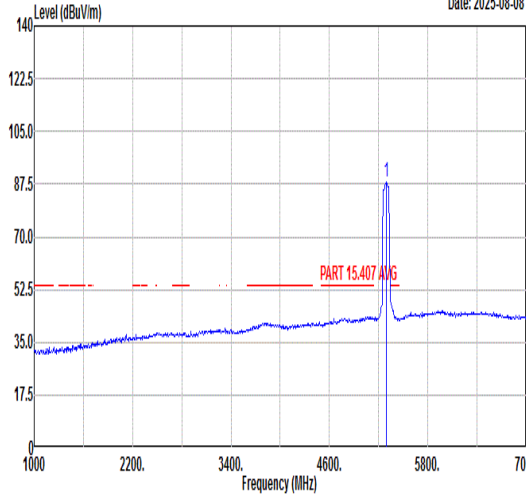

Mode	64																																																																																																																																																																				
	Band Edge - L																																																																																																																																																																				
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																																																																																																																																																				
ANT	22																																																																																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																																																																																			
Peak	Level (dBuV/m) Date: 2025-08-08  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5087.29</td><td>51.69</td><td>74.00</td><td>-22.31</td><td>41.50</td><td>35.25</td><td>8.42</td><td>33.48</td><td>100</td><td>58 PEAK</td></tr></tbody></table> Level (dBuV/m) Date: 2025-08-08  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>93.76</td><td>-----</td><td>82.84</td><td>35.37</td><td>8.99</td><td>33.44</td><td>100</td><td>58 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5087.29	51.69	74.00	-22.31	41.50	35.25	8.42	33.48	100	58 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	93.76	-----	82.84	35.37	8.99	33.44	100	58 PEAK	Avg	Level (dBuV/m) Date: 2025-08-08  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5128.18</td><td>43.85</td><td>54.00</td><td>-10.15</td><td>33.54</td><td>35.28</td><td>8.50</td><td>33.47</td><td>100</td><td>58 AVERAGE</td></tr></tbody></table> Level (dBuV/m) Date: 2025-08-08  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>88.01</td><td>-----</td><td>76.98</td><td>35.38</td><td>9.09</td><td>33.44</td><td>100</td><td>58 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5128.18	43.85	54.00	-10.15	33.54	35.28	8.50	33.47	100	58 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	88.01	-----	76.98	35.38	9.09	33.44	100	58 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																												
1	5087.29	51.69	74.00	-22.31	41.50	35.25	8.42	33.48	100	58 PEAK																																																																																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																												
1	5290.00	93.76	-----	82.84	35.37	8.99	33.44	100	58 PEAK																																																																																																																																																												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																												
1	5128.18	43.85	54.00	-10.15	33.54	35.28	8.50	33.47	100	58 AVERAGE																																																																																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																												
1	5290.00	88.01	-----	76.98	35.38	9.09	33.44	100	58 AVERAGE																																																																																																																																																												







Mode	64																																																		
	Band Edge - R																																																		
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																																		
ANT	22																																																		
Pol.	Horizontal					Fundamental																																													
Peak	Date: 2025-08-08 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.03</td><td>56.07</td><td>74.00</td><td>-17.93</td><td>44.72</td><td>35.41</td><td>9.37</td><td>33.43</td><td>100</td><td>58 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5351.03	56.07	74.00	-17.93	44.72	35.41	9.37	33.43	100	58 PEAK	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	5351.03	56.07	74.00	-17.93	44.72	35.41	9.37	33.43	100	58 PEAK																																									
Avg	Date: 2025-08-08 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5354.26</td><td>48.23</td><td>54.00</td><td>-5.77</td><td>36.86</td><td>35.41</td><td>9.39</td><td>33.43</td><td>100</td><td>58 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5354.26	48.23	54.00	-5.77	36.86	35.41	9.39	33.43	100	58 AVERAGE	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	5354.26	48.23	54.00	-5.77	36.86	35.41	9.39	33.43	100	58 AVERAGE																																									



Mode	64	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2025-08-08 <	

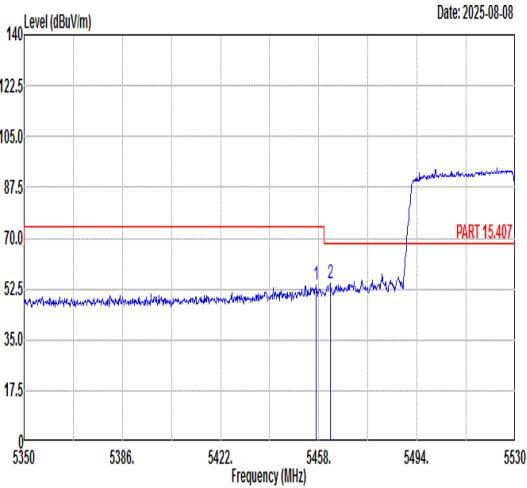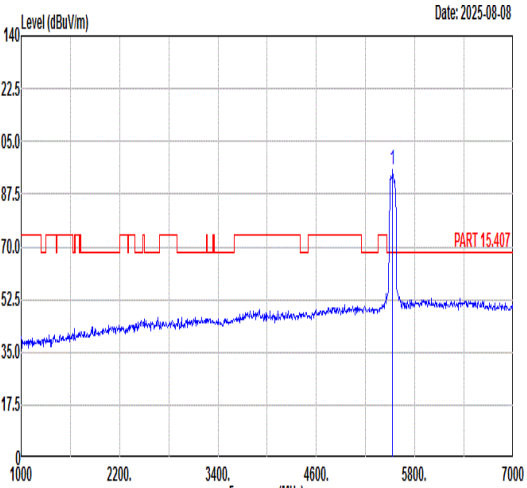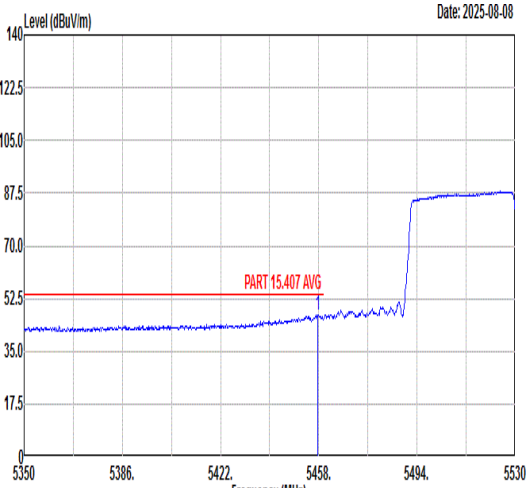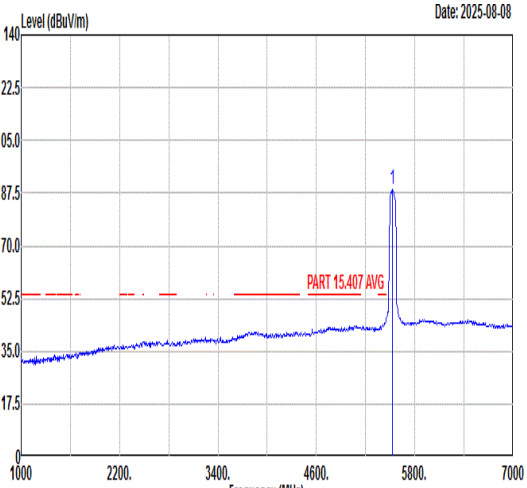

Mode	65																																																																																																						
	Band Edge - L																																																																																																						
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																																						
ANT	22																																																																																																						
Pol.	Horizontal					Fundamental																																																																																																	
Peak	 Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5457.10</td><td>54.08</td><td>74.00</td><td>-19.92</td><td>42.33</td><td>35.47</td><td>9.69</td><td>33.41</td><td>100</td><td>66 PEAK</td></tr><tr><td>2</td><td>5462.14</td><td>54.49</td><td>68.30</td><td>-13.81</td><td>42.73</td><td>35.48</td><td>9.69</td><td>33.41</td><td>100</td><td>66 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5457.10	54.08	74.00	-19.92	42.33	35.47	9.69	33.41	100	66 PEAK	2	5462.14	54.49	68.30	-13.81	42.73	35.48	9.69	33.41	100	66 PEAK	 Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>95.62</td><td>-----</td><td>-----</td><td>83.77</td><td>35.54</td><td>9.72</td><td>33.41</td><td>100</td><td>66 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	95.62	-----	-----	83.77	35.54	9.72	33.41	100	66 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5457.10	54.08	74.00	-19.92	42.33	35.47	9.69	33.41	100	66 PEAK																																																																																													
2	5462.14	54.49	68.30	-13.81	42.73	35.48	9.69	33.41	100	66 PEAK																																																																																													
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5530.00	95.62	-----	-----	83.77	35.54	9.72	33.41	100	66 PEAK																																																																																													
Avg	 Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5457.64</td><td>47.07</td><td>54.00</td><td>-6.93</td><td>35.32</td><td>35.47</td><td>9.69</td><td>33.41</td><td>100</td><td>66 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5457.64	47.07	54.00	-6.93	35.32	35.47	9.69	33.41	100	66 AVERAGE	 Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>88.84</td><td>-----</td><td>-----</td><td>76.99</td><td>35.54</td><td>9.72</td><td>33.41</td><td>100</td><td>66 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	88.84	-----	-----	76.99	35.54	9.72	33.41	100	66 AVERAGE											
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5457.64	47.07	54.00	-6.93	35.32	35.47	9.69	33.41	100	66 AVERAGE																																																																																													
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5530.00	88.84	-----	-----	76.99	35.54	9.72	33.41	100	66 AVERAGE																																																																																													







Mode	65																																																	
	Band Edge - R																																																	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																	
ANT	22																																																	
Pol.	Horizontal					Fundamental																																												
Peak	Date: 2025-08-08 Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5760.07</td><td>51.60</td><td>68.30</td><td>-16.70</td><td>39.10</td><td>35.86</td><td>10.09</td><td>33.45</td><td>100</td><td>66</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5760.07	51.60	68.30	-16.70	39.10	35.86	10.09	33.45	100	66	PEAK	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																									
1	5760.07	51.60	68.30	-16.70	39.10	35.86	10.09	33.45	100	66	PEAK																																							



Mode	65																																																																																													
	Band Edge - L																																																																																													
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																													
ANT	22																																																																																													
Pol.	Vertical					Fundamental																																																																																								
Peak	Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5457.46</td><td>50.79</td><td>74.00</td><td>-23.21</td><td>39.04</td><td>35.47</td><td>9.69</td><td>33.41</td><td>396</td><td>247 PEAK</td></tr><tr><td>2 5462.32</td><td>50.29</td><td>68.30</td><td>-18.01</td><td>38.53</td><td>35.48</td><td>9.69</td><td>33.41</td><td>396</td><td>247 PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5457.46	50.79	74.00	-23.21	39.04	35.47	9.69	33.41	396	247 PEAK	2 5462.32	50.29	68.30	-18.01	38.53	35.48	9.69	33.41	396	247 PEAK	Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5530.00</td><td>89.49</td><td>-----</td><td>-----</td><td>77.62</td><td>35.55</td><td>9.73</td><td>33.41</td><td>396</td><td>247 PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5530.00	89.49	-----	-----	77.62	35.55	9.73	33.41	396	247 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1 5457.46	50.79	74.00	-23.21	39.04	35.47	9.69	33.41	396	247 PEAK																																																																																					
2 5462.32	50.29	68.30	-18.01	38.53	35.48	9.69	33.41	396	247 PEAK																																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1 5530.00	89.49	-----	-----	77.62	35.55	9.73	33.41	396	247 PEAK																																																																																					
Avg	Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5421.82</td><td>43.55</td><td>54.00</td><td>-10.45</td><td>31.85</td><td>35.45</td><td>9.67</td><td>33.42</td><td>396</td><td>247 AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5421.82	43.55	54.00	-10.45	31.85	35.45	9.67	33.42	396	247 AVERAGE	Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5530.00</td><td>84.25</td><td>-----</td><td>-----</td><td>72.38</td><td>35.55</td><td>9.73</td><td>33.41</td><td>396</td><td>247 AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5530.00	84.25	-----	-----	72.38	35.55	9.73	33.41	396	247 AVERAGE										
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1 5421.82	43.55	54.00	-10.45	31.85	35.45	9.67	33.42	396	247 AVERAGE																																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1 5530.00	84.25	-----	-----	72.38	35.55	9.73	33.41	396	247 AVERAGE																																																																																					

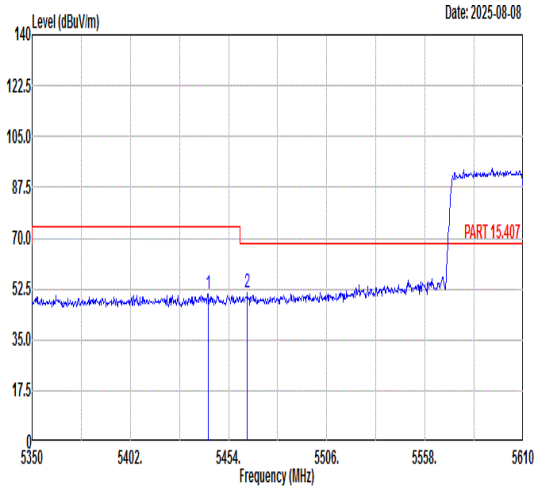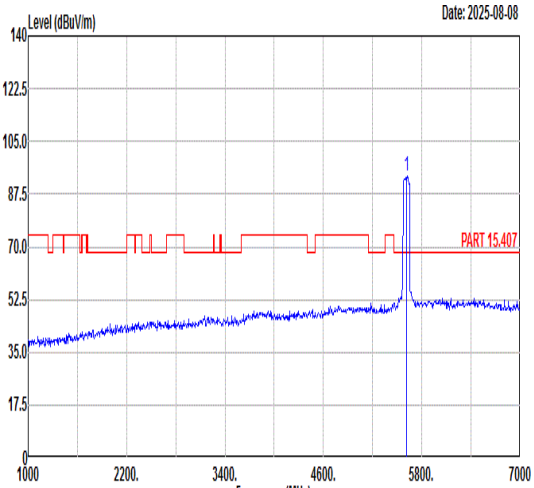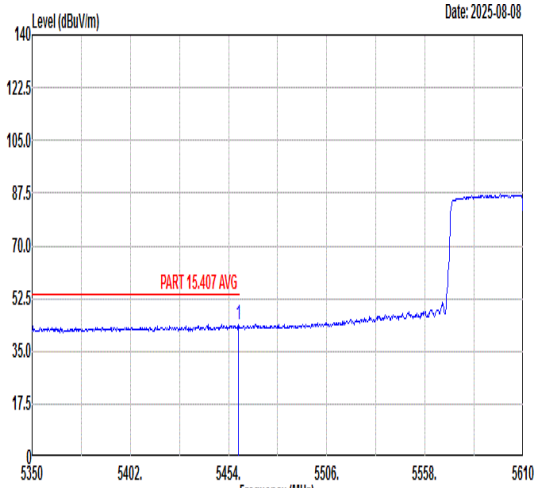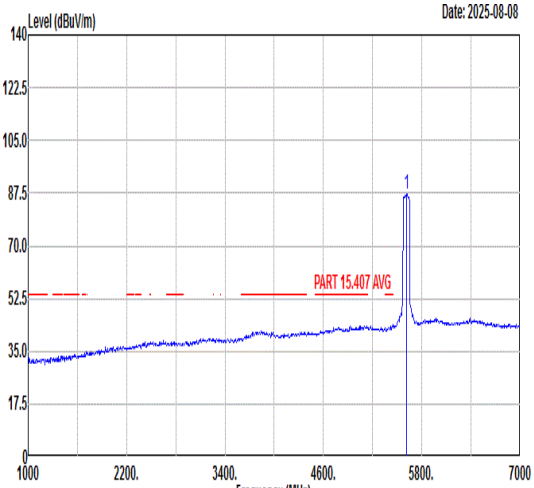

Mode	66																																																																																																					
	Band Edge - L																																																																																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																																																																																					
ANT	22																																																																																																					
Pol.	Horizontal					Fundamental																																																																																																
Peak	 Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5443.08</td><td>50.78</td><td>74.00</td><td>-23.22</td><td>39.04</td><td>35.47</td><td>9.68</td><td>33.41</td><td>100</td><td>66 PEAK</td></tr><tr><td>2</td><td>5463.88</td><td>51.36</td><td>68.30</td><td>-16.94</td><td>39.60</td><td>35.48</td><td>9.69</td><td>33.41</td><td>100</td><td>66 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5443.08	50.78	74.00	-23.22	39.04	35.47	9.68	33.41	100	66 PEAK	2	5463.88	51.36	68.30	-16.94	39.60	35.48	9.69	33.41	100	66 PEAK	 Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>93.48</td><td>-----</td><td>81.43</td><td>35.67</td><td>9.80</td><td>33.42</td><td>100</td><td>66 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	93.48	-----	81.43	35.67	9.80	33.42	100	66 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5443.08	50.78	74.00	-23.22	39.04	35.47	9.68	33.41	100	66 PEAK																																																																																												
2	5463.88	51.36	68.30	-16.94	39.60	35.48	9.69	33.41	100	66 PEAK																																																																																												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5610.00	93.48	-----	81.43	35.67	9.80	33.42	100	66 PEAK																																																																																													
Avg	 Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.20</td><td>43.77</td><td>54.00</td><td>-10.23</td><td>32.01</td><td>35.48</td><td>9.69</td><td>33.41</td><td>100</td><td>66 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.20	43.77	54.00	-10.23	32.01	35.48	9.69	33.41	100	66 AVERAGE	 Level (dBuV/m) Date: 2025-08-08 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>87.43</td><td>-----</td><td>75.40</td><td>35.66</td><td>9.79</td><td>33.42</td><td>100</td><td>66 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	87.43	-----	75.40	35.66	9.79	33.42	100	66 AVERAGE											
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5459.20	43.77	54.00	-10.23	32.01	35.48	9.69	33.41	100	66 AVERAGE																																																																																												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5610.00	87.43	-----	75.40	35.66	9.79	33.42	100	66 AVERAGE																																																																																													



Mode	66																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																								
ANT	22																																								
Pol.	Horizontal	Fundamental																																							
Peak	Date: 2025-08-08 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5757.25</td><td>52.11</td><td>68.30</td><td>-16.19</td><td>39.61</td><td>35.86</td><td>10.09</td><td>33.45</td><td>100</td><td>66 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5757.25	52.11	68.30	-16.19	39.61	35.86	10.09	33.45	100	66 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																
1	5757.25	52.11	68.30	-16.19	39.61	35.86	10.09	33.45	100	66 PEAK																															