


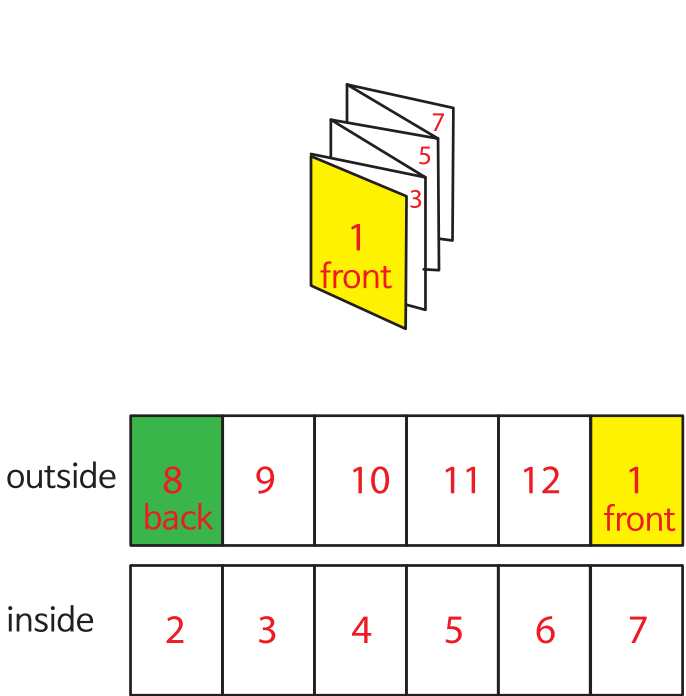

60 mm

60 mm

60 mm

60 mm

60 mm

60 mm

1 front

5

3

7

8 back

9

10

11

12

1 front

2

3

4

5

6

7

Installation (Bluetooth)

Android/ Windows PC/ Mac

Turn on the keyboard, the keyboard will be found automatically at your device. To pair the keyboard, go to your device to open the Bluetooth and search, "PV-K01-a" will display on the Bluetooth searching list. Click and connect via Bluetooth. If the keyboard is not found, proceed with the pairing manually as shown below.)

To disconnect from an existing connection and reconnect the keyboard to another device, hold down the BT button for 3 seconds, small dot LED will flash in white rapidly at 0.5 second intervals for one minute. (If the connection is not complete for one minute, the LED will extinguish and the pairing will also be terminated. Press the Bluetooth button again to connect.)

iPhone/ iPad/ Apple TV

Turn on the keyboard, hold down the Fn button and the BT button simultaneously for 3 seconds, small dot LED will flash in white rapidly at 0.5 second intervals for one minute. (If the connection is not complete for one minute, press the Fn button and the Bluetooth button again to connect.) To pair the keyboard, go to your device to open the Bluetooth and search, "PV-K01-a" will be displayed on the Bluetooth searching list. Click and connect via Bluetooth.

To disconnect from an existing connection and reconnect the keyboard to another device, hold down the Fn button and the BT button simultaneously for 3 seconds.

※Apple TV

If Bluetooth connection error (infinite loop), you should reboot Apple TV and connect "PV-K01-a" again.

Connection for audio

Turn on the keyboard, the audio will be found automatically at your device. To pair "Audio", go to your device to open the Bluetooth and search, "PV-K01-audio" will display on the Bluetooth searching list. Click and connect via Bluetooth. If there is no "PV-K01-audio" or if the connection fails, you should reboot the keyboard.

LED indicator

Batt. LED

Solid blue Charging (LED will be turned off if the battery is fully charged.)

Flashing blue Low power (less than 25%)

When the battery is low, the blue LED light will blink to warn the user. The keyboard will be automatically turned off if the battery has been depleted.

Bluetooth & Mode Indicator LED

Solid white Paired, Keyboard working

Slowly Flashing white Auto Pairing

Rapidly Flashing white Manual Pairing (by holding down the BT button for 3 seconds)

Features

※ The mouse and some keys may be different for each OS / IOS / iPadOS version.

※ Mouse cursor speed : 2-step, Fn + Space bar

Mode G

For PC games (e.g. Steam), Android mobile/ TV box games supporting the Bluetooth game controller

Mode 1

For Mac/ Windows/ Linux PC, Android

Jog → Mouse cursor controller

X/Y/A/B → Directional keys

L1/L → Mouse "L" button

R1/R → Mouse "R" button

Apple iPhone/ iPad

Jog → Not supported

X/Y/A/B → Directional keys

L1/L, R1/R → Not supported

Apple TV

Jog → Not supported

X/Y/A/B → Directional keys

L1/L, R1/R → Enter key

Mode 2

For Mac/ Windows/ Linux PC, Android

Jog → Directional keys

X/Y/A/B → Home/Pop-up PgDn/End

L1/L, R1/R → Not supported

Apple iPhone/ iPad

Jog → Directional keys

X/Y/A/B → Not supported

L1/L, R1/R → Not supported

Apple TV

Jog → Directional keys

X/Y/A/B → Not supported

L1/L, R1/R → Not supported

A/S

1. Product failure or quality problem occurring within the first seven 77 days of purchase can be replaced with the same-specification product or refunded.

2. The following cases cannot be repaired free of charge even during the warranty period and are subject to paid repair only:

- Product has failed due to user error and/or user carelessness.
- User has disassembled or remodeled product at his/her discretion.
- While in use, product has received damage or has failed due to outside forces.
- Product failure due to use of peripherals/cables not provided during purchase.
- Product failures other than those mentioned above that are recognized as being attributable to user error.

3. For warranty, please contact the (sole) distributor or seller based in the region where you made the purchase.

FCC Warning Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Wireless Keyboard

PV-K01

사용자 설명서

User Manual

POWER VESSEL

8 page

9 page

10 page

11 page

12 page

1 page

사 양

• Transmission mode : HID / Bluetooth 4.0-EDR / Audio / Bluetooth 4.2 CSR, up to 10 meters

• Transmission power : ±5db

• Power supply : Rechargeable 450mAh polymer Li-ion battery

• Charging voltage : 4.4 ~ 5.25V

• Charging current : < 300mA

• Working current : < 40mA

• Dimensions : 128x66x10 mm

• Weight : 67g

제품 구성

FRONT

TOP

① 전원 버튼 ② 블루투스 버튼 ③ 모드 전환 버튼 ④ 메뉴 버튼 ⑤ 홈 버튼 ⑥ 후보키 버튼 ⑦ 조그 마우스 ⑧ 핸드프리 버튼 ⑨ 키보드 버튼 ⑩ 방향키 ⑪ 스퀘어키 (L/R) ⑫ 마우스용키 (L/R) ⑬ 충전포트 (Micro USB B-type, 5pin) ⑭ 이어폰잭 (3.5 p)

연결하기 (블루투스)

Android/ Windows PC/ Mac

키보드 연결을 करें, 연결하려는 기기에서 키보드로 자동으로 검색됩니다. 키보드를 페어링 연결하려면, 연결하려는 스마트폰이나 PC의 블루투스 설정에 들어가서 검색된 기기 중에 "PV-K01-a"를 찾아 선택하여 블루투스 연결을 시작합니다. (단! 1분동안 블루투스 연결을 완료하지 않으면, LED는 빠르게 깜빡이며 1분간 블루투스 대기상태가 지속됩니다.)

기존 연결된 기기와의 연결을 끊거나 다른 기기와 연결하기 위해서는, Fn+Fn과 블루투스 버튼을 동시에 약 3초동안 누릅니다.

연결하려는 제품기기의 블루투스 설정에 들어가서, 검색된 기기 중에 "PV-K01-a"를 찾아 선택하여 블루투스 연결을 시작합니다.

※Apple TV

단일 블루투스 연결 중 계속 연결대기 상태의 오류가 발생한다면, 제품기기의 연결을 끊다 단 후 "PV-K01-a"를 다시 연결해주세요.

오디오 연결

키보드 연결을 करें, 연결하려는 기기에서 오디오가 자동으로 검색됩니다. 오디오 기능을 페어링 연결하려면, 연결하려는 기기에서 블루투스 설정에 들어가서 검색된 기기 중에 "PV-K01-audio"를 찾아 선택하여 블루투스 연결을 시작합니다. 만약 "PV-K01-audio"가 검색되지 않거나 연결 오류가 발생하면, 키보드 연결을 끊다 커서 "PV-K01-audio"가 검색되는지 다시 확인합니다.

LED동작 설명

Batt. LED

충전 중 (완충 시 LED 꺼짐)

파란색 점멸 배터리의 충전 필요 (충전량 25%이하)

배터리 충전량(이 25%이하로 낮아지면 파란색 LED가 깜빡이며 충전 시기를 알려줍니다. 배터리가 방전되면 키보드는 자동으로 전원이 꺼집니다.)

블루투스 & 모드 확인용 LED

원색 점멸 블루투스 연결됨, 키보드 작동 중

원색 (느리게 점멸) 자동 페어링 대기상태

원색 (빠르게 점멸) 수동 페어링 대기상태 (3초동안 블루투스 버튼을 누를 때)

Features

※ 마우스와 일부 입력키들은 사용기기의 OS에 따라 다를 수 있습니다.

※ 마우스 커서 속도 조절 : 2단계, Fn + Space bar

Mode G

게임 컨트롤러를 지원하는 PC게임(스팀 등), 안드로이드 모바일/TV 박스 게임에서 사용

모드 1

맥/윈도우/리눅스 PC, 안드로이드

조그 → 마우스 커서 사용

X/Y/A/B → 방향키 사용

L1/L → 마우스 왼쪽버튼

R1/R → 마우스 오른쪽버튼

맥용 이어폰/이어헤드

조그 → 방향키 사용

X/Y/A/B → 자동연결

L1/L, R1/R → 자동연결

맥용 TV

조그 → 자동연결

X/Y/A/B → 방향키 사용

L1/L, R1/R → Enter 키

모드 2

맥/윈도우/리눅스 PC, 안드로이드

조그 → 방향키 사용

X/Y/A/B → Home/Pop-up PgDn/End

L1/L, R1/R → 자동연결

맥용 이어폰/이어헤드

조그 → 방향키 사용

X/Y/A/B → 자동연결

L1/L, R1/R → 자동연결

맥용 TV

조그 → 방향키 사용

X/Y/A/B → 자동연결

L1/L, R1/R → 자동연결

제품 사용 시 주의사항

• 제품을 건조한 상태로 보관하시고, 제품의 손상을 방지하기 위하여 습기가 많은 장소에 보관하지 마세요.

• 제품을 직사광선이나 고온으로부터 떨어지지 보관하세요. 고온은 제품의 내부 회로 또는 배터리에 손상을 줄 수 있습니다.

• 제품을 극도로 추운곳에 보관하지 마세요. 내부 회로가 손상될 수 있습니다.

• 제품을 침수로 분해하려고 시도하지 마세요. 제품을 무단으로 분해 시켜 제품에 복구 불가능한 손상을 줄 수 있습니다.

• 지면이나 타인(타인)의 바닥에 떨어뜨리지 마세요. 내부회로가 손상될 수 있습니다.

• 액체물이나 세제를 사용하여 제품을 닦지 마세요. 제품 외부 또는 내부에 손상을 줄 수 있습니다.

• 불확한 물체를 제품 외관을 긁지 마세요.

• 안전면이나 무연면제품 근처에서 사용하지 마세요. 블루투스통신에 방해가 될 수 있습니다.

• 본 키보드는 내용 리튬이온 배터리를 사용합니다. 안전을 위해 충전제(물과 충전기)는 인공된 제품만 사용하세요.

A/S 안내

1. A/S 유요기간은 제품을 구매하신 날로부터 12개월이며 유요기간내 제품 고장의 교환 시 무상으로 수리를 받으실 수 있습니다.

2. 판매후 7일 이내에 제품의 고장 또는 용질 이상(수발행 시 동일한 사양의 제품으로 교환 또는 환불)이 가능합니다.

3. 다음과 같은 경우에는 A/S 유요기간 이내에도 무상 수리를 받으실 수 없으며 유상 수리가 적용됩니다.

- 사용자의 과실 및 부주의로 인하여 고장이 발생한 경우
- 제품을 임의의 분해 또는 개조한 경우
- 사용 중 외부의 충격으로 인한 제품의 손상 또는 고장의 경우
- 제품 구매 시 제공되지 않은 수리장치 또는 케이블 등의 사용으로 인한 고장의 경우
- 기타, 이용자의 과실로 인하여 제품의 고장으로 인정되는 경우

4. A/S 접수처 : 펀디언(주) / TEL. 1666-1611

Specification

• Transmission mode : HID / Bluetooth 4.0-EDR / Audio / Bluetooth 4.2 CSR, up to 10 meters

• Transmission power : ±5db

• Power supply : Rechargeable 450mAh polymer Li-ion battery

• Charging voltage : 4.4 ~ 5.25V

• Charging current : < 300mA

• Working current : < 40mA

• Dimensions : 128x66x10 mm

• Weight : 67g

Product Overview

FRONT

TOP

① Power button ② Bluetooth button ③ Mode switch button ④ Menu button ⑤ Home button ⑥ Back button ⑦ Jog mouse ⑧ Hands free button ⑨ Selfie button ⑩ Directional keys ⑪ Shoulder key (L/R) ⑫ Mouse keys (L/R) ⑬ Charging port (Micro USB B-type, 5pin) ⑭ Earphone jack (3.5 p)

2 page

3 page

4 page

5 page

6 page

7 page