

FCC SAR Test Report

Client Name : Shenzhen Vitek Electronics Co.,Ltd

Address : Room 801-805, Jiangnan Building, Yongxiang Road, Bantian,
Longgang, Shenzhen, Guangdong, China

Product Name : 8 inch Tablet PC

Date : Mar. 24, 2022



Shenzhen Anbotech Compliance Laboratory Limited

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline

400-003-0500

www.anbotech.com

Contents

1. Statement of Compliance.....	6
2. General Information.....	7
2.1. Client Information.....	7
2.2. Testing Laboratory Information.....	7
2.3. Description of Equipment Under Test (EUT).....	8
2.4. Device Category and SAR Limits.....	9
2.5. Applied Standard.....	9
2.6. Environment of Test Site.....	9
2.7. Test Configuration.....	9
3. Specific Absorption Rate (SAR).....	10
3.1. Introduction.....	10
3.2. SAR Definition.....	10
4. SAR Measurement System.....	11
4.1. E-Field Probe.....	12
4.2. Data Acquisition Electronics (DAE).....	12
4.3. Robot.....	13
4.4. Measurement Server.....	13
4.5. Phantom.....	14
4.6. Device Holder.....	15
4.7. Data Storage and Evaluation.....	16
5. Test Equipment List.....	18
6. Tissue Simulating Liquids.....	19
7. System Verification Procedures.....	21
8. EUT Testing Position.....	23
8.1. Define two imaginary lines on the handset.....	23
8.2. Position for Cheek/Touch.....	24
8.3. Position for Ear / 15°Tilt.....	24
8.4. Body Worn Position.....	25
9. Measurement Procedures.....	26
9.1. Spatial Peak SAR Evaluation.....	26
9.2. Power Reference Measurement.....	27
9.3. Area Scan Procedures.....	27
9.4. Zoom Scan Procedures.....	28
9.5. Volume Scan Procedures.....	29
9.6. Power Drift Monitoring.....	29
10. Conducted Power.....	30
11. Antenna Location.....	46
12. SAR Test Results Summary.....	48
12.1. Head SAR Results.....	48

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

12.2. Body –worn and Hotspot SAR Results	52
13. Simultaneous Transmission Analysis	56
Simultaneous TX SAR Considerations.....	56
Evaluation of Simultaneous SAR	57
14. Measurement Uncertainty	59
Appendix A. EUT Photos and Test Setup Photos	60
Appendix B. Plots of SAR System Check	62
Appendix C. Plots of SAR Test Data	68
Appendix D. DASY System Calibration Certificate.....	90

TEST REPORT

Applicant : Shenzhen Vitek Electronics Co.,Ltd
Manufacturer : Shenzhen Vitek Electronics Co.,Ltd
Product Name : 8 inch Tablet PC
Model No. : VK801W, VK800W, VK802W, VK803W, VK804W, VK805W,
VK806W, VK807W, VK808W, VK801A, V801RG, MT8768, VK8XX,
VK8XXY (X stands for 0 to 9, Y stands for A to Z)
Trade Mark : VTEX, VTEX by Vitek, ORAAKO
Rating(s) : DC 3.85V from battery or DC 5V from Adapter
**Test Standard(s) : IEEE 1528-2013;
ANSI/IEEE C95.1:2005; FCC 47 CFR Part 2 (2.1093);**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the IEEE 1528-2013, FCC 47 CFR Part 2 (2.1093), ANSI/IEEE C95.1:2005 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test Mar. 07, 2022~ Mar. 24, 2022

Prepared By

King Kong Jin

(Engineer / Kingkong Jin)

Reviewer

Bibo Zhang

(Supervisor / Bibo Zhang)

Approved & Authorized Signer

Tom Chen

(Manager / Tom Chen)

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
400-003-0500
www.anbotek.com

Version

Version No.	Date	Description
01	Mar. 24, 2022	Original

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

**Hotline**

400-003-0500

www.anbotek.com

1. Statement of Compliance

<Highest SAR Summary>

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013

The maximum results of Specific Absorption Rate (SAR) found during testing are as follows.

<Highest SAR Summary>

FrequencyBand	Highest Reported 1g-SAR(W/Kg)			SAR Test Limit (W/Kg)
	Head	Body-worn (0mm)	Hotspot (0mm)	
GSM 850	0.325	0.785	0.785	1.6
GSM1900	0.234	0.713	0.713	
WCDMA Band II	0.264	0.463	0.463	
WCDMA Band V	0.316	0.637	0.637	
LTE Band 2	0.244	0.522	0.522	
LTE Band 4	0.187	0.510	0.510	
LTE Band 5	0.214	0.587	0.587	
LTE Band 7	0.124	0.413	0.413	
WLAN2.4G	0.212	0.195	0.195	
WLAN5.2G	0.111	0.125	0.125	
WLAN5.8G	0.102	0.142	0.142	
BT	0.265	0.265	0.265	
Max. Simultaneous Reported SAR (W/Kg)	0.590	1.050	1.050	
Test Result	PASS			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

2. General Information

2.1. Client Information

Applicant	:	Shenzhen Vitek Electronics Co.,Ltd
Address	:	Room 801-805, Jiangnan Building, Yongxiang Road, Bantian, Longgang, Shenzhen, Guangdong, China
Manufacturer	:	Shenzhen Vitek Electronics Co.,Ltd
Address	:	Room 801-805, Jiangnan Building, Yongxiang Road, Bantian, Longgang, Shenzhen, Guangdong, China

2.2. Testing Laboratory Information

Test Site:	:	Shenzhen Anbotech Compliance Laboratory Limited
Address:	:	1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com

 Hotline
400-003-0500
www.anbotech.com

2.3. Description of Equipment Under Test (EUT)

Product Name	:	8 inch Tablet PC
Model No.	:	VK801W, VK800W, VK802W, VK803W, VK804W, VK805W, VK806W, VK807W, VK808W, VK801A, V801RG, MT8768, VK8XX, VK8XXY (X stands for 0 to 9, Y stands for A to Z)
Trade Mark	:	VTEX, VTEX by Vitek, ORAAKO
Test Power Supply	:	DC 3.85V from battery or DC 5V from Adapter
Test Sample No.	:	S1(Normal Sample), S2(Engineering Sample)
Tx Frequency	:	GSM850: 824.2 MHz ~ 848.6 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band 2: 1852.4 MHz ~ 1907.6 MHz WCDMA Band 5: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824MHz ~ 849MHz LTE Band 7: 2500 MHz ~ 2570 MHz BT: 2402 MHz ~ 2480 MHz BLE: 2402MHz ~ 2480MHz WiFi: 2412 MHz - 2462MHz, 5.180GHz - 5.240GHz, 5745 MHz - 5825MHz
Type of Modulation	:	2G: GSM, GPRS, EGPRS WCDMA: QPSK, 16QAM LTE: QPSK, 16QAM BT: GFSK, 8DPSK, $\pi/4$ DQPSK WIFI: BPSK, QPSK, 16QAM, 64QAM
Hardware version	:	V2.0
Software version	:	V2.0
Category of device	:	Portable device
Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.		

2.4. Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

2.5. Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093:2013)
- ANSI/IEEE C95.1:2005
- IEEE Std 1528:2013
- KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- KDB 865664 D02 RF Exposure Reporting v01r02
- KDB 447498 D01 General RF Exposure Guidance v06
- KDB248227 D01 802.11 Wi-Fi SAR v02r02
- KDB941225 D01 3G SAR Procedures v03r01
- KDB 941225 D05 SAR for LTE Devices v02r05
- KDB 941225 D06 Hotspot SAR v02r01
- KDB648474 D04 Handset SAR v01r03

2.6. Environment of Test Site

Items	Required	Actual
Temperature (°C)	18-25	22~23
Humidity (%RH)	30-70	55~65

2.7. Test Configuration

The device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during all tests. For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement System

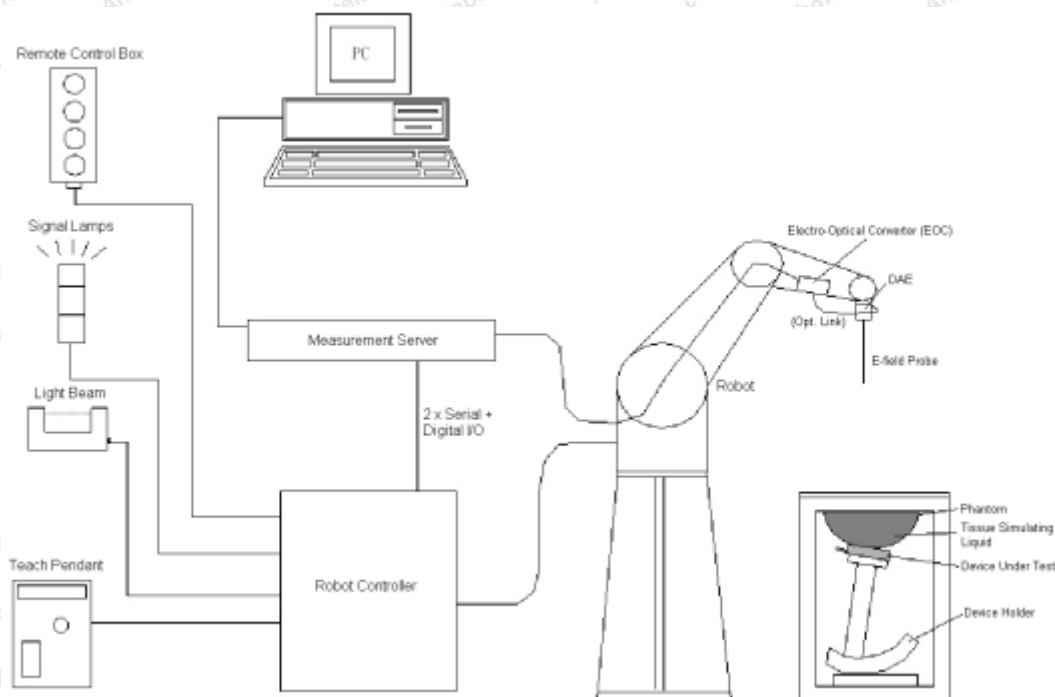

DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

components are described in details in the following sub-sections.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

4.1. E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ E-Field Probe Specification

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 W/kg; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Photo of EX3DV4

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

4.2. Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

**Photo of DAE**

4.3. Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX60XL) type from Stäubli SA (France). For the 6-axis controllersystem, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäublirobot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

**Photo of DASY5**

4.4. Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Photo of Server for DASY5

4.5. Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom

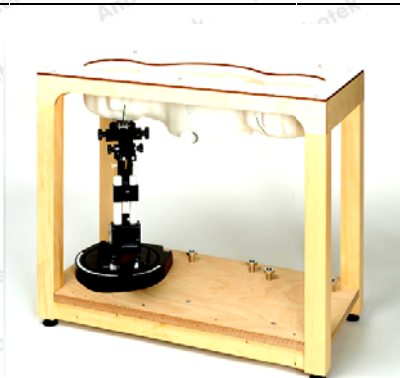


Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm



Photo of ELI4 Phantom

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the **Shenzhen Anbotek Compliance Laboratory Limited**

frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

4.6. Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Device Holder

4.7. Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [W/kg]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-loss media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)

U_i = input signal of channel i , ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)

Norm_i = sensor sensitivity of channel i , ($i = x, y, z$), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/kg

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d154	Jun 16,2021	Jun 15,2024
SPEAG	1900MHz System Validation Kit	D1900V2	5d175	Jun 15,2019	Jun 14,2022
SPEAG	2450MHz System Validation Kit	D2450V2	910	Jun 15,2021	Jun 14,2024
SPEAG	2600MHz System Validation Kit	D2600V2	1058	Jun 19,2021	Jun 18,2024
SPEAG	5GHz System Validation Kit	D5GHzV2	1160	Oct. 02, 2021	Oct. 01, 2024
Rohde & Schwarz	UNIVERSAL RADIO COMMUNICATION TESTER	CMU 200	117888	Oct.22, 2021	Oct.21, 2022
Rohde & Schwarz	UNIVERSAL RADIO COMMUNICATION TESTER	CMW500	1201.0002K50-104 209-JC	Oct.22, 2021	Oct.21, 2022
SPEAG	Data Acquisition Electronics	DAE4	387	Sept.06,2021	Sept.05,2022
SPEAG	Dosimetric E-Field Probe	EX3DV4	7396	May 06,2021	May 05,2022
Agilent	ENA Series Network Analyzer	E5071C	MY46317418	Oct.22, 2021	Oct.21, 2022
SPEAG	DAK	DAK-3.5	1226	NCR	NCR
SPEAG	SAM Twin Phantom	QD000P40CD	1802	NCR	NCR
SPEAG	ELI Phantom	QDOVA004AA	2058	NCR	NCR
AR	Amplifier	ZHL-42W	QA1118004	NCR	NCR
Agilent	Power Meter	N1914A	MY50001102	Oct.22, 2021	Oct.21, 2022
Agilent	Power Sensor	N8481H	MY51240001	Oct.22, 2021	Oct.21, 2022
R&S	Spectrum Analyzer	N9020A	MY51170037	Oct.22, 2021	Oct.21, 2022
Agilent	Signal Generation	N5182A	MY48180656	Oct.22, 2021	Oct.21, 2022
Worken	Directional Coupler	0110A05601O-10	COM5BNW1A2	Oct.22, 2021	Oct.21, 2022

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. The dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
4. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
5. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown as followed:



Photo of Liquid Height for Head SAR

Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1750	55.2	0	0	0.3	0	44.5	1.37	40.1
1800,1900,2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
900	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1750	70.2	0	0	0.4	0	29.4	1.49	53.4
1800,1900,2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	65.5	0	0	0	0	31.5	2.16	52.5

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

The following table shows the measuring results for simulating liquid.

Measured Frequency (MHz)	Target Tissue		Measured Tissue				Liquid Temp.	Test Data
	ϵ_r	σ	ϵ_r	Dev. (%)	σ	Dev. (%)		
850	55.2	0.97	55.04	-0.29	0.99	2.06	22.2℃	03/07/2022
1900	53.3	1.52	53.83	0.99	1.5	-1.32	22.1℃	03/09/2022
2450	52.7	1.95	53.1	0.76	1.97	1.03	22.2℃	03/10/2022
2600	52.2	2.16	52.46	0.50	2.23	3.24	22.2℃	03/11/2022
5200	48.20	6.00	46.74	-3.03	6.14	2.33	21.8	03/12/2022

7. System Verification Procedures


Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

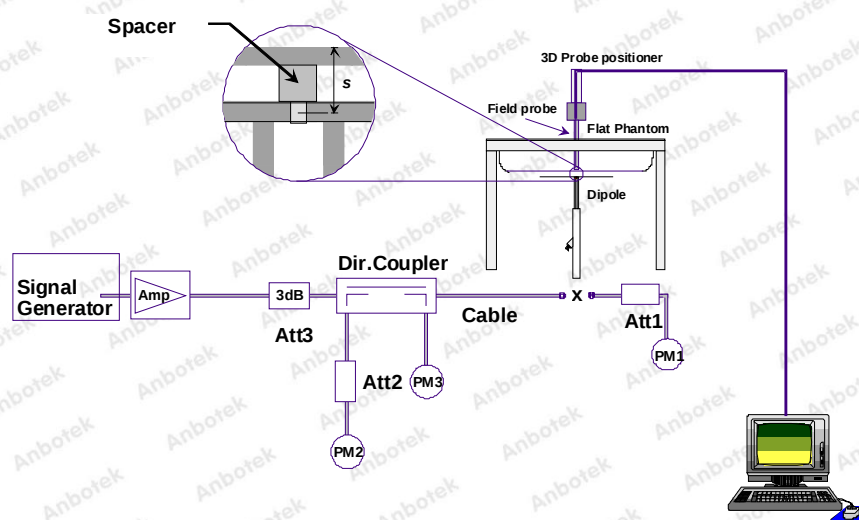

System Setup for System Evaluation

**Photo of Dipole Setup****► Validation Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10%. The table below shows the target SAR and measured SAR after normalized to 1W input power. It indicates that the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.



Date	Frequency (MHz)	Power fed onto reference dipole (mW)	Targeted SAR (W/kg)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
03/07/2022	850	250	9.57	2.34	9.36	-2.19
03/09/2022	1900	250	40.1	10.14	40.56	1.15
03/10/2022	2450	250	51.8	12.94	51.76	-0.08
03/11/2022	2600	250	55.3	13.95	55.80	0.90
03/12/2022	5200	100	77.8	7.89	78.90	1.41

Target and Measurement SAR after Normalized

8. EUT Testing Position

8.1. Define two imaginary lines on the handset

- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

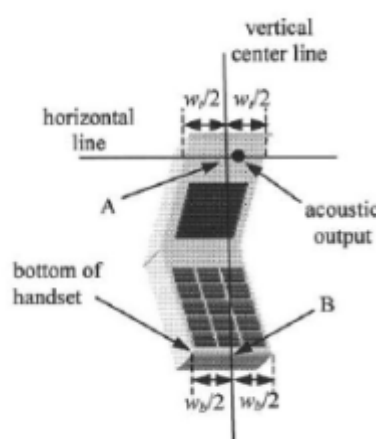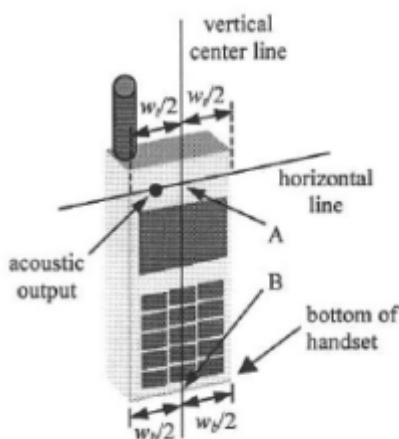

Handset Vertical and Horizontal Reference Lines

8.2. Position for Cheek/Touch

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.



Cheek Position

8.3. Position for Ear / 15°Tilt

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.




Tilt Position

8.4. Body Worn Position

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

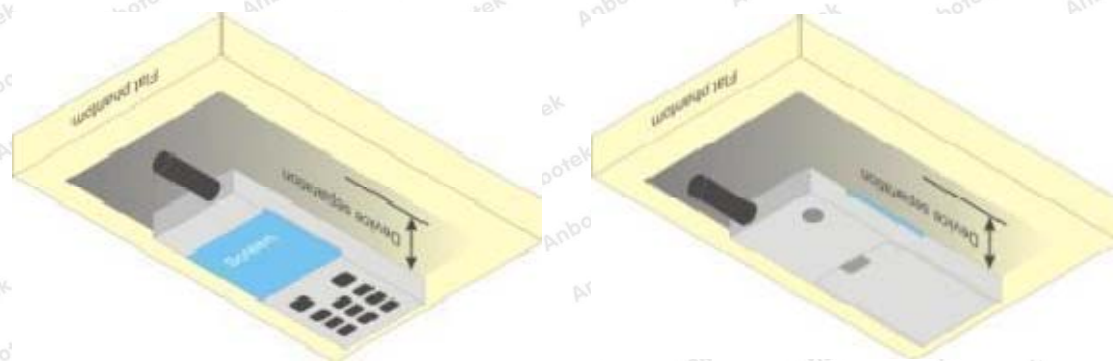

Body Worn Position

9. Measurement Procedures

The measurement procedures are as follows:

- Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the middle channel.
- Keep EUT to radiate maximum output power or 100% duty factor (if applicable)
- Measure output power through RF cable and power meter.
- Place the EUT in the positions as setup photos demonstrates.
- Set scan area, grid size and other setting on the DASY software.
- Measure SAR transmitting at the middle channel for all applicable exposure positions.
- Identify the exposure position and device configuration resulting the highest SAR
- Measure SAR at the lowest and highest channels at the worst exposure position and device configuration if applicable.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

9.1. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- Extraction of the measured data (grid and values) from the Zoom Scan
- Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- Generation of a high-resolution mesh within the measured volume
- Interpolation of all measured values from the measurement grid to the high-resolution grid
- Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- Calculation of the averaged SAR within masses of 1g and 10g

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

9.2. Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3. Area Scan Procedures

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4. Zoom Scan Procedures

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: < 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5. Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6. Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

10. Conducted Power

<GSM Conducted power>

Band GSM850	Burst Average Power (dBm)				Frame-Average Power (dBm)		
TX Channel	Tune-up	128	190	251	128	190	251
Frequency (MHz)	power	824.2	836.6	848.6	824.2	836.6	848.6
GSM (GMSK, 1 Tx slot)	33.0	33.58	33.92	33.79	24.55	24.89	24.76
GPRS (GMSK, 1 Tx slot)	33.0	33.66	33.71	33.65	24.63	24.68	24.62
GPRS (GMSK, 2 Tx slots)	30.0	30.5	30.56	30.5	24.48	24.54	24.48
GPRS (GMSK, 3 Tx slots)	29.0	29.43	29.49	29.44	25.17	25.23	25.18
GPRS (GMSK, 4 Tx slots)	26.2	27.11	27.19	27.17	24.10	24.18	24.16
EGPRS (8PSK, 1 Tx slot)	25.1	25.81	26.02	25.69	16.78	16.99	16.66
EGPRS (8PSK, 2 Tx slots)	25.0	25.66	25.91	25.75	19.64	19.89	19.73
EGPRS (8PSK, 3 Tx slots)	21.6	24.2	24.57	24.22	19.94	20.31	19.96
EGPRS (8PSK, 4 Tx slots)	21.5	21.76	22.15	21.93	18.75	19.14	18.92
Band GSM1900	Burst Average Power (dBm)				Frame-Average Power (dBm)		
TX Channel	Tune-up	512	661	810	512	661	810
Frequency (MHz)	power	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GSM (GMSK, 1 Tx slot)	29.6	30.47	30.52	30.56	21.44	21.49	21.53
GPRS (GMSK, 1 Tx slot)	29.6	30.41	30.57	30.55	21.38	21.54	21.52
GPRS (GMSK, 2 Tx slots)	27.5	28.29	28.13	27.87	22.27	22.11	21.85
GPRS (GMSK, 3 Tx slots)	26.0	26.78	26.61	26.37	22.52	22.35	22.11
GPRS (GMSK, 4 Tx slots)	24.7	25.68	25.51	25.23	22.67	22.50	22.22
EGPRS (8PSK, 1 Tx slot)	28.5	29.02	28.27	27.21	19.99	19.24	18.18
EGPRS (8PSK, 2 Tx slots)	28.0	28.83	28.2	27.28	22.81	22.18	21.26
EGPRS (8PSK, 3 Tx slots)	25.0	26.3	26.4	25.21	22.04	22.14	20.95
EGPRS (8PSK, 4 Tx slots)	23.0	24.44	23.83	22.57	21.43	20.82	19.56

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) – 9.03 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) – 6.02 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) – 3.01 dB

Note:

1. Per KDB 447498 D01, the maximum output power channel is used for SAR testing and for further SAR test reduction
2. For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM Voice for GSM850 and GSM1900 due to its highest frame-average power.
3. For Hotspot mode SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS 4 Tx slots for GSM850 and GSM1900 due to its highest frame-average power.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

<WCDMA Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$. Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$. Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g. Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.													

Setup Configuration**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

<WCDMA Conducted Power>

WCDMA	Band II (dBm)				Band V (dBm)			
TX Channel	Tune-up	9262	9400	9538	Tune-up	4132	4183	4233
Frequency (MHz)	power	1852.4	1880.0	1907.6	power	826.4	836.6	846.6
RMC 12.2Kbps	23.5	24.10	24.13	23.99	22.4	22.92	22.89	22.75
HSDPA Subtest-1	22.5	23.88	23.76	23.80	22.5	22.82	22.79	22.65
HSDPA Subtest-2	21.5	23.98	24.12	23.08	21.6	22.77	22.70	22.89
HSDPA Subtest-3	22.2	23.40	23.05	23.58	22.2	22.58	22.55	22.59
HSDPA Subtest-4	21.6	23.70	24.11	23.95	21.7	22.55	23.09	22.69
HSUPA Subtest-1	21.1	23.68	24.11	24.15	21.1	21.69	20.52	20.82
HSUPA Subtest-2	20.2	23.40	23.76	23.48	20.2	21.63	21.85	21.06
HSUPA Subtest-3	21.7	23.64	23.47	23.41	21.7	21.57	21.75	22.30
HSUPA Subtest-4	21.2	24.01	23.46	23.98	21.5	21.69	21.77	21.13
HSUPA Subtest-5	20.7	23.78	22.98	23.64	20.7	22.02	20.77	22.31

General Note

1. Per KDB 941225 D01 v02, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
2. By design, AMR and HSDPA/HSUPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.
3. It is expected by the manufacturer that MPR for some HSDPA/HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

LTE FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Burst Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1850.7	1 RB low	23.25	22.12
		1 RB high	23.27	22.10
		50% RB mid	23.31	21.98
		100% RB	23.23	22.14
	1880.0	1 RB low	22.98	22.93
		1 RB high	22.95	23.01
		50% RB mid	22.93	22.94
		100% RB	23.06	22.09
	1909.3	1 RB low	22.97	22.61
		1 RB high	22.96	22.69
		50% RB mid	22.91	22.66
		100% RB	23.11	21.68
3 MHz	1851.5	1 RB low	23.14	21.96
		1 RB high	23.16	22.00
		50% RB mid	22.20	22.04
		100% RB	22.22	21.40
	1880.0	1 RB low	22.88	21.94
		1 RB high	22.83	21.97
		50% RB mid	22.88	21.95
		100% RB	21.92	21.26
	1908.5	1 RB low	22.95	22.00
		1 RB high	22.88	21.99
		50% RB mid	22.94	21.97
		100% RB	22.00	21.32
5 MHz	1852.5	1 RB low	23.12	21.71
		1 RB high	23.18	21.70
		50% RB mid	23.16	21.27
		100% RB	22.08	21.27
	1880.0	1 RB low	23.04	21.77
		1 RB high	23.07	21.83
		50% RB mid	23.09	21.80
		100% RB	21.96	21.08
	1907.5	1 RB low	22.97	21.51
		1 RB high	23.01	21.50
		50% RB mid	23.02	21.49

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline
400-003-0500
www.anbotech.com

		100% RB	21.88	21.13
10 MHz	1855.0	1 RB low	23.10	22.19
		1 RB high	23.09	22.21
		50% RB mid	23.06	22.17
		100% RB	22.12	21.19
	1880.0	1 RB low	22.89	21.90
		1 RB high	23.03	21.31
		50% RB mid	23.03	21.35
		100% RB	22.00	21.20
	1905.0	1 RB low	21.95	21.70
		1 RB high	22.93	21.74
		50% RB mid	22.90	21.81
		100% RB	22.98	21.05
15 MHz	1857.5	1 RB low	23.06	22.19
		1 RB high	22.96	22.10
		50% RB mid	22.14	22.03
		100% RB	22.13	21.25
	1880.0	1 RB low	22.61	21.74
		1 RB high	22.64	21.90
		50% RB mid	22.63	21.84
		100% RB	22.01	21.19
	1902.5	1 RB low	23.03	22.04
		1 RB high	22.90	22.03
		50% RB mid	22.97	22.11
		100% RB	21.95	21.04
20 MHz	1860.0	1 RB low	23.12	22.02
		1 RB high	23.04	21.83
		50% RB mid	22.93	21.62
		100% RB	22.28	21.35
	1880.0	1 RB low	23.10	22.55
		1 RB high	23.18	22.54
		50% RB mid	23.36	22.65
		100% RB	22.06	21.17
	1900.0	1 RB low	23.36	22.02
		1 RB high	23.15	21.87
		50% RB mid	23.26	21.98
		100% RB	21.98	21.20

LTE FDD Band 4				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1710.7	1 RB low	23.44	23.52
		1 RB high	23.45	23.60
		50% RB mid	23.45	23.54
		100% RB	23.49	22.32
	1732.5	1 RB low	23.41	23.49
		1 RB high	23.33	23.50
		50% RB mid	23.40	23.50
		100% RB	23.44	22.23
	1754.3	1 RB low	23.42	22.68
		1 RB high	23.36	22.77
		50% RB mid	23.40	22.78
		100% RB	23.16	22.16
3 MHz	1711.5	1 RB low	23.50	22.56
		1 RB high	23.54	22.56
		50% RB mid	23.40	22.51
		100% RB	22.63	21.87
	1732.5	1 RB low	23.46	22.57
		1 RB high	23.46	22.50
		50% RB mid	23.42	22.45
		100% RB	22.50	21.83
	1753.5	1 RB low	23.18	21.79
		1 RB high	23.22	21.78
		50% RB mid	23.21	21.89
		100% RB	22.14	21.48
5 MHz	1712.	1 RB low	23.55	22.31
		1 RB high	23.53	22.22
		50% RB mid	23.49	22.27
		100% RB	22.56	21.55
	1732.5	1 RB low	23.55	21.95
		1 RB high	23.57	21.80
		50% RB mid	23.53	21.81
		100% RB	22.50	21.60
	1752.5	1 RB low	23.13	21.85
		1 RB high	23.07	21.80
		50% RB mid	23.26	22.41
		100% RB	22.22	21.31

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline
400-003-0500
www.anbotech.com

10 MHz	1715.0	1 RB low	23.53	21.84
		1 RB high	23.43	21.74
		50% RB mid	23.56	21.88
		100% RB	22.44	21.63
	1732.5	1 RB low	23.45	22.24
		1 RB high	23.42	22.30
		50% RB mid	23.32	22.18
		100% RB	22.45	21.50
	1750.0	1 RB low	23.17	21.68
		1 RB high	23.13	21.67
		50% RB mid	23.14	21.64
		100% RB	22.19	21.34
15 MHz	1717.5	1 RB low	23.13	22.30
		1 RB high	23.03	22.23
		50% RB mid	23.64	22.68
		100% RB	22.37	21.64
	1732.5	1 RB low	23.44	22.21
		1 RB high	23.43	22.14
		50% RB mid	23.30	22.06
		100% RB	22.51	21.63
	1747.5	1 RB low	23.41	22.65
		1 RB high	23.22	22.39
		50% RB mid	23.19	22.39
		100% RB	22.36	21.40
20 MHz	1720.0	1 RB low	23.52	22.91
		1 RB high	23.51	22.97
		50% RB mid	23.64	23.09
		100% RB	22.46	21.61
	1732.5	1 RB low	23.67	22.41
		1 RB high	23.68	22.39
		50% RB mid	23.48	22.21
		100% RB	22.46	21.72
	1745.0	1 RB low	23.50	22.38
		1 RB high	23.21	22.13
		50% RB mid	23.24	22.10
		100% RB	22.36	21.55

LTE FDD Band 5				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Burst Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	824.7	1 RB low	23.70	23.25
		1 RB high	23.68	23.33
		50% RB mid	23.66	23.24
		100% RB	23.80	22.46
	836.5	1 RB low	23.62	23.61
		1 RB high	23.83	23.57
		50% RB mid	23.73	23.60
		100% RB	23.76	22.49
	848.3	1 RB low	23.90	23.24
		1 RB high	23.96	23.19
		50% RB mid	23.99	23.23
		100% RB	23.93	22.90
3 MHz	825.5	1 RB low	23.81	22.54
		1 RB high	23.78	22.43
		50% RB mid	23.81	22.45
		100% RB	22.68	21.88
	836.5	1 RB low	23.66	22.80
		1 RB high	23.70	22.31

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

5 MHz	847.5	50% RB mid	23.73	22.35
		100% RB	22.75	22.33
		1 RB low	23.90	22.65
		1 RB high	23.91	22.60
		50% RB mid	24.03	22.61
		100% RB	22.85	22.55
	826.5	1 RB low	23.77	21.41
		1 RB high	23.83	21.40
		50% RB mid	23.76	21.23
		100% RB	22.78	21.32
	836.5	1 RB low	23.86	22.11
		1 RB high	23.97	22.13
		50% RB mid	23.96	22.16
		100% RB	22.71	21.20
	846.5	1 RB low	23.90	22.45
		1 RB high	23.95	22.67
		50% RB mid	23.99	22.51
		100% RB	22.98	21.71
10 MHz	829.0	1 RB low	22.80	23.86
		1 RB high	22.76	23.76
		50% RB mid	22.83	23.64
		100% RB	21.80	22.89
	836.5	1 RB low	22.12	23.82
		1 RB high	24.07	23.93
		50% RB mid	22.22	23.96
		100% RB	22.17	22.69
	844.0	1 RB low	23.03	23.79
		1 RB high	23.03	23.89
		50% RB mid	21.98	23.92
		100% RB	21.97	22.84

LTE Band 7

TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Burst Average Power [dBm]	
			QPSK	16QAM
5 MHz	2502.5	1 RB low	22.98	21.31
		1 RB mid	23.12	21.32
		1 RB high	23.01	21.42
		50% RB low	21.86	20.96
		50% RB mid	21.91	20.93
		50% RB high	21.95	20.99

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

	2535	100% RB	21.89	21.09
		1 RB low	22.86	22.07
		1 RB mid	22.79	22.01
		1 RB high	22.78	22.08
		50% RB low	21.93	21.04
		50% RB mid	21.92	21.05
		50% RB high	21.94	21.10
	2567.5	100% RB	21.96	21.04
		1 RB low	22.97	21.34
		1 RB mid	23.05	21.38
		1 RB high	23.07	21.40
		50% RB low	22.01	20.97
		50% RB mid	22.00	20.99
		50% RB high	21.95	21.02
10 MHz	2505	100% RB	21.97	21.10
		1 RB low	22.57	21.85
		1 RB mid	22.72	21.89
		1 RB high	22.85	22.00
		50% RB low	21.88	20.84
		50% RB mid	21.87	20.85
		50% RB high	21.85	20.94
	2535	100% RB	21.88	20.88
		1 RB low	23.25	22.06
		1 RB mid	23.17	22.05
		1 RB high	23.25	22.00
		50% RB low	22.14	21.33
		50% RB mid	22.16	21.38
		50% RB high	22.14	21.34
	2565	100% RB	22.23	21.28
		1 RB low	22.80	22.04
		1 RB mid	22.64	21.96
		1 RB high	22.70	22.00
		50% RB low	21.87	20.86
		50% RB mid	21.87	20.89
		50% RB high	21.78	20.90
15 MHz	2507.5	100% RB	21.93	20.88
		1 RB low	22.50	21.67
		1 RB mid	22.60	21.79
		1 RB high	22.64	21.79
		50% RB low	21.79	21.93

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

20 MHz	2535	50% RB mid	21.90	21.89
		50% RB high	21.87	21.85
		100% RB	21.84	20.98
		1 RB low	23.10	22.88
		1 RB mid	23.11	22.81
		1 RB high	23.05	22.65
		50% RB low	22.16	22.16
		50% RB mid	22.16	22.15
		50% RB high	22.14	22.14
		100% RB	22.13	21.31
	2562.5	1 RB low	22.67	21.54
		1 RB mid	22.72	21.69
		1 RB high	22.74	21.76
		50% RB low	21.79	21.88
		50% RB mid	21.95	21.77
		50% RB high	21.96	21.78
		100% RB	21.88	20.97
		1 RB low	22.87	21.42
	2510	1 RB mid	23.00	21.58
		1 RB high	23.02	21.57
		50% RB low	21.96	21.17
		50% RB mid	21.96	21.10
		50% RB high	22.08	21.18
		100% RB	21.94	21.03
	2535	1 RB low	23.26	22.73
		1 RB mid	23.22	22.72
		1 RB high	23.04	22.55
		50% RB low	22.19	21.43
		50% RB mid	22.30	21.43
		50% RB high	22.16	21.23
		100% RB	22.17	21.43
	2560	1 RB low	22.97	21.54
		1 RB mid	22.90	21.53
		1 RB high	23.10	21.75
		50% RB low	21.78	21.00
		50% RB mid	21.80	21.00
		50% RB high	21.83	21.09
		100% RB	21.76	20.92

<WLAN 2.4GHz Conducted Power>

Mode	Channel	Frequency (MHz)	Conducted Output Power(Average, dBm)	Max. Tune-up Power (dBm)
802.11b	1	2412	15.11	15.2
	6	2437	13.79	14.0
	11	2462	17.43	17.5
802.11g	1	2412	18.51	18.6
	6	2437	13.29	13.5
	11	2462	17.15	17.2
802.11n(20MHz)	1	2412	16.56	16.7
	6	2437	12.46	12.5
	11	2462	16.38	16.5
TX 802.11n40 Mode	3	2422	15.78	16.0
	6	2437	13.54	13.6
	9	2452	14.89	15.0

Configuration Band I (5150 - 5250 MHz)

Mode	Test channel	Maximum Conducted Output Power (dBm)	Max. Tune-up Power (dBm)
11a	CH36	7.75	8
11a	CH40	8.83	9
11a	CH48	8.97	9
11n(HT20)	CH36	7.35	7.5
11n(HT20)	CH40	7.79	8
11n(HT20)	CH48	8.06	8.1
11n(HT40)	CH38	7.33	7.5
11n(HT40)	CH46	7.59	7.6
11ac(HT20)	CH36	6.42	6.5
11ac(HT20)	CH40	7.77	8
11ac(HT20)	CH48	8.14	8.2
11ac(HT40)	CH38	7.66	7.7
11ac(HT40)	CH46	8.09	8.1
11ac(HT80)	CH42	7.72	7.8

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

Configuration Band IV (5725 - 5850 MHz)			
Mode	Test channel	Maximum Conducted Output Power (dBm)	Max. Tune-up Power (dBm)
11a	CH149	9.36	9.4
11a	CH157	7.83	8
11a	CH165	7.48	7.5
11n HT20	CH149	8.49	8.5
11n HT20	CH157	8.34	8.5
11n HT20	CH165	9.84	9.9
11n HT40	CH151	9.21	9.5
11n HT40	CH159	2.11	2.5
11ac HT20	CH149	8.85	9
11ac HT20	CH157	9.71	9.8
11ac HT20	CH165	9.77	9.8
11ac HT40	CH151	9.30	9.5
11ac HT40	CH159	9.57	9.6
11ac HT80	CH155	9.11	9.2

Note:

1. Per KDB 447498 D01, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$

for 1-g SAR, where

$f(\text{GHz})$ is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

Mode	Frequency (GHz)	Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
802.11b	2412	17.5	56.234	5	17.47	3.0
802.11a	5200	9	7.943	5	3.62	3.0
802.11a	5745	9.4	8.710	5	4.18	3.0

2. Base on the result of note1, RF exposure evaluation of 2.4G WIFI mode is required..

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

3. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.
4. Per KDB 248227 D01, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:
- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
 - 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

$$2.4\text{GWIFI}: 0.195 \text{ W/kg} \times (70.96 \text{ mW} / 55.34 \text{ mW}) = 0.250 \text{ W/kg}$$

$$5.2\text{GWIFI}: 0.125 \text{ W/kg} \times (6.52 \text{ mW} / 7.89 \text{ mW}) = 0.103 \text{ W/kg}$$

$$5.8\text{GWIFI}: 0.142 \text{ W/kg} \times (9.64 \text{ mW} / 8.63 \text{ mW}) = 0.159 \text{ W/kg}$$

All the results ≤ 1.2 W/kg, so the ratio of OFDM is not required RF exposure evaluation.

<Bluetooth Conducted Power>

Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Max. Tune-up power(dBm)
BLE-GFSK	00	2402	-1.38	-1
	19	2440	1.29	1.5
	39	2480	2.28	2.5
GFSK	00	2402	3.05	3.5
	39	2441	4.47	4.5
	78	2480	6.11	6.2
$\pi/4$ DQPSK	00	2402	4.79	5.0
	39	2441	5.61	5.7
	78	2480	7.27	7.5
8DPSK	00	2402	5.14	5.2
	39	2441	6.05	6.1
	78	2480	7.75	8

Note:

Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$

for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

$f(\text{GHz})$ is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
8	5	2.48	1.99

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com




Hotline

400-003-0500

www.anbotek.com

Per KDB 447498 D01, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 1.99 which is ≤ 3 , SAR testing is not required.

11. Antenna Location

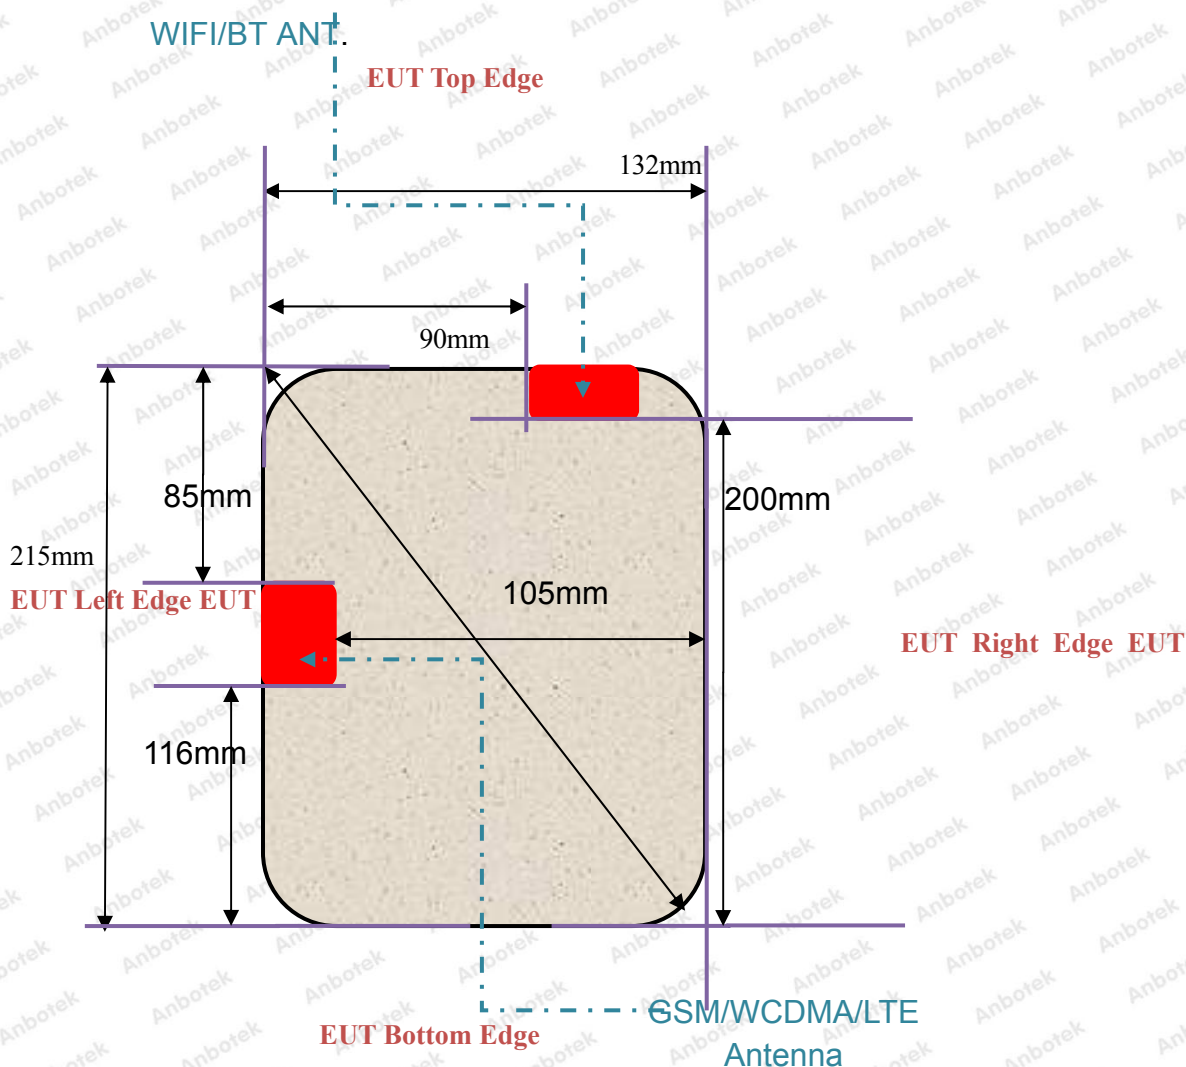

EUT BACK VIEW

Distance of The Antenna to the EUT surface and edge						
Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
BT&WLAN	<25mm	<25mm	<25mm	200mm	90mm	<25mm
WWAN	<25mm	<25mm	85mm	116mm	<25mm	105mm

Positions for SAR tests; Hotspot mode						
Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
BT&WLAN	Yes	Yes	Yes	No	No	Yes
WWAN	Yes	Yes	No	No	Yes	No

General Note: According with FCC KDB 447498 D01, appendix A, <SAR test exclusion thresholds for 100MHz~6GHz and≤50mm> table, this device SAR test configurations considerations are shown in the table above.

Per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.

12.SAR Test Results Summary

General Note:

1.Per KDB 447498 D01v05r01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Reported SAR(W/kg)= Measured SAR(W/kg) Scaling Factor*

2.Per KDB 447498 D01v05r01, for each exposure position, if the highest output channel reported SAR≤0.8W/kg, other channels SAR testing are not necessary

3.Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.

4.Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.

5.Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

6.Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is > not ½ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.

7.Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is > not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.

8.Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/Kg; if the deviation among the repeated measurement is ≤20%,and the measured SAR <1.45W/Kg, only one repeated measurement is required.

9.When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The “Portable Hotspot” feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

12.1. Head SAR Results

<GSM>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
#1	GSM850	GSM Voice	Right Cheek	190	836.6	33.92	34.0	1.002	0.15	0.324	0.325
	GSM850	GSM Voice	Right Tilted	190	836.6	33.92	34.0	1.002	0.08	0.182	0.182
	GSM850	GSM Voice	Left Cheek	190	836.6	33.92	34.0	1.002	-0.10	0.312	0.313
	GSM850	GSM Voice	Left Tilted	190	836.6	33.92	34.0	1.002	0.5	0.177	0.177
#2	GSM1900	GSM Voice	Right Cheek	810	1909.8	30.56	30.6	1.001	0.14	0.234	0.234
	GSM1900	GSM Voice	Right Tilted	810	1909.8	30.56	30.6	1.001	-0.09	0.132	0.132
	GSM1900	GSM Voice	Left Cheek	810	1909.8	30.56	30.6	1.001	0.08	0.225	0.225
	GSM1900	GSM Voice	Left Tilted	810	1909.8	30.56	30.6	1.001	-0.08	0.105	0.105

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

<WCDMA>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
#3	WCDMA Band II	RMC 12.2K	Right Cheek	9400	1880	24.13	24.2	1.003	0.11	0.263	0.264
	WCDMA Band II	RMC 12.2K	Right Tilted	9400	1880	24.13	24.2	1.003	0.06	0.156	0.156
	WCDMA Band II	RMC 12.2K	Left Cheek	9400	1880	24.13	24.2	1.003	0.09	0.248	0.249
	WCDMA Band II	RMC 12.2K	Left Tilted	9400	1880	24.13	24.2	1.003	0.10	0.124	0.124
#4	WCDMA Band V	RMC 12.2K	Right Cheek	4132	824.4	22.92	23.0	1.003	0.09	0.315	0.316
	WCDMA Band V	RMC 12.2K	Right Tilted	4132	824.4	22.92	23.0	1.003	-0.12	0.195	0.196
	WCDMA Band V	RMC 12.2K	Left Cheek	4132	824.4	22.92	23.0	1.003	0.06	0.298	0.299
	WCDMA Band V	RMC 12.2K	Left Tilted	4132	824.4	22.92	23.0	1.003	0.03	0.168	0.169

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

<LTE>

Plo t No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
#5	LTE Band 2	10MHz/1RB	Right Cheek	18900	1880	23.36	23.5	1.006	0.15	0.243	0.244
	LTE Band 2	10MHz/50RB	Right Cheek	18900	1880	23.36	23.5	1.006	-0.06	0.236	0.237
	LTE Band 2	10MHz/1RB	Right Tilted	18900	1880	23.36	23.5	1.006	0.10	0.145	0.146
	LTE Band 2	10MHz/50RB	Right Tilted	18900	1880	23.36	23.5	1.006	0.06	0.137	0.138
	LTE Band 2	10MHz/1RB	Left Cheek	18900	1880	23.36	23.5	1.006	0.08	0.230	0.231
	LTE Band 2	10MHz/50RB	Left Cheek	18900	1880	23.36	23.5	1.006	-0.09	0.224	0.225
	LTE Band 2	10MHz/1RB	Left Tilted	18900	1880	23.36	23.5	1.006	-0.12	0.121	0.122
	LTE Band 2	10MHz/50RB	Left Tilted	18900	1880	23.36	23.5	1.006	0.03	0.116	0.117
#6	LTE Band 4	20MHz/1RB	Right Cheek	20175	1732.5	23.68	23.7	1.001	0.12	0.187	0.187
	LTE Band 4	20MHz/50RB	Right Cheek	20050	1732.5	23.68	23.7	1.001	0.06	0.179	0.179
	LTE Band 4	20MHz/1RB	Right Tilted	20050	1732.5	23.68	23.7	1.001	0.07	0.110	0.110
	LTE Band 4	20MHz/50RB	Right Tilted	20050	1732.5	23.68	23.7	1.001	0.12	0.105	0.105
	LTE Band 4	20MHz/1RB	Left Cheek	20050	1732.5	23.68	23.7	1.001	0.06	0.166	0.166
	LTE Band 4	20MHz/50RB	Left Cheek	20050	1732.5	23.68	23.7	1.001	-0.09	0.160	0.160
	LTE Band 4	20MHz/1RB	Left Tilted	20050	1732.5	23.68	23.7	1.001	-0.12	0.105	0.105
	LTE Band 4	20MHz/50RB	Left Tilted	20050	1732.5	23.68	23.7	1.001	0.03	0.100	0.100
#7	LTE Band 5	10MHz/1RB	Right Cheek	20525	836.5	24.07	24.1	1.001	0.15	0.203	0.203
	LTE Band 5	10MHz/50RB	Right Cheek	20525	836.5	24.07	24.1	1.001	0.07	0.195	0.195
	LTE Band 5	10MHz/1RB	Right Tilted	20525	836.5	24.07	24.1	1.001	0.12	0.115	0.115
	LTE Band 5	10MHz/50RB	Right Tilted	20525	836.5	24.07	24.1	1.001	0.10	0.110	0.110
	LTE Band 5	10MHz/1RB	Left Cheek	20525	836.5	24.07	24.1	1.001	0.10	0.214	0.214
	LTE Band 5	10MHz/50RB	Left Cheek	20525	836.5	24.07	24.1	1.001	0.05	0.211	0.211
	LTE Band 5	10MHz/1RB	Left Tilted	20525	836.5	24.07	24.1	1.001	0.08	0.132	0.132
	LTE Band 5	10MHz/50RB	Left Tilted	20525	836.5	24.07	24.1	1.001	-0.04	0.128	0.128
	LTE Band 7	20MHz/1RB	Right Cheek	21100	2535	23.26	23.3	1.002	0.16	0.118	0.118
	LTE Band 7	20MHz/50RB	Right Cheek	21100	2535	23.26	23.3	1.002	-0.15	0.115	0.115
	LTE Band 7	20MHz/1RB	Right Tilted	21100	2535	23.26	23.3	1.002	0.09	0.073	0.073
	LTE Band 7	20MHz/50RB	Right Tilted	21100	2535	23.26	23.3	1.002	0.11	0.067	0.067
#8	LTE Band 7	20MHz/1RB	Left Cheek	21100	2535	23.26	23.3	1.002	0.08	0.124	0.124
	LTE Band 7	20MHz/50RB	Left Cheek	21100	2535	23.26	23.3	1.002	0.09	0.112	0.112
	LTE Band 7	20MHz/1RB	Left Tilted	21100	2535	23.26	23.3	1.002	-0.11	0.068	0.068
	LTE Band 7	20MHz/50RB	Left Tilted	21100	2535	23.26	23.3	1.002	0.08	0.065	0.065

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

<WIFI 2.4GHz>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
#9	WIFI2.4GHz	802.11b	Right Cheek	11	2462	17.43	17.5	1.004	-0.09	0.211	0.212
	WIFI2.4GHz	802.11b	Right Tilted	11	2462	17.43	17.5	1.004	0.06	0.087	0.087
	WIFI2.4GHz	802.11b	Left Cheek	11	2462	17.43	17.5	1.004	0.07	0.096	0.096
	WIFI2.4GHz	802.11b	Left Tilted	11	2462	17.43	17.5	1.004	0.10	0.075	0.075
#10	WIFI5.2GHz	802.11a	Right Cheek	48	5240	8.97	9	1.003	-0.09	0.111	0.111
	WIFI5.2GHz	802.11a	Right Tilted	48	5240	8.97	9	1.003	0.07	0.072	0.072
	WIFI5.2GHz	802.11a	Left Cheek	48	5240	8.97	9	1.003	0.13	0.0100	0.010
	WIFI5.2GHz	802.11a	Left Tilted	48	5240	8.97	9	1.003	0.12	0.068	0.068
#11	WIFI5.8GHz	802.11a	Right Cheek	149	5745	9.36	9.4	1.004	-0.08	0.102	0.102
	WIFI5.8GHz	802.11a	Right Tilted	149	5745	9.36	9.4	1.004	0.06	0.055	0.055
	WIFI5.8GHz	802.11a	Left Cheek	149	5745	9.36	9.4	1.004	0.07	0.095	0.095
	WIFI5.8GHz	802.11a	Left Tilted	149	5745	9.36	9.4	1.004	0.10	0.048	0.048

12.2. Body –worn and Hotspot SAR Results

<GSM>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
	GSM850	GPRS(4 Tx slots)	Front	0	190	836.6	27.19	27.2	1.000	0.08	0.417	0.417
#12	GSM850	GPRS(4 Tx slots)	Back	0	190	836.6	27.19	27.2	1.000	0.12	0.785	0.785
	GSM850	GPRS(4 Tx slots)	Left Side	0	190	836.6	27.19	27.2	1.000	0.07	0.214	0.214
	GSM850	GPRS(4 Tx slots)	Right Side	0	190	836.6	N/A	N/A	N/A	N/A	N/A	N/A
	GSM850	GPRS(4 Tx slots)	Top Side	0	128	824.2	N/A	N/A	N/A	N/A	N/A	N/A
	GSM850	GPRS(4 Tx slots)	Bottom Side	0	190	836.6	N/A	N/A	N/A	N/A	N/A	N/A
	GSM1900	GPRS(4 Tx slots)	Front	0	512	1850.2	25.68	25.7	1.001	0.07	0.432	0.432
#13	GSM1900	GPRS(4 Tx slots)	Back	0	512	1850.2	25.68	25.7	1.001	0.11	0.712	0.713
	GSM1900	GPRS(4 Tx slots)	Left Side	0	512	1850.2	25.68	25.7	1.001	0.10	0.189	0.189
	GSM1900	GPRS(4 Tx slots)	Right Side	0	512	1850.2	N/A	N/A	N/A	N/A	N/A	N/A
	GSM1900	GPRS(4 Tx slots)	Top Side	0	512	1850.2	N/A	N/A	N/A	N/A	N/A	N/A
	GSM1900	GPRS(4 Tx slots)	Bottom Side	0	512	1850.2	N/A	N/A	N/A	N/A	N/A	N/A

<WCDMA>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
	WCDMA Band II	RMC 12.2K	Front	0	9400	1880	24.13	24.2	1.003	-0.12	0.287	0.288
#14	WCDMA Band II	RMC 12.2K	Back	0	9400	1880	24.13	24.2	1.003	-0.10	0.462	0.463
	WCDMA Band II	RMC 12.2K	Left Side	0	9400	1880	24.13	24.2	1.003	0.08	0.145	0.145
	WCDMA Band II	RMC 12.2K	Right Side	0	9400	1880	N/A	N/A	N/A	N/A	N/A	N/A
	WCDMA Band II	RMC 12.2K	Top Side	0	9400	1880	N/A	N/A	N/A	N/A	N/A	N/A
	WCDMA Band II	RMC 12.2K	Bottom Side	0	9400	1880	N/A	N/A	N/A	N/A	N/A	N/A
	WCDMA Band V	RMC 12.2K	Front	0	4132	824.4	22.92	23.0	1.003	0.17	0.363	0.364
#15	WCDMA Band V	RMC 12.2K	Back	0	4132	824.4	22.92	23.0	1.003	-0.13	0.635	0.637
	WCDMA Band V	RMC 12.2K	Left Side	0	4132	824.4	22.92	23.0	1.003	0.08	0.182	0.183
	WCDMA Band V	RMC 12.2K	Right Side	0	4132	824.4	N/A	N/A	N/A	N/A	N/A	N/A
	WCDMA Band V	RMC 12.2K	Top Side	0	4132	824.4	N/A	N/A	N/A	N/A	N/A	N/A
	WCDMA Band V	RMC 12.2K	Bottom Side	0	4132	824.4	N/A	N/A	N/A	N/A	N/A	N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

<LTE>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
	LTE Band 2	20MHz/1RB	Front	0	18900	1890	24.43	24.5	1.003	0.10	0.265	0.266
	LTE Band 2	20MHz/50RB	Front	0	18900	1890	24.43	24.5	1.003	0.08	0.261	0.262
#16	LTE Band 2	20MHz/1RB	Back	0	18900	1890	24.43	24.5	1.003	0.14	0.521	0.522
	LTE Band 2	20MHz/50RB	Back	0	18900	1890	24.43	24.5	1.003	0.06	0.516	0.517
	LTE Band 2	20MHz/1RB	Left Side	0	18900	1890	24.43	24.5	1.003	0.11	0.121	0.121
	LTE Band 2	20MHz/50RB	Left Side	0	18900	1890	24.43	24.5	1.003	0.06	0.116	0.116
	LTE Band 2	20MHz/1RB	Right Side	0	18900	1890	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 2	20MHz/50RB	Right Side	0	18900	1890	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 2	20MHz/1RB	Top Side	0	18900	1890	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 2	20MHz/50RB	Top Side	0	18900	1890	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 2	20MHz/1RB	Bottom Side	0	18900	1890	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 2	20MHz/50RB	Bottom Side	0	18900	1890	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 4	20MHz/1RB	Front	0	20175	1732.5	23.68	23.7	1.001	0.16	0.346	0.346
	LTE Band 4	20MHz/50RB	Front	0	20175	1732.5	23.68	23.7	1.001	0.11	0.338	0.338
#17	LTE Band 4	20MHz/1RB	Back	0	20175	1732.5	23.68	23.7	1.001	-0.09	0.510	0.510
	LTE Band 4	20MHz/50RB	Back	0	20175	1732.5	23.68	23.7	1.001	0.10	0.502	0.502
	LTE Band 4	20MHz/1RB	Left Side	0	20175	1732.5	23.68	23.7	1.001	0.09	0.225	0.225
	LTE Band 4	20MHz/50RB	Left Side	0	20175	1732.5	23.68	23.7	1.001	0.10	0.216	0.216
	LTE Band 4	20MHz/1RB	Right Side	0	20175	1732.5	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 4	20MHz/50RB	Right Side	0	20175	1732.5	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 4	20MHz/1RB	Top Side	0	20175	1732.5	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 4	20MHz/50RB	Top Side	0	20175	1732.5	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 4	20MHz/1RB	Bottom Side	0	20175	1732.5	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 4	20MHz/50RB	Bottom Side	0	20175	1732.5	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 5	10MHz/1RB	Front	0	20525	836.5	24.07	24.1	1.001	0.08	0.295	0.295
	LTE Band 5	10MHz/50RB	Front	0	20525	836.5	24.07	24.1	1.001	0.15	0.287	0.287
#18	LTE Band 5	10MHz/1RB	Back	0	20525	836.5	24.07	24.1	1.001	0.08	0.586	0.587
	LTE Band 5	10MHz/50RB	Back	0	20525	836.5	24.07	24.1	1.001	0.10	0.562	0.563

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

	LTE Band 5	10MHz/1RB	Left Side	0	20525	836.5	24.07	24.1	1.001	0.08	0.212	0.212
	LTE Band 5	10MHz/50RB	Left Side	0	20525	836.5	24.07	24.1	1.001	0.12	0.203	0.203
	LTE Band 5	10MHz/1RB	Right Side	0	20525	836.5	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 5	10MHz/50RB	Right Side	0	20525	836.5	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 5	10MHz/1RB	Top Side	0	20525	836.5	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 5	10MHz/50RB	Top Side	0	20525	836.5	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 5	10MHz/1RB	Bottom Side	0	20525	836.5	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 5	10MHz/50RB	Bottom Side	0	20525	836.5	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 7	20MHz/1RB	Front	0	21100	2535	23.26	23.3	1.002	0.05	0.257	0.257
	LTE Band 7	20MHz/50RB	Front	0	21100	2535	23.26	23.3	1.002	0.08	0.251	0.251
#19	LTE Band 7	20MHz/1RB	Back	0	21100	2535	23.26	23.3	1.002	0.03	0.412	0.413
	LTE Band 7	20MHz/50RB	Back	0	21100	2535	23.26	23.3	1.002	0.05	0.405	0.406
	LTE Band 7	20MHz/1RB	Left Side	0	21100	2535	23.26	23.3	1.002	0.07	0.169	0.169
	LTE Band 7	20MHz/50RB	Left Side	0	21100	2535	23.26	23.3	1.002	0.12	0.155	0.155
	LTE Band 7	20MHz/1RB	Right Side	0	21100	2535	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 7	20MHz/50RB	Right Side	0	21100	2535	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 7	20MHz/1RB	Top Side	0	21100	2535	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 7	20MHz/50RB	Top Side	0	21100	2535	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 7	20MHz/1RB	Bottom Side	0	21100	2535	N/A	N/A	N/A	N/A	N/A	N/A
	LTE Band 7	20MHz/50RB	Bottom Side	0	21100	2535	N/A	N/A	N/A	N/A	N/A	N/A

<WIFI 2.4GHz>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
	WIFI2.4GHz	802.11b	Front	0	11	2462	17.43	17.5	1.004	0.07	0.103	0.103
#20	WIFI2.4GHz	802.11b	Back	0	11	2462	17.43	17.5	1.004	-0.08	0.194	0.195
	WIFI2.4GHz	802.11b	Left Side	0	11	2462	N/A	N/A	N/A	N/A	N/A	N/A
	WIFI2.4GHz	802.11b	Right Side	0	11	2462	17.43	17.5	1.004	0.08	0.064	0.064
	WIFI2.4GHz	802.11b	Top Side	0	11	2462	17.43	17.5	1.004	0.11	0.081	0.081
	WIFI2.4GHz	802.11b	Bottom Side	0	11	2462	N/A	N/A	N/A	N/A	N/A	N/A
	WIFI5.2GHz	802.11a	Front	0	48	5240	8.97	9	1.003	0.07	0.093	0.093
#21	WIFI5.2GHz	802.11a	Back	0	48	5240	8.97	9	1.003	0.06	0.125	0.125
	WIFI5.2GHz	802.11a	Left Side	0	48	5240	N/A	N/A	N/A	N/A	N/A	N/A
	WIFI5.2GHz	802.11a	Right Side	0	48	5240	8.97	9	1.003	0.05	0.052	0.052
	WIFI5.2GHz	802.11a	Top Side	0	48	5240	8.97	9	1.003	0.11	0.070	0.070
	WIFI5.2GHz	802.11a	Bottom Side	0	48	5240	N/A	N/A	N/A	N/A	N/A	N/A
	WIFI5.8GHz	802.11a	Front	0	149	5745	9.36	9.4	1.004	0.08	0.091	0.091
#22	WIFI5.8GHz	802.11a	Back	0	149	5745	9.36	9.4	1.004	0.12	0.141	0.142
	WIFI5.8GHz	802.11a	Left Side	0	149	5745	N/A	N/A	N/A	N/A	N/A	N/A
	WIFI5.8GHz	802.11a	Right Side	0	149	5745	9.36	9.4	1.004	0.06	0.072	0.072
	WIFI5.8GHz	802.11a	Top Side	0	149	5745	9.36	9.4	1.004	0.10	0.080	0.080
	WIFI5.8GHz	802.11a	Bottom Side	0	149	5745	N/A	N/A	N/A	N/A	N/A	N/A

Note:

1. Per KDB 865664 D01V01,for each frequency band ,repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/Kg}$.
2. Per KDB 865664 D01V01,if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/Kg}$, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45\text{W/Kg}$
4. The ratio is the difference in percentage between original and repeated measured SAR.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

13. Simultaneous Transmission Analysis

Simultaneous TX SAR Considerations

No.	Applicable Simultaneous Transmission
1.	GSM+WIFI 2.4G
2.	LTE+WIFI 2.4G
3.	GSM+BT
4.	LTE+BT
5.	GSM+WIFI 5.2G
6.	LTE+WIFI 5.2G
7.	GSM+WIFI 5.8G
8.	LTE+WIFI 5.8G

Note:

1. WIFI 2.4GHz, WIFI 5GHz and Bluetooth share the same antenna, and can not transmit simultaneously.
2. EUT will choose either GSM/ LTE according to the network signal condition; therefore, GSM/ LTE cannot transmit simultaneously.

Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05r02, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05r02 4.3.2.2), the following equation must be used to estimate the standalone 1g SAR and 10g extremity SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5(18.75)} \cdot \frac{\text{Max. power of channel, mW}}{\text{Min. Separation Distance, mm}}$$

Mode	Max. tune-up Power (dBm)	Exposure Position	Head	Body -worn
		Test Distance (mm)	5	5
BT	8	Estimated SAR (W/kg)	0.265	0.265

Note:

1. When the minimum test separation distance is < 5 mm, a distance of 5 mm according is applied to determine estimated SAR.
2. $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$ W/kg for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

Next to the mouth exposure requires 1-g SAR, and the wrist-worn condition requires 10-g extremity SAR.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

Evaluation of Simultaneous SAR

<GSM>

Test Position	WiFi SAR _{1-g} (W/Kg)	GSM 850 1-g (W/Kg)	PCS 1900 1-g (W/Kg)	BT SAR _{1-g} (W/Kg)	MAX. Σ SAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Simut. Meas. Required
Right Cheek	0.212	0.325	0.234	0.265	0.590	1.6	N/A
Right Tilted	0.087	0.182	0.132	0.265	0.447	1.6	N/A
Left Cheek	0.096	0.313	0.225	0.265	0.578	1.6	N/A
Left Tilted	0.075	0.177	0.105	0.265	0.442	1.6	N/A
Front	0.103	0.417	0.432	0.265	0.682	1.6	N/A
Back	0.195	0.785	0.713	0.265	1.050	1.6	N/A
Left Side	N/A	0.214	0.189	0.265	0.479	1.6	N/A
Right Side	0.064	N/A	N/A	0.265	N/A	1.6	N/A
Top side	0.081	N/A	N/A	0.265	N/A	1.6	N/A
Bottom Side	N/A	N/A	N/A	0.265	N/A	1.6	N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

<WCDMA>

Test Position	WiFi SAR _{1-g} (W/Kg)	WCDMA Band 2 1-g (W/Kg)	WCDMA Band 5 1-g (W/Kg)	BT SAR _{1-g} (W/Kg)	MAX. ΣSAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Simut. Meas. Required
Right Cheek	0.212	0.264	0.316	0.265	0.581	1.6	N/A
Right Tilted	0.087	0.156	0.196	0.265	0.461	1.6	N/A
Left Cheek	0.096	0.249	0.299	0.265	0.564	1.6	N/A
Left Tilted	0.075	0.124	0.169	0.265	0.434	1.6	N/A
Front	0.103	0.288	0.364	0.265	0.629	1.6	N/A
Back	0.195	0.463	0.637	0.265	0.902	1.6	N/A
Left Side	N/A	0.145	0.183	0.265	0.448	1.6	N/A
Right Side	0.064	N/A	N/A	0.265	N/A	1.6	N/A
Top side	0.081	N/A	N/A	0.265	N/A	1.6	N/A
Bottom Side	N/A	N/A	N/A	0.265	N/A	1.6	N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

<LTE>

Test Position	WiFi SAR _{1-g} (W/Kg)	LTE BAND 2 _{1-g} (W/Kg)	LTE BAND 4 _{1-g} (W/Kg)	LTE BAND 5 _{1-g} (W/Kg)	LTE BAND 7 _{1-g} (W/Kg)	BT SAR _{1-g} (W/Kg)	MAX. ΣSAR _{1-g} (W/Kg)	SAR _{1-g} Limit (W/Kg)	Simut. Meas. Required
Right Cheek	0.212	0.244	0.187	0.203	0.118	0.265	0.509	1.6	N/A
Right Tilted	0.087	0.146	0.110	0.115	0.073	0.265	0.411	1.6	N/A
Left Cheek	0.096	0.231	0.166	0.214	0.124	0.265	0.496	1.6	N/A
Left Tilted	0.075	0.122	0.105	0.132	0.068	0.265	0.387	1.6	N/A
Front	0.103	0.266	0.346	0.295	0.257	0.265	0.629	1.6	N/A
Back	0.195	0.522	0.510	0.587	0.413	0.265	0.852	1.6	N/A
Left Side	N/A	0.121	0.225	0.212	0.169	0.265	0.477	1.6	N/A
Right Side	0.064	N/A	N/A	N/A	N/A	0.265	N/A	1.6	N/A
Top side	0.081	N/A	N/A	N/A	N/A	0.265	N/A	1.6	N/A
Bottom Side	N/A	N/A	N/A	N/A	N/A	0.265	N/A	1.6	N/A

14.Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/Kg, the extensive SAR measurement uncertainty analysis is not required in SAR reports submitted for equipment approval.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

Appendix A. EUT Photos and Test Setup Photos

**Right Check****Right Tilt 15°****Left Check****Left Tilt 15°****Front with Phantom 0 mm****Back with Phantom 0 mm****Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com



Top(0mm)



Left(0mm)



Right(0mm)

Appendix B. Plots of SAR System Check

System Performance Check at 835 MHz Body

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d154

Date: 03/07/2022

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.04$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(9.88, 9.88, 9.88); Calibrated: 05.06.2021;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Area Scan (61x91x1): Measurement grid: $dx=15.00$ mm, $dy=15.00$ mm

Maximum value of SAR (interpolated) = 2.892 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 50.236 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.251 W/kg

SAR(1 g) = 2.34 W/kg; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (measured) = 2.879 W/kg

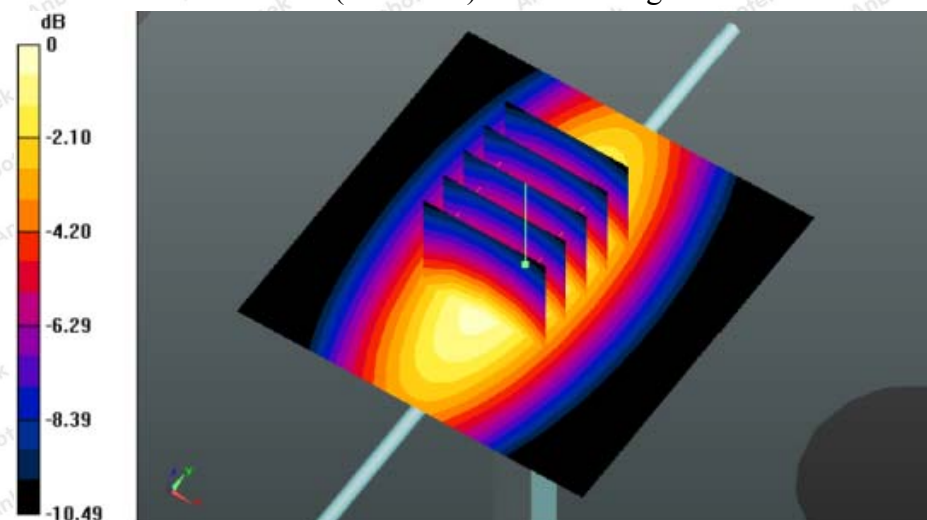

System Performance Check 835MHz Body 250mW

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

1750MHz Head System Check**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2**

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1750$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 53.12$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(8.61, 8.61, 8.61); Calibrated: 05.06.2021;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM 1 ; Type: QD 000 P40 CD; Serial: TP - 1802
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.1 W/kg


Configuration/Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 92.55 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 16.828 W/kg

SAR(1 g) = 9.72 W/kg; SAR(10 g) = 5.08 W/kg

Maximum value of SAR (measured) = 12.0 W/kg

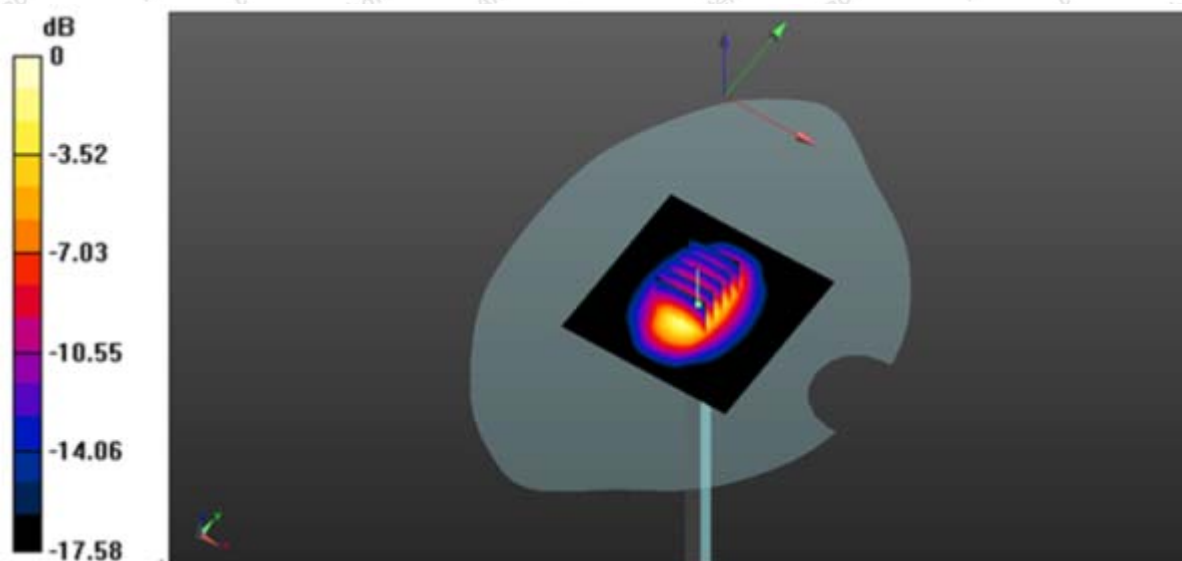**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

System Performance Check at 1900 MHz Body

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d175

Date: 03/09/2022

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.50$ S/m; $\epsilon_r = 53.83$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7396; ConvF(7.97, 7.97, 7.97); Calibrated: 05.06.2021;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn387; Calibrated: Sep.06.2021

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Area Scan (61x91x1): Measurement grid: $dx=15.00$ mm, $dy=15.00$ mm

Maximum value of SAR (interpolated) = 16.365 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 87.414 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 19.622 W/kg

SAR(1 g) = 10.14 W/kg; SAR(10 g) = 5.72 W/kg

Maximum value of SAR (measured) = 15.11 W/kg

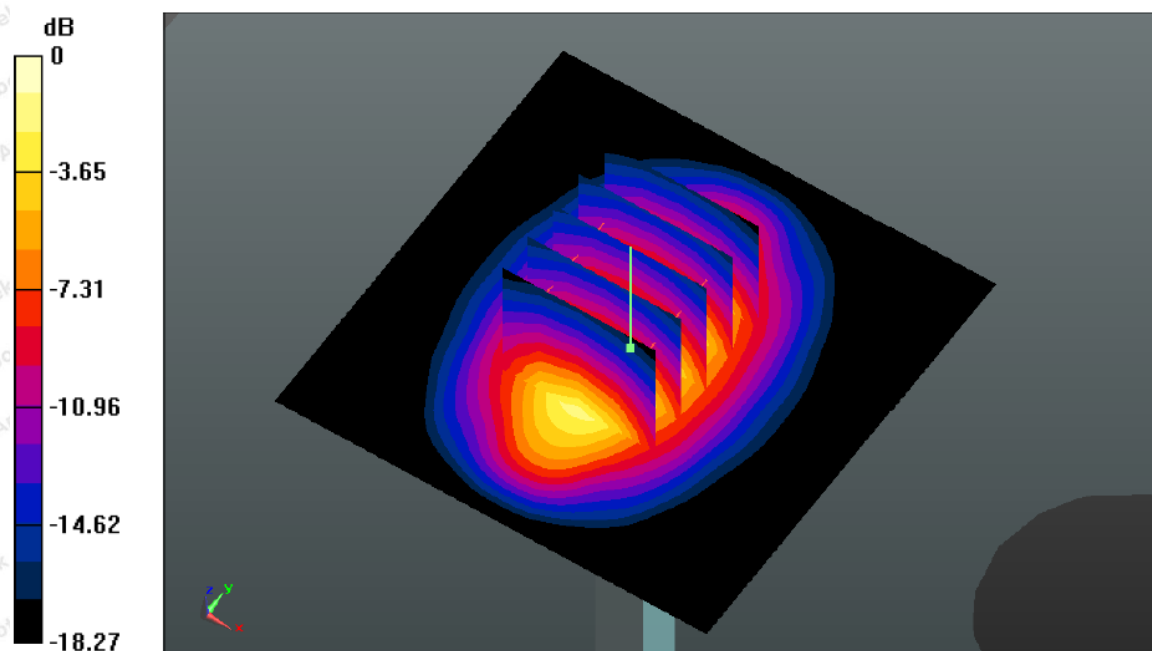

System Performance Check 1900MHz Body250mW

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

System Performance Check at 2450 MHz Body

Date:03/10/2022

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 910

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7396; ConvF(7.53, 7.53, 7.53); Calibrated: 05,06.2021;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn387; Calibrated: Sep.06.2021

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Area Scan (61x91x1):Measurement grid: dx=10.00 mm, dy=10.00 mm

Maximum value of SAR (interpolated) = 19.225 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.153 V/m; Power Drift = 0.05dB

Peak SAR (extrapolated) = 26.125 W/kg

SAR(1 g) = 12.94 W/kg; SAR(10 g) = 5.02 W/kg

Maximum value of SAR (measured) = 19.18W/kg

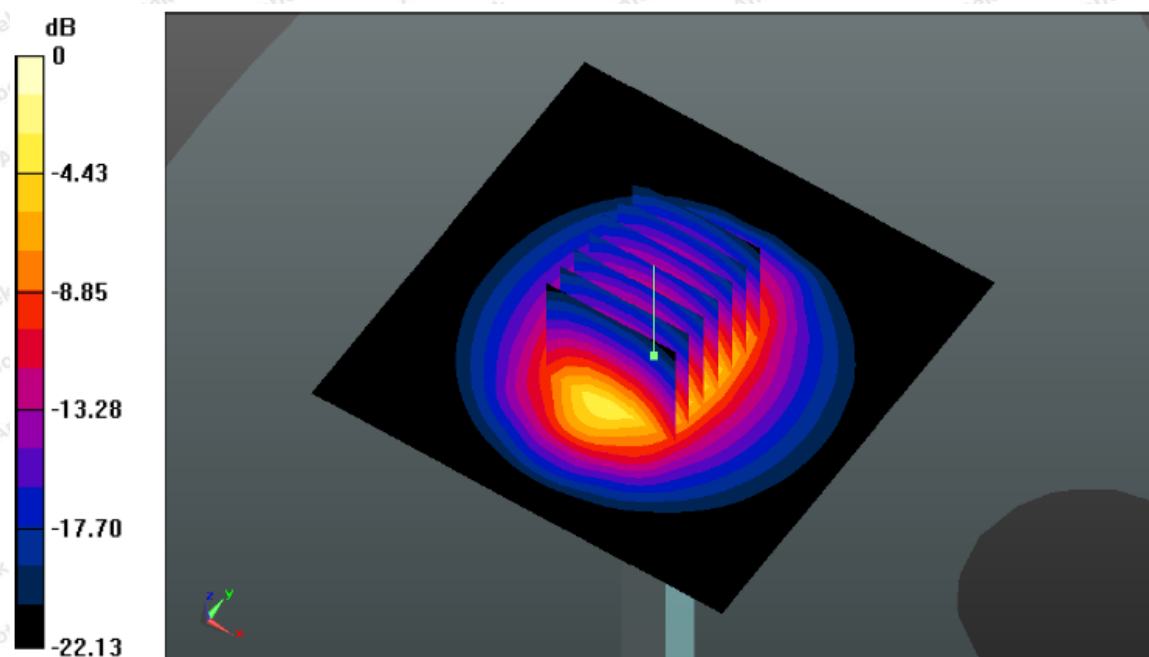

System Performance Check 2450MHz Body250mW

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

2600MHz Head System Check at Body**DUT: Dipole 2600 MHz; Type: D2600V2;**

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2600$ MHz; $\sigma = 2.23$ S/m; $\epsilon_r = 52.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7396; ConvF(7.38, 7.38, 7.38); Calibrated: 05.06.2021;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Configuration/Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 24.8 W/kg



Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 110.2 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 33.1 W/kg

SAR(1 g) = 13.95 W/kg; SAR(10 g) = 6.47 W/kg

Maximum value of SAR (measured) = 25.6 W/kg

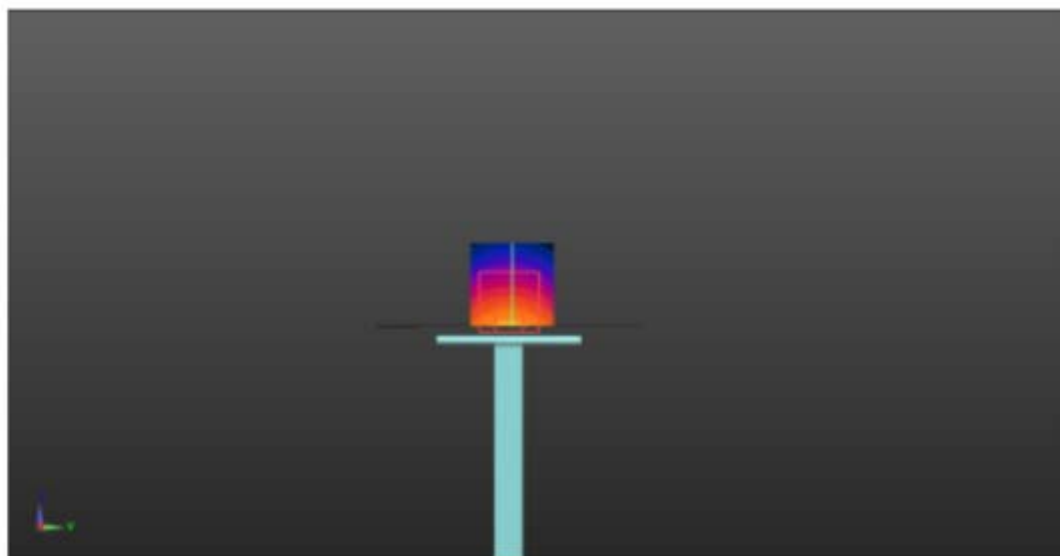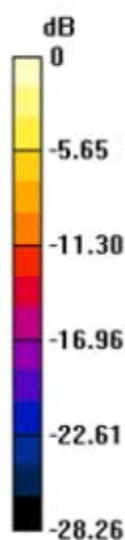

5200MHz System Check**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1160**

Communication System: UID 0, CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 6.14 \text{ S/m}$; $\epsilon_r = 46.74$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7396; ConvF(4.93, 4.93, 4.93); Calibrated: 05.06.2021;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: 09.06.2021
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 49.124 V/m; Power Drift = 0.07 dB



Peak SAR (extrapolated) = 31.8 W/kg

SAR(1 g) = 7.89 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 19.4 W/kg

Configuration/Pin=100mW/Area Scan (71x71x1):Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 18.9 W/kg

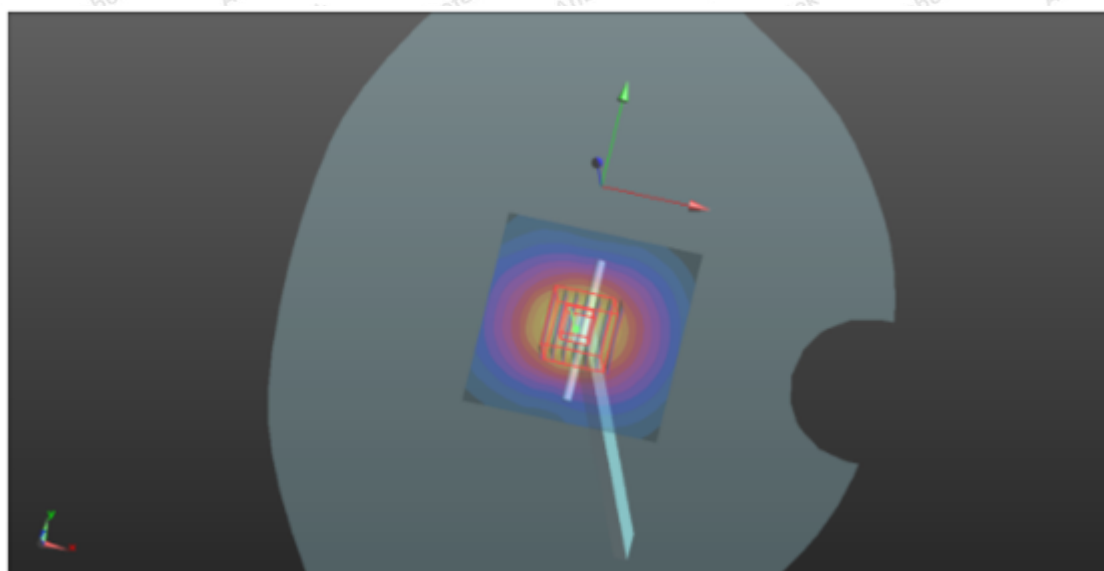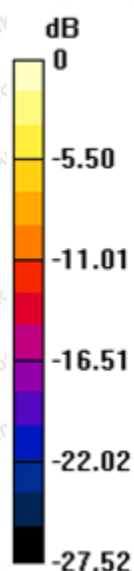

Appendix C. Plots of SAR Test Data

#1

Date: 03/07/2022

GSM850_GSM Voice_Right Cheek_Ch190

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:1.99986

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.04$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(9.71, 9.71, 9.71); Calibrated: 05.06.2021;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Right HEAD/L-C/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.341 W/kg



Right HEAD/L-C/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.93 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.333 W/kg

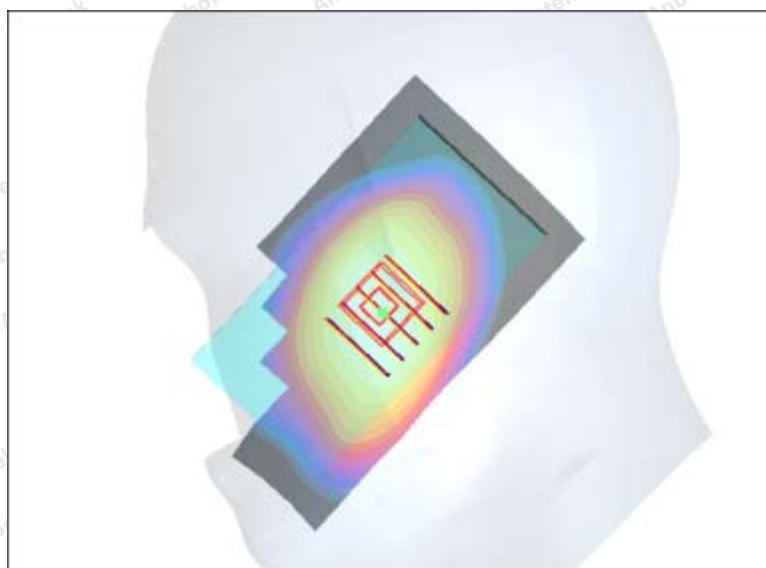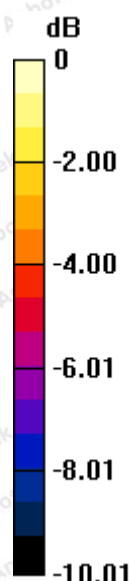

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

#2

Date: 03/09/2022

GSM1900_GSM Voice_Right Cheek_Ch810



Communication System: UID 0, Generic GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1:1.99986

Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.50 \text{ S/m}$; $\epsilon_r = 53.83$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(8.13, 8.13, 8.13); Calibrated: 05.06.2021;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

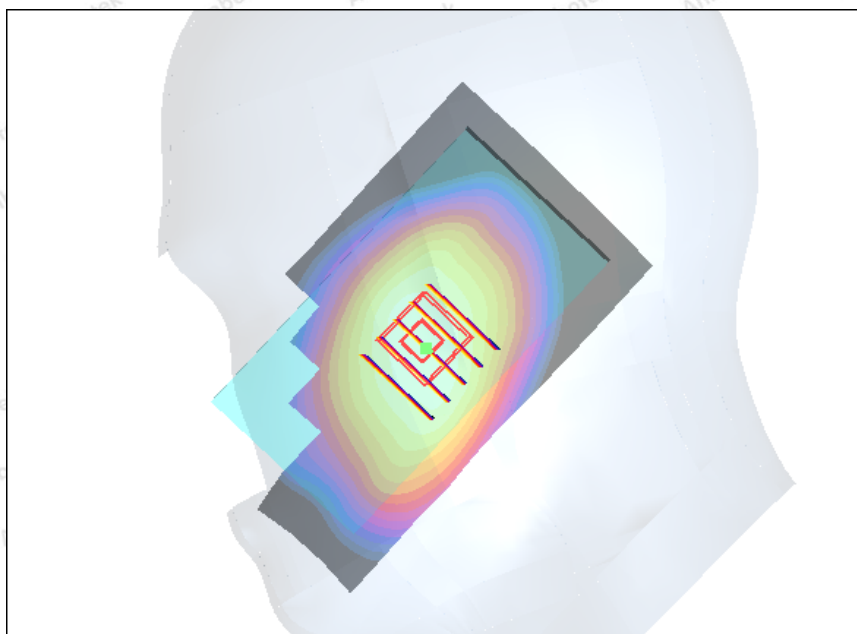Right HEAD/L-C/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.275 W/kg **Right HEAD/L-C/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 17.62 V/m ; Power Drift = 0.14 dB Peak SAR (extrapolated) = 0.271 W/kg **SAR(1 g) = 0.234 W/kg ; SAR(10 g) = 0.165 W/kg** Maximum value of SAR (measured) = 0.246 W/kg **Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

#3

Date: 03/09/2022

WCDMA1900_RMC_RIGHT Cheek_Ch9400

Communication System: UID 0, Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 53.28$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(8.13, 8.13, 8.13); Calibrated: 05.06.2021;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

RIGHT HEAD/L-C/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.283 W/kg



RIGHT HEAD/L-C/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.85 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.27 W/kg

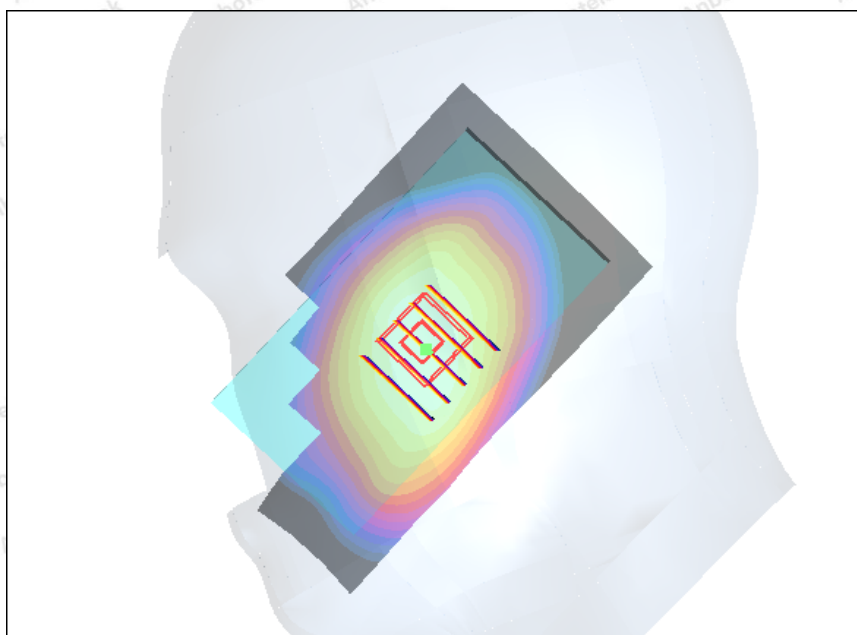**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
400-003-0500
www.anbotek.com

#4

Date: 03/07/2022

WCDMA850_RMC_RIGHT Cheek_Ch4131

Communication System: UID 0, Generic WCDMA (0); Frequency: 824.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 824.4$ MHz; $\sigma = 1.06$ S/m; $\epsilon_r = 55.57$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(9.71, 9.71, 9.71); Calibrated: 05.06.2021;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

RIGHT HEAD/L-C/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.332 W/kg



RIGHT HEAD/L-C/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.74 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.331 W/kg

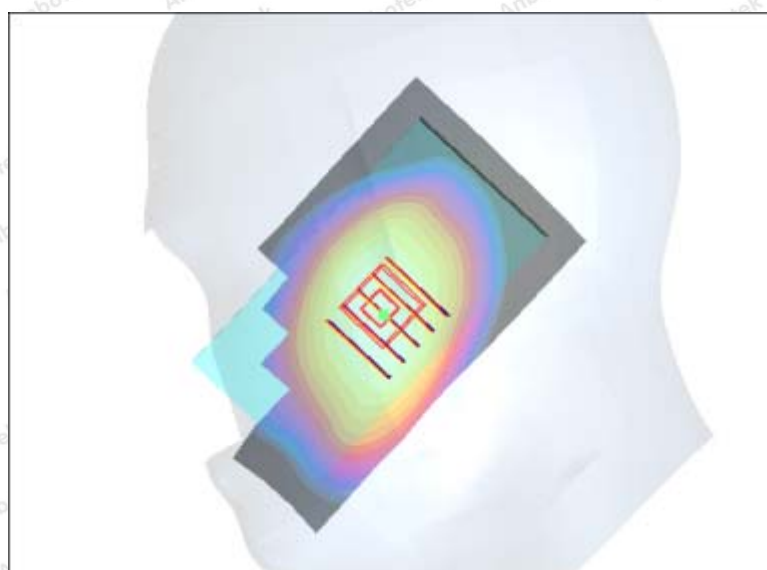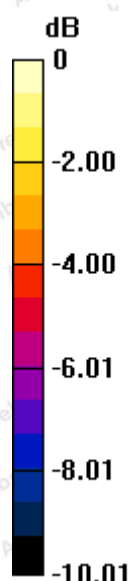

#5

Date: 03/09/2022

LTE Band2__Right Cheek_Ch18900

Communication System: UID 0, Generic GSM (0); Frequency: 1880.0 MHz; Duty Cycle: 1:1.99986

Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.50$ S/m; $\epsilon_r = 53.83$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(8.13, 8.13, 8.13); Calibrated: 05.06.2021;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Right HEAD/L-C/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.268 W/kg



Right HEAD/L-C/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.65 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.247 W/kg

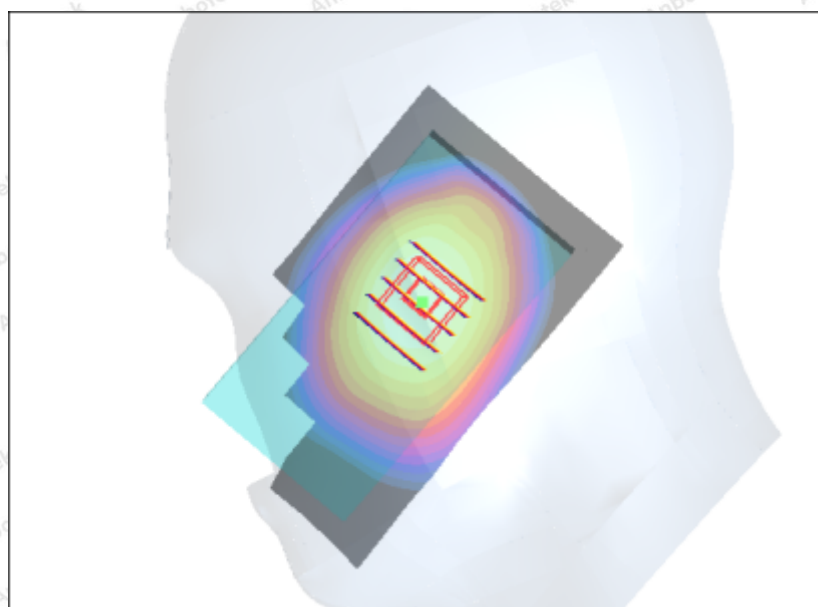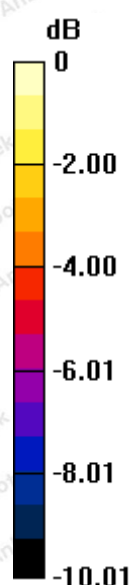

#6

Date: 03/09/2022

LTE Band4__Right Cheek_Ch20175



Communication System: UID 0, Generic GSM (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1.99986

Medium parameters used: $f = 1732.5 \text{ MHz}$; $\sigma = 1.46 \text{ S/m}$; $\epsilon_r = 53.12$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(8.13, 8.13, 8.13); Calibrated: 05.06.2021;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

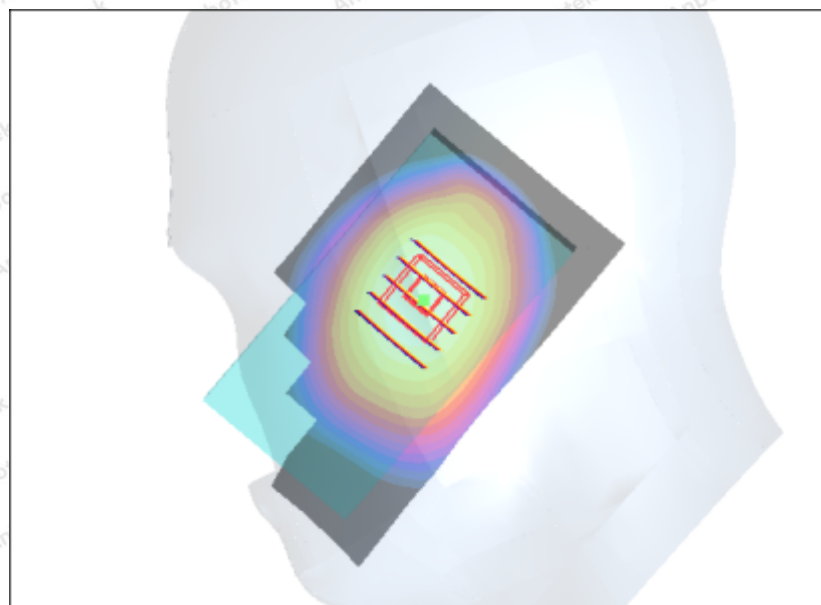Right HEAD/L-C/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.205 W/kg **Right HEAD/L-C/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 18.63 V/m ; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.199 W/kg **SAR(1 g) = 0.187 W/kg ; SAR(10 g) = 0.121 W/kg** Maximum value of SAR (measured) = 0.193 W/kg **Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
400-003-0500
www.anbotek.com

#7

Date: 03/07/2022

LTE Band 5_Left Cheek_Ch20525

Communication System: UID 0, Generic LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.04$; $\rho = 1000$ kg/m³

Phantom section: left Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7396; ConvF(9.87, 9.87, 9.87); Calibrated: 05.06.2021;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM; Type: QD000P40CD; Serial: TP.1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Area Scan (7x11x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.236 W/kg



Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.71 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.236 W/kg

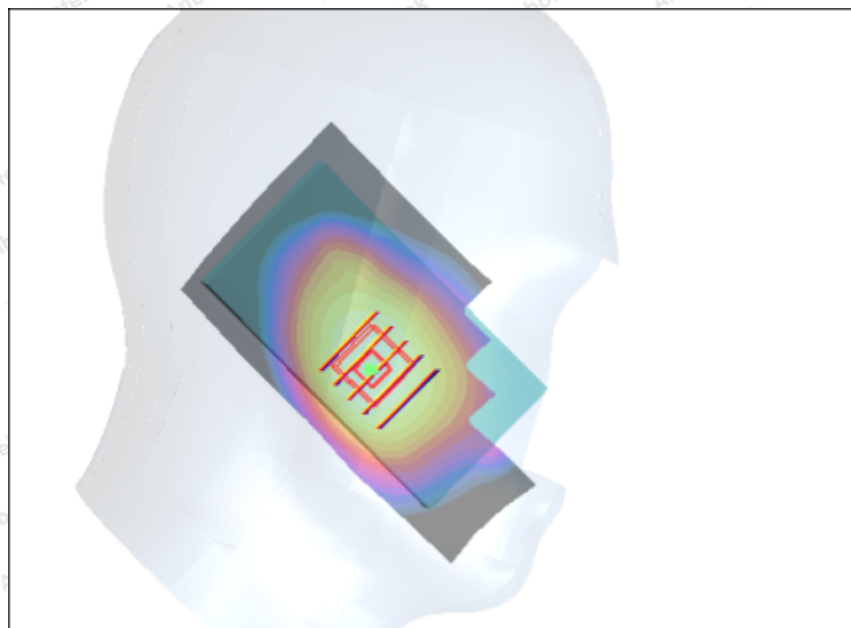**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

#8

Date: 03/11/2022

LTE Band 7_Left Cheek_Ch21100

Communication System: UID 0, Generic LTE (0); Frequency: 2535MHz;

Medium parameters used (interpolated): $f=2535$ MHz; $\sigma=2.23$ S/m; $\epsilon_r=52.46$; $\rho=1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7396; ConvF(7.38, 7.38, 7.38); Calibrated: 05.06.2021;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM; Type: QD000P40CD; Serial: TP.1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

Area Scan (8x13x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.145 W/kg



Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.32 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.136 W/kg

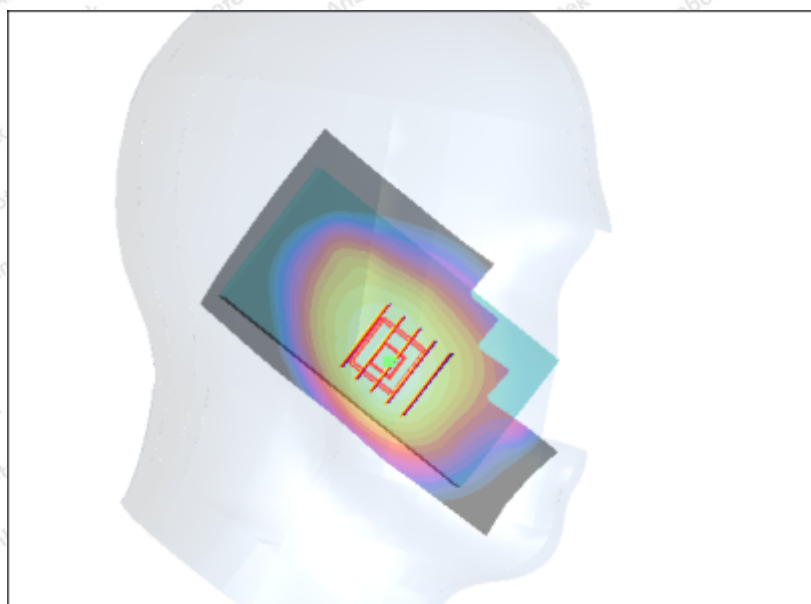**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

#9

Date: 03/10/2022

WIFI 2.4G_802.11b_RIGHTCheek_Ch11

Communication System: UID 0, wifi (0); Frequency: 2462MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2462\text{MHz}$; $\sigma = 1.97\text{ S/m}$; $\epsilon_r = 53.1$; $\rho = 1000\text{ kg/m}^3$

Phantom section: LEFT Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(7.57, 7.57, 7.57); Calibrated: 05.06.2021;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

RIGHTHEAD/L-C/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7\text{mm}$, $dy=7\text{mm}$, $dz=5\text{mm}$

Maximum value of SAR (measured) = 0.222 W/kg


RIGHTHEAD/L-C/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7\text{mm}$, $dy=7\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.65 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.220 W/kg

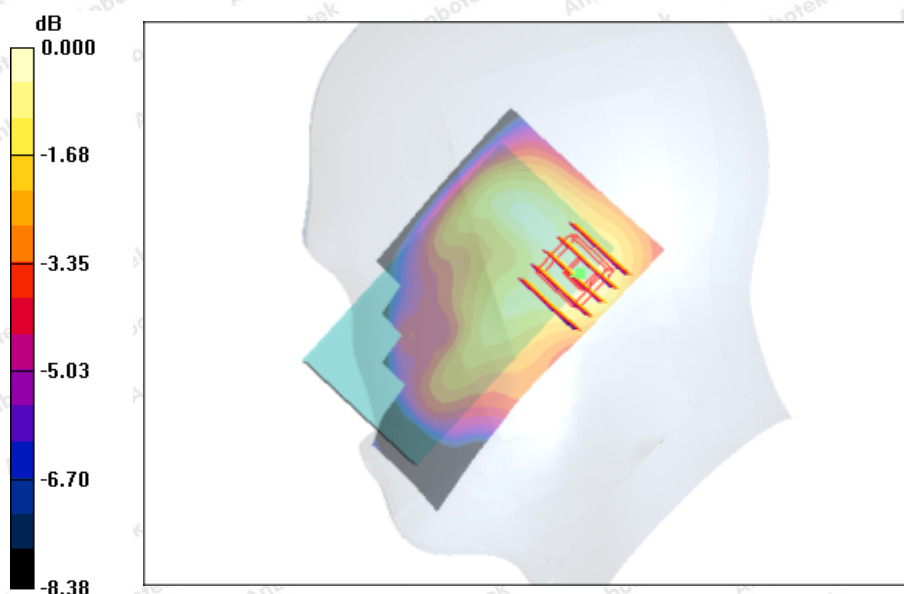**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
400-003-0500
www.anbotek.com

#10

Date: 03/12/2022

WIFI 5.2G ANT.2_ Right Cheek _5240MHz

Communication System: UID 0, wifi (0); Frequency: 5240MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f=5240\text{MHz}$; $\sigma=6.14\text{ S/m}$; $\epsilon_r=46.74$; $\rho=1000\text{ kg/m}^3$

Phantom section: LEFT Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(4.93, 4.93, 4.93); Calibrated: 05.06.2021;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

RIGHTHEAD/L-C/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7\text{mm}$, $dy=7\text{mm}$, $dz=5\text{mm}$

Maximum value of SAR (measured) = 0.122 W/kg


RIGHTHEAD/L-C/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7\text{mm}$, $dy=7\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.65 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

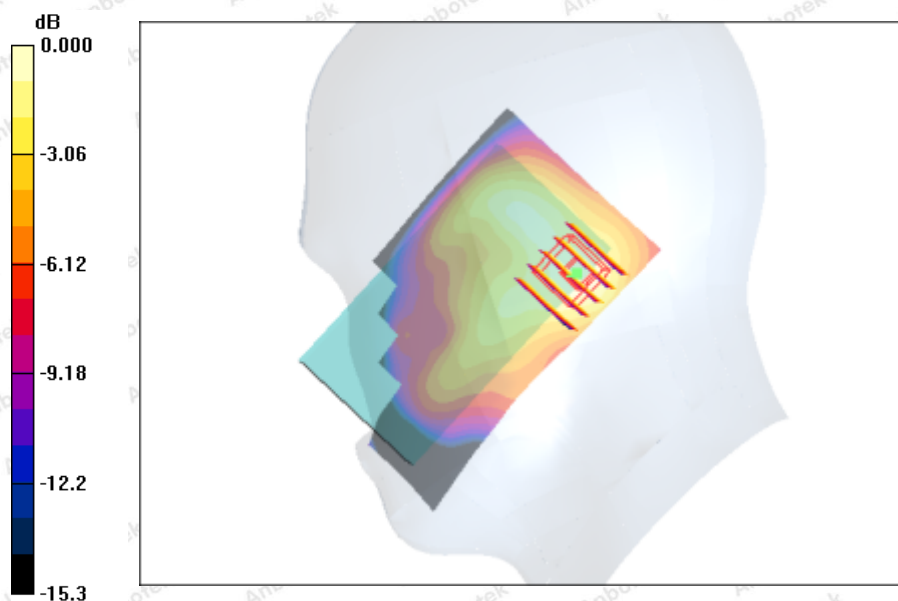**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

#11

Date: 03/12/2022

WIFI 5.8G ANT.1_ Right Cheek _ 5745MHz

Communication System: UID 0, wifi (0); Frequency: 745MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5745\text{MHz}$; $\sigma = 6.14\text{ S/m}$; $\epsilon_r = 46.74$; $\rho = 1000\text{ kg/m}^3$

Phantom section: LEFT Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(7.57, 7.57, 7.57); Calibrated: 05.06.2021;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

RIGHTHEAD/L-C/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7\text{mm}$, $dy=7\text{mm}$, $dz=5\text{mm}$

Maximum value of SAR (measured) = 0.132 W/kg


RIGHTHEAD/L-C/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7\text{mm}$, $dy=7\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.65 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.114 W/kg

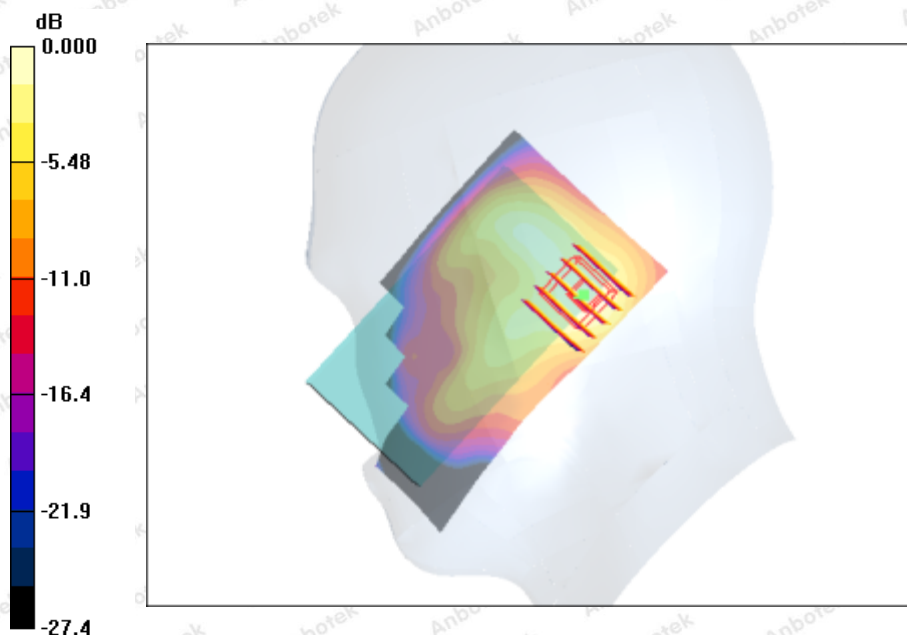**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

#12

Date: 03/07/2022

GSM850_GPRS_4TX_Body Back_Ch190



Communication System: UID 0, GPRS(4 Tx slots) (0); Frequency: 836.6MHz; Duty Cycle: 1:1.99986

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 55.04$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(9.88, 9.88, 9.88); Calibrated: 05.06.2021;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

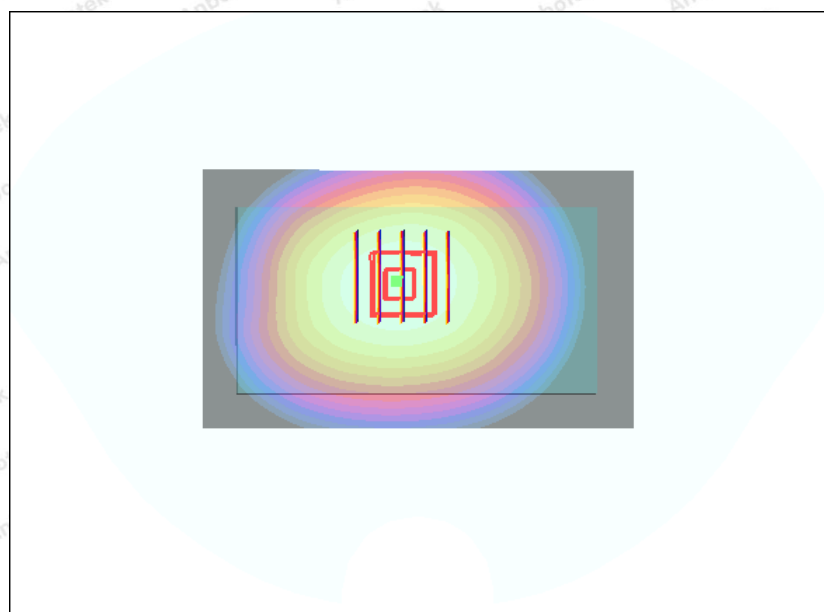Configuration/Unnamed procedure/Area Scan (161x101x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.887 W/kg **Configuration/Unnamed procedure/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 13.56 V/m ; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.855 W/kg **SAR(1 g) = 0.785 W/kg ; SAR(10 g) = 0.545 W/kg** Maximum value of SAR (measured) = 0.836 W/kg **Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

#13

Date: 03/09/2022

GSM1900_GPRS_4TX_Body Back_Ch512

Communication System: UID 0, GPRS(4 Tx slots) (0); Frequency: 1850.2MHz; Duty Cycle: 1:1.99986

Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.50 \text{ S/m}$; $\epsilon_r = 53.83$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7396; ConvF(7.97, 7.97, 7.97); Calibrated: 05.06.2021;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn387; Calibrated: Sep.06.2021
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.10 (7164)

BODY/4ST-BACK/Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.702 W/kg



BODY/4ST-BACK/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.65 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.745 W/kg

SAR(1 g) = 0.712 W/kg; SAR(10 g) = 0.434 W/kg

Maximum value of SAR (measured) = 0.765 W/kg

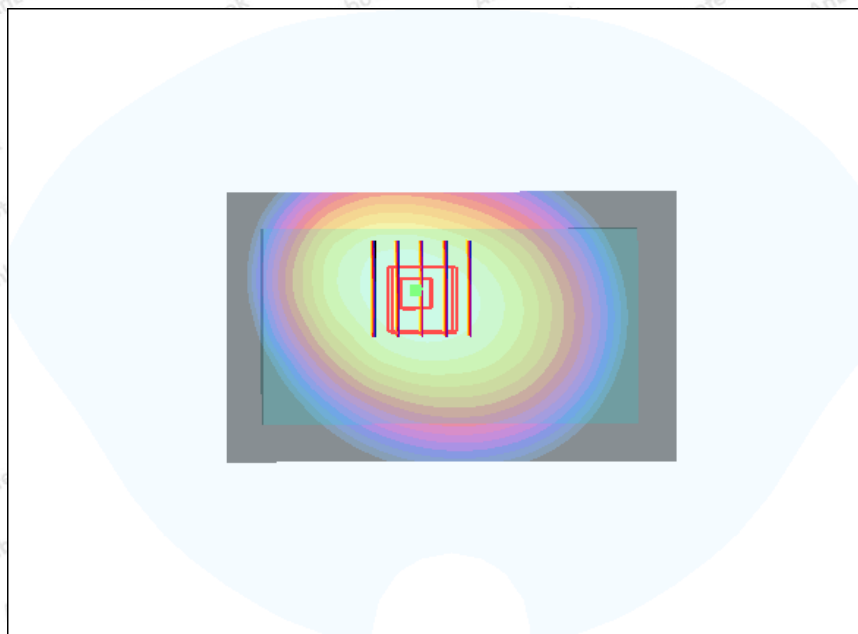**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com