
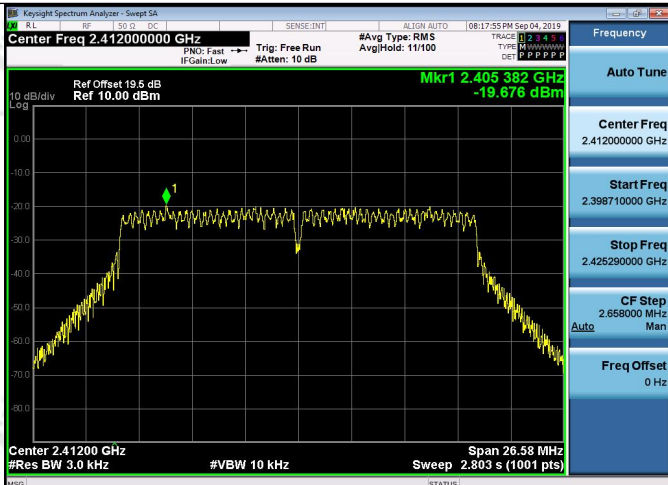
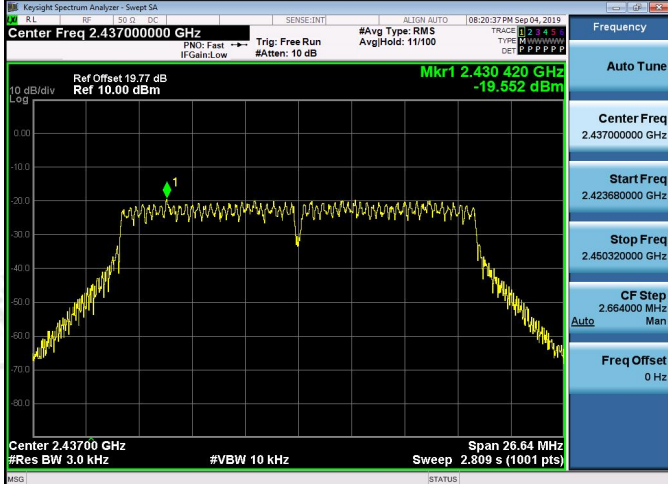
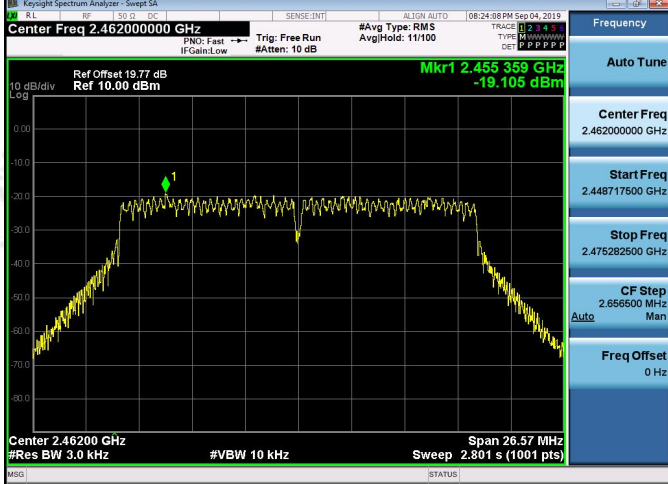
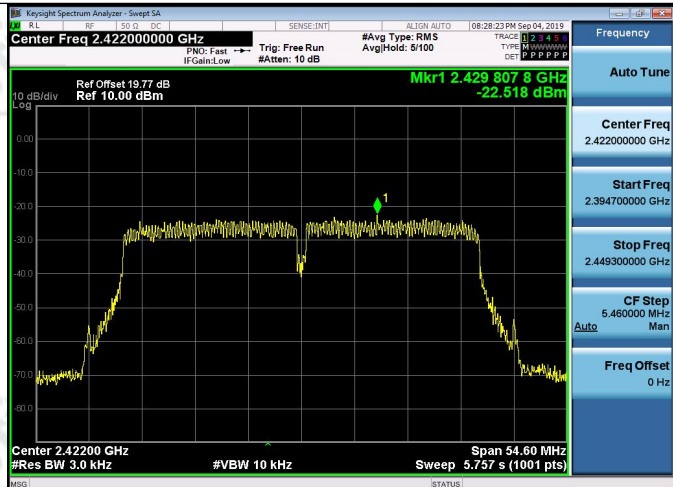
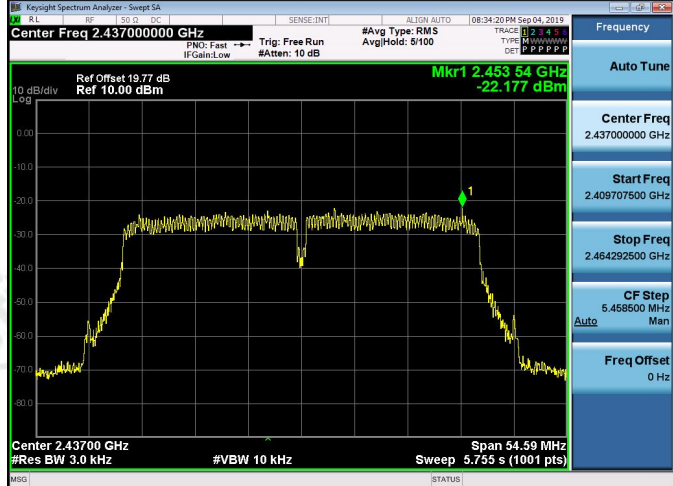
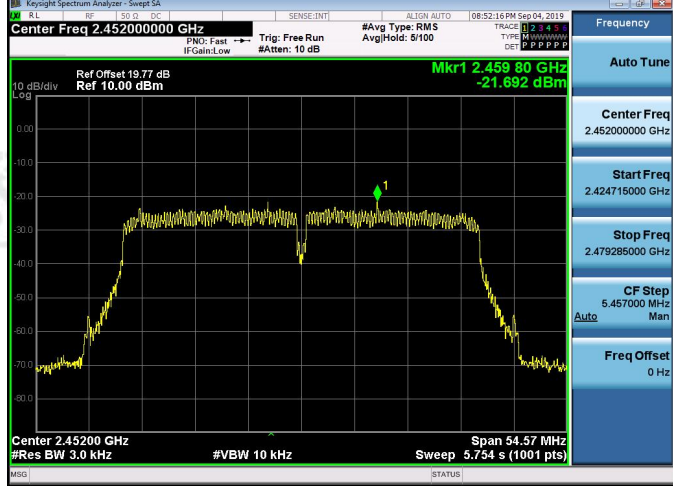


11N20SISO/LCH	 KeySight Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 19.5 dB Ref 10.00 dBm Mkr1 2.405 382 GHz -19.676 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 26.58 MHz Sweep 2.803 s (1001 pts) Frequency Auto Tune Center Freq 2.41200000 GHz Start Freq 2.398710000 GHz Stop Freq 2.425290000 GHz CF Step 2.658000 MHz Auto Man Freq Offset 0 Hz
11N20SISO/MCH	 KeySight Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 19.77 dB Ref 10.00 dBm Mkr1 2.430 420 GHz -19.552 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 26.64 MHz Sweep 2.809 s (1001 pts) Frequency Auto Tune Center Freq 2.43700000 GHz Start Freq 2.423680000 GHz Stop Freq 2.450320000 GHz CF Step 2.664000 MHz Auto Man Freq Offset 0 Hz
11N20SISO/HCH	 KeySight Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 19.77 dB Ref 10.00 dBm Mkr1 2.455 359 GHz -19.105 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 26.57 MHz Sweep 2.801 s (1001 pts) Frequency Auto Tune Center Freq 2.462000000 GHz Start Freq 2.448717500 GHz Stop Freq 2.475282500 GHz CF Step 2.656500 MHz Auto Man Freq Offset 0 Hz

11N40SISO/LCH	 Keysight Spectrum Analyzer - Sweep SA Center Freq 2.422000000 GHz Ref Offset 19.77 dB Ref 10.00 dBm Mkr1 2.429 807 8 GHz -22.518 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 54.60 MHz Sweep 5.757 s (1001 pts)
11N40SISO/MCH	 Keysight Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 19.77 dB Ref 10.00 dBm Mkr1 2.453 54 GHz -22.177 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 54.59 MHz Sweep 5.755 s (1001 pts)
11N40SISO/HCH	 Keysight Spectrum Analyzer - Sweep SA Center Freq 2.452000000 GHz Ref Offset 19.77 dB Ref 10.00 dBm Mkr1 2.459 80 GHz -21.692 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 54.57 MHz Sweep 5.754 s (1001 pts)

Appendix F) Duty Cycle

Duty Cycle			
Configuration	TX ON(ms)	TX ALL(ms)	Duty Cycle(%)
802.11b	1.0000	1.0000	100.00%
802.11g	1.0000	1.0000	100.00%
802.11n HT20	1.0000	1.0000	100.00%
802.11n HT40	1.0000	1.0000	100.00%

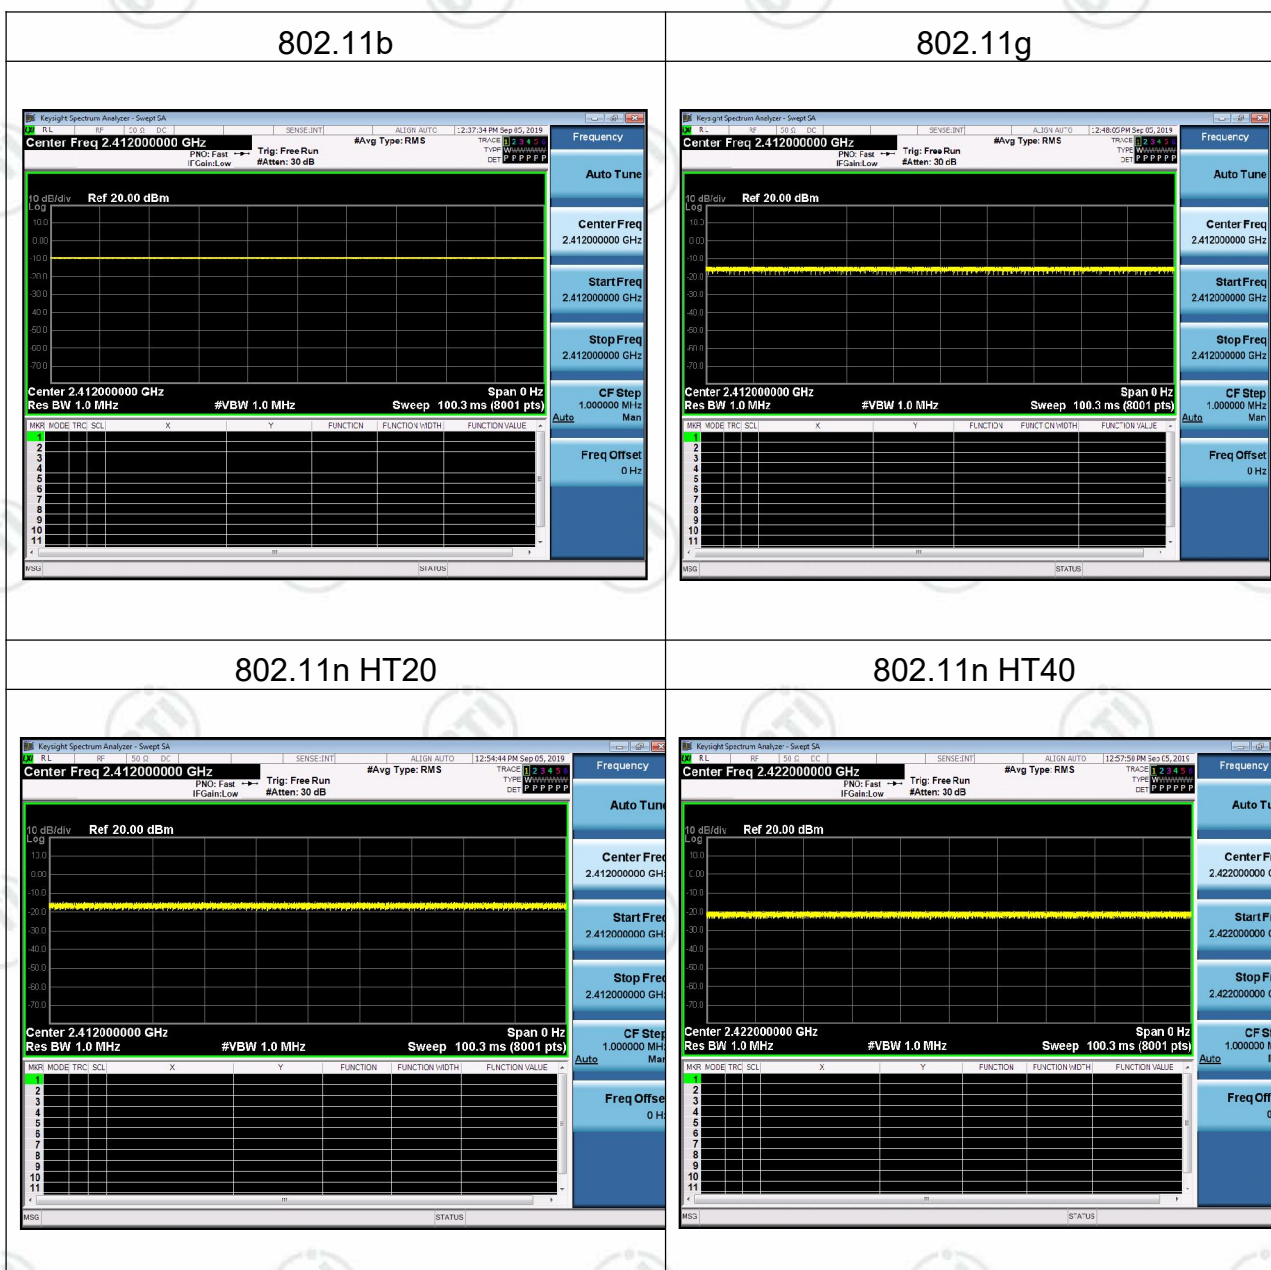

Appendix G): Antenna Requirement


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

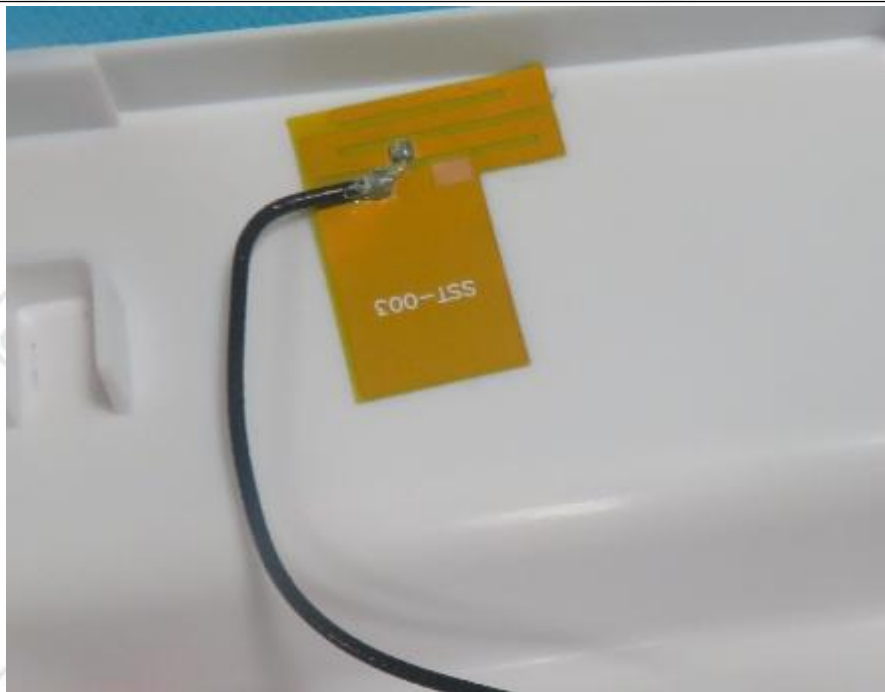

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 4.69 dBi.

Appendix H): AC Power Line Conducted Emission

Test Procedure:	Test frequency range :150KHz-30MHz 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.															
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr> <tr> <th>Quasi-peak</th><th>Average</th></tr> </thead> <tbody> <tr> <td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td>0.5-5</td><td>56</td><td>46</td></tr> <tr> <td>5-30</td><td>60</td><td>50</td></tr> </tbody> </table> * The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency		Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)															
	Quasi-peak	Average														
0.15-0.5	66 to 56*	56 to 46*														
0.5-5	56	46														
5-30	60	50														

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Product : Digital Photo Frame

Model/Type reference : DGF201

Temperature : 21°C


Humidity : 51%

Live line:

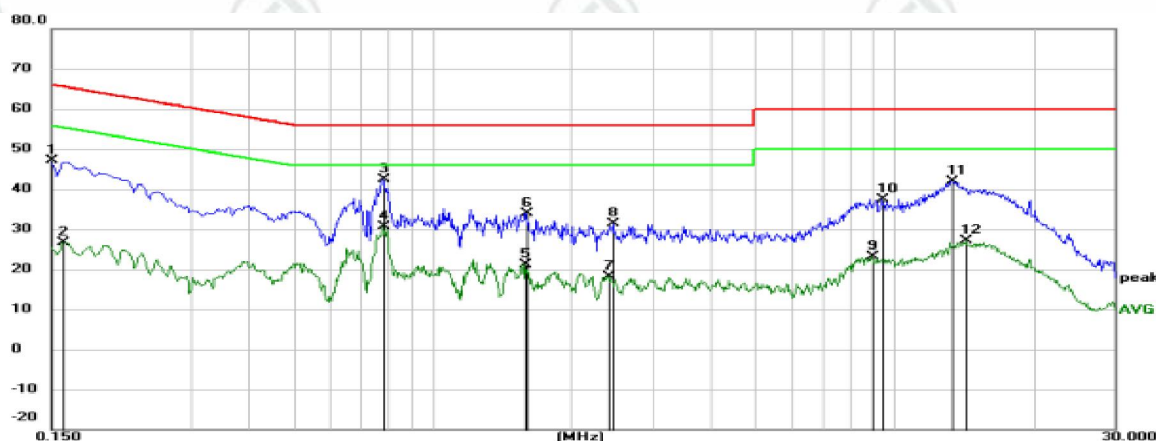

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1500	37.23	9.97	47.20	66.00	-18.80	peak	
2	0.1590	16.71	9.98	26.69	55.52	-28.83	AVG	
3 *	0.7799	32.56	9.86	42.42	56.00	-13.58	peak	
4	0.7799	20.84	9.86	30.70	46.00	-15.30	AVG	
5	1.5855	11.23	9.86	21.09	46.00	-24.91	AVG	
6	1.5945	24.06	9.86	33.92	56.00	-22.08	peak	
7	2.4000	8.18	9.83	18.01	46.00	-27.99	AVG	
8	2.4630	21.45	9.83	31.28	56.00	-24.72	peak	
9	8.9205	13.31	9.92	23.23	50.00	-26.77	AVG	
10	9.4155	27.54	9.94	37.48	60.00	-22.52	peak	
11	13.2720	31.89	9.97	41.86	60.00	-18.14	peak	
12	14.3115	17.15	9.98	27.13	50.00	-22.87	AVG	

Neutral line:

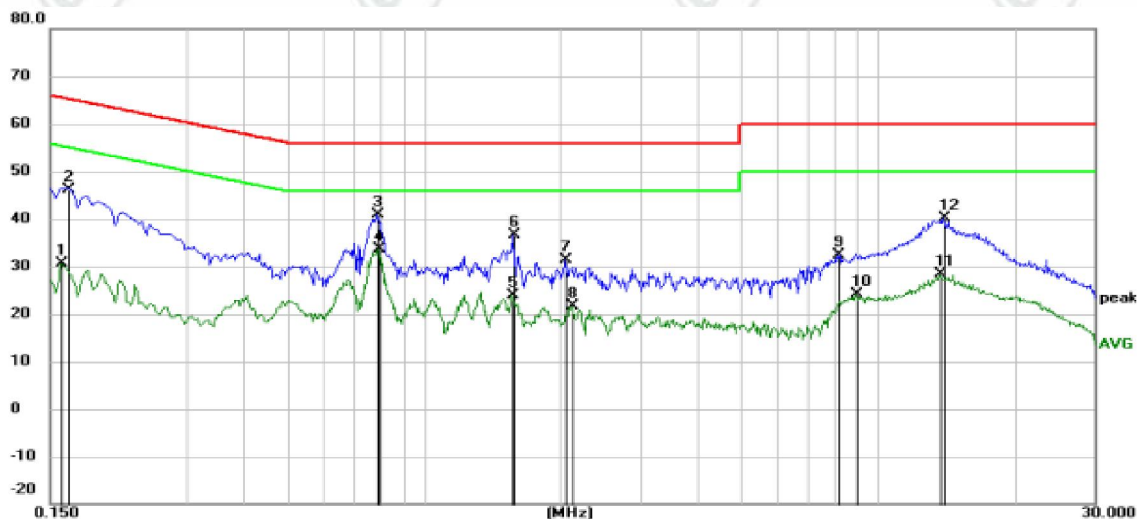

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1590	20.62	9.98	30.60	55.52	-24.92	AVG	
2		0.1650	36.26	9.99	46.25	65.21	-18.96	peak	
3		0.7890	30.94	9.88	40.82	56.00	-15.18	peak	
4	*	0.7935	23.67	9.89	33.56	46.00	-12.44	AVG	
5		1.5675	14.11	9.86	23.97	46.00	-22.03	AVG	
6		1.5720	26.87	9.86	36.73	56.00	-19.27	peak	
7		2.0445	21.50	9.83	31.33	56.00	-24.67	peak	
8		2.1120	11.82	9.83	21.65	46.00	-24.35	AVG	
9		8.1555	22.56	9.89	32.45	60.00	-27.55	peak	
10		8.9340	14.20	9.92	24.12	50.00	-25.88	AVG	
11		13.6815	18.40	9.97	28.37	50.00	-21.63	AVG	
12		13.9470	30.17	9.98	40.15	60.00	-19.85	peak	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


Appendix I): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). - Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBμV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	

Test plot as follows:

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2412
Remark:	PK		


Test Graph

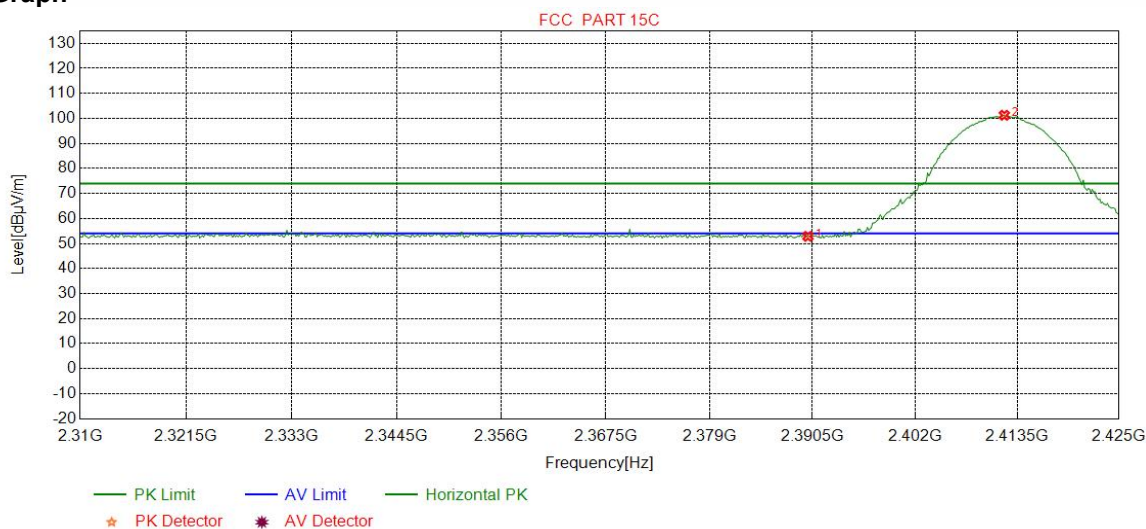

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.66	52.84	74.00	21.16	Pass	Horizontal
2	2412.0463	32.28	13.36	-42.44	98.05	101.25	74.00	-27.25	Pass	Horizontal

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2412
Remark:	PK		


Test Graph

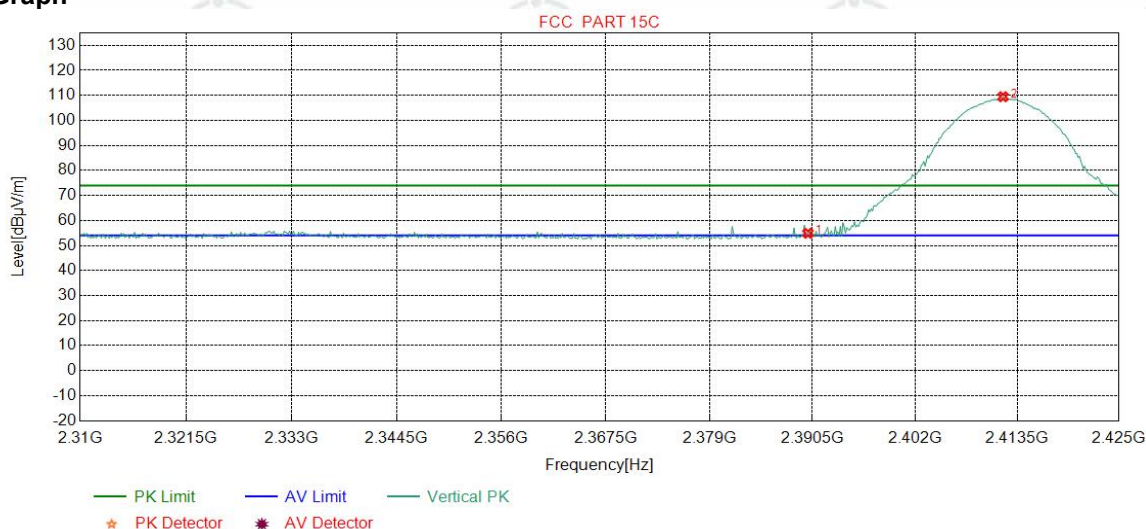

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	51.69	54.87	74.00	19.13	Pass	Vertical
2	2411.9024	32.28	13.35	-42.43	106.26	109.46	74.00	-35.46	Pass	Vertical

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2412
Remark:	AV		


Test Graph

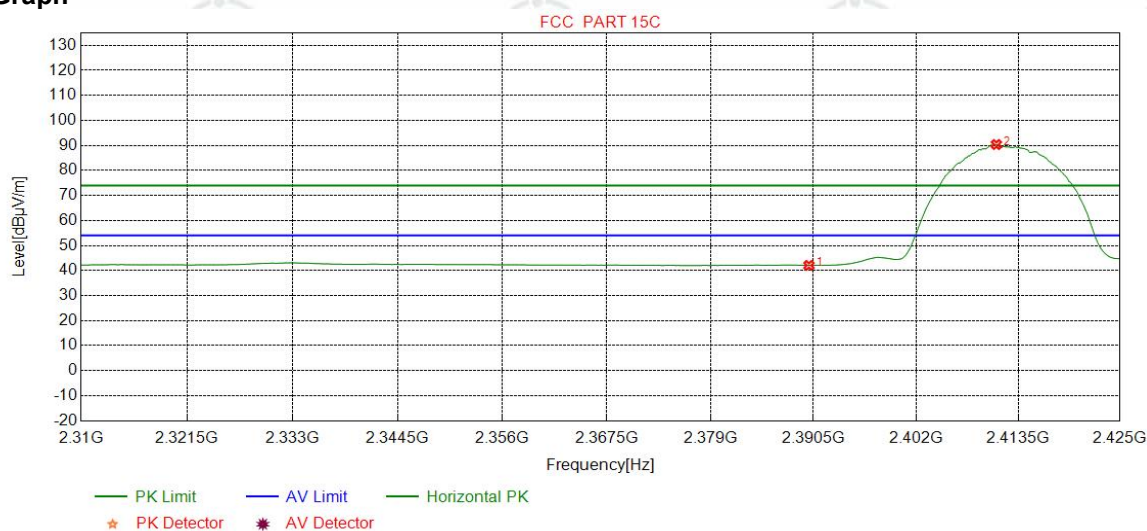

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.86	42.04	54.00	11.96	Pass	Horizontal
2	2411.0388	32.28	13.35	-42.43	87.16	90.36	54.00	-36.36	Pass	Horizontal

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2412
Remark:	AV		


Test Graph

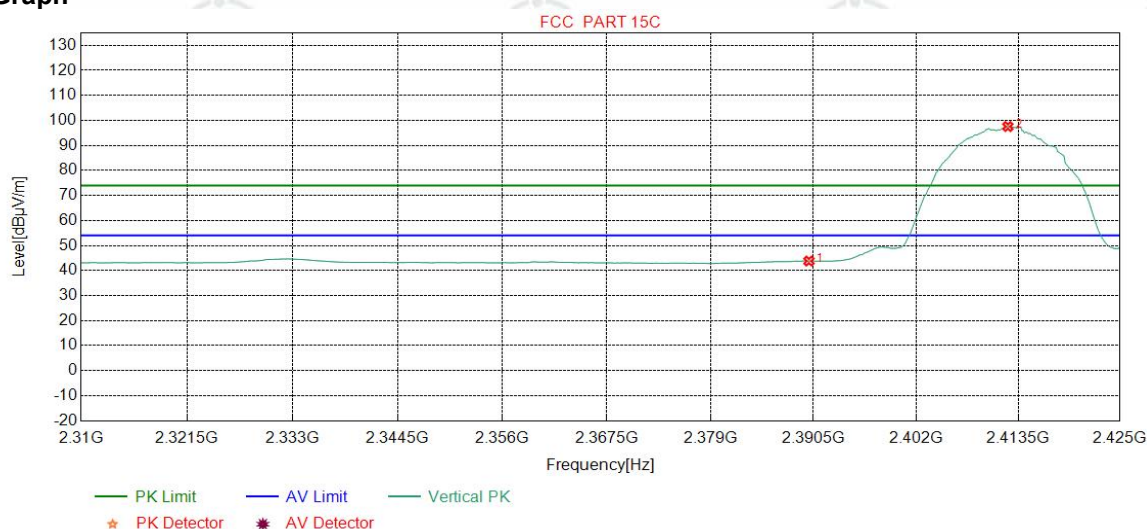

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	40.61	43.79	54.00	10.21	Pass	Vertical
2	2412.3342	32.28	13.36	-42.43	94.35	97.56	54.00	-43.56	Pass	Vertical

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2462
Remark:	PK		


Test Graph

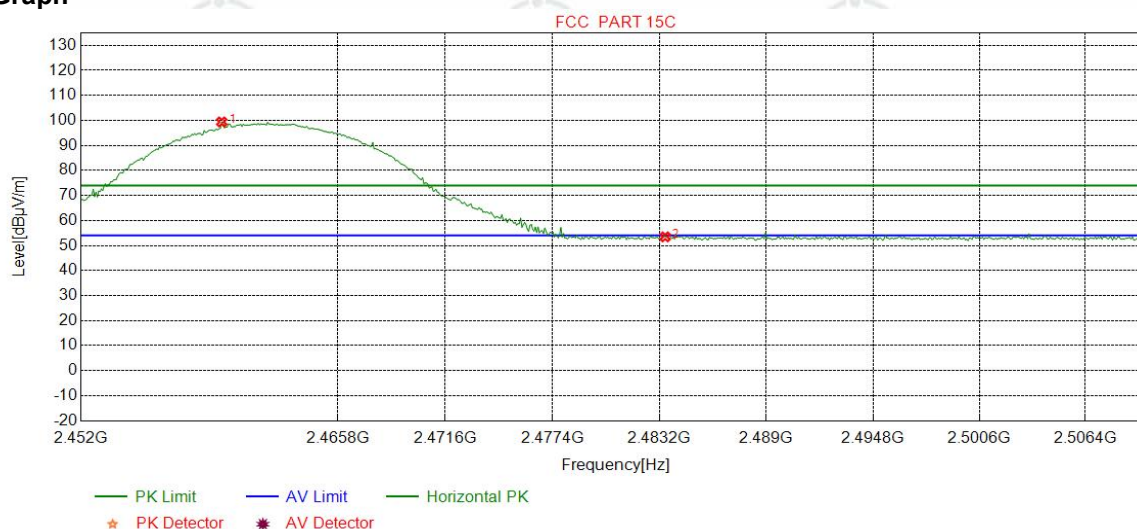

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2459.5494	32.34	13.49	-42.41	95.97	99.39	74.00	-25.39	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	50.10	53.46	74.00	20.54	Pass	Horizontal

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2462
Remark:	PK		


Test Graph

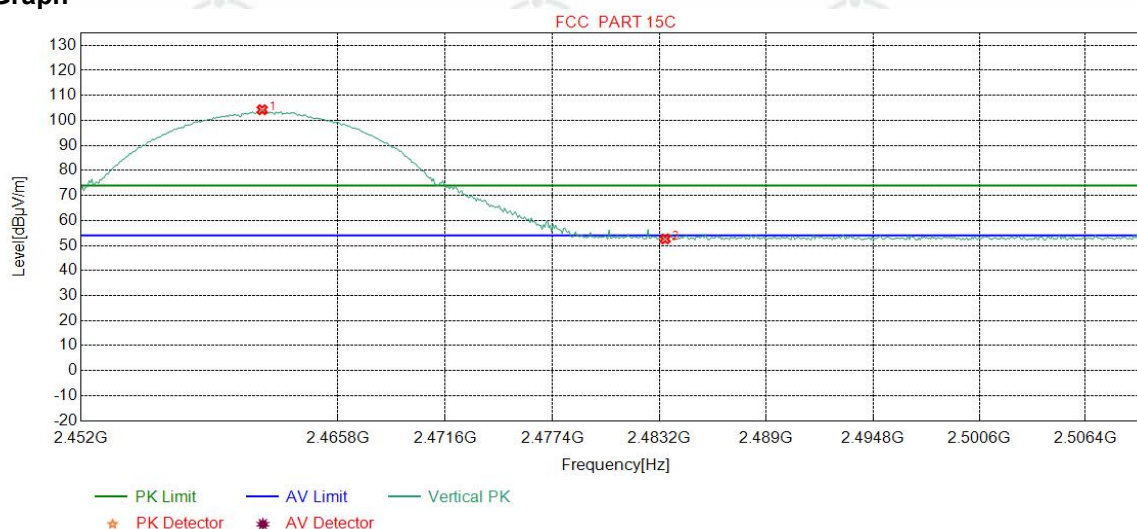

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2461.7272	32.35	13.48	-42.41	100.84	104.26	74.00	-30.26	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.26	52.62	74.00	21.38	Pass	Vertical

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2462
Remark:	AV		


Test Graph

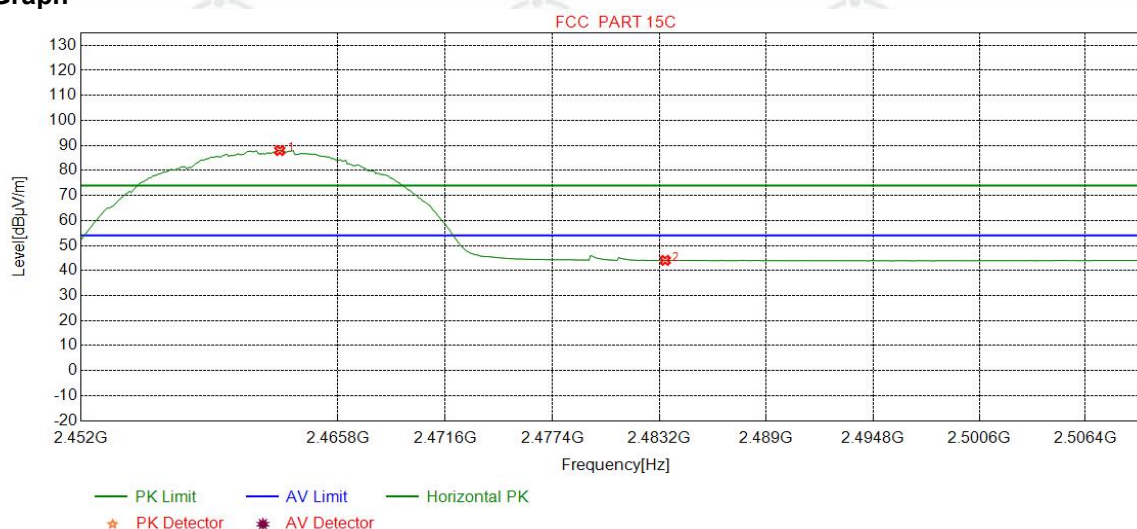

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2462.6708	32.35	13.47	-42.41	84.54	87.95	54.00	-33.95	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	40.70	44.06	54.00	9.94	Pass	Horizontal

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2462
Remark:	AV		


Test Graph

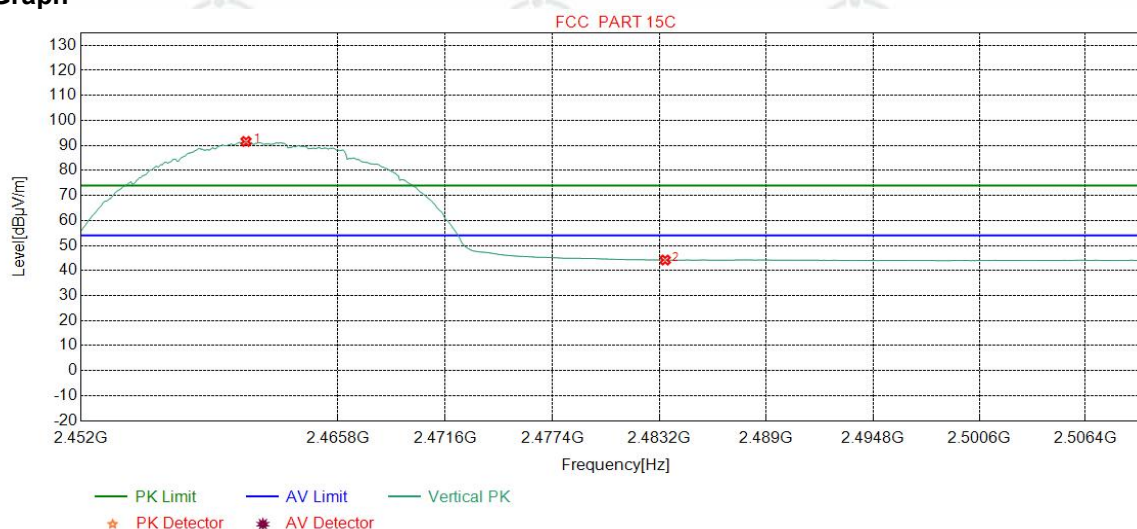

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2460.8561	32.35	13.48	-42.41	88.17	91.59	54.00	-37.59	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	40.83	44.19	54.00	9.81	Pass	Vertical

Mode:	802.11 g(6Mbps) Transmitting	Channel:	2412
Remark:	PK		


Test Graph

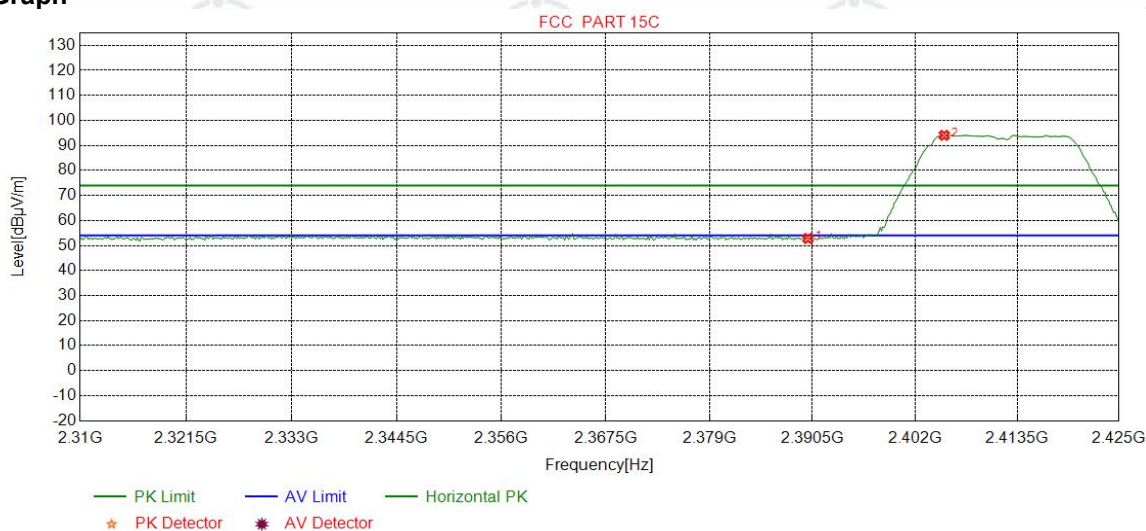

1	2390.0000	32.25	13.37	-42.44	49.64	52.82	74.00	21.18	Pass	Horizontal
2	2405.2816	32.27	13.32	-42.43	90.88	94.04	74.00	-20.04	Pass	Horizontal

Mode:	802.11 g(6Mbps) Transmitting	Channel:	2412
Remark:	PK		


Test Graph

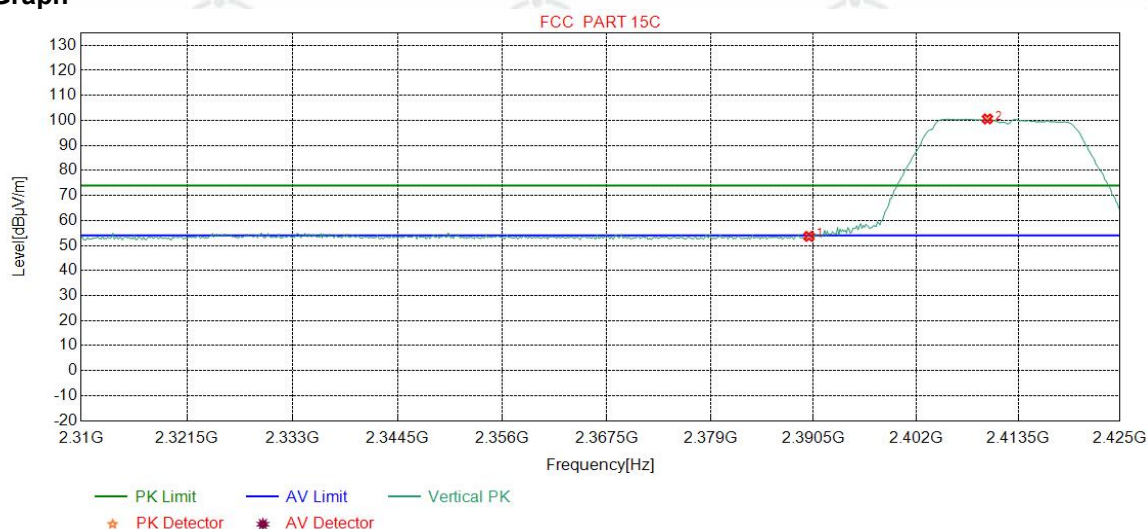

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	50.47	53.65	74.00	20.35	Pass	Vertical
2	2410.0313	32.27	13.35	-42.43	97.39	100.58	74.00	-26.58	Pass	Vertical

Mode:	802.11 g(6Mbps) Transmitting	Channel:	2412
Remark:	AV		


Test Graph

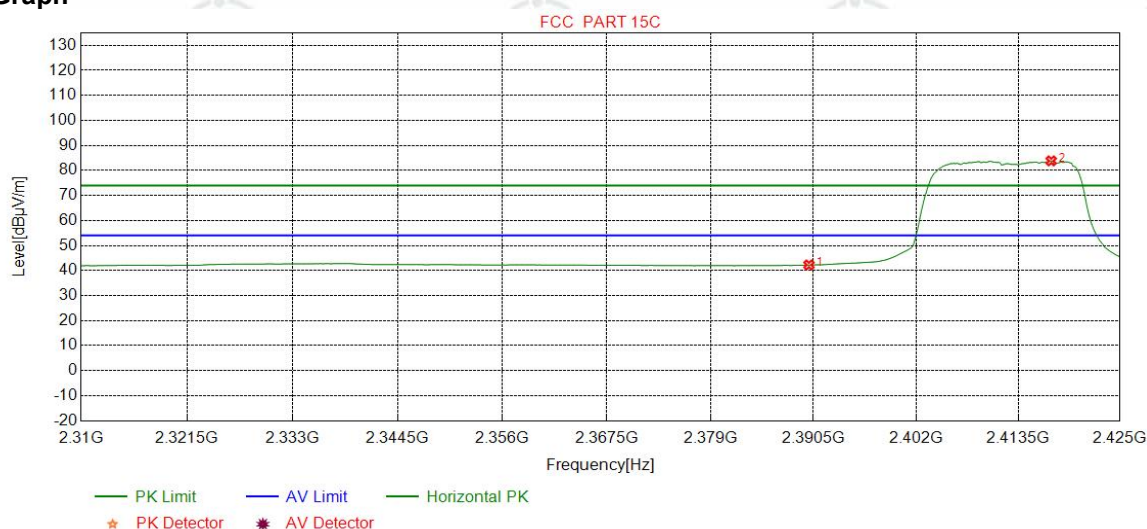

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	39.05	42.23	54.00	11.77	Pass	Horizontal
2	2417.2278	32.28	13.38	-42.42	80.58	83.82	54.00	-29.82	Pass	Horizontal

Mode:	802.11 g(6Mbps) Transmitting	Channel:	2412
Remark:	AV		


Test Graph

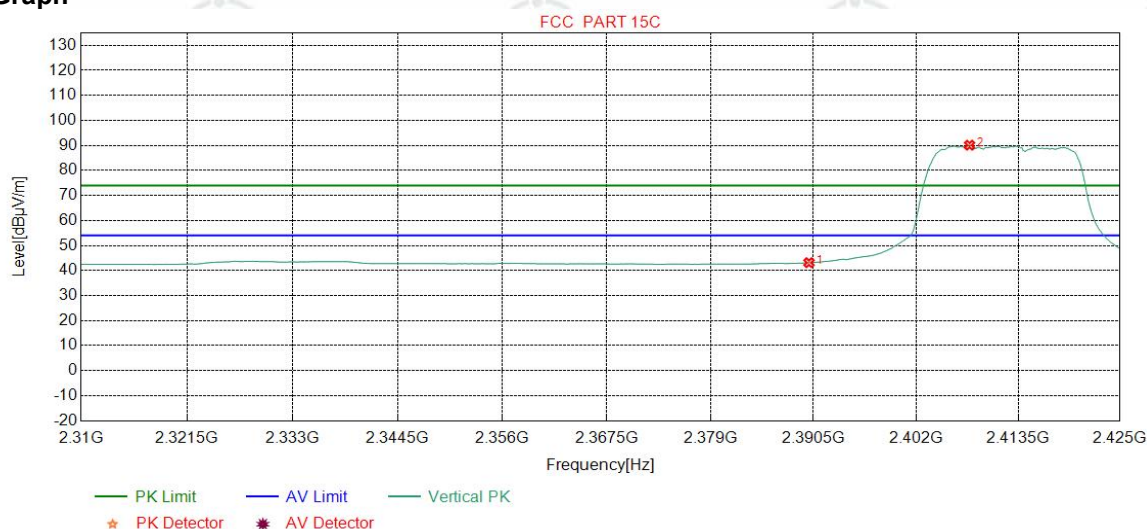

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	39.95	43.13	54.00	10.87	Pass	Vertical
2	2408.0163	32.27	13.34	-42.43	86.92	90.10	54.00	-36.10	Pass	Vertical

Mode:	802.11 g(6Mbps) Transmitting	Channel:	2462
Remark:	PK		


Test Graph

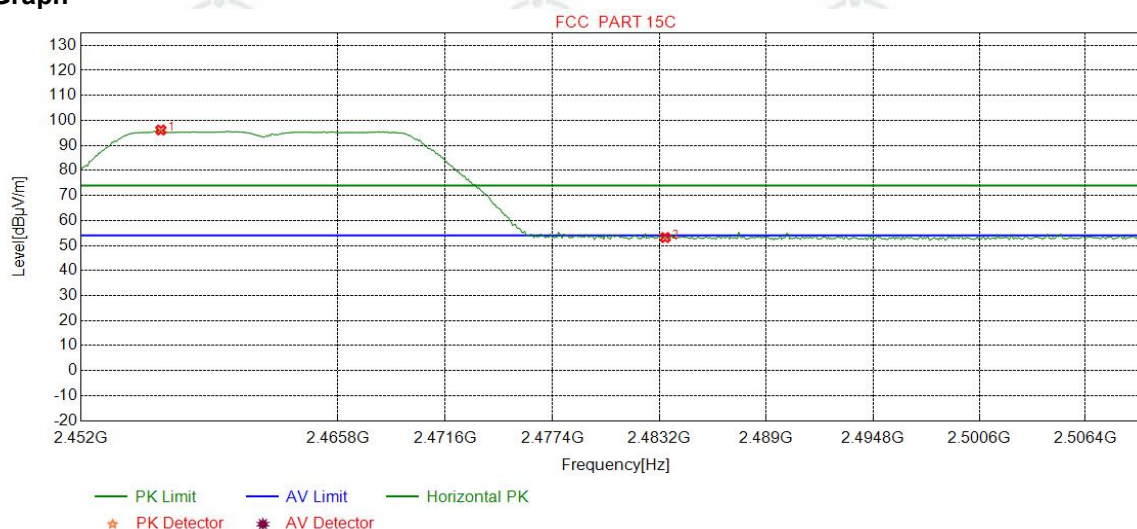

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2456.2829	32.34	13.50	-42.41	92.74	96.17	74.00	-22.17	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.80	53.16	74.00	20.84	Pass	Horizontal

Mode:	802.11 g(6Mbps) Transmitting	Channel:	2462
Remark:	PK		


Test Graph

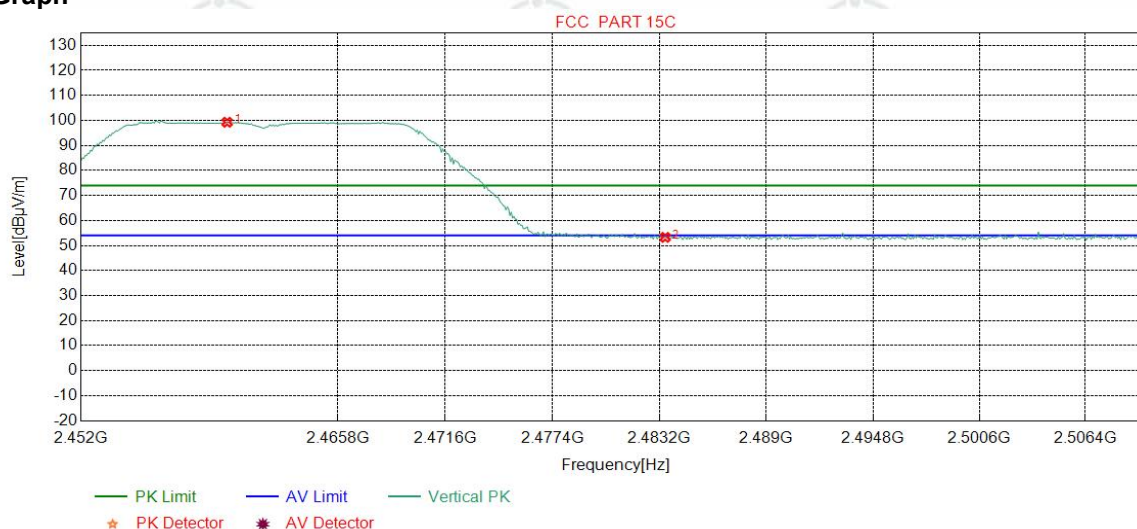

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2459.8398	32.34	13.48	-42.40	95.85	99.27	74.00	-25.27	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.89	53.25	74.00	20.75	Pass	Vertical

Mode:	802.11 g(6Mbps) Transmitting	Channel:	2462
Remark:	AV		


Test Graph

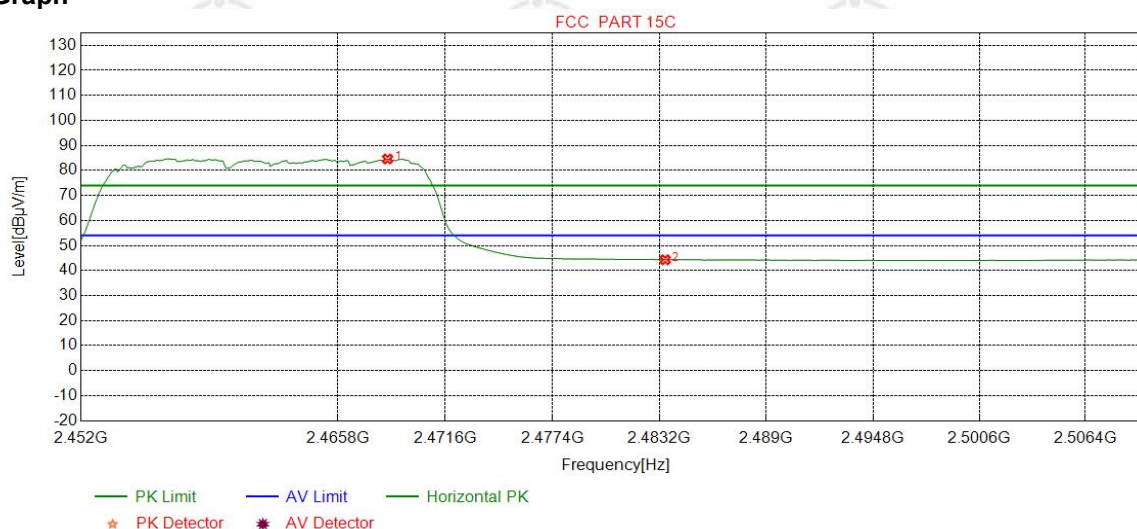

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2468.4781	32.36	13.45	-42.41	81.17	84.57	54.00	-30.57	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	40.94	44.30	54.00	9.70	Pass	Horizontal

Mode:	802.11 g(6Mbps) Transmitting	Channel:	2462
Remark:	AV		


Test Graph

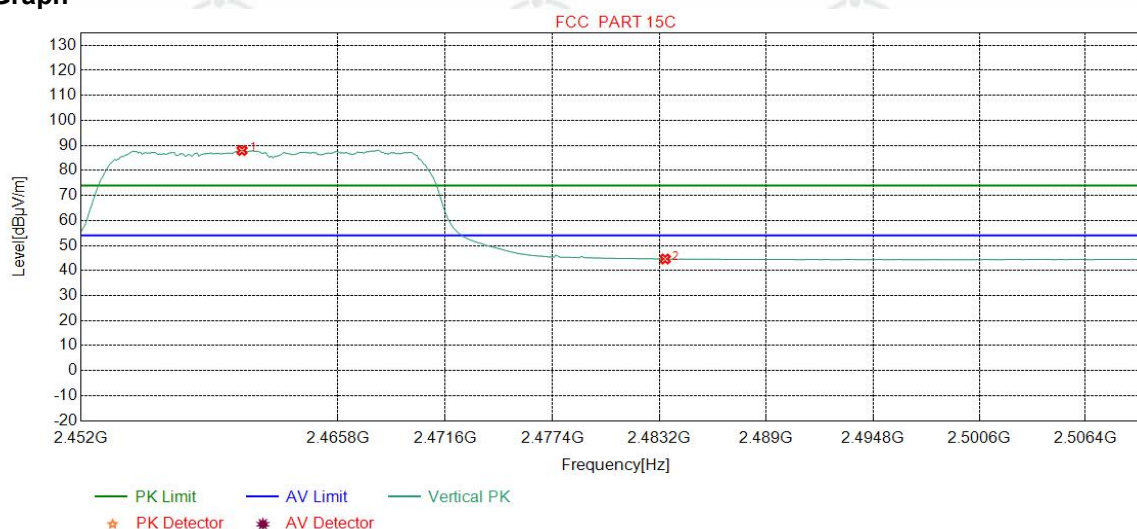

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2460.6383	32.34	13.48	-42.40	84.55	87.97	54.00	-33.97	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	41.25	44.61	54.00	9.39	Pass	Vertical

Mode:	802.11 n(HT20) (6.5Mbps)	Channel:	2412
Remark:	PK		


Test Graph

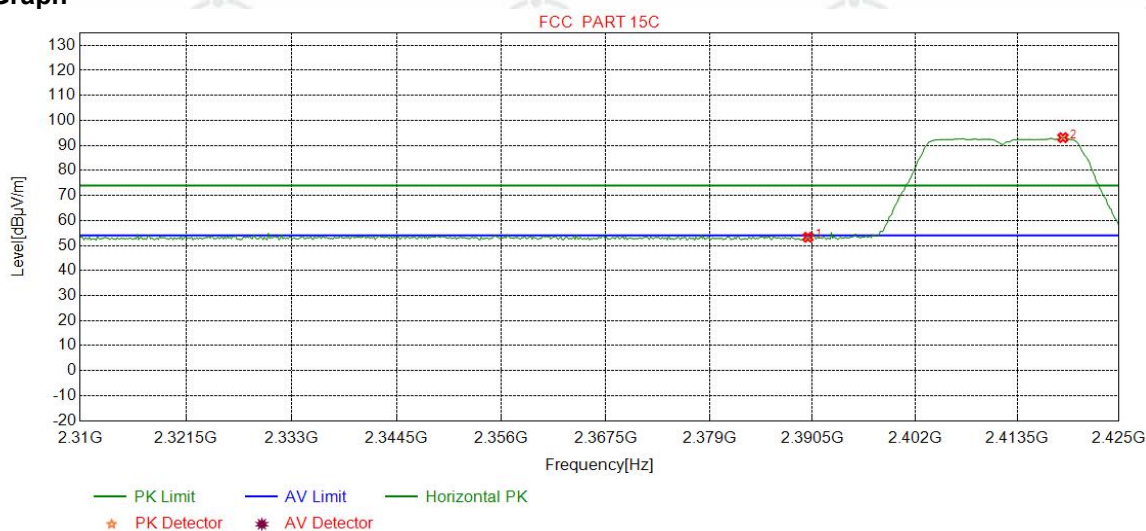

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	50.12	53.30	74.00	20.70	Pass	Horizontal
2	2418.6671	32.29	13.39	-42.43	89.87	93.12	74.00	-19.12	Pass	Horizontal

Mode:	802.11 n(HT20) (6.5Mbps)	Channel:	2412
Remark:	PK		


Test Graph

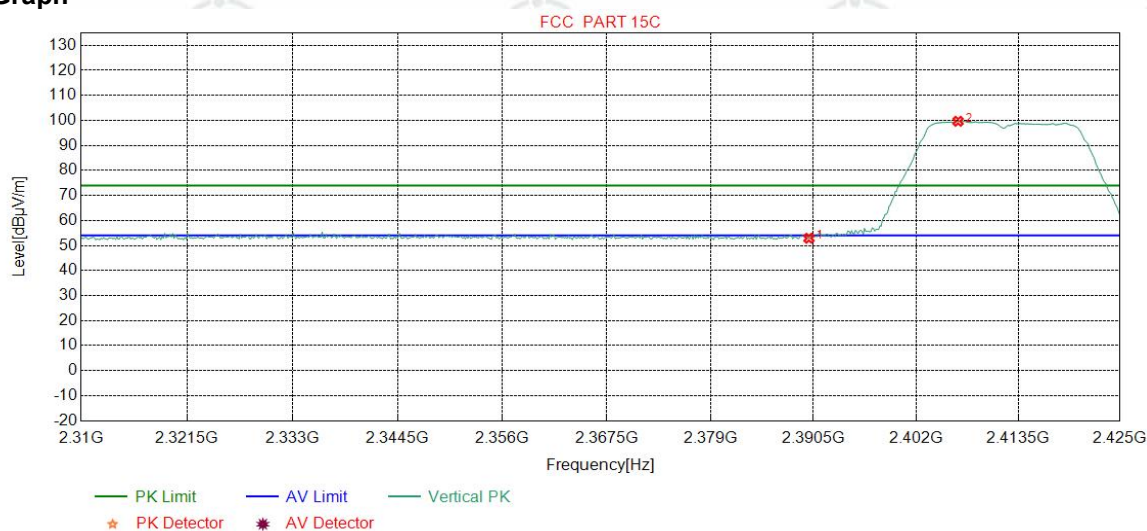

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.71	52.89	74.00	21.11	Pass	Vertical
2	2406.7209	32.27	13.33	-42.43	96.49	99.66	74.00	-25.66	Pass	Vertical

Mode:	802.11 n(HT20) (6.5Mbps)	Channel:	2412
Remark:	AV		


Test Graph

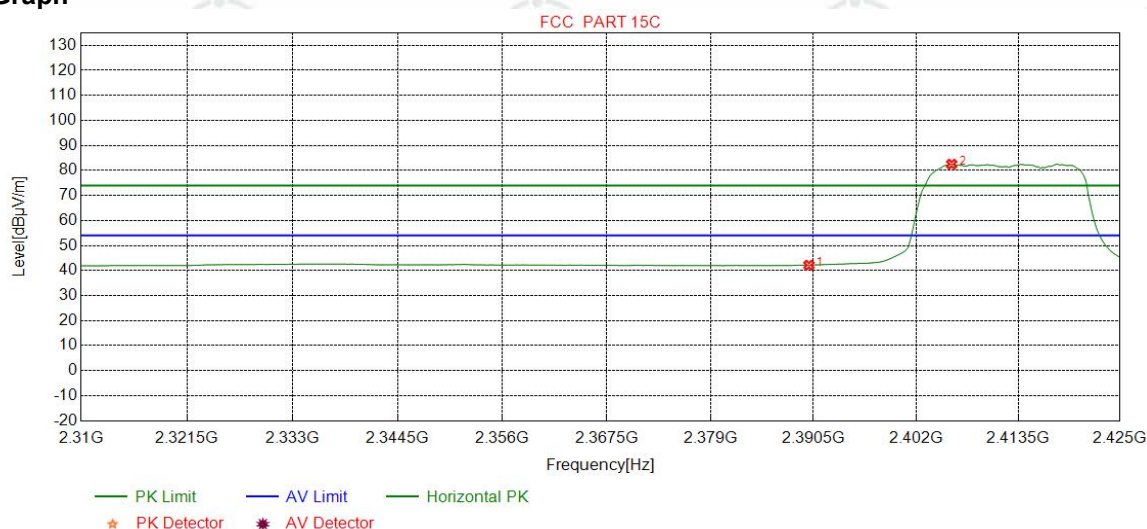

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	38.96	42.14	54.00	11.86	Pass	Horizontal
2	2406.0013	32.27	13.33	-42.44	79.34	82.50	54.00	-28.50	Pass	Horizontal

Mode:	802.11 n(HT20) (6.5Mbps)	Channel:	2412
Remark:	AV		


Test Graph

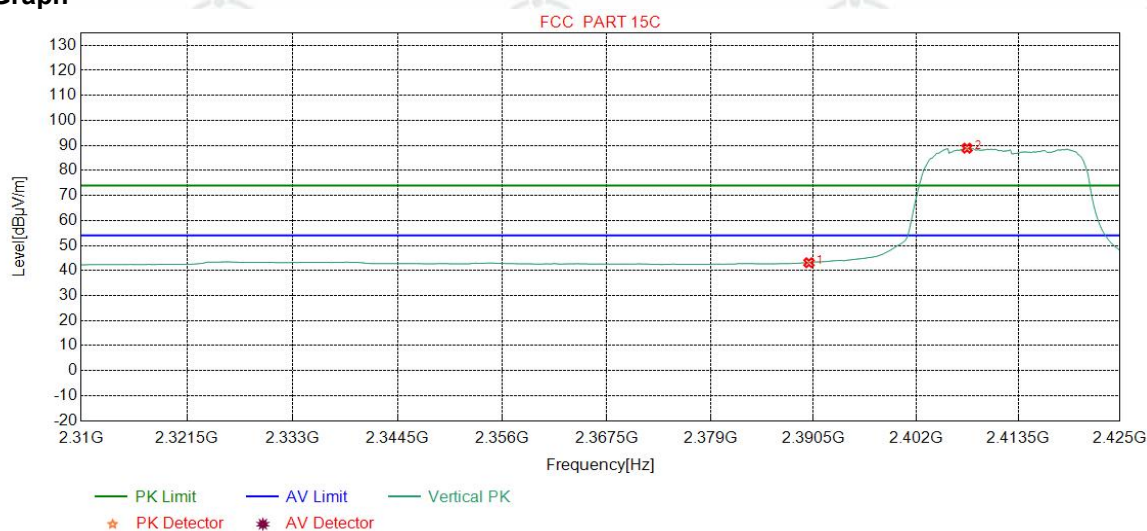

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	39.93	43.11	54.00	10.89	Pass	Vertical
2	2407.7284	32.27	13.34	-42.43	85.72	88.90	54.00	-34.90	Pass	Vertical

Mode:	802.11 n(HT20) (6.5Mbps)	Channel:	2462
Remark:	PK		


Test Graph

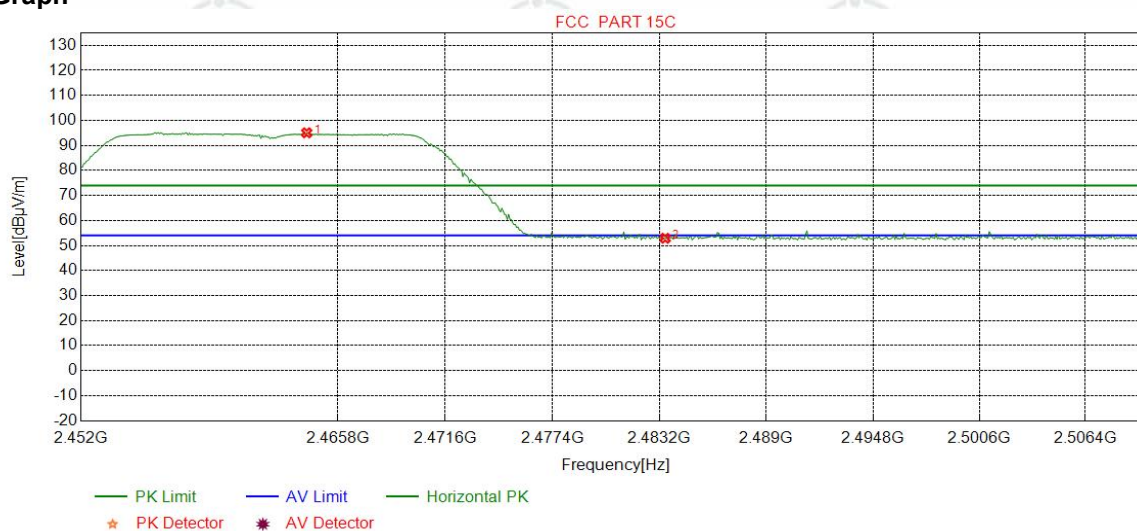

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2464.1227	32.35	13.47	-42.41	91.64	95.05	74.00	-21.05	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.53	52.89	74.00	21.11	Pass	Horizontal

Mode:	802.11 n(HT20) (6.5Mbps)	Channel:	2462
Remark:	PK		


Test Graph

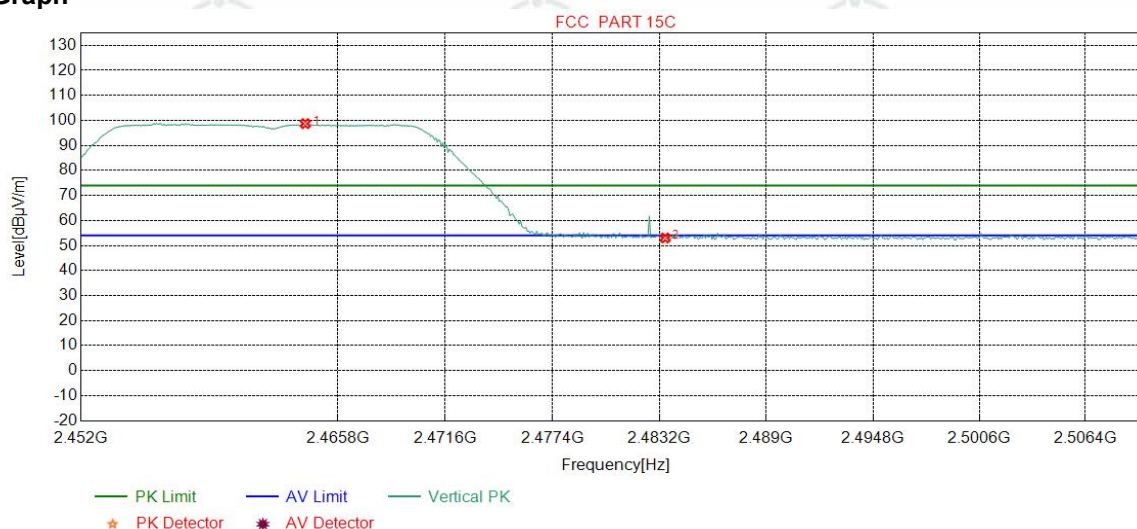

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2464.0501	32.35	13.47	-42.41	95.29	98.70	74.00	-24.70	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.66	53.02	74.00	20.98	Pass	Vertical

Mode:	802.11 n(HT20) (6.5Mbps)	Channel:	2462
Remark:	AV		


Test Graph

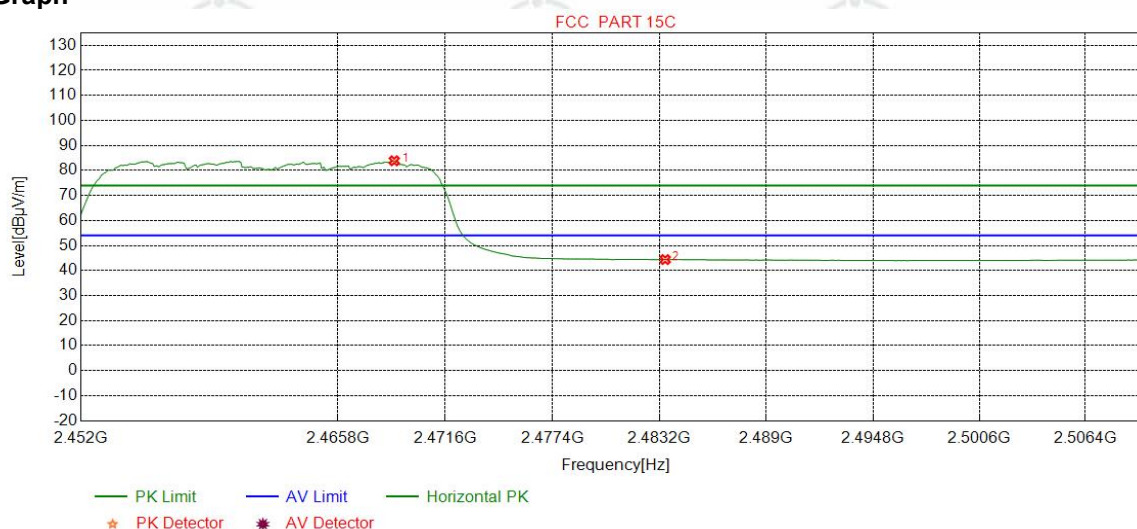

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2468.8411	32.36	13.44	-42.40	80.46	83.86	54.00	-29.86	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	41.02	44.38	54.00	9.62	Pass	Horizontal

Mode:	802.11 n(HT20) (6.5Mbps)	Channel:	2462
Remark:	AV		

Test Graph

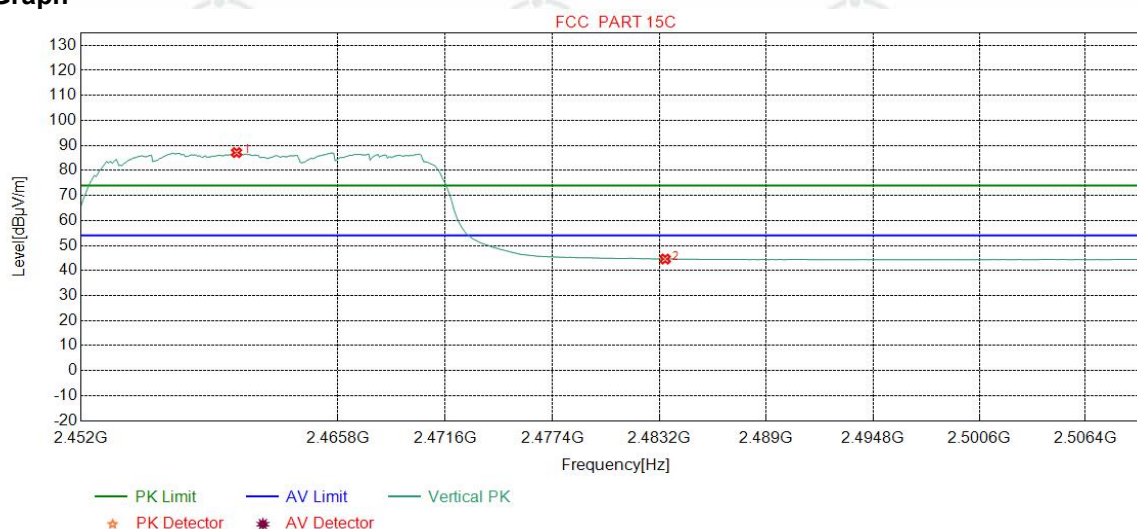

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2460.3479	32.34	13.48	-42.40	83.72	87.14	54.00	-33.14	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	41.23	44.59	54.00	9.41	Pass	Vertical

Note:

1) Through Pre-scan transmitting mode and charge+transmitter mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40), and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix J): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:					
Below 1GHz test procedure as below:					
a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Above 1GHz test procedure as below:					
g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).. h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBµV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz

Mode:		802.11 b (11Mbps) Transmitting				Channel:		2412		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	35.7236	10.93	0.66	-32.11	46.61	26.09	40.00	13.91	Pass	H
2	122.2562	8.86	1.31	-32.06	53.09	31.20	43.50	12.30	Pass	H
3	240.0260	11.94	1.84	-31.90	47.15	29.03	46.00	16.97	Pass	H
4	454.7085	16.28	2.53	-31.86	40.62	27.57	46.00	18.43	Pass	H
5	819.9500	21.14	3.44	-31.93	42.28	34.93	46.00	11.07	Pass	H
6	984.0904	22.60	3.76	-30.82	42.53	38.07	54.00	15.93	Pass	H
7	33.9774	10.66	0.65	-32.12	48.85	28.04	40.00	11.96	Pass	V
8	121.6742	8.95	1.31	-32.07	49.71	27.90	43.50	15.60	Pass	V
9	208.8859	11.13	1.71	-31.94	50.02	30.92	43.50	12.58	Pass	V
10	328.0138	13.82	2.15	-31.78	42.50	26.69	46.00	19.31	Pass	V
11	649.9890	19.40	3.10	-32.07	39.52	29.95	46.00	16.05	Pass	V
12	892.9013	22.01	3.59	-31.61	43.61	37.60	46.00	8.40	Pass	V

Mode:		802.11 b (11Mbps) Transmitting				Channel:		2437		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	35.5296	10.87	0.66	-32.12	47.34	26.75	40.00	13.25	Pass	H
2	122.3532	8.85	1.31	-32.06	54.10	32.20	43.50	11.30	Pass	H
3	240.0260	11.94	1.84	-31.90	45.76	27.64	46.00	18.36	Pass	H
4	491.6692	16.87	2.65	-31.89	41.39	29.02	46.00	16.98	Pass	H
5	819.9500	21.14	3.44	-31.93	40.72	33.37	46.00	12.63	Pass	H
6	988.0678	22.63	3.77	-30.80	39.14	34.74	54.00	19.26	Pass	H
7	35.0445	10.71	0.65	-32.11	49.24	28.49	40.00	11.51	Pass	V
8	121.6742	8.95	1.31	-32.07	50.48	28.67	43.50	14.83	Pass	V
9	145.9266	7.41	1.43	-32.01	48.51	25.34	43.50	18.16	Pass	V
10	208.8859	11.13	1.71	-31.94	49.84	30.74	43.50	12.76	Pass	V
11	240.0260	11.94	1.84	-31.90	47.29	29.17	46.00	16.83	Pass	V
12	649.9890	19.40	3.10	-32.07	39.23	29.66	46.00	16.34	Pass	V

Mode:		802.11 b (11Mbps) Transmitting				Channel:		2462		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	35.5296	10.87	0.66	-32.12	45.39	24.80	40.00	15.20	Pass	H
2	192.0062	10.14	1.62	-31.96	43.68	23.48	43.50	20.02	Pass	H
3	240.0260	11.94	1.84	-31.90	45.99	27.87	46.00	18.13	Pass	H
4	649.9890	19.40	3.10	-32.07	39.01	29.44	46.00	16.56	Pass	H
5	819.9500	21.14	3.44	-31.93	39.97	32.62	46.00	13.38	Pass	H
6	983.9934	22.60	3.76	-30.83	40.05	35.58	54.00	18.42	Pass	H
7	35.6266	10.90	0.66	-32.12	46.33	25.77	40.00	14.23	Pass	V
8	208.8859	11.13	1.71	-31.94	48.41	29.31	43.50	14.19	Pass	V
9	240.0260	11.94	1.84	-31.90	44.57	26.45	46.00	19.55	Pass	V
10	327.9168	13.81	2.15	-31.77	48.32	32.51	46.00	13.49	Pass	V
11	531.4431	17.63	2.76	-31.91	43.54	32.02	46.00	13.98	Pass	V
12	983.9934	22.60	3.76	-30.83	42.28	37.81	54.00	16.19	Pass	V

Mode:		802.11 g (6Mbps) Transmitting				Channel:		2412		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	35.5296	10.87	0.66	-32.12	45.82	25.23	40.00	14.77	Pass	H
2	208.8859	11.13	1.71	-31.94	41.85	22.75	43.50	20.75	Pass	H
3	240.0260	11.94	1.84	-31.90	46.41	28.29	46.00	17.71	Pass	H
4	649.9890	19.40	3.10	-32.07	39.36	29.79	46.00	16.21	Pass	H
5	895.9086	22.05	3.59	-31.59	39.44	33.49	46.00	12.51	Pass	H
6	983.9934	22.60	3.76	-30.83	39.91	35.44	54.00	18.56	Pass	H
7	35.5296	10.87	0.66	-32.12	46.63	26.04	40.00	13.96	Pass	V
8	208.8859	11.13	1.71	-31.94	50.55	31.45	43.50	12.05	Pass	V
9	240.0260	11.94	1.84	-31.90	45.53	27.41	46.00	18.59	Pass	V
10	532.5103	17.65	2.77	-31.92	40.63	29.13	46.00	16.87	Pass	V
11	649.9890	19.40	3.10	-32.07	39.11	29.54	46.00	16.46	Pass	V
12	983.8964	22.60	3.76	-30.83	40.56	36.09	54.00	17.91	Pass	V

Mode:		802.11 g (6Mbps) Transmitting				Channel:		2437		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	35.5296	10.87	0.66	-32.12	45.59	25.00	40.00	15.00	Pass	H
2	240.0260	11.94	1.84	-31.90	45.85	27.73	46.00	18.27	Pass	H
3	450.8281	16.21	2.51	-31.88	39.26	26.10	46.00	19.90	Pass	H
4	649.9890	19.40	3.10	-32.07	39.85	30.28	46.00	15.72	Pass	H
5	819.9500	21.14	3.44	-31.93	42.53	35.18	46.00	10.82	Pass	H
6	906.4826	22.14	3.60	-31.52	44.42	38.64	46.00	7.36	Pass	H
7	54.9315	12.41	0.84	-32.08	41.67	22.84	40.00	17.16	Pass	V
8	208.8859	11.13	1.71	-31.94	50.02	30.92	43.50	12.58	Pass	V
9	240.0260	11.94	1.84	-31.90	45.05	26.93	46.00	19.07	Pass	V
10	328.0138	13.82	2.15	-31.78	42.97	27.16	46.00	18.84	Pass	V
11	649.9890	19.40	3.10	-32.07	40.18	30.61	46.00	15.39	Pass	V
12	983.9934	22.60	3.76	-30.83	41.05	36.58	54.00	17.42	Pass	V

Mode:		802.11 g (6Mbps) Transmitting				Channel:		2462		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	35.5296	10.87	0.66	-32.12	45.12	24.53	40.00	15.47	Pass	H
2	240.0260	11.94	1.84	-31.90	47.72	29.60	46.00	16.40	Pass	H
3	455.0965	16.28	2.54	-31.86	39.47	26.43	46.00	19.57	Pass	H
4	649.9890	19.40	3.10	-32.07	39.03	29.46	46.00	16.54	Pass	H
5	819.9500	21.14	3.44	-31.93	40.88	33.53	46.00	12.47	Pass	H
6	983.9934	22.60	3.76	-30.83	40.59	36.12	54.00	17.88	Pass	H
7	35.6266	10.90	0.66	-32.12	47.22	26.66	40.00	13.34	Pass	V
8	208.8859	11.13	1.71	-31.94	49.95	30.85	43.50	12.65	Pass	V
9	240.0260	11.94	1.84	-31.90	44.75	26.63	46.00	19.37	Pass	V
10	649.9890	19.40	3.10	-32.07	40.39	30.82	46.00	15.18	Pass	V
11	907.9378	22.15	3.60	-31.50	48.58	42.83	46.00	3.17	Pass	V
12	983.9934	22.60	3.76	-30.83	40.42	35.95	54.00	18.05	Pass	V

Mode:		802.11 n (HT20) (6.5Mbps)				Channel:		2412		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	35.5296	10.87	0.66	-32.12	47.29	26.70	40.00	13.30	Pass	H
2	192.0062	10.14	1.62	-31.96	42.60	22.40	43.50	21.10	Pass	H
3	239.9290	11.94	1.84	-31.90	45.29	27.17	46.00	18.83	Pass	H
4	327.9168	13.81	2.15	-31.77	41.70	25.89	46.00	20.11	Pass	H
5	819.9500	21.14	3.44	-31.93	42.05	34.70	46.00	11.30	Pass	H
6	983.8964	22.60	3.76	-30.83	41.50	37.03	54.00	16.97	Pass	H
7	35.5296	10.87	0.66	-32.12	46.63	26.04	40.00	13.96	Pass	V
8	208.8859	11.13	1.71	-31.94	50.06	30.96	43.50	12.54	Pass	V
9	328.0138	13.82	2.15	-31.78	42.74	26.93	46.00	19.07	Pass	V
10	531.7342	17.63	2.77	-31.92	42.57	31.05	46.00	14.95	Pass	V
11	649.9890	19.40	3.10	-32.07	39.28	29.71	46.00	16.29	Pass	V
12	819.9500	21.14	3.44	-31.93	39.87	32.52	46.00	13.48	Pass	V

Mode:		802.11 n (HT20) (6.5Mbps)				Channel:		2437		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	35.6266	10.90	0.66	-32.12	46.29	25.73	40.00	14.27	Pass	H
2	240.0260	11.94	1.84	-31.90	43.71	25.59	46.00	20.41	Pass	H
3	531.4431	17.63	2.76	-31.91	39.76	28.24	46.00	17.76	Pass	H
4	649.9890	19.40	3.10	-32.07	39.62	30.05	46.00	15.95	Pass	H
5	819.9500	21.14	3.44	-31.93	39.69	32.34	46.00	13.66	Pass	H
6	983.9934	22.60	3.76	-30.83	40.31	35.84	54.00	18.16	Pass	H
7	54.8345	12.43	0.84	-32.09	40.70	21.88	40.00	18.12	Pass	V
8	208.8859	11.13	1.71	-31.94	50.04	30.94	43.50	12.56	Pass	V
9	240.0260	11.94	1.84	-31.90	45.45	27.33	46.00	18.67	Pass	V
10	328.0138	13.82	2.15	-31.78	42.84	27.03	46.00	18.97	Pass	V
11	531.9282	17.64	2.77	-31.92	43.54	32.03	46.00	13.97	Pass	V
12	819.9500	21.14	3.44	-31.93	39.53	32.18	46.00	13.82	Pass	V

Mode:		802.11 n (HT20) (6.5Mbps)				Channel:		2462		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	35.5296	10.87	0.66	-32.12	46.43	25.84	40.00	14.16	Pass	H
2	192.0062	10.14	1.62	-31.96	42.21	22.01	43.50	21.49	Pass	H
3	240.0260	11.94	1.84	-31.90	44.33	26.21	46.00	19.79	Pass	H
4	649.9890	19.40	3.10	-32.07	38.27	28.70	46.00	17.30	Pass	H
5	896.0056	22.05	3.59	-31.59	46.64	40.69	46.00	5.31	Pass	H
6	983.8964	22.60	3.76	-30.83	40.11	35.64	54.00	18.36	Pass	H
7	54.6405	12.46	0.84	-32.09	40.43	21.64	40.00	18.36	Pass	V
8	208.8859	11.13	1.71	-31.94	50.34	31.24	43.50	12.26	Pass	V
9	328.0138	13.82	2.15	-31.78	43.64	27.83	46.00	18.17	Pass	V
10	532.2192	17.64	2.77	-31.92	39.81	28.30	46.00	17.70	Pass	V
11	819.9500	21.14	3.44	-31.93	39.83	32.48	46.00	13.52	Pass	V
12	984.0904	22.60	3.76	-30.82	39.42	34.96	54.00	19.04	Pass	V

Transmitter Emission above 1GHz

Mode:		802.11 b (11Mbps) Transmitting				Channel:		2412			
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	4822.1215	34.50	4.60	-40.64	54.23	52.69	74.00	21.31	Pass	H	Peak
2	7236.0000	36.34	5.79	-40.99	52.33	53.47	74.00	20.53	Pass	H	Peak
3	9648.0000	37.66	6.72	-40.73	42.91	46.56	74.00	27.44	Pass	H	Peak
4	11891.5928	39.21	7.43	-41.24	44.65	50.05	74.00	23.95	Pass	H	Peak
5	14306.7538	40.01	8.62	-41.88	45.52	52.27	74.00	21.73	Pass	H	Peak
6	15918.8613	41.74	10.14	-43.31	44.62	53.19	74.00	20.81	Pass	H	Peak
7	3457.0305	33.38	4.44	-41.84	51.56	47.54	74.00	26.46	Pass	V	Peak
8	4823.1215	34.50	4.60	-40.64	54.13	52.59	74.00	21.41	Pass	V	Peak
9	7236.0000	36.34	5.79	-40.99	46.93	48.07	74.00	25.93	Pass	V	Peak
10	9648.0000	37.66	6.72	-40.73	41.95	45.60	74.00	28.40	Pass	V	Peak
11	11984.5990	39.29	7.57	-41.22	45.15	50.79	74.00	23.21	Pass	V	Peak
12	14185.7457	39.89	8.61	-41.65	46.52	53.37	74.00	20.63	Pass	V	Peak

Mode:		802.11 b (11Mbps) Transmitting				Channel:		2437			
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	4874.0000	34.50	4.78	-40.61	53.94	52.61	74.00	21.39	Pass	H	Peak
2	6083.2055	35.82	5.24	-41.11	45.26	45.21	74.00	28.79	Pass	H	Peak
3	7311.0000	36.41	5.85	-40.93	48.48	49.81	74.00	24.19	Pass	H	Peak
4	9748.0000	37.70	6.77	-40.63	42.52	46.36	74.00	27.64	Pass	H	Peak
5	12442.6295	39.57	7.68	-41.12	45.21	51.34	74.00	22.66	Pass	H	Peak
6	13733.7156	39.54	8.32	-41.21	45.88	52.53	74.00	21.47	Pass	H	Peak
7	4874.0000	34.50	4.78	-40.61	52.29	50.96	74.00	23.04	Pass	V	Peak
8	7311.0000	36.41	5.85	-40.93	45.12	46.45	74.00	27.55	Pass	V	Peak
9	9748.0000	37.70	6.77	-40.63	42.40	46.24	74.00	27.76	Pass	V	Peak
10	11664.5776	39.03	7.45	-41.32	46.25	51.41	74.00	22.59	Pass	V	Peak
11	14196.7465	39.90	8.65	-41.67	45.49	52.37	74.00	21.63	Pass	V	Peak
12	16279.8853	42.12	10.11	-43.52	45.28	53.99	74.00	20.01	Pass	V	Peak

Mode:		802.11 b (11Mbps) Transmitting				Channel:		2462			
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2662.5663	32.66	4.10	-42.30	54.58	49.04	74.00	24.96	Pass	H	Peak
2	4924.0000	34.50	4.85	-40.56	52.43	51.22	74.00	22.78	Pass	H	Peak
3	7354.2903	36.45	5.85	-40.89	45.05	46.46	74.00	27.54	Pass	H	Peak
4	9848.0000	37.74	6.83	-40.54	42.52	46.55	74.00	27.45	Pass	H	Peak
5	12426.6284	39.56	7.75	-41.12	45.50	51.69	74.00	22.31	Pass	H	Peak
6	14898.7933	40.36	9.19	-42.31	45.50	52.74	74.00	21.26	Pass	H	Peak
7	4924.0000	34.50	4.85	-40.56	51.82	50.61	74.00	23.39	Pass	V	Peak
8	7386.0000	36.49	5.85	-40.87	42.76	44.23	74.00	29.77	Pass	V	Peak
9	9848.0000	37.74	6.83	-40.54	41.41	45.44	74.00	28.56	Pass	V	Peak
10	11743.5829	39.09	7.47	-41.29	46.86	52.13	74.00	21.87	Pass	V	Peak
11	13075.6717	39.57	8.05	-41.65	45.63	51.60	74.00	22.40	Pass	V	Peak
12	15478.8319	40.88	9.16	-42.96	45.88	52.96	74.00	21.04	Pass	V	Peak

Mode:		802.11 g (6Mbps) Transmitting				Channel:		2412			
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2903.3903	33.05	4.38	-42.18	51.75	47.00	74.00	27.00	Pass	H	Peak
2	4824.0000	34.50	4.61	-40.65	50.72	49.18	74.00	24.82	Pass	H	Peak
3	7236.0000	36.34	5.79	-40.99	43.82	44.96	74.00	29.04	Pass	H	Peak
4	9648.0000	37.66	6.72	-40.73	42.48	46.13	74.00	27.87	Pass	H	Peak
5	11674.5783	39.04	7.46	-41.32	46.45	51.63	74.00	22.37	Pass	H	Peak
6	14458.7639	40.16	9.01	-42.18	45.95	52.94	74.00	21.06	Pass	H	Peak
7	4824.0000	34.50	4.61	-40.65	53.62	52.08	74.00	21.92	Pass	V	Peak
8	7236.0000	36.34	5.79	-40.99	42.72	43.86	74.00	30.14	Pass	V	Peak
9	9648.0000	37.66	6.72	-40.73	42.21	45.86	74.00	28.14	Pass	V	Peak
10	11686.5791	39.05	7.48	-41.32	46.30	51.51	74.00	22.49	Pass	V	Peak
11	14180.7454	39.88	8.59	-41.63	45.16	52.00	74.00	22.00	Pass	V	Peak
12	15614.8410	41.13	9.73	-43.08	45.93	53.71	74.00	20.29	Pass	V	Peak

Mode:		802.11 g (6Mbps) Transmitting				Channel:		2437			
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	4874.0000	34.50	4.78	-40.61	51.58	50.25	74.00	23.75	Pass	H	Peak
2	7311.0000	36.41	5.85	-40.93	42.50	43.83	74.00	30.17	Pass	H	Peak
3	9748.0000	37.70	6.77	-40.63	41.63	45.47	74.00	28.53	Pass	H	Peak
4	11723.5816	39.08	7.48	-41.30	45.75	51.01	74.00	22.99	Pass	H	Peak
5	13587.7058	39.45	8.14	-41.18	44.39	50.80	74.00	23.20	Pass	H	Peak
6	15156.8105	40.56	9.36	-42.53	44.94	52.33	74.00	21.67	Pass	H	Peak
7	4874.0000	34.50	4.78	-40.61	51.71	50.38	74.00	23.62	Pass	V	Peak
8	6781.2521	36.01	5.66	-41.18	45.04	45.53	74.00	28.47	Pass	V	Peak
9	7311.0000	36.41	5.85	-40.93	43.34	44.67	74.00	29.33	Pass	V	Peak
10	9748.0000	37.70	6.77	-40.63	43.44	47.28	74.00	26.72	Pass	V	Peak
11	12202.6135	39.42	7.67	-41.16	44.98	50.91	74.00	23.09	Pass	V	Peak
12	14216.7478	39.92	8.63	-41.70	46.88	53.73	74.00	20.27	Pass	V	Peak

Mode:		802.11 g (6Mbps) Transmitting				Channel:		2462			
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2960.9961	33.14	4.43	-42.14	54.01	49.44	74.00	24.56	Pass	H	Peak
2	4924.0000	34.50	4.85	-40.56	51.79	50.58	74.00	23.42	Pass	H	Peak
3	7113.2742	36.21	5.73	-41.09	45.43	46.28	74.00	27.72	Pass	H	Peak
4	7386.0000	36.49	5.85	-40.87	42.71	44.18	74.00	29.82	Pass	H	Peak
5	9848.0000	37.74	6.83	-40.54	41.65	45.68	74.00	28.32	Pass	H	Peak
6	11407.5605	38.84	7.44	-41.33	44.48	49.43	74.00	24.57	Pass	H	Peak
7	4924.0000	34.50	4.85	-40.56	49.88	48.67	74.00	25.33	Pass	V	Peak
8	7386.0000	36.49	5.85	-40.87	43.51	44.98	74.00	29.02	Pass	V	Peak
9	9848.0000	37.74	6.83	-40.54	41.25	45.28	74.00	28.72	Pass	V	Peak
10	11762.5842	39.11	7.47	-41.29	45.58	50.87	74.00	23.13	Pass	V	Peak
11	12985.6657	39.60	8.29	-41.72	44.71	50.88	74.00	23.12	Pass	V	Peak
12	14954.7970	40.38	9.06	-42.32	46.03	53.15	74.00	20.85	Pass	V	Peak

Mode:		802.11 n (HT20) (6.5Mbps)				Channel:		2412			
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2961.1961	33.14	4.43	-42.14	52.91	48.34	74.00	25.66	Pass	H	Peak
2	4824.0000	34.50	4.61	-40.65	54.01	52.47	74.00	21.53	Pass	H	Peak
3	7236.0000	36.34	5.79	-40.99	43.43	44.57	74.00	29.43	Pass	H	Peak
4	9648.0000	37.66	6.72	-40.73	42.16	45.81	74.00	28.19	Pass	H	Peak
5	11287.5525	38.77	7.32	-41.27	44.68	49.50	74.00	24.50	Pass	H	Peak
6	13647.7098	39.49	8.13	-41.20	45.57	51.99	74.00	22.01	Pass	H	Peak
7	4824.0000	34.50	4.61	-40.65	52.07	50.53	74.00	23.47	Pass	V	Peak
8	7236.0000	36.34	5.79	-40.99	42.88	44.02	74.00	29.98	Pass	V	Peak
9	9648.0000	37.66	6.72	-40.73	41.85	45.50	74.00	28.50	Pass	V	Peak
10	11683.5789	39.05	7.47	-41.32	45.58	50.78	74.00	23.22	Pass	V	Peak
11	14196.7465	39.90	8.65	-41.67	44.53	51.41	74.00	22.59	Pass	V	Peak
12	15869.8580	41.64	10.23	-43.27	44.40	53.00	74.00	21.00	Pass	V	Peak

Mode:		802.11 n (HT20) (6.5Mbps)				Channel:		2437			
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2951.7952	33.12	4.41	-42.15	55.64	51.02	74.00	22.98	Pass	H	Peak
2	3362.0241	33.34	4.53	-41.90	49.49	45.46	74.00	28.54	Pass	H	Peak
3	4874.0000	34.50	4.78	-40.61	51.47	50.14	74.00	23.86	Pass	H	Peak
4	7311.0000	36.41	5.85	-40.93	43.27	44.60	74.00	29.40	Pass	H	Peak
5	9748.0000	37.70	6.77	-40.63	41.16	45.00	74.00	29.00	Pass	H	Peak
6	11673.5782	39.04	7.46	-41.32	45.25	50.43	74.00	23.57	Pass	H	Peak
7	2961.7962	33.14	4.44	-42.15	51.72	47.15	74.00	26.85	Pass	V	Peak
8	4874.0000	34.50	4.78	-40.61	50.59	49.26	74.00	24.74	Pass	V	Peak
9	7311.0000	36.41	5.85	-40.93	44.25	45.58	74.00	28.42	Pass	V	Peak
10	9748.0000	37.70	6.77	-40.63	43.25	47.09	74.00	26.91	Pass	V	Peak
11	12840.6560	39.60	7.89	-41.53	46.51	52.47	74.00	21.53	Pass	V	Peak
12	15664.8443	41.23	9.79	-43.11	45.72	53.63	74.00	20.37	Pass	V	Peak

Mode:		802.11 n (HT20) (6.5Mbps)				Channel:		2462			
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	4924.0000	34.50	4.85	-40.56	50.64	49.43	74.00	24.57	Pass	H	Peak
2	7386.0000	36.49	5.85	-40.87	43.34	44.81	74.00	29.19	Pass	H	Peak
3	9848.0000	37.74	6.83	-40.54	41.14	45.17	74.00	28.83	Pass	H	Peak
4	11703.5802	39.06	7.49	-41.31	46.36	51.60	74.00	22.40	Pass	H	Peak
5	13862.7242	39.62	8.35	-41.25	45.65	52.37	74.00	21.63	Pass	H	Peak
6	16012.8675	41.91	10.09	-43.38	44.60	53.22	74.00	20.78	Pass	H	Peak
7	4924.0000	34.50	4.85	-40.56	50.44	49.23	74.00	24.77	Pass	V	Peak
8	7386.0000	36.49	5.85	-40.87	42.17	43.64	74.00	30.36	Pass	V	Peak
9	9848.0000	37.74	6.83	-40.54	42.01	46.04	74.00	27.96	Pass	V	Peak
10	11596.5731	38.98	7.47	-41.35	44.88	49.98	74.00	24.02	Pass	V	Peak
11	13400.6934	39.44	8.19	-41.27	44.50	50.86	74.00	23.14	Pass	V	Peak
12	15523.8349	40.95	9.37	-43.01	45.74	53.05	74.00	20.95	Pass	V	Peak

Note:

1) Through Pre-scan transmitting mode and charge+transmitter mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40), and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.