

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



Dongguan jinzan intelligent technology co., ltd

PRODUCT SPECIFICATION

Shenzhen beiliqi technology co., ltd

CUSTOMER: _____

3-122DX01010AA-094

CUST P/N: _____

J30-000143-001

K C P/N: _____

20.5*39.5*0.08*80P*11TS-7.7uH $\pm$ 10%

D E S E : _____

2025. 07. 09

D A T E : _____

A. 1

VERSION : _____

ACCEPTANCE STAMP

PREPARED BY	MERCHANDISER	ENGINEER CHECKED BY	APPROVED BY
Hu Yaoyao			

Address: No. 2, Xisha Road, Shijie Town, Dongguan City

Tel: 86-076986018114

Fax:

86-076986015646

Http://www.jzcoil.com

FilNo: KC-JZ-09-008

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Version Change History

CUST P/N:

3-122DX01010AA-094

KC DESE:

20.5*39.5*0.08*80P*11TS-7.7
uH±10%

Rev.	Before Change	DESCRIPTION(Content Or Reason ForChanged)	Date	Revisor
A. 0	---	Initial Release	2024/3/22	LiDongsheng
A. 1	42*0.08H double faced adhesive tape	3M9448A double faced adhesive tape: 42*0.12H	2024/4/26	YanHuilin

PREPARED BY

ENGINEER CHECKED BY

HuYaoyao

LiJin

Address:No.2, Xisha Road, Shijie Town, Dongguan City
86-076986015646

Tel: 86-076986018114 Fax:

Http://www.jzcoil.com

FilNo: KC-JZ-09-008

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification


CUST P/N:

3-122DX01010AA-094

KC DESE:

20.5*39.5*0.08*80P*11TS-7.7
uH $\pm$ 10%

1. OVERALL DIMENSIONS OF PRODUCTS:

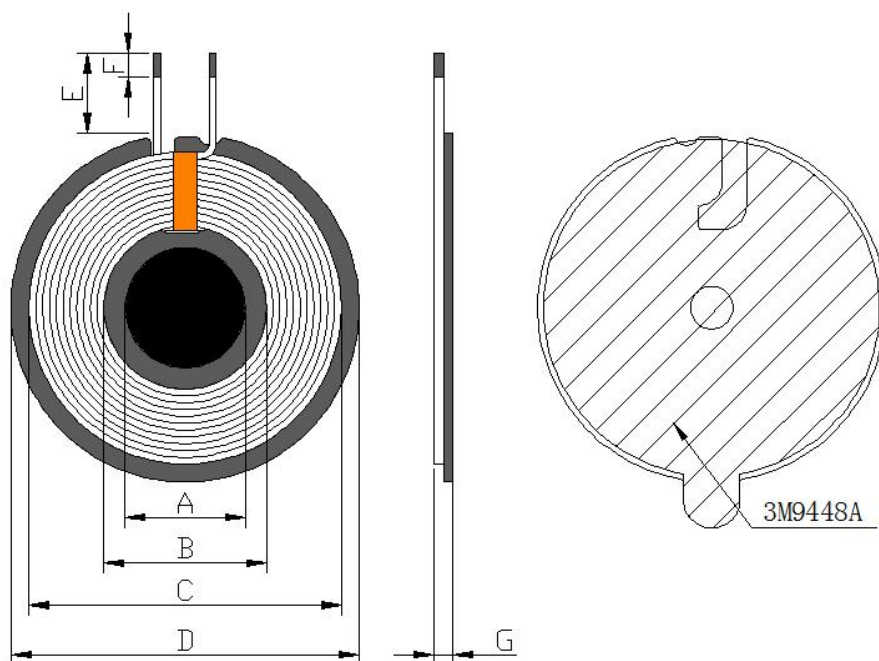

Unit:mm

A	B	C	D	E	F	G
15 $\pm$ 1	20.5 $\pm$ 0.5	39.5 $\pm$ 0.5	43.5 $\pm$ 0.5	10 $\pm$ 1	3 $\pm$ 1	2.3MAX

PS:1. (E) is the length of the magnetic outer lead; 2. (G) Including incoming wire, excluding release paper;

Turns	Wire Dia.	Wdg. Type Spred/Close	Wdg. Direction	Intersect Yes/Not	Coil Positive/Anti Paste
11TS	0.08*80P Hot air stranded wire	Close	Anticlockwise	Yes	Anti/Paste

All materials shall meet ROHS standards.

PREPARED BY	ENGINEER CHECKED BY
HuYaoyao	LiJin

Address:No.2, Xisha Road, Shijie Town, Dongguan City
86-076986015646

Tel: 86-076986018114 Fax:

Http://www.jzcoil.com

FileNo: KC-JZ-09-008

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification

CUST P/N:

3-122DX01010AA-094

KC DESE:

20.5*39.5*0.08*80P*11TS-7.7
uH $\pm$ 10%

2. ELECTRICAL CHARACTERISTICS:

TEMPERATURE: 25 $\pm$ 10 $^{\circ}$ C, RELATIVE HUMIDITY: 65 $\pm$ 10%

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND	S-F	Coil plus magnetic sheet: 7.7uH $\pm$ 10%	100kHz/1V	LCZ METER 1062

3. BILL OF MATERIAIS:

NO.	Material name	Description	Material Code	Vendor code
1	wire rod	0.08*80P Hot air stranded wire	JX-2U-F-0008	CX
2	Large magnetic sheet	G43.5 $\pm$ 0.5*5.3*0.8 (With holes, with double L grooves, with a small groove in the middle of 3 mm.)	GCP-T-00298	HYT
3	Small magnetic disk	Hard magnetic circular 15*0.7H has no holes and slots.	GCP-T-00305	LX
4	Double sided tape	3M double-sided adhesive tape 9448A 42*0.12H with hand tear.	SMJ-3M-00077	HWD
5	Small double-sided adhesive	Circular ordinary double-sided adhesive tape 13*0.08H with hand tear	SMJ-T-0082	HWD
6	glue	JS-E7202 (thickening) white glue	E7202W	HZY
7	tin bar	Environmental protection lead-free solder bar	tin bar	XC
8	Gold finger adhesive tape	5mm	High temperature adhesive tape 5MM	JRM

PREPARED BY

ENGINEER CHECKED BY

HuYaoyao

LiJin

Address: No.2, Xisha Road, Shijie Town, Dongguan City
86-076986015646

Tel: 86-076986018114 Fax:

Http://www.jzcoil.com

FilNo: KC-JZ-09-008