


Band Edge NVNT ax40 2422MHz Ant1 Ref SISO




Band Edge NVNT ax40 2422MHz Ant1 Emission SISO

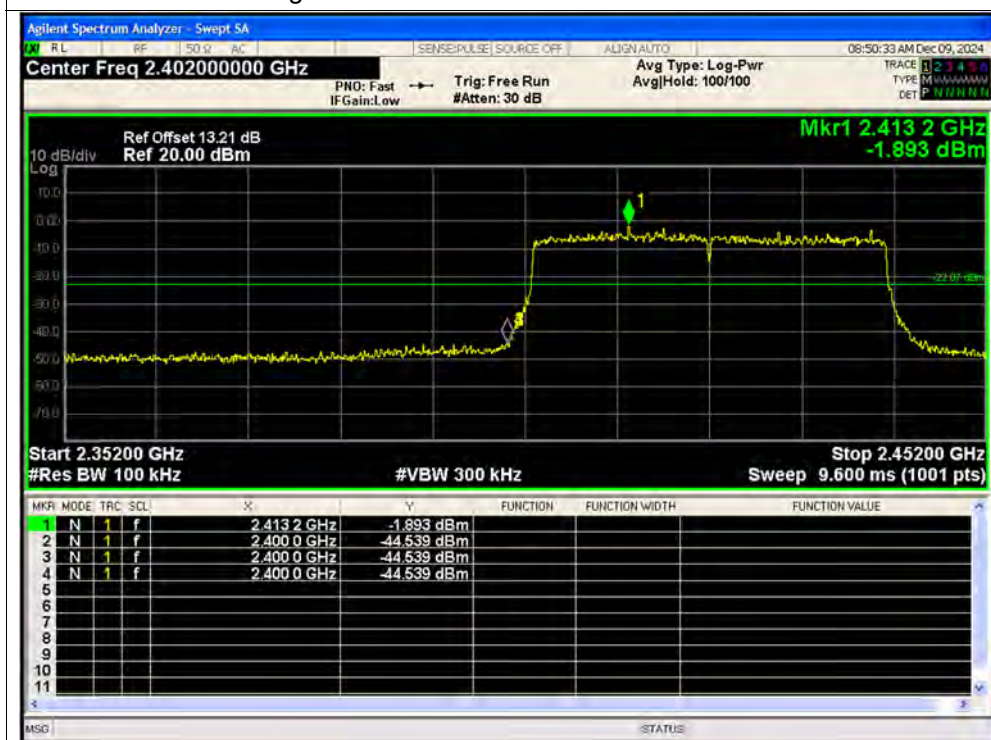


Band Edge NVNT ax40 2452MHz Ant1 Ref SISO




Band Edge NVNT ax40 2452MHz Ant1 Emission SISO

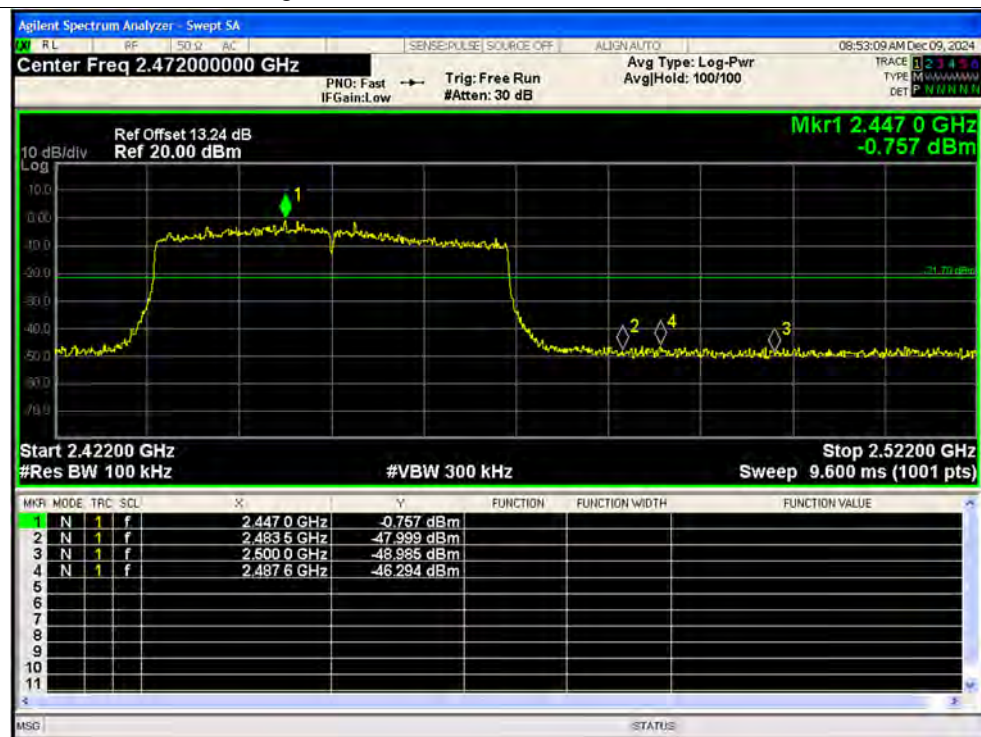

Band Edge NVNT ax40 2422MHz Ant2 Ref SISO

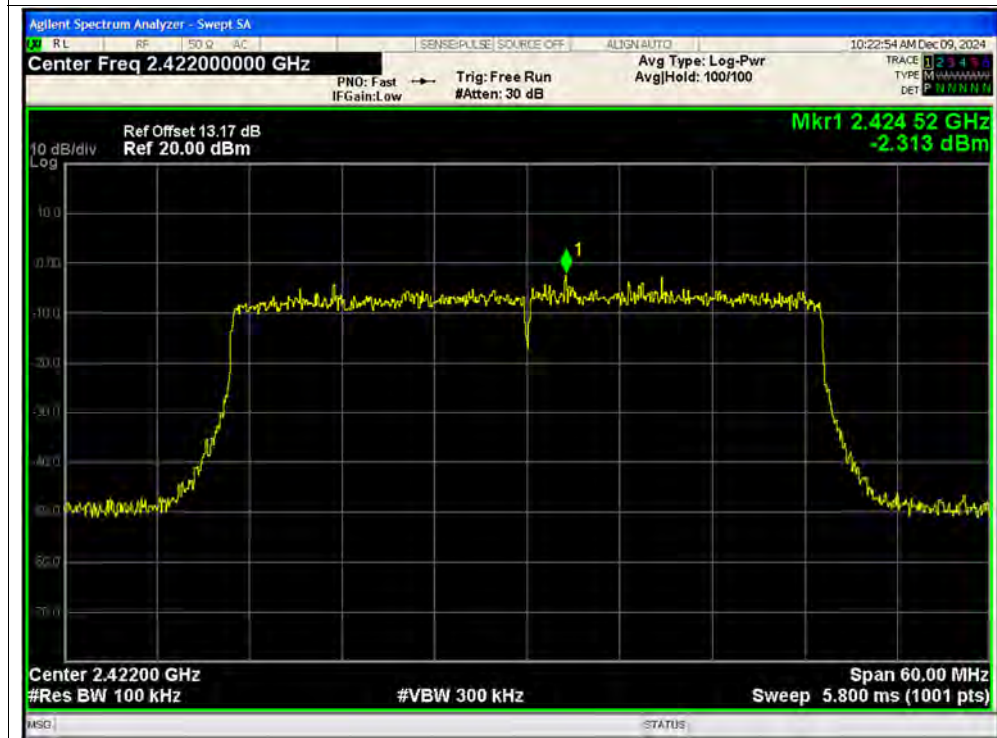


Band Edge NVNT ax40 2422MHz Ant2 Emission SISO

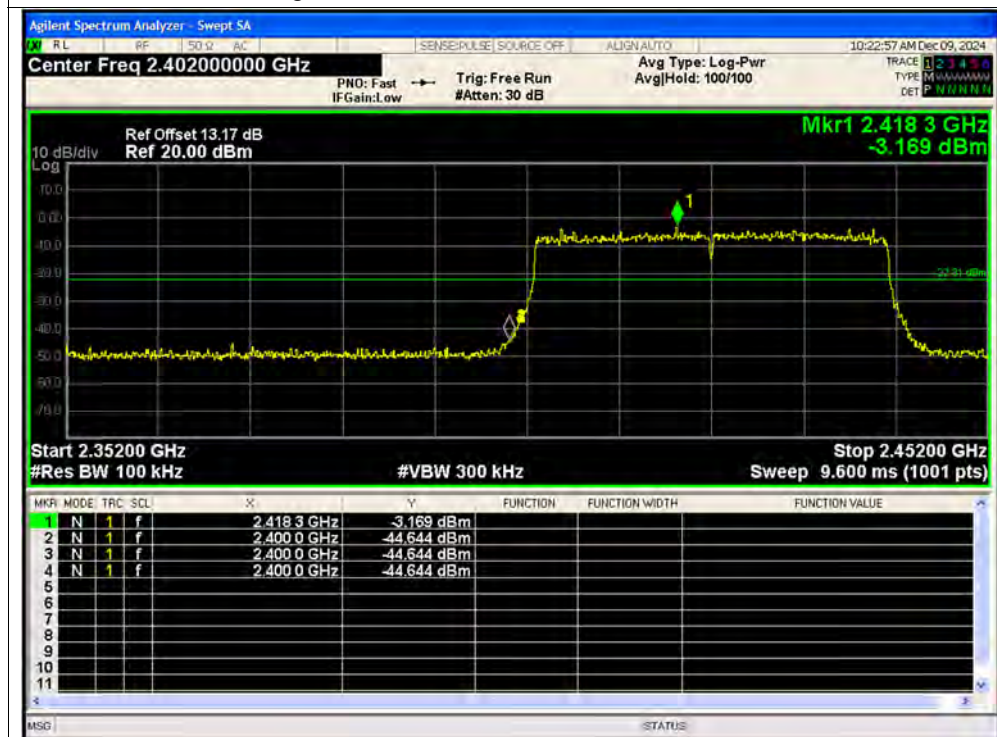

Band Edge NVNT ax40 2452MHz Ant2 Ref SISO




Band Edge NVNT ax40 2452MHz Ant2 Emission SISO

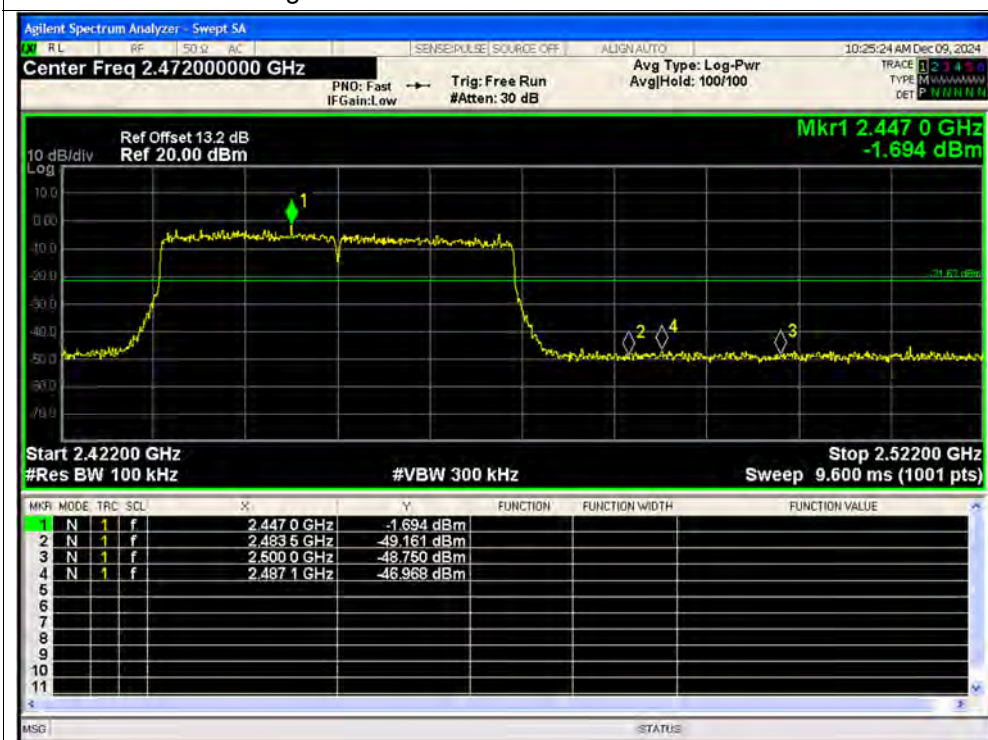

Band Edge NVNT ax40 2422MHz Ant1 Ref MIMO




Band Edge NVNT ax40 2422MHz Ant1 Emission MIMO

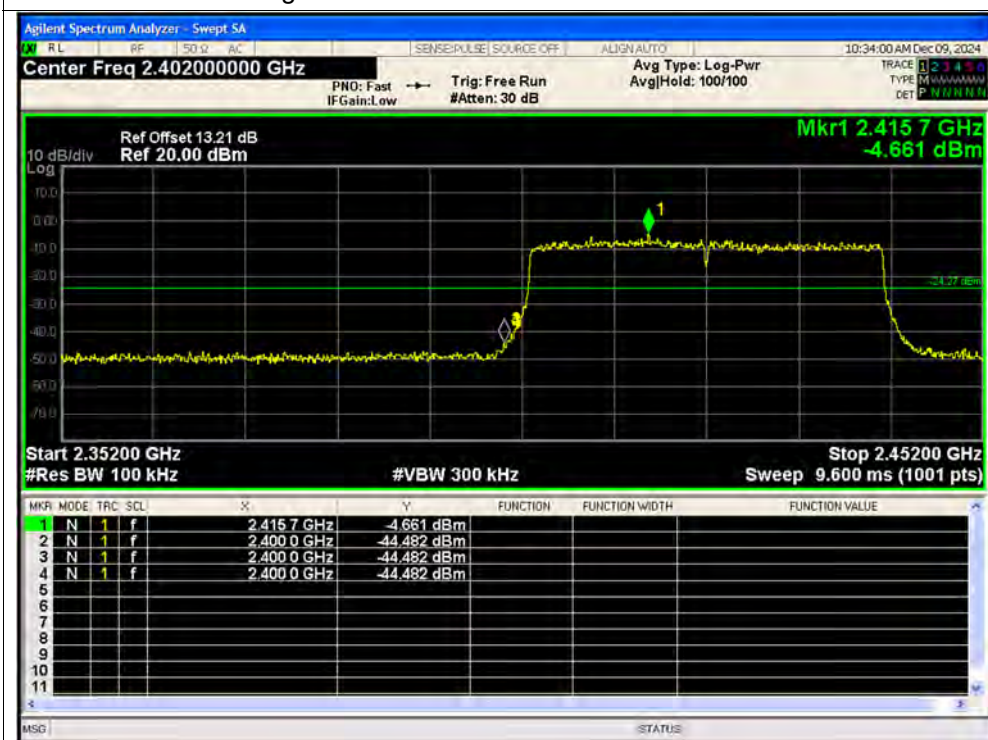

Band Edge NVNT ax40 2422MHz Ant2 Ref MIMO




Band Edge NVNT ax40 2422MHz Ant2 Emission MIMO

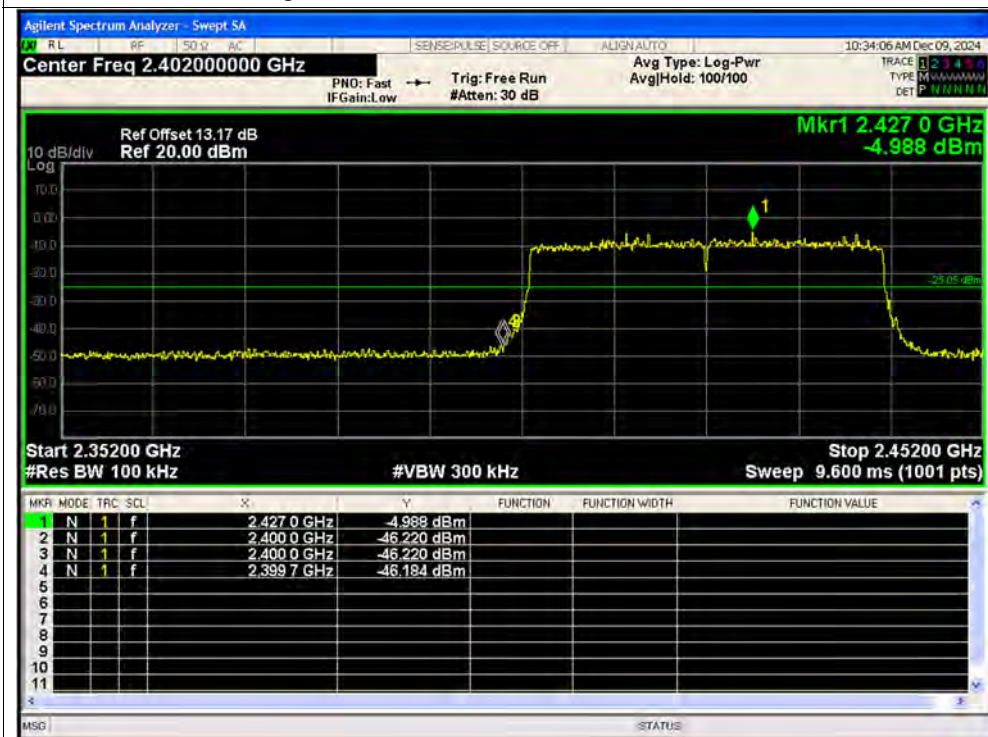

Band Edge NVNT ax40 2452MHz Ant1 Ref MIMO




Band Edge NVNT ax40 2452MHz Ant1 Emission MIMO

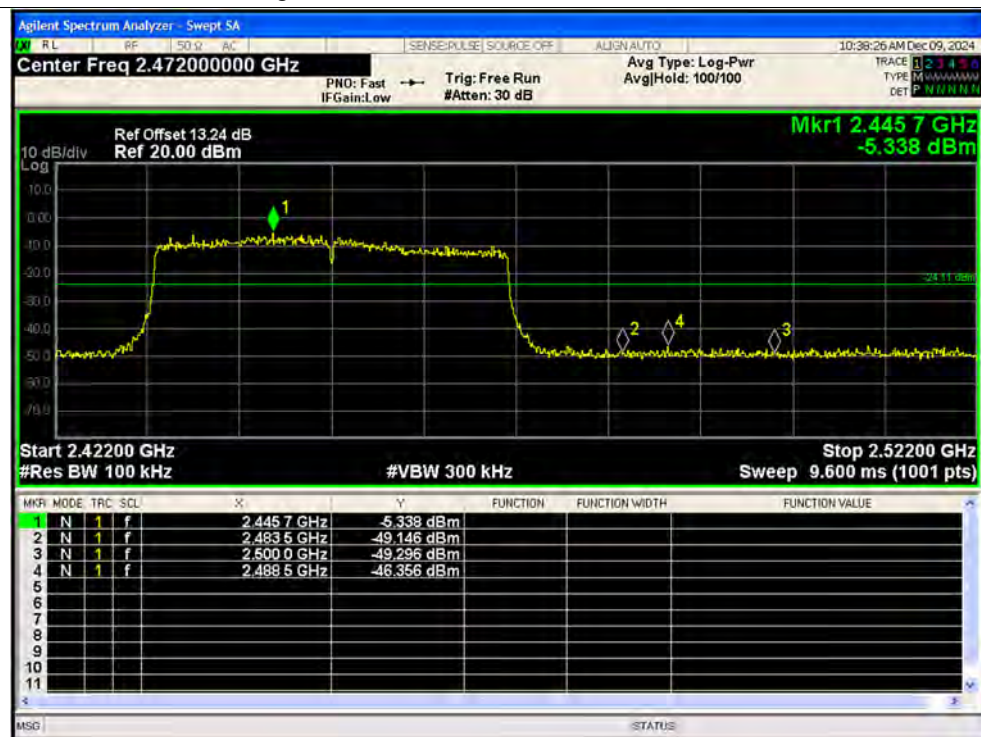

Band Edge NVNT ax40 2452MHz Ant2 Ref MIMO



Band Edge NVNT ax40 2452MHz Ant2 Emission MIMO

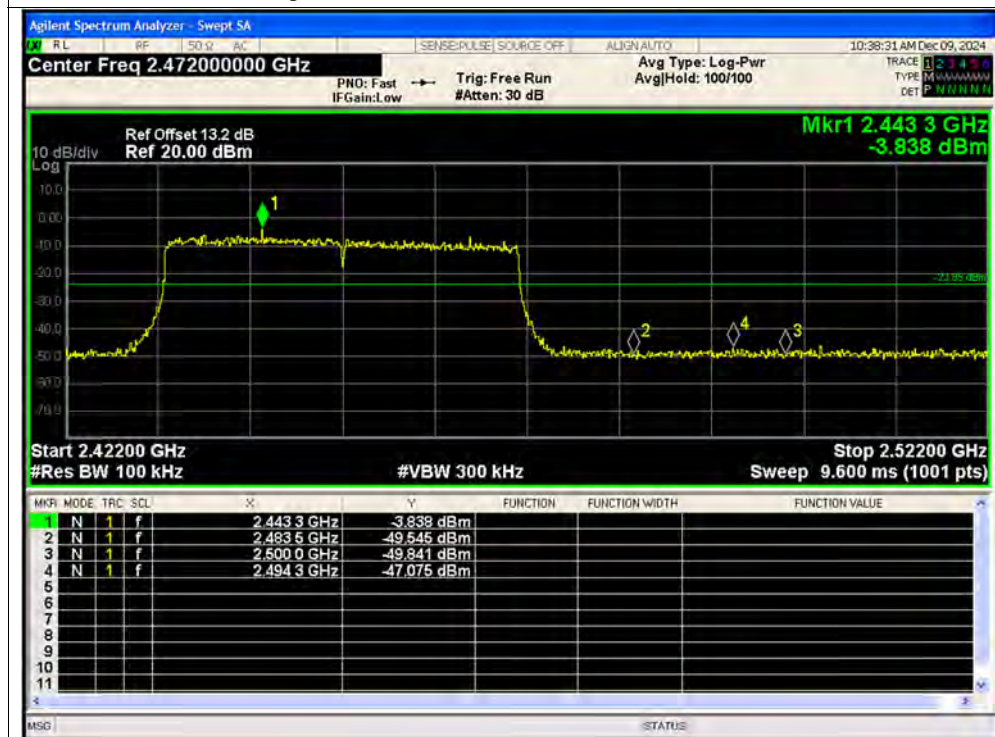

**A.7. Power Spectral Density**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b SISO	2412	Ant1	-3.68	0	-3.68	8	Pass
NVNT	b SISO	2437	Ant1	-5.5	0	-5.5	8	Pass
NVNT	b SISO	2462	Ant1	-3.33	0	-3.33	8	Pass
NVNT	b SISO	2412	Ant2	-3.61	0	-3.61	8	Pass
NVNT	b SISO	2437	Ant2	-6.38	0	-6.38	8	Pass
NVNT	b SISO	2462	Ant2	-7.35	0	-7.35	8	Pass
NVNT	g SISO	2412	Ant1	-10.9	0	-10.9	8	Pass
NVNT	g SISO	2437	Ant1	-10.78	0	-10.78	8	Pass
NVNT	g SISO	2462	Ant1	-10.13	0	-10.13	8	Pass
NVNT	g SISO	2412	Ant2	-10.83	0	-10.83	8	Pass
NVNT	g SISO	2437	Ant2	-11.88	0	-11.88	8	Pass
NVNT	g SISO	2462	Ant2	-12.26	0	-12.26	8	Pass
NVNT	n20 SISO	2412	Ant1	-12.4	0	-12.4	8	Pass
NVNT	n20 SISO	2437	Ant1	-12.46	0	-12.46	8	Pass
NVNT	n20 SISO	2462	Ant1	-11.83	0	-11.83	8	Pass
NVNT	n20 SISO	2412	Ant2	-12.21	0	-12.21	8	Pass
NVNT	n20 SISO	2437	Ant2	-12.1	0	-12.1	8	Pass
NVNT	n20 SISO	2462	Ant2	-13.34	0	-13.34	8	Pass
NVNT	n20 MIMO	2412	Ant1	-13.76	0	-13.76	8	Pass
NVNT	n20 MIMO	2412	Ant2	-14.16	0	-14.16	8	Pass
NVNT	n20 MIMO	2412	Sum	-10.95	0	-10.95	8	Pass
NVNT	n20 MIMO	2437	Ant1	-14.24	0	-14.24	8	Pass
NVNT	n20 MIMO	2437	Ant2	-13.98	0	-13.98	8	Pass
NVNT	n20 MIMO	2437	Sum	-11.1	0	-11.1	8	Pass
NVNT	n20 MIMO	2462	Ant1	-14.84	0	-14.84	8	Pass
NVNT	n20 MIMO	2462	Ant2	-14.38	0	-14.38	8	Pass
NVNT	n20 MIMO	2462	Sum	-11.59	0	-11.59	8	Pass
NVNT	n40 SISO	2422	Ant1	-14.08	0	-14.08	8	Pass
NVNT	n40 SISO	2437	Ant1	-15.06	0	-15.06	8	Pass
NVNT	n40 SISO	2452	Ant1	-13.65	0	-13.65	8	Pass
NVNT	n40 SISO	2422	Ant2	-14.55	0	-14.55	8	Pass
NVNT	n40 SISO	2437	Ant2	-15.28	0	-15.28	8	Pass
NVNT	n40 SISO	2452	Ant2	-13.46	0	-13.46	8	Pass
NVNT	n40 MIMO	2422	Ant1	-16.56	0	-16.56	8	Pass



NVNT	n40 MIMO	2422	Ant2	-16.99	0	-16.99	8	Pass
NVNT	n40 MIMO	2422	Sum	-13.76	0	-13.76	8	Pass
NVNT	n40 MIMO	2437	Ant1	-16.1	0	-16.1	8	Pass
NVNT	n40 MIMO	2437	Ant2	-16.97	0	-16.97	8	Pass
NVNT	n40 MIMO	2437	Sum	-13.5	0	-13.5	8	Pass
NVNT	n40 MIMO	2452	Ant1	-15.29	0	-15.29	8	Pass
NVNT	n40 MIMO	2452	Ant2	-16.01	0	-16.01	8	Pass
NVNT	n40 MIMO	2452	Sum	-12.62	0	-12.62	8	Pass
NVNT	ax20 SISO	2412	Ant1	-15.28	0	-15.28	8	Pass
NVNT	ax20 SISO	2437	Ant1	-14.25	0	-14.25	8	Pass
NVNT	ax20 SISO	2462	Ant1	-14.83	0	-14.83	8	Pass
NVNT	ax20 SISO	2412	Ant2	-15.71	0	-15.71	8	Pass
NVNT	ax20 SISO	2437	Ant2	-14.18	0	-14.18	8	Pass
NVNT	ax20 SISO	2462	Ant2	-15.81	0	-15.81	8	Pass
NVNT	ax20 MIMO	2412	Ant1	-16.96	0	-16.96	8	Pass
NVNT	ax20 MIMO	2412	Ant2	-17.48	0	-17.48	8	Pass
NVNT	ax20 MIMO	2412	Sum	-14.2	0	-14.2	8	Pass
NVNT	ax20 MIMO	2437	Ant1	-17.57	0	-17.57	8	Pass
NVNT	ax20 MIMO	2437	Ant2	-18	0	-18	8	Pass
NVNT	ax20 MIMO	2437	Sum	-14.77	0	-14.77	8	Pass
NVNT	ax20 MIMO	2462	Ant1	-17.65	0	-17.65	8	Pass
NVNT	ax20 MIMO	2462	Ant2	-18.33	0	-18.33	8	Pass
NVNT	ax20 MIMO	2462	Sum	-14.97	0	-14.97	8	Pass
NVNT	ax40 SISO	2422	Ant1	-18.17	0	-18.17	8	Pass
NVNT	ax40 SISO	2437	Ant1	-17.28	0	-17.28	8	Pass
NVNT	ax40 SISO	2452	Ant1	-16.43	0	-16.43	8	Pass
NVNT	ax40 SISO	2422	Ant2	-18.39	0	-18.39	8	Pass
NVNT	ax40 SISO	2437	Ant2	-18.37	0	-18.37	8	Pass
NVNT	ax40 SISO	2452	Ant2	-17.14	0	-17.14	8	Pass
NVNT	ax40 MIMO	2422	Ant1	-19.19	0	-19.19	8	Pass
NVNT	ax40 MIMO	2422	Ant2	-20.82	0	-20.82	8	Pass
NVNT	ax40 MIMO	2422	Sum	-16.92	0	-16.92	8	Pass
NVNT	ax40 MIMO	2437	Ant1	-19.82	0	-19.82	8	Pass
NVNT	ax40 MIMO	2437	Ant2	-20.78	0	-20.78	8	Pass
NVNT	ax40 MIMO	2437	Sum	-17.26	0	-17.26	8	Pass
NVNT	ax40 MIMO	2452	Ant1	-19.23	0	-19.23	8	Pass
NVNT	ax40 MIMO	2452	Ant2	-19.44	0	-19.44	8	Pass
NVNT	ax40 MIMO	2452	Sum	-16.32	0	-16.32	8	Pass

Test Graphs

PSD NVNT b 2412MHz Ant1 SISO



PSD NVNT b 2437MHz Ant1 SISO



PSD NVNT b 2462MHz Ant1 SISO



PSD NVNT b 2412MHz Ant2 SISO



PSD NVNT b 2437MHz Ant2 SISO



PSD NVNT b 2462MHz Ant2 SISO



PSD NVNT g 2412MHz Ant1 SISO



PSD NVNT g 2437MHz Ant1 SISO



PSD NVNT g 2462MHz Ant1 SISO



PSD NVNT g 2412MHz Ant2 SISO




PSD NVNT g 2437MHz Ant2 SISO




PSD NVNT g 2462MHz Ant2 SISO



PSD NVNT n20 2412MHz Ant1 SISO

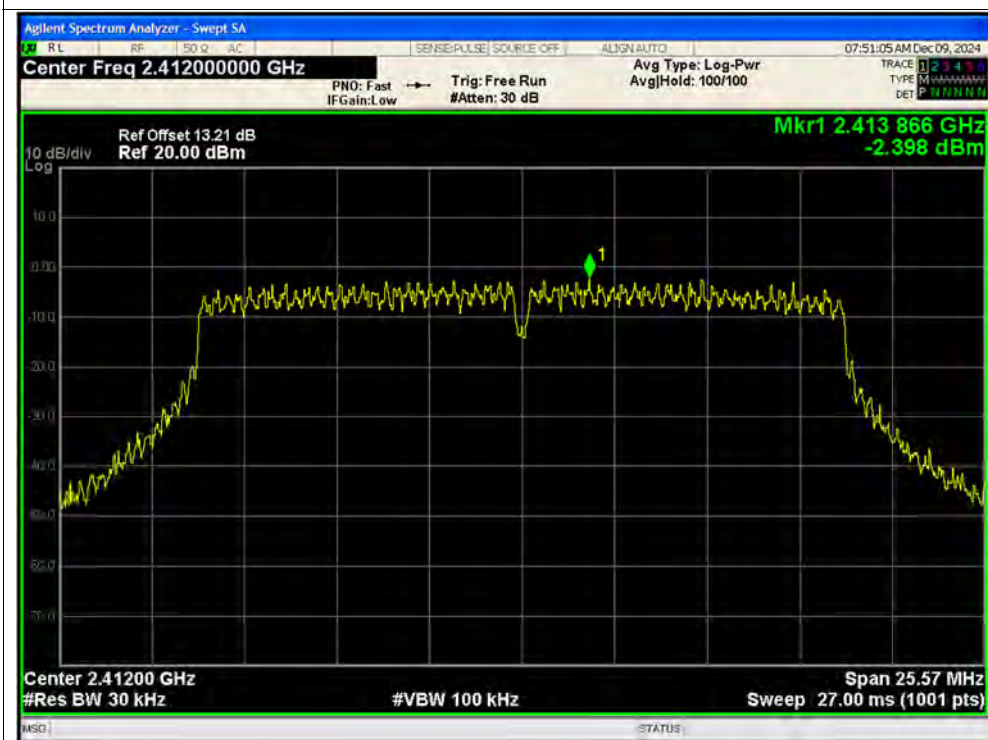


PSD NVNT n20 2437MHz Ant1 SISO

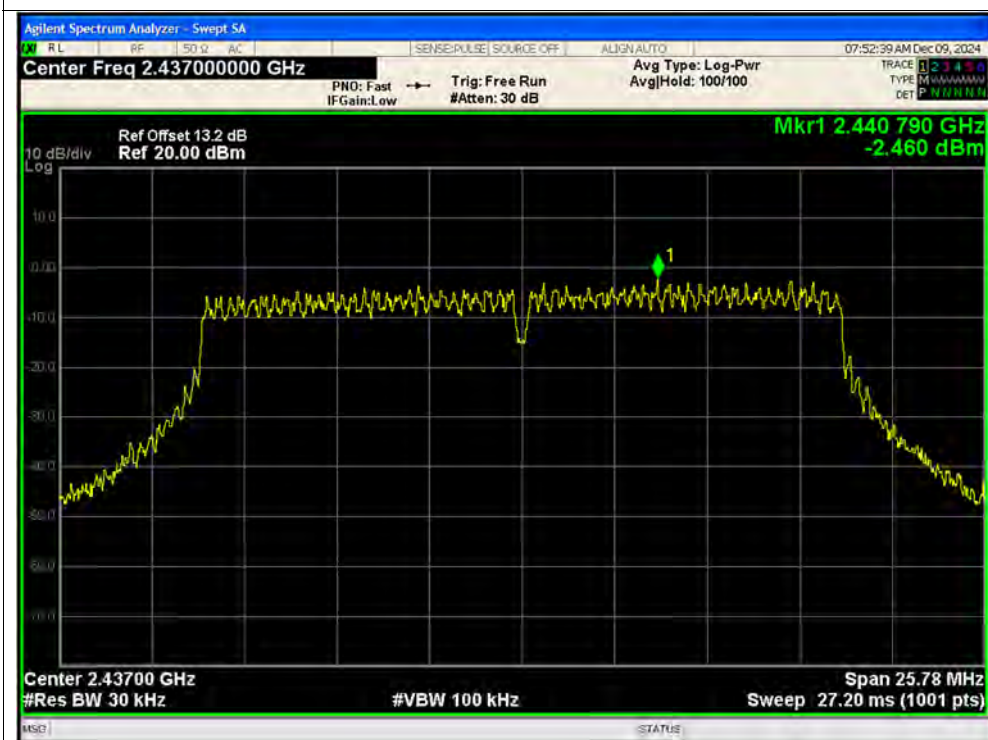

PSD NVNT n20 2462MHz Ant1 SISO



PSD NVNT n20 2412MHz Ant2 SISO

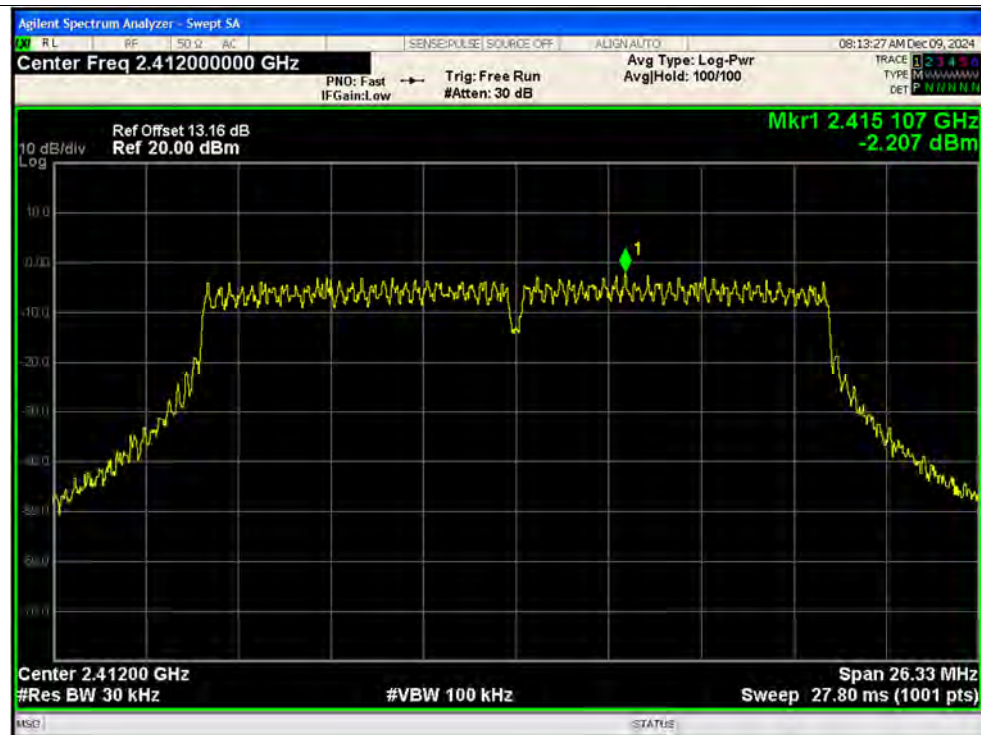

PSD NVNT n20 2437MHz Ant2 SISO




PSD NVNT n20 2462MHz Ant2 SISO



PSD NVNT n20 2412MHz Ant1 MIMO



PSD NVNT n20 2412MHz Ant2 MIMO

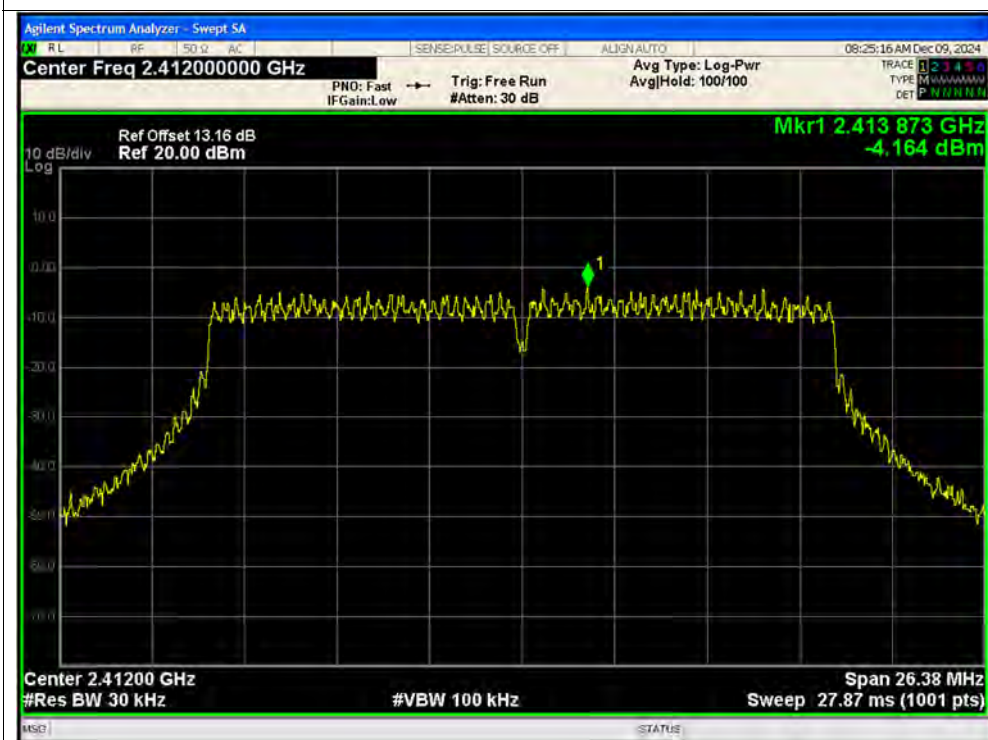



PSD NVNT n20 2437MHz Ant1 MIMO



PSD NVNT n20 2437MHz Ant2 MIMO




PSD NVNT n20 2462MHz Ant1 MIMO




PSD NVNT n20 2462MHz Ant2 MIMO



PSD NVNT n40 2422MHz Ant1 SISO

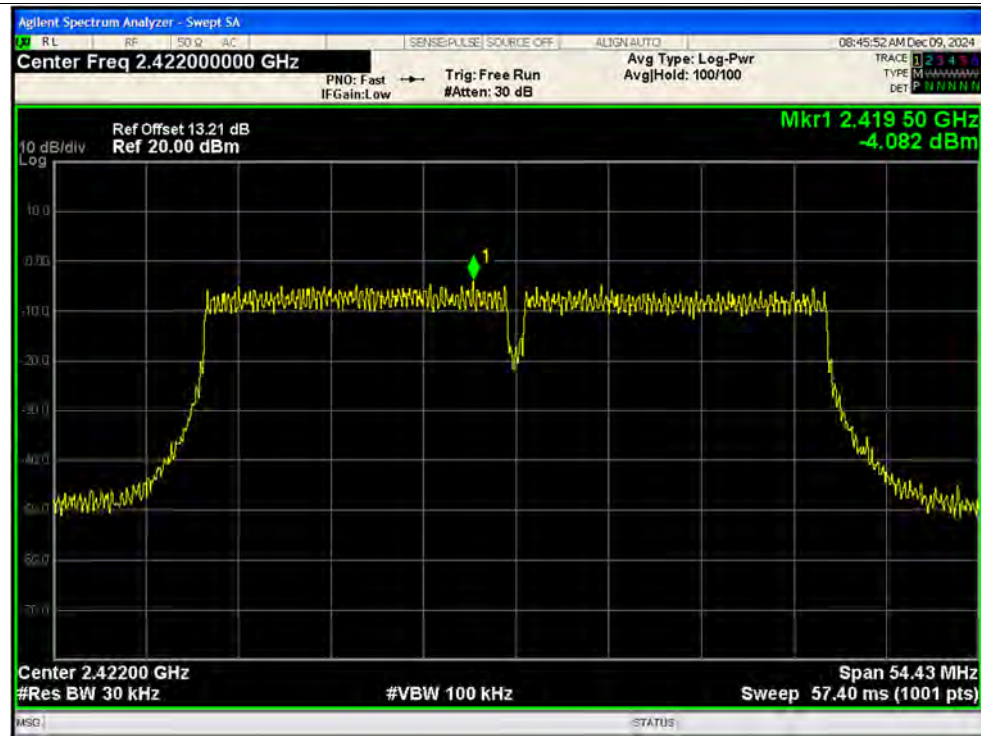

PSD NVNT n40 2437MHz Ant1 SISO

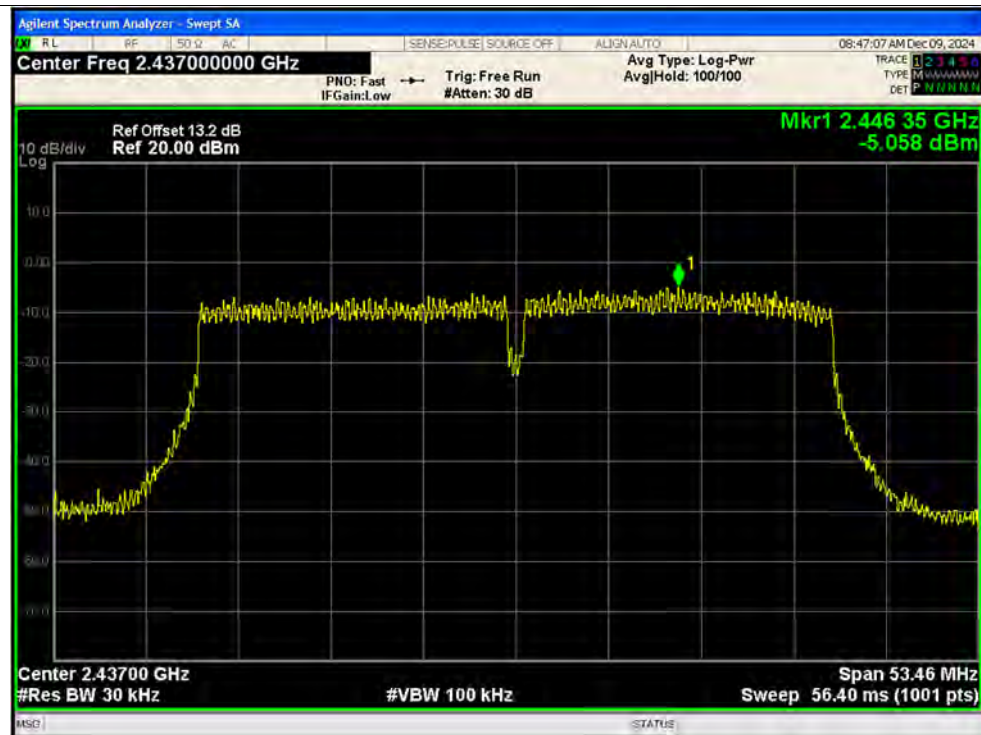



PSD NVNT n40 2452MHz Ant1 SISO



PSD NVNT n40 2422MHz Ant2 SISO





PSD NVNT n40 2437MHz Ant2 SISO




PSD NVNT n40 2452MHz Ant2 SISO



PSD NVNT n40 2422MHz Ant1 MIMO




PSD NVNT n40 2422MHz Ant2 MIMO

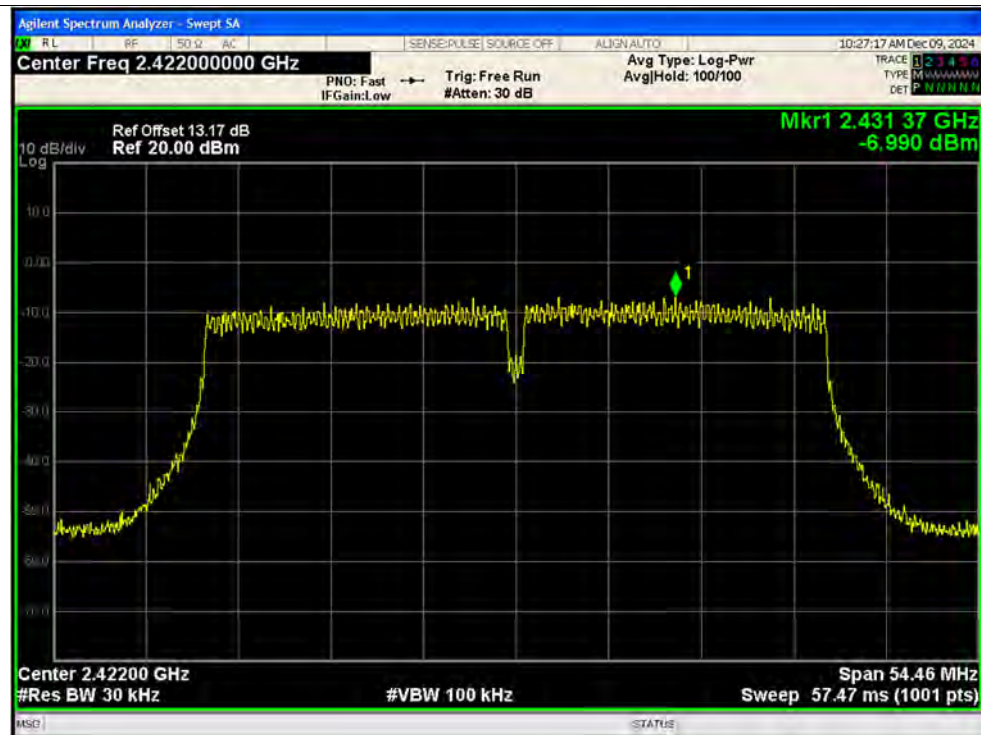

PSD NVNT n40 2437MHz Ant1 MIMO



PSD NVNT n40 2437MHz Ant2 MIMO

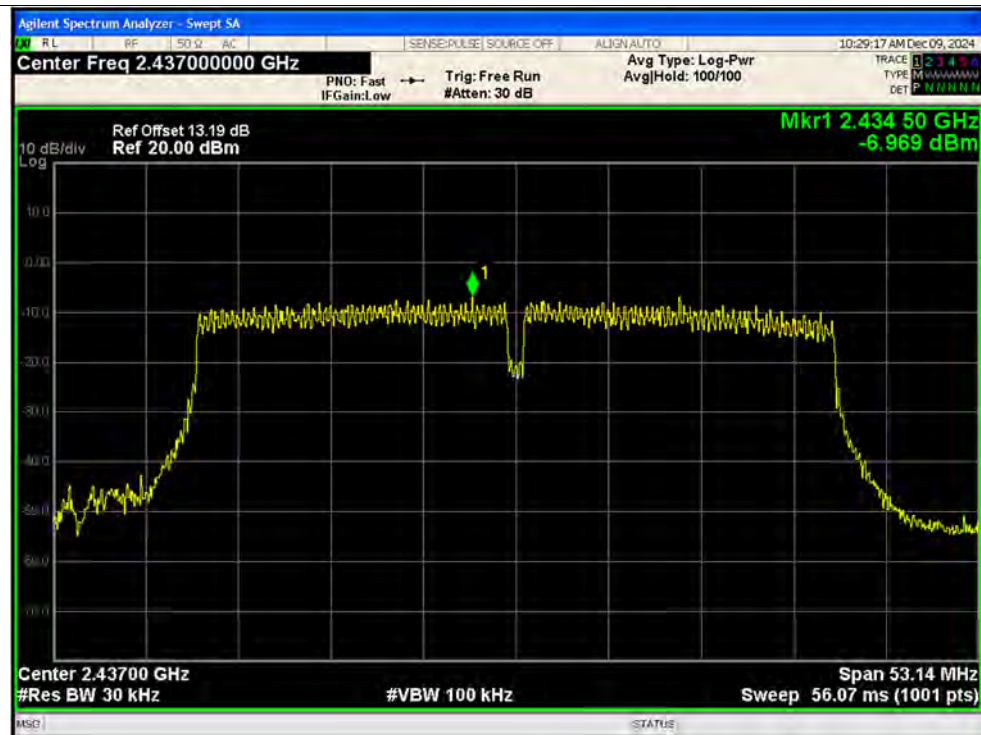

PSD NVNT n40 2452MHz Ant1 MIMO



PSD NVNT n40 2452MHz Ant2 MIMO



PSD NVNT ax20 2412MHz Ant1 SISO




PSD NVNT ax20 2437MHz Ant1 SISO




PSD NVNT ax20 2462MHz Ant1 SISO



PSD NVNT ax20 2412MHz Ant2 SISO

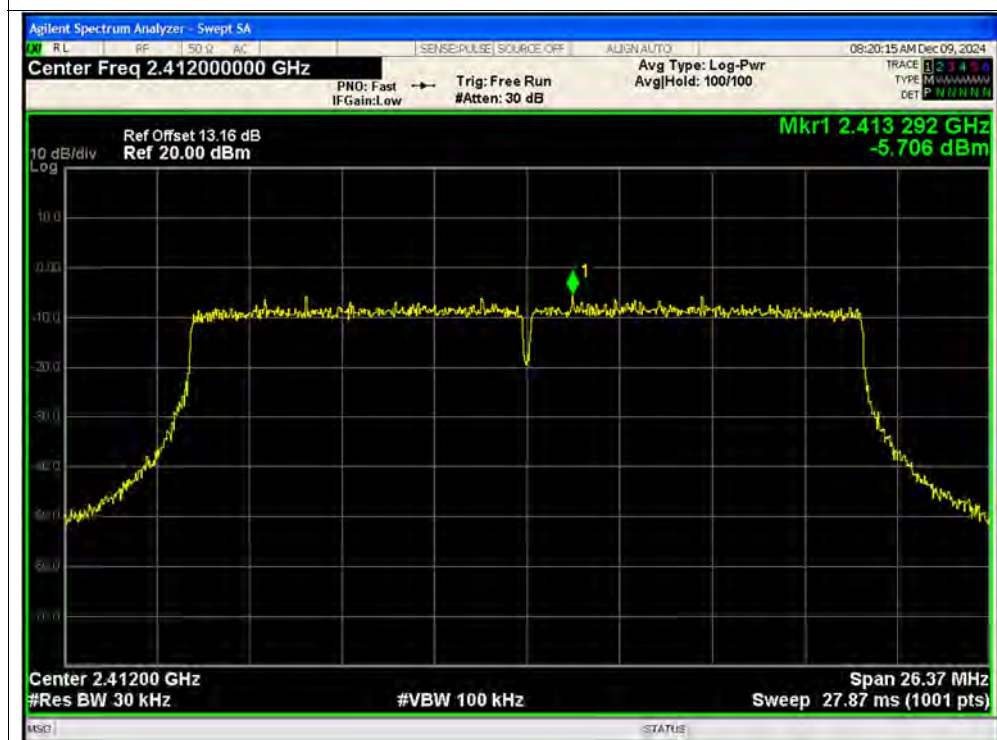

PSD NVNT ax20 2437MHz Ant2 SISO

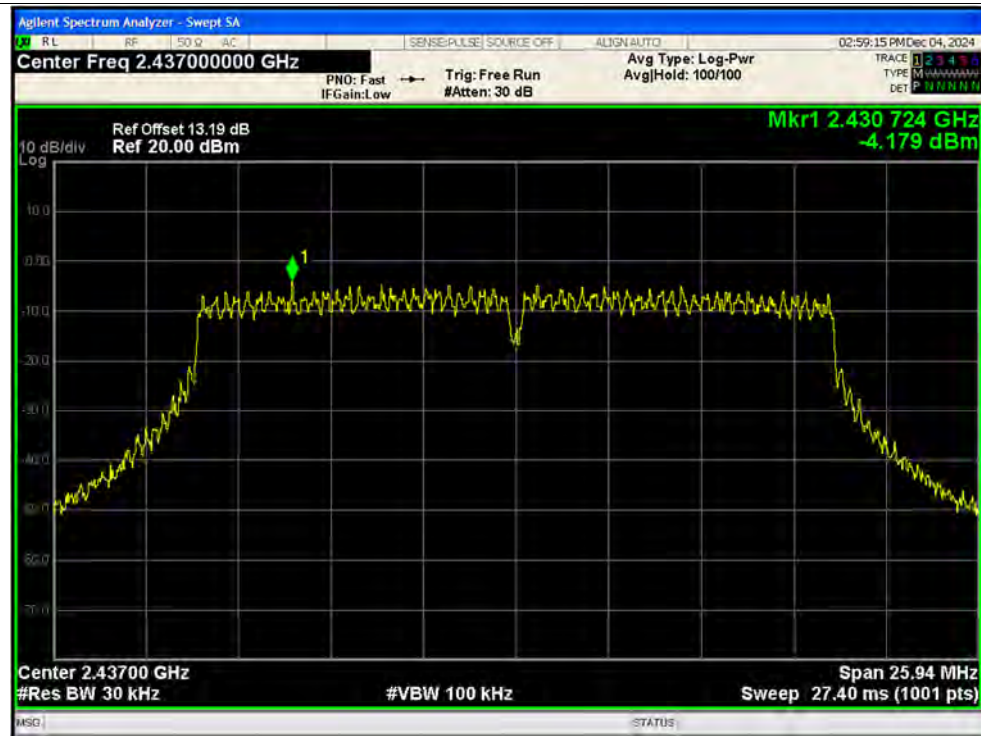

PSD NVNT ax20 2462MHz Ant2 SISO



PSD NVNT ax20 2412MHz Ant1 MIMO



PSD NVNT ax20 2412MHz Ant2 MIMO



PSD NVNT ax20 2437MHz Ant1 MIMO



PSD NVNT ax20 2437MHz Ant2 MIMO



PSD NVNT ax20 2462MHz Ant1 MIMO



PSD NVNT ax20 2462MHz Ant2 MIMO



PSD NVNT ax40 2422MHz Ant1 SISO



PSD NVNT ax40 2437MHz Ant1 SISO



PSD NVNT ax40 2452MHz Ant1 SISO



PSD NVNT ax40 2422MHz Ant2 SISO



PSD NVNT ax40 2437MHz Ant2 SISO



PSD NVNT ax40 2452MHz Ant2 SISO



PSD NVNT ax40 2422MHz Ant1 MIMO



PSD NVNT ax40 2422MHz Ant2 MIMO



PSD NVNT ax40 2437MHz Ant1 MIMO



PSD NVNT ax40 2437MHz Ant2 MIMO



PSD NVNT ax40 2452MHz Ant1 MIMO



PSD NVNT ax40 2452MHz Ant2 MIMO





A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + Adapter + USB Cable + WIFI TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

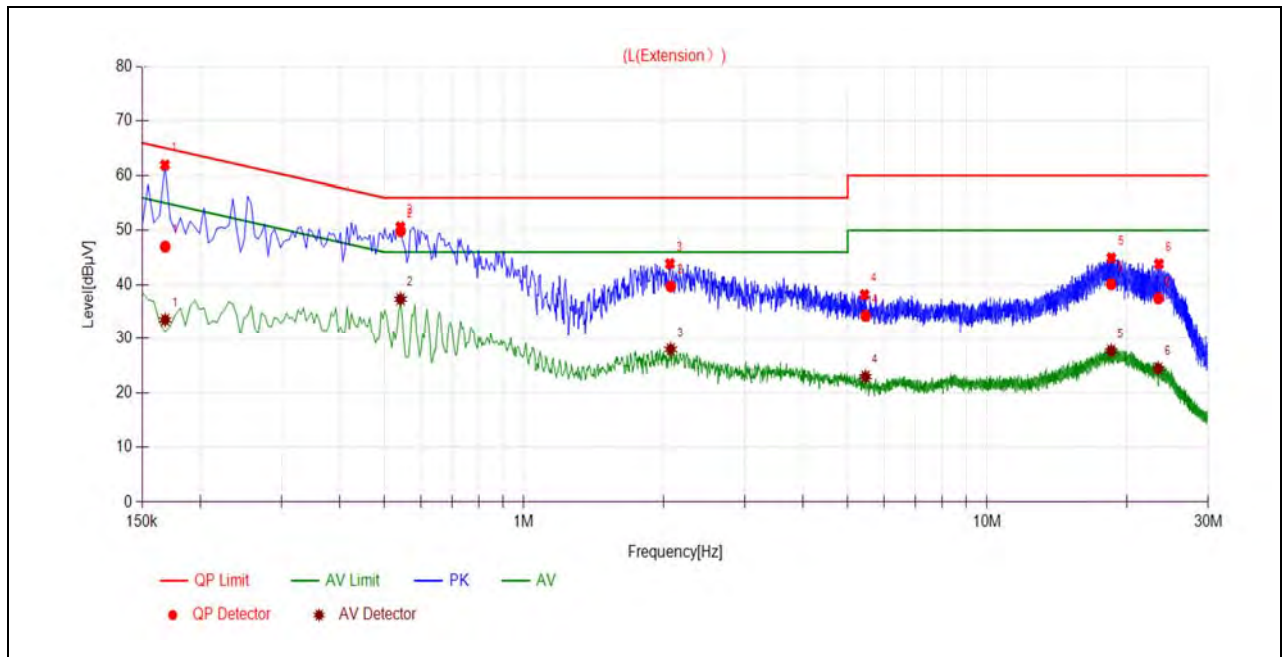

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1682	47.02	33.52	65.05	55.05	Line	PASS
2	0.5418	49.88	37.35	56.00	46.00		PASS
3	2.0743	39.69	27.95	56.00	46.00		PASS
4	5.4635	34.28	22.93	60.00	50.00		PASS
5	18.5222	40.09	27.69	60.00	50.00		PASS
6	23.4196	37.50	24.42	60.00	50.00		PASS

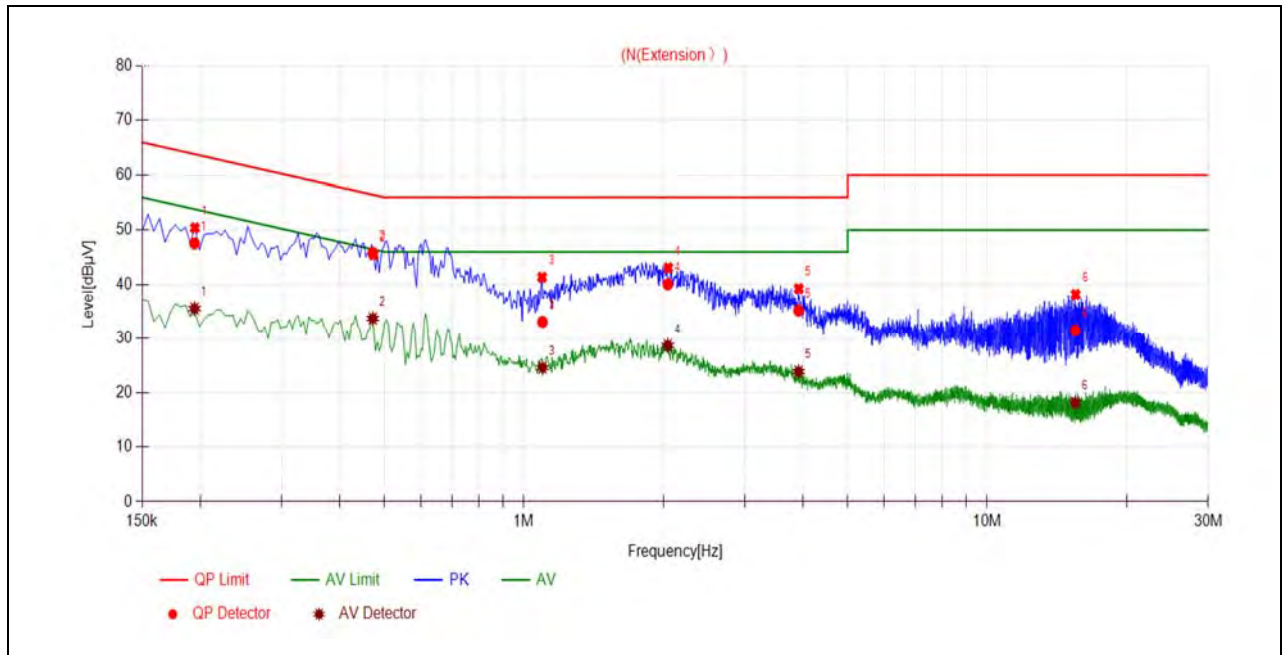

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1946	47.58	35.59	63.84	53.84	Neutral	PASS
2	0.4720	45.83	33.76	56.48	46.48		PASS
3	1.0970	33.14	24.57	56.00	46.00		PASS
4	2.0450	40.06	28.70	56.00	46.00		PASS
5	3.9163	35.23	23.86	56.00	46.00		PASS
6	15.4964	31.53	18.12	60.00	50.00		PASS



A.9. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note 1: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (horizontal) was recorded in this test report.

Note 2: Restricted Frequency Bands were performed in X, Y, Z axis direction, and only the worst axis (X axis) test condition was recorded in this test report.


Note 3: All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.

802.11b Mode

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2381.65	PK	23.62	7.20	28.80	59.62	74	PASS
1	2389.82	AV	11.39	7.20	28.80	47.39	54	PASS
13	2484.12	PK	23.44	7.20	28.80	59.44	74	PASS
13	2483.50	AV	11.22	7.20	28.80	47.22	54	PASS

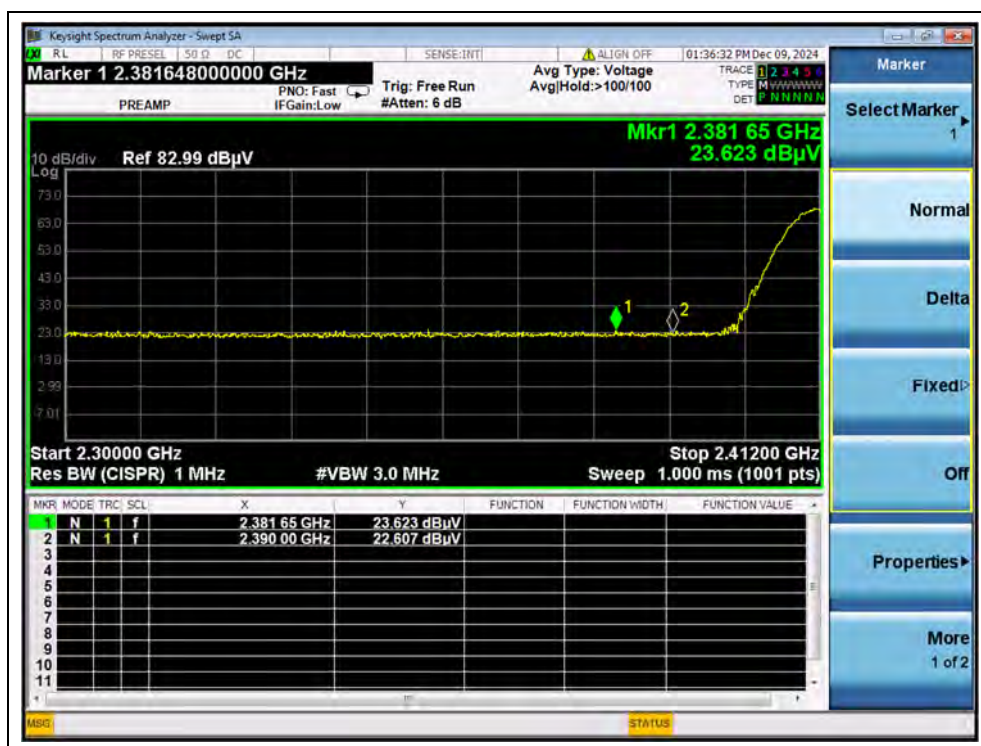

(PEAK, Channel 1, 802.11b)

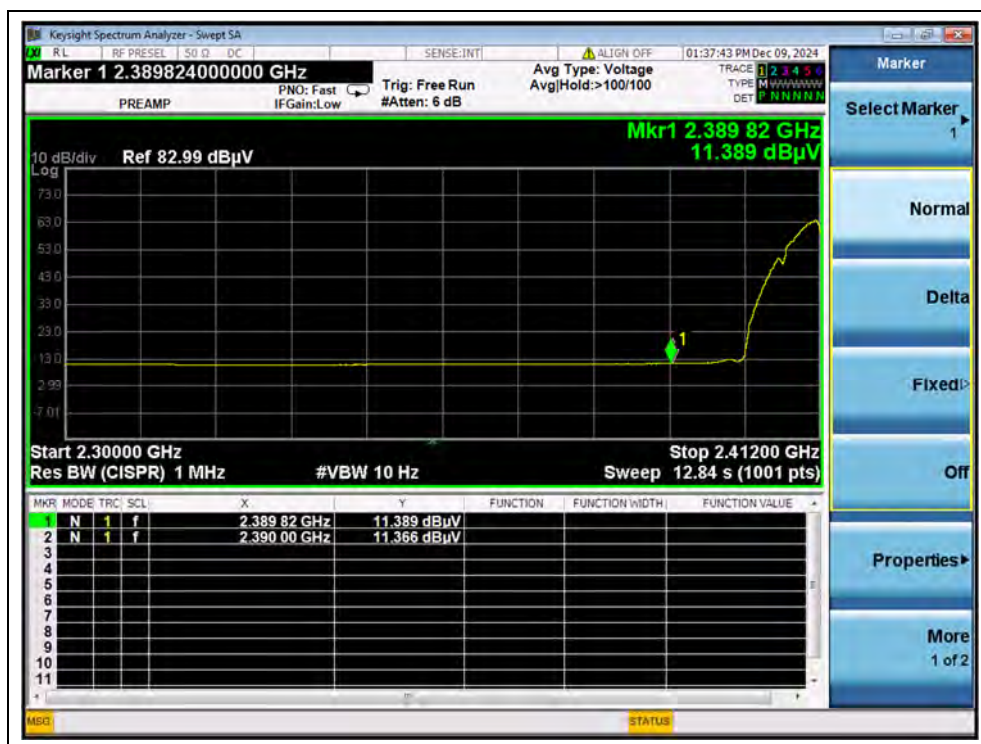

(AVERAGE, Channel 1, 802.11b)




(PEAK, Channel 13, 802.11b)




(AVERAGE, Channel 13, 802.11b)

**802.11n (HT40) Mode**

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
3	2389.05	PK	25.99	7.20	28.80	61.99	74	PASS
3	2388.94	AV	13.72	7.20	28.80	49.72	54	PASS
11	2485.41	PK	23.59	7.20	28.80	59.59	74	PASS
11	2483.73	AV	11.34	7.20	28.80	47.34	54	PASS

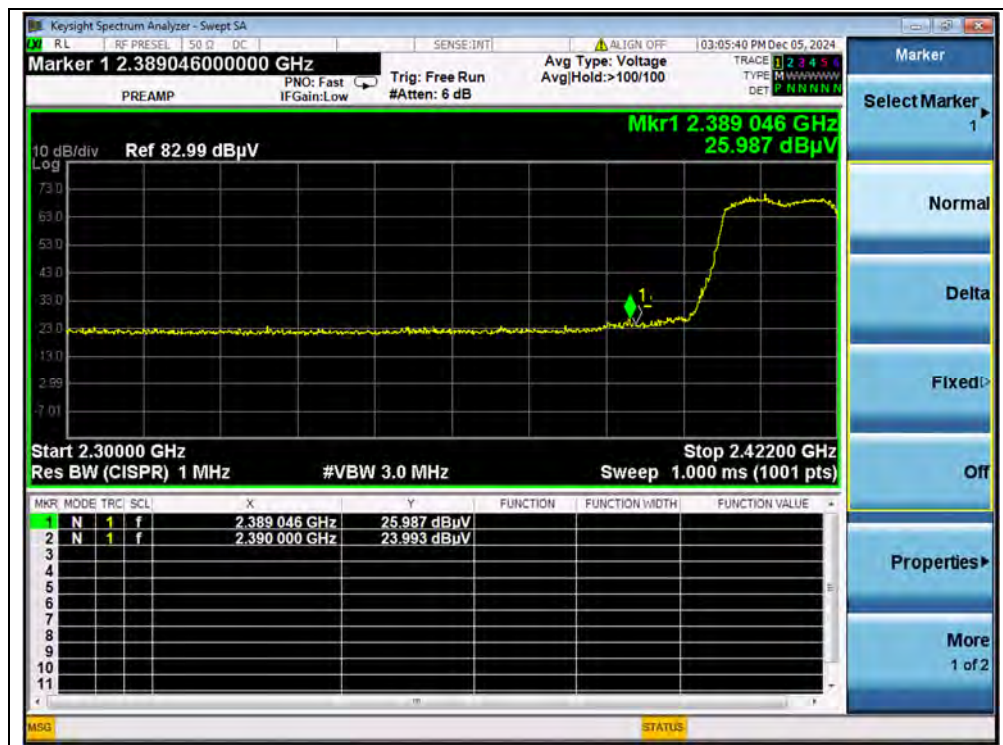


(PEAK, Channel 3, 802.11n (HT40))

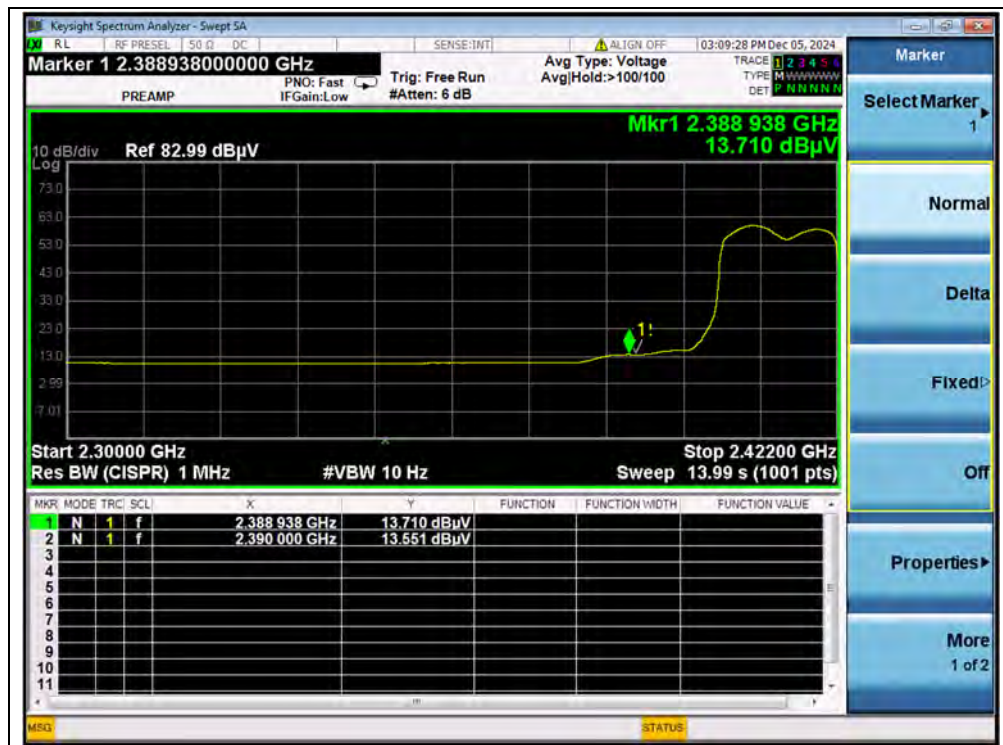

(AVERAGE, Channel 3, 802.11n (HT40))



(PEAK, Channel 11, 802.11n (HT40))

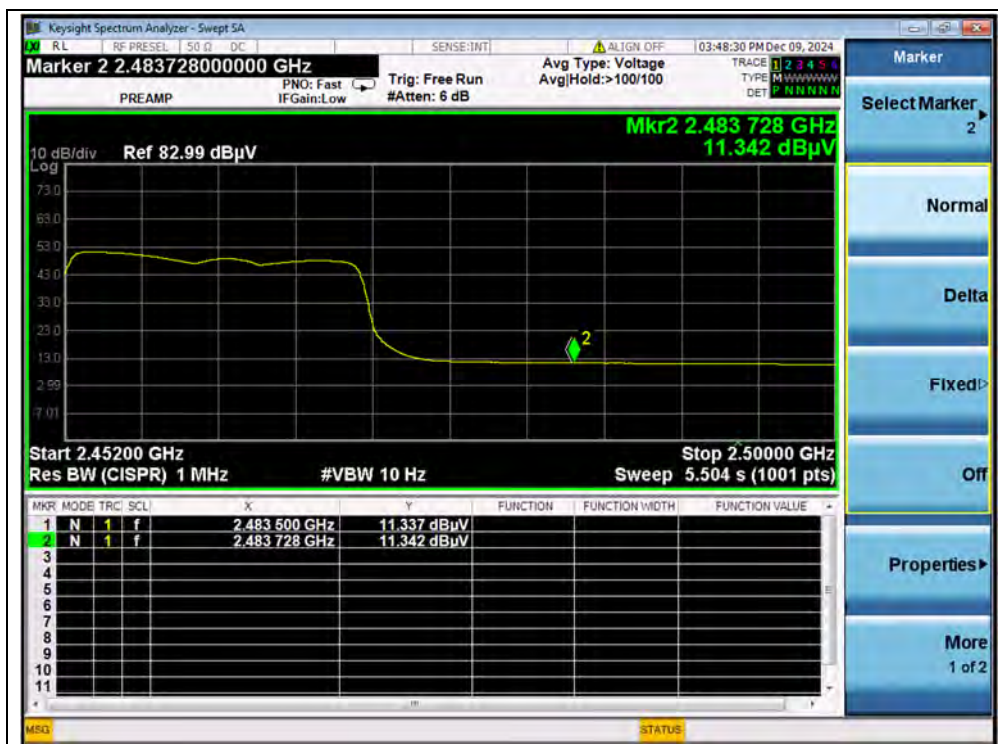


(AVERAGE, Channel 11, 802.11n (HT40))




802.11ax (HEW40) Mode

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
3	2387.35	PK	24.57	7.20	28.80	60.57	74	PASS
3	2390.00	AV	11.27	7.20	28.80	47.27	54	PASS
11	2487.62	PK	24.23	7.20	28.80	60.23	74	PASS
11	2483.50	AV	11.42	7.20	28.80	47.42	54	PASS

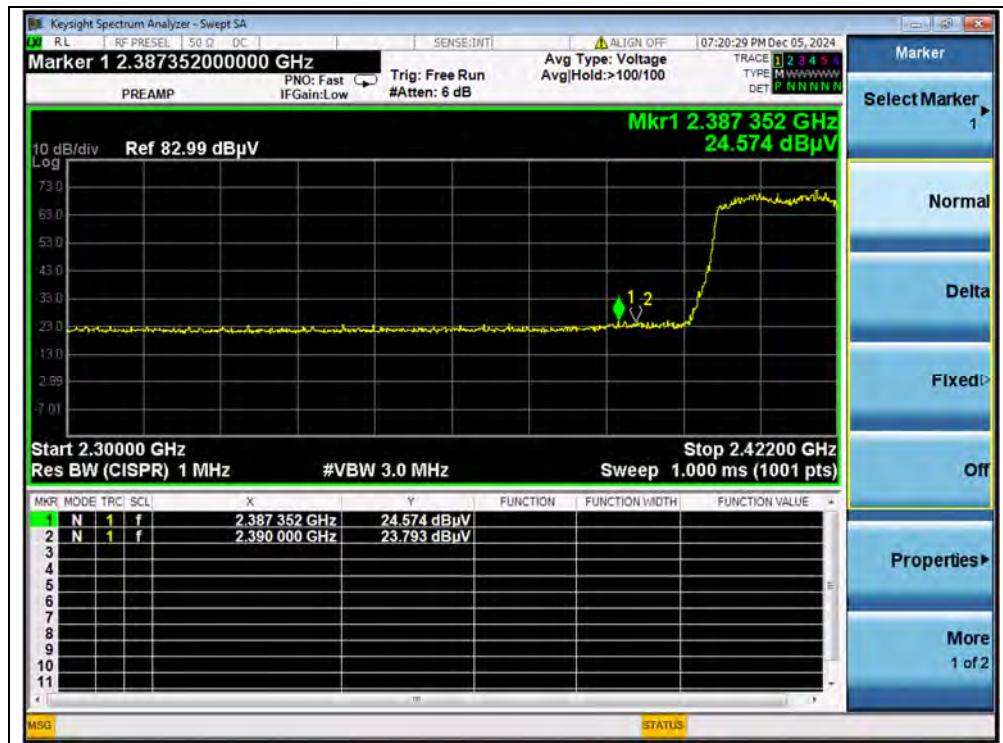


(PEAK, Channel 3, 802.11ax (HEW40))

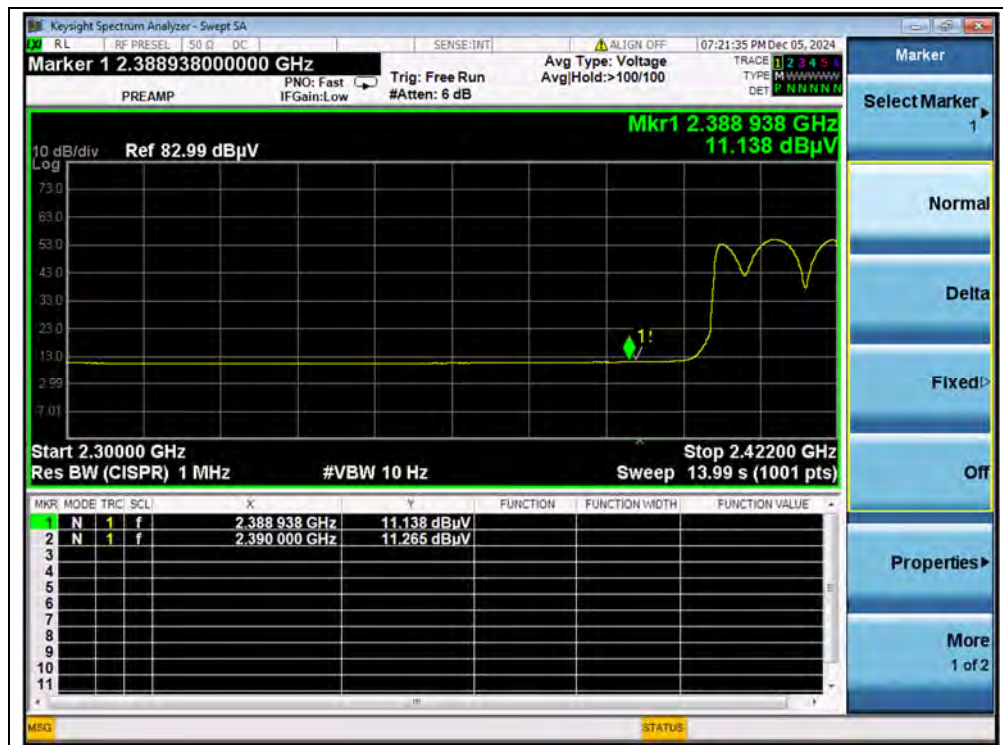

(AVERAGE, Channel 3, 802.11ax (HEW40))



(PEAK, Channel 11, 802.11ax (HEW40))

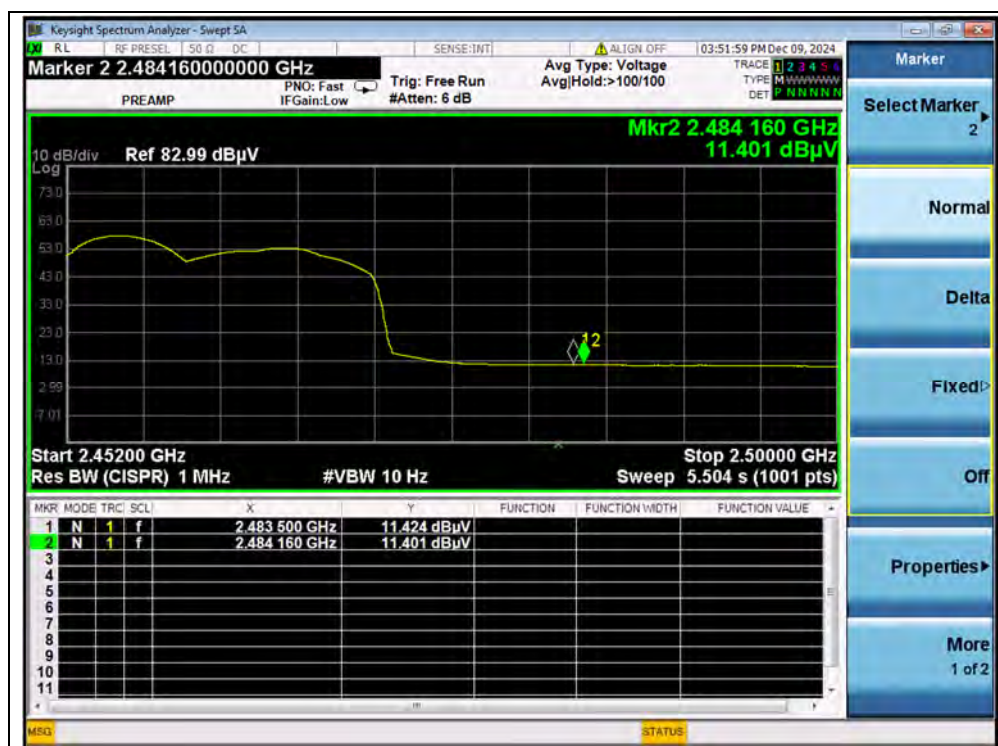

(AVERAGE, Channel 11, 802.11ax (HEW40))





A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis (X axis) test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 4: All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded.


Field strength of fundamental:

Frequency (MHz)	Reading_Peak (dB μ V/m)	Path Loss (dB)	Antenna Factor (dB)	Final_Peak (dB μ V/m)	Antenna Polarity
2412.90	71.18	7.20	28.80	107.18	Horizontal

The field strength (the lowest) of fundamenta is more than 20dB higher than the unwanted emissions, in accordance with FCC part 15.215(b).


**802.11b Mode**

Plot for Channel 1

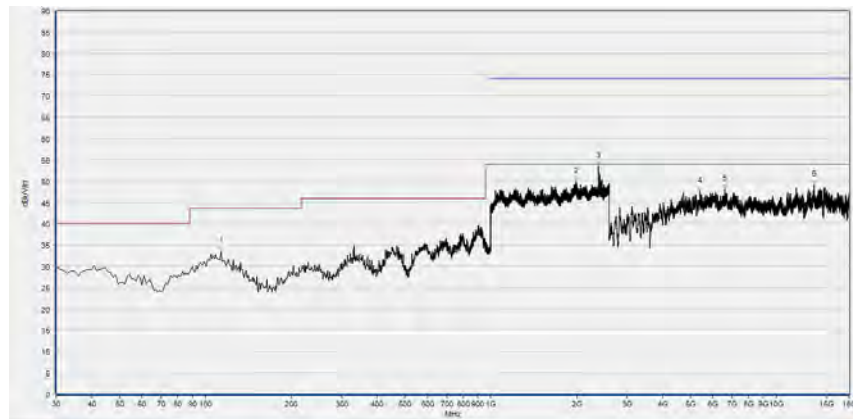

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
113.420	33.47	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1994.667	49.80	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2385.067	53.45	N/A	46.16	74.00	N/A	54.00	Horizontal	PASS
5390.480	47.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6585.520	48.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13543.240	49.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

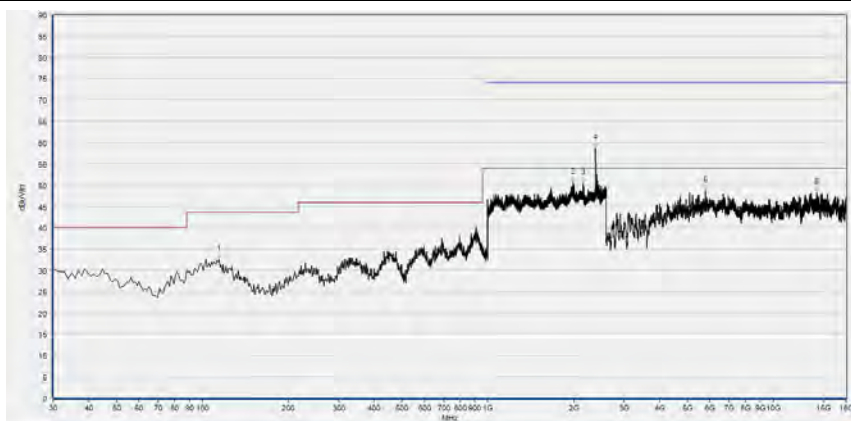

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
114.390	32.55	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1993.067	50.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2160.533	50.49	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2385.067	58.63	N/A	52.76	74.00	N/A	54.00	Vertical	PASS
5787.800	48.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14183.880	48.29	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 6

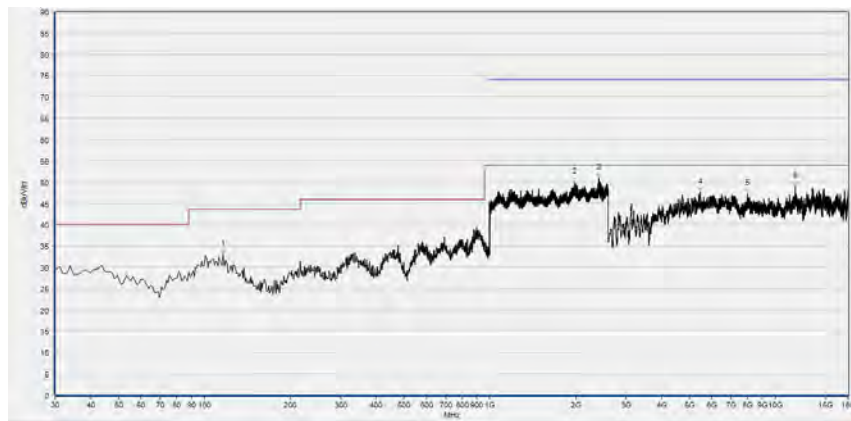

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
116.330	33.04	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1977.600	50.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2410.133	50.91	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5473.640	47.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8002.320	47.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11778.400	48.99	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

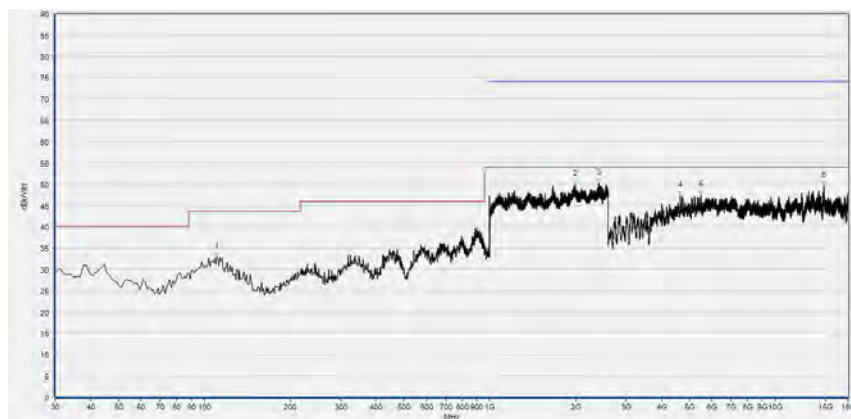


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	32.90	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1996.800	49.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2414.400	50.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4657.440	47.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5479.800	47.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14821.440	49.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 11

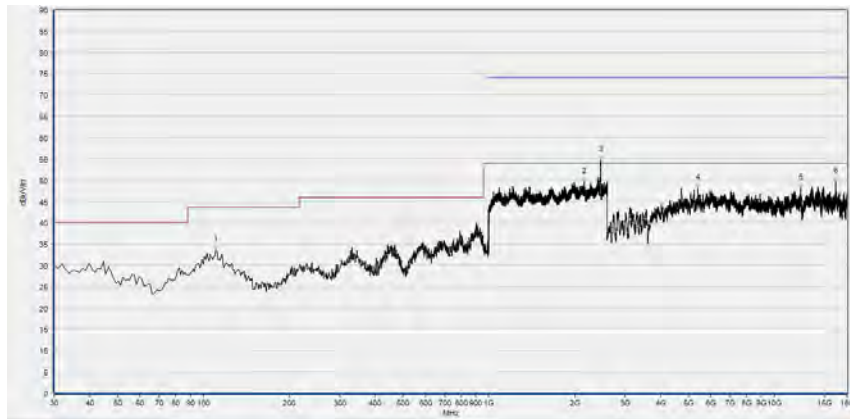

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	33.47	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2156.267	49.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2463.467	54.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5402.800	48.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12403.640	48.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16407.640	49.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

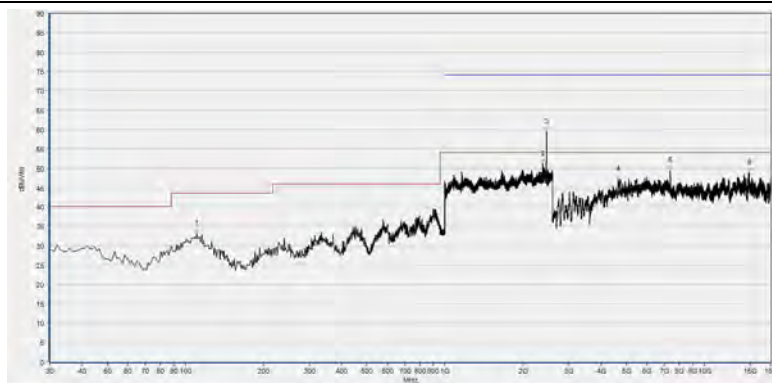

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	33.13	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2386.133	51.03	N/A	39.21	74.00	N/A	54.00	Vertical	PASS
2464.000	59.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4657.440	47.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7386.320	49.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14843.000	48.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT