

## 使用说明书

TWS-P3



立体声分体式无线耳机

敲击控制

蓝牙版本 5.0



### 包装明细

蓝牙耳机 2 个

耳机充电仓 1 个


USB 充电线 1 条

硅胶耳帽 3 套

使用说明书 1 份

### 产品示意图

充电盒

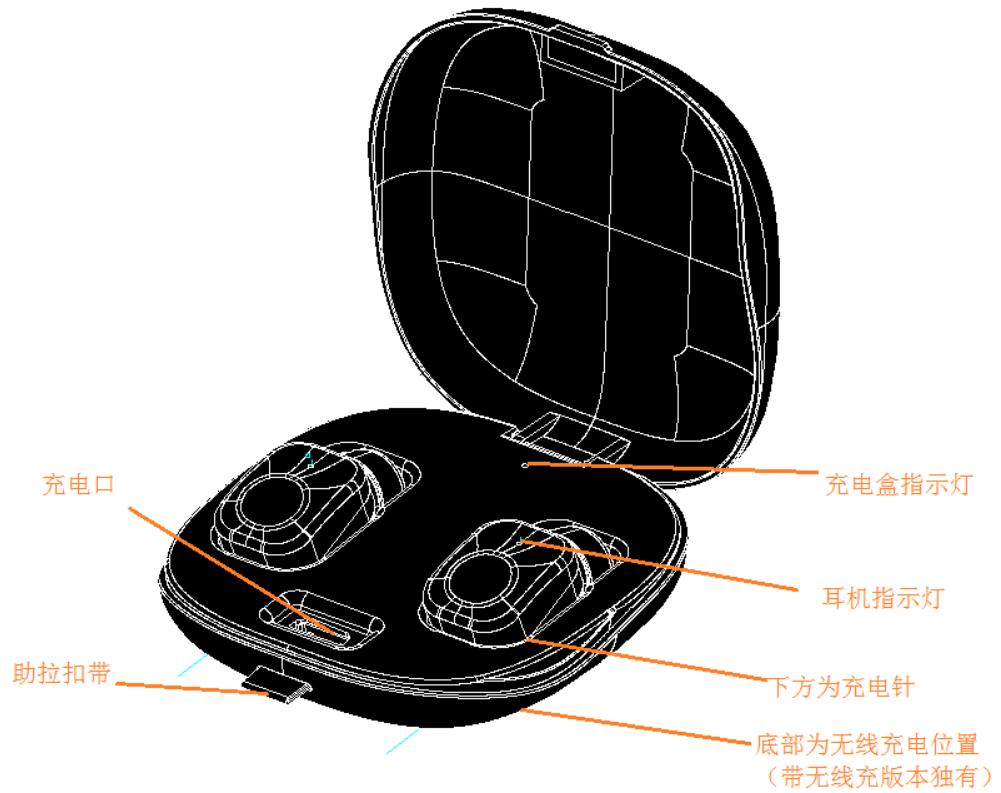

耳机

### 佩戴耳机

如下图将耳机轻轻塞入耳朵，并轻轻摇摆头部耳机不晃动为宜



## 规格参数

型号: P3

蓝牙版本: 5.0 通讯距离: 10 米 (无障碍空旷环境)

电源输入: DC 5V-1A, 输出: DC 5V-150mA. 耳机输入: DC 5V-100mA

电池类型: 锂离子聚合物电池.

充电仓电池容量: 220mAh. 单耳电池容量: 35mAh

通话/播放时长: 约 3 小时 待机时间: 耳机约 150 小时, 充电盒约 3 个月

支持协议: HFP/HSP/A2DP/AVRCP/SPP/PDAP

## 敲击功能

左/右耳机轻敲两或三下: 播放/暂停音乐; 接听电话/挂断电话

左耳机轻敲四下: 上首歌曲; 接听/挂断/取消电话

右耳机轻敲四下: 下首歌曲; 接听/挂断/取消通话

Tips: 若关闭手机蓝牙后重启手机蓝牙时, 轻敲耳机, P3 会自动回连。

## 耳机充电

将耳机充电口位对准充电盒充电针位即可给耳机充电。

## 充电盒充电

插入充电线或者将充电盒放置于无线充电器之上即可给盒子充电。

## 指示灯指导表格

	闪烁	呼吸灯	常亮 (已连接)	常亮 (未连接)	无灯 (未播音乐)
--	----	-----	----------	----------	-----------

充 电 盒	充电盒充电中或 耳机充电中	无	无	无	
耳机	正在等待建立蓝牙配对	正在充电	已连接但未播放音乐	耳机正在待机中, <b>需手动连接</b>	耳机关机

**佩戴中若有嘟嘟声:** 耳机电量不足

### 开机

耳机在充电盒内, 从充电盒中拿出耳机自动开机。

耳机不在充电盒内, 轻敲耳机 (蓝灯亮起即开机)。

### 关机

放入充电盒中, 耳机自动关机。

开机状态下, 无工作放置 60 秒, 自动关机。

### 如何配对

1. 耳机从充电仓拿出, 耳机自动开机, **指示灯闪烁**, 大约 1-2 秒后其中一个耳机指示灯熄灭, 即双耳配对成功。

2. 打开手机蓝牙, 搜索蓝牙名:P3\_L, 点击连接。

再次为同一台手机使用时, 耳机开机后会自动配对并连接; 若为另一台手机使用, 重复以上 1-2 操作。

### 双耳使用

**自动连接:** 1. 将两耳机从充电盒取出, 等待 3 秒耳机自动开机串联, 其中一个耳机指示灯熄灭, 即双耳配对成功。

2. 打开手机蓝牙, 搜索蓝牙名:P3\_R, 点击连接

再次为同一台手机使用时, 耳机开机后会自动配对并连接; 若为另一台手机使用, 重复以上 1-2 操作。

**手动连接:** **耳机关机时**, 手动开启**两耳机**, 待耳机串联成功后左耳机灭灯时, 打开手机蓝牙搜索连接 P3\_R

### 单耳使用

**自动连接:** 从充电盒取出一只耳机, 自动开机后, **提示灯慢闪**时, 打开手机蓝牙搜索" P3\_R" (" P3\_L") 并点击连接。

首次连接后, 耳机开机可自动回连上一次配对设备 (蓝牙需开启)。

注意: 左耳机 (P3\_L) 自动回连时间相对较长。

手动连接: **耳机关机时**, 手动开启其中一只耳机, **待耳机灯慢闪**时, 打开手机蓝牙搜索连接 P3\_R 或者 P3\_L

### 注意事项

请避免在沐浴或雨中使用本产品,并存放在干燥通风的环境下,以免影响产品性能.

为保证连接顺畅,建议手机和耳机之间的距离在 10 米范围内.

耳机在电量充足状态,通话或听歌时有卡顿现象,建议关机重新配对连接.



服务网址: [www.zzkjsz.com](http://www.zzkjsz.com)

微信公众号: PIO\_ZZKJ

品牌: 智梓科技

地址: 深圳市罗湖区深南东路 2017 号华乐星苑大厦 1210/1211

此说明书仅供参考, 产品实物与示意图或有差异, 请以实物为准。

### User Manual

TWS-P3



WIRELESS EARBUDS

Tap control


 Bluetooth version 5.0



### Package list

Bluetooth Earbuds 2pc  
Charging Case 1pc  
Earbuds Tips 3sets  
USB charging cable 1pc  
User manual 1pc

### Product schematic diagram

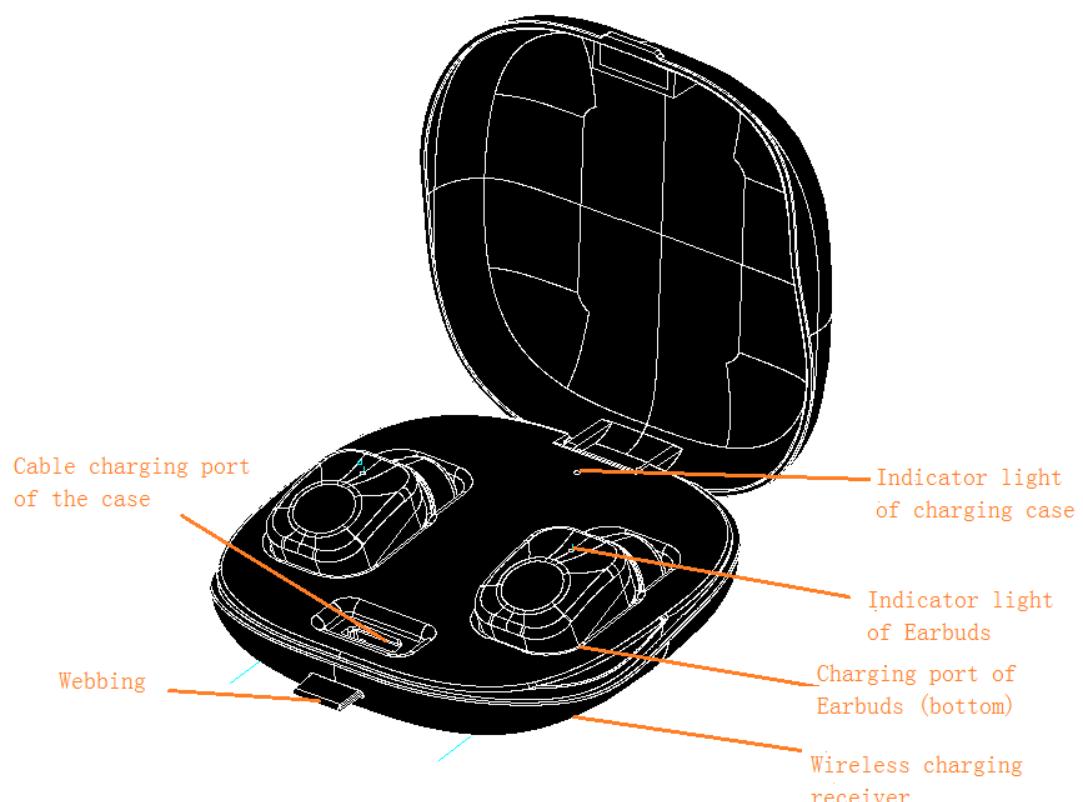

### Wear Earbuds

Put earbuds in your ear slightly, and then shake your head gently to see whether the earbuds are fixed.



### Specification

Model: P3  
Bluetooth version: 5.0  
Power input: DC 5V-1A  
charging case battery: 220mAh  
Earbud battery capacity: 35mAh  
Call/play time: about 3.5 hours  
Support agreement: HFP/HSP/A2DP/AVRCP/SPP/PDAP  
Signal Distance: 10 meters

### TAP function

#### Left Earbud:

Double or Triple tap: Play/Pause Music; Answer/Reject the call  
Quadruple tap: Previous song Answer/Reject the call

#### Right Earbud:

Double or Triple tap: Play/Pause Music; Answer/Reject the call  
Quadruple tap: Next song; Answer/Reject the call

#### Indicator Light instruction form:

	Blink	Breath	On (linked)	On (Unlinked)	Off (Not in music)
充电盒	Charging	N	N	N	

耳机	Waiting for pair or connection	Charging	Standby	Standby	Power off
----	--------------------------------	----------	---------	---------	-----------

### **Low Battery**

When you hear 'Du, Du', Earbud is in low battery.

### **How to power off/on:**

Install it back to the charging case, Earbuds will auto charge and power off.

Pick Earbuds out from the charging case, it will power on and pair automatically.

If the earbuds is out of the case, it can power off by disconnecting for 60 seconds and wake it up by tapping.

### **How to charge**

Charge for Earbuds:

Put earbuds into charging case,

The headset automatically shuts down

and enters the charging state, indicator of

charging station light up. It will turn off automatically

after 10s, at the same time, indicator of earbuds will light red.

It will lights blue after fully charged , and will turn off after 60s.

### **Charge for Charging Case:**

Connect standard USB cable with charging case to

5V/1A USB charger or Put it on a wireless charger. Battery level indicators will flash

when charging. Charging case is fully charged when

all battery level indicators light on. Charging time is

about 60mins.

### **How to pair and link**

1. Earbuds will power on automatically when take out from charging station, indicator lights of earbuds flash blue.

After 1-2s, one indicator of earbuds will turn off, that is two earbuds pair with each other successfully.

2. Turn on the Bluetooth of your music devices, search "P3\_L" and click it to connect.

Earbuds will connect with your original music device when power on again. If you want to link it with another music device, please pair them again by paring steps 1-2 mentioned above.

### **Pay attention**

Please avoid using this product in the shower or in the rain, and please store in a dry and ventilated environment to avoid affecting product performance.

To ensure great connection performance, please keep the bluetooth distance within 10m.

If you cannot find “P3\_L or P3\_R” in bluetooth of your music device, please remove all recorded bluetooth pairing data, then turn on bluetooth again to search “P3\_L or P3\_R”

If signal is disconnected sometimes even if earbuds is fully charged, please turn earbuds off and pair again.

Service Web Site: [www.zzkjsz.com](http://www.zzkjsz.com)

Wechat Public Number: PIO\_ZZKJ

Brand: ZZKJ

Address: 1210/1211 Huale Xingyuan Building, NO. 2017 ShenNan East Road, Luohu District, Shenzhen

#### FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and receiver.
- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.