



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104,Building 7 and 8,DCC Cultural and Creative Garden No.98,Pingxin North Road,Shangmugu,Pinghu Street, Longgang District,Shenzhen,Guangdong,China

TEST REPORT

FCC Part 24 Subpart E

Report Reference No..... : GTS20191021009-1-9-2

FCC ID..... : 2AUUB-S900PLUS

Compiled by
(position+printed name+signature) .: File administrators Jimmy Wang

Supervised by
(position+printed name+signature) .: Test Engineer Aaron Tan

Approved by
(position+printed name+signature) .: Manager Jason Hu

Date of issue..... : Oct. 24, 2019

Testing Laboratory Name: Shenzhen Global Test Service Co.,Ltd.

Address.....: No.7-101 and 8A-104,Building 7 and 8,DCC Cultural and Creative Garden No.98,Pingxin North Road,Shangmugu,Pinghu Street, Longgang District,Shenzhen,Guangdong,China

Applicant's name: BOXCHIP CO.,LTD

Address.....: Room 302, Building A, Huahan Technology, No. 16 Langshan Road, Nanshan District, Shenzhen, China

Test specification

Standard: FCC CFR Title 47 Part 2, Part 24E
ANSI/TIA-603-E-2016
KDB 971168 D01

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd.takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: Smart Terminal

Trade Mark: BOXCHIP

Manufacturer.....: BOXCHIP CO.,LTD

Model/Type reference.....: S900Plus

Listed Models: S900A_Plus, S900B_Plus, S1000, TVX-588d

Ratings.....: DC 3.8V from battery

Modulation: QPSK, 16QAM

Hardware version: TVH30_S900+_MB_V2.0

Software version: V1.0

Frequency.....: E-UTRA FDD Band 2, 4, 5, 7, 12, 13, 17, 26

Result.....: PASS

TEST REPORT

Test Report No. :	GTS20191021009-1-9-2	Oct. 24, 2019
		Date of issue

Equipment under Test : Smart Terminal

Model /Type : S900Plus

Listed Models : S900A_Plus, S900B_Plus, S1000, TVX-588d

Applicant : **BOXCHIP CO.,LTD**

Address : Room 302, Building A, Huahan Technology, No. 16 Langshan Road, Nanshan District, Shenzhen, China

Manufacturer : **BOXCHIP CO.,LTD**

Address : Room 302, Building A, Huahan Technology, No. 16 Langshan Road, Nanshan District, Shenzhen, China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 4.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	SUMMARY	4
1.1	TEST STANDARDS.....	4
1.2	TEST DESCRIPTION	4
1.3	ADDRESS OF THE TEST LABORATORY	5
1.4	TEST FACILITY	5
1.5	STATEMENT OF THE MEASUREMENT UNCERTAINTY	5
2	GENERAL INFORMATION	6
2.1	ENVIRONMENTAL CONDITIONS.....	6
2.2	GENERAL DESCRIPTION OF EUT.....	6
2.3	DESCRIPTION OF TEST MODES AND TEST FREQUENCY	6
2.4	EQUIPMENTS USED DURING THE TEST	7
2.5	RELATED SUBMITTAL(S) / GRANT (S).....	7
2.6	MODIFICATIONS	7
3	TEST CONDITIONS AND RESULTS.....	8
3.1	OUTPUT POWER.....	8
3.2	PEAK-TO-AVERAGE RATIO (PAR)	15
3.3	OCCUPIED BANDWIDTH AND EMISSION BANDWIDTH	23
3.4	BAND EDGE COMPLIANCE	30
3.5	SPURIOUS EMISSION.....	37
3.6	FREQUENCY STABILITY UNDER TEMPERATURE & VOLTAGE VARIATIONS	79
4	TEST SETUP PHOTOS OF THE EUT	81
5	PHOTOS OF THE EUT.....	82

1 SUMMARY

1.1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 2:](#) FREQUENCY ALLOCA-TIONS AND RADIO TREATY MAT-TERS; GENERAL RULES AND REG-ULATIONS

[FCC Part 24 Subpart E:](#) PUBLIC MOBILE SERVICES

[ANSI/TIA-603-E-2016:](#) Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015:](#) IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[FCC KDB971168D01](#) Power Meas License Digital Systems

1.2 Test Description

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 Part 24.232 (c)	Pass
Peak-to-Average Ratio	Part 24.232 (d)	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 24.238	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 24.238 (a)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 24.238 (a)	Pass
Out of band emission, Band Edge	Part 22.917 (a) Part 24.238 (a)	Pass
Frequency stability	Part 2.1055 Part 24.235	Pass

1.3 Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 165725

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

A2LA-Lab Cert. No.: 4758.01

Shenzhen Global Test Service Co.,Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

CNAS-Lab Code: L8169

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2024.

1.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Global Test Service Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Global Test Service Co.,Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)
Conducted Power	9KHz~18GHz	0.61 dB	(1)
Spurious RF Conducted Emission	9KHz~40GHz	1.22 dB	(1)
Band Edge Compliance of RF Emission	9KHz~40GHz	1.22 dB	(1)
Occupied Bandwidth	9KHz~40GHz	-	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

2 GENERAL INFORMATION

2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2 General Description of EUT

Product Name:	Smart Terminal
Model/Type reference:	S900Plus
Power supply:	DC 3.8V from battery
LTE	
Operation Band:	E-UTRA Band 2, band 4, band5, band7, band12, band13, band17, band26
Support Bandwidth:	Band 2: ☒ 1.4MHz, ☒ 3MHz, ☒ 5MHz, ☒ 10MHz, ☒ 15MHz, ☒ 20MHz Band 4: ☒ 1.4MHz, ☒ 3MHz, ☒ 5MHz, ☒ 10MHz, ☒ 15MHz, ☒ 20MHz Band 5: ☒ 1.4MHz, ☒ 3MHz, ☒ 5MHz, ☒ 10MHz, Band 7: ☒ 5MHz, ☒ 10MHz, ☒ 15MHz, ☒ 20MHz Band 12: ☒ 1.4MHz, ☒ 3MHz, ☒ 5MHz, ☒ 10MHz, Band 13: ☒ 5MHz, ☒ 10MHz Band 17: ☒ 5MHz, ☒ 10MHz Band 26: ☒ 1.4MHz, ☒ 3MHz, ☒ 5MHz, ☒ 10MHz, ☒ 15MHz
TX/RXFrequency Range:	Band 2: 1850MHz-1910MHz/1930MHz-1990MHz Band 4: 1710MHz-1755MHz/2110MHz-2155MHz Band 5: 824MHz-849MHz/869MHz-894MHz Band 7: 2500MHz-2570MHz/2620MHz-2690MHz Band 12: 699MHz-716MHz/729MHz-746MHz Band 13: 777MHz-787MHz/746MHz-756MHz Band 17: 704MHz-716 MHz/734MHz-746MHz Band 26: 814MHz-849MHz/859MHz-894MHz
Modulation Type:	QPSK, 16QAM
Release Version:	Release 9
Category:	Cat 4
Antenna Type:	FPC antenna

Note: For more details, refer to the user's manual of the EUT.

2.3 Description of Test Modes and Test Frequency

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

2.4 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2019/09/20	2020/09/19
LISN	R&S	ESH2-Z5	893606/008	2019/09/20	2020/09/19
Bilog Antenna	Schwarzbeck	VULB9163	976	2019/09/20	2020/09/19
Bilog Antenna	Schwarzbeck	VULB9163	979	2019/09/20	2020/09/19
EMI Test Receiver	R&S	ESCI7	101102	2019/09/20	2020/09/19
Spectrum Analyzer	Agilent	N9020A	MY48010425	2019/09/20	2020/09/19
Spectrum Analyzer	R&S	FSP40	100019	2019/09/20	2020/09/19
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2019/09/20	2020/09/19
Horn Antenna	Schwarzbeck	BBHA 9120D	01652	2019/09/20	2020/09/19
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2019/09/20	2020/09/19
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	971	2019/09/20	2020/09/19
Amplifier	Schwarzbeck	BBV 9743	#202	2019/09/20	2020/09/19
Amplifier	EMCI	EMC051845B	980355	2019/09/20	2020/09/19
Temperature/Humidity Meter	Gangxing	CTH-608	02	2019/09/20	2020/09/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2019/09/20	2020/09/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2019/09/20	2020/09/19
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2019/09/20	2020/09/19
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2019/09/20	2020/09/19
Data acquisition card	Agilent	U2531A	TW53323507	2019/09/20	2020/09/19
Power Sensor	Agilent	U2021XA	MY5365004	2019/09/20	2020/09/19
EMI Test Software	R&S	ES-K1	V1.7.1	2019/09/20	2020/09/19
EMI Test Software	JS Tonscend	JS32-RE	2.0.1.5	2019/09/20	2020/09/19
EMI Test Software	Audix	E3	2..1.1	2019/09/20	2020/09/19

2.5 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AUUB-S900PLUS filing to comply with of the FCC Part 24 Rules.

2.6 Modifications

No modifications were implemented to meet testing criteria.


3 TEST CONDITIONS AND RESULTS

3.1 Output Power

LIMIT

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p.

TEST CONFIGURATION

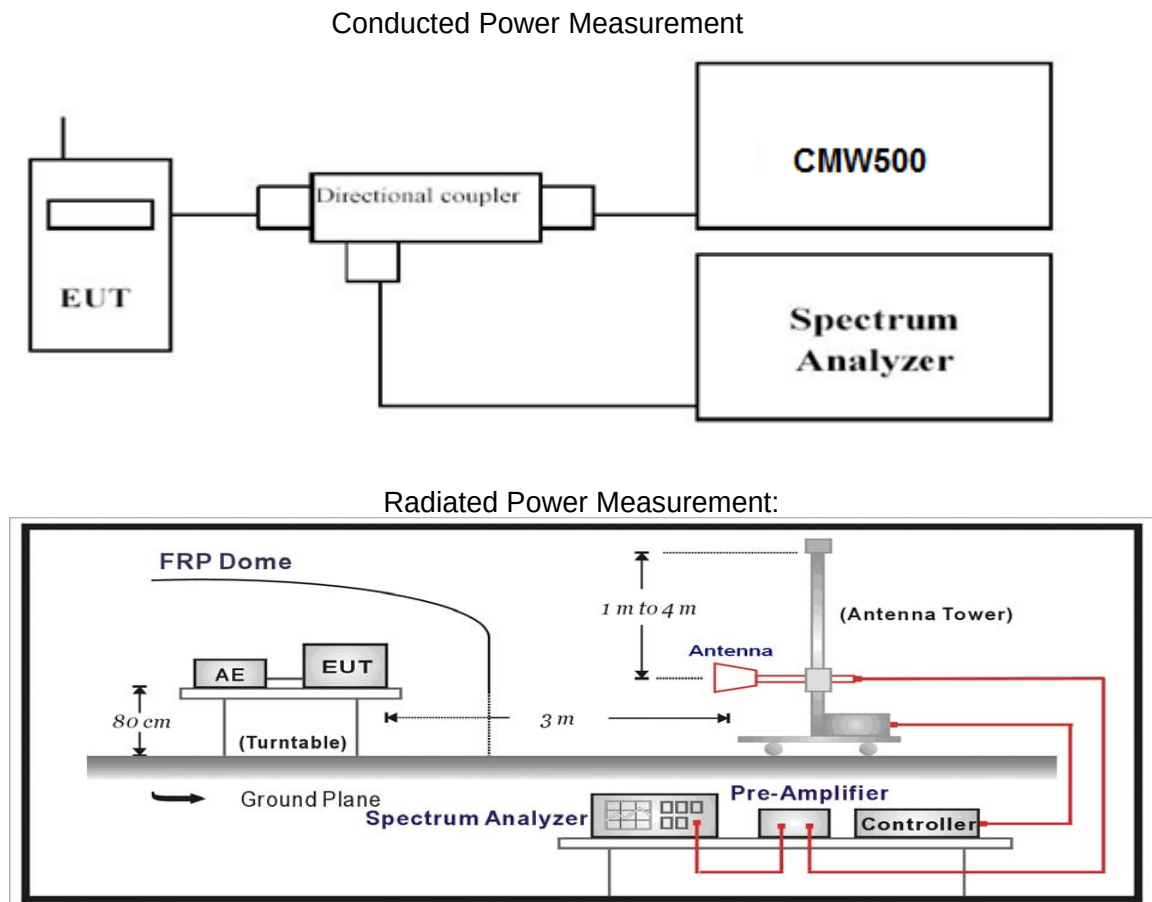

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Coupler.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.

- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The maximum signal level detected by the measuring receiver shall be noted.
- i) The transmitter shall be replaced by a substitution antenna.
- j) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k) The substitution antenna shall be connected to a calibrated signal generator.
- l) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q) Test site anechoic chamber refer to ANSI C63.4.

TEST RESULTS**Conducted Measurement:**

LTE FDD Band 2				
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1 RB low	1850.7	22.53	21.93
		1880.0	23.38	22.73
		1909.3	22.50	22.07
	1 RB mid	1850.7	21.78	20.99
		1880.0	22.64	22.14
		1909.3	22.42	21.62
	1 RB high	1850.7	23.10	22.47
		1880.0	23.47	22.93
		1909.3	21.67	21.07
	50% RB low	1850.7	23.15	22.46
		1880.0	22.56	21.86
		1909.3	22.81	22.13
	50% RB mid	1850.7	22.79	22.15
		1880.0	21.97	21.51
		1909.3	23.01	22.29
	50% RB High	1850.7	22.39	21.83
		1880.0	21.95	21.52
		1909.3	23.33	22.93
	100% RB	1850.7	23.28	22.91
		1880.0	22.53	22.00
		1909.3	21.87	21.49
3 MHz	1 RB low	1851.5	22.84	22.35
		1851.5	21.81	21.36
		1908.5	21.50	20.70
	1 RB mid	1851.5	21.94	21.13
		1851.5	22.66	21.99
		1908.5	22.90	22.47
	1 RB high	1851.5	23.14	22.50
		1851.5	21.89	21.15
		1908.5	21.67	21.10
	50% RB low	1851.5	21.68	21.12
		1851.5	21.88	21.48
		1908.5	22.93	22.55
	50% RB mid	1851.5	22.45	21.78
		1851.5	22.40	21.72
		1908.5	23.35	22.79
	50% RB High	1851.5	21.80	21.00
		1851.5	23.10	22.59
		1908.5	22.90	22.27
	100% RB	1851.5	22.28	21.59
		1851.5	21.68	20.99
		1908.5	21.58	20.91
5 MHz	1 RB low	1852.5	22.83	22.30
		1880.0	21.89	21.05
		1907.5	21.67	21.17
	1 RB mid	1852.5	22.74	22.34
		1880.0	22.41	21.96
		1907.5	22.92	22.23
	1 RB high	1852.5	21.57	20.86
		1880.0	22.01	21.30
		1907.5	21.95	21.30

	50% RB low	1852.5	22.37	21.65
		1880.0	22.04	21.38
		1907.5	23.02	22.55
	50% RB mid	1852.5	21.59	20.80
		1880.0	21.67	21.09
		1907.5	23.13	22.67
	50% RB High	1852.5	21.87	21.25
		1880.0	22.18	21.46
		1907.5	22.84	22.36
	100% RB	1852.5	21.84	21.18
		1880.0	21.89	21.07
		1907.5	22.77	21.95
10 MHz	1 RB low	1855.0	22.61	21.99
		1880.0	22.45	22.05
		1905.0	21.61	21.10
	1 RB mid	1855.0	21.89	21.52
		1880.0	22.31	21.71
		1905.0	21.97	21.49
	1 RB high	1855.0	22.05	21.61
		1880.0	23.27	22.68
		1905.0	23.09	22.41
	50% RB low	1855.0	22.44	21.90
		1880.0	23.32	22.66
		1905.0	22.48	21.83
	50% RB mid	1855.0	22.18	21.61
		1880.0	23.05	22.67
		1905.0	21.94	21.38
	50% RB High	1855.0	22.60	21.87
		1880.0	22.20	21.51
		1905.0	21.75	21.31
	100% RB	1855.0	22.28	21.90
		1880.0	21.96	21.15
		1905.0	22.87	22.37
15 MHz	1 RB low	1857.5	23.20	22.68
		1880.0	22.43	21.69
		1902.5	23.22	22.48
	1 RB mid	1857.5	22.03	21.31
		1880.0	21.89	21.43
		1902.5	22.29	21.57
	1 RB high	1857.5	22.37	21.55
		1880.0	23.09	22.26
		1902.5	21.91	21.56
	50% RB low	1857.5	22.23	21.42
		1880.0	22.52	21.95
		1902.5	21.98	21.27
	50% RB mid	1857.5	22.69	22.04
		1880.0	23.45	22.93
		1902.5	21.63	20.96
	50% RB High	1857.5	21.75	21.02
		1880.0	22.20	21.35
		1902.5	21.76	21.09
	100% RB	1857.5	21.81	21.06
		1880.0	21.81	21.00
		1902.5	23.43	22.64
20 MHz	1 RB low	1860.0	21.86	21.34
		1880.0	22.02	21.52
		1900.0	21.58	20.90

	1 RB mid	1860.0	22.16	21.56
		1880.0	21.52	20.68
		1900.0	23.15	22.31
	1 RB high	1860.0	21.84	21.40
		1880.0	22.75	22.24
		1900.0	22.90	22.13
	50% RB low	1860.0	23.36	22.68
		1880.0	22.44	21.61
		1900.0	23.19	22.72
	50% RB mid	1860.0	23.01	22.39
		1880.0	21.98	21.30
		1900.0	22.10	21.42
	50% RB High	1860.0	22.05	21.51
		1880.0	23.21	22.51
		1900.0	23.50	22.54
	100% RB	1860.0	21.98	21.44
		1880.0	22.85	22.46
		1900.0	22.46	21.99

Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$

LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-18.17	3.41	10.23	33.60	22.25	33.01	10.76	V
1880.0	-17.98	3.49	10.23	33.60	22.36	33.01	10.65	V
1909.3	-17.89	3.55	10.25	33.60	22.41	33.01	10.60	V

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-18.86	3.41	10.23	33.60	21.56	33.01	11.45	V
1880.0	-17.76	3.49	10.23	33.60	22.58	33.01	10.43	V
1908.5	-18.43	3.55	10.25	33.60	21.87	33.01	11.14	V

LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-18.06	3.41	10.23	33.60	22.36	33.01	10.65	V
1880.0	-18.45	3.49	10.23	33.60	21.89	33.01	11.12	V
1907.5	-17.86	3.55	10.25	33.60	22.44	33.01	10.57	V

LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	-18.24	3.41	10.23	33.60	22.18	33.01	10.83	V
1880.0	-18.36	3.49	10.23	33.60	21.98	33.01	11.03	V
1905.0	-17.89	3.55	10.25	33.60	22.41	33.01	10.60	V

LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-18.06	3.41	10.23	33.60	22.36	33.01	10.65	V
1880.0	-17.76	3.49	10.23	33.60	22.58	33.01	10.43	V
1902.5	-18.56	3.55	10.25	33.60	21.74	33.01	11.27	V

LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	-18.77	3.41	10.23	33.60	21.65	33.01	11.36	V
1880.0	-17.86	3.49	10.23	33.60	22.48	33.01	10.53	V
1900.0	-17.94	3.55	10.25	33.60	22.36	33.01	10.65	V

LTE FDD Band 2_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-20.16	3.41	10.23	33.60	20.26	33.01	12.75	V
1880.0	-19.09	3.49	10.23	33.60	21.25	33.01	11.76	V
1909.3	-19.67	3.55	10.25	33.60	20.63	33.01	12.38	V

LTE FDD Band 2_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-19.20	3.41	10.23	33.60	21.22	33.01	11.79	V
1880.0	-18.75	3.49	10.23	33.60	21.59	33.01	11.42	V
1908.5	-19.61	3.55	10.25	33.60	20.69	33.01	12.32	V

LTE FDD Band 2_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-18.94	3.41	10.23	33.60	21.48	33.01	11.53	V
1880.0	-18.70	3.49	10.23	33.60	21.64	33.01	11.37	V
1907.5	-18.77	3.55	10.25	33.60	21.53	33.01	11.48	V

LTE FDD Band 2_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	-19.68	3.41	10.23	33.60	20.74	33.01	12.27	V
1880.0	-19.28	3.49	10.23	33.60	21.06	33.01	11.95	V
1905.0	-19.06	3.55	10.25	33.60	21.24	33.01	11.77	V

LTE FDD Band 2_Channel Bandwidth 15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-18.41	3.41	10.23	33.60	22.01	33.01	11.00	V
1880.0	-18.77	3.49	10.23	33.60	21.57	33.01	11.44	V
1902.5	-18.65	3.55	10.25	33.60	21.65	33.01	11.36	V

LTE FDD Band 2_Channel Bandwidth 20MHz_16QAM


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	-18.09	3.41	10.23	33.60	22.33	33.01	10.68	V
1880.0	-18.45	3.49	10.23	33.60	21.89	33.01	11.12	V
1900.0	-18.04	3.55	10.25	33.60	22.26	33.01	10.75	V

3.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

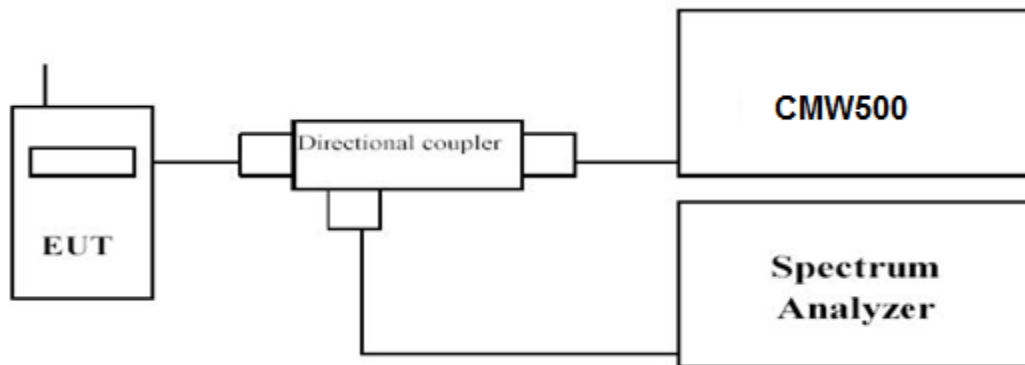

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms,
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:



1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.

LTE FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
1.4 MHz	1850.7	1RB#0	4.43	5.25
	1880.0		4.52	5.33
	1909.3		5.13	5.83
3 MHz	1851.5	1RB#0	4.52	5.36
	1880.0		4.55	5.36
	1908.5		5.13	6.00
5 MHz	1852.5	1RB#0	4.61	5.39
	1880.0		4.52	5.28
	1907.5		5.19	5.91
10 MHz	1855.0	1RB#0	5.04	5.71
	1880.0		4.64	5.36
	1905.0		5.33	6.09
15 MHz	1857.5	1RB#0	5.42	6.03
	1880.0		4.84	5.48
	1902.5		5.59	6.17
20 MHz	1860.0	1RB#0	5.36	6.17
	1880.0		4.70	5.59
	1900.0		5.33	6.14

LTE FDD Band 2-1.4MHz Channel Bandwidth PAPR

QPSK



16QAM

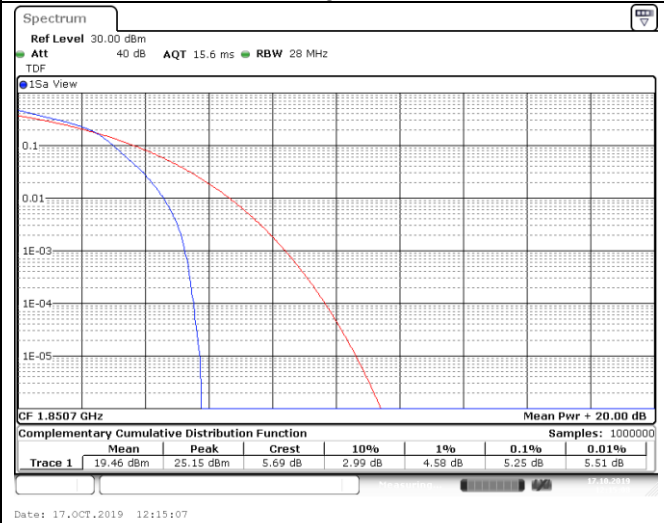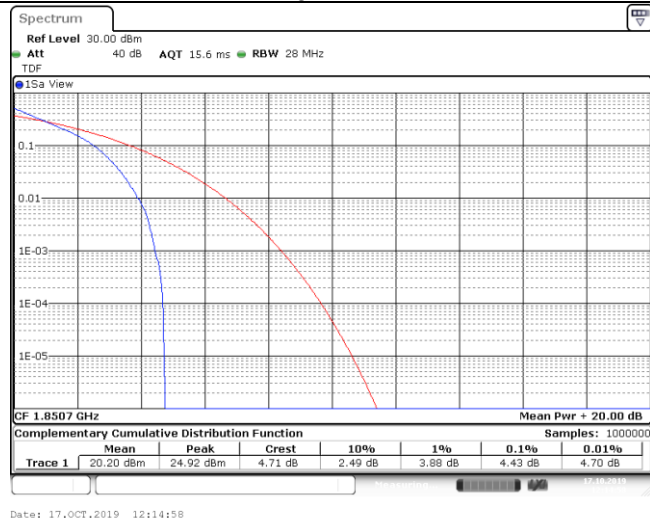

1RB#0

1RB#0



Low Channel

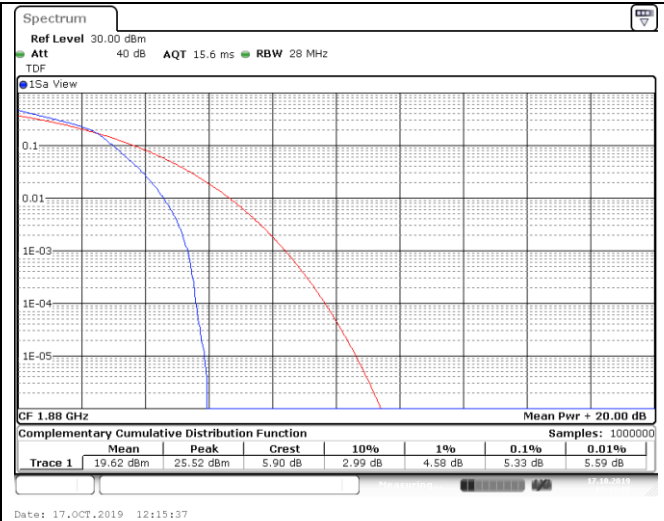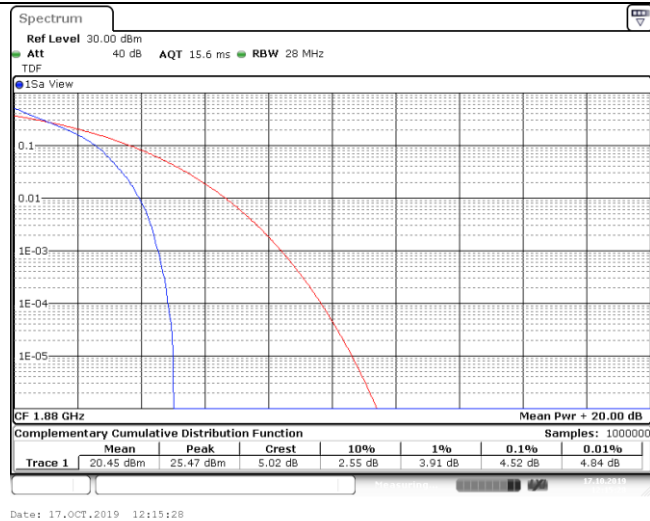

1RB#0

1RB#0

Middle Channel

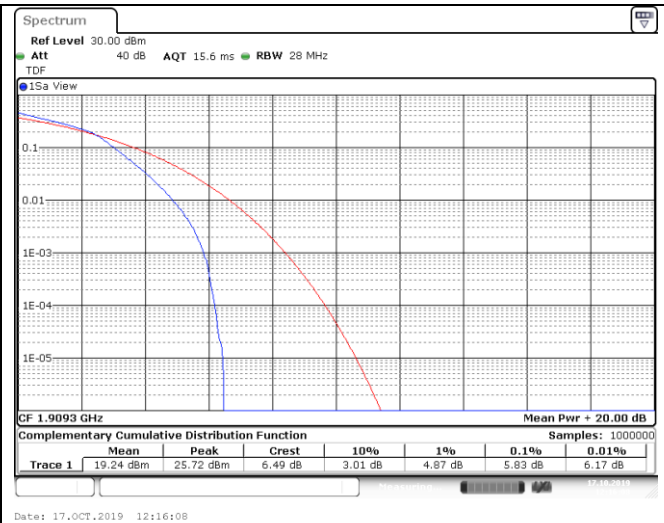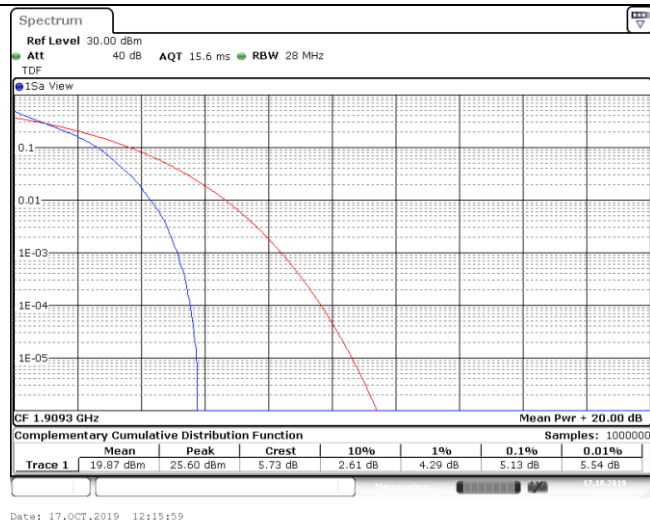


1RB#0

1RB#0


High Channel

LTE FDD Band 2-3MHz Channel Bandwidth PAPR

QPSK

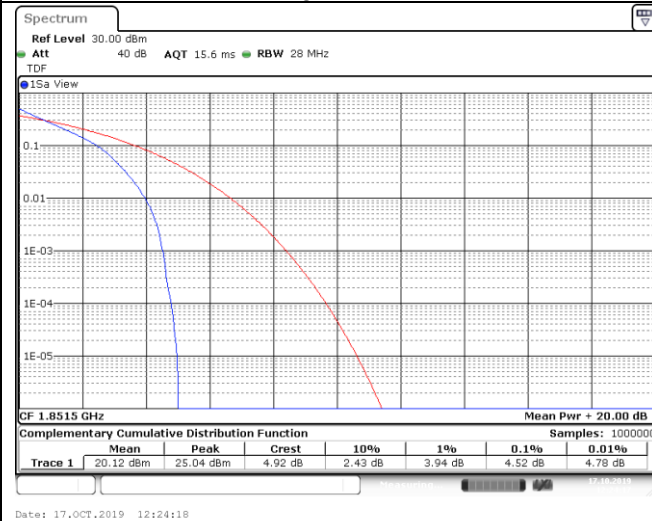



16QAM

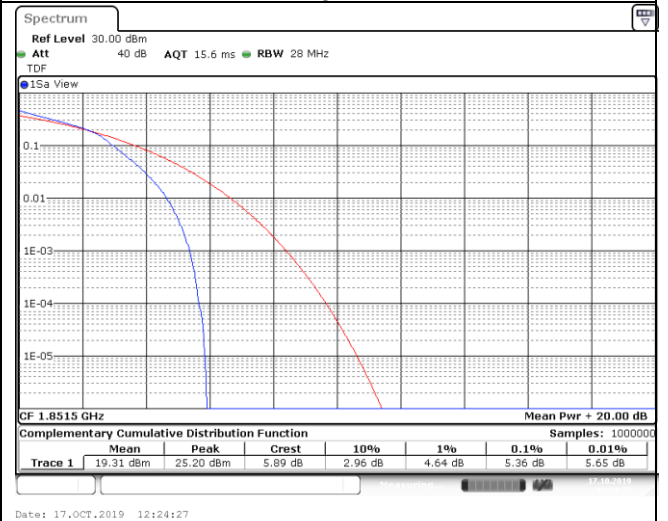

1RB#0

1RB#0



Low Channel

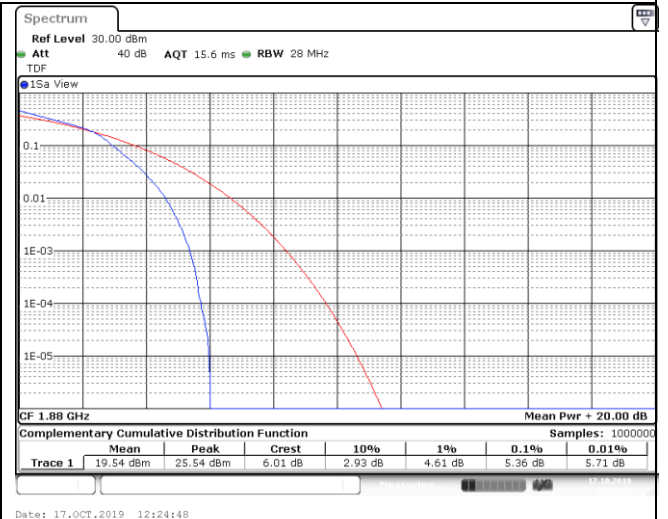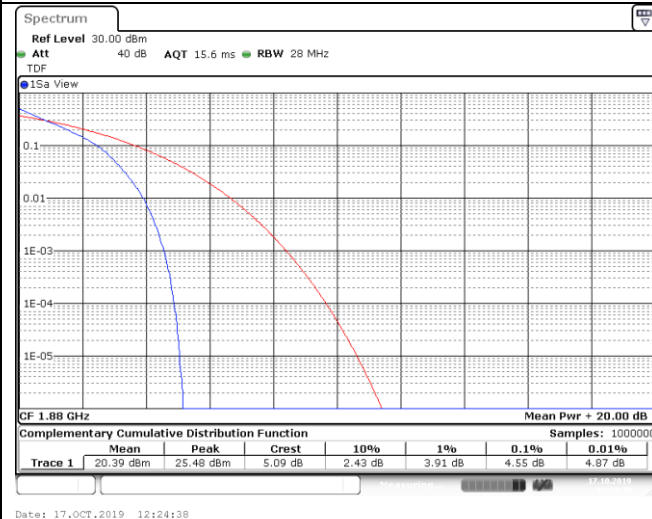

1RB#0

1RB#0

Middle Channel

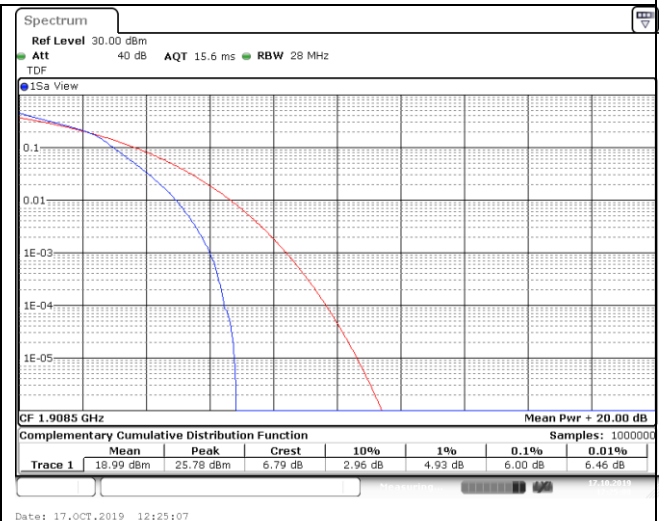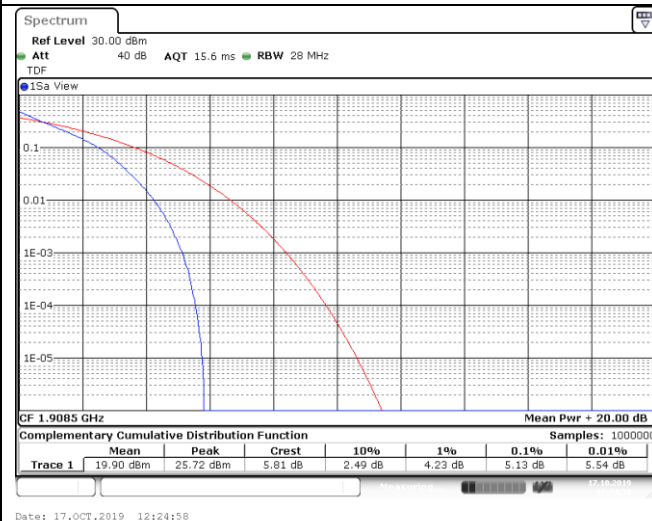

1RB#0



1RB#0

High Channel

LTE FDD Band 2-5MHz Channel Bandwidth PAPR

QPSK



16QAM

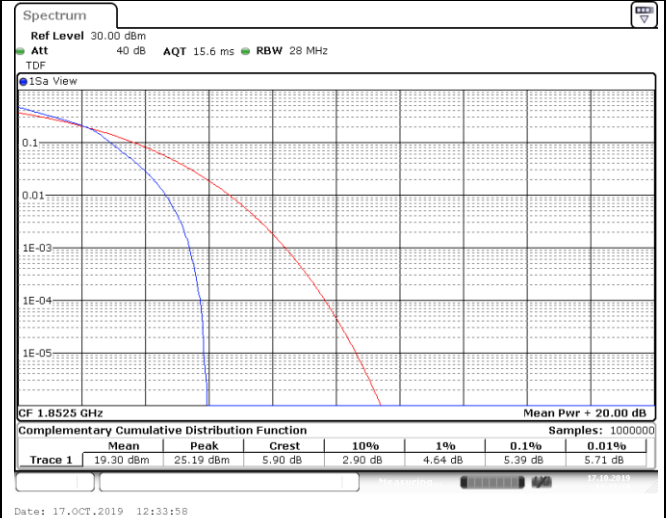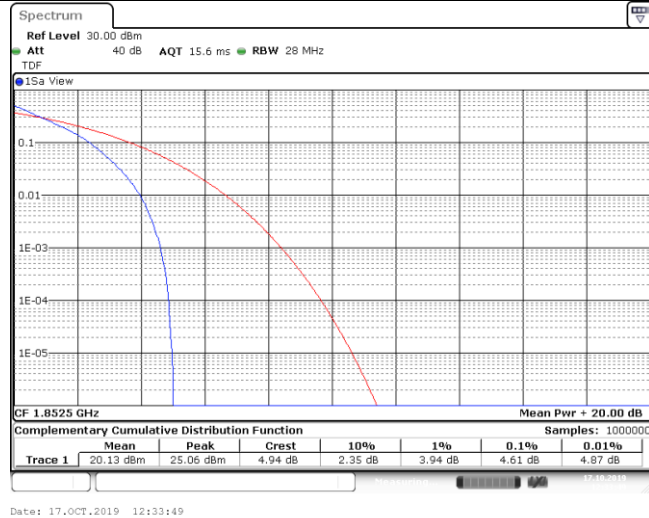

1RB#0

1RB#0



Low Channel

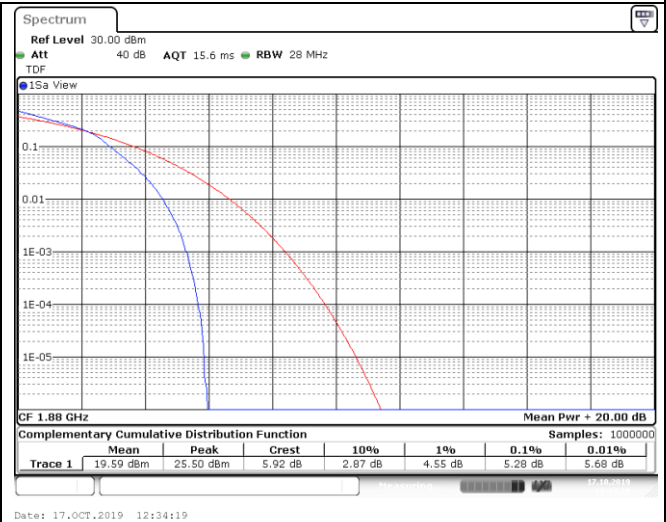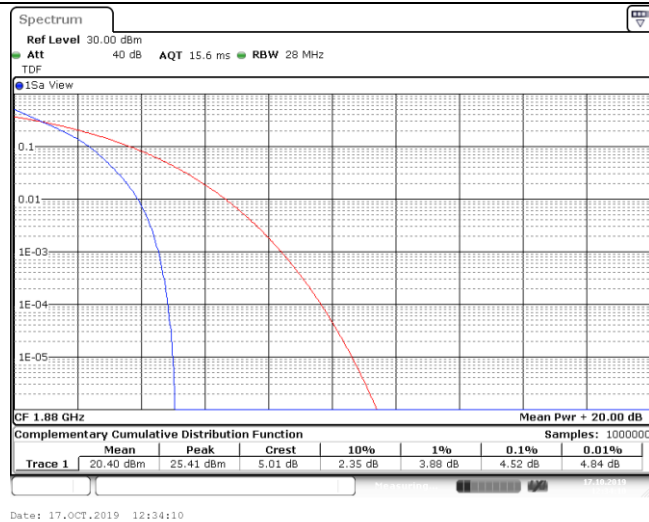

1RB#0

1RB#0

Middle Channel

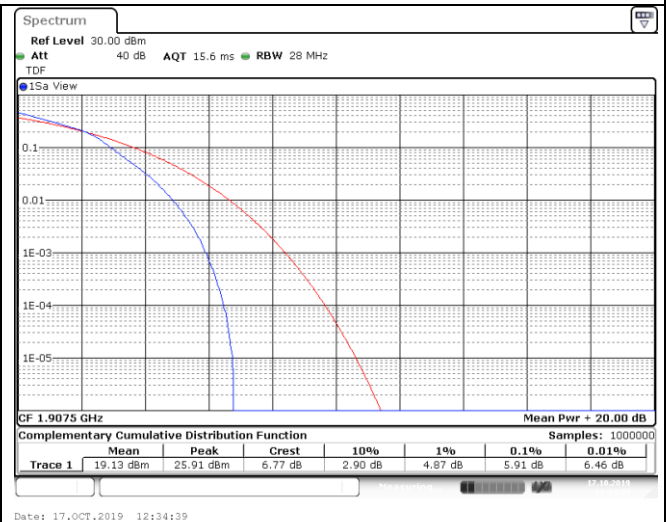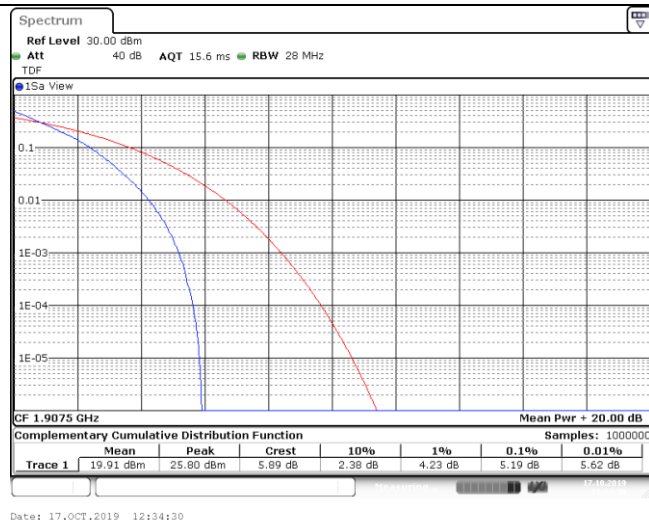

1RB#0



1RB#0

High Channel

LTE FDD Band 2-10MHz Channel Bandwidth PAPR

QPSK



16QAM

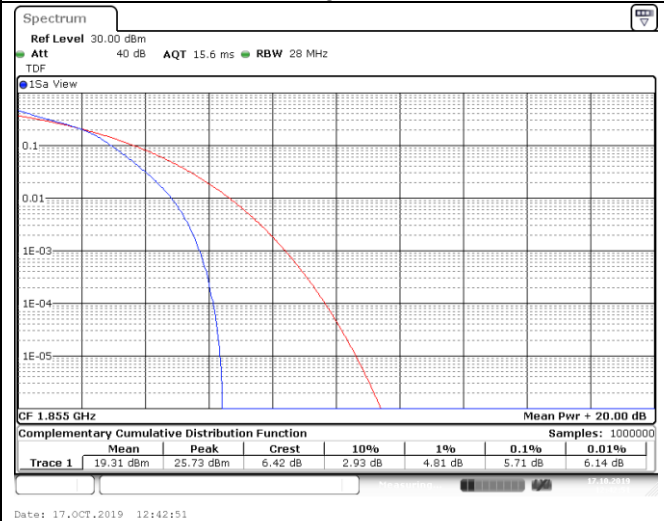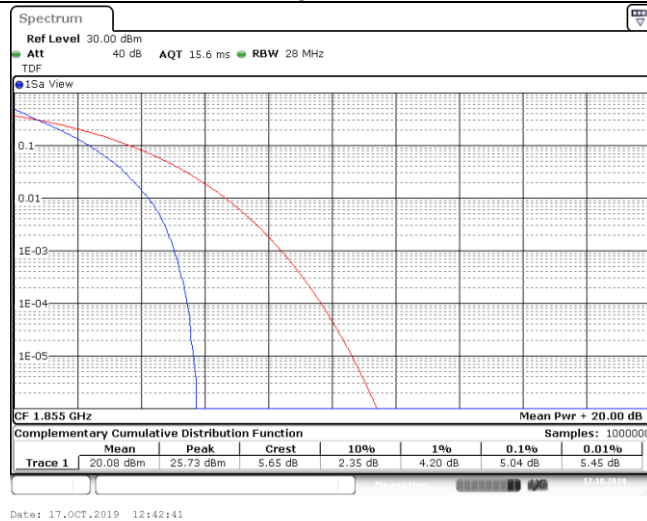

1RB#0

1RB#0



Low Channel

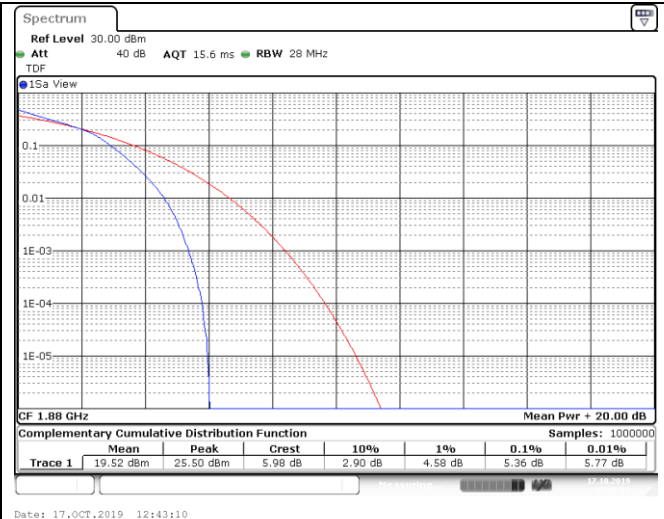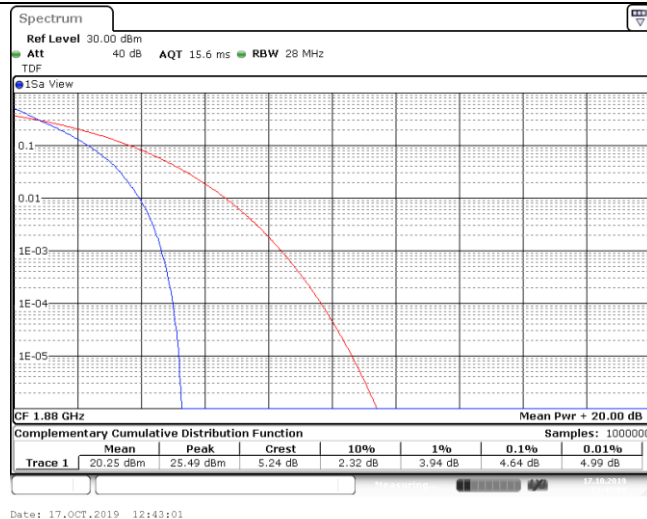

1RB#0

1RB#0

Middle Channel

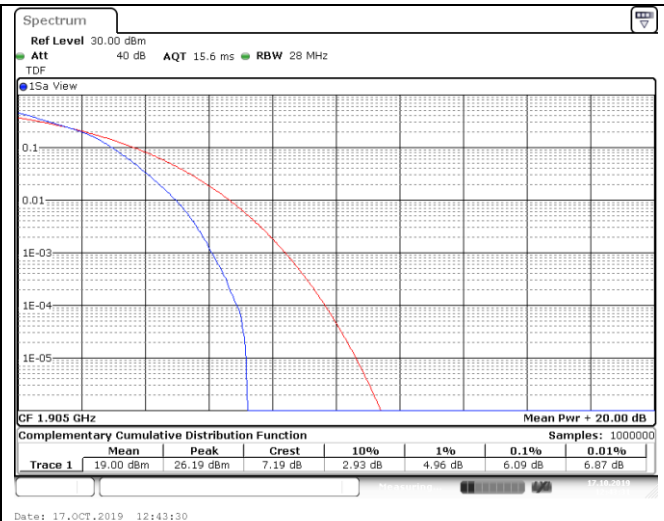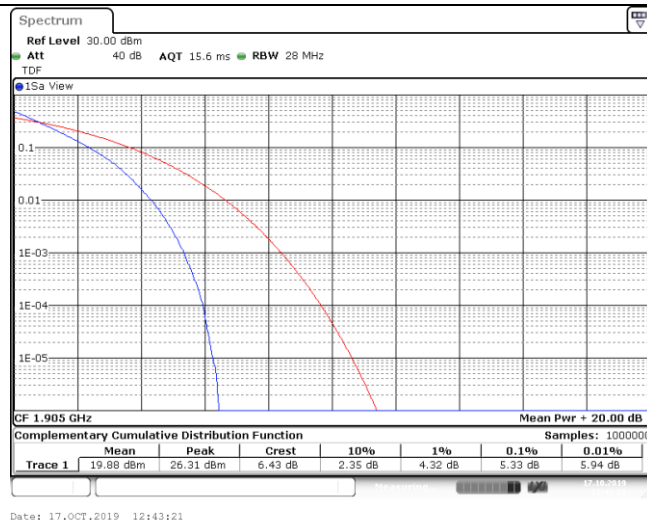


1RB#0

1RB#0


High Channel

LTE FDD Band 2-15MHz Channel Bandwidth PAPR

QPSK

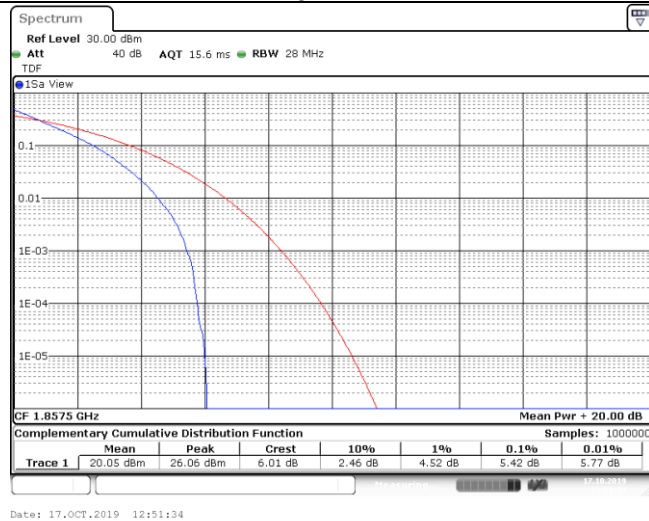



16QAM

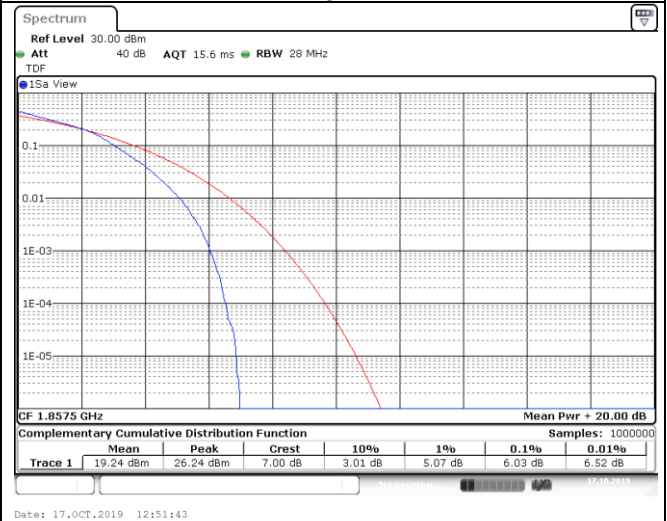

1RB#0

1RB#0



Low Channel

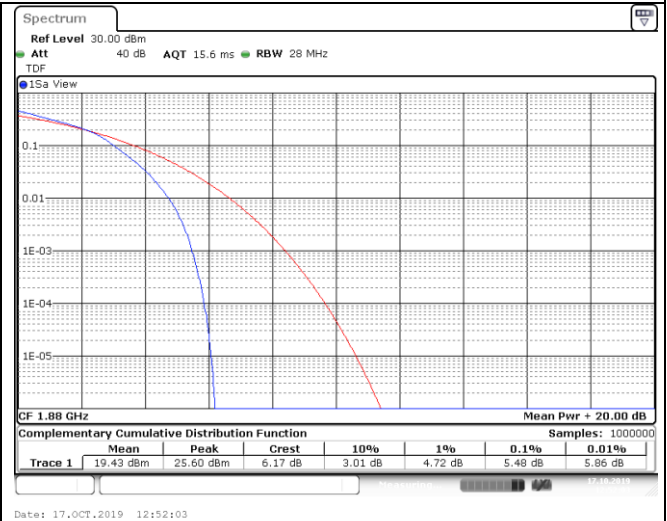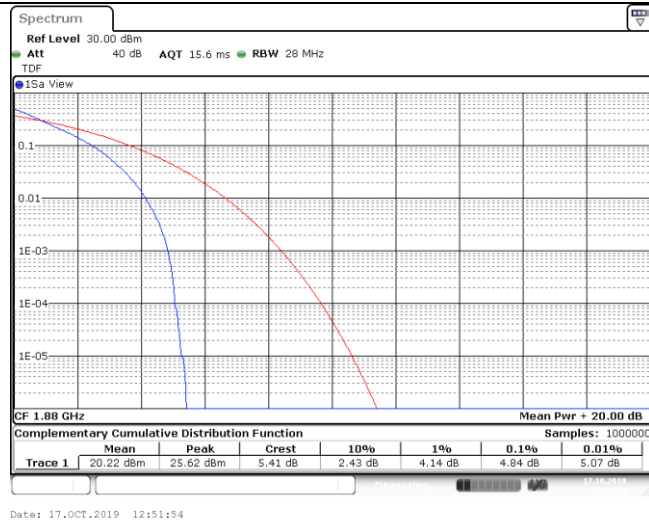

1RB#0

1RB#0

Middle Channel

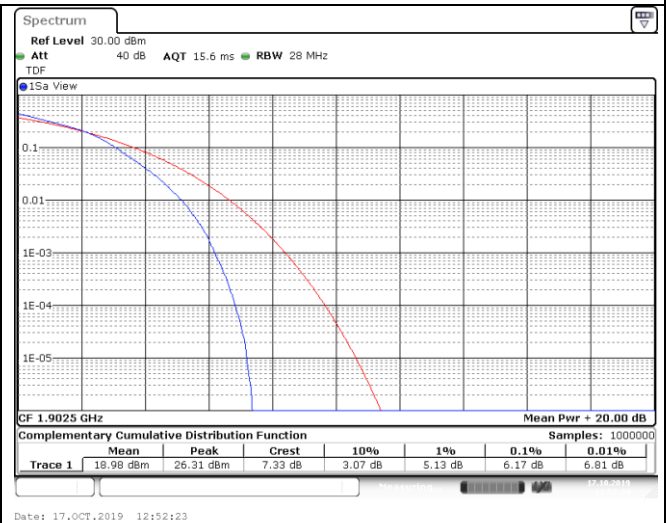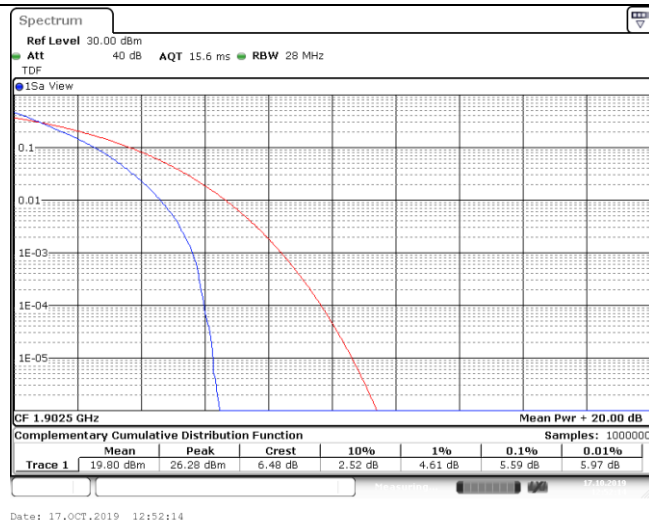

1RB#0



1RB#0

High Channel

LTE FDD Band 2-20MHz Channel Bandwidth PAPR

QPSK



16QAM

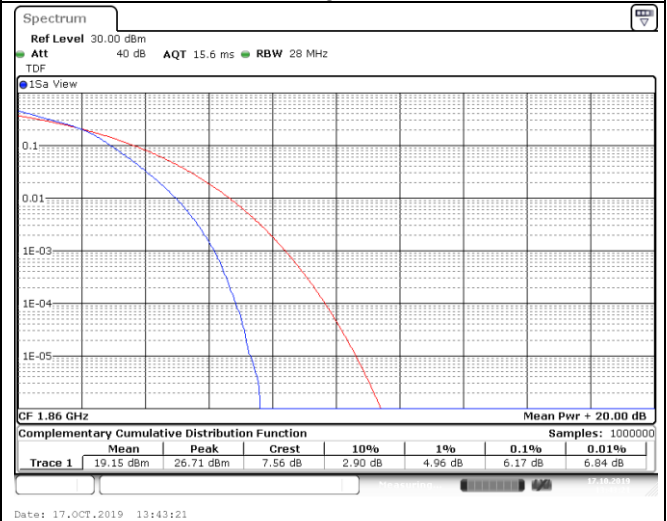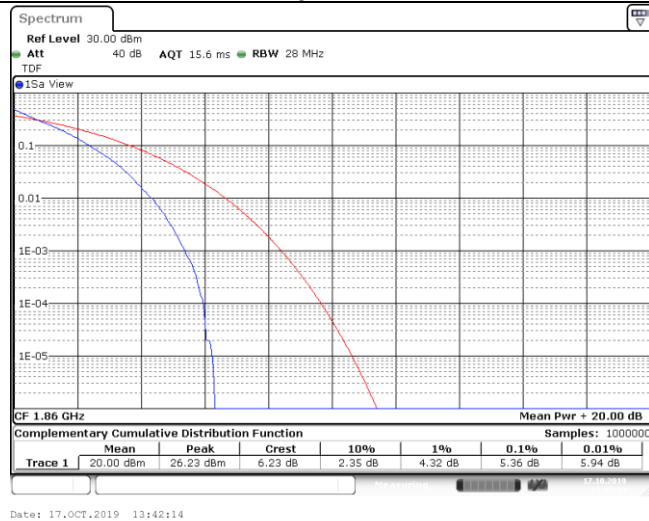

1RB#0

1RB#0



Low Channel

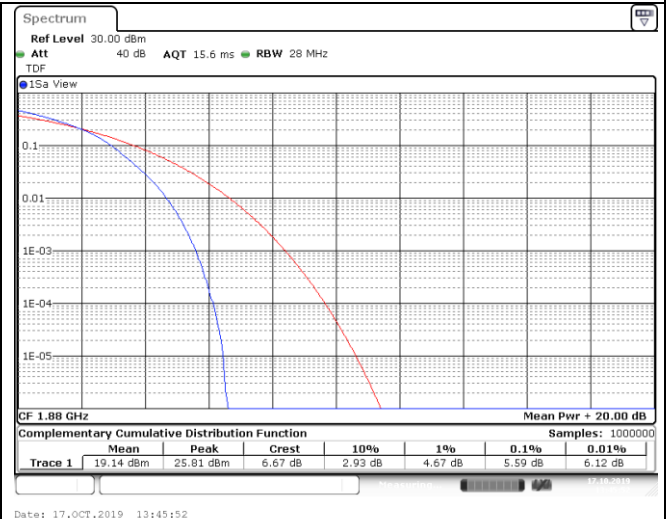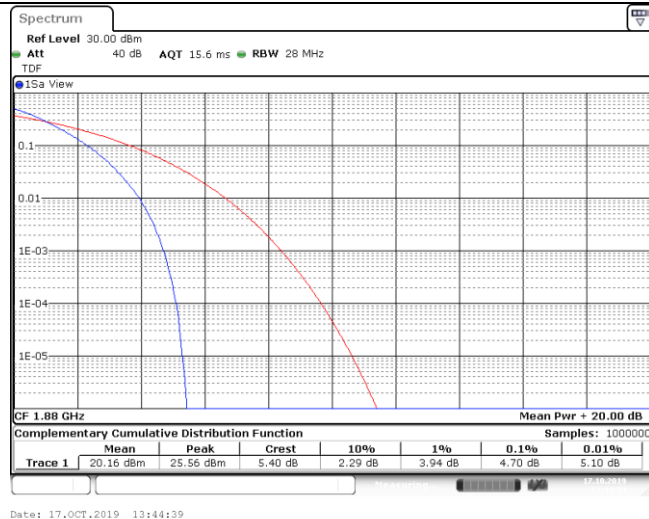

1RB#0

1RB#0

Middle Channel

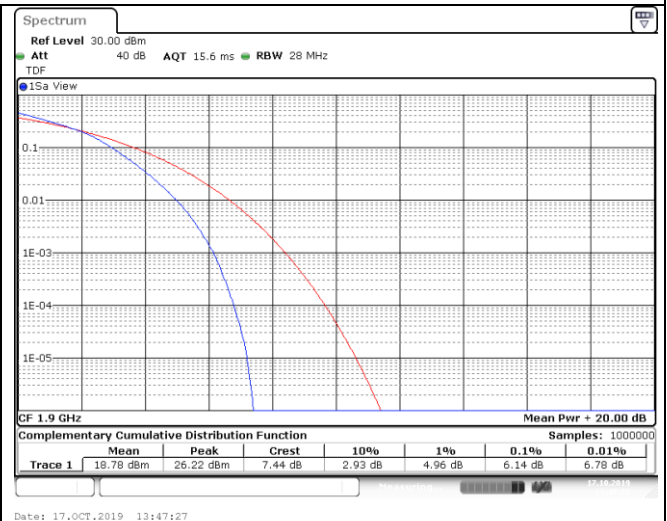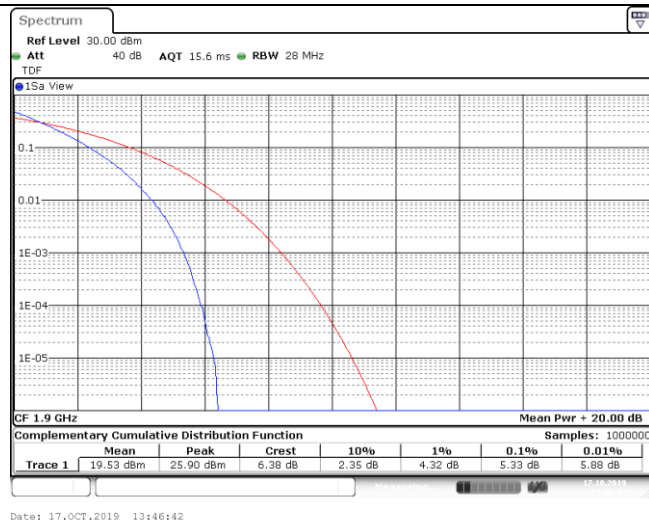

1RB#0

1RB#0


High Channel

3.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

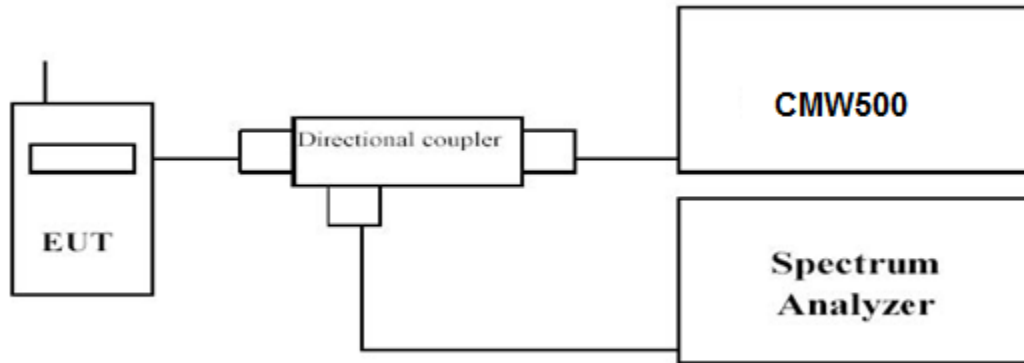

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS


Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.


LTE FDD Band 2						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
1.4 MHz	6RB#0	1850.7	1.340	1.285	1.098	1.093
		1880.0	1.330	1.280	1.098	1.098
		1909.3	1.315	1.295	1.098	1.093
3 MHz	15RB#0	1851.5	3.080	3.150	2.715	2.715
		1880.0	3.080	3.070	2.715	2.715
		1908.5	3.060	3.070	2.715	2.715
5 MHz	25RB#0	1852.5	5.420	5.460	4.515	4.545
		1880.0	5.340	5.310	4.545	4.525
		1907.5	5.340	5.250	4.535	4.525
10 MHz	50RB#0	1855.0	10.267	10.533	9.018	9.018
		1880.0	10.100	10.367	8.985	8.985
		1905.0	10.200	10.167	9.018	9.018
15 MHz	75RB#0	1857.5	16.150	15.100	13.527	13.527
		1880.0	15.400	15.100	13.478	13.527
		1902.5	15.550	15.250	13.527	13.527
20 MHz	100RB#0	1860.0	20.800	20.200	18.103	18.036
		1880.0	20.133	20.333	18.037	18.037
		1900.0	20.467	20.467	18.103	18.103

LTE FDD Band 2-1.4MHz Channel Bandwidth

QPSK


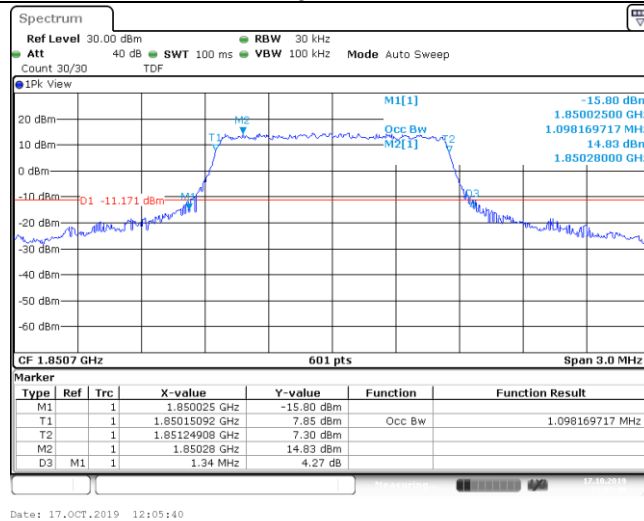


16QAM

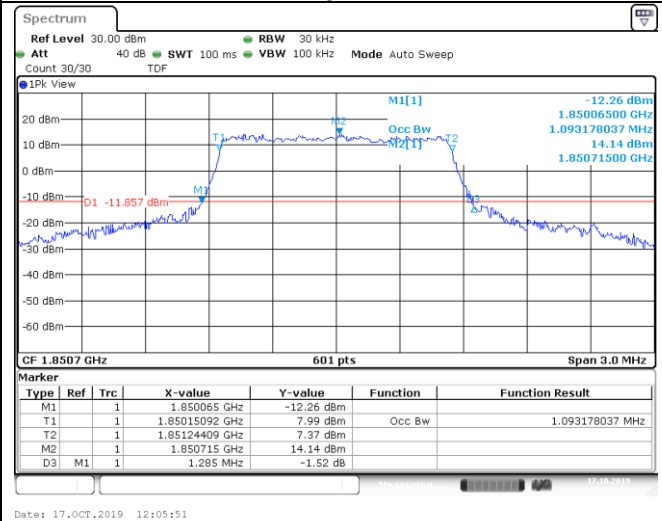



6RB#0

Low Channel

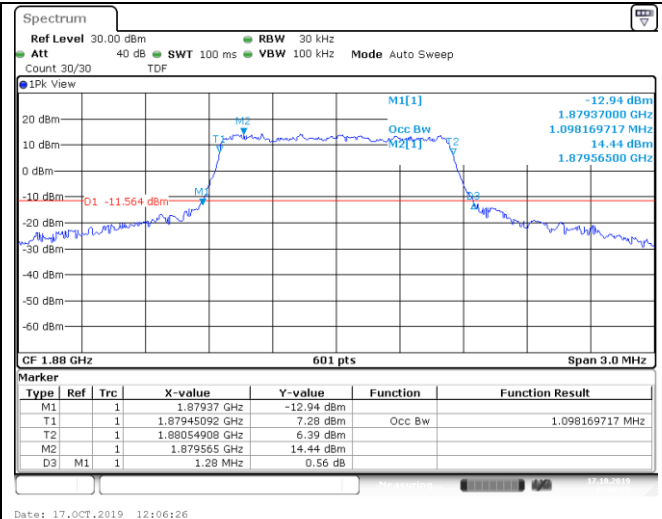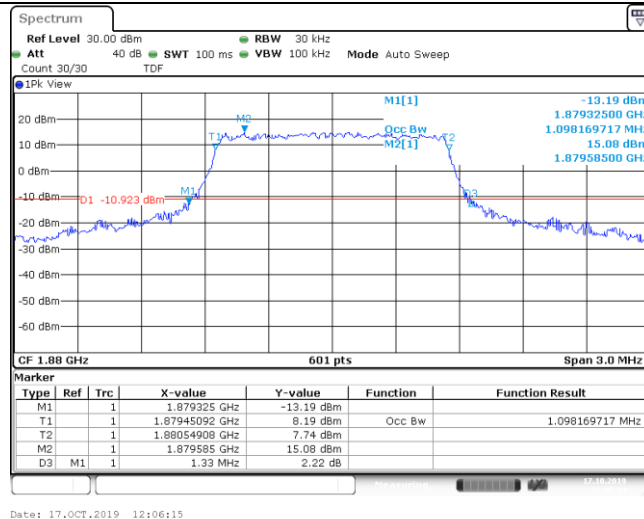

6RB#0

Middle Channel

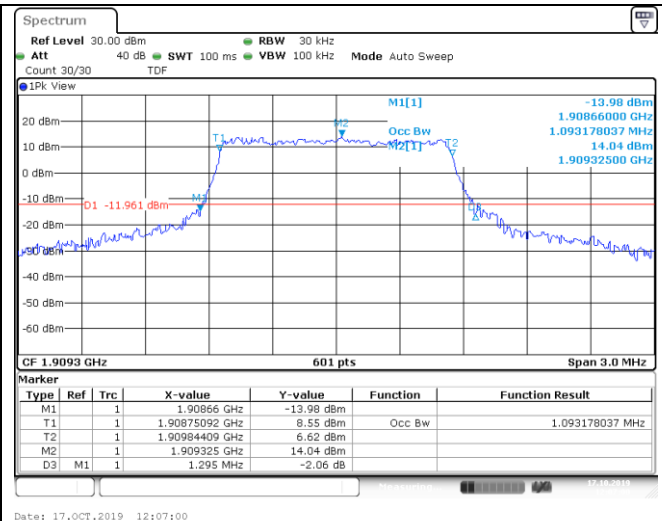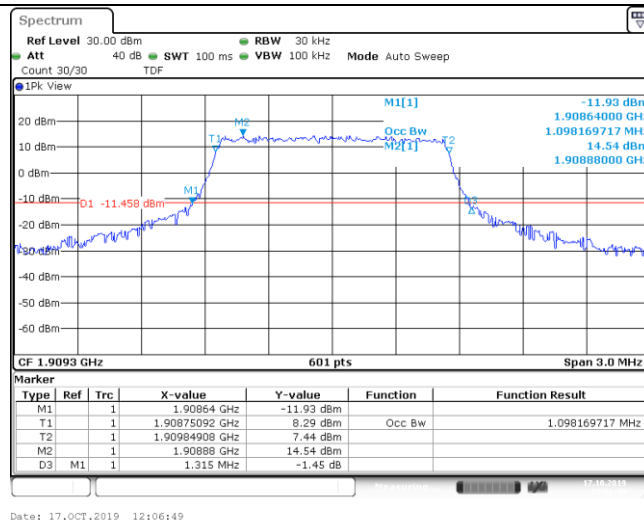


6RB#0

6RB#0


High Channel

LTE FDD Band 2-3MHz Channel Bandwidth

QPSK

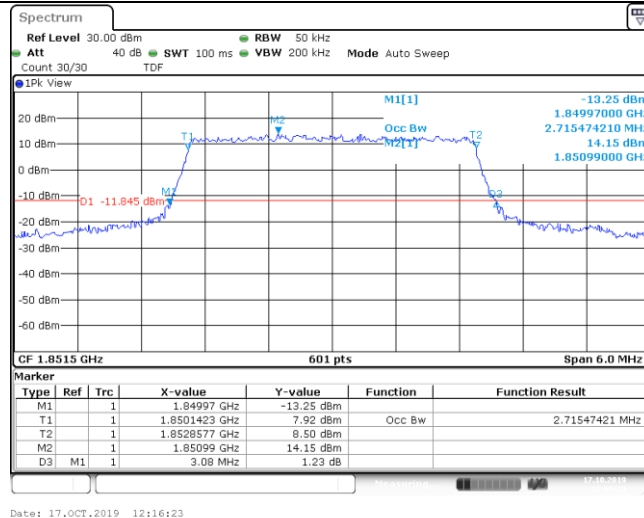


16QAM

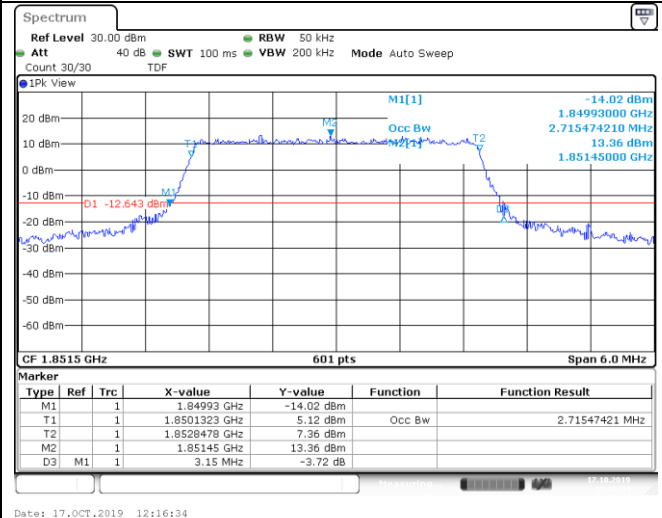


15RB#0

Low Channel

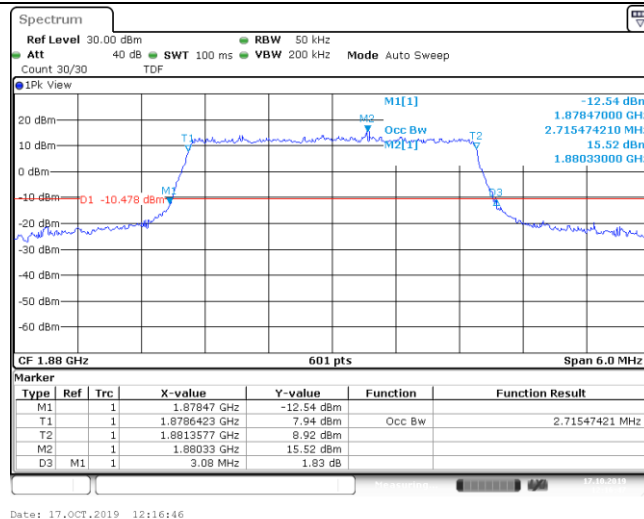


15RB#0

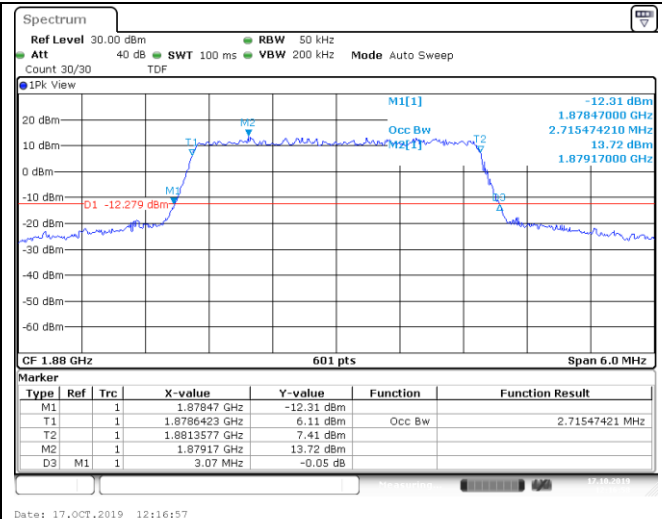


15RB#0

Middle Channel

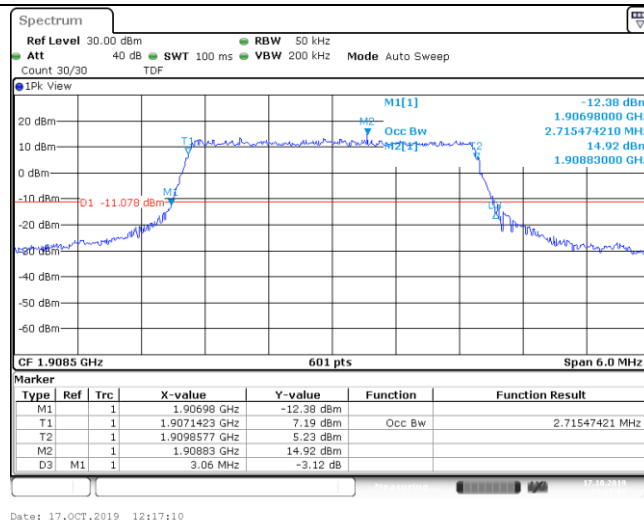

15RB#0

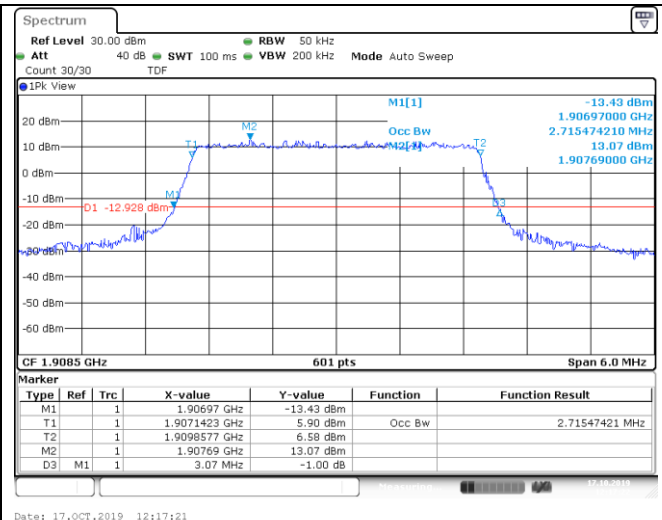


15RB#0

15RB#0


High Channel

LTE FDD Band 2-5MHz Channel Bandwidth

QPSK

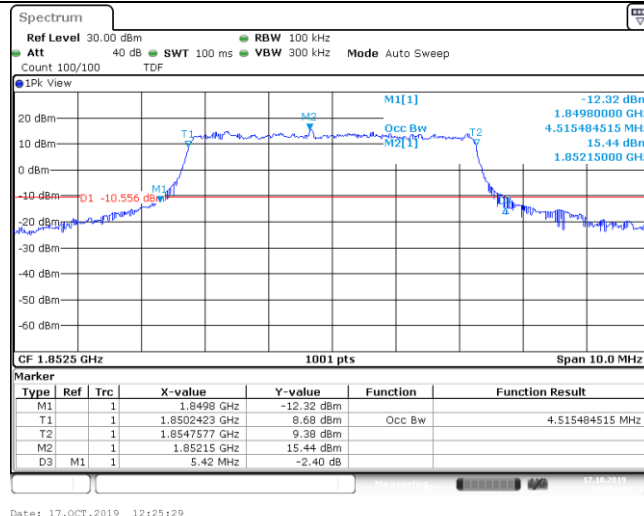



16QAM

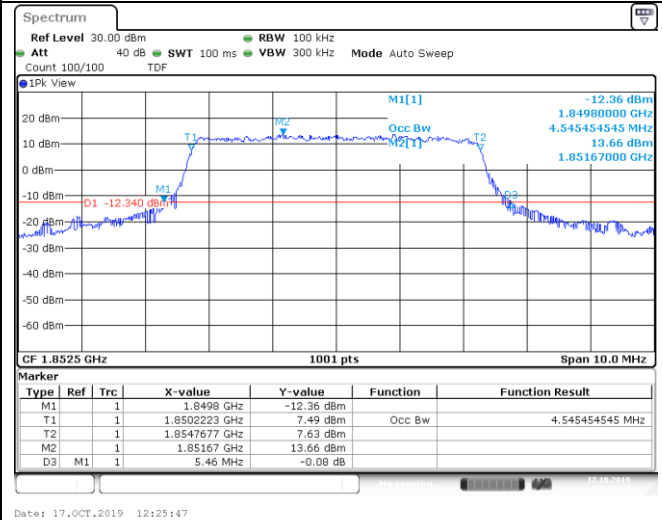

25RB#0

25RB#0



Low Channel

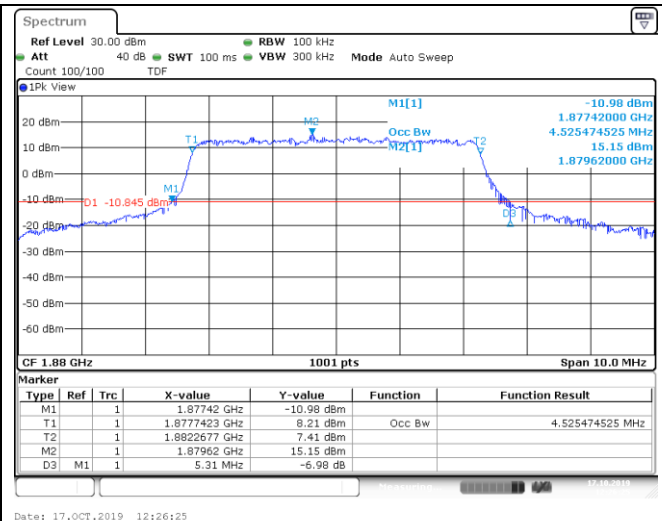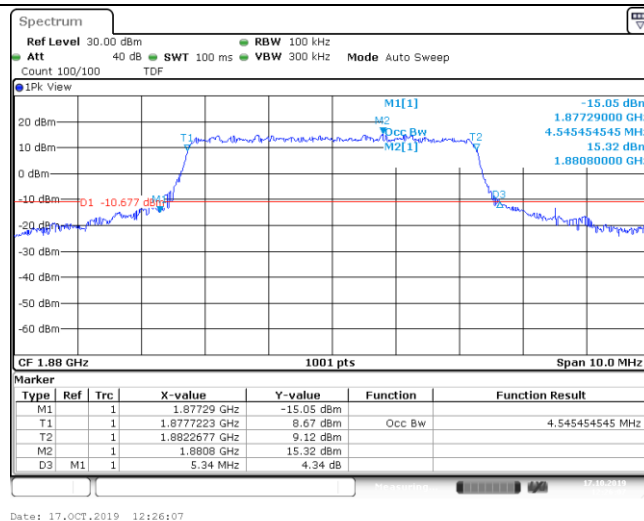

25RB#0

25RB#0

Middle Channel

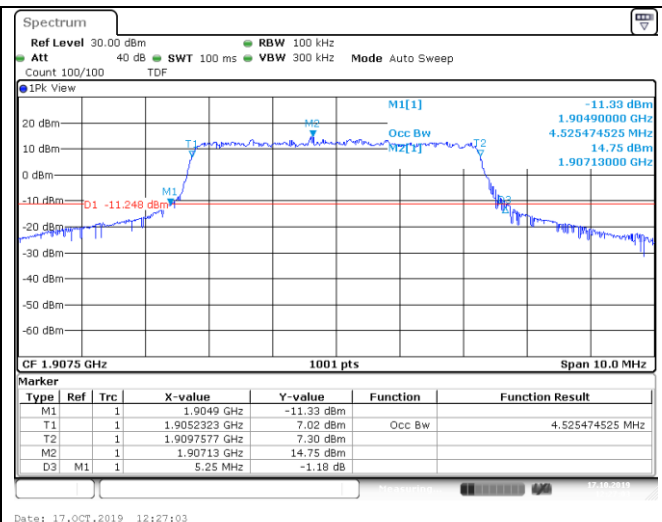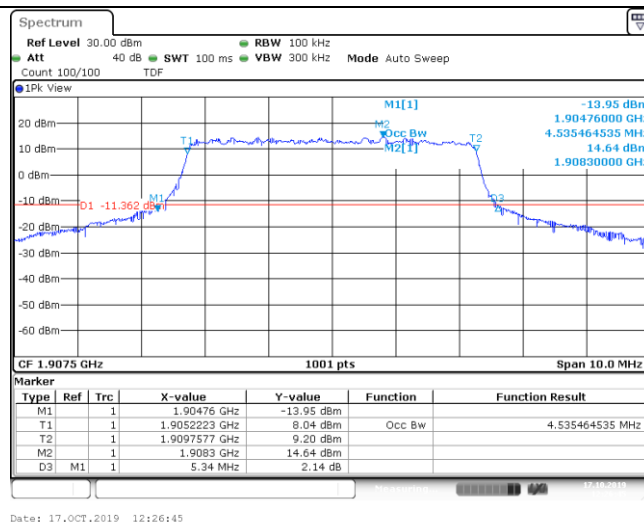


25RB#0

25RB#0


High Channel

LTE FDD Band 2-10MHz Channel Bandwidth

QPSK

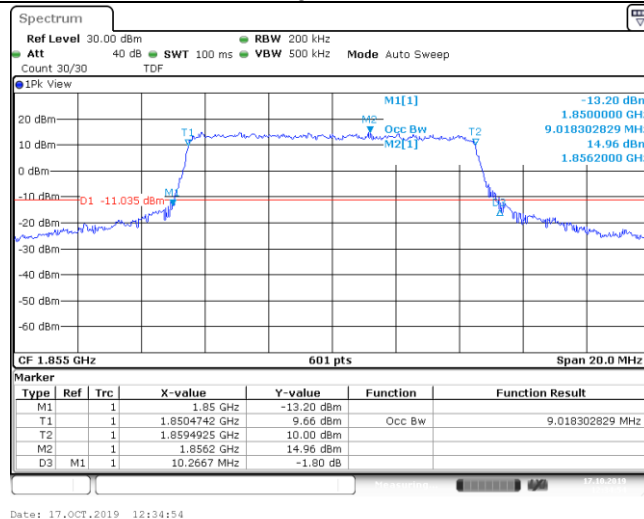



16QAM

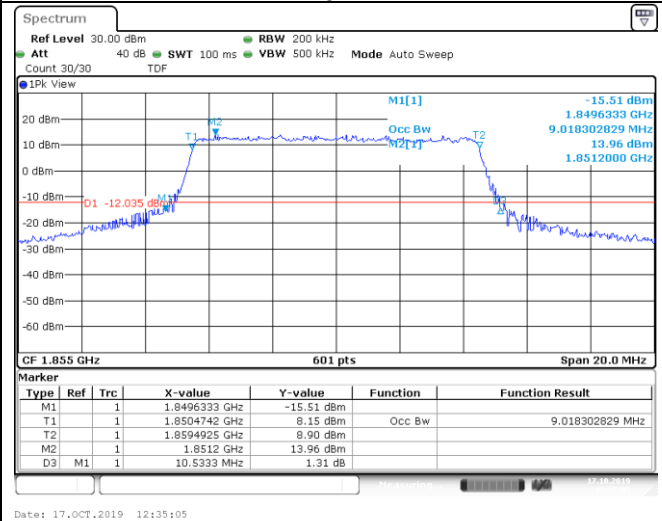

50RB#0

50RB#0



Low Channel

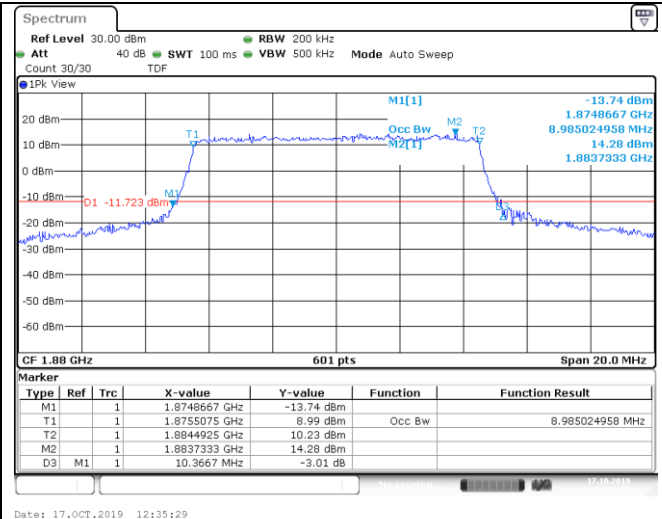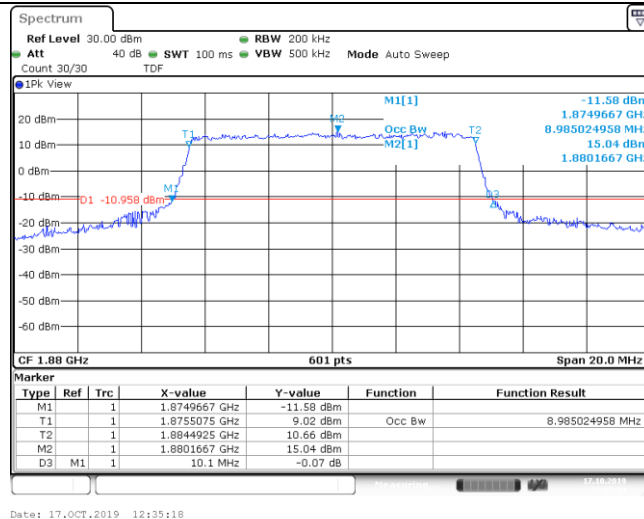

50RB#0

50RB#0

Middle Channel

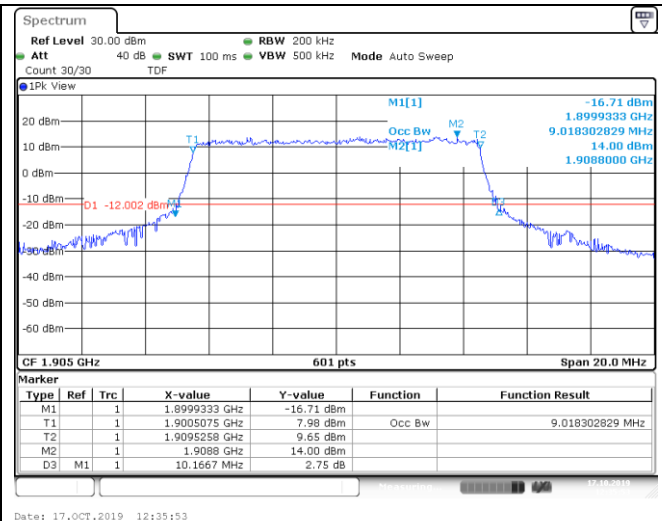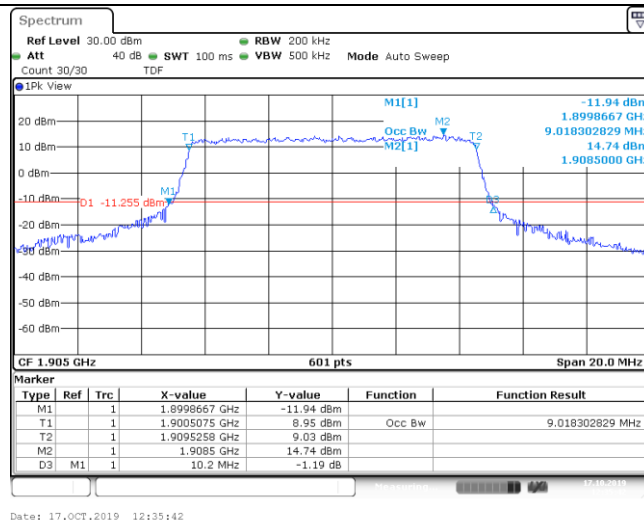


50RB#0

50RB#0

High Channel


LTE FDD Band 2-15MHz Channel Bandwidth

QPSK

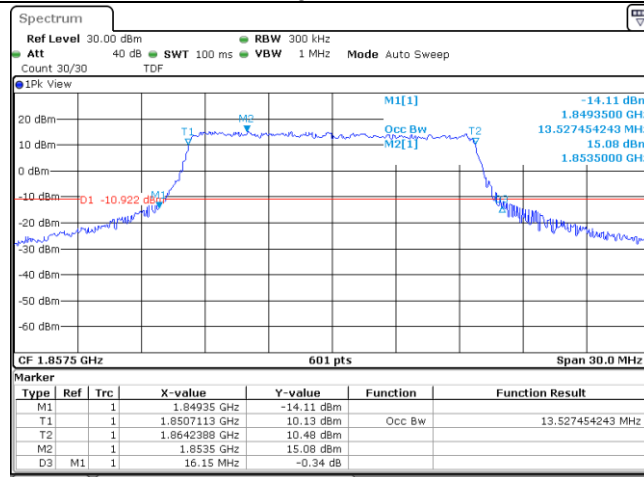

Date: 17.OCT.2019 12:43:44

16QAM

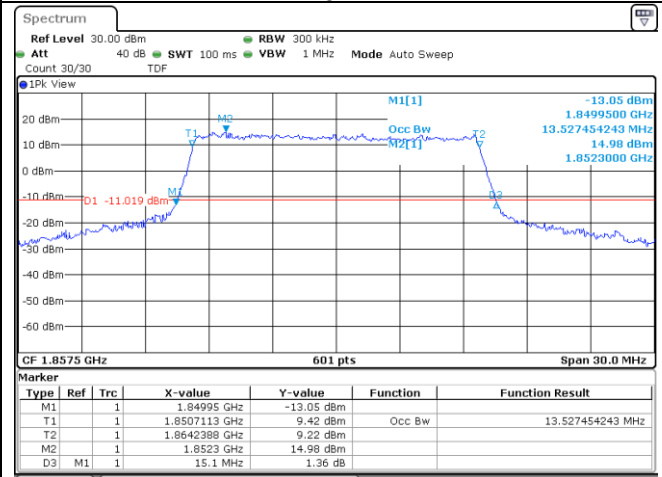


Date: 17.OCT.2019 12:43:55


75RB#0

75RB#0

Low Channel

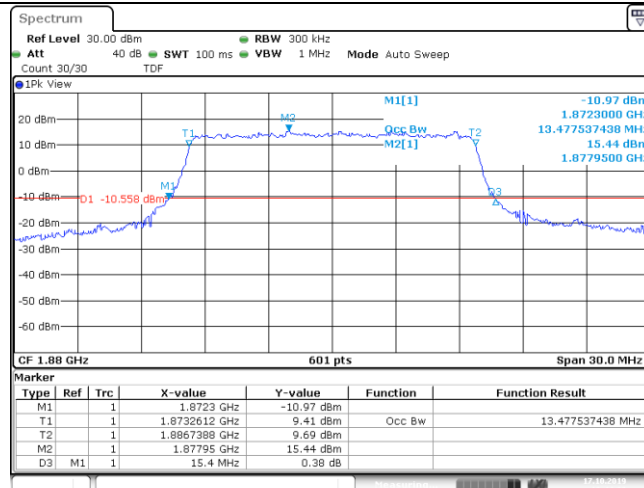

Date: 17.OCT.2019 12:44:08

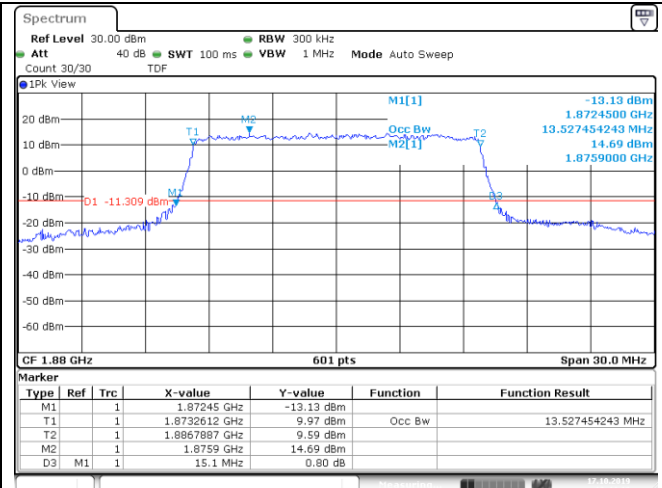


Date: 17.OCT.2019 12:44:18


75RB#0

75RB#0

Middle Channel

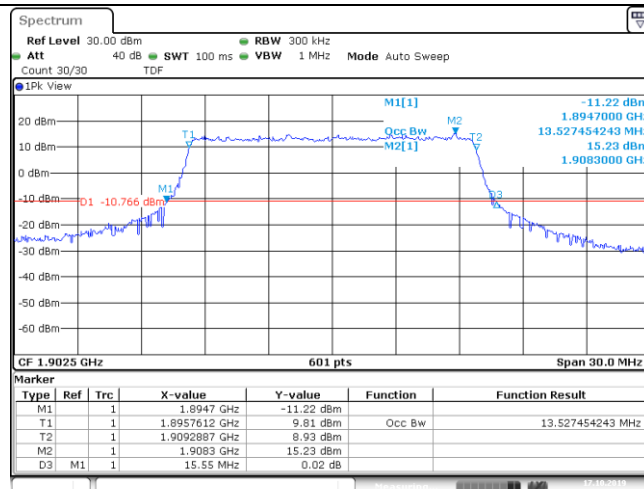

Date: 17.OCT.2019 12:44:32

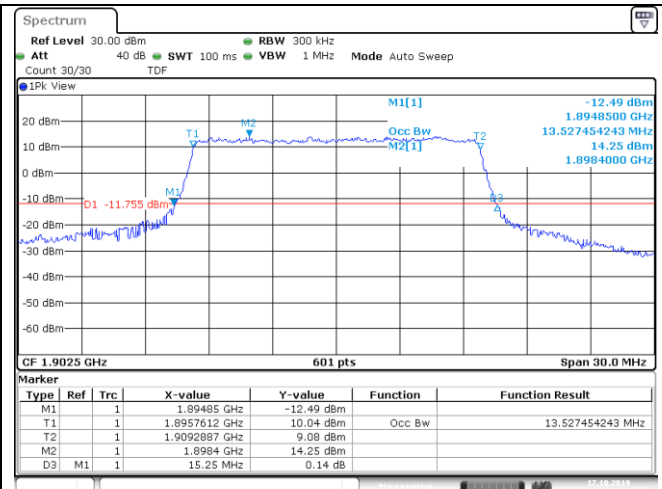

Date: 17.OCT.2019 12:44:43


75RB#0

75RB#0


High Channel

LTE FDD Band 2-20MHz Channel Bandwidth

QPSK

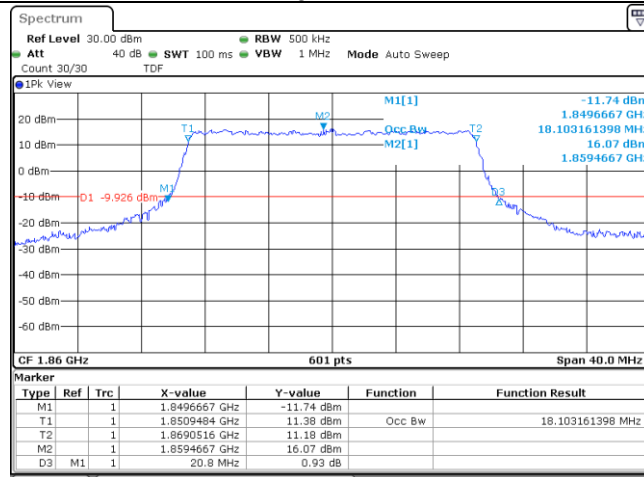


16QAM

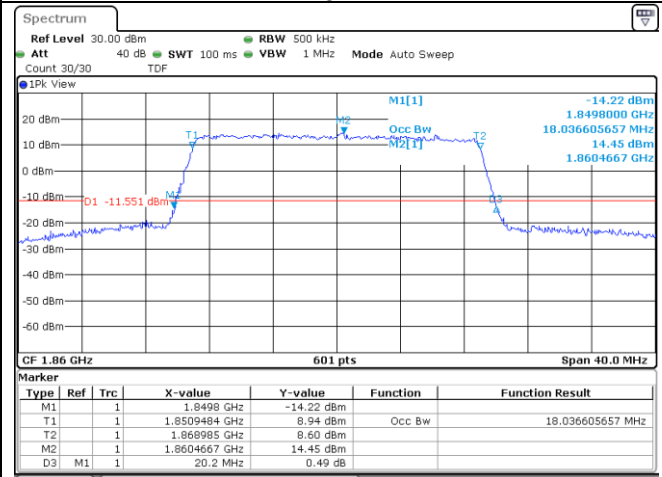


100RB#0

Low Channel

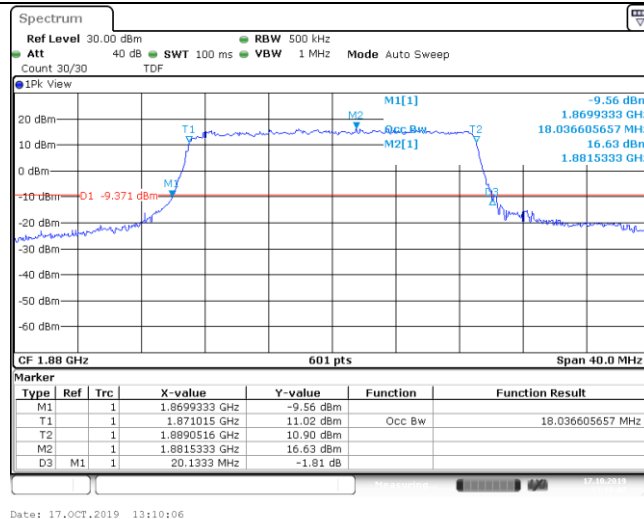



100RB#0

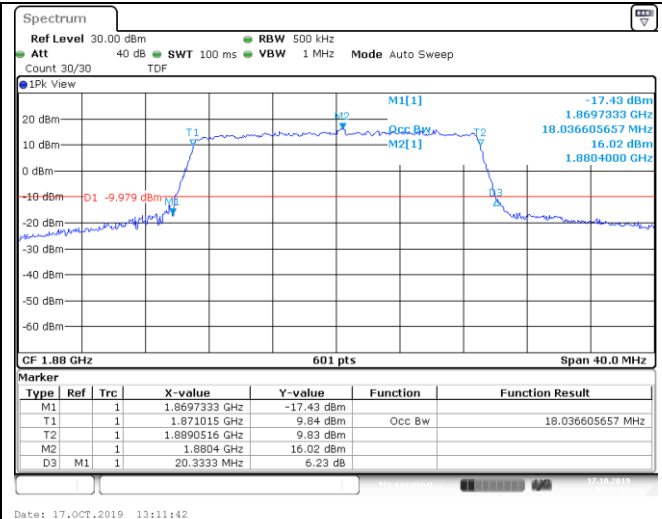

100RB#0

100RB#0

Middle Channel

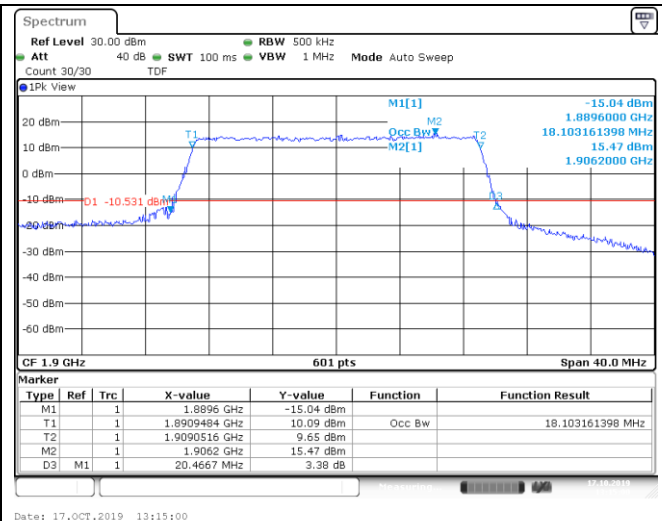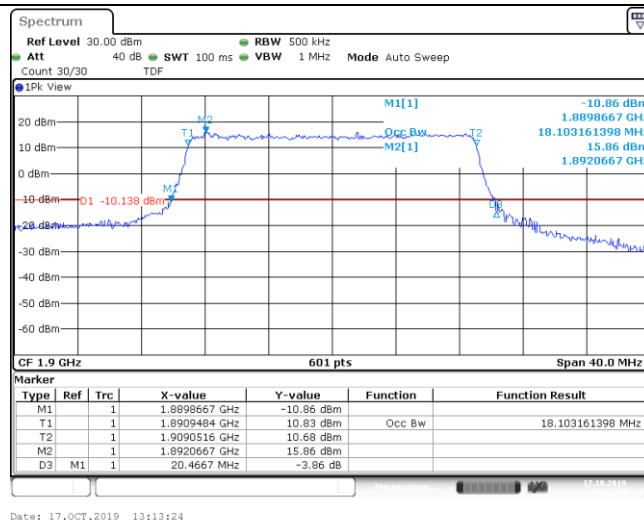

100RB#0

100RB#0


High Channel

3.4 Band Edge compliance

LIMIT

Per FCC §24.238 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST CONFIGURATION

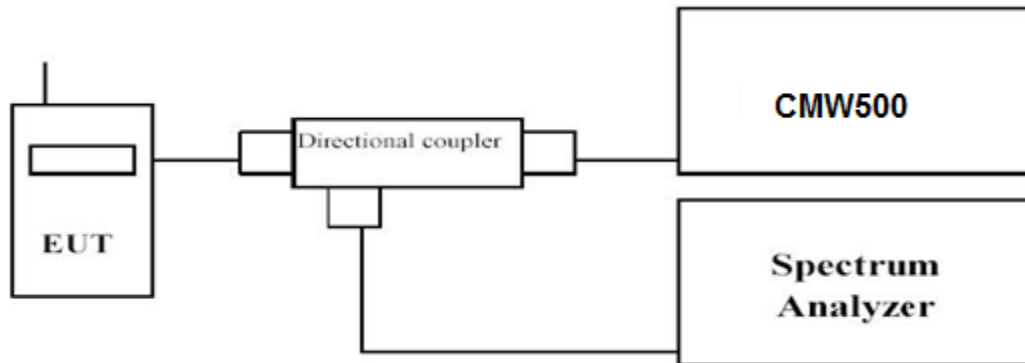

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum


TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.


LTE FDD Band 2-1.4MHz Channel Bandwidth Band Edge Compliance

QPSK

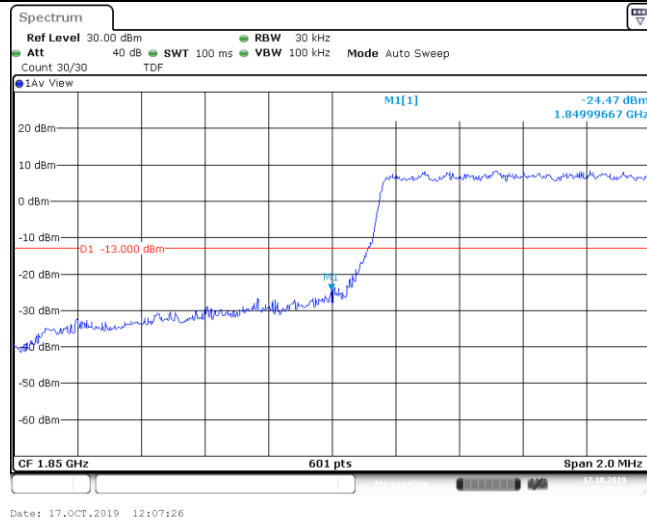


1RB#0

16QAM

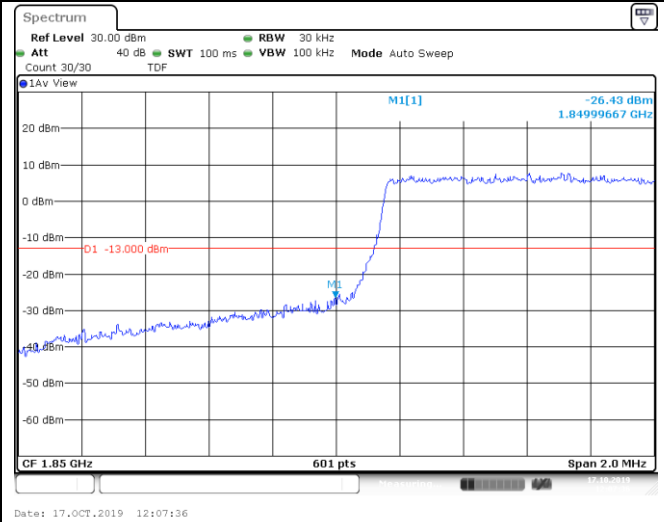


1RB#0

Low Channel

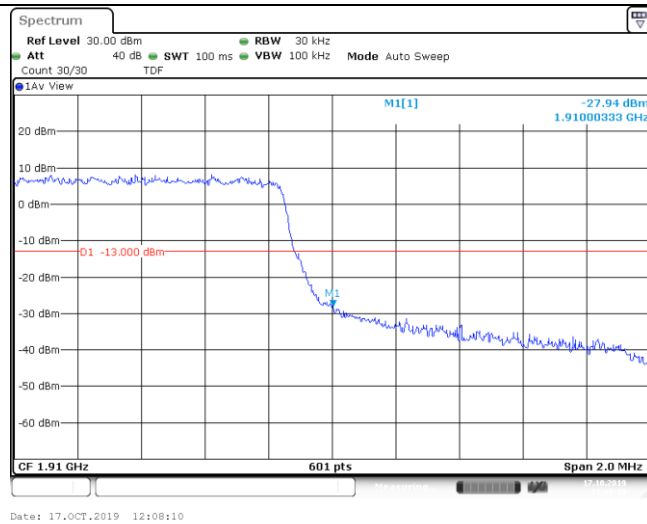

1RB#0

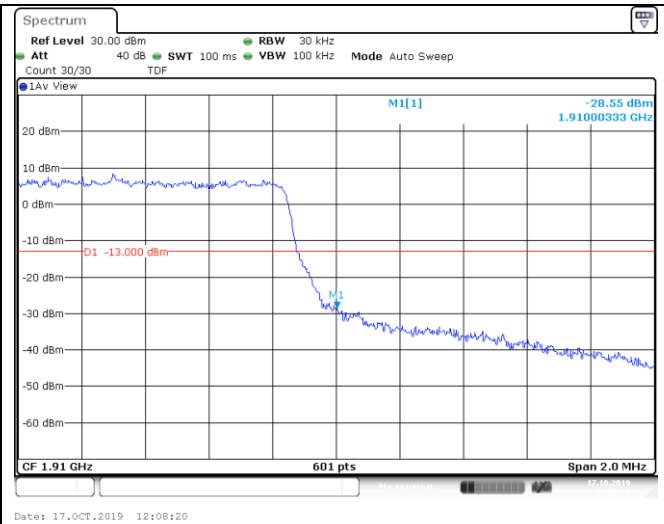


1RB#0


High Channel

LTE FDD Band 2-3MHz Channel Bandwidth Band Edge Compliance

QPSK

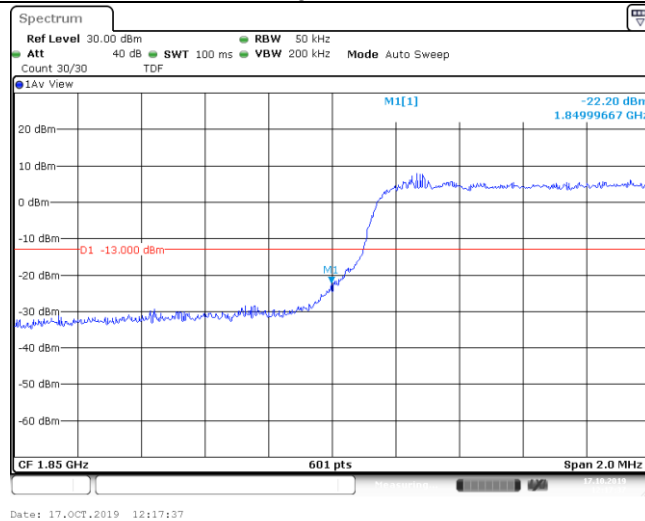



16QAM

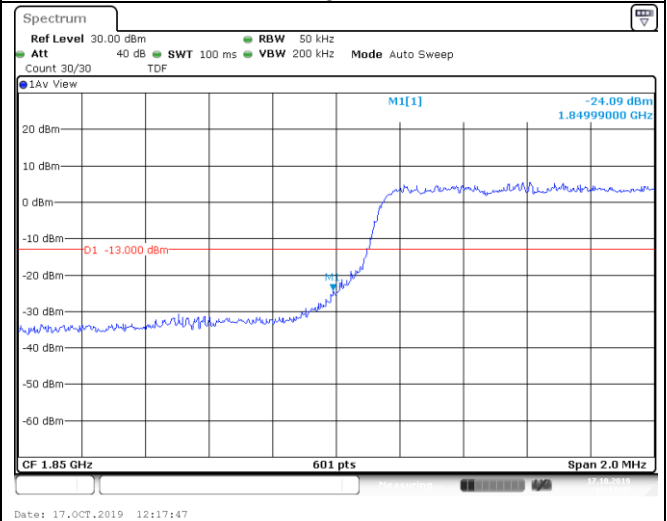

1RB#0

1RB#0

Low Channel

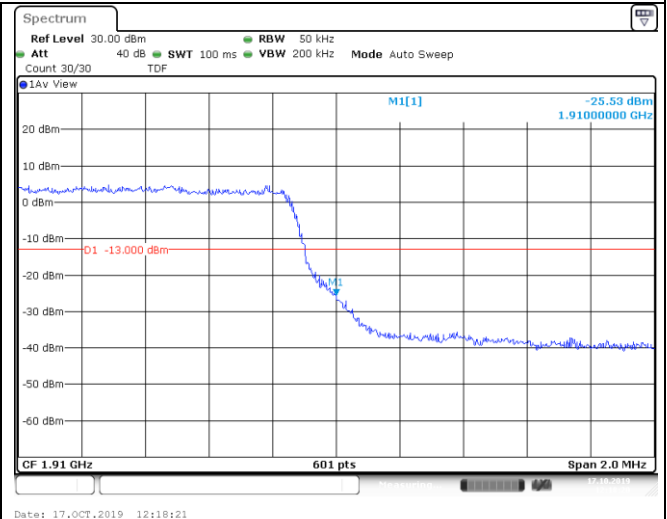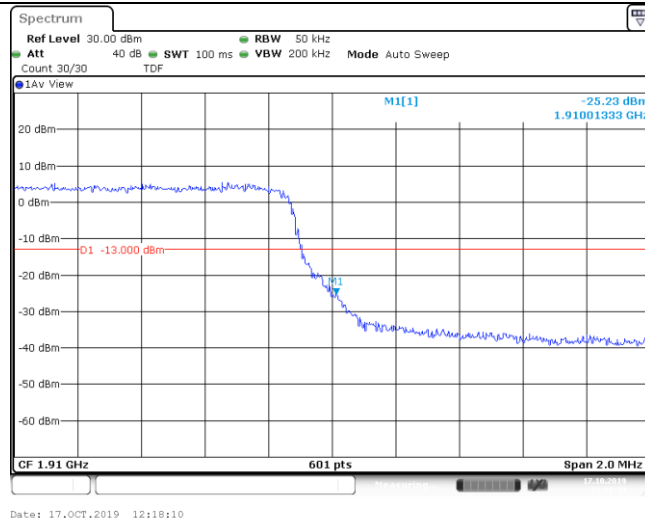

1RB#0

1RB#0

High Channel