


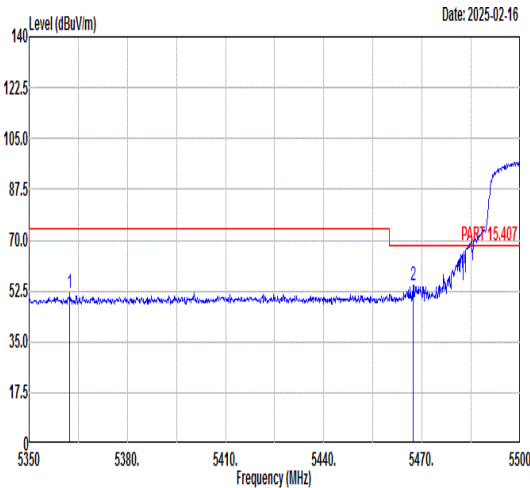



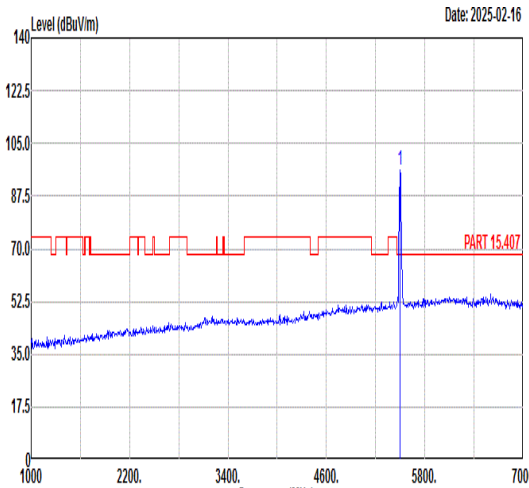


		53																																																																																																		
Mode		Band Edge																																																																																																		
		U-NII-2C_5.47-5.725_802.11n HT20_CH100_Full RU_5500MHz																																																																																																		
ANT		9																																																																																																		
Pol.		Horizontal					Fundamental																																																																																													
Peak	 Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5362.45</td><td>51.76</td><td>74.00</td><td>-22.24</td><td>39.35</td><td>36.41</td><td>9.43</td><td>33.43</td><td>400</td><td>82</td><td>PEAK</td></tr><tr><td>2</td><td>5467.30</td><td>54.29</td><td>68.30</td><td>-14.01</td><td>41.68</td><td>36.33</td><td>9.69</td><td>33.41</td><td>400</td><td>82</td><td>PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5362.45	51.76	74.00	-22.24	39.35	36.41	9.43	33.43	400	82	PEAK	2	5467.30	54.29	68.30	-14.01	41.68	36.33	9.69	33.41	400	82	PEAK	 Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>96.34</td><td>-----</td><td>-----</td><td>83.73</td><td>36.30</td><td>9.71</td><td>33.40</td><td>400</td><td>82</td><td>PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	96.34	-----	-----	83.73	36.30	9.71	33.40	400	82	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5362.45	51.76	74.00	-22.24	39.35	36.41	9.43	33.43	400	82	PEAK																																																																																									
2	5467.30	54.29	68.30	-14.01	41.68	36.33	9.69	33.41	400	82	PEAK																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	96.34	-----	-----	83.73	36.30	9.71	33.40	400	82	PEAK																																																																																									
Avg	 Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5421.10</td><td>41.53</td><td>54.00</td><td>-12.47</td><td>28.92</td><td>36.36</td><td>9.67</td><td>33.42</td><td>400</td><td>82</td><td>AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5421.10	41.53	54.00	-12.47	28.92	36.36	9.67	33.42	400	82	AVERAGE	 Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>90.02</td><td>-----</td><td>-----</td><td>77.41</td><td>36.30</td><td>9.71</td><td>33.40</td><td>400</td><td>82</td><td>AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	90.02	-----	-----	77.41	36.30	9.71	33.40	400	82	AVERAGE												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5421.10	41.53	54.00	-12.47	28.92	36.36	9.67	33.42	400	82	AVERAGE																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	90.02	-----	-----	77.41	36.30	9.71	33.40	400	82	AVERAGE																																																																																									


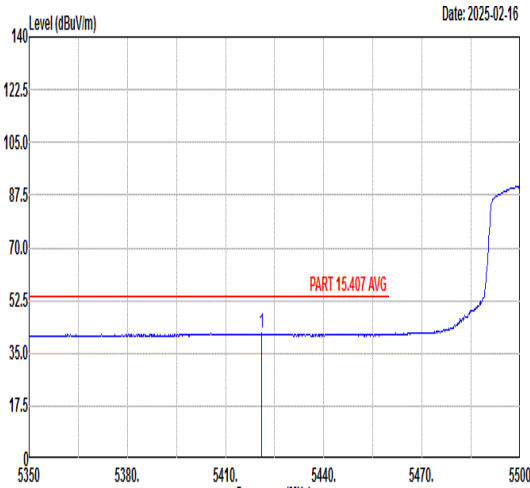


		53																																																										
Mode		Band Edge																																																										
		U-NII-2C_5.47-5.725_802.11n HT20_CH100_Full RU_5500MHz																																																										
ANT		9																																																										
Pol.		Vertical					Fundamental																																																					
Peak	Level (dBuV/m) Date: 2025-02-16 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor dB cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5451.25</td><td>55.85</td><td>74.00</td><td>-18.15</td><td>43.24</td><td>36.34</td><td>9.68</td><td>33.41</td><td>314</td><td>0 PEAK</td></tr><tr><td>2 5469.10</td><td>61.45</td><td>68.30</td><td>-6.85</td><td>48.85</td><td>36.32</td><td>9.69</td><td>33.41</td><td>314</td><td>0 PEAK</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5451.25	55.85	74.00	-18.15	43.24	36.34	9.68	33.41	314	0 PEAK	2 5469.10	61.45	68.30	-6.85	48.85	36.32	9.69	33.41	314	0 PEAK	Level (dBuV/m) Date: 2025-02-16 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor dB cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5500.00</td><td>103.51</td><td>-----</td><td>-----</td><td>90.90</td><td>36.30</td><td>9.71</td><td>33.40</td><td>314</td><td>0 PEAK</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5500.00	103.51	-----	-----	90.90	36.30	9.71	33.40	314	0 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																		
1 5451.25	55.85	74.00	-18.15	43.24	36.34	9.68	33.41	314	0 PEAK																																																			
2 5469.10	61.45	68.30	-6.85	48.85	36.32	9.69	33.41	314	0 PEAK																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																			
1 5500.00	103.51	-----	-----	90.90	36.30	9.71	33.40	314	0 PEAK																																																			
Avg	Level (dBuV/m) Date: 2025-02-16 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor dB cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5459.95</td><td>43.27</td><td>54.00</td><td>-10.73</td><td>30.66</td><td>36.33</td><td>9.69</td><td>33.41</td><td>314</td><td>0 AVERAGE</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5459.95	43.27	54.00	-10.73	30.66	36.33	9.69	33.41	314	0 AVERAGE	Level (dBuV/m) Date: 2025-02-16 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor dB cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5500.00</td><td>96.59</td><td>-----</td><td>-----</td><td>83.98</td><td>36.30</td><td>9.71</td><td>33.40</td><td>314</td><td>0 AVERAGE</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5500.00	96.59	-----	-----	83.98	36.30	9.71	33.40	314	0 AVERAGE										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																		
1 5459.95	43.27	54.00	-10.73	30.66	36.33	9.69	33.41	314	0 AVERAGE																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																			
1 5500.00	96.59	-----	-----	83.98	36.30	9.71	33.40	314	0 AVERAGE																																																			

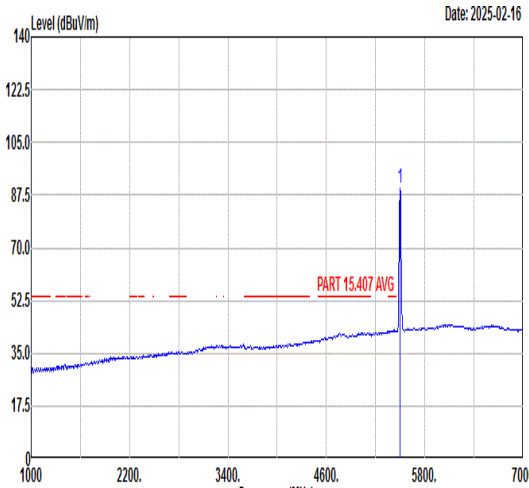

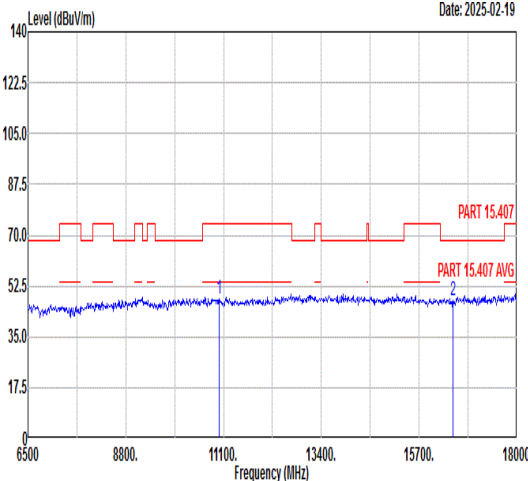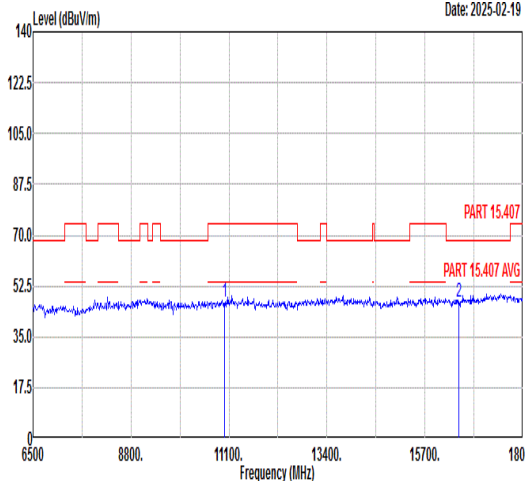Mode	53																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_Full RU_5500MHz																																																																																															
ANT	9																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.87</td><td>74.00</td><td>-26.13</td><td>60.25</td><td>38.60</td><td>12.52 63.50</td></tr><tr><td>2</td><td>16500.00</td><td>47.37</td><td>68.30</td><td>-20.93</td><td>55.00</td><td>41.95</td><td>15.17 64.75</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11000.00	47.87	74.00	-26.13	60.25	38.60	12.52 63.50	2	16500.00	47.37	68.30	-20.93	55.00	41.95	15.17 64.75	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.16</td><td>74.00</td><td>-26.84</td><td>59.54</td><td>38.60</td><td>12.52 63.50</td></tr><tr><td>2</td><td>16500.00</td><td>47.05</td><td>68.30</td><td>-21.25</td><td>54.68</td><td>41.95</td><td>15.17 64.75</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11000.00	47.16	74.00	-26.84	59.54	38.60	12.52 63.50	2	16500.00	47.05	68.30	-21.25	54.68	41.95	15.17 64.75
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11000.00	47.87	74.00	-26.13	60.25	38.60	12.52 63.50																																																																																									
2	16500.00	47.37	68.30	-20.93	55.00	41.95	15.17 64.75																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11000.00	47.16	74.00	-26.84	59.54	38.60	12.52 63.50																																																																																									
2	16500.00	47.05	68.30	-21.25	54.68	41.95	15.17 64.75																																																																																									

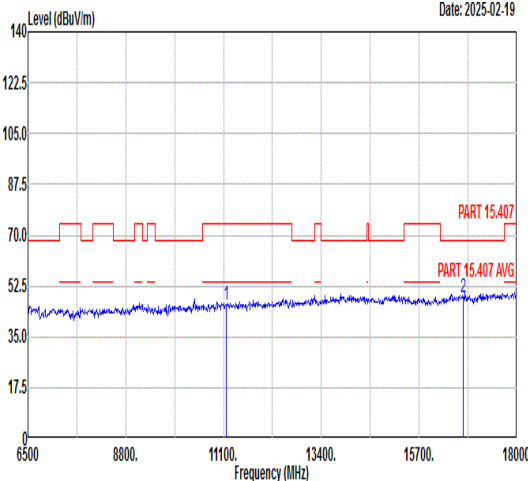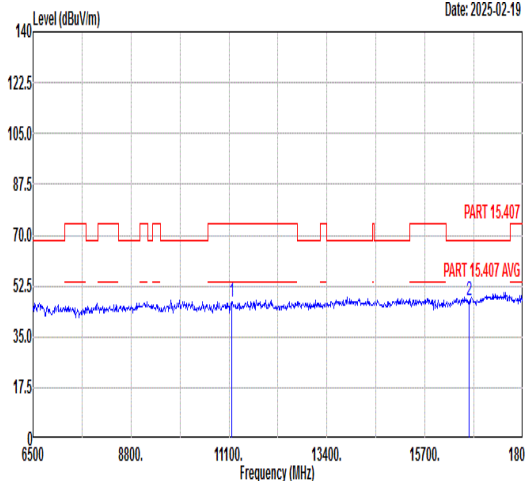

Mode	54																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_Full RU_5580MHz																																																																																															
ANT	9																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11160.00</td><td>46.02</td><td>74.00</td><td>-27.98</td><td>58.20</td><td>38.79</td><td>12.64</td></tr><tr><td>2</td><td>16740.00</td><td>48.65</td><td>68.30</td><td>-19.65</td><td>55.95</td><td>42.12</td><td>15.35</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	46.02	74.00	-27.98	58.20	38.79	12.64	2	16740.00	48.65	68.30	-19.65	55.95	42.12	15.35	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11160.00</td><td>47.15</td><td>74.00</td><td>-26.85</td><td>59.33</td><td>38.79</td><td>12.64</td></tr><tr><td>2</td><td>16740.00</td><td>47.46</td><td>68.30</td><td>-20.84</td><td>54.76</td><td>42.12</td><td>15.35</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	47.15	74.00	-26.85	59.33	38.79	12.64	2	16740.00	47.46	68.30	-20.84	54.76	42.12	15.35
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11160.00	46.02	74.00	-27.98	58.20	38.79	12.64																																																																																									
2	16740.00	48.65	68.30	-19.65	55.95	42.12	15.35																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11160.00	47.15	74.00	-26.85	59.33	38.79	12.64																																																																																									
2	16740.00	47.46	68.30	-20.84	54.76	42.12	15.35																																																																																									



Mode	55																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_Full RU_5700MHz																																																																									
ANT	9																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5728.15</td><td>55.02</td><td>68.30</td><td>-13.28</td><td>41.91</td><td>36.53</td><td>10.03</td><td>33.45</td><td>400 105 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5728.15	55.02	68.30	-13.28	41.91	36.53	10.03	33.45	400 105 PEAK	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5700.00</td><td>92.97</td><td>-----</td><td>-----</td><td>79.95</td><td>36.50</td><td>9.96</td><td>33.44</td><td>400 105 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	92.97	-----	-----	79.95	36.50	9.96	33.44	400 105 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5728.15	55.02	68.30	-13.28	41.91	36.53	10.03	33.45	400 105 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5700.00	92.97	-----	-----	79.95	36.50	9.96	33.44	400 105 PEAK																																																																		
Avg	Blank	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5700.00</td><td>86.73</td><td>-----</td><td>-----</td><td>73.71</td><td>36.50</td><td>9.96</td><td>33.44</td><td>400 105 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	86.73	-----	-----	73.71	36.50	9.96	33.44	400 105 AVERAGE																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5700.00	86.73	-----	-----	73.71	36.50	9.96	33.44	400 105 AVERAGE																																																																		





Mode	55																																									
	Band Edge																																									
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_Full RU_5700MHz																																									
ANT	9																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2025-02-16 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5727.30</td><td>61.42</td><td>68.30</td><td>-6.88</td><td>48.32</td><td>36.53</td><td>10.02</td><td>33.45</td><td>212</td><td>0 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5727.30	61.42	68.30	-6.88	48.32	36.53	10.02	33.45	212	0 PEAK	Level (dBuV/m) Date: 2025-02-16 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5700.00</td><td>103.42</td><td>-----</td><td>90.40</td><td>36.50</td><td>9.96</td><td>33.44</td><td>212</td><td>0</td><td>PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5700.00	103.42	-----	90.40	36.50	9.96	33.44	212	0	PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																
1 5727.30	61.42	68.30	-6.88	48.32	36.53	10.02	33.45	212	0 PEAK																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 5700.00	103.42	-----	90.40	36.50	9.96	33.44	212	0	PEAK																																	
Avg	Blank	Level (dBuV/m) Date: 2025-02-16 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5700.00</td><td>97.01</td><td>-----</td><td>83.99</td><td>36.50</td><td>9.96</td><td>33.44</td><td>212</td><td>0</td><td>AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5700.00	97.01	-----	83.99	36.50	9.96	33.44	212	0	AVERAGE																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 5700.00	97.01	-----	83.99	36.50	9.96	33.44	212	0	AVERAGE																																	



Mode	55																																																																															
	Harmonic																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_Full RU_5700MHz																																																																															
ANT	9																																																																															
Pol.	Horizontal								Vertical																																																																							
Peak Avg	Level (dBuV/m) Date: 2025-02-19 Frequency (MHz)								Level (dBuV/m) Date: 2025-02-19 Frequency (MHz)																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>11400.00</td><td>47.96</td><td>74.00</td><td>-26.04</td><td>59.85</td><td>39.08</td><td>12.81 63.78</td></tr><tr><td>2</td><td>17100.00</td><td>49.70</td><td>68.30</td><td>-18.60</td><td>56.58</td><td>42.41</td><td>15.62 64.91</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	11400.00	47.96	74.00	-26.04	59.85	39.08	12.81 63.78	2	17100.00	49.70	68.30	-18.60	56.58	42.41	15.62 64.91	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>11400.00</td><td>46.52</td><td>74.00</td><td>-27.48</td><td>58.41</td><td>39.08</td><td>12.81 63.78</td></tr><tr><td>2</td><td>17100.00</td><td>49.23</td><td>68.30</td><td>-19.07</td><td>56.11</td><td>42.41</td><td>15.62 64.91</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	11400.00	46.52	74.00	-27.48	58.41	39.08	12.81 63.78	2	17100.00	49.23	68.30	-19.07	56.11	42.41	15.62 64.91
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																								
1	11400.00	47.96	74.00	-26.04	59.85	39.08	12.81 63.78																																																																									
2	17100.00	49.70	68.30	-18.60	56.58	42.41	15.62 64.91																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	11400.00	46.52	74.00	-27.48	58.41	39.08	12.81 63.78																																																																									
2	17100.00	49.23	68.30	-19.07	56.11	42.41	15.62 64.91																																																																									
<table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11400.00</td><td>47.96</td><td>74.00</td><td>-26.04</td><td>59.85</td><td>39.08</td><td>12.81 63.78</td><td>---</td><td>---</td></tr><tr><td>2</td><td>17100.00</td><td>49.70</td><td>68.30</td><td>-18.60</td><td>56.58</td><td>42.41</td><td>15.62 64.91</td><td>---</td><td>---</td></tr></table>								MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	47.96	74.00	-26.04	59.85	39.08	12.81 63.78	---	---	2	17100.00	49.70	68.30	-18.60	56.58	42.41	15.62 64.91	---	---	<table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11400.00</td><td>46.52</td><td>74.00</td><td>-27.48</td><td>58.41</td><td>39.08</td><td>12.81 63.78</td><td>---</td><td>---</td></tr><tr><td>2</td><td>17100.00</td><td>49.23</td><td>68.30</td><td>-19.07</td><td>56.11</td><td>42.41</td><td>15.62 64.91</td><td>---</td><td>---</td></tr></table>								MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	46.52	74.00	-27.48	58.41	39.08	12.81 63.78	---	---	2	17100.00	49.23	68.30	-19.07	56.11	42.41	15.62 64.91	---	---					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	11400.00	47.96	74.00	-26.04	59.85	39.08	12.81 63.78	---	---																																																																							
2	17100.00	49.70	68.30	-18.60	56.58	42.41	15.62 64.91	---	---																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	11400.00	46.52	74.00	-27.48	58.41	39.08	12.81 63.78	---	---																																																																							
2	17100.00	49.23	68.30	-19.07	56.11	42.41	15.62 64.91	---	---																																																																							
Peak								Peak																																																																								

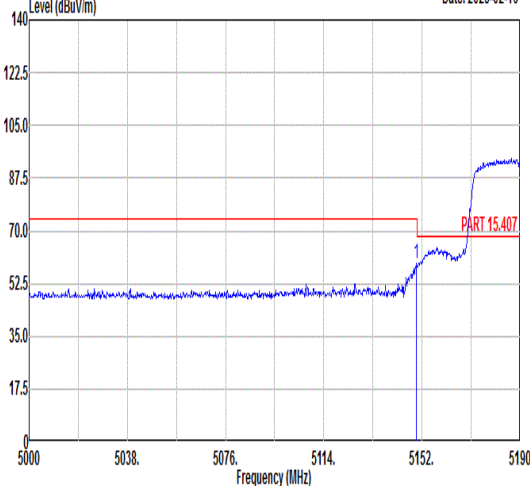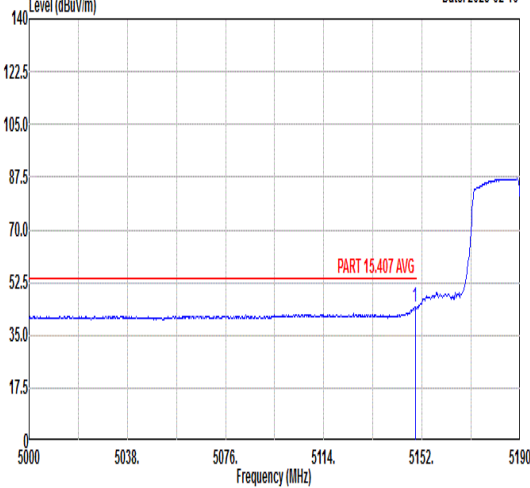

		56																																																	
Mode	Band Edge - L																																																		
	U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz																																																		
ANT	9																																																		
Pol.	Horizontal																																																		
Peak	Fundamental																																																		
	Date: 2025-02-16																																																		
Peak																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.91</td><td>59.00</td><td>74.00</td><td>-15.00</td><td>47.35</td><td>36.58</td><td>8.54</td><td>33.47</td><td>400</td><td>73 PEAK</td></tr></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.91	59.00	74.00	-15.00	47.35	36.58	8.54	33.47	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																										
1	5149.91	59.00	74.00	-15.00	47.35	36.58	8.54	33.47	400	73 PEAK																																									
Avg	Date: 2025-02-16																																																		
																																																			
Avg	Date: 2025-02-16																																																		
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.34</td><td>44.38</td><td>54.00</td><td>-9.62</td><td>32.74</td><td>36.58</td><td>8.53</td><td>33.47</td><td>400</td><td>73 AVERAGE</td></tr></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.34	44.38	54.00	-9.62	32.74	36.58	8.53	33.47	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																										
1	5149.34	44.38	54.00	-9.62	32.74	36.58	8.53	33.47	400	73 AVERAGE																																									



Mode	56																																																																									
	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz																																																																									
ANT	9																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5149.72</td><td>64.10</td><td>74.00</td><td>-9.90</td><td>52.45</td><td>36.58</td><td>8.54</td><td>33.47</td><td>394 360 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5149.72	64.10	74.00	-9.90	52.45	36.58	8.54	33.47	394 360 PEAK	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5190.00</td><td>98.60</td><td>-----</td><td>-----</td><td>86.90</td><td>36.55</td><td>8.61</td><td>33.46</td><td>394 360 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5190.00	98.60	-----	-----	86.90	36.55	8.61	33.46	394 360 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5149.72	64.10	74.00	-9.90	52.45	36.58	8.54	33.47	394 360 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5190.00	98.60	-----	-----	86.90	36.55	8.61	33.46	394 360 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5149.34</td><td>48.90</td><td>54.00</td><td>-5.10</td><td>37.26</td><td>36.58</td><td>8.53</td><td>33.47</td><td>394 360 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5149.34	48.90	54.00	-5.10	37.26	36.58	8.53	33.47	394 360 AVERAGE	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5190.00</td><td>90.58</td><td>-----</td><td>-----</td><td>78.88</td><td>36.55</td><td>8.61</td><td>33.46</td><td>394 360 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5190.00	90.58	-----	-----	78.88	36.55	8.61	33.46	394 360 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5149.34	48.90	54.00	-5.10	37.26	36.58	8.53	33.47	394 360 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5190.00	90.58	-----	-----	78.88	36.55	8.61	33.46	394 360 AVERAGE																																																																		



Mode	56																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz																																									
ANT	9																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2025-02-16 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5412.48</td><td>51.45</td><td>74.00</td><td>-22.55</td><td>38.84</td><td>36.37</td><td>9.66</td><td>33.42</td><td>394 360 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5412.48	51.45	74.00	-22.55	38.84	36.37	9.66	33.42	394 360 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5412.48	51.45	74.00	-22.55	38.84	36.37	9.66	33.42	394 360 PEAK																																	
Avg	Date: 2025-02-16 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5381.97</td><td>42.38</td><td>54.00</td><td>-11.62</td><td>29.88</td><td>36.39</td><td>9.53</td><td>33.42</td><td>394 360 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5381.97	42.38	54.00	-11.62	29.88	36.39	9.53	33.42	394 360 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5381.97	42.38	54.00	-11.62	29.88	36.39	9.53	33.42	394 360 AVERAGE																																	







		57																																																																																							
Mode	Band Edge - L																																																																																								
	U-NII-1_5.15-5.25_802.11n HT40_CH46_Full RU_5230MHz																																																																																								
ANT	9																																																																																								
Pol.	Horizontal										Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5086.71</td><td>50.39</td><td>74.00</td><td>-23.61</td><td>38.82</td><td>36.63</td><td>8.42</td><td>33.48</td><td>300</td><td>1</td><td>PEAK</td></tr></table>										Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5086.71	50.39	74.00	-23.61	38.82	36.63	8.42	33.48	300	1	PEAK	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>87.49</td><td>-----</td><td>-----</td><td>75.68</td><td>36.52</td><td>8.74</td><td>33.45</td><td>300</td><td>1</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	87.49	-----	-----	75.68	36.52	8.74	33.45	300	1	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5086.71	50.39	74.00	-23.61	38.82	36.63	8.42	33.48	300	1	PEAK																																																																														
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5230.00	87.49	-----	-----	75.68	36.52	8.74	33.45	300	1	PEAK																																																																														
Avg	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5035.42</td><td>41.67</td><td>54.00</td><td>-12.33</td><td>30.17</td><td>36.67</td><td>8.32</td><td>33.49</td><td>300</td><td>1</td><td>AVERAGE</td></tr></table>										Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5035.42	41.67	54.00	-12.33	30.17	36.67	8.32	33.49	300	1	AVERAGE	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>80.61</td><td>-----</td><td>-----</td><td>68.80</td><td>36.52</td><td>8.74</td><td>33.45</td><td>300</td><td>1</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	80.61	-----	-----	68.80	36.52	8.74	33.45	300	1	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5035.42	41.67	54.00	-12.33	30.17	36.67	8.32	33.49	300	1	AVERAGE																																																																														
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5230.00	80.61	-----	-----	68.80	36.52	8.74	33.45	300	1	AVERAGE																																																																														



Mode	57																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11n HT40_CH46_Full RU_5230MHz																																										
ANT	9																																										
Pol.	Horizontal	Fundamental																																									
Peak	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5404.80</td><td>51.63</td><td>74.00</td><td>-22.37</td><td>39.02</td><td>36.38</td><td>9.65</td><td>33.42</td><td>300</td><td>1 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5404.80	51.63	74.00	-22.37	39.02	36.38	9.65	33.42	300	1 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5404.80	51.63	74.00	-22.37	39.02	36.38	9.65	33.42	300	1 PEAK																																	
Avg	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5410.78</td><td>42.09</td><td>54.00</td><td>-11.91</td><td>29.48</td><td>36.37</td><td>9.66</td><td>33.42</td><td>300</td><td>1 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5410.78	42.09	54.00	-11.91	29.48	36.37	9.66	33.42	300	1 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5410.78	42.09	54.00	-11.91	29.48	36.37	9.66	33.42	300	1 AVERAGE																																	

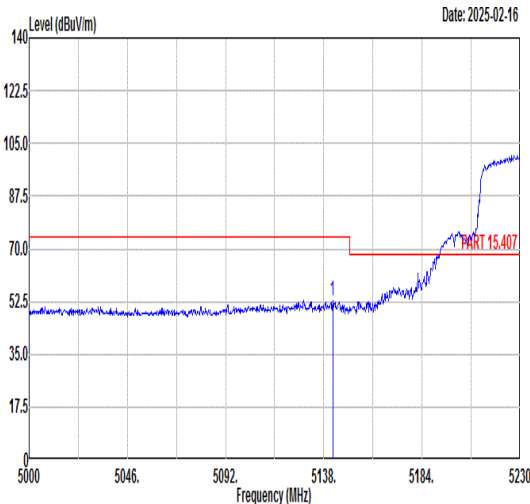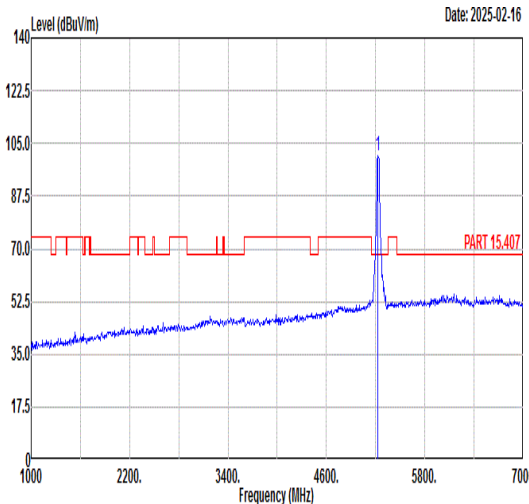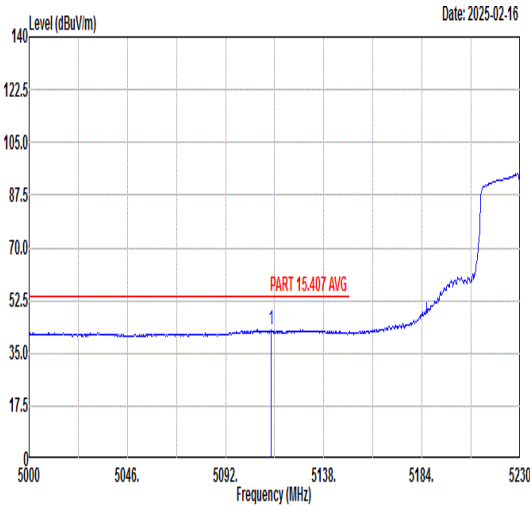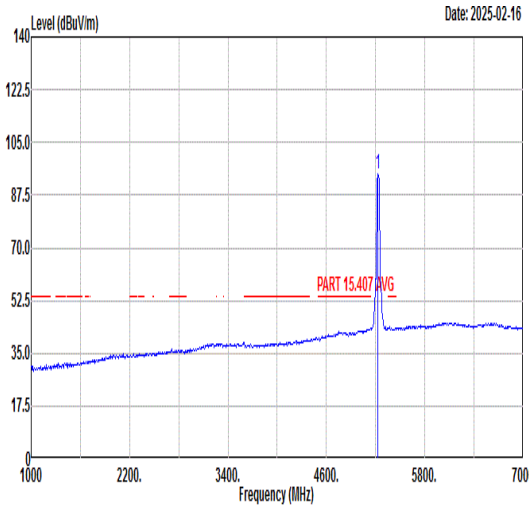

		57																																																																																		
Mode		Band Edge - L																																																																																		
		U-NII-1_5.15-5.25_802.11n HT40_CH46_Full RU_5230MHz																																																																																		
ANT		9																																																																																		
Pol.		Vertical					Fundamental																																																																													
Peak																																																																																				
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5142.14	52.89	74.00	-21.11	41.25	36.59	8.52	33.47	400	20 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5230.00	100.71	-----	-----	88.90	36.52	8.74	33.45	400	20 PEAK				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1 5142.14	52.89	74.00	-21.11	41.25	36.59	8.52	33.47	400	20 PEAK																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1 5230.00	100.71	-----	-----	88.90	36.52	8.74	33.45	400	20 PEAK																																																																											
Avg																																																																																				
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5113.39	42.68	54.00	-11.32	31.08	36.61	8.47	33.48	400	20 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5230.00	94.58	-----	-----	82.77	36.52	8.74	33.45	400	20 AVERAGE				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1 5113.39	42.68	54.00	-11.32	31.08	36.61	8.47	33.48	400	20 AVERAGE																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1 5230.00	94.58	-----	-----	82.77	36.52	8.74	33.45	400	20 AVERAGE																																																																											







Mode	57																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11n HT40_CH46_Full RU_5230MHz																																										
ANT	9																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2025-02-16 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5403.19</td><td>51.40</td><td>74.00</td><td>-22.60</td><td>38.80</td><td>36.38</td><td>9.64</td><td>33.42</td><td>400</td><td>20 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5403.19	51.40	74.00	-22.60	38.80	36.38	9.64	33.42	400	20 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5403.19	51.40	74.00	-22.60	38.80	36.38	9.64	33.42	400	20 PEAK																																	
Avg	Date: 2025-02-16 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5411.01</td><td>42.39</td><td>54.00</td><td>-11.61</td><td>29.78</td><td>36.37</td><td>9.66</td><td>33.42</td><td>400</td><td>20 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5411.01	42.39	54.00	-11.61	29.78	36.37	9.66	33.42	400	20 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5411.01	42.39	54.00	-11.61	29.78	36.37	9.66	33.42	400	20 AVERAGE																																	





		58																																																																																		
Mode		Band Edge - L																																																																																		
		U-NII-2A_5.25-5.35_802.11n HT40_CH54_Full RU_5270MHz																																																																																		
ANT		9																																																																																		
Pol.		Horizontal					Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5028.89</td><td>50.77</td><td>74.00</td><td>-23.23</td><td>39.27</td><td>36.68</td><td>8.31</td><td>33.49</td><td>400 311 PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5028.89	50.77	74.00	-23.23	39.27	36.68	8.31	33.49	400 311 PEAK	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5270.00</td><td>88.52</td><td>-----</td><td>-----</td><td>76.55</td><td>36.49</td><td>8.93</td><td>33.45</td><td>400 311 PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	88.52	-----	-----	76.55	36.49	8.93	33.45	400 311 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5028.89	50.77	74.00	-23.23	39.27	36.68	8.31	33.49	400 311 PEAK																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5270.00	88.52	-----	-----	76.55	36.49	8.93	33.45	400 311 PEAK																																																																											
Avg	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5037.26</td><td>41.52</td><td>54.00</td><td>-12.48</td><td>30.01</td><td>36.67</td><td>8.33</td><td>33.49</td><td>400 311 AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5037.26	41.52	54.00	-12.48	30.01	36.67	8.33	33.49	400 311 AVERAGE	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5270.00</td><td>82.36</td><td>-----</td><td>-----</td><td>70.39</td><td>36.49</td><td>8.93</td><td>33.45</td><td>400 311 AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	82.36	-----	-----	70.39	36.49	8.93	33.45	400 311 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5037.26	41.52	54.00	-12.48	30.01	36.67	8.33	33.49	400 311 AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5270.00	82.36	-----	-----	70.39	36.49	8.93	33.45	400 311 AVERAGE																																																																											

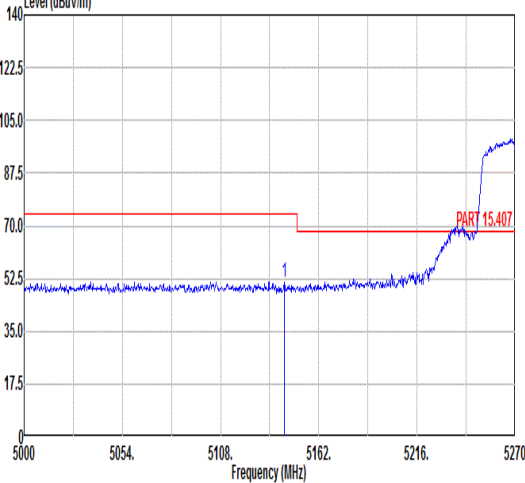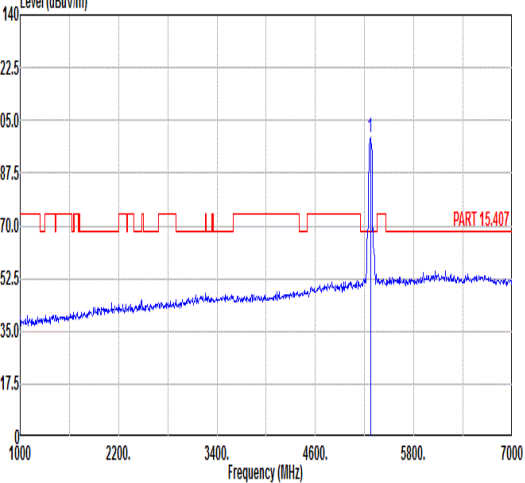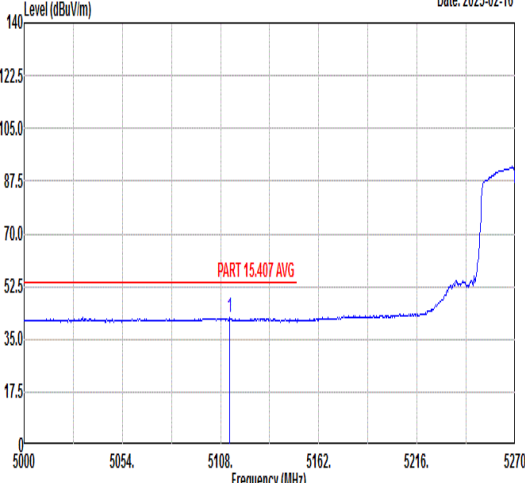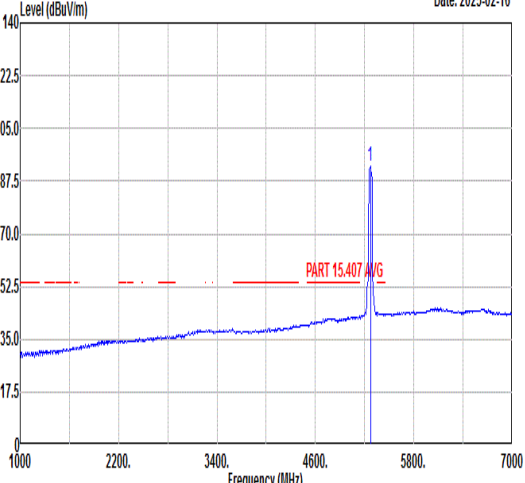

Mode	58	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_Full RU_5270MHz	
ANT	9	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2025-02-16  1 5143.10 51.47 74.00 -22.53 39.83 36.59 8.52 33.47 285 360 PEAK	Level (dBuV/m) Date: 2025-02-16  1 5270.00 99.45 ----- 87.46 36.48 8.96 33.45 285 360 PEAK
	Level (dBuV/m) Date: 2025-02-16  1 5113.13 42.11 54.00 -11.89 30.51 36.61 8.47 33.48 285 360 AVERAGE	Level (dBuV/m) Date: 2025-02-16  1 5270.00 92.55 ----- 80.56 36.48 8.96 33.45 285 360 AVERAGE

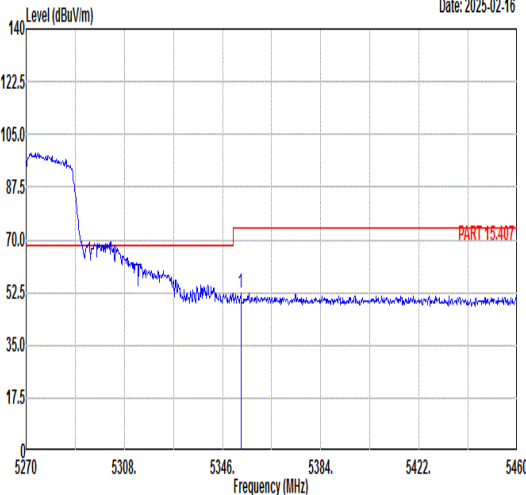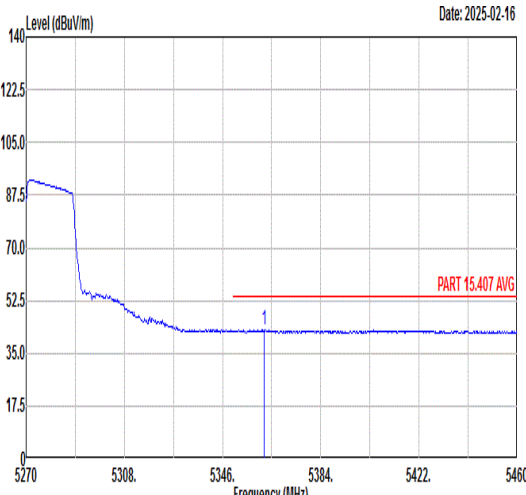

Mode	58																																										
	Band Edge - R																																										
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_Full RU_5270MHz																																										
ANT	9																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2025-02-16 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5353.03</td><td>52.36</td><td>74.00</td><td>-21.64</td><td>39.99</td><td>36.42</td><td>9.38</td><td>33.43</td><td>285</td><td>360 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5353.03	52.36	74.00	-21.64	39.99	36.42	9.38	33.43	285	360 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5353.03	52.36	74.00	-21.64	39.99	36.42	9.38	33.43	285	360 PEAK																																	
Avg	Date: 2025-02-16 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5362.15</td><td>42.85</td><td>54.00</td><td>-11.15</td><td>30.44</td><td>36.41</td><td>9.43</td><td>33.43</td><td>285</td><td>360 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5362.15	42.85	54.00	-11.15	30.44	36.41	9.43	33.43	285	360 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5362.15	42.85	54.00	-11.15	30.44	36.41	9.43	33.43	285	360 AVERAGE																																	



Mode	59																																																																																									
	Band Edge - L																																																																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_Full RU_5310MHz																																																																																									
ANT	9																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5046.81</td><td>51.14</td><td>74.00</td><td>-22.86</td><td>39.62</td><td>36.66</td><td>8.35</td><td>33.49</td><td>400</td><td>249</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5046.81	51.14	74.00	-22.86	39.62	36.66	8.35	33.49	400	249	PEAK	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>93.76</td><td>-----</td><td>-----</td><td>81.60</td><td>36.45</td><td>9.15</td><td>33.44</td><td>400</td><td>249</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	93.76	-----	-----	81.60	36.45	9.15	33.44	400	249	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5046.81	51.14	74.00	-22.86	39.62	36.66	8.35	33.49	400	249	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5310.00	93.76	-----	-----	81.60	36.45	9.15	33.44	400	249	PEAK																																																																															
Avg	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5033.79</td><td>41.71</td><td>54.00</td><td>-12.29</td><td>30.21</td><td>36.67</td><td>8.32</td><td>33.49</td><td>400</td><td>249</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5033.79	41.71	54.00	-12.29	30.21	36.67	8.32	33.49	400	249	AVERAGE	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>86.39</td><td>-----</td><td>-----</td><td>74.23</td><td>36.45</td><td>9.15</td><td>33.44</td><td>400</td><td>249</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	86.39	-----	-----	74.23	36.45	9.15	33.44	400	249	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5033.79	41.71	54.00	-12.29	30.21	36.67	8.32	33.49	400	249	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5310.00	86.39	-----	-----	74.23	36.45	9.15	33.44	400	249	AVERAGE																																																																															



Mode	59																																										
	Band Edge - R																																										
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_Full RU_5310MHz																																										
ANT	9																																										
Pol.	Horizontal	Fundamental																																									
Peak	Date: 2025-02-16 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5352.75</td><td>56.65</td><td>74.00</td><td>-17.35</td><td>44.28</td><td>36.42</td><td>9.38</td><td>33.43</td><td>400</td><td>249 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5352.75	56.65	74.00	-17.35	44.28	36.42	9.38	33.43	400	249 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5352.75	56.65	74.00	-17.35	44.28	36.42	9.38	33.43	400	249 PEAK																																	
Avg	Date: 2025-02-16 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.10</td><td>43.94</td><td>54.00</td><td>-10.06</td><td>31.58</td><td>36.42</td><td>9.37</td><td>33.43</td><td>400</td><td>249 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5351.10	43.94	54.00	-10.06	31.58	36.42	9.37	33.43	400	249 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5351.10	43.94	54.00	-10.06	31.58	36.42	9.37	33.43	400	249 AVERAGE																																	



Mode	59																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_Full RU_5310MHz																																																																									
ANT	9																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5126.17</td><td>50.81</td><td>74.00</td><td>-23.19</td><td>39.19</td><td>36.60</td><td>8.49</td><td>33.47</td><td>272 0 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5126.17	50.81	74.00	-23.19	39.19	36.60	8.49	33.47	272 0 PEAK	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5310.00</td><td>99.11</td><td>-----</td><td>-----</td><td>86.92</td><td>36.45</td><td>9.18</td><td>33.44</td><td>272 0 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	99.11	-----	-----	86.92	36.45	9.18	33.44	272 0 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5126.17	50.81	74.00	-23.19	39.19	36.60	8.49	33.47	272 0 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5310.00	99.11	-----	-----	86.92	36.45	9.18	33.44	272 0 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5098.27</td><td>41.55</td><td>54.00</td><td>-12.45</td><td>29.97</td><td>36.62</td><td>8.44</td><td>33.48</td><td>272 0 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5098.27	41.55	54.00	-12.45	29.97	36.62	8.44	33.48	272 0 AVERAGE	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5310.00</td><td>92.76</td><td>-----</td><td>-----</td><td>80.57</td><td>36.45</td><td>9.18</td><td>33.44</td><td>272 0 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	92.76	-----	-----	80.57	36.45	9.18	33.44	272 0 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5098.27	41.55	54.00	-12.45	29.97	36.62	8.44	33.48	272 0 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5310.00	92.76	-----	-----	80.57	36.45	9.18	33.44	272 0 AVERAGE																																																																		



Mode	60																																																																
	Band Edge - L																																																																
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_Full RU_5510MHz																																																																
ANT	9																																																																
Pol.	Horizontal					Fundamental																																																											
Peak	Level (dBuV/m) Date: 2025-02-16 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5418.80</td><td>51.47</td><td>74.00</td><td>-22.53</td><td>38.86</td><td>36.36</td><td>9.67</td><td>33.42</td><td>300</td><td>37 PEAK</td></tr><tr><td>2</td><td>5466.48</td><td>53.00</td><td>68.30</td><td>-15.30</td><td>40.39</td><td>36.33</td><td>9.69</td><td>33.41</td><td>300</td><td>37 PEAK</td></tr></table>						MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5418.80	51.47	74.00	-22.53	38.86	36.36	9.67	33.42	300	37 PEAK	2	5466.48	53.00	68.30	-15.30	40.39	36.33	9.69	33.41	300	37 PEAK	Level (dBuV/m) Date: 2025-02-16 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5510.00</td><td>86.94</td><td>-----</td><td>-----</td><td>74.32</td><td>36.31</td><td>9.71</td><td>33.40</td><td>300</td><td>37 PEAK</td></tr></table>						MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5510.00	86.94	-----	-----	74.32	36.31	9.71	33.40	300	37 PEAK
		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																							
1	5418.80	51.47	74.00	-22.53	38.86	36.36	9.67	33.42	300	37 PEAK																																																							
2	5466.48	53.00	68.30	-15.30	40.39	36.33	9.69	33.41	300	37 PEAK																																																							
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5510.00	86.94	-----	-----	74.32	36.31	9.71	33.40	300	37 PEAK																																																							
Avg	Level (dBuV/m) Date: 2025-02-16 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5459.12</td><td>42.11</td><td>54.00</td><td>-11.89</td><td>29.50</td><td>36.33</td><td>9.69</td><td>33.41</td><td>300</td><td>37 AVERAGE</td></tr></table>						MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5459.12	42.11	54.00	-11.89	29.50	36.33	9.69	33.41	300	37 AVERAGE	Level (dBuV/m) Date: 2025-02-16 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5510.00</td><td>80.67</td><td>-----</td><td>-----</td><td>68.05</td><td>36.31</td><td>9.71</td><td>33.40</td><td>300</td><td>37 AVERAGE</td></tr></table>						MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5510.00	80.67	-----	-----	68.05	36.31	9.71	33.40	300	37 AVERAGE											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5459.12	42.11	54.00	-11.89	29.50	36.33	9.69	33.41	300	37 AVERAGE																																																							
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5510.00	80.67	-----	-----	68.05	36.31	9.71	33.40	300	37 AVERAGE																																																							



Mode	60	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_Full RU_5510MHz	
ANT	9	
Pol.	Horizontal	Fundamental
Peak	Date: 2025-02-16 Level (dBuV/m) 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5510 5561 5612 5663 5714 5765 Frequency (MHz)	



Mode	60																																																																																																					
	Band Edge - L																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_Full RU_5510MHz																																																																																																					
ANT	9																																																																																																					
Pol.	Vertical						Fundamental																																																																																															
Peak	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.20</td><td>55.45</td><td>74.00</td><td>-18.55</td><td>42.84</td><td>36.33</td><td>9.69</td><td>33.41</td><td>255</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5469.84</td><td>61.94</td><td>68.30</td><td>-6.36</td><td>49.34</td><td>36.32</td><td>9.69</td><td>33.41</td><td>255</td><td>360</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5457.20	55.45	74.00	-18.55	42.84	36.33	9.69	33.41	255	360	PEAK	2	5469.84	61.94	68.30	-6.36	49.34	36.32	9.69	33.41	255	360	PEAK	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>99.60</td><td>-----</td><td>-----</td><td>86.96</td><td>36.32</td><td>9.72</td><td>33.40</td><td>255</td><td>360</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	99.60	-----	-----	86.96	36.32	9.72	33.40	255	360	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5457.20	55.45	74.00	-18.55	42.84	36.33	9.69	33.41	255	360	PEAK																																																																																											
2	5469.84	61.94	68.30	-6.36	49.34	36.32	9.69	33.41	255	360	PEAK																																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5510.00	99.60	-----	-----	86.96	36.32	9.72	33.40	255	360	PEAK																																																																																											
Avg	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.60</td><td>44.38</td><td>54.00</td><td>-9.62</td><td>31.77</td><td>36.33</td><td>9.69</td><td>33.41</td><td>255</td><td>360</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.60	44.38	54.00	-9.62	31.77	36.33	9.69	33.41	255	360	AVERAGE	Level (dBuV/m) Date: 2025-02-16 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>93.42</td><td>-----</td><td>-----</td><td>80.80</td><td>36.31</td><td>9.71</td><td>33.40</td><td>255</td><td>360</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	93.42	-----	-----	80.80	36.31	9.71	33.40	255	360	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5459.60	44.38	54.00	-9.62	31.77	36.33	9.69	33.41	255	360	AVERAGE																																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5510.00	93.42	-----	-----	80.80	36.31	9.71	33.40	255	360	AVERAGE																																																																																											

	60							
Mode	Band Edge - R							
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_Full RU_5510MHz							
ANT	9							
Pol.	Vertical				Fundamental			
Peak	Date: 2025-02-16 PART 15.407				Blank			
	Freq	Level	Limit Margin Line (dB)	Read Level	Ant Factor	Cable Loss Factor	Apos	TPos Remark
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg
1	5733.64	52.22	68.30 -16.08	39.10	36.53	10.04	33.45	255 360 PEAK



Mode	61																																																								
	Band Edge - L																																																								
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_Full RU_5670MHz																																																								
ANT	9																																																								
Pol.	Horizontal	Fundamental																																																							
Peak	Level (dBuV/m) Date: 2025-02-16 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5352.24</td><td>51.56</td><td>74.00</td><td>-22.44</td><td>39.19</td><td>36.42</td><td>9.38</td><td>33.43</td><td>400</td><td>278 PEAK</td></tr><tr><td>2</td><td>5461.04</td><td>50.86</td><td>68.30</td><td>-17.44</td><td>38.25</td><td>36.33</td><td>9.69</td><td>33.41</td><td>400</td><td>278 PEAK</td></tr></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5352.24	51.56	74.00	-22.44	39.19	36.42	9.38	33.43	400	278 PEAK	2	5461.04	50.86	68.30	-17.44	38.25	36.33	9.69	33.41	400	278 PEAK	Level (dBuV/m) Date: 2025-02-16 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5670.00</td><td>92.22</td><td>-----</td><td>-----</td><td>79.28</td><td>36.47</td><td>9.90</td><td>33.43</td><td>400</td><td>278 PEAK</td></tr></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5670.00	92.22	-----	-----	79.28	36.47	9.90	33.43	400	278 PEAK
		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																														
1	5352.24	51.56	74.00	-22.44	39.19	36.42	9.38	33.43	400	278 PEAK																																															
2	5461.04	50.86	68.30	-17.44	38.25	36.33	9.69	33.41	400	278 PEAK																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																															
1	5670.00	92.22	-----	-----	79.28	36.47	9.90	33.43	400	278 PEAK																																															
Avg	Level (dBuV/m) Date: 2025-02-16 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5421.04</td><td>42.05</td><td>54.00</td><td>-11.95</td><td>29.44</td><td>36.36</td><td>9.67</td><td>33.42</td><td>400</td><td>278 AVERAGE</td></tr></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5421.04	42.05	54.00	-11.95	29.44	36.36	9.67	33.42	400	278 AVERAGE	Level (dBuV/m) Date: 2025-02-16 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5670.00</td><td>86.14</td><td>-----</td><td>-----</td><td>73.22</td><td>36.46</td><td>9.89</td><td>33.43</td><td>400</td><td>278 AVERAGE</td></tr></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5670.00	86.14	-----	-----	73.22	36.46	9.89	33.43	400	278 AVERAGE											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																															
1	5421.04	42.05	54.00	-11.95	29.44	36.36	9.67	33.42	400	278 AVERAGE																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																															
1	5670.00	86.14	-----	-----	73.22	36.46	9.89	33.43	400	278 AVERAGE																																															



Mode	61																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_Full RU_5670MHz																																									
ANT	9																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-02-16 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5736.79</td><td>54.85</td><td>68.30</td><td>-13.45</td><td>41.72</td><td>36.54</td><td>10.04</td><td>33.45</td><td>400 278 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5736.79	54.85	68.30	-13.45	41.72	36.54	10.04	33.45	400 278 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5736.79	54.85	68.30	-13.45	41.72	36.54	10.04	33.45	400 278 PEAK																																	



Mode	61																																																																																																					
	Band Edge - L																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_Full RU_5670MHz																																																																																																					
ANT	9																																																																																																					
Pol.	Vertical						Fundamental																																																																																															
Peak	Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5419.12</td><td>51.20</td><td>74.00</td><td>-22.80</td><td>38.59</td><td>36.36</td><td>9.67</td><td>33.42</td><td>212</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5463.28</td><td>50.49</td><td>68.30</td><td>-17.81</td><td>37.88</td><td>36.33</td><td>9.69</td><td>33.41</td><td>212</td><td>360</td><td>PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5419.12	51.20	74.00	-22.80	38.59	36.36	9.67	33.42	212	360	PEAK	2	5463.28	50.49	68.30	-17.81	37.88	36.33	9.69	33.41	212	360	PEAK	Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>102.89</td><td>-----</td><td>-----</td><td>89.95</td><td>36.47</td><td>9.90</td><td>33.43</td><td>212</td><td>360</td><td>PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	102.89	-----	-----	89.95	36.47	9.90	33.43	212	360	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5419.12	51.20	74.00	-22.80	38.59	36.36	9.67	33.42	212	360	PEAK																																																																																											
2	5463.28	50.49	68.30	-17.81	37.88	36.33	9.69	33.41	212	360	PEAK																																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5670.00	102.89	-----	-----	89.95	36.47	9.90	33.43	212	360	PEAK																																																																																											
Avg	Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.44</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>30.23</td><td>36.33</td><td>9.69</td><td>33.41</td><td>212</td><td>360</td><td>AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.44	42.84	54.00	-11.16	30.23	36.33	9.69	33.41	212	360	AVERAGE	Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>96.74</td><td>-----</td><td>-----</td><td>83.80</td><td>36.47</td><td>9.90</td><td>33.43</td><td>212</td><td>360</td><td>AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	96.74	-----	-----	83.80	36.47	9.90	33.43	212	360	AVERAGE												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5459.44	42.84	54.00	-11.16	30.23	36.33	9.69	33.41	212	360	AVERAGE																																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5670.00	96.74	-----	-----	83.80	36.47	9.90	33.43	212	360	AVERAGE																																																																																											







		62																																																																														
Mode		Band Edge - L																																																																														
		U-NII-1_5.15-5.25_802.11ac VHT80_CH42_Full RU_5210MHz																																																																														
ANT		9																																																																														
Pol.		Horizontal					Fundamental																																																																									
Peak	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz)					Level (dBuV/m) Date: 2025-02-17 Frequency (MHz)																																																																										
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5123.48	51.55	74.00	-22.45	39.94	36.60	8.49	33.48	400	58 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5210.00</td><td>87.38</td><td>-----</td><td>-----</td><td>75.66</td><td>36.54</td><td>8.64</td><td>33.46</td><td>400</td><td>58 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5210.00	87.38	-----	-----	75.66	36.54	8.64	33.46	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5123.48	51.55	74.00	-22.45	39.94	36.60	8.49	33.48	400	58 PEAK																																																																							
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5210.00	87.38	-----	-----	75.66	36.54	8.64	33.46	400	58 PEAK																																																																							
Avg	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz)					Level (dBuV/m) Date: 2025-02-17 Frequency (MHz)																																																																										
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5137.76	44.19	54.00	-9.81	32.56	36.59	8.51	33.47	400	58 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5210.00</td><td>82.23</td><td>-----</td><td>-----</td><td>70.51</td><td>36.54</td><td>8.64</td><td>33.46</td><td>400</td><td>58 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5210.00	82.23	-----	-----	70.51	36.54	8.64	33.46	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5137.76	44.19	54.00	-9.81	32.56	36.59	8.51	33.47	400	58 AVERAGE																																																																							
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5210.00	82.23	-----	-----	70.51	36.54	8.64	33.46	400	58 AVERAGE																																																																							



Mode	62																																																			
	Band Edge - R																																																			
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_Full RU_5210MHz																																																			
ANT	9																																																			
Pol.	Horizontal	Fundamental																																																		
Peak	Date: 2025-02-17 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5412.25</td><td>51.36</td><td>74.00</td><td>-22.64</td><td>38.75</td><td>36.37</td><td>9.66</td><td>33.42</td><td>400</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>58 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5412.25	51.36	74.00	-22.64	38.75	36.37	9.66	33.42	400										58 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																											
1	5412.25	51.36	74.00	-22.64	38.75	36.37	9.66	33.42	400																																											
									58 PEAK																																											
Avg	Date: 2025-02-17 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5406.25</td><td>43.68</td><td>54.00</td><td>-10.32</td><td>31.06</td><td>36.38</td><td>9.66</td><td>33.42</td><td>400</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>58 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5406.25	43.68	54.00	-10.32	31.06	36.38	9.66	33.42	400										58 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																											
1	5406.25	43.68	54.00	-10.32	31.06	36.38	9.66	33.42	400																																											
									58 AVERAGE																																											

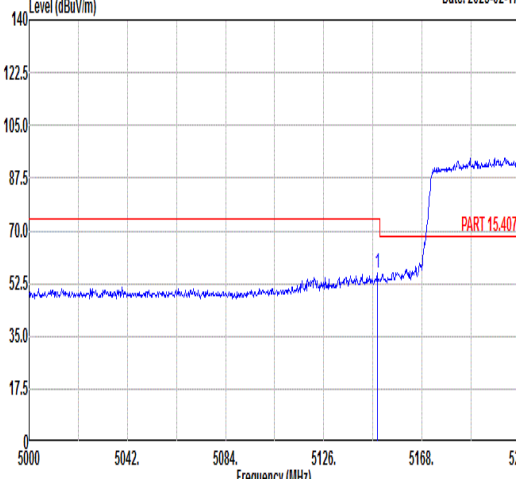
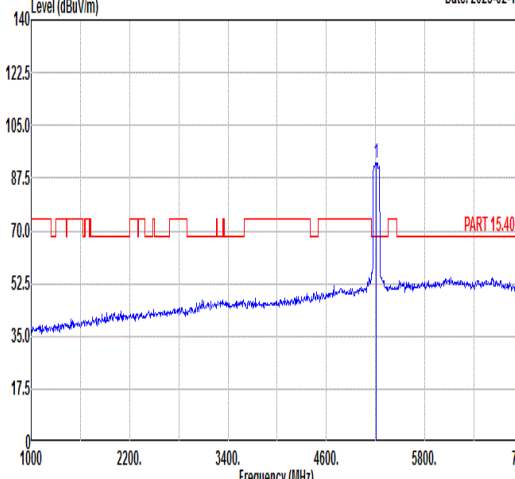
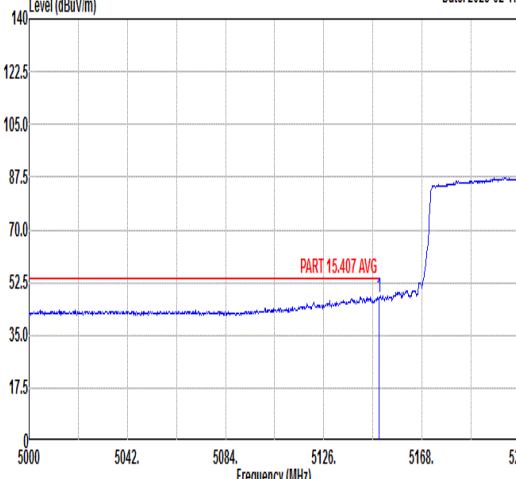
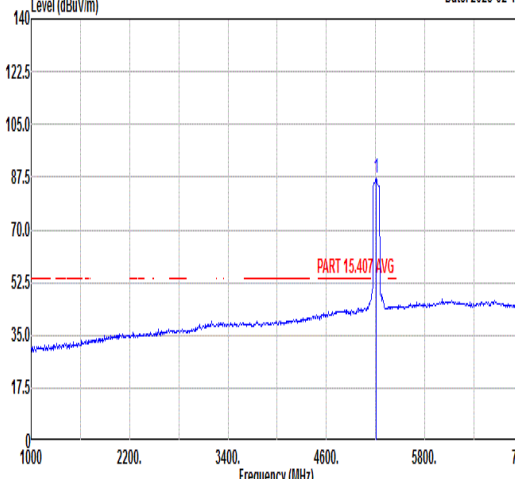


		62																																																																																		
Mode		Band Edge - L																																																																																		
		U-NII-1_5.15-5.25_802.11ac VHT80_CH42_Full RU_5210MHz																																																																																		
ANT		9																																																																																		
Pol.		Vertical					Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2025-02-17  Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.89</td><td>55.94</td><td>74.00</td><td>-18.06</td><td>44.30</td><td>36.58</td><td>8.53</td><td>33.47</td><td>355 360 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5148.89	55.94	74.00	-18.06	44.30	36.58	8.53	33.47	355 360 PEAK	Level (dBuV/m) Date: 2025-02-17  Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>92.66</td><td>-----</td><td>-----</td><td>80.94</td><td>36.54</td><td>8.64</td><td>33.46</td><td>355 360 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	92.66	-----	-----	80.94	36.54	8.64	33.46	355 360 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5148.89	55.94	74.00	-18.06	44.30	36.58	8.53	33.47	355 360 PEAK																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5210.00	92.66	-----	-----	80.94	36.54	8.64	33.46	355 360 PEAK																																																																											
Avg	Level (dBuV/m) Date: 2025-02-17  Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.73</td><td>47.81</td><td>54.00</td><td>-6.19</td><td>36.16</td><td>36.58</td><td>8.54</td><td>33.47</td><td>355 360 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.73	47.81	54.00	-6.19	36.16	36.58	8.54	33.47	355 360 AVERAGE	Level (dBuV/m) Date: 2025-02-17  Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>87.00</td><td>-----</td><td>-----</td><td>75.28</td><td>36.54</td><td>8.64</td><td>33.46</td><td>355 360 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	87.00	-----	-----	75.28	36.54	8.64	33.46	355 360 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5149.73	47.81	54.00	-6.19	36.16	36.58	8.54	33.47	355 360 AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5210.00	87.00	-----	-----	75.28	36.54	8.64	33.46	355 360 AVERAGE																																																																											



Mode	62																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_Full RU_5210MHz																																										
ANT	9																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2025-02-17 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5426.75</td><td>51.28</td><td>74.00</td><td>-22.72</td><td>38.66</td><td>36.36</td><td>9.67</td><td>33.41</td><td>355</td><td>360 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5426.75	51.28	74.00	-22.72	38.66	36.36	9.67	33.41	355	360 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5426.75	51.28	74.00	-22.72	38.66	36.36	9.67	33.41	355	360 PEAK																																	
Avg	Date: 2025-02-17 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5424.00</td><td>43.96</td><td>54.00</td><td>-10.04</td><td>31.35</td><td>36.36</td><td>9.67</td><td>33.42</td><td>355</td><td>360 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5424.00	43.96	54.00	-10.04	31.35	36.36	9.67	33.42	355	360 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5424.00	43.96	54.00	-10.04	31.35	36.36	9.67	33.42	355	360 AVERAGE																																	

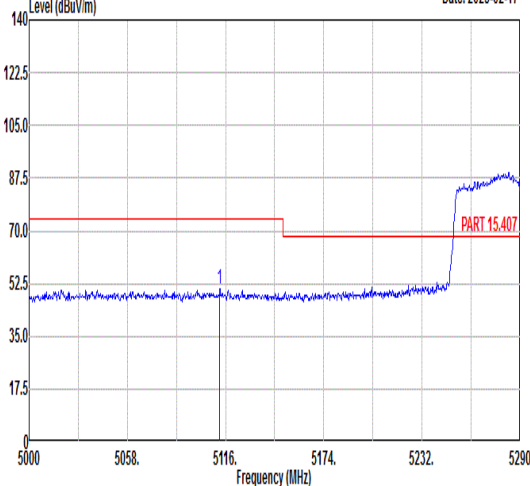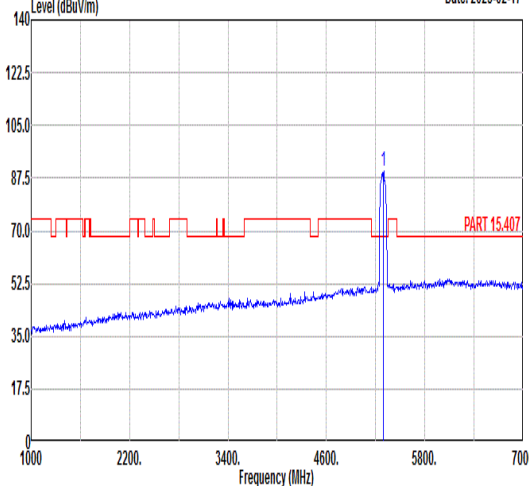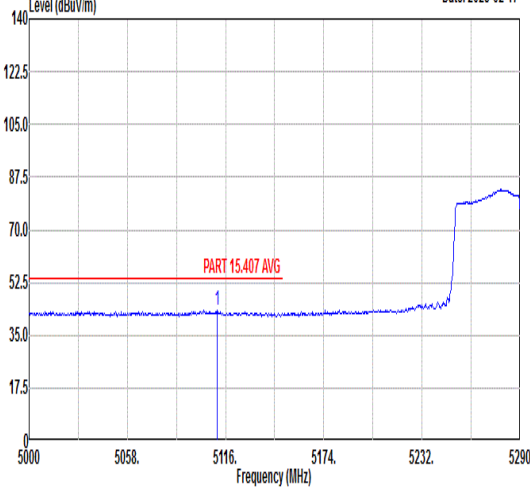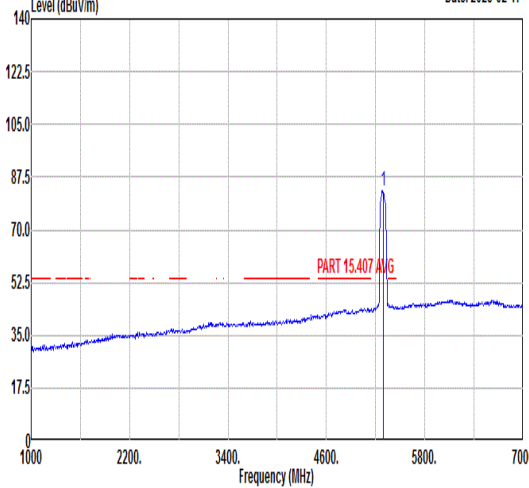

		63																																																																																							
Mode		Band Edge - L																																																																																							
		U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_Full RU_5290MHz																																																																																							
ANT		9																																																																																							
Pol.		Horizontal					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-02-17  Frequency (MHz)					Level (dBuV/m) Date: 2025-02-17  Frequency (MHz)																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5112.52</td><td>50.82</td><td>74.00</td><td>-23.18</td><td>39.22</td><td>36.61</td><td>8.47</td><td>33.48</td><td>397</td><td>78 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5112.52	50.82	74.00	-23.18	39.22	36.61	8.47	33.48	397	78 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5290.00</td><td>89.68</td><td>-----</td><td>-----</td><td>77.54</td><td>36.46</td><td>9.12</td><td>33.44</td><td>397</td><td>78 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5290.00	89.68	-----	-----	77.54	36.46	9.12	33.44	397
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5112.52	50.82	74.00	-23.18	39.22	36.61	8.47	33.48	397	78 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5290.00	89.68	-----	-----	77.54	36.46	9.12	33.44	397	78 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-02-17  Frequency (MHz)					Level (dBuV/m) Date: 2025-02-17  Frequency (MHz)																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5111.07</td><td>43.22</td><td>54.00</td><td>-10.78</td><td>31.63</td><td>36.61</td><td>8.46</td><td>33.48</td><td>397</td><td>78 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5111.07	43.22	54.00	-10.78	31.63	36.61	8.46	33.48	397	78 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5290.00</td><td>83.17</td><td>-----</td><td>-----</td><td>71.14</td><td>36.48</td><td>8.99</td><td>33.44</td><td>397</td><td>78 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5290.00	83.17	-----	-----	71.14	36.48	8.99	33.44	397
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5111.07	43.22	54.00	-10.78	31.63	36.61	8.46	33.48	397	78 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5290.00	83.17	-----	-----	71.14	36.48	8.99	33.44	397	78 AVERAGE																																																																																



		63																																																																																											
Mode	Band Edge - L																																																																																												
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_Full RU_5290MHz																																																																																												
ANT	9																																																																																												
Pol.	Vertical						Fundamental																																																																																						
Peak	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5130.50</td><td>50.69</td><td>74.00</td><td>-23.31</td><td>39.06</td><td>36.60</td><td>8.50</td><td>33.47</td><td>218</td><td>0 PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5130.50	50.69	74.00	-23.31	39.06	36.60	8.50	33.47	218	0 PEAK	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>94.17</td><td>-----</td><td>-----</td><td>82.12</td><td>36.47</td><td>9.02</td><td>33.44</td><td>218</td><td>0 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	94.17	-----	-----	82.12	36.47	9.02	33.44	218	0 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5130.50	50.69	74.00	-23.31	39.06	36.60	8.50	33.47	218	0 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5290.00	94.17	-----	-----	82.12	36.47	9.02	33.44	218	0 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5103.24</td><td>43.38</td><td>54.00</td><td>-10.62</td><td>31.79</td><td>36.62</td><td>8.45</td><td>33.48</td><td>218</td><td>0 AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5103.24	43.38	54.00	-10.62	31.79	36.62	8.45	33.48	218	0 AVERAGE	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>87.91</td><td>-----</td><td>-----</td><td>75.86</td><td>36.47</td><td>9.02</td><td>33.44</td><td>218</td><td>0 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	87.91	-----	-----	75.86	36.47	9.02	33.44	218	0 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5103.24	43.38	54.00	-10.62	31.79	36.62	8.45	33.48	218	0 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5290.00	87.91	-----	-----	75.86	36.47	9.02	33.44	218	0 AVERAGE																																																																																			



Mode	63									
	Band Edge - R									
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_Full RU_5290MHz									
ANT	9									
Pol.	Vertical					Fundamental				
Peak	<									



Mode	64																																																																																					
	Band Edge - L																																																																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_Full RU_5530MHz																																																																																					
ANT	9																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5446.48</td><td>51.71</td><td>74.00</td><td>-22.29</td><td>39.10</td><td>36.34</td><td>9.68</td><td>33.41</td><td>372 95 PEAK</td></tr><tr><td>2</td><td>5468.98</td><td>51.54</td><td>68.30</td><td>-16.76</td><td>38.94</td><td>36.32</td><td>9.69</td><td>33.41</td><td>372 95 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5446.48	51.71	74.00	-22.29	39.10	36.34	9.68	33.41	372 95 PEAK	2	5468.98	51.54	68.30	-16.76	38.94	36.32	9.69	33.41	372 95 PEAK	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>87.64</td><td>-----</td><td>-----</td><td>75.02</td><td>36.31</td><td>9.71</td><td>33.40</td><td>372 95 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	87.64	-----	-----	75.02	36.31	9.71	33.40	372 95 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	5446.48	51.71	74.00	-22.29	39.10	36.34	9.68	33.41	372 95 PEAK																																																																													
2	5468.98	51.54	68.30	-16.76	38.94	36.32	9.69	33.41	372 95 PEAK																																																																													
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	5530.00	87.64	-----	-----	75.02	36.31	9.71	33.40	372 95 PEAK																																																																													
Avg	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5451.52</td><td>43.87</td><td>54.00</td><td>-10.13</td><td>31.26</td><td>36.34</td><td>9.68</td><td>33.41</td><td>372 95 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5451.52	43.87	54.00	-10.13	31.26	36.34	9.68	33.41	372 95 AVERAGE	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>81.08</td><td>-----</td><td>-----</td><td>68.44</td><td>36.32</td><td>9.72</td><td>33.40</td><td>372 95 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	81.08	-----	-----	68.44	36.32	9.72	33.40	372 95 AVERAGE										
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	5451.52	43.87	54.00	-10.13	31.26	36.34	9.68	33.41	372 95 AVERAGE																																																																													
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	5530.00	81.08	-----	-----	68.44	36.32	9.72	33.40	372 95 AVERAGE																																																																													



Mode	64																							
	Band Edge - R																							
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_Full RU_5530MHz																							
ANT	9																							
Pol.	Horizontal	Fundamental																						
Peak	Date: 2025-02-17 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5737.04</td><td>51.82</td><td>68.30</td><td>-16.48</td><td>38.69</td><td>36.54</td><td>10.04</td><td>33.45</td><td>372</td><td>95 PEAK</td></tr></table>		MHz	dBUV/m	dBUV/m	dB	dB/m	dB	dB	cm	deg		1	5737.04	51.82	68.30	-16.48	38.69	36.54	10.04	33.45	372	95 PEAK	Blank
	MHz	dBUV/m	dBUV/m	dB	dB/m	dB	dB	cm	deg															
1	5737.04	51.82	68.30	-16.48	38.69	36.54	10.04	33.45	372	95 PEAK														



Mode	64																																																																																																			
	Band Edge - L																																																																																																			
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_Full RU_5530MHz																																																																																																			
ANT	9																																																																																																			
Pol.	Vertical					Fundamental																																																																																														
Peak	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5453.32</td><td>57.57</td><td>74.00</td><td>-16.43</td><td>44.96</td><td>36.34</td><td>9.68</td><td>33.41</td><td>235</td><td>0 PEAK</td></tr><tr><td>2 5467.18</td><td>56.22</td><td>68.30</td><td>-12.08</td><td>43.61</td><td>36.33</td><td>9.69</td><td>33.41</td><td>235</td><td>0 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5453.32	57.57	74.00	-16.43	44.96	36.34	9.68	33.41	235	0 PEAK	2 5467.18	56.22	68.30	-12.08	43.61	36.33	9.69	33.41	235	0 PEAK	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5530.00</td><td>97.01</td><td>-----</td><td>-----</td><td>84.37</td><td>36.32</td><td>9.72</td><td>33.40</td><td>235</td><td>0 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5530.00	97.01	-----	-----	84.37	36.32	9.72	33.40	235	0 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1 5453.32	57.57	74.00	-16.43	44.96	36.34	9.68	33.41	235	0 PEAK																																																																																											
2 5467.18	56.22	68.30	-12.08	43.61	36.33	9.69	33.41	235	0 PEAK																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1 5530.00	97.01	-----	-----	84.37	36.32	9.72	33.40	235	0 PEAK																																																																																											
Avg	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5459.98</td><td>48.17</td><td>54.00</td><td>-5.83</td><td>35.56</td><td>36.33</td><td>9.69</td><td>33.41</td><td>235</td><td>0 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5459.98	48.17	54.00	-5.83	35.56	36.33	9.69	33.41	235	0 AVERAGE	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5530.00</td><td>89.87</td><td>-----</td><td>-----</td><td>77.23</td><td>36.33</td><td>9.72</td><td>33.41</td><td>235</td><td>0 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5530.00	89.87	-----	-----	77.23	36.33	9.72	33.41	235	0 AVERAGE										
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1 5459.98	48.17	54.00	-5.83	35.56	36.33	9.69	33.41	235	0 AVERAGE																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1 5530.00	89.87	-----	-----	77.23	36.33	9.72	33.41	235	0 AVERAGE																																																																																											



Mode	64																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_Full RU_5530MHz																																									
ANT	9																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2025-02-17 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5752.78</td><td>51.74</td><td>68.30</td><td>-16.56</td><td>38.56</td><td>36.55</td><td>10.08</td><td>33.45</td><td>235</td><td>0</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5752.78	51.74	68.30	-16.56	38.56	36.55	10.08	33.45	235	0	PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5752.78	51.74	68.30	-16.56	38.56	36.55	10.08	33.45	235	0	PEAK																															



Mode	65																																																																																										
	Band Edge - L																																																																																										
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_Full RU_5610MHz																																																																																										
ANT	9																																																																																										
Pol.	Horizontal					Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5457.90</td><td>51.41</td><td>74.00</td><td>-22.59</td><td>38.80</td><td>36.33</td><td>9.69</td><td>33.41</td><td>100 350 PEAK</td></tr><tr><td>2 5469.60</td><td>50.59</td><td>68.30</td><td>-17.71</td><td>37.99</td><td>36.32</td><td>9.69</td><td>33.41</td><td>100 350 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5457.90	51.41	74.00	-22.59	38.80	36.33	9.69	33.41	100 350 PEAK	2 5469.60	50.59	68.30	-17.71	37.99	36.32	9.69	33.41	100 350 PEAK	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5610.00</td><td>83.42</td><td>-----</td><td>-----</td><td>70.62</td><td>36.42</td><td>9.80</td><td>33.42</td><td>100 350 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5610.00	83.42	-----	-----	70.62	36.42	9.80	33.42	100 350 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 5457.90	51.41	74.00	-22.59	38.80	36.33	9.69	33.41	100 350 PEAK																																																																																			
2 5469.60	50.59	68.30	-17.71	37.99	36.32	9.69	33.41	100 350 PEAK																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 5610.00	83.42	-----	-----	70.62	36.42	9.80	33.42	100 350 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5451.92</td><td>43.61</td><td>54.00</td><td>-10.39</td><td>31.00</td><td>36.34</td><td>9.68</td><td>33.41</td><td>100 350 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5451.92	43.61	54.00	-10.39	31.00	36.34	9.68	33.41	100 350 AVERAGE	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5610.00</td><td>77.38</td><td>-----</td><td>-----</td><td>64.58</td><td>36.42</td><td>9.80</td><td>33.42</td><td>100 350 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5610.00	77.38	-----	-----	64.58	36.42	9.80	33.42	100 350 AVERAGE									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 5451.92	43.61	54.00	-10.39	31.00	36.34	9.68	33.41	100 350 AVERAGE																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 5610.00	77.38	-----	-----	64.58	36.42	9.80	33.42	100 350 AVERAGE																																																																																			



Mode	65																																																																																										
	Band Edge - L																																																																																										
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_Full RU_5610MHz																																																																																										
ANT	9																																																																																										
Pol.	Vertical					Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5455.04</td><td>53.30</td><td>74.00</td><td>-20.70</td><td>40.69</td><td>36.34</td><td>9.68</td><td>33.41</td><td>284 0 PEAK</td></tr><tr><td>2 5467.52</td><td>53.37</td><td>68.30</td><td>-14.93</td><td>40.76</td><td>36.33</td><td>9.69</td><td>33.41</td><td>284 0 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5455.04	53.30	74.00	-20.70	40.69	36.34	9.68	33.41	284 0 PEAK	2 5467.52	53.37	68.30	-14.93	40.76	36.33	9.69	33.41	284 0 PEAK	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5610.00</td><td>99.83</td><td>-----</td><td>-----</td><td>87.03</td><td>36.42</td><td>9.80</td><td>33.42</td><td>284 0 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5610.00	99.83	-----	-----	87.03	36.42	9.80	33.42	284 0 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 5455.04	53.30	74.00	-20.70	40.69	36.34	9.68	33.41	284 0 PEAK																																																																																			
2 5467.52	53.37	68.30	-14.93	40.76	36.33	9.69	33.41	284 0 PEAK																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 5610.00	99.83	-----	-----	87.03	36.42	9.80	33.42	284 0 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5448.28</td><td>44.40</td><td>54.00</td><td>-9.60</td><td>31.79</td><td>36.34</td><td>9.68</td><td>33.41</td><td>284 0 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5448.28	44.40	54.00	-9.60	31.79	36.34	9.68	33.41	284 0 AVERAGE	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5610.00</td><td>93.57</td><td>-----</td><td>-----</td><td>80.79</td><td>36.41</td><td>9.79</td><td>33.42</td><td>284 0 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5610.00	93.57	-----	-----	80.79	36.41	9.79	33.42	284 0 AVERAGE									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 5448.28	44.40	54.00	-9.60	31.79	36.34	9.68	33.41	284 0 AVERAGE																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 5610.00	93.57	-----	-----	80.79	36.41	9.79	33.42	284 0 AVERAGE																																																																																			






Mode	65																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_Full RU_5610MHz																																									
ANT	9																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2025-02-17 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.01</td><td>60.58</td><td>68.30</td><td>-7.72</td><td>47.47</td><td>36.53</td><td>10.02</td><td>33.44</td><td>284</td><td>0</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5725.01	60.58	68.30	-7.72	47.47	36.53	10.02	33.44	284	0	PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5725.01	60.58	68.30	-7.72	47.47	36.53	10.02	33.44	284	0	PEAK																															



Mode	66																																																																																																																												
	Band Edge																																																																																																																												
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																												
ANT	9																																																																																																																												
Pol.	Horizontal					Fundamental																																																																																																																							
Peak	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5642.34</td><td>52.67</td><td>68.30</td><td>-15.63</td><td>39.82</td><td>36.44</td><td>9.84</td><td>33.43</td><td>259</td><td>8 PEAK</td></tr><tr><td>2</td><td>5652.20</td><td>53.35</td><td>69.93</td><td>-16.58</td><td>40.46</td><td>36.45</td><td>9.87</td><td>33.43</td><td>259</td><td>8 PEAK</td></tr><tr><td>3</td><td>5718.90</td><td>71.04</td><td>110.49</td><td>-39.45</td><td>57.95</td><td>36.52</td><td>10.01</td><td>33.44</td><td>259</td><td>8 PEAK</td></tr><tr><td>4</td><td>5720.06</td><td>70.53</td><td>110.94</td><td>-40.41</td><td>57.44</td><td>36.52</td><td>10.01</td><td>33.44</td><td>259</td><td>8 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5642.34	52.67	68.30	-15.63	39.82	36.44	9.84	33.43	259	8 PEAK	2	5652.20	53.35	69.93	-16.58	40.46	36.45	9.87	33.43	259	8 PEAK	3	5718.90	71.04	110.49	-39.45	57.95	36.52	10.01	33.44	259	8 PEAK	4	5720.06	70.53	110.94	-40.41	57.44	36.52	10.01	33.44	259	8 PEAK	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>100.51</td><td>-----</td><td>-----</td><td>87.33</td><td>36.55</td><td>10.08</td><td>33.45</td><td>259</td><td>8 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5745.00	100.51	-----	-----	87.33	36.55	10.08	33.45	259	8 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	5642.34	52.67	68.30	-15.63	39.82	36.44	9.84	33.43	259	8 PEAK																																																																																																																			
2	5652.20	53.35	69.93	-16.58	40.46	36.45	9.87	33.43	259	8 PEAK																																																																																																																			
3	5718.90	71.04	110.49	-39.45	57.95	36.52	10.01	33.44	259	8 PEAK																																																																																																																			
4	5720.06	70.53	110.94	-40.41	57.44	36.52	10.01	33.44	259	8 PEAK																																																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	5745.00	100.51	-----	-----	87.33	36.55	10.08	33.45	259	8 PEAK																																																																																																																			
Avg	Blank					Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>93.92</td><td>-----</td><td>-----</td><td>80.74</td><td>36.55</td><td>10.08</td><td>33.45</td><td>259</td><td>8 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5745.00	93.92	-----	-----	80.74	36.55	10.08	33.45	259	8 AVERAGE																																																																										
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	5745.00	93.92	-----	-----	80.74	36.55	10.08	33.45	259	8 AVERAGE																																																																																																																			

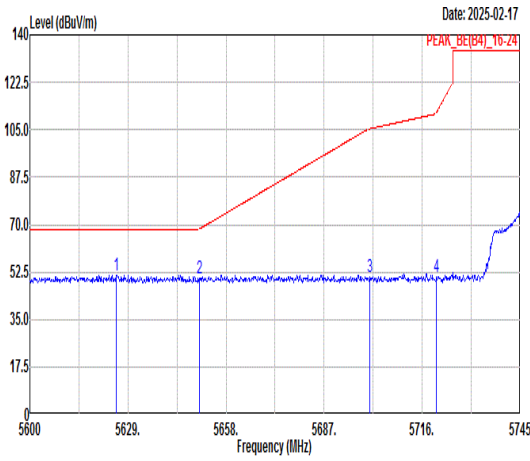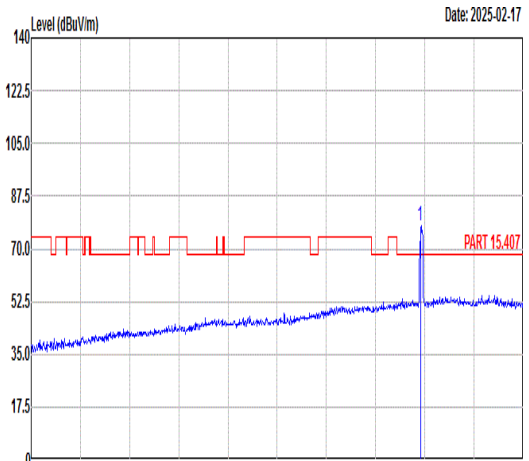
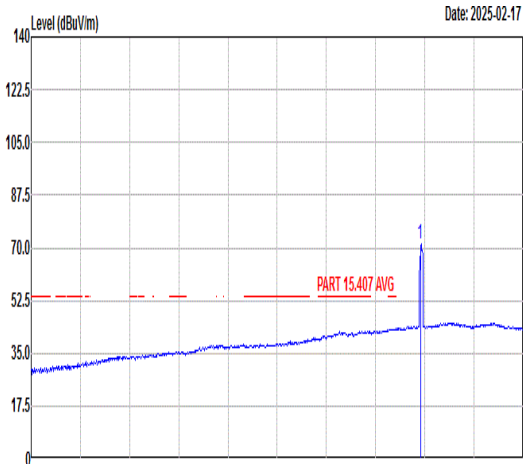


Mode	66																																																																																																																																		
	Band Edge																																																																																																																																		
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																																		
ANT	9																																																																																																																																		
Pol.	Vertical										Fundamental																																																																																																																								
Peak	Date: 2025-02-17  Level (dBuV/m) Frequency (MHz) PEAK_BE[B4]_10-24 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5625.52</td><td>51.46</td><td>68.30</td><td>-16.84</td><td>38.65</td><td>36.43</td><td>9.81</td><td>33.43</td><td>192</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5650.03</td><td>50.32</td><td>68.32</td><td>-18.00</td><td>37.44</td><td>36.45</td><td>9.86</td><td>33.43</td><td>192</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5700.49</td><td>50.46</td><td>105.34</td><td>-54.88</td><td>37.43</td><td>36.50</td><td>9.97</td><td>33.44</td><td>192</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5720.21</td><td>50.49</td><td>111.27</td><td>-60.78</td><td>37.40</td><td>36.52</td><td>10.01</td><td>33.44</td><td>192</td><td>360</td><td>PEAK</td></tr></tbody></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5625.52	51.46	68.30	-16.84	38.65	36.43	9.81	33.43	192	360	PEAK	2	5650.03	50.32	68.32	-18.00	37.44	36.45	9.86	33.43	192	360	PEAK	3	5700.49	50.46	105.34	-54.88	37.43	36.50	9.97	33.44	192	360	PEAK	4	5720.21	50.49	111.27	-60.78	37.40	36.52	10.01	33.44	192	360	PEAK	Date: 2025-02-17  Level (dBuV/m) Frequency (MHz) PART 15.407 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>77.57</td><td>-----</td><td>-----</td><td>64.37</td><td>36.56</td><td>10.09</td><td>33.45</td><td>192</td><td>360</td><td>PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5745.00	77.57	-----	-----	64.37	36.56	10.09	33.45	192	360	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5625.52	51.46	68.30	-16.84	38.65	36.43	9.81	33.43	192	360	PEAK																																																																																																																								
2	5650.03	50.32	68.32	-18.00	37.44	36.45	9.86	33.43	192	360	PEAK																																																																																																																								
3	5700.49	50.46	105.34	-54.88	37.43	36.50	9.97	33.44	192	360	PEAK																																																																																																																								
4	5720.21	50.49	111.27	-60.78	37.40	36.52	10.01	33.44	192	360	PEAK																																																																																																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5745.00	77.57	-----	-----	64.37	36.56	10.09	33.45	192	360	PEAK																																																																																																																								
Avg	Blank										Date: 2025-02-17  Level (dBuV/m) Frequency (MHz) PART 15.407 AVG <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>71.50</td><td>-----</td><td>-----</td><td>58.30</td><td>36.56</td><td>10.09</td><td>33.45</td><td>192</td><td>360</td><td>AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5745.00	71.50	-----	-----	58.30	36.56	10.09	33.45	192	360	AVERAGE																																																																														
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5745.00	71.50	-----	-----	58.30	36.56	10.09	33.45	192	360	AVERAGE																																																																																																																								



Mode	66																																																															
	Harmonic																																																															
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																															
ANT	9																																																															
Pol.	Horizontal																																																															
Peak Avg	Level (dBuV/m) Date: 2025-02-19 Frequency (MHz)																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>45.11</td><td>74.00</td><td>-28.89</td><td>56.89</td><td>39.19</td><td>12.87</td><td>63.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17235.00</td><td>48.07</td><td>68.30</td><td>-20.23</td><td>54.85</td><td>42.56</td><td>15.72</td><td>65.06</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	45.11	74.00	-28.89	56.89	39.19	12.87	63.84	---	---	Peak	2	17235.00	48.07	68.30	-20.23	54.85	42.56	15.72	65.06	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	11490.00	45.11	74.00	-28.89	56.89	39.19	12.87	63.84	---	---	Peak																																																					
2	17235.00	48.07	68.30	-20.23	54.85	42.56	15.72	65.06	---	---	Peak																																																					
Level (dBuV/m) Date: 2025-02-19 Frequency (MHz)																																																																
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>47.46</td><td>74.00</td><td>-26.54</td><td>59.24</td><td>39.19</td><td>12.87</td><td>63.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17235.00</td><td>48.58</td><td>68.30</td><td>-19.72</td><td>55.36</td><td>42.56</td><td>15.72</td><td>65.06</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	47.46	74.00	-26.54	59.24	39.19	12.87	63.84	---	---	Peak	2	17235.00	48.58	68.30	-19.72	55.36	42.56	15.72	65.06	---	---	Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	11490.00	47.46	74.00	-26.54	59.24	39.19	12.87	63.84	---	---	Peak																																																					
2	17235.00	48.58	68.30	-19.72	55.36	42.56	15.72	65.06	---	---	Peak																																																					

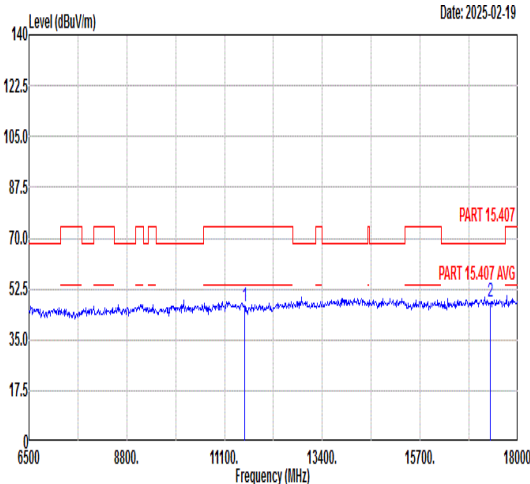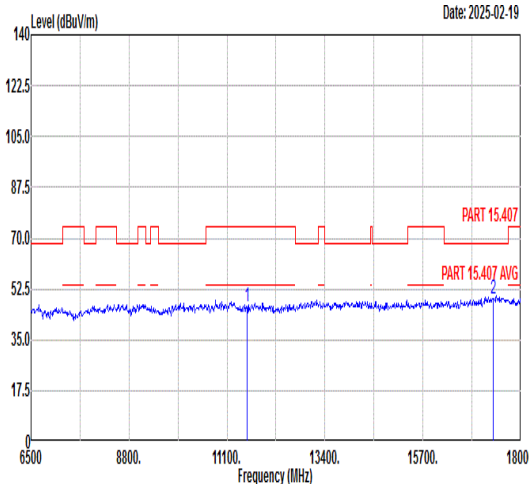

Mode	67																																																																																															
	Harmonic																																																																																															
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																															
ANT	9																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11570.00</td><td>46.71</td><td>74.00</td><td>-27.29</td><td>58.40</td><td>39.28</td><td>12.93</td></tr><tr><td>2</td><td>17355.00</td><td>48.27</td><td>68.30</td><td>-20.03</td><td>54.96</td><td>42.69</td><td>15.81</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	46.71	74.00	-27.29	58.40	39.28	12.93	2	17355.00	48.27	68.30	-20.03	54.96	42.69	15.81	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11570.00</td><td>46.29</td><td>74.00</td><td>-27.71</td><td>57.98</td><td>39.28</td><td>12.93</td></tr><tr><td>2</td><td>17355.00</td><td>49.17</td><td>68.30</td><td>-19.13</td><td>55.86</td><td>42.69</td><td>15.81</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	46.29	74.00	-27.71	57.98	39.28	12.93	2	17355.00	49.17	68.30	-19.13	55.86	42.69	15.81
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11570.00	46.71	74.00	-27.29	58.40	39.28	12.93																																																																																									
2	17355.00	48.27	68.30	-20.03	54.96	42.69	15.81																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11570.00	46.29	74.00	-27.71	57.98	39.28	12.93																																																																																									
2	17355.00	49.17	68.30	-19.13	55.86	42.69	15.81																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11570.00</td><td>46.71</td><td>74.00</td><td>-27.29</td><td>58.40</td><td>39.28</td><td>12.93</td></tr><tr><td>2</td><td>17355.00</td><td>48.27</td><td>68.30</td><td>-20.03</td><td>54.96</td><td>42.69</td><td>15.81</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	46.71	74.00	-27.29	58.40	39.28	12.93	2	17355.00	48.27	68.30	-20.03	54.96	42.69	15.81	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11570.00</td><td>46.29</td><td>74.00</td><td>-27.71</td><td>57.98</td><td>39.28</td><td>12.93</td></tr><tr><td>2</td><td>17355.00</td><td>49.17</td><td>68.30</td><td>-19.13</td><td>55.86</td><td>42.69</td><td>15.81</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	46.29	74.00	-27.71	57.98	39.28	12.93	2	17355.00	49.17	68.30	-19.13	55.86	42.69	15.81	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11570.00	46.71	74.00	-27.29	58.40	39.28	12.93																																																																																									
2	17355.00	48.27	68.30	-20.03	54.96	42.69	15.81																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11570.00	46.29	74.00	-27.71	57.98	39.28	12.93																																																																																									
2	17355.00	49.17	68.30	-19.13	55.86	42.69	15.81																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11570.00</td><td>46.71</td><td>74.00</td><td>-27.29</td><td>58.40</td><td>39.28</td><td>12.93</td></tr><tr><td>2</td><td>17355.00</td><td>48.27</td><td>68.30</td><td>-20.03</td><td>54.96</td><td>42.69</td><td>15.81</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	46.71	74.00	-27.29	58.40	39.28	12.93	2	17355.00	48.27	68.30	-20.03	54.96	42.69	15.81	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11570.00</td><td>46.29</td><td>74.00</td><td>-27.71</td><td>57.98</td><td>39.28</td><td>12.93</td></tr><tr><td>2</td><td>17355.00</td><td>49.17</td><td>68.30</td><td>-19.13</td><td>55.86</td><td>42.69</td><td>15.81</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	46.29	74.00	-27.71	57.98	39.28	12.93	2	17355.00	49.17	68.30	-19.13	55.86	42.69	15.81	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11570.00	46.71	74.00	-27.29	58.40	39.28	12.93																																																																																									
2	17355.00	48.27	68.30	-20.03	54.96	42.69	15.81																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11570.00	46.29	74.00	-27.71	57.98	39.28	12.93																																																																																									
2	17355.00	49.17	68.30	-19.13	55.86	42.69	15.81																																																																																									



Mode	68																																																																																																																											
	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																											
ANT	9																																																																																																																											
Pol.	Horizontal					Fundamental																																																																																																																						
Peak	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.13</td><td>60.01</td><td>112.79</td><td>-52.78</td><td>46.54</td><td>36.65</td><td>10.29</td><td>33.47</td><td>247</td><td>0° PEAK</td></tr><tr><td>2</td><td>5861.50</td><td>58.12</td><td>108.98</td><td>-50.86</td><td>44.62</td><td>36.66</td><td>10.31</td><td>33.47</td><td>247</td><td>0° PEAK</td></tr><tr><td>3</td><td>5924.13</td><td>51.90</td><td>68.94</td><td>-17.04</td><td>38.22</td><td>36.72</td><td>10.44</td><td>33.48</td><td>247</td><td>0° PEAK</td></tr><tr><td>4</td><td>5939.50</td><td>52.61</td><td>68.30</td><td>-15.69</td><td>38.89</td><td>36.74</td><td>10.47</td><td>33.49</td><td>247</td><td>0° PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	1	5854.13	60.01	112.79	-52.78	46.54	36.65	10.29	33.47	247	0° PEAK	2	5861.50	58.12	108.98	-50.86	44.62	36.66	10.31	33.47	247	0° PEAK	3	5924.13	51.90	68.94	-17.04	38.22	36.72	10.44	33.48	247	0° PEAK	4	5939.50	52.61	68.30	-15.69	38.89	36.74	10.47	33.49	247	0° PEAK	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>103.45</td><td>-----</td><td>90.06</td><td>36.62</td><td>10.23</td><td>33.46</td><td>247</td><td>0° PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	103.45	-----	90.06	36.62	10.23	33.46	247	0° PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5854.13	60.01	112.79	-52.78	46.54	36.65	10.29	33.47	247	0° PEAK																																																																																																																		
2	5861.50	58.12	108.98	-50.86	44.62	36.66	10.31	33.47	247	0° PEAK																																																																																																																		
3	5924.13	51.90	68.94	-17.04	38.22	36.72	10.44	33.48	247	0° PEAK																																																																																																																		
4	5939.50	52.61	68.30	-15.69	38.89	36.74	10.47	33.49	247	0° PEAK																																																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5825.00	103.45	-----	90.06	36.62	10.23	33.46	247	0° PEAK																																																																																																																			
Avg	Blank					Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>97.52</td><td>-----</td><td>84.13</td><td>36.62</td><td>10.23</td><td>33.46</td><td>247</td><td>0° AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	97.52	-----	84.13	36.62	10.23	33.46	247	0° AVERAGE																																																																										
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5825.00	97.52	-----	84.13	36.62	10.23	33.46	247	0° AVERAGE																																																																																																																			



Mode	68																																																																																																																						
	Band Edge																																																																																																																						
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																						
ANT	9																																																																																																																						
Pol.	Vertical										Fundamental																																																																																																												
Peak	Level (dBuV/m) Date: 2025-02-17 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5855.00</td><td>50.07</td><td>110.80</td><td>-60.73</td><td>36.60</td><td>36.65</td><td>10.29</td><td>33.47</td><td>118</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5870.63</td><td>51.81</td><td>106.42</td><td>-54.61</td><td>38.29</td><td>36.67</td><td>10.32</td><td>33.47</td><td>118</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5924.25</td><td>50.84</td><td>68.85</td><td>-18.01</td><td>37.16</td><td>36.72</td><td>10.44</td><td>33.48</td><td>118</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5927.00</td><td>52.69</td><td>68.30</td><td>-15.61</td><td>39.01</td><td>36.73</td><td>10.44</td><td>33.49</td><td>118</td><td>360</td><td>PEAK</td></tr></table>											Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5855.00	50.07	110.80	-60.73	36.60	36.65	10.29	33.47	118	360	PEAK	2	5870.63	51.81	106.42	-54.61	38.29	36.67	10.32	33.47	118	360	PEAK	3	5924.25	50.84	68.85	-18.01	37.16	36.72	10.44	33.48	118	360	PEAK	4	5927.00	52.69	68.30	-15.61	39.01	36.73	10.44	33.49	118	360	PEAK	Level (dBuV/m) Date: 2025-02-17 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5825.00</td><td>78.48</td><td>-----</td><td>-----</td><td>65.09</td><td>36.62</td><td>10.23</td><td>33.46</td><td>118</td><td>360</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5825.00	78.48	-----	-----	65.09	36.62	10.23	33.46	118	360	PEAK
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5855.00	50.07	110.80	-60.73	36.60	36.65	10.29	33.47	118	360	PEAK																																																																																																												
2	5870.63	51.81	106.42	-54.61	38.29	36.67	10.32	33.47	118	360	PEAK																																																																																																												
3	5924.25	50.84	68.85	-18.01	37.16	36.72	10.44	33.48	118	360	PEAK																																																																																																												
4	5927.00	52.69	68.30	-15.61	39.01	36.73	10.44	33.49	118	360	PEAK																																																																																																												
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5825.00	78.48	-----	-----	65.09	36.62	10.23	33.46	118	360	PEAK																																																																																																												
Avg	Blank										Level (dBuV/m) Date: 2025-02-17 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5825.00</td><td>71.88</td><td>-----</td><td>-----</td><td>58.49</td><td>36.62</td><td>10.23</td><td>33.46</td><td>118</td><td>360</td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5825.00	71.88	-----	-----	58.49	36.62	10.23	33.46	118	360	AVERAGE																																																																								
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5825.00	71.88	-----	-----	58.49	36.62	10.23	33.46	118	360	AVERAGE																																																																																																												







Mode	68																																																																															
	Harmonic																																																																															
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																															
ANT	9																																																																															
Pol.	Horizontal								Vertical																																																																							
Peak Avg	Level (dBuV/m) Date: 2025-02-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>11650.00</td><td>46.77</td><td>74.00</td><td>-27.23</td><td>58.35</td><td>39.38</td><td>12.99</td></tr><tr><td>2</td><td>17475.00</td><td>49.15</td><td>68.30</td><td>-19.15</td><td>55.75</td><td>42.82</td><td>15.90</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	11650.00	46.77	74.00	-27.23	58.35	39.38	12.99	2	17475.00	49.15	68.30	-19.15	55.75	42.82	15.90	Level (dBuV/m) Date: 2025-02-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>11650.00</td><td>47.43</td><td>74.00</td><td>-26.57</td><td>59.01</td><td>39.38</td><td>12.99</td></tr><tr><td>2</td><td>17475.00</td><td>49.19</td><td>68.30</td><td>-19.11</td><td>55.79</td><td>42.82</td><td>15.90</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	11650.00	47.43	74.00	-26.57	59.01	39.38	12.99	2	17475.00	49.19	68.30	-19.11	55.79	42.82	15.90
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																								
1	11650.00	46.77	74.00	-27.23	58.35	39.38	12.99																																																																									
2	17475.00	49.15	68.30	-19.15	55.75	42.82	15.90																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	11650.00	47.43	74.00	-26.57	59.01	39.38	12.99																																																																									
2	17475.00	49.19	68.30	-19.11	55.79	42.82	15.90																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>11650.00</td><td>46.77</td><td>74.00</td><td>-27.23</td><td>58.35</td><td>39.38</td><td>12.99</td></tr><tr><td>2</td><td>17475.00</td><td>49.15</td><td>68.30</td><td>-19.15</td><td>55.75</td><td>42.82</td><td>15.90</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	11650.00	46.77	74.00	-27.23	58.35	39.38	12.99	2	17475.00	49.15	68.30	-19.15	55.75	42.82	15.90	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>11650.00</td><td>47.43</td><td>74.00</td><td>-26.57</td><td>59.01</td><td>39.38</td><td>12.99</td></tr><tr><td>2</td><td>17475.00</td><td>49.19</td><td>68.30</td><td>-19.11</td><td>55.79</td><td>42.82</td><td>15.90</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	11650.00	47.43	74.00	-26.57	59.01	39.38	12.99	2	17475.00	49.19	68.30	-19.11	55.79	42.82	15.90
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	11650.00	46.77	74.00	-27.23	58.35	39.38	12.99																																																																									
2	17475.00	49.15	68.30	-19.15	55.75	42.82	15.90																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	11650.00	47.43	74.00	-26.57	59.01	39.38	12.99																																																																									
2	17475.00	49.19	68.30	-19.11	55.79	42.82	15.90																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>11650.00</td><td>46.77</td><td>74.00</td><td>-27.23</td><td>58.35</td><td>39.38</td><td>12.99</td></tr><tr><td>2</td><td>17475.00</td><td>49.15</td><td>68.30</td><td>-19.15</td><td>55.75</td><td>42.82</td><td>15.90</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	11650.00	46.77	74.00	-27.23	58.35	39.38	12.99	2	17475.00	49.15	68.30	-19.15	55.75	42.82	15.90	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>11650.00</td><td>47.43</td><td>74.00</td><td>-26.57</td><td>59.01</td><td>39.38</td><td>12.99</td></tr><tr><td>2</td><td>17475.00</td><td>49.19</td><td>68.30</td><td>-19.11</td><td>55.79</td><td>42.82</td><td>15.90</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	11650.00	47.43	74.00	-26.57	59.01	39.38	12.99	2	17475.00	49.19	68.30	-19.11	55.79	42.82	15.90
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	11650.00	46.77	74.00	-27.23	58.35	39.38	12.99																																																																									
2	17475.00	49.15	68.30	-19.15	55.75	42.82	15.90																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
1	11650.00	47.43	74.00	-26.57	59.01	39.38	12.99																																																																									
2	17475.00	49.19	68.30	-19.11	55.79	42.82	15.90																																																																									





Mode	69									
	Band Edge									
	U-NII-3_5.725-5.85_802.11n HT20_CH149_Full RU_5745MHz									
ANT	9									
Pol.	Horizontal					Fundamental				
Peak	Level (dBuV/m) Date: 2025-02-17									

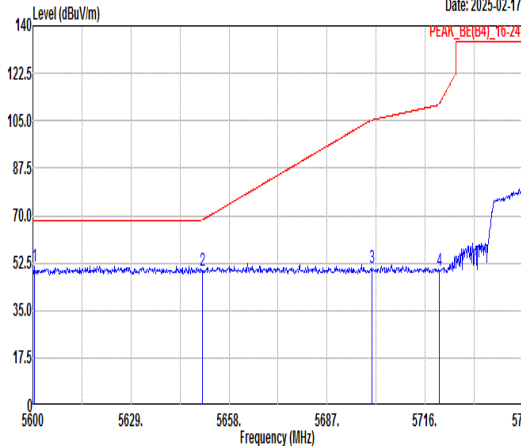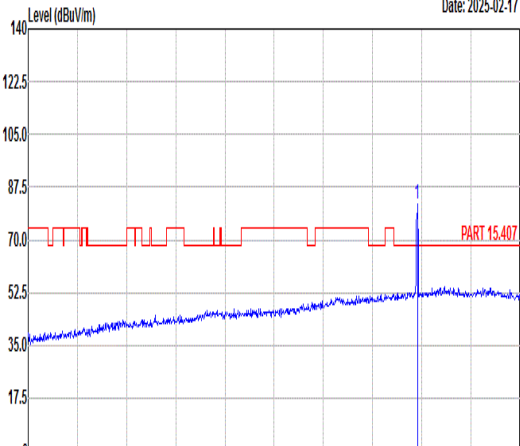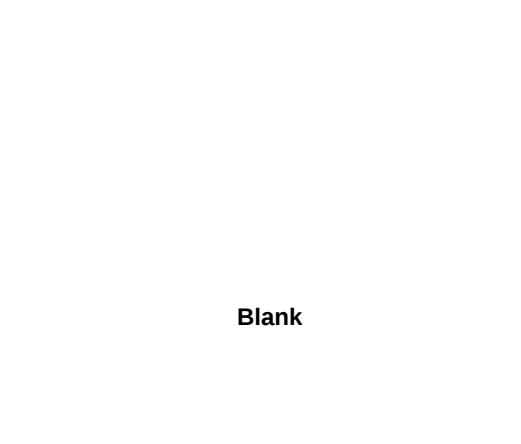
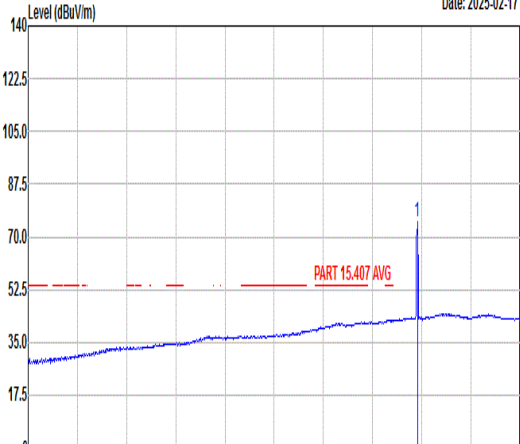


Mode	69																																																																																																																																																																																																																																																
	Band Edge																																																																																																																																																																																																																																																
	U-NII-3_5.725-5.85_802.11n HT20_CH149_Full RU_5745MHz																																																																																																																																																																																																																																																
ANT	9																																																																																																																																																																																																																																																
Pol.	Vertical					Fundamental																																																																																																																																																																																																																																											
Peak	Date: 2025-02-17  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5600.44</td><td>51.48</td><td>68.30</td><td>-16.82</td><td>38.74</td><td>36.40</td><td>9.76</td><td>33.42</td><td>200</td><td>0° PEAK</td></tr><tr><td>2</td><td>5650.03</td><td>49.88</td><td>68.32</td><td>-18.44</td><td>37.00</td><td>36.45</td><td>9.86</td><td>33.43</td><td>200</td><td>0° PEAK</td></tr><tr><td>3</td><td>5700.20</td><td>50.55</td><td>105.25</td><td>-54.70</td><td>37.52</td><td>36.50</td><td>9.97</td><td>33.44</td><td>200</td><td>0° PEAK</td></tr><tr><td>4</td><td>5720.21</td><td>49.65</td><td>111.27</td><td>-61.62</td><td>36.56</td><td>36.52</td><td>10.01</td><td>33.44</td><td>200</td><td>0° PEAK</td></tr></tbody></table> Date: 2025-02-17  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>81.63</td><td>-----</td><td>-----</td><td>68.45</td><td>36.55</td><td>10.08</td><td>33.45</td><td>200</td><td>0° PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5600.44	51.48	68.30	-16.82	38.74	36.40	9.76	33.42	200	0° PEAK	2	5650.03	49.88	68.32	-18.44	37.00	36.45	9.86	33.43	200	0° PEAK	3	5700.20	50.55	105.25	-54.70	37.52	36.50	9.97	33.44	200	0° PEAK	4	5720.21	49.65	111.27	-61.62	36.56	36.52	10.01	33.44	200	0° PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5745.00	81.63	-----	-----	68.45	36.55	10.08	33.45	200	0° PEAK	Avg	Date: 2025-02-17  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5600.44</td><td>51.48</td><td>68.30</td><td>-16.82</td><td>38.74</td><td>36.40</td><td>9.76</td><td>33.42</td><td>200</td><td>0° PEAK</td></tr><tr><td>2</td><td>5650.03</td><td>49.88</td><td>68.32</td><td>-18.44</td><td>37.00</td><td>36.45</td><td>9.86</td><td>33.43</td><td>200</td><td>0° PEAK</td></tr><tr><td>3</td><td>5700.20</td><td>50.55</td><td>105.25</td><td>-54.70</td><td>37.52</td><td>36.50</td><td>9.97</td><td>33.44</td><td>200</td><td>0° PEAK</td></tr><tr><td>4</td><td>5720.21</td><td>49.65</td><td>111.27</td><td>-61.62</td><td>36.56</td><td>36.52</td><td>10.01</td><td>33.44</td><td>200</td><td>0° PEAK</td></tr></tbody></table> Date: 2025-02-17  <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>75.25</td><td>-----</td><td>-----</td><td>62.07</td><td>36.55</td><td>10.08</td><td>33.45</td><td>200</td><td>0° AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5600.44	51.48	68.30	-16.82	38.74	36.40	9.76	33.42	200	0° PEAK	2	5650.03	49.88	68.32	-18.44	37.00	36.45	9.86	33.43	200	0° PEAK	3	5700.20	50.55	105.25	-54.70	37.52	36.50	9.97	33.44	200	0° PEAK	4	5720.21	49.65	111.27	-61.62	36.56	36.52	10.01	33.44	200	0° PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5745.00	75.25	-----	-----	62.07	36.55	10.08	33.45	200	0° AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																																																																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																								
1	5600.44	51.48	68.30	-16.82	38.74	36.40	9.76	33.42	200	0° PEAK																																																																																																																																																																																																																																							
2	5650.03	49.88	68.32	-18.44	37.00	36.45	9.86	33.43	200	0° PEAK																																																																																																																																																																																																																																							
3	5700.20	50.55	105.25	-54.70	37.52	36.50	9.97	33.44	200	0° PEAK																																																																																																																																																																																																																																							
4	5720.21	49.65	111.27	-61.62	36.56	36.52	10.01	33.44	200	0° PEAK																																																																																																																																																																																																																																							
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																																																																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																								
1	5745.00	81.63	-----	-----	68.45	36.55	10.08	33.45	200	0° PEAK																																																																																																																																																																																																																																							
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																																																																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																								
1	5600.44	51.48	68.30	-16.82	38.74	36.40	9.76	33.42	200	0° PEAK																																																																																																																																																																																																																																							
2	5650.03	49.88	68.32	-18.44	37.00	36.45	9.86	33.43	200	0° PEAK																																																																																																																																																																																																																																							
3	5700.20	50.55	105.25	-54.70	37.52	36.50	9.97	33.44	200	0° PEAK																																																																																																																																																																																																																																							
4	5720.21	49.65	111.27	-61.62	36.56	36.52	10.01	33.44	200	0° PEAK																																																																																																																																																																																																																																							
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																																																																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																								
1	5745.00	75.25	-----	-----	62.07	36.55	10.08	33.45	200	0° AVERAGE																																																																																																																																																																																																																																							

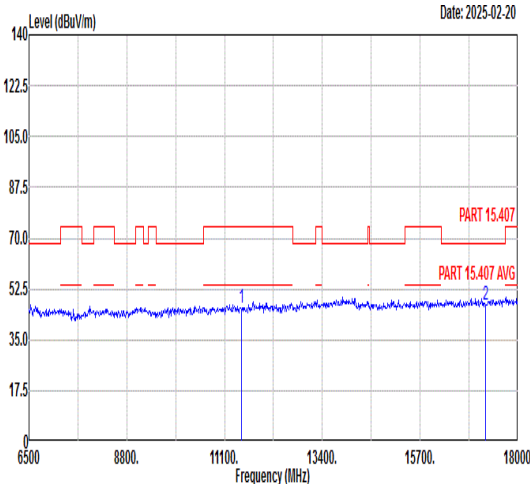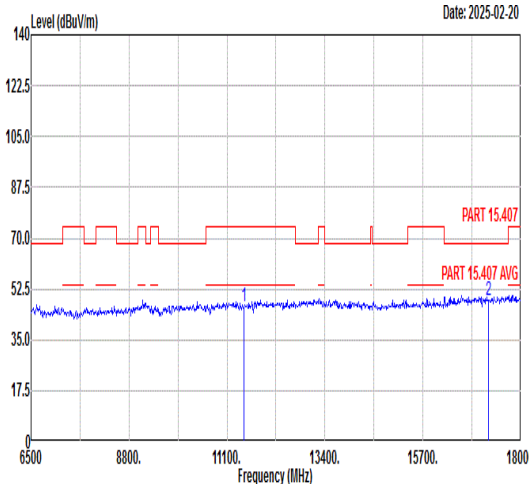

Mode	69																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-3_5.725-5.85_802.11n HT20_CH149_Full RU_5745MHz																																																																																																																			
ANT	9																																																																																																																			
Pol.	Horizontal								Vertical																																																																																																											
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11490.00</td><td>46.13</td><td>74.00</td><td>-27.87</td><td>57.91</td><td>39.19</td><td>12.87</td><td>63.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 17235.00</td><td>47.01</td><td>68.30</td><td>-21.29</td><td>53.79</td><td>42.56</td><td>15.72</td><td>65.06</td><td>---</td><td>---</td><td>Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11490.00	46.13	74.00	-27.87	57.91	39.19	12.87	63.84	---	---	Peak	2 17235.00	47.01	68.30	-21.29	53.79	42.56	15.72	65.06	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11490.00</td><td>46.57</td><td>74.00</td><td>-27.43</td><td>58.35</td><td>39.19</td><td>12.87</td><td>63.84</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 17235.00</td><td>48.52</td><td>68.30</td><td>-19.78</td><td>55.30</td><td>42.56</td><td>15.72</td><td>65.06</td><td>---</td><td>---</td><td>Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11490.00	46.57	74.00	-27.43	58.35	39.19	12.87	63.84	---	---	Peak	2 17235.00	48.52	68.30	-19.78	55.30	42.56	15.72	65.06	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1 11490.00	46.13	74.00	-27.87	57.91	39.19	12.87	63.84	---	---	Peak																																																																																																										
2 17235.00	47.01	68.30	-21.29	53.79	42.56	15.72	65.06	---	---	Peak																																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1 11490.00	46.57	74.00	-27.43	58.35	39.19	12.87	63.84	---	---	Peak																																																																																																										
2 17235.00	48.52	68.30	-19.78	55.30	42.56	15.72	65.06	---	---	Peak																																																																																																										

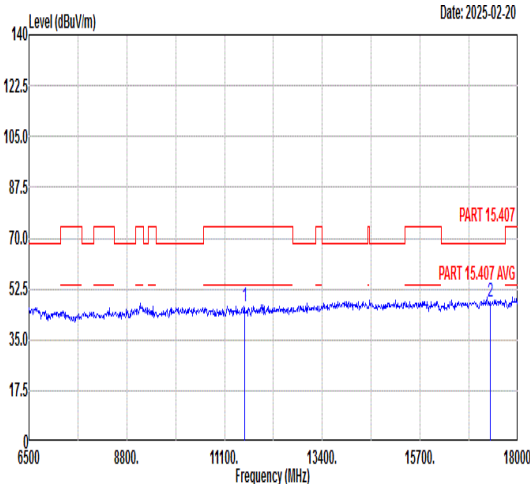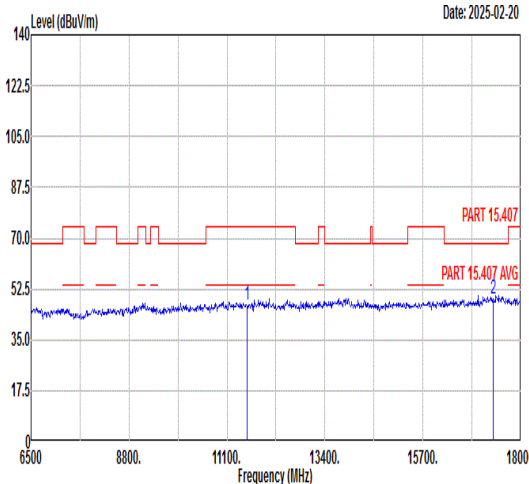

Mode	70																																																																																											
	Harmonic																																																																																											
	U-NII-3_5.725-5.85_802.11n HT20_CH157_Full RU_5785MHz																																																																																											
ANT	9																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr></thead><tbody><tr><td>1</td><td>11570.00</td><td>46.58</td><td>74.00</td><td>-27.42</td><td>58.27</td><td>39.28</td><td>12.93</td><td>63.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17355.00</td><td>48.16</td><td>68.30</td><td>-20.14</td><td>54.85</td><td>42.69</td><td>15.81</td><td>65.19</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	11570.00	46.58	74.00	-27.42	58.27	39.28	12.93	63.90	---	---	Peak	2	17355.00	48.16	68.30	-20.14	54.85	42.69	15.81	65.19	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr></thead><tbody><tr><td>1</td><td>11570.00</td><td>46.80</td><td>74.00</td><td>-27.20</td><td>58.49</td><td>39.28</td><td>12.93</td><td>63.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17355.00</td><td>49.18</td><td>68.30</td><td>-19.12</td><td>55.87</td><td>42.69</td><td>15.81</td><td>65.19</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	11570.00	46.80	74.00	-27.20	58.49	39.28	12.93	63.90	---	---	Peak	2	17355.00	49.18	68.30	-19.12	55.87	42.69	15.81	65.19	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
1	11570.00	46.58	74.00	-27.42	58.27	39.28	12.93	63.90	---	---	Peak																																																																																	
2	17355.00	48.16	68.30	-20.14	54.85	42.69	15.81	65.19	---	---	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
1	11570.00	46.80	74.00	-27.20	58.49	39.28	12.93	63.90	---	---	Peak																																																																																	
2	17355.00	49.18	68.30	-19.12	55.87	42.69	15.81	65.19	---	---	Peak																																																																																	





Mode	71																																																																																																																				
	Band Edge																																																																																																																				
	U-NII-3_5.725-5.85_802.11n HT20_CH165_Full RU_5825MHz																																																																																																																				
ANT	9																																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																																			
Peak	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.88</td><td>60.15</td><td>111.08</td><td>-50.93</td><td>46.68</td><td>36.65</td><td>10.29</td><td>33.47</td><td>200</td><td>6 PEAK</td></tr><tr><td>2</td><td>5855.25</td><td>60.19</td><td>110.73</td><td>-50.54</td><td>46.71</td><td>36.66</td><td>10.29</td><td>33.47</td><td>200</td><td>6 PEAK</td></tr><tr><td>3</td><td>5925.00</td><td>51.47</td><td>68.30</td><td>-16.83</td><td>37.80</td><td>36.72</td><td>10.44</td><td>33.49</td><td>200</td><td>6 PEAK</td></tr><tr><td>4</td><td>5947.00</td><td>52.79</td><td>68.30</td><td>-15.51</td><td>39.04</td><td>36.75</td><td>10.49</td><td>33.49</td><td>200</td><td>6 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5854.88	60.15	111.08	-50.93	46.68	36.65	10.29	33.47	200	6 PEAK	2	5855.25	60.19	110.73	-50.54	46.71	36.66	10.29	33.47	200	6 PEAK	3	5925.00	51.47	68.30	-16.83	37.80	36.72	10.44	33.49	200	6 PEAK	4	5947.00	52.79	68.30	-15.51	39.04	36.75	10.49	33.49	200	6 PEAK	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>102.01</td><td>-----</td><td>-----</td><td>88.62</td><td>36.62</td><td>10.23</td><td>33.46</td><td>200</td><td>6 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5825.00	102.01	-----	-----	88.62	36.62	10.23	33.46	200	6 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5854.88	60.15	111.08	-50.93	46.68	36.65	10.29	33.47	200	6 PEAK																																																																																																											
2	5855.25	60.19	110.73	-50.54	46.71	36.66	10.29	33.47	200	6 PEAK																																																																																																											
3	5925.00	51.47	68.30	-16.83	37.80	36.72	10.44	33.49	200	6 PEAK																																																																																																											
4	5947.00	52.79	68.30	-15.51	39.04	36.75	10.49	33.49	200	6 PEAK																																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5825.00	102.01	-----	-----	88.62	36.62	10.23	33.46	200	6 PEAK																																																																																																											
Avg	Blank	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>95.33</td><td>-----</td><td>-----</td><td>81.94</td><td>36.62</td><td>10.23</td><td>33.46</td><td>200</td><td>6 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5825.00	95.33	-----	-----	81.94	36.62	10.23	33.46	200	6 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5825.00	95.33	-----	-----	81.94	36.62	10.23	33.46	200	6 AVERAGE																																																																																																											



Mode	71																																																																																																																																																																																										
	Band Edge																																																																																																																																																																																										
	U-NII-3_5.725-5.85_802.11n HT20_CH165_Full RU_5825MHz																																																																																																																																																																																										
ANT	9																																																																																																																																																																																										
Pol.	Vertical										Fundamental																																																																																																																																																																																
Peak	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5854.88</td><td>52.03</td><td>111.08</td><td>-59.05</td><td>38.56</td><td>36.65</td><td>10.29</td><td>33.47</td><td>200</td><td>239 PEAK</td></tr><tr><td>2</td><td>5874.25</td><td>50.88</td><td>105.41</td><td>-54.53</td><td>37.35</td><td>36.67</td><td>10.33</td><td>33.47</td><td>200</td><td>239 PEAK</td></tr><tr><td>3</td><td>5925.00</td><td>50.90</td><td>68.30</td><td>-17.40</td><td>37.23</td><td>36.72</td><td>10.44</td><td>33.49</td><td>200</td><td>239 PEAK</td></tr><tr><td>4</td><td>5948.88</td><td>52.48</td><td>68.30</td><td>-15.82</td><td>38.73</td><td>36.75</td><td>10.49</td><td>33.49</td><td>200</td><td>239 PEAK</td></tr></table> Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5825.00</td><td>91.10</td><td>-----</td><td>-----</td><td>77.71</td><td>36.62</td><td>10.23</td><td>33.46</td><td>200</td><td>239 PEAK</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5854.88	52.03	111.08	-59.05	38.56	36.65	10.29	33.47	200	239 PEAK	2	5874.25	50.88	105.41	-54.53	37.35	36.67	10.33	33.47	200	239 PEAK	3	5925.00	50.90	68.30	-17.40	37.23	36.72	10.44	33.49	200	239 PEAK	4	5948.88	52.48	68.30	-15.82	38.73	36.75	10.49	33.49	200	239 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5825.00	91.10	-----	-----	77.71	36.62	10.23	33.46	200	239 PEAK	Avg	Blank										Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5825.00</td><td>84.33</td><td>-----</td><td>-----</td><td>70.94</td><td>36.62</td><td>10.23</td><td>33.46</td><td>200</td><td>239 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5825.00	84.33	-----	-----	70.94	36.62	10.23	33.46	200	239 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																		
1	5854.88	52.03	111.08	-59.05	38.56	36.65	10.29	33.47	200	239 PEAK																																																																																																																																																																																	
2	5874.25	50.88	105.41	-54.53	37.35	36.67	10.33	33.47	200	239 PEAK																																																																																																																																																																																	
3	5925.00	50.90	68.30	-17.40	37.23	36.72	10.44	33.49	200	239 PEAK																																																																																																																																																																																	
4	5948.88	52.48	68.30	-15.82	38.73	36.75	10.49	33.49	200	239 PEAK																																																																																																																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																		
1	5825.00	91.10	-----	-----	77.71	36.62	10.23	33.46	200	239 PEAK																																																																																																																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																		
1	5825.00	84.33	-----	-----	70.94	36.62	10.23	33.46	200	239 AVERAGE																																																																																																																																																																																	

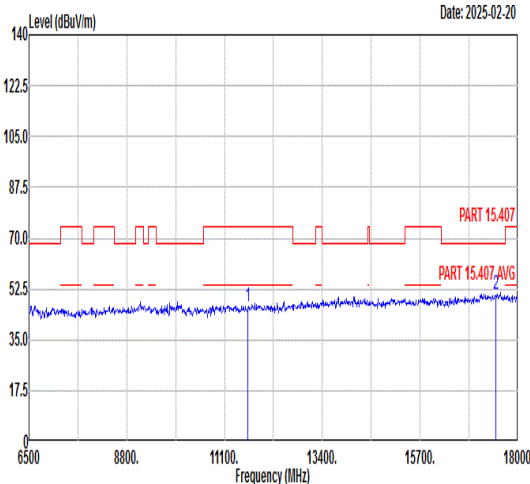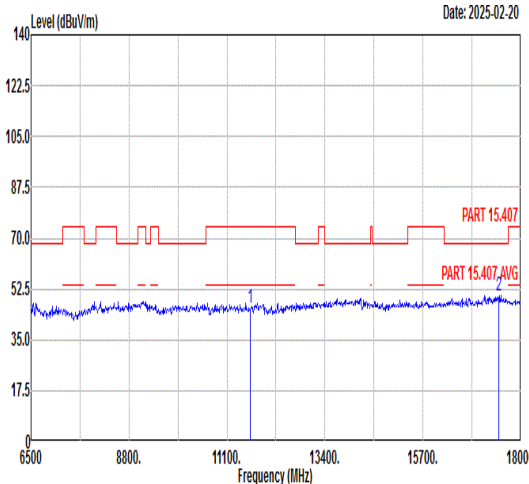

Mode	71																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-3_5.725-5.85_802.11n HT20_CH165_Full RU_5825MHz																																																																																																																			
ANT	9																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11650.00</td><td>46.64</td><td>74.00</td><td>-27.36</td><td>58.22</td><td>39.38</td><td>12.99</td><td>63.95</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17475.00</td><td>50.71</td><td>68.30</td><td>-17.59</td><td>57.31</td><td>42.82</td><td>15.90</td><td>65.32</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	46.64	74.00	-27.36	58.22	39.38	12.99	63.95	---	---	Peak	2	17475.00	50.71	68.30	-17.59	57.31	42.82	15.90	65.32	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11650.00</td><td>45.73</td><td>74.00</td><td>-28.27</td><td>57.31</td><td>39.38</td><td>12.99</td><td>63.95</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17475.00</td><td>50.41</td><td>68.30</td><td>-17.89</td><td>57.01</td><td>42.82</td><td>15.90</td><td>65.32</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	45.73	74.00	-28.27	57.31	39.38	12.99	63.95	---	---	Peak	2	17475.00	50.41	68.30	-17.89	57.01	42.82	15.90	65.32	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	11650.00	46.64	74.00	-27.36	58.22	39.38	12.99	63.95	---	---	Peak																																																																																																									
2	17475.00	50.71	68.30	-17.59	57.31	42.82	15.90	65.32	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	11650.00	45.73	74.00	-28.27	57.31	39.38	12.99	63.95	---	---	Peak																																																																																																									
2	17475.00	50.41	68.30	-17.89	57.01	42.82	15.90	65.32	---	---	Peak																																																																																																									



Mode	72																																																																																																																												
	Band Edge - L																																																																																																																												
	U-NII-3_5.725-5.85_802.11n HT40_CH151_Full RU_5755MHz																																																																																																																												
ANT	9																																																																																																																												
Pol.	Horizontal					Fundamental																																																																																																																							
Peak	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5646.81</td><td>54.34</td><td>68.30</td><td>-13.96</td><td>41.47</td><td>36.45</td><td>9.85</td><td>33.43</td><td>219</td><td>32 PEAK</td></tr><tr><td>2</td><td>5650.07</td><td>53.12</td><td>68.35</td><td>-15.23</td><td>40.24</td><td>36.45</td><td>9.86</td><td>33.43</td><td>219</td><td>32 PEAK</td></tr><tr><td>3</td><td>5719.20</td><td>72.95</td><td>110.57</td><td>-37.62</td><td>59.86</td><td>36.52</td><td>10.01</td><td>33.44</td><td>219</td><td>32 PEAK</td></tr><tr><td>4</td><td>5720.13</td><td>72.54</td><td>111.09</td><td>-38.55</td><td>59.45</td><td>36.52</td><td>10.01</td><td>33.44</td><td>219</td><td>32 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5646.81	54.34	68.30	-13.96	41.47	36.45	9.85	33.43	219	32 PEAK	2	5650.07	53.12	68.35	-15.23	40.24	36.45	9.86	33.43	219	32 PEAK	3	5719.20	72.95	110.57	-37.62	59.86	36.52	10.01	33.44	219	32 PEAK	4	5720.13	72.54	111.09	-38.55	59.45	36.52	10.01	33.44	219	32 PEAK	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>101.64</td><td>-----</td><td>-----</td><td>88.43</td><td>36.56</td><td>10.10</td><td>33.45</td><td>219</td><td>32 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5755.00	101.64	-----	-----	88.43	36.56	10.10	33.45	219	32 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	5646.81	54.34	68.30	-13.96	41.47	36.45	9.85	33.43	219	32 PEAK																																																																																																																			
2	5650.07	53.12	68.35	-15.23	40.24	36.45	9.86	33.43	219	32 PEAK																																																																																																																			
3	5719.20	72.95	110.57	-37.62	59.86	36.52	10.01	33.44	219	32 PEAK																																																																																																																			
4	5720.13	72.54	111.09	-38.55	59.45	36.52	10.01	33.44	219	32 PEAK																																																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	5755.00	101.64	-----	-----	88.43	36.56	10.10	33.45	219	32 PEAK																																																																																																																			
Avg	Blank					Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>95.25</td><td>-----</td><td>-----</td><td>82.05</td><td>36.56</td><td>10.09</td><td>33.45</td><td>219</td><td>32 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5755.00	95.25	-----	-----	82.05	36.56	10.09	33.45	219	32 AVERAGE																																																																										
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	5755.00	95.25	-----	-----	82.05	36.56	10.09	33.45	219	32 AVERAGE																																																																																																																			



Mode	72									
	Band Edge - L									
	U-NII-3_5.725-5.85_802.11n HT40_CH151_Full RU_5755MHz									
ANT	9									
Pol.	Vertical					Fundamental				
Peak	Level (dBuV/m) Date: 2025-02-17									




Mode	73																																																																																																																				
	Band Edge - L																																																																																																																				
	U-NII-3_5.725-5.85_802.11n HT40_CH159_Full RU_5795MHz																																																																																																																				
ANT	9																																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																																			
Peak	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5648.17</td><td>52.25</td><td>68.30</td><td>-16.05</td><td>39.37</td><td>36.45</td><td>9.86</td><td>33.43</td><td>400</td><td>47 PEAK</td></tr><tr><td>2</td><td>5650.70</td><td>50.86</td><td>68.82</td><td>-17.96</td><td>37.98</td><td>36.45</td><td>9.86</td><td>33.43</td><td>400</td><td>47 PEAK</td></tr><tr><td>3</td><td>5700.82</td><td>52.57</td><td>105.43</td><td>-52.86</td><td>39.54</td><td>36.50</td><td>9.97</td><td>33.44</td><td>400</td><td>47 PEAK</td></tr><tr><td>4</td><td>5720.12</td><td>51.39</td><td>111.07</td><td>-59.68</td><td>38.30</td><td>36.52</td><td>10.01</td><td>33.44</td><td>400</td><td>47 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5648.17	52.25	68.30	-16.05	39.37	36.45	9.86	33.43	400	47 PEAK	2	5650.70	50.86	68.82	-17.96	37.98	36.45	9.86	33.43	400	47 PEAK	3	5700.82	52.57	105.43	-52.86	39.54	36.50	9.97	33.44	400	47 PEAK	4	5720.12	51.39	111.07	-59.68	38.30	36.52	10.01	33.44	400	47 PEAK	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>96.36</td><td>-----</td><td>-----</td><td>83.04</td><td>36.60</td><td>10.18</td><td>33.46</td><td>400</td><td>47 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5795.00	96.36	-----	-----	83.04	36.60	10.18	33.46	400	47 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																														
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5648.17	52.25	68.30	-16.05	39.37	36.45	9.86	33.43	400	47 PEAK																																																																																																											
2	5650.70	50.86	68.82	-17.96	37.98	36.45	9.86	33.43	400	47 PEAK																																																																																																											
3	5700.82	52.57	105.43	-52.86	39.54	36.50	9.97	33.44	400	47 PEAK																																																																																																											
4	5720.12	51.39	111.07	-59.68	38.30	36.52	10.01	33.44	400	47 PEAK																																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																														
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5795.00	96.36	-----	-----	83.04	36.60	10.18	33.46	400	47 PEAK																																																																																																											
Avg	Blank	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>90.19</td><td>-----</td><td>-----</td><td>76.90</td><td>36.59</td><td>10.16</td><td>33.46</td><td>400</td><td>47 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5795.00	90.19	-----	-----	76.90	36.59	10.16	33.46	400	47 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																														
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5795.00	90.19	-----	-----	76.90	36.59	10.16	33.46	400	47 AVERAGE																																																																																																											




Mode	73																																																																																																																																			
	Band Edge - L																																																																																																																																			
	U-NII-3_5.725-5.85_802.11n HT40_CH159_Full RU_5795MHz																																																																																																																																			
ANT	9																																																																																																																																			
Pol.	Vertical						Fundamental																																																																																																																													
Peak	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5617.75</td><td>51.10</td><td>68.30</td><td>-17.20</td><td>38.31</td><td>36.42</td><td>9.79</td><td>33.42</td><td>100</td><td>220</td><td>PEAK</td></tr><tr><td>2</td><td>5650.12</td><td>49.66</td><td>68.39</td><td>-18.73</td><td>36.78</td><td>36.45</td><td>9.86</td><td>33.43</td><td>100</td><td>220</td><td>PEAK</td></tr><tr><td>3</td><td>5700.04</td><td>50.82</td><td>105.21</td><td>-54.39</td><td>37.79</td><td>36.50</td><td>9.97</td><td>33.44</td><td>100</td><td>220</td><td>PEAK</td></tr><tr><td>4</td><td>5720.12</td><td>49.50</td><td>111.07</td><td>-61.57</td><td>36.41</td><td>36.52</td><td>10.01</td><td>33.44</td><td>100</td><td>220</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5617.75	51.10	68.30	-17.20	38.31	36.42	9.79	33.42	100	220	PEAK	2	5650.12	49.66	68.39	-18.73	36.78	36.45	9.86	33.43	100	220	PEAK	3	5700.04	50.82	105.21	-54.39	37.79	36.50	9.97	33.44	100	220	PEAK	4	5720.12	49.50	111.07	-61.57	36.41	36.52	10.01	33.44	100	220	PEAK	Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>86.23</td><td>-----</td><td>-----</td><td>72.91</td><td>36.60</td><td>10.18</td><td>33.46</td><td>100</td><td>220</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5795.00	86.23	-----	-----	72.91	36.60	10.18	33.46	100	220	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																														
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5617.75	51.10	68.30	-17.20	38.31	36.42	9.79	33.42	100	220	PEAK																																																																																																																									
2	5650.12	49.66	68.39	-18.73	36.78	36.45	9.86	33.43	100	220	PEAK																																																																																																																									
3	5700.04	50.82	105.21	-54.39	37.79	36.50	9.97	33.44	100	220	PEAK																																																																																																																									
4	5720.12	49.50	111.07	-61.57	36.41	36.52	10.01	33.44	100	220	PEAK																																																																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																														
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5795.00	86.23	-----	-----	72.91	36.60	10.18	33.46	100	220	PEAK																																																																																																																									
Avg	Blank						Level (dBuV/m) Date: 2025-02-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5795.00</td><td>79.23</td><td>-----</td><td>-----</td><td>65.94</td><td>36.59</td><td>10.16</td><td>33.46</td><td>100</td><td>220</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5795.00	79.23	-----	-----	65.94	36.59	10.16	33.46	100	220	AVERAGE																																																																														
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																														
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5795.00	79.23	-----	-----	65.94	36.59	10.16	33.46	100	220	AVERAGE																																																																																																																									


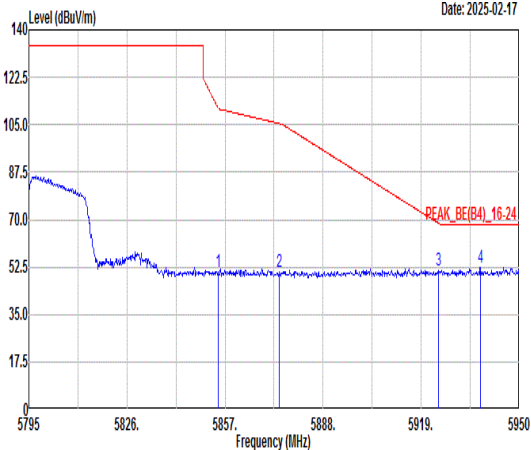


Mode	73																																																																															
	Band Edge - R																																																																															
	U-NII-3_5.725-5.85_802.11n HT40_CH159_Full RU_5795MHz																																																																															
ANT	9																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	Date: 2025-02-17 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.83</td><td>50.95</td><td>111.19</td><td>-60.24</td><td>37.48</td><td>36.65</td><td>10.29</td><td>33.47</td><td>100</td><td>220</td><td>PEAK</td></tr><tr><td>2</td><td>5874.05</td><td>50.68</td><td>105.47</td><td>-54.79</td><td>37.15</td><td>36.67</td><td>10.33</td><td>33.47</td><td>100</td><td>220</td><td>PEAK</td></tr><tr><td>3</td><td>5924.43</td><td>51.35</td><td>68.72</td><td>-17.37</td><td>37.67</td><td>36.72</td><td>10.44</td><td>33.48</td><td>100</td><td>220</td><td>PEAK</td></tr><tr><td>4</td><td>5937.76</td><td>52.51</td><td>68.30</td><td>-15.79</td><td>38.79</td><td>36.74</td><td>10.47</td><td>33.49</td><td>100</td><td>220</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5854.83	50.95	111.19	-60.24	37.48	36.65	10.29	33.47	100	220	PEAK	2	5874.05	50.68	105.47	-54.79	37.15	36.67	10.33	33.47	100	220	PEAK	3	5924.43	51.35	68.72	-17.37	37.67	36.72	10.44	33.48	100	220	PEAK	4	5937.76	52.51	68.30	-15.79	38.79	36.74	10.47	33.49	100	220	PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5854.83	50.95	111.19	-60.24	37.48	36.65	10.29	33.47	100	220	PEAK																																																																					
2	5874.05	50.68	105.47	-54.79	37.15	36.67	10.33	33.47	100	220	PEAK																																																																					
3	5924.43	51.35	68.72	-17.37	37.67	36.72	10.44	33.48	100	220	PEAK																																																																					
4	5937.76	52.51	68.30	-15.79	38.79	36.74	10.47	33.49	100	220	PEAK																																																																					


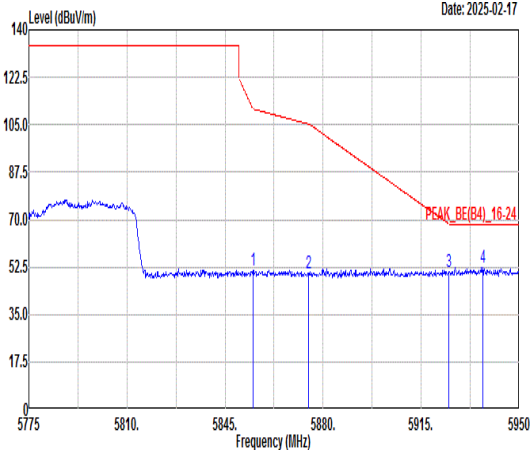


Mode	74																																																																											
	Band Edge - R																																																																											
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_Full RU_5775MHz																																																																											
ANT	9																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	Date: 2025-02-17 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.98</td><td>51.06</td><td>110.86</td><td>-59.80</td><td>37.59</td><td>36.65</td><td>10.29</td><td>33.47</td><td>202</td><td>0 PEAK</td></tr><tr><td>2</td><td>5874.75</td><td>50.37</td><td>105.27</td><td>-54.90</td><td>36.84</td><td>36.67</td><td>10.33</td><td>33.47</td><td>202</td><td>0 PEAK</td></tr><tr><td>3</td><td>5924.80</td><td>50.89</td><td>68.45</td><td>-17.56</td><td>37.21</td><td>36.72</td><td>10.44</td><td>33.48</td><td>202</td><td>0 PEAK</td></tr><tr><td>4</td><td>5936.88</td><td>52.38</td><td>68.30</td><td>-15.92</td><td>38.67</td><td>36.74</td><td>10.46</td><td>33.49</td><td>202</td><td>0 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5854.98	51.06	110.86	-59.80	37.59	36.65	10.29	33.47	202	0 PEAK	2	5874.75	50.37	105.27	-54.90	36.84	36.67	10.33	33.47	202	0 PEAK	3	5924.80	50.89	68.45	-17.56	37.21	36.72	10.44	33.48	202	0 PEAK	4	5936.88	52.38	68.30	-15.92	38.67	36.74	10.46	33.49	202	0 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																			
1	5854.98	51.06	110.86	-59.80	37.59	36.65	10.29	33.47	202	0 PEAK																																																																		
2	5874.75	50.37	105.27	-54.90	36.84	36.67	10.33	33.47	202	0 PEAK																																																																		
3	5924.80	50.89	68.45	-17.56	37.21	36.72	10.44	33.48	202	0 PEAK																																																																		
4	5936.88	52.38	68.30	-15.92	38.67	36.74	10.46	33.49	202	0 PEAK																																																																		

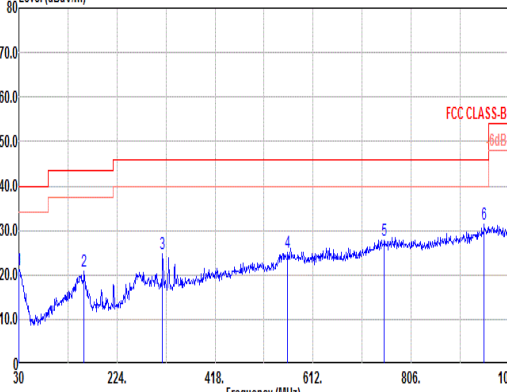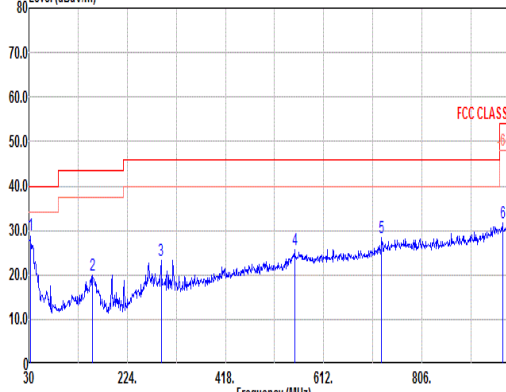





Mode	19																																																																																																																																																																																																																													
	LF																																																																																																																																																																																																																													
	U-NII-1_5.15-5.25_802.11n HT40-LF_CH38_Full RU_5190MHz																																																																																																																																																																																																																													
ANT	8																																																																																																																																																																																																																													
Pol.	Horizontal																																																																																																																																																																																																																													
Peak	Level (dBuV/m) Date: 2025-02-25  <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.00</td><td>21.09</td><td>40.00</td><td>-18.91</td><td>26.77</td><td>25.29</td><td>0.53</td><td>31.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>159.01</td><td>20.77</td><td>43.50</td><td>-22.73</td><td>34.51</td><td>16.55</td><td>1.29</td><td>31.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>314.21</td><td>24.90</td><td>46.00</td><td>-21.10</td><td>34.98</td><td>19.64</td><td>1.85</td><td>31.57</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>561.56</td><td>25.15</td><td>46.00</td><td>-20.85</td><td>26.95</td><td>26.97</td><td>2.48</td><td>31.25</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>752.65</td><td>27.78</td><td>46.00</td><td>-18.22</td><td>27.12</td><td>28.81</td><td>2.86</td><td>31.01</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>950.53</td><td>31.35</td><td>46.00</td><td>-14.65</td><td>27.53</td><td>31.44</td><td>3.23</td><td>30.85</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.00	21.09	40.00	-18.91	26.77	25.29	0.53	31.50	---	---	Peak	2	159.01	20.77	43.50	-22.73	34.51	16.55	1.29	31.58	---	---	Peak	3	314.21	24.90	46.00	-21.10	34.98	19.64	1.85	31.57	---	---	Peak	4	561.56	25.15	46.00	-20.85	26.95	26.97	2.48	31.25	---	---	Peak	5	752.65	27.78	46.00	-18.22	27.12	28.81	2.86	31.01	---	---	Peak	6	950.53	31.35	46.00	-14.65	27.53	31.44	3.23	30.85	---	---	Peak	Level (dBuV/m) Date: 2025-02-25  <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>33.88</td><td>29.03</td><td>40.00</td><td>-10.97</td><td>36.89</td><td>23.24</td><td>0.56</td><td>31.66</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>155.13</td><td>20.02</td><td>43.50</td><td>-23.48</td><td>33.56</td><td>16.78</td><td>1.27</td><td>31.59</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>290.93</td><td>23.24</td><td>46.00</td><td>-22.76</td><td>33.79</td><td>19.26</td><td>1.77</td><td>31.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>554.77</td><td>25.74</td><td>46.00</td><td>-20.26</td><td>27.69</td><td>26.86</td><td>2.47</td><td>31.28</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>726.46</td><td>28.30</td><td>46.00</td><td>-17.70</td><td>28.66</td><td>27.88</td><td>2.81</td><td>31.05</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>965.08</td><td>31.56</td><td>54.00</td><td>-22.44</td><td>27.36</td><td>31.75</td><td>3.25</td><td>30.80</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	33.88	29.03	40.00	-10.97	36.89	23.24	0.56	31.66	---	---	Peak	2	155.13	20.02	43.50	-23.48	33.56	16.78	1.27	31.59	---	---	Peak	3	290.93	23.24	46.00	-22.76	33.79	19.26	1.77	31.58	---	---	Peak	4	554.77	25.74	46.00	-20.26	27.69	26.86	2.47	31.28	---	---	Peak	5	726.46	28.30	46.00	-17.70	28.66	27.88	2.81	31.05	---	---	Peak	6	965.08	31.56	54.00	-22.44	27.36	31.75	3.25	30.80	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																				
	1	30.00	21.09	40.00	-18.91	26.77	25.29	0.53	31.50	---	---	Peak																																																																																																																																																																																																																		
	2	159.01	20.77	43.50	-22.73	34.51	16.55	1.29	31.58	---	---	Peak																																																																																																																																																																																																																		
	3	314.21	24.90	46.00	-21.10	34.98	19.64	1.85	31.57	---	---	Peak																																																																																																																																																																																																																		
	4	561.56	25.15	46.00	-20.85	26.95	26.97	2.48	31.25	---	---	Peak																																																																																																																																																																																																																		
	5	752.65	27.78	46.00	-18.22	27.12	28.81	2.86	31.01	---	---	Peak																																																																																																																																																																																																																		
	6	950.53	31.35	46.00	-14.65	27.53	31.44	3.23	30.85	---	---	Peak																																																																																																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																					
1	33.88	29.03	40.00	-10.97	36.89	23.24	0.56	31.66	---	---	Peak																																																																																																																																																																																																																			
2	155.13	20.02	43.50	-23.48	33.56	16.78	1.27	31.59	---	---	Peak																																																																																																																																																																																																																			
3	290.93	23.24	46.00	-22.76	33.79	19.26	1.77	31.58	---	---	Peak																																																																																																																																																																																																																			
4	554.77	25.74	46.00	-20.26	27.69	26.86	2.47	31.28	---	---	Peak																																																																																																																																																																																																																			
5	726.46	28.30	46.00	-17.70	28.66	27.88	2.81	31.05	---	---	Peak																																																																																																																																																																																																																			
6	965.08	31.56	54.00	-22.44	27.36	31.75	3.25	30.80	---	---	Peak																																																																																																																																																																																																																			

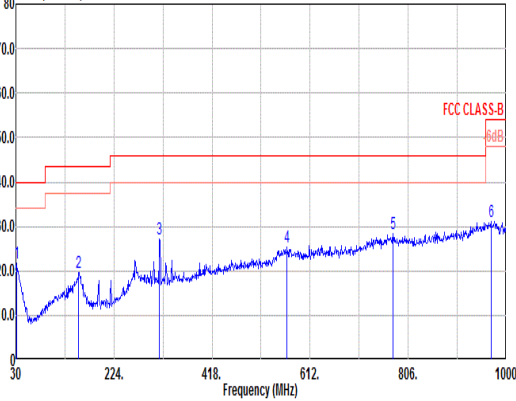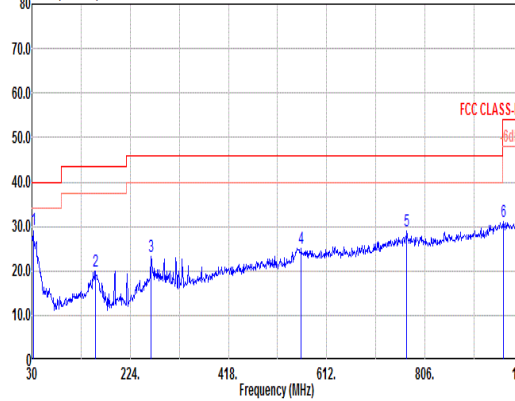

Mode	30																																																																																																														
	LF																																																																																																														
	U-NII-3_5.725-5.85_802.11a-LF_CH157_5785MHz																																																																																																														
ANT	8																																																																																																														
Pol.	Horizontal																																																																																																														
Peak	Level (dBuV/m) Date: 2025-02-25  Frequency (MHz)																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.97</td><td>21.83</td><td>40.00</td><td>-18.17</td><td>28.11</td><td>24.72</td><td>0.54</td><td>31.54</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>154.16</td><td>19.71</td><td>43.50</td><td>-23.79</td><td>33.19</td><td>16.84</td><td>1.27</td><td>31.59</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>314.21</td><td>27.12</td><td>46.00</td><td>-18.88</td><td>37.20</td><td>19.64</td><td>1.85</td><td>31.57</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>566.41</td><td>25.30</td><td>46.00</td><td>-20.70</td><td>27.34</td><td>26.70</td><td>2.49</td><td>31.23</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>775.93</td><td>28.35</td><td>46.00</td><td>-17.65</td><td>27.54</td><td>28.96</td><td>2.90</td><td>31.05</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>969.93</td><td>31.20</td><td>54.00</td><td>-22.80</td><td>27.07</td><td>31.66</td><td>3.26</td><td>30.79</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.97	21.83	40.00	-18.17	28.11	24.72	0.54	31.54	---	---	Peak	2	154.16	19.71	43.50	-23.79	33.19	16.84	1.27	31.59	---	---	Peak	3	314.21	27.12	46.00	-18.88	37.20	19.64	1.85	31.57	---	---	Peak	4	566.41	25.30	46.00	-20.70	27.34	26.70	2.49	31.23	---	---	Peak	5	775.93	28.35	46.00	-17.65	27.54	28.96	2.90	31.05	---	---	Peak	6	969.93	31.20	54.00	-22.80	27.07	31.66	3.26	30.79	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
	1	30.97	21.83	40.00	-18.17	28.11	24.72	0.54	31.54	---	---	Peak																																																																																																			
	2	154.16	19.71	43.50	-23.79	33.19	16.84	1.27	31.59	---	---	Peak																																																																																																			
	3	314.21	27.12	46.00	-18.88	37.20	19.64	1.85	31.57	---	---	Peak																																																																																																			
	4	566.41	25.30	46.00	-20.70	27.34	26.70	2.49	31.23	---	---	Peak																																																																																																			
	5	775.93	28.35	46.00	-17.65	27.54	28.96	2.90	31.05	---	---	Peak																																																																																																			
6	969.93	31.20	54.00	-22.80	27.07	31.66	3.26	30.79	---	---	Peak																																																																																																				
Peak	Level (dBuV/m) Date: 2025-02-25  Frequency (MHz)																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>32.91</td><td>29.32</td><td>40.00</td><td>-10.68</td><td>36.64</td><td>23.75</td><td>0.55</td><td>31.62</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>155.13</td><td>20.06</td><td>43.50</td><td>-23.44</td><td>33.60</td><td>16.78</td><td>1.27</td><td>31.59</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>265.71</td><td>23.30</td><td>46.00</td><td>-22.70</td><td>33.80</td><td>19.33</td><td>1.70</td><td>31.53</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>561.56</td><td>24.98</td><td>46.00</td><td>-21.02</td><td>26.78</td><td>26.97</td><td>2.48</td><td>31.25</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>770.11</td><td>28.97</td><td>46.00</td><td>-17.03</td><td>28.18</td><td>28.94</td><td>2.89</td><td>31.04</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>960.23</td><td>31.06</td><td>54.00</td><td>-22.94</td><td>26.87</td><td>31.76</td><td>3.25</td><td>30.82</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	32.91	29.32	40.00	-10.68	36.64	23.75	0.55	31.62	---	---	Peak	2	155.13	20.06	43.50	-23.44	33.60	16.78	1.27	31.59	---	---	Peak	3	265.71	23.30	46.00	-22.70	33.80	19.33	1.70	31.53	---	---	Peak	4	561.56	24.98	46.00	-21.02	26.78	26.97	2.48	31.25	---	---	Peak	5	770.11	28.97	46.00	-17.03	28.18	28.94	2.89	31.04	---	---	Peak	6	960.23	31.06	54.00	-22.94	26.87	31.76	3.25	30.82	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
	1	32.91	29.32	40.00	-10.68	36.64	23.75	0.55	31.62	---	---	Peak																																																																																																			
	2	155.13	20.06	43.50	-23.44	33.60	16.78	1.27	31.59	---	---	Peak																																																																																																			
	3	265.71	23.30	46.00	-22.70	33.80	19.33	1.70	31.53	---	---	Peak																																																																																																			
	4	561.56	24.98	46.00	-21.02	26.78	26.97	2.48	31.25	---	---	Peak																																																																																																			
	5	770.11	28.97	46.00	-17.03	28.18	28.94	2.89	31.04	---	---	Peak																																																																																																			
6	960.23	31.06	54.00	-22.94	26.87	31.76	3.25	30.82	---	---	Peak																																																																																																				



Co-location mode:

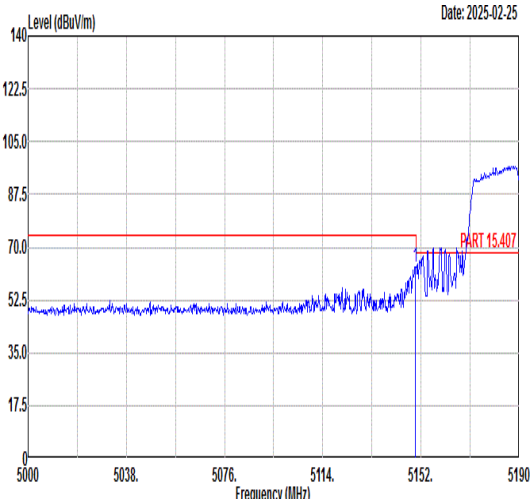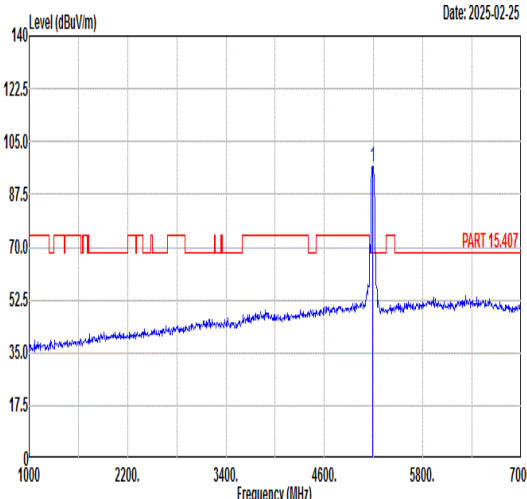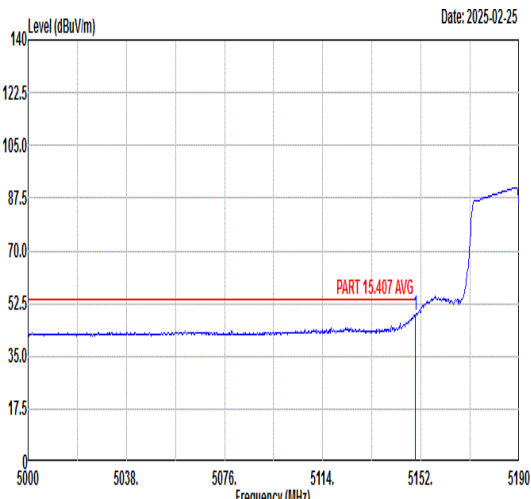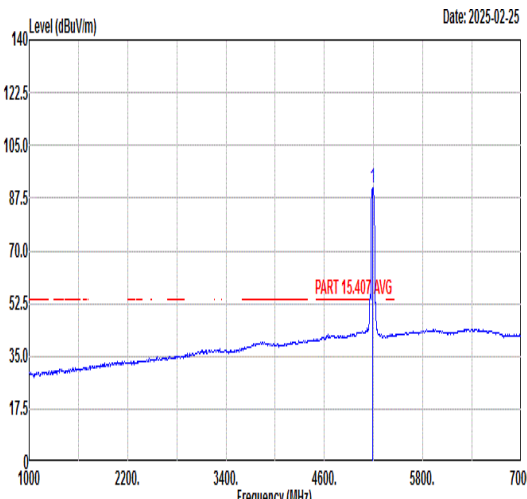		75																																																																																																	
Mode		Band Edge - L																																																																																																	
		U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz+LTE B13 Link CO_TX																																																																																																	
ANT		8																																																																																																	
Pol.		Horizontal					Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.91</td><td>63.59</td><td>74.00</td><td>-10.41</td><td>51.94</td><td>36.58</td><td>8.54</td><td>33.47</td><td>203</td><td>299</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.91	63.59	74.00	-10.41	51.94	36.58	8.54	33.47	203	299	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>96.91</td><td>-----</td><td>-----</td><td>85.21</td><td>36.54</td><td>8.62</td><td>33.46</td><td>203</td><td>299</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	96.91	-----	-----	85.21	36.54	8.62	33.46	203	299
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1	5149.91	63.59	74.00	-10.41	51.94	36.58	8.54	33.47	203	299	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1	5190.00	96.91	-----	-----	85.21	36.54	8.62	33.46	203	299	PEAK																																																																																								
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.91</td><td>48.74</td><td>54.00</td><td>-5.26</td><td>37.09</td><td>36.58</td><td>8.54</td><td>33.47</td><td>203</td><td>299</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.91	48.74	54.00	-5.26	37.09	36.58	8.54	33.47	203	299	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>91.04</td><td>-----</td><td>-----</td><td>79.34</td><td>36.54</td><td>8.62</td><td>33.46</td><td>203</td><td>299</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	91.04	-----	-----	79.34	36.54	8.62	33.46	203	299
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1	5149.91	48.74	54.00	-5.26	37.09	36.58	8.54	33.47	203	299	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1	5190.00	91.04	-----	-----	79.34	36.54	8.62	33.46	203	299	AVERAGE																																																																																								



Mode	75																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz+LTE B13 Link CO_TX																																																		
ANT	8																																																		
Pol.	Horizontal						Fundamental																																												
Peak	Date: 2025-02-25 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5420.85</td><td>50.70</td><td>74.00</td><td>-23.30</td><td>38.09</td><td>36.36</td><td>9.67</td><td>33.42</td><td>203</td><td>299</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5420.85	50.70	74.00	-23.30	38.09	36.36	9.67	33.42	203	299	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5420.85	50.70	74.00	-23.30	38.09	36.36	9.67	33.42	203	299	PEAK																																								
Avg	Date: 2025-02-25 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5406.54</td><td>42.24</td><td>54.00</td><td>-11.76</td><td>29.63</td><td>36.37</td><td>9.66</td><td>33.42</td><td>203</td><td>299</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5406.54	42.24	54.00	-11.76	29.63	36.37	9.66	33.42	203	299	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5406.54	42.24	54.00	-11.76	29.63	36.37	9.66	33.42	203	299	AVERAGE																																								





Mode	75																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz+LTE B13 Link CO_TX																																																																																										
ANT	8																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-02-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.91</td><td>60.29</td><td>74.00</td><td>-13.71</td><td>48.64</td><td>36.58</td><td>8.54</td><td>33.47</td><td>310</td><td>273</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.91	60.29	74.00	-13.71	48.64	36.58	8.54	33.47	310	273	PEAK	Level (dBuV/m) Date: 2025-02-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>93.22</td><td>-----</td><td>-----</td><td>81.52</td><td>36.55</td><td>8.61</td><td>33.46</td><td>310</td><td>273</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	93.22	-----	-----	81.52	36.55	8.61	33.46	310	273	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.91	60.29	74.00	-13.71	48.64	36.58	8.54	33.47	310	273	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5190.00	93.22	-----	-----	81.52	36.55	8.61	33.46	310	273	PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-02-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.15</td><td>46.07</td><td>54.00</td><td>-7.93</td><td>34.43</td><td>36.58</td><td>8.53</td><td>33.47</td><td>310</td><td>273</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.15	46.07	54.00	-7.93	34.43	36.58	8.53	33.47	310	273	AVERAGE	Level (dBuV/m) Date: 2025-02-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>86.89</td><td>-----</td><td>-----</td><td>75.19</td><td>36.55</td><td>8.61</td><td>33.46</td><td>310</td><td>273</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	86.89	-----	-----	75.19	36.55	8.61	33.46	310	273	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.15	46.07	54.00	-7.93	34.43	36.58	8.53	33.47	310	273	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5190.00	86.89	-----	-----	75.19	36.55	8.61	33.46	310	273	AVERAGE																																																																																







Mode	75																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz+LTE B13 Link CO_TX																																									
ANT	8																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2025-02-25 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5390.34</td><td>51.54</td><td>74.00</td><td>-22.46</td><td>39.00</td><td>36.39</td><td>9.57</td><td>33.42</td><td>310</td><td>273</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5390.34	51.54	74.00	-22.46	39.00	36.39	9.57	33.42	310	273	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5390.34	51.54	74.00	-22.46	39.00	36.39	9.57	33.42	310	273	PEAK																															
Avg	Date: 2025-02-25 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5429.22</td><td>42.05</td><td>54.00</td><td>-11.95</td><td>29.43</td><td>36.36</td><td>9.67</td><td>33.41</td><td>310</td><td>273</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5429.22	42.05	54.00	-11.95	29.43	36.36	9.67	33.41	310	273	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5429.22	42.05	54.00	-11.95	29.43	36.36	9.67	33.41	310	273	AVERAGE																															

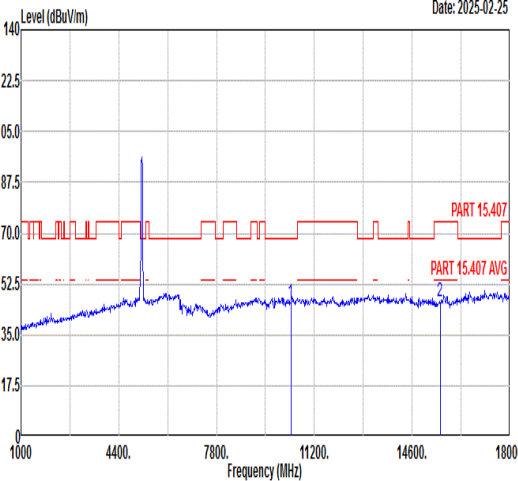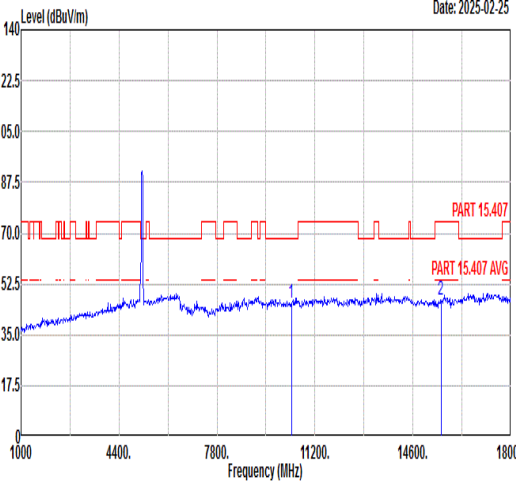

Mode	75																																																																																																															
	Harmonic																																																																																																															
	U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz+LTE B13 Link CO_TX																																																																																																															
ANT	8																																																																																																															
Pol.	Horizontal					Vertical																																																																																																										
Peak Avg	 Level (dBuV/m) Date: 2025-02-25 Frequency (MHz) PART 15.407 PART 15.407 AVG					 Level (dBuV/m) Date: 2025-02-25 Frequency (MHz) PART 15.407 PART 15.407 AVG																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10380.00</td><td>46.09</td><td>68.30</td><td>-22.21</td><td>29.41</td><td>38.48</td><td>12.08</td><td>33.88</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15570.00</td><td>46.60</td><td>74.00</td><td>-27.40</td><td>25.59</td><td>41.34</td><td>14.60</td><td>34.93</td><td>---</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10380.00	46.09	68.30	-22.21	29.41	38.48	12.08	33.88	---	Peak	2	15570.00	46.60	74.00	-27.40	25.59	41.34	14.60	34.93	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10380.00</td><td>45.86</td><td>68.30</td><td>-22.44</td><td>29.18</td><td>38.48</td><td>12.08</td><td>33.88</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15570.00</td><td>46.82</td><td>74.00</td><td>-27.18</td><td>25.81</td><td>41.34</td><td>14.60</td><td>34.93</td><td>---</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10380.00	45.86	68.30	-22.44	29.18	38.48	12.08	33.88	---	Peak	2	15570.00	46.82	74.00	-27.18	25.81	41.34	14.60	34.93	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10380.00	46.09	68.30	-22.21	29.41	38.48	12.08	33.88	---	Peak																																																																																																						
2	15570.00	46.60	74.00	-27.40	25.59	41.34	14.60	34.93	---	Peak																																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10380.00	45.86	68.30	-22.44	29.18	38.48	12.08	33.88	---	Peak																																																																																																						
2	15570.00	46.82	74.00	-27.18	25.81	41.34	14.60	34.93	---	Peak																																																																																																						

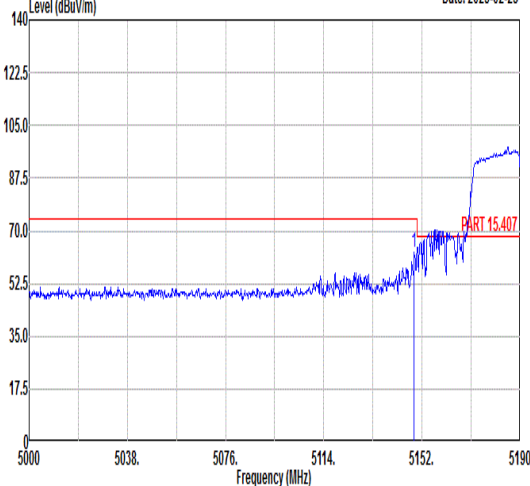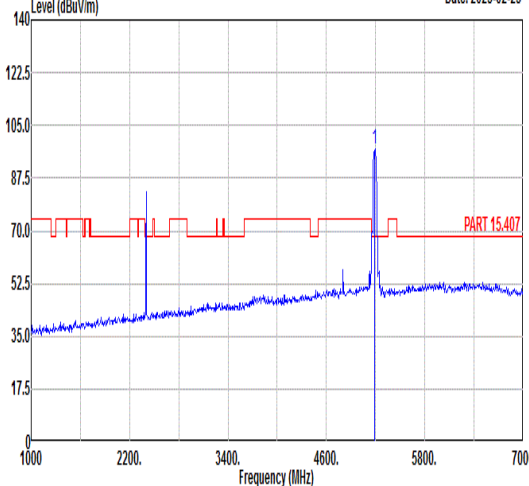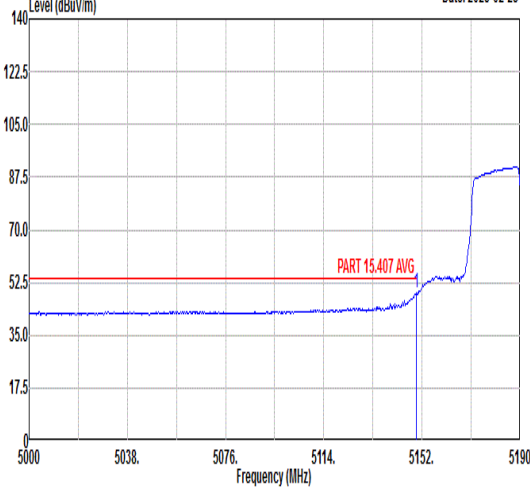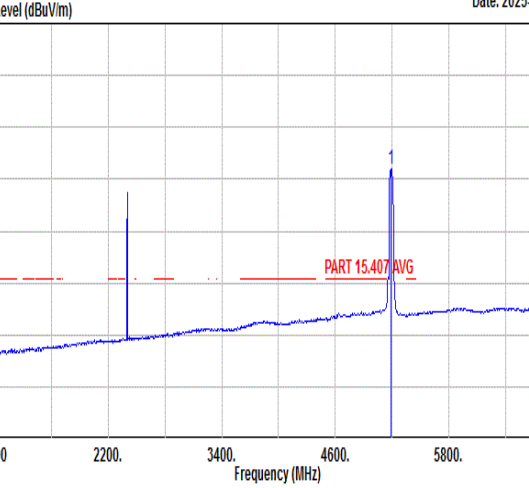

		76																																																																																									
Mode		Band Edge - L																																																																																									
		U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz+ Bluetooth BR_GFSK_Ch00+LTE B13 Link CO_TX																																																																																									
ANT		8																																																																																									
Pol.		Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-02-25  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.96</td><td>62.72</td><td>74.00</td><td>-11.28</td><td>51.08</td><td>36.58</td><td>8.53</td><td>33.47</td><td>115</td><td>301</td><td>PEAK</td></tr></table> Level (dBuV/m) Date: 2025-02-25  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>97.01</td><td>-----</td><td>-----</td><td>85.31</td><td>36.54</td><td>8.62</td><td>33.46</td><td>115</td><td>301</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.96	62.72	74.00	-11.28	51.08	36.58	8.53	33.47	115	301	PEAK		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	97.01	-----	-----	85.31	36.54	8.62	33.46	115	301	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5148.96	62.72	74.00	-11.28	51.08	36.58	8.53	33.47	115	301	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5190.00	97.01	-----	-----	85.31	36.54	8.62	33.46	115	301	PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-02-25  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.91</td><td>48.99</td><td>54.00</td><td>-5.01</td><td>37.34</td><td>36.58</td><td>8.54</td><td>33.47</td><td>115</td><td>301</td><td>AVERAGE</td></tr></table> Level (dBuV/m) Date: 2025-02-25  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>90.76</td><td>-----</td><td>-----</td><td>79.06</td><td>36.55</td><td>8.61</td><td>33.46</td><td>115</td><td>301</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.91	48.99	54.00	-5.01	37.34	36.58	8.54	33.47	115	301	AVERAGE		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	90.76	-----	-----	79.06	36.55	8.61	33.46	115	301	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.91	48.99	54.00	-5.01	37.34	36.58	8.54	33.47	115	301	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5190.00	90.76	-----	-----	79.06	36.55	8.61	33.46	115	301	AVERAGE																																																																																





Mode	76																																								
	Band Edge - R																																								
	U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz+ Bluetooth BR_GFSK_Ch00+LTE B13 Link CO_TX																																								
ANT	8																																								
Pol.	Horizontal	Fundamental																																							
Peak	Level (dBuV/m) Date: 2025-02-25 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5421.66</td><td>51.19</td><td>74.00</td><td>-22.81</td><td>38.58</td><td>36.36</td><td>9.67</td><td>33.42</td><td>115</td><td>301 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5421.66	51.19	74.00	-22.81	38.58	36.36	9.67	33.42	115	301 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1	5421.66	51.19	74.00	-22.81	38.58	36.36	9.67	33.42	115	301 PEAK																															
Avg	Level (dBuV/m) Date: 2025-02-25 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5413.02</td><td>42.13</td><td>54.00</td><td>-11.87</td><td>29.52</td><td>36.37</td><td>9.66</td><td>33.42</td><td>115</td><td>301 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5413.02	42.13	54.00	-11.87	29.52	36.37	9.66	33.42	115	301 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1	5413.02	42.13	54.00	-11.87	29.52	36.37	9.66	33.42	115	301 AVERAGE																															



Mode	76																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz+ Bluetooth BR_GFSK_Ch00+LTE B13 Link CO_TX																																																																																										
ANT	8																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-02-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.91</td><td>61.12</td><td>74.00</td><td>-12.88</td><td>49.47</td><td>36.58</td><td>8.54</td><td>33.47</td><td>300</td><td>268</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.91	61.12	74.00	-12.88	49.47	36.58	8.54	33.47	300	268	PEAK	Level (dBuV/m) Date: 2025-02-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>93.76</td><td>-----</td><td>-----</td><td>82.06</td><td>36.55</td><td>8.61</td><td>33.46</td><td>300</td><td>268</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	93.76	-----	-----	82.06	36.55	8.61	33.46	300	268	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.91	61.12	74.00	-12.88	49.47	36.58	8.54	33.47	300	268	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5190.00	93.76	-----	-----	82.06	36.55	8.61	33.46	300	268	PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-02-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.34</td><td>46.09</td><td>54.00</td><td>-7.91</td><td>34.45</td><td>36.58</td><td>8.53</td><td>33.47</td><td>300</td><td>268</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.34	46.09	54.00	-7.91	34.45	36.58	8.53	33.47	300	268	AVERAGE	Level (dBuV/m) Date: 2025-02-25 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>87.50</td><td>-----</td><td>-----</td><td>75.80</td><td>36.55</td><td>8.61</td><td>33.46</td><td>300</td><td>268</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	87.50	-----	-----	75.80	36.55	8.61	33.46	300	268	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.34	46.09	54.00	-7.91	34.45	36.58	8.53	33.47	300	268	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5190.00	87.50	-----	-----	75.80	36.55	8.61	33.46	300	268	AVERAGE																																																																																

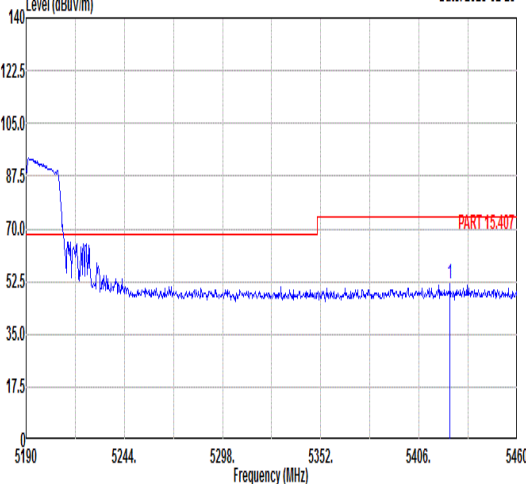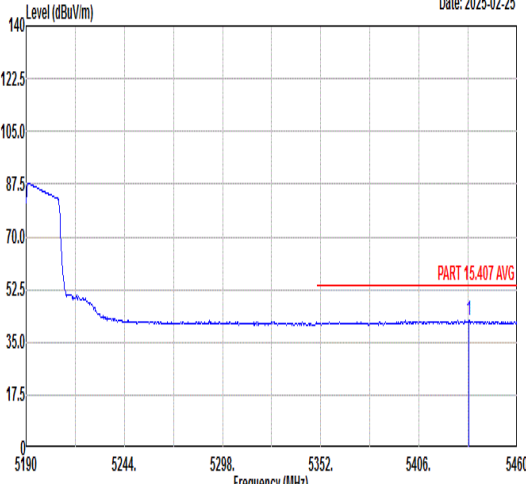

Mode	76																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz+ Bluetooth BR_GFSK_Ch00+LTE B13 Link CO_TX																																									
ANT	8																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2025-02-25  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5423.01</td><td>51.63</td><td>74.00</td><td>-22.37</td><td>39.02</td><td>36.36</td><td>9.67</td><td>33.42</td><td>300</td><td>268</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5423.01	51.63	74.00	-22.37	39.02	36.36	9.67	33.42	300	268	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5423.01	51.63	74.00	-22.37	39.02	36.36	9.67	33.42	300	268	PEAK																															
Avg	Level (dBuV/m) Date: 2025-02-25  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5433.54</td><td>42.13</td><td>54.00</td><td>-11.87</td><td>29.52</td><td>36.35</td><td>9.67</td><td>33.41</td><td>300</td><td>268</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5433.54	42.13	54.00	-11.87	29.52	36.35	9.67	33.41	300	268	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5433.54	42.13	54.00	-11.87	29.52	36.35	9.67	33.41	300	268	AVERAGE																															



Mode	76																																																																																																																							
	Band Edge																																																																																																																							
	U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz+ Bluetooth BR_GFSK_Ch00+LTE B13 Link CO_TX																																																																																																																							
ANT	8																																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																																	
Peak	Level (dBuV/m) Date: 2025-02-25 Frequency (MHz)						Level (dBuV/m) Date: 2025-02-25 Frequency (MHz)																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2317.04</td><td>43.26</td><td>74.00</td><td>-30.74</td><td>41.37</td><td>30.76</td><td>5.30</td><td>34.17</td><td>290</td><td>314</td><td>PEAK</td></tr><tr><td>2</td><td>2317.04</td><td>18.47</td><td>54.00</td><td>-35.53</td><td>16.58</td><td>30.76</td><td>5.30</td><td>34.17</td><td>290</td><td>314</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2317.04	43.26	74.00	-30.74	41.37	30.76	5.30	34.17	290	314	PEAK	2	2317.04	18.47	54.00	-35.53	16.58	30.76	5.30	34.17	290	314	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2402.00</td><td>87.15</td><td>-----</td><td>-----</td><td>85.14</td><td>30.78</td><td>5.37</td><td>34.14</td><td>290</td><td>314</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>62.36</td><td>-----</td><td>-----</td><td>60.35</td><td>30.78</td><td>5.37</td><td>34.14</td><td>290</td><td>314</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2402.00	87.15	-----	-----	85.14	30.78	5.37	34.14	290	314	PEAK	2	2402.00	62.36	-----	-----	60.35	30.78	5.37	34.14	290	314	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	2317.04	43.26	74.00	-30.74	41.37	30.76	5.30	34.17	290	314	PEAK																																																																																																													
2	2317.04	18.47	54.00	-35.53	16.58	30.76	5.30	34.17	290	314	AVERAGE																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	2402.00	87.15	-----	-----	85.14	30.78	5.37	34.14	290	314	PEAK																																																																																																													
2	2402.00	62.36	-----	-----	60.35	30.78	5.37	34.14	290	314	AVERAGE																																																																																																													



Mode	76																																																																																																																			
	Band Edge																																																																																																																			
	U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz+ Bluetooth BR_GFSK_Ch00+LTE B13 Link CO_TX																																																																																																																			
ANT	8																																																																																																																			
Pol.	Vertical						Fundamental																																																																																																													
Peak	Level (dBuV/m) Date: 2025-02-25 Frequency (MHz)						Level (dBuV/m) Date: 2025-02-25 Frequency (MHz)																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2372.69</td><td>43.21</td><td>74.00</td><td>-30.79</td><td>41.25</td><td>30.77</td><td>5.34</td><td>34.15</td><td>261</td><td>272</td><td>PEAK</td></tr><tr><td>2</td><td>2372.69</td><td>18.42</td><td>54.00</td><td>-35.58</td><td>16.46</td><td>30.77</td><td>5.34</td><td>34.15</td><td>261</td><td>272</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2372.69	43.21	74.00	-30.79	41.25	30.77	5.34	34.15	261	272	PEAK	2	2372.69	18.42	54.00	-35.58	16.46	30.77	5.34	34.15	261	272	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>84.82</td><td>-----</td><td>-----</td><td>82.81</td><td>30.78</td><td>5.37</td><td>34.14</td><td>261</td><td>272</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>60.03</td><td>-----</td><td>-----</td><td>58.02</td><td>30.78</td><td>5.37</td><td>34.14</td><td>261</td><td>272</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	84.82	-----	-----	82.81	30.78	5.37	34.14	261	272	PEAK	2	2402.00	60.03	-----	-----	58.02	30.78	5.37	34.14	261	272	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	2372.69	43.21	74.00	-30.79	41.25	30.77	5.34	34.15	261	272	PEAK																																																																																																									
2	2372.69	18.42	54.00	-35.58	16.46	30.77	5.34	34.15	261	272	AVERAGE																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	2402.00	84.82	-----	-----	82.81	30.78	5.37	34.14	261	272	PEAK																																																																																																									
2	2402.00	60.03	-----	-----	58.02	30.78	5.37	34.14	261	272	AVERAGE																																																																																																									



		76									
Mode		Harmonic									
		U-NII-1_5.15-5.25_802.11n HT40_CH38_Full RU_5190MHz+ Bluetooth BR_GFSK_Ch00+LTE B13 Link CO_TX									
ANT		8									
Pol.		Horizontal					Vertical				
Peak Avg	</										


Note:

- For all the above plots, the frequency points over limit line are fundamental signals, which can be ignored.
- For the above frequencies which fall in the non-restricted frequency band, the limit is 100kHz-PSD down 20dB.

Appendix D. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
8/9	802.11a	97.89	1.39	0.719	1kHz
8/9	802.11n HT20	97.76	1.31	0.763	1kHz
8/9	802.11n HT40	94.20	0.65	1.538	3kHz
8/9	802.11ac VHT80	88.89	0.32	3.125	10kHz

802.11a

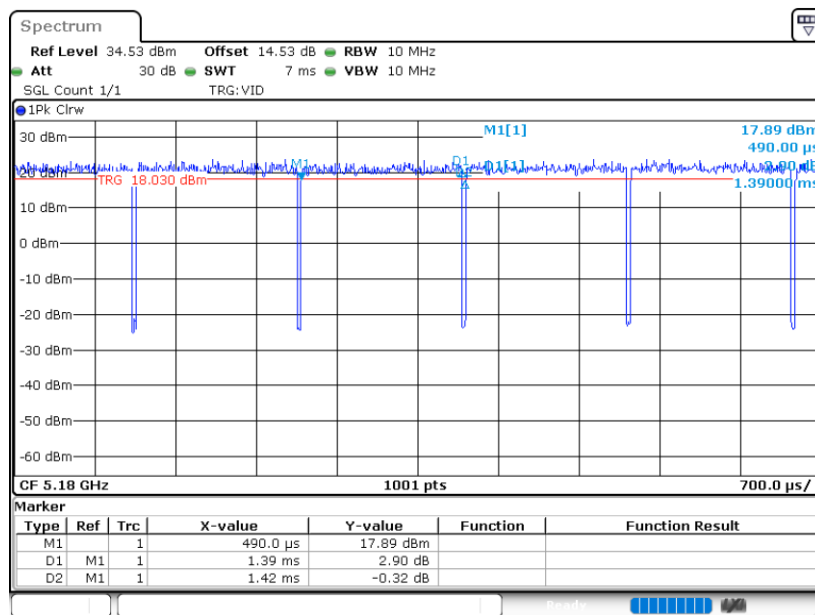




802.11n HT20

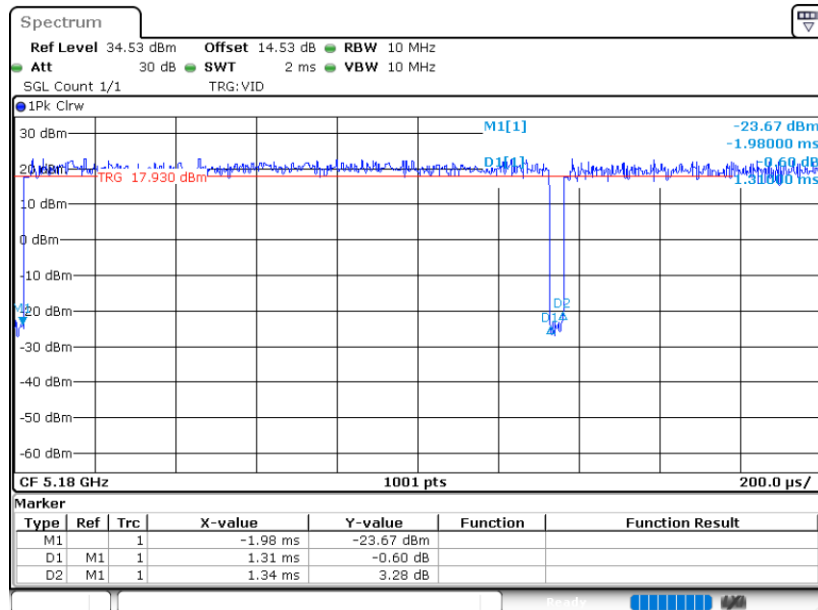

802.11n HT40

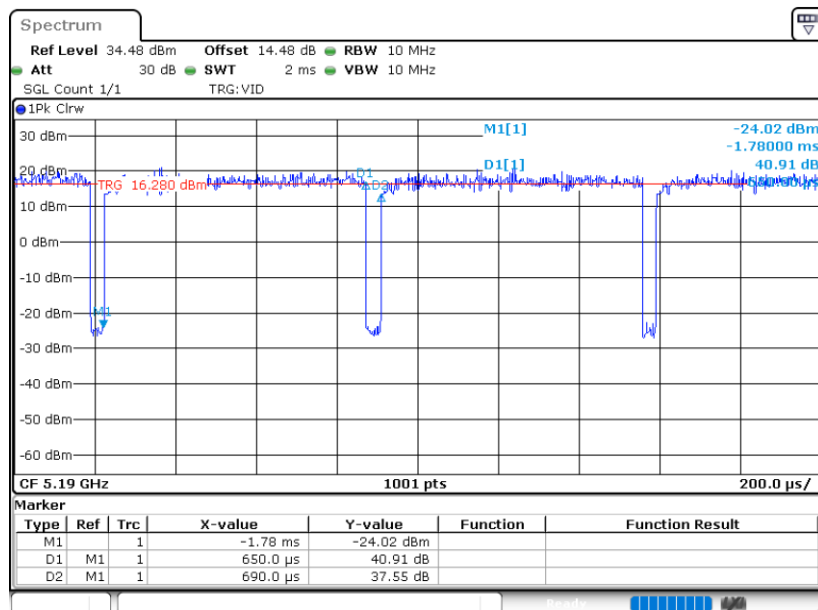



802.11ac VHT80

