


FCC SAR Test Report

APPLICANT : Realme Chongqing Mobile Telecommunications Corp., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : realme
MODEL NAME : RMX5111
FCC ID : 2AUYFRMX5111
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.



Approved by: Hank Huang

Sporton International Inc. (Shenzhen)
1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied	5
4. Equipment Under Test (EUT) Information	6
4.1 General Information.....	6
4.2 General LTE SAR Test and Reporting Considerations	8
4.3 General 5G NR SAR Test and Reporting Considerations	13
5. RF Exposure Limits.....	15
5.1 Uncontrolled Environment.....	15
5.2 Controlled Environment.....	15
6. Specific Absorption Rate (SAR)	16
6.1 Introduction	16
6.2 SAR Definition	16
7. System Description and Setup.....	17
7.1 E-Field Probe	18
7.2 Data Acquisition Electronics (DAE)	18
7.3 Phantom.....	19
7.4 Device Holder.....	20
8. Measurement Procedures.....	21
8.1 Spatial Peak SAR Evaluation	21
8.2 Power Reference Measurement.....	22
8.3 Area Scan.....	22
8.4 Zoom Scan.....	23
8.5 Volume Scan Procedures.....	23
8.6 Power Drift Monitoring.....	23
9. Test Equipment List	24
10. System Verification	25
10.1 Tissue Simulating Liquids.....	25
10.2 Tissue Verification	25
10.3 System Performance Check Results.....	26
11. RF Exposure Positions	28
11.1 Ear and handset reference point	28
11.2 Definition of the cheek position.....	29
11.3 Definition of the tilt position.....	30
11.4 Body Worn Accessory	31
11.5 Product Specific 10g SAR Exposure	32
11.6 Wireless Router	32
12. Conducted RF Output Power (Unit: dBm)	33
13. Antenna Location	47
14. SAR Test Results	48
14.1 Head SAR	51
14.2 Hotspot SAR	59
14.3 Body Worn Accessory SAR	65
14.4 Product specific 10g SAR.....	69
14.5 Repeated SAR Measurement	70
15. Simultaneous Transmission Analysis	71
15.1 Head Exposure Conditions.....	72
15.2 Hotspot Exposure Conditions.....	74
15.3 Body-Worn Accessory Exposure Conditions	77
15.4 Product specific 10g SAR Exposure Conditions.....	78
16. Uncertainty Assessment.....	81
17. References	82
Appendixes	83
Appendix A. Plots of System Performance Check.....	83
Appendix B. Plots of High SAR Measurement	83
Appendix C. DASY Calibration Certificate.....	83
Appendix D. Test Setup Photos.....	83
Appendix E. Conducted RF Output Power Table	83
Appendix F. Power measurement connection diagram and CA Conducted RF Output Power Table	83



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA551908	Rev. 01	Initial issue of report.	Jul. 28, 2025

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Realme Chongqing Mobile Telecommunications Corp., Ltd., Mobile Phone, RMX5111**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 15mm)	Highest Simultaneous Transmission
			1g SAR (W/kg)			1g SAR (W/kg)
Licensed	GSM	GSM850	0.19	0.25	0.24	1.58
		GSM1900	1.19	0.49	0.41	
	WCDMA	WCDMA II	1.12	0.52	0.30	
		WCDMA IV	0.99	0.48	0.27	
		WCDMA V	1.07	0.47	0.17	
	LTE	LTE Band 2	1.00	0.59	0.33	
		LTE Band 7	0.99	0.39	0.20	
		LTE Band 12/17	0.70	0.43	0.13	
		LTE Band 13	0.68	0.49	0.21	
		LTE Band 5/26	0.79	0.45	0.25	
		LTE Band 66/4	1.18	0.52	0.26	
		LTE Band 38/41	0.96	0.28	0.23	
	5G NR	FR1 n2	1.10	0.84	0.35	
		FR1 n7	0.91	0.56	0.21	
		FR1 n5/n26	0.81	0.35	0.25	
FR1 n66		0.86	0.97	0.34		
FR1 n38/n41		0.89	0.56	0.20		
DTS	WLAN	2.4GHz WLAN	1.00	0.40	0.18	1.54
NII		5GHz WLAN	1.04	0.28	0.21	1.58
DSS	Bluetooth	2.4GHz Bluetooth	0.61	0.37	<0.10	1.58
Highest 10g SAR Summary						
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)			Highest Simultaneous Transmission 10g SAR (W/kg)
NII	WLAN	5GHz WLAN	2.35			2.35
Date of Testing:			2025/6/17 ~ 2025/7/18			
Remark:						
1. This device supports LTE B17/B5/B4/B38 and B12/B26/B66/B41. Since the supported frequency span for LTE B17/B5/B4/B38 falls completely within the support’s frequency span for LTE B12/B26/B66/B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B12/B26/B66/B41.						
2. This device supports 5GNR n5/n38 and 5GNR n26/n41. Since the supported frequency span for 5GNR n5/n38 falls completely within the support’s frequency span for 5GNR n26/n41, both 5GNR bands have the same target power, and both 5GNR bands share the same transmission path; therefore, SAR was only assessed for 5GNR n26/n41.						

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Testing Laboratory			
Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR01-SZ, SAR02-SZ	CN1256	421272

Applicant	
Company Name	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Address	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China

Manufacturer	
Company Name	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Address	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	realme
Model Name	RMX5111
FCC ID	2AUYFRMX5111
IMEI Code	865838080027292/865838080027284, 865838080027110/865838080027102, 865838080027433/865838080027425
Wireless Technology and Frequency Range	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850MHz ~ 1910MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n26: 814 MHz ~ 849 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA/HSUPA DC-HSDPA HSPA+ (16QAM uplink is supported) LTE: QPSK, 16QAM, 64QAM 5G NR: DFT-s-OFDM/CP-OFDM, QPSK/16QAM/64QAM/256QAM WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ac VHT20/VHT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC: ASK
HW Version	11
SW Version	realme UI 6.0
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Production Unit

Remark:

1. This device supports VoIP in GPRS, EGPRS, WCDMA, LTE and 5GNR (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
3. This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
4. This device does not support DTM operation and support GRPS/EGPRS mode up to multi-slot class 12.
5. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active).
6. The device implements receiver detect mechanism trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
7. For WLAN transmitter, while the device WLAN is transmitting simultaneously with the WWAN/BT antenna, the device power will be reduced power at head exposure conditions.
8. For 5G NR test, using FTM (Factory Test Mode) to perform SAR with default 100% transmission.
9. This device has NFC function and the NFC SAR report will be separately submitted.
10. This device supports 5GNR FR1 bands as following table, including NSA mode and SA mode. NSA and SA mode performed SAR separately.

<5G NR>

Mode	Band	Duplex	SCS(KHz)	Bandwidths (BW)
NSA	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 40, 50
	n66	FDD	15	5, 10, 15, 20, 25, 30, 40
	n38	TDD	30	10, 15, 20, 25, 30, 40
	n41	TDD	30	10, 15, 20, 30, 40, 50, 60, 80, 90, 100
SA	n2	FDD	15	5, 10, 15, 20
	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 40, 50
	n26	FDD	15	5, 10, 15, 20
	n66	FDD	15	5, 10, 15, 20, 25, 30, 40
	n38	TDD	30	10, 15, 20, 25, 30, 40
	n41	TDD	30	10, 15, 20, 30, 40, 50, 60, 80, 90, 100

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																								
FCC ID		2AUYFRMX5111																																																																						
Equipment Name		Mobile Phone																																																																						
Operating Frequency Range of each LTE transmission band		LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz																																																																						
Channel Bandwidth		LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																																						
uplink modulations used		QPSK / 16QAM / 64QAM																																																																						
LTE Voice / Data requirements		Voice and Data																																																																						
LTE Release Version		R15																																																																						
CA Support		Supported, Uplink and Downlink																																																																						
LTE MPR permanently built-in by design		<table><tr><th colspan="7">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>		Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																								
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																	
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																		
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																	
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																	
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																	
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																	
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																	
256 QAM	≥ 1						≤ 5																																																																	
LTE A-MPR		In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																						
Spectrum plots for RB configuration		A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																						
Power reduction applied to satisfy SAR compliance		Yes, when operating in receiver detect mechanism, head/ body-worn /hotspot/extremity will trigger reduced power for some bands applied to satisfy SAR compliance, the detail please referred to section 12.																																																																						
LTE Carrier Aggregation Combinations		Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 12.																																																																						
LTE Carrier Aggregation Additional Information		1. This device supports LTE Carrier Aggregation (CA) in the uplink for intra-band and inter-band with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 2 carriers in the uplink.																																																																						

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					

LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37850	2580		
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595		
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38150	2610		
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506	39750	2506		
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5	40185	2549.5		
M	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593		
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41055	2636.5		
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680	41490	2680		
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

<For LTE SA Overlap Bands Description>
1) LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 4	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 66	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 5	Yes	Yes	Yes	Yes		
LTE Band 26	Yes	Yes	Yes	Yes	Yes	
LTE Band 12	Yes	Yes	Yes	Yes		
LTE Band 17			Yes	Yes		
LTE Band 38			Yes	Yes	Yes	Yes
LTE Band 41			Yes	Yes	Yes	Yes

2) LTE Bands tune up:

Band	Ant	Full (ECI0)	ECI 3	ECI 5	ECI 8	ECI 10
		Tune-up Limit				
LTE Band 4	Ant 4	24.3	23.3	24.3	21.3	24.3
LTE Band 66		24.6	23.1	24.6	21.6	24.6
LTE Band 4	Ant 3	23.9	22.9	19.4	20.9	17.4
LTE Band 66		24.2	23.2	18.7	21.2	18.7
LTE Band 4	Ant 1	22.9	22.9	22.9	22.9	22.9
LTE Band 66		23.2	23.2	23.2	23.2	23.2
LTE Band 5	Ant 0	24.8	24.8	24.8	24.8	24.8
LTE Band 26		24.8	24.8	24.8	24.8	24.8
LTE Band 5	Ant 1	24.6	24.6	24.6	24.6	22.6
LTE Band 26		24.6	24.6	24.6	24.6	22.6
LTE Band 12	Ant 0	24.8	24.8	24.8	24.8	24.8
LTE Band 17		24.8	24.8	24.8	24.8	24.8
LTE Band 12	Ant 1	24.5	24.5	24.5	24.5	22.5
LTE Band 17		24.5	24.5	24.5	24.5	22.5
LTE Band 38	Ant 4	24.3	23.8	24.3	22.3	24.3
LTE Band 41		24.8	24.8	24.8	22.8	24.8
LTE Band 38	Ant 3	23.6	21.6	22.1	19.6	22.1
LTE Band 41		23.8	22.3	22.3	19.8	22.3
LTE Band 38	Ant 1	23.1	23.1	23.1	23.1	23.1
LTE Band 41		23.5	23.5	23.5	23.5	23.5

<For LTE UL CA Overlap Bands Description>
1. LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 4	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 66	Yes	Yes	Yes	Yes	Yes	Yes

2. LTE Bands tune up:

Band	Ant	Full	ECI 3	ECI 5	ECI 8	ECI 10
		(ECI0)				
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
LTE Band 4	Ant 4	24.3	23.3	24.3	21.3	24.3
LTE Band 66		24.6	23.1	24.6	21.6	24.6
LTE Band 4	Ant 3	23.9	22.9	16.4	20.9	15.4
LTE Band 66		24.2	23.2	15.7	21.2	15.7

<For ENDC-LTE Overlap Bands Description>
1. LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 4	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 66	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 5	Yes	Yes	Yes	Yes		
LTE Band 26	Yes	Yes	Yes	Yes	Yes	

2. LTE Bands tune up:

Band	Ant	Full	ECI 3	ECI 5	ECI 8	ECI 10
		(ECI0)				
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
LTE Band 5	Ant 0	24.8	24.8	24.8	24.8	24.8
LTE Band 26		24.8	24.8	24.8	24.8	24.8
LTE Band 4	Ant 3	23.9	22.9	16.4	20.9	15.4
LTE Band 66		24.2	23.2	15.7	21.2	15.7

Note: For some bands/antennas at some exposure conditions which cannot be covered were fully tested for RF exposure compliance.

4.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information	
Operating Frequency Range of each 5G NR transmission band	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n26: 814 MHz ~ 849 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz
Channel Bandwidth	The detail please refers to section 4.1 5GNR FR1 bands table.
SCS	FDD: SCS15KHz, TDD: SCS30KHz
uplink modulations used	DFT-s-OFDM: QPSK / 16QAM / 64QAM / 256QAM CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM
A-MPR (Additional MPR) disabled for SAR Testing?	Yes
LTE Anchor Bands for n5	LTE B7/66
LTE Anchor Bands for n7	LTE B2/4/5/7/66
LTE Anchor Bands for n38	LTE B2/4/5/66
LTE Anchor Bands for n41	LTE B2/4/26/66
LTE Anchor Bands for n66	LTE B2/5/7

Transmission (H, M, L) channel numbers and frequencies in each 5G NR band								
NR Band 2								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860
M	376000	1880	376000	1880	376000	1880	376000	1880
H	381500	1907.5	381000	1905	380500	1902.5	380000	1900

NR Band 5								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165300	826.5	165800	829	166300	831.5	166800	834
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5
H	169300	846.5	168800	844	168300	841.5	167800	839

NR Band 7																
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	500500	2502.5	501000	2505	501500	2507.5	502000	2510	502500	2512.5	503000	2515	504000	2520	505000	2525
M	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535
H	513500	2567.5	513000	2565	512500	2562.5	512000	2560	511500	2557.5	511000	2555	510000	2550	509000	2545

NR Band 26								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	163300	816.5	163800	819	164300	821.5	164800	824
M	166300	831.5	166300	831.5	166300	831.5	166300	831.5
H	169300	846.5	168800	844	168300	841.5	167800	839

NR Band 66														
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	342500	1712.5	343000	1715	343500	1717.5	344000	1720	344500	1722.5	345000	1725	346000	1730
M	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745
H	355500	1777.5	355000	1775	354500	1772.5	354000	1770	353500	1767.5	353000	1765	352000	1760

NR Band 38												
	Bandwidth10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	515004	2575.02	515502	2577.51	516000	2580	516504	2582.52	517002	2585.01	518004	2590.02
M	519000	2595	519000	2595	519000	2595	519000	2595	519000	2595	519000	2595
H	522996	2614.98	522498	2612.49	522000	2610	521496	2607.48	520998	2604.99	519996	2599.98

NR Band 41 SCS30KHz																			
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L500202	2501.01	500700	2503.5	501204	2506.02	502200	2511	503202	2516.01	504204	2521.02	505200	2526	507204	2536.02	508200	2541	509202	2546.01
M518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99
H537000	2685	536496	2682.48	535998	2679.99	534996	2674.98	534000	2670	532998	2664.99	531996	2659.98	529998	2649.99	528996	2644.98	528000	2640

<For NR SA Overlap Bands Description>

1) NR Bands BW

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
SA	FR1 n5	FDD	15	5, 10, 15, 20
	FR1 n26	FDD	15	5, 10, 15, 20
	FR1 n38	TDD	30	10,15,20,25,30,40
	FR1 n41	TDD	30	10,15,20,30,40,50,60,70,80,90,100

2) NR Bands Tune up:

Band	Ant	Full (ECIO)	ECI 3	ECI 5	ECI 8	ECI 10
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
FR1 n5	Ant 0	24.7	24.7	24.7	24.7	24.7
FR1 n26		24.7	24.7	24.7	24.7	24.7
FR1 n5	Ant 1	24.4	24.4	24.4	24.4	24.4
FR1 n26		24.5	24.5	24.5	24.5	24.5
FR1 n38	Ant 4	24.7	23.7	24.7	23.7	24.7
FR1 n41		24.7	23.7	24.7	23.7	24.7
FR1 n38	Ant 3	24.2	21.7	21.2	21.7	21.2
FR1 n41		24.2	21.7	21.2	21.7	21.2
FR1 n38	Ant 1	23.8	23.8	23.8	23.8	23.8
FR1 n41		24	24	24	24	24

<For ENDC-NR SA Overlap Bands Description>

3) NR Bands BW

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
NSA	FR1 n38	TDD	30	10,15,20,25,30,40
	FR1 n41	TDD	30	10,15,20,30,40,50,60,70,80,90,100

4) NR Bands Tune up:

Band	Ant	Full (ECIO)	ECI 3	ECI 5	ECI 8	ECI 10
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
FR1 n38	Ant 4	24.7	23.7	24.7	23.7	24.7
FR1 n41		24.7	23.7	24.7	23.7	24.7
FR1 n38	Ant 3	24.2	21.7	18.2	21.7	18.2
FR1 n41		24.2	21.7	18.2	21.7	18.2
FR1 n38	Ant 1	23.8	23.8	23.8	23.8	23.8
FR1 n41		24	24	24	24	24

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

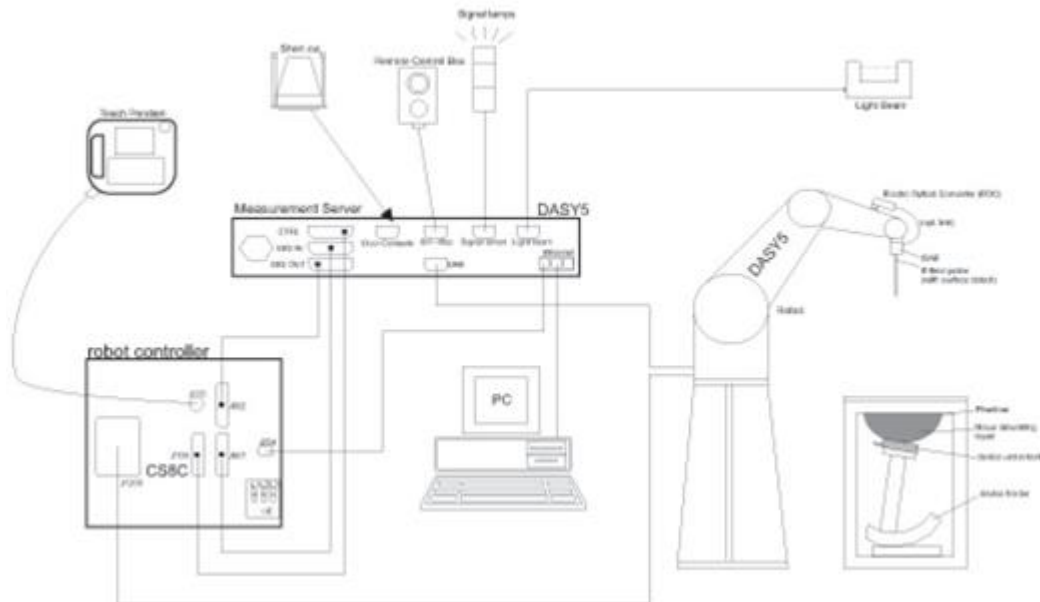

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 or Win10 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 10 GHz Linearity: ± 0.2 dB (30 MHz – 10 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1099	Dec. 13, 2024	Dec. 12, 2025
SPEAG	835MHz System Validation Kit	D835V2	4d162	Dec. 13, 2024	Dec. 12, 2025
SPEAG	1750MHz System Validation Kit	D1750V2	1137	Oct. 15, 2024	Oct. 14, 2025
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	Dec. 16, 2024	Dec. 15, 2025
SPEAG	2450MHz System Validation Kit	D2450V2	924	Nov. 03, 2023	Nov. 01, 2025
SPEAG	2600MHz System Validation Kit	D2600V2	1070	Dec. 13, 2024	Dec. 12, 2025
SPEAG	5000MHz System Validation Kit	D5GHzV2	1341	Dec. 12, 2024	Dec. 11, 2025
SPEAG	Data Acquisition Electronics	DAE4	715	Feb. 20, 2025	Feb. 19, 2026
SPEAG	Data Acquisition Electronics	DAE4	1386	Aug. 30, 2024	Aug. 29, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	7576	Oct. 10, 2024	Oct. 09, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	3819	Aug. 22, 2024	Aug. 21, 2025
SPEAG	SAM Twin Phantom	QD 000 P40 CD	1671	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	1670	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201563813	Dec. 26, 2024	Dec. 25, 2025
Anritsu	Radio communication analyzer	MT8821C	6272416837	Apr. 01, 2025	Mar. 31, 2026
Anritsu	Radio communication analyzer	MT8821C	6272416846	Apr. 01, 2025	Mar. 31, 2026
Anritsu	Radio communication analyzer	MT8821C	6272416863	Apr. 01, 2025	Mar. 31, 2026
Keysight	Network Analyzer	E5071C	MY46523671	Oct. 15, 2024	Oct. 14, 2025
Speag	Dielectric Assessment KIT	DAK-3.5	1144	Aug. 20, 2024	Aug. 19, 2025
Agilent	Signal Generator	N5181A	MY50145381	Dec. 26, 2024	Dec. 25, 2025
Anritsu	Power Sensor	MA2411B	1306099	Oct. 15, 2024	Oct. 14, 2025
Anritsu	Power Meter	ML2495A	1349001	Oct. 15, 2024	Oct. 14, 2025
Anritsu	Power Sensor	MA2411B	1218010	Oct. 14, 2024	Oct. 13, 2025
Anritsu	Power Meter	ML2495A	1339473	Dec. 26, 2024	Dec. 25, 2025
R&S	CBT BLUETOOTH TESTER	CBT	100963	Dec. 26, 2024	Dec. 25, 2025
R&S	Spectrum Analyzer	FSP7	100818	Jul. 04, 2024	Jul. 03, 2025
R&S	Spectrum Analyzer	FSP7	100818	Jul. 03, 2025	Jul. 02, 2026
TES	Hygrometer	1310	200505600	Jul. 08, 2024	Jul. 07, 2025
TES	Hygrometer	1310	220305411	Jan. 02, 2025	Jan. 01, 2026
Anymetre	Thermo-Hygrometer	JR593	2015030903	Dec. 28, 2024	Dec. 27, 2025
Anymetre	Thermo-Hygrometer	JR593	2015102801	Dec. 28, 2024	Dec. 27, 2025
SPEAG	Device Holder	N/A	N/A	N/A	N/A
AR	Amplifier	5S1G4	0333096	Note 1	
Mini-Circuits	Amplifier	ZVE-3W-83+	599201528	Note 1	
ARRA	Power Divider	A3200-2	N/A	Note 1	
ET Industries	Dual Directional Coupler	C-058-10	N/A	Note 1	
Jinkexinhua	Attenuator	10db-8G	N/A	Note 1	

Note:

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check
- Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

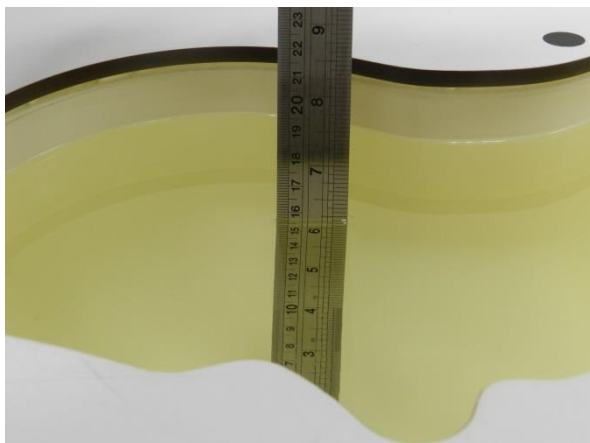


Fig 11.1 Photo of Liquid Height for Head SAR



Fig 11.2 Photo of Liquid Height for Body SAR

10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	Head	22.4	0.914	43.575	0.89	41.90	2.70	4.00	±5	2025/6/17
750	Head	22.6	0.897	43.135	0.89	41.90	0.79	2.95	±5	2025/6/30
835	Head	22.5	0.94	40.75	0.90	41.50	4.44	-1.81	±5	2025/6/27
835	Head	22.3	0.922	41.013	0.90	41.50	2.44	-1.17	±5	2025/6/23
1750	Head	22.7	1.363	38.967	1.37	40.10	-0.51	-2.83	±5	2025/7/12
1750	Head	22.4	1.371	39.573	1.37	40.10	0.07	-1.31	±5	2025/6/28
1900	Head	22.3	1.437	40.992	1.40	40.00	2.64	2.48	±5	2025/7/7
1900	Head	22.7	1.44	40.041	1.40	40.00	2.86	0.10	±5	2025/6/29
2450	Head	22.4	1.799	40.238	1.80	39.20	-0.06	2.65	±5	2025/7/2
2450	Head	22.6	1.802	38.538	1.80	39.20	0.11	-1.69	±5	2025/7/18
2600	Head	22.6	1.895	37.662	1.96	39.00	-3.32	-3.43	±5	2025/6/21
2600	Head	22.4	1.917	38.438	1.96	39.00	-2.19	-1.44	±5	2025/6/19
5250	Head	22.3	4.513	36.044	4.71	35.95	-4.18	0.26	±5	2025/7/16
5250	Head	22.4	4.481	35.599	4.71	35.95	-4.86	-0.98	±5	2025/7/12
5600	Head	22.6	4.911	36.379	5.07	35.50	-3.14	2.48	±5	2025/7/17
5600	Head	22.6	5.111	34.293	5.07	35.50	0.81	-3.40	±5	2025/7/14
5800	Head	22.4	5.074	34.91	5.27	35.30	-3.72	-1.10	±5	2025/7/13
5800	Head	22.7	5.162	34.12	5.27	35.30	-2.05	-3.34	±5	2025/7/15

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2025/6/17	750	Head	250	1099	7576	715	2.200	8.280	8.8	6.28	1.420	5.370	5.68	5.77
2025/6/30	750	Head	250	1099	3819	1386	2.170	8.280	8.68	4.83	1.410	5.370	5.64	5.03
2025/6/27	835	Head	250	4d162	7576	715	2.410	9.080	9.64	6.17	1.530	5.850	6.12	4.62
2025/6/23	835	Head	250	4d162	3819	1386	2.450	9.080	9.8	7.93	1.570	5.850	6.28	7.35
2025/7/12	1750	Head	250	1137	7576	715	8.560	36.800	34.24	-6.96	4.630	19.600	18.52	-5.51
2025/6/28	1750	Head	250	1137	3819	1386	8.890	36.800	35.56	-3.37	4.780	19.600	19.12	-2.45
2025/7/7	1900	Head	250	5d182	7576	715	9.300	39.800	37.2	-6.53	4.840	21.000	19.36	-7.81
2025/6/29	1900	Head	250	5d182	3819	1386	9.980	39.800	39.92	0.30	5.140	21.000	20.56	-2.10
2025/7/2	2450	Head	250	924	7576	715	12.200	52.300	48.8	-6.69	5.750	24.500	23	-6.12
2025/7/18	2450	Head	250	924	3819	1386	13.100	52.300	52.4	0.19	5.910	24.500	23.64	-3.51
2025/6/21	2600	Head	250	1070	7576	715	13.700	56.500	54.8	-3.01	6.490	25.200	25.96	3.02
2025/6/19	2600	Head	250	1070	3819	1386	13.800	56.500	55.2	-2.30	5.970	25.200	23.88	-5.24
2025/7/16	5250	Head	100	1341	7576	715	7.690	79.100	76.9	-2.78	2.190	22.400	21.9	-2.23
2025/7/12	5250	Head	100	1341	3819	1386	7.490	79.100	74.9	-5.31	2.080	22.400	20.8	-7.14
2025/7/17	5600	Head	100	1341	7576	715	8.680	82.800	86.8	4.83	2.450	23.800	24.5	2.94
2025/7/14	5600	Head	100	1341	3819	1386	8.220	82.800	82.2	-0.72	2.280	23.800	22.8	-4.20
2025/7/13	5800	Head	100	1341	7576	715	7.970	79.900	79.7	-0.25	2.260	22.900	22.6	-1.31
2025/7/15	5800	Head	100	1341	3819	1386	8.120	79.900	81.2	1.63	2.290	22.900	22.9	0.00

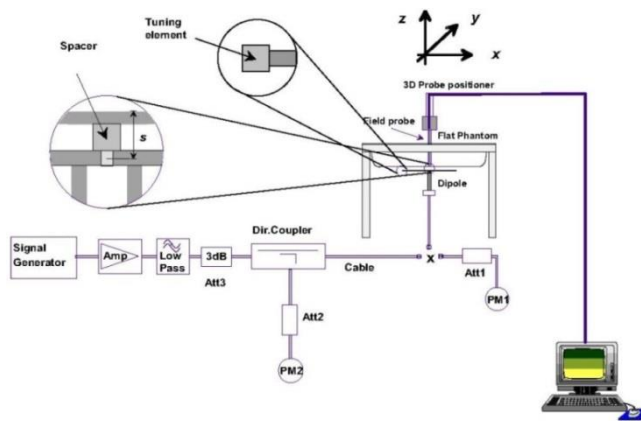


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

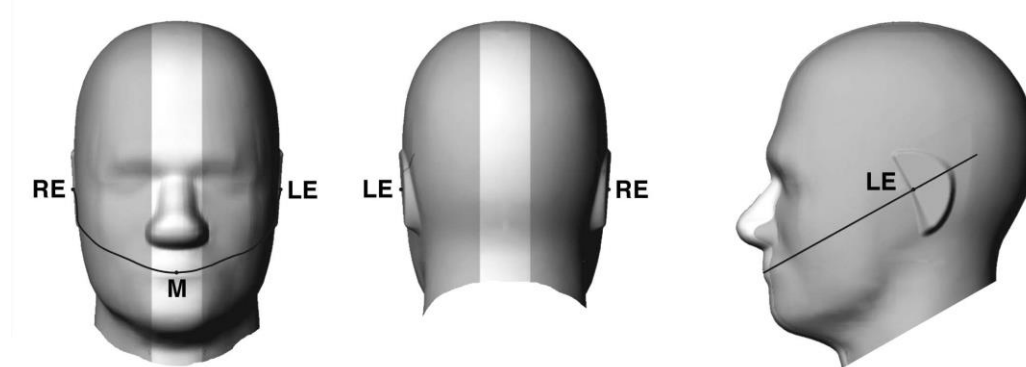


Fig 12.1.1 Front, back, and side views of SAM twin phantom

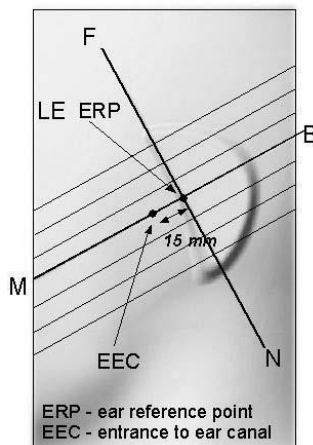


Fig 12.1.2 Close-up side view of phantom showing the ear region.

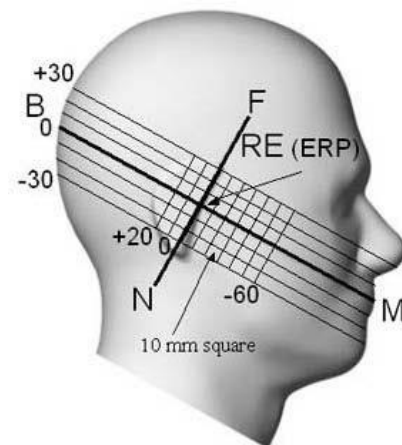


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the handset. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

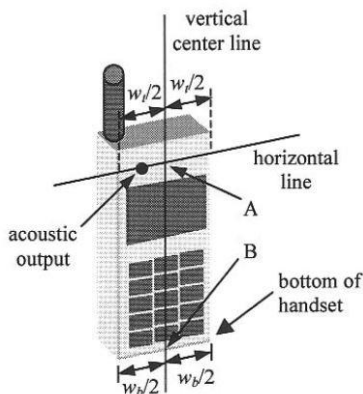


Fig 12.2.1 Handset vertical and horizontal reference lines—"fixed case"

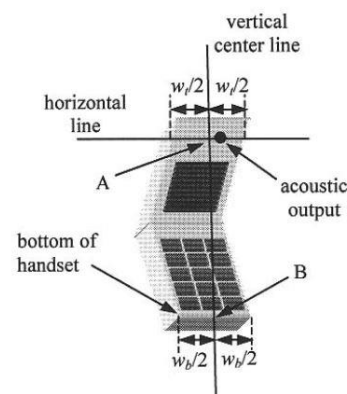


Fig 12.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

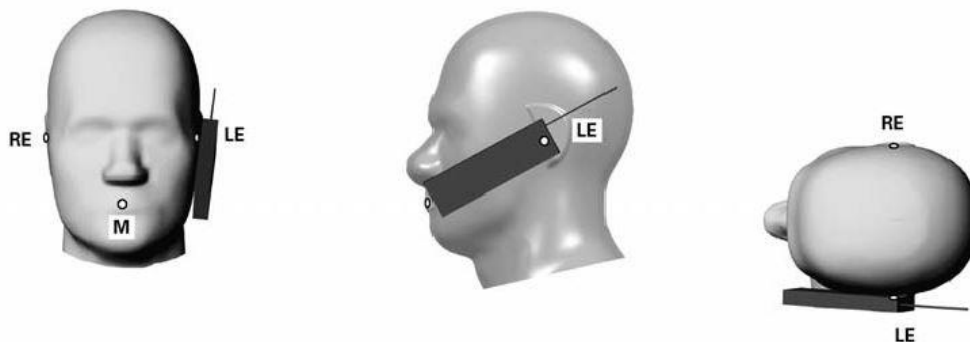


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

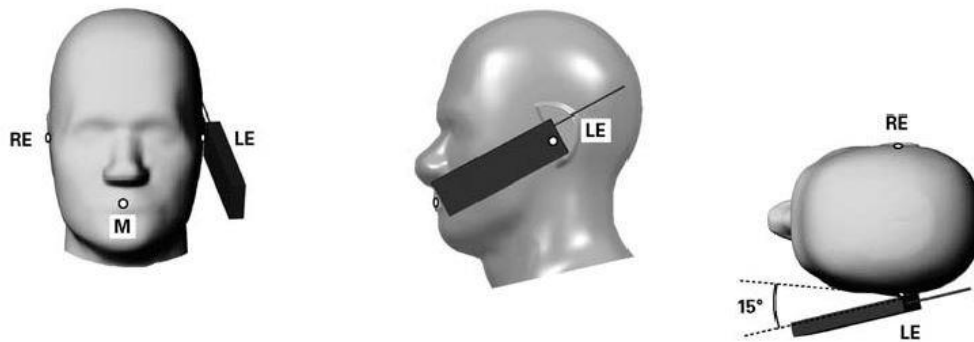


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

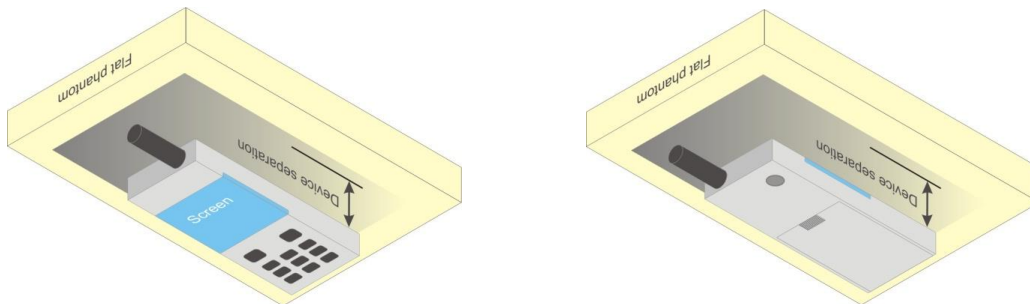


Fig 12.4 Body Worn Position

11.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

11.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

1. Per KDB 447498 D01, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

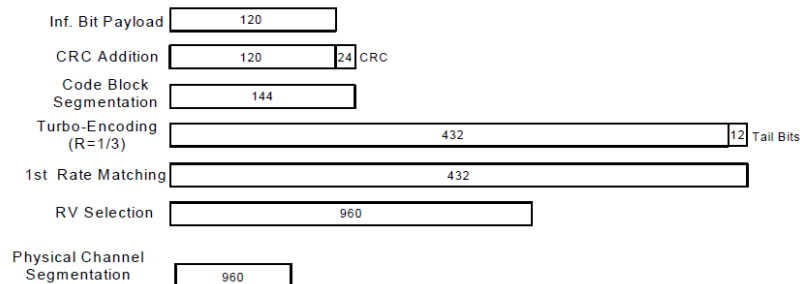


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK) Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

1. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
2. The RF path losses were compensated into the measurements.
3. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Params
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power =21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
4. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{fs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration

<WCDMA Conducted Power>


General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B4 / B5 / B17 / B38 SAR test was covered by B66 / B26 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to May 2017 TCB workshop, for 16QAM and 64QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

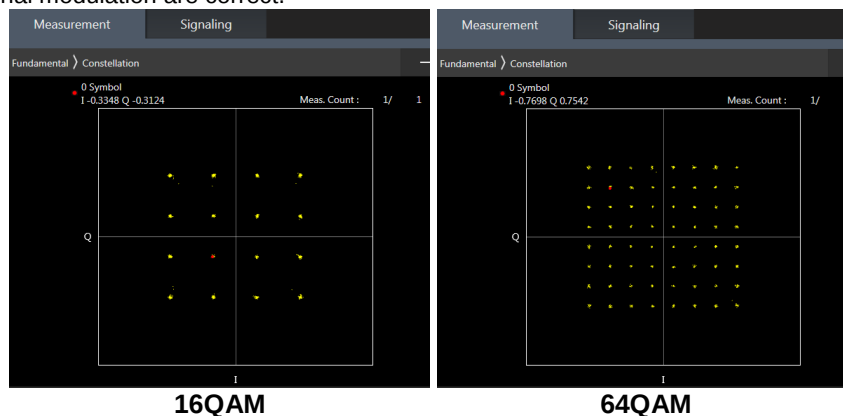

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

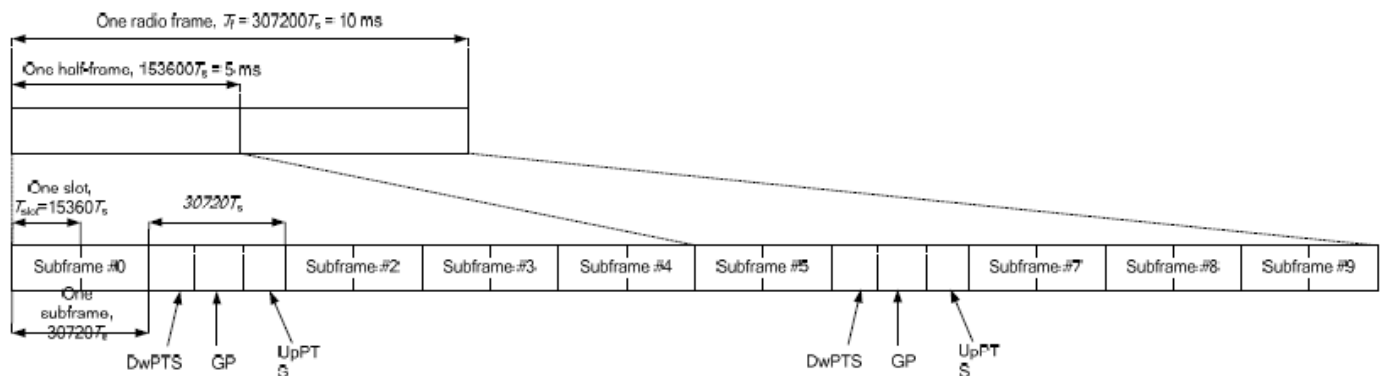


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE TDD Power class 3

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<LTE Carrier Aggregation>

The detailed LTE Carrier Aggregation conducted power table can refer to Appendix F.

General Note:

1. Per Oct. 2024 TCB workshop, the downlink (DL) pertains to receiver functionality, thus it is not related to RF exposure compliance limits related to cumulative effects of different transmitters.
2. Per Oct. 2024 TCB workshop, equipment authorization applications shall refer to the worst-case UL powers resulting from all the possible modes of operations. Accordingly, CA-DL cases do not need to be analyzed separately, unless pertinent to establishing UL power setting.
3. Per Oct. 2024 TCB workshop, Manufacturer declares that TX power measurement for multiple DL CA configurations is deemed not required as the DL CA has no impact on the TX power according to preliminary scan. TX power measured in LTE standalone operation represents the worst case.
4. This device supports LTE carrier aggregation in the downlink. All uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.

LTE Carrier Aggregation Conducted Power (Uplink)

Intra CA	TX Ant
CA_7C	Ant 4/3
CA_7B	Ant 4/3
CA_38C	Ant 4/3
CA_41C	Ant 4/3
CA_66C	Ant 4/3

<Intra-band>
General Note:

- The device supports intra-band uplink carrier aggregation for LTE B7/41/38/66 with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- The device supports uplink carrier aggregation with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- According Nov. 2017 TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- Additional SAR measurement for LTE UL CA with other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.
- LTE CA_7B test was covered by CA_7C; therefore, SAR was only assessed for CA_7C.

<Inter-band>

LTE Inter CA	LTE TX0	TX0 Ant	LTE TX1	TX1 Ant
CA_5A-66A	5A	Ant 0/1	66A	Ant 4/3
CA_2A-7A	2A	Ant 3	7A	Ant 4
CA_4A-5A	4A	Ant 4/3	5A	Ant 0/1
CA_4A-7A	4A	Ant 4	7A	Ant 3
CA_5A-7A	5A	Ant 0/1	7A	Ant 4/3
CA_2A-4A	2A	Ant 3	4A	Ant 4
CA_2A-66A	2A	Ant 3	66A	Ant 4

General Note:

- For Inter-band CA co-located SAR analysis is performed using standalone SAR summed together and they are more conservatively for inter band CA.

5G NR Output Power (Unit: dBm)

General Note:

1. 5G NR n2/n5/n7/n26/n66/n38/n41 is SA mode.
2. 5G NR n5/n7/n66/n38/n41 is NSA mode.
3. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-s QPSK and the reported SAR for the DFT-s QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, for 16QAM/64QAM/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the 16QAM/64QAM/256QAM and smaller bandwidth output power will not ½ dB higher than the same configuration in the largest supported bandwidth.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel
 - d. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - e. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested
 - f. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
4. For 5G NR test, using FTM (Factory Test Mode) to perform SAR with default 100% transmission.
5. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so SA SAR can represent NSA mode SAR.
6. 5G NR NSA mode, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time.
7. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
8. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.

<3GPP 38.101 MPR for EN-DC>
Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0 ²
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM	≤ 2.5		
CP-OFDM	256 QAM	≤ 4.5		
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5	≤ 2.5	
	256 QAM	≤ 4.5		
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

<EN-DC combination>

ENDC	NR TX	NR Ant	LTE TX	LTE Ant
DC_2A_n7A	n7	Ant 4	2A	Ant 3
DC_2A_n38A	n38	Ant 4	2A	Ant 3
DC_2A_n41A	n41	Ant 4	2A	Ant 3
DC_2A_n66A	n66	Ant 4	2A	Ant 3
DC_4A_n7A	n7	Ant 4	4A	Ant 3
DC_4A_n38A	n38	Ant 4	4A	Ant 3
DC_4A_n41A	n41	Ant 4	4A	Ant 3
DC_5A_n38A	n38	Ant 4/3/1	5A	Ant 0
DC_5A_n66A	n66	Ant 4/3/1	5A	Ant 0
DC_5A_n7A	n7	Ant 4/3/1	5A	Ant 0
DC_7A_n5A	n5	Ant 0/1	7A	Ant 4/3
DC_7A_n66A	n66	Ant 4	7A	Ant 3
DC_7A_n7A	n7	Ant 4	7A	Ant 3
DC_26A_n41A	n41	Ant 4/3/1	26A	Ant 0
DC_66A_n5A	n5	Ant 0/1	66A	Ant 4/3
DC_66A_n7A	n7	Ant 4	66A	Ant 3
DC_66A_n38A	n38	Ant 4	66A	Ant 3
DC_66A_n41A	n41	Ant 4	66A	Ant 3

<WLAN Conducted Power>


General Note:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration. Additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle are 76.27% as following figure, according to Oct. 2016 TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation

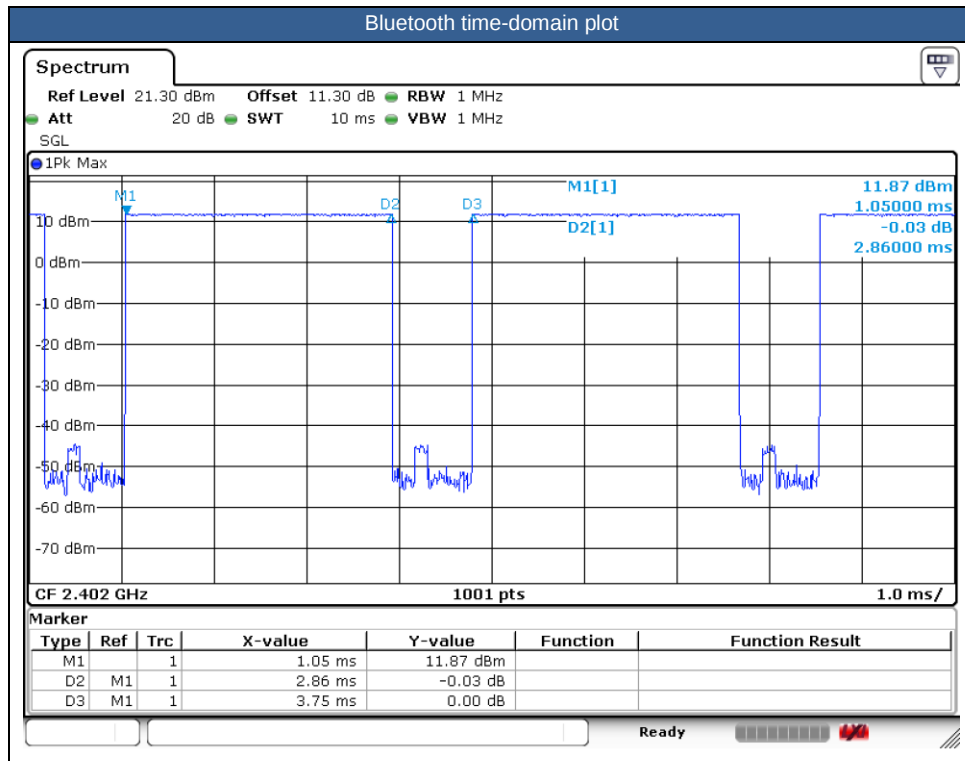



13. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN/Bluetooth signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement of power class 3, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The reported TDD LTE SAR (W/kg) = Measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. The device implements receiver detect mechanism trigger reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
6. For WLAN transmitter, while the device WLAN is transmitting simultaneously with the WWAN/BT antenna, the device power will be reduced power at head exposure conditions.
7. For 5G NR test, using FTM (Factory Test Mode) to perform SAR with default 100% transmission.
8. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15 cm or an overall diagonal dimension > 16 cm, when hotspot mode applies, 10-g product specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, in this report all the hotspot mode results are < 1.2 W/kg.
 - a. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - b. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
9. According to Nov. 2017 TCB workshop, when the reported 1gSAR for UL CA configuration is < 1.2 W/kg, UL CA 1gSAR is not required for all required test channels (PCC based).
10. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hotspot SAR.
11. For Phablet devices, when hotspot mode is not supported, Product specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
12. The following table "n/a" in the result means the SAR cube is too small to be detected.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+ , and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B4 / B5 / B17 / B38 SAR test was covered by B66 / B26 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

5G NR Note:

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - b. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - c. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - d. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not $\frac{1}{2}$ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - e. Smaller bandwidth output power for each RB allocation configuration for this device will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
 - f. For 5G FR1 n2/n5/n7/n26/n66/n38/n41 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

ECI status description:

The device has the following ECI state which used at different exposure condition.

Exposure Condition	ECI	Trigger conditions
Head SAR-Standalone	ECI 5	Receiver on
Head SAR- Simultaneous	ECI 10	Receiver on + WLAN/BT
Hotspot SAR	ECI 8	Hotspot On
Body worn SAR-Standalone&Simultaneous	ECI 3	Receiver off/ Receiver off + WLAN/BT



14.1 Head SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																				
	LTE Band 12	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	ECI 5	23095	707.5	23.88	24.80	1.236	-	-	0	0.071	0.088
	LTE Band 12	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	ECI 5	23095	707.5	23.88	24.80	1.236	-	-	-0.06	0.046	0.057
	LTE Band 12	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	ECI 5	23095	707.5	23.88	24.80	1.236	-	-	-0.18	0.061	0.075
	LTE Band 12	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	ECI 5	23095	707.5	23.88	24.80	1.236	-	-	0.17	0.032	0.040
	LTE Band 12	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	ECI 5	23095	707.5	22.37	23.80	1.390	-	-	0.03	0.051	0.071
	LTE Band 12	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	ECI 5	23095	707.5	22.37	23.80	1.390	-	-	-0.16	0.033	0.046
	LTE Band 12	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	ECI 5	23095	707.5	22.37	23.80	1.390	-	-	0.06	0.043	0.060
	LTE Band 12	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	ECI 5	23095	707.5	22.37	23.80	1.390	-	-	0.14	0.024	0.033
01	LTE Band 12	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	ECI 5	23095	707.5	23.92	24.50	1.143	-	-	-0.17	0.610	0.697
	LTE Band 12	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	ECI 5	23095	707.5	23.92	24.50	1.143	-	-	-0.17	0.288	0.329
	LTE Band 12	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	ECI 5	23095	707.5	23.92	24.50	1.143	-	-	0	0.257	0.294
	LTE Band 12	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	ECI 5	23095	707.5	23.92	24.50	1.143	-	-	-0.14	0.161	0.184
	LTE Band 12	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 1	ECI 5	23095	707.5	22.36	23.50	1.300	-	-	-0.08	0.433	0.563
	LTE Band 12	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 1	ECI 5	23095	707.5	22.36	23.50	1.300	-	-	-0.17	0.205	0.267
	LTE Band 12	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	ECI 5	23095	707.5	22.36	23.50	1.300	-	-	0.16	0.183	0.238
	LTE Band 12	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 1	ECI 5	23095	707.5	22.36	23.50	1.300	-	-	-0.17	0.113	0.147
	LTE Band 13	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	ECI 5	23230	782	23.98	24.80	1.208	-	-	-0.03	0.150	0.181
	LTE Band 13	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	ECI 5	23230	782	23.98	24.80	1.208	-	-	0.08	0.098	0.118
	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	ECI 5	23230	782	23.98	24.80	1.208	-	-	0.1	0.129	0.156
	LTE Band 13	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	ECI 5	23230	782	23.98	24.80	1.208	-	-	0.16	0.068	0.082
	LTE Band 13	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	ECI 5	23230	782	22.50	23.80	1.349	-	-	0.09	0.108	0.146
	LTE Band 13	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	ECI 5	23230	782	22.50	23.80	1.349	-	-	-0.14	0.070	0.094
	LTE Band 13	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	ECI 5	23230	782	22.50	23.80	1.349	-	-	0.16	0.092	0.124
	LTE Band 13	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	ECI 5	23230	782	22.50	23.80	1.349	-	-	-0.16	0.050	0.067
02	LTE Band 13	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	ECI 5	23230	782	24.00	24.50	1.122	-	-	0.14	0.603	0.677
	LTE Band 13	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	ECI 5	23230	782	24.00	24.50	1.122	-	-	-0.09	0.275	0.309
	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	ECI 5	23230	782	24.00	24.50	1.122	-	-	0.02	0.252	0.283
	LTE Band 13	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	ECI 5	23230	782	24.00	24.50	1.122	-	-	-0.02	0.159	0.178
	LTE Band 13	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 1	ECI 5	23230	782	22.51	23.50	1.256	-	-	0.1	0.431	0.541
	LTE Band 13	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 1	ECI 5	23230	782	22.51	23.50	1.256	-	-	-0.07	0.197	0.247
	LTE Band 13	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	ECI 5	23230	782	22.51	23.50	1.256	-	-	-0.14	0.181	0.227
	LTE Band 13	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 1	ECI 5	23230	782	22.51	23.50	1.256	-	-	0.19	0.111	0.139
835MHz																				
03	GSM850	-	-	-	-	GPRS 4 Tx slots	Right Cheek	0mm	Ant 0	ECI 5	189	836.4	27.08	28.00	1.236	-	-	-0.16	0.153	0.189
	GSM850	-	-	-	-	GPRS 4 Tx slots	Right Tilted	0mm	Ant 0	ECI 5	189	836.4	27.08	28.00	1.236	-	-	-0.11	0.092	0.114
	GSM850	-	-	-	-	GPRS 4 Tx slots	Left Cheek	0mm	Ant 0	ECI 5	189	836.4	27.08	28.00	1.236	-	-	-0.1	0.137	0.169
	GSM850	-	-	-	-	GPRS 4 Tx slots	Left Tilted	0mm	Ant 0	ECI 5	189	836.4	27.08	28.00	1.236	-	-	-0.03	0.075	0.093
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	ECI 5	4182	836.4	24.22	25.00	1.197	-	-	-0.07	0.241	0.288
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	ECI 5	4182	836.4	24.22	25.00	1.197	-	-	0.07	0.143	0.171
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	ECI 5	4182	836.4	24.22	25.00	1.197	-	-	0.03	0.220	0.263
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	ECI 5	4182	836.4	24.22	25.00	1.197	-	-	-0.05	0.104	0.124
04	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	ECI 5	4182	836.4	24.20	25.00	1.202	-	-	0.11	0.888	1.068
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 1	ECI 5	4182	836.4	24.20	25.00	1.202	-	-	-0.09	0.273	0.328
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	ECI 5	4182	836.4	24.20	25.00	1.202	-	-	-0.07	0.285	0.343
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 1	ECI 5	4182	836.4	24.20	25.00	1.202	-	-	-0.15	0.159	0.191
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	ECI 5	4132	826.4	24.20	25.00	1.202	-	-	0.01	0.810	0.974
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	ECI 5	4233	846.6	24.17	25.00	1.211	-	-	0.07	0.835	1.011
	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	ECI 5	26865	831.5	23.88	24.80	1.236	-	-	0.03	0.180	0.222
	LTE Band 26	15M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	ECI 5	26865	831.5	23.88	24.80	1.236	-	-	-0.17	0.106	0.131
	LTE Band 26	15M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	ECI 5	26865	831.5	23.88	24.80	1.236	-	-	0.03	0.152	0.188



FCC SAR Test Report

Report No. : FA551908

	LTE Band 26	15M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	ECI 5	26865	831.5	23.88	24.80	1.236	-	-	-0.01	0.078	0.096
	LTE Band 26	15M	QPSK	36	0	-	Right Cheek	0mm	Ant 0	ECI 5	26865	831.5	22.87	23.80	1.239	-	-	-0.18	0.146	0.181
	LTE Band 26	15M	QPSK	36	0	-	Right Tilted	0mm	Ant 0	ECI 5	26865	831.5	22.87	23.80	1.239	-	-	0.04	0.087	0.108
	LTE Band 26	15M	QPSK	36	0	-	Left Cheek	0mm	Ant 0	ECI 5	26865	831.5	22.87	23.80	1.239	-	-	0.14	0.126	0.156
	LTE Band 26	15M	QPSK	36	0	-	Left Tilted	0mm	Ant 0	ECI 5	26865	831.5	22.87	23.80	1.239	-	-	0.13	0.063	0.078
05	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	ECI 5	26865	831.5	23.95	24.60	1.161	-	-	0.08	0.681	0.791
	LTE Band 26	15M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	ECI 5	26865	831.5	23.95	24.60	1.161	-	-	0.01	0.296	0.344
	LTE Band 26	15M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	ECI 5	26865	831.5	23.95	24.60	1.161	-	-	0.19	0.296	0.344
	LTE Band 26	15M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	ECI 5	26865	831.5	23.95	24.60	1.161	-	-	0.11	0.173	0.201
	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	ECI 5	26865	831.5	20.92	21.60	1.169	-	-	0.02	0.351	0.410
	LTE Band 26	15M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	ECI 5	26865	831.5	20.92	21.60	1.169	-	-	0.01	0.150	0.175
	LTE Band 26	15M	QPSK	36	0	-	Right Cheek	0mm	Ant 1	ECI 5	26865	831.5	22.90	23.60	1.175	-	-	0.13	0.542	0.637
	LTE Band 26	15M	QPSK	36	0	-	Right Tilted	0mm	Ant 1	ECI 5	26865	831.5	22.90	23.60	1.175	-	-	-0.11	0.235	0.276
	LTE Band 26	15M	QPSK	36	0	-	Left Cheek	0mm	Ant 1	ECI 5	26865	831.5	22.90	23.60	1.175	-	-	-0.08	0.232	0.273
	LTE Band 26	15M	QPSK	36	0	-	Left Tilted	0mm	Ant 1	ECI 5	26865	831.5	22.90	23.60	1.175	-	-	0.05	0.137	0.161
	FR1 n26	20M	QPSK	1	53	DFT-15	Right Cheek	0mm	Ant 0	ECI 5	166300	831.5	23.45	24.70	1.334	-	-	0.07	0.169	0.225
	FR1 n26	20M	QPSK	1	53	DFT-15	Right Tilted	0mm	Ant 0	ECI 5	166300	831.5	23.45	24.70	1.334	-	-	0.19	0.096	0.128
	FR1 n26	20M	QPSK	1	53	DFT-15	Left Cheek	0mm	Ant 0	ECI 5	166300	831.5	23.45	24.70	1.334	-	-	0.11	0.146	0.195
	FR1 n26	20M	QPSK	1	53	DFT-15	Left Tilted	0mm	Ant 0	ECI 5	166300	831.5	23.45	24.70	1.334	-	-	0.05	0.076	0.101
	FR1 n26	20M	QPSK	50	28	DFT-15	Right Cheek	0mm	Ant 0	ECI 5	166300	831.5	23.40	24.70	1.349	-	-	0.18	0.172	0.232
	FR1 n26	20M	QPSK	50	28	DFT-15	Right Tilted	0mm	Ant 0	ECI 5	166300	831.5	23.40	24.70	1.349	-	-	0.02	0.097	0.131
	FR1 n26	20M	QPSK	50	28	DFT-15	Left Cheek	0mm	Ant 0	ECI 5	166300	831.5	23.40	24.70	1.349	-	-	0.05	0.147	0.198
	FR1 n26	20M	QPSK	50	28	DFT-15	Left Tilted	0mm	Ant 0	ECI 5	166300	831.5	23.40	24.70	1.349	-	-	-0.16	0.077	0.104
06	FR1 n26	20M	QPSK	1	53	DFT-15	Right Cheek	0mm	Ant 1	ECI 5	166300	831.5	23.40	24.50	1.288	-	-	0.12	0.632	0.814
	FR1 n26	20M	QPSK	1	53	DFT-15	Right Tilted	0mm	Ant 1	ECI 5	166300	831.5	23.40	24.50	1.288	-	-	0.05	0.261	0.336
	FR1 n26	20M	QPSK	1	53	DFT-15	Left Cheek	0mm	Ant 1	ECI 5	166300	831.5	23.40	24.50	1.288	-	-	0.06	0.273	0.352
	FR1 n26	20M	QPSK	1	53	DFT-15	Left Tilted	0mm	Ant 1	ECI 5	166300	831.5	23.40	24.50	1.288	-	-	-0.08	0.172	0.222
	FR1 n26	20M	QPSK	1	53	DFT-15	Right Cheek	0mm	Ant 1	ECI 5	166300	831.5	20.48	21.50	1.265	-	-	0.04	0.311	0.393
	FR1 n26	20M	QPSK	1	53	DFT-15	Left Cheek	0mm	Ant 1	ECI 5	166300	831.5	20.48	21.50	1.265	-	-	0.06	0.133	0.168
	FR1 n26	20M	QPSK	50	28	DFT-15	Right Cheek	0mm	Ant 1	ECI 5	166300	831.5	23.37	24.50	1.297	-	-	-0.18	0.497	0.645
	FR1 n26	20M	QPSK	50	28	DFT-15	Right Tilted	0mm	Ant 1	ECI 5	166300	831.5	23.37	24.50	1.297	-	-	-0.02	0.202	0.262
	FR1 n26	20M	QPSK	50	28	DFT-15	Left Cheek	0mm	Ant 1	ECI 5	166300	831.5	23.37	24.50	1.297	-	-	0.03	0.225	0.292
	FR1 n26	20M	QPSK	50	28	DFT-15	Left Tilted	0mm	Ant 1	ECI 5	166300	831.5	23.37	24.50	1.297	-	-	0.12	0.135	0.175
	FR1 n26	20M	QPSK	100	0	DFT-15	Right Cheek	0mm	Ant 1	ECI 5	166300	831.5	22.40	23.50	1.288	-	-	0.03	0.479	0.617
1750MHz																				
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 4	ECI 5	1413	1732.6	24.42	25.00	1.143	-	-	-0.17	0.132	0.151
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	ECI 5	1413	1732.6	24.42	25.00	1.143	-	-	0.16	0.069	0.079
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 4	ECI 5	1413	1732.6	24.42	25.00	1.143	-	-	0.02	0.128	0.146
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 4	ECI 5	1413	1732.6	24.42	25.00	1.143	-	-	0.1	0.070	0.080
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 3	ECI 5	1413	1732.6	18.65	19.00	1.084	-	-	-0.15	0.822	0.891
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 3	ECI 5	1413	1732.6	18.65	19.00	1.084	-	-	0.18	0.744	0.806
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 3	ECI 5	1413	1732.6	18.65	19.00	1.084	-	-	-0.07	0.366	0.397
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 3	ECI 5	1413	1732.6	18.65	19.00	1.084	-	-	-0.09	0.458	0.496
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 3	ECI 5	1312	1712.4	18.62	19.00	1.091	-	-	0.04	0.719	0.785
07	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 3	ECI 5	1513	1752.6	18.59	19.00	1.099	-	-	-0.05	0.901	0.990
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 3	ECI 5	1312	1712.4	18.62	19.00	1.091	-	-	-0.05	0.651	0.711
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 3	ECI 5	1513	1752.6	18.59	19.00	1.099	-	-	0	0.816	0.897
	LTE Band 4	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	20175	1732.5	18.90	19.40	1.122	-	-	0.12	0.858	0.963
	LTE Band 4	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	ECI 5	20175	1732.5	18.90	19.40	1.122	-	-	0.05	0.741	0.831
	LTE Band 4	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 3	ECI 5	20175	1732.5	18.90	19.40	1.122	-	-	0.10	0.369	0.414
	LTE Band 4	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 3	ECI 5	20175	1732.5	18.90	19.40	1.122	-	-	-0.09	0.350	0.393
08	LTE Band 4	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	20175	1732.5	18.88	19.40	1.127	-	-	-0.14	0.899	1.013
	LTE Band 4	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	ECI 5	20175	1732.5	18.88	19.40	1.127	-	-	0.02	0.762	0.859
	LTE Band 4	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	ECI 5	20175	1732.5	18.88	19.40	1.127	-	-	-0.05	0.375	0.423
	LTE Band 4	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 3	ECI 5	20175	1732.5	18.88	19.40	1.127	-	-	0.01	0.366	0.413
	LTE Band 4	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	20175	1732.5	15.87	16.40	1.130	-	-	0.07	0.459	0.519



FCC SAR Test Report

Report No. : FA551908

	LTE Band 4	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	ECI 5	20175	1732.5	15.87	16.40	1.130	-	-	0.17	0.194	0.219
	LTE Band 4	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 3	ECI 5	20175	1732.5	18.86	19.40	1.132	-	-	0.02	0.881	0.998
	LTE Band 4	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 3	ECI 5	20175	1732.5	18.86	19.40	1.132	-	-	-0.05	0.761	0.862
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	ECI 5	132322	1745	24.08	24.60	1.127	-	-	0.03	0.111	0.125
	LTE Band 66C	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	ECI 5	132322+ 132520	1745+ 1764.8	24.00	24.60	1.148	-	-	0.07	0.095	0.109
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	ECI 5	132322	1745	24.08	24.60	1.127	-	-	0.02	0.060	0.068
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	ECI 5	132322	1745	24.08	24.60	1.127	-	-	0.07	0.101	0.114
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	ECI 5	132322	1745	24.08	24.60	1.127	-	-	0.15	0.064	0.072
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	ECI 5	132322	1745	23.06	23.60	1.132	-	-	-0.11	0.090	0.102
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	ECI 5	132322	1745	23.06	23.60	1.132	-	-	0.02	0.049	0.055
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	ECI 5	132322	1745	23.06	23.60	1.132	-	-	0.18	0.078	0.088
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	ECI 5	132322	1745	23.06	23.60	1.132	-	-	-0.1	0.051	0.058
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	132322	1745	18.28	18.70	1.102	-	-	0.14	0.548	0.604
	LTE Band 66C	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	132322+ 132520	1745+ 1764.8	18.18	18.70	1.127	-	-	0.09	0.542	0.611
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	ECI 5	132322	1745	18.28	18.70	1.102	-	-	-0.14	0.509	0.561
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 3	ECI 5	132322	1745	18.28	18.70	1.102	-	-	0.1	0.310	0.341
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 3	ECI 5	132322	1745	18.28	18.70	1.102	-	-	0.18	0.349	0.384
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	132322	1745	18.23	18.70	1.114	-	-	0.07	0.550	0.613
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	ECI 5	132322	1745	18.23	18.70	1.114	-	-	-0.12	0.507	0.565
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	ECI 5	132322	1745	18.23	18.70	1.114	-	-	-0.01	0.311	0.347
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 3	ECI 5	132322	1745	18.23	18.70	1.114	-	-	0.01	0.348	0.388
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	132322	1745	15.28	15.70	1.102	-	-	0.02	0.176	0.194
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	ECI 5	132322	1745	15.28	15.70	1.102	-	-	0.09	0.156	0.172
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	ECI 5	132322	1745	22.98	23.20	1.052	-	-	0.02	1.000	1.052
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	ECI 5	132322	1745	22.98	23.20	1.052	-	-	-0.03	0.168	0.177
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	ECI 5	132322	1745	22.98	23.20	1.052	-	-	-0.13	0.342	0.360
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	ECI 5	132322	1745	22.98	23.20	1.052	-	-	-0.03	0.067	0.070
09	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	ECI 5	132072	1720	22.95	23.20	1.059	-	-	0.06	1.110	1.176
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	ECI 5	132572	1770	22.92	23.20	1.067	-	-	-0.06	0.799	0.852
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	ECI 10	132072	1720	22.00	22.20	1.047	-	-	0.04	0.852	0.892
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	ECI 5	132322	1745	21.96	22.20	1.057	-	-	-0.08	0.792	0.837
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	ECI 5	132322	1745	21.96	22.20	1.057	-	-	-0.19	0.135	0.143
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	ECI 5	132322	1745	21.96	22.20	1.057	-	-	0.12	0.273	0.289
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	ECI 5	132322	1745	21.96	22.20	1.057	-	-	-0.02	0.052	0.055
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	ECI 5	132072	1720	21.94	22.20	1.062	-	-	0.05	0.783	0.831
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	ECI 5	132572	1770	21.91	22.20	1.069	-	-	0.04	0.743	0.794
	LTE Band 66	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 1	ECI 5	132322	1745	21.96	22.20	1.057	-	-	-0.16	0.782	0.826
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Cheek	0mm	Ant 4	ECI 5	349000	1745	23.12	24.40	1.343	-	-	0.16	0.096	0.129
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Tilted	0mm	Ant 4	ECI 5	349000	1745	23.12	24.40	1.343	-	-	-0.12	0.054	0.073
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Cheek	0mm	Ant 4	ECI 5	349000	1745	23.12	24.40	1.343	-	-	0.11	0.085	0.114
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Tilted	0mm	Ant 4	ECI 5	349000	1745	23.12	24.40	1.343	-	-	-0.01	0.052	0.070
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 4	ECI 5	349000	1745	23.07	24.40	1.358	-	-	0.18	0.097	0.132
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 4	ECI 5	349000	1745	23.07	24.40	1.358	-	-	-0.17	0.053	0.072
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 4	ECI 5	349000	1745	23.07	24.40	1.358	-	-	0.02	0.087	0.118
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 4	ECI 5	349000	1745	23.07	24.40	1.358	-	-	0.16	0.052	0.071
10	FR1 n66	40M	QPSK	1	108	DFT-15	Right Cheek	0mm	Ant 3	ECI 5	349000	1745	17.98	18.90	1.236	-	-	0.18	0.696	0.860
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Tilted	0mm	Ant 3	ECI 5	349000	1745	17.98	18.90	1.236	-	-	0	0.646	0.798
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Cheek	0mm	Ant 3	ECI 5	349000	1745	17.98	18.90	1.236	-	-	-0.17	0.315	0.389
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Tilted	0mm	Ant 3	ECI 5	349000	1745	17.98	18.90	1.236	-	-	-0.1	0.342	0.423
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 3	ECI 5	349000	1745	17.95	18.90	1.245	-	-	-0.15	0.674	0.839
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 3	ECI 5	349000	1745	17.95	18.90	1.245	-	-	0.04	0.627	0.780
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 3	ECI 5	349000	1745	17.95	18.90	1.245	-	-	-0.06	0.322	0.401
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 3	ECI 5	349000	1745	17.95	18.90	1.245	-	-	0.05	0.350	0.436
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 3	ECI 5	349000	1745	15.01	15.90	1.227	-	-	0.01	0.161	0.198
	FR1 n66	40M	QPSK	216	0	DFT-15	Right Cheek	0mm	Ant 3	ECI 5	349000	1745	17.93	18.90	1.250	-	-	-0.01	0.654	0.818



FCC SAR Test Report

Report No. : FA551908

	FR1 n66	40M	QPSK	1	108	DFT-15	Right Cheek	0mm	Ant 1	ECI 5	349000	1745	20.25	21.20	1.245	-	-	0.06	0.489	0.609
	FR1 n66	40M	QPSK	1	108	DFT-15	Right Tilted	0mm	Ant 1	ECI 5	349000	1745	20.25	21.20	1.245	-	-	0.03	0.084	0.105
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Cheek	0mm	Ant 1	ECI 5	349000	1745	20.25	21.20	1.245	-	-	0.02	0.172	0.214
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Tilted	0mm	Ant 1	ECI 5	349000	1745	20.25	21.20	1.245	-	-	-0.1	0.081	0.101
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 1	ECI 5	349000	1745	20.24	21.20	1.247	-	-	-0.16	0.493	0.615
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Tilted	0mm	Ant 1	ECI 5	349000	1745	20.24	21.20	1.247	-	-	-0.11	0.084	0.105
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 1	ECI 5	349000	1745	20.24	21.20	1.247	-	-	0.01	0.173	0.216
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Tilted	0mm	Ant 1	ECI 5	349000	1745	20.24	21.20	1.247	-	-	0.13	0.082	0.102
	FR1 n66	40M	QPSK	108	54	DFT-15	Right Cheek	0mm	Ant 1	ECI 5	349000	1745	17.28	18.20	1.236	-	-	0.06	0.241	0.298
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Cheek	0mm	Ant 1	ECI 5	349000	1745	17.28	18.20	1.236	-	-	0.03	0.086	0.106
1900MHz																				
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Right Cheek	0mm	Ant 4	ECI 5	661	1880	25.70	26.50	1.202	-	-	0.19	0.056	0.067
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Right Tilted	0mm	Ant 4	ECI 5	661	1880	25.70	26.50	1.202	-	-	0.03	0.028	0.034
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Left Cheek	0mm	Ant 4	ECI 5	661	1880	25.70	26.50	1.202	-	-	0.05	0.048	0.058
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Left Tilted	0mm	Ant 4	ECI 5	661	1880	25.70	26.50	1.202	-	-	0.12	0.024	0.029
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Right Cheek	0mm	Ant 3	ECI 5	661	1880	23.02	24.40	1.374	-	-	-0.04	0.809	1.112
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Right Tilted	0mm	Ant 3	ECI 5	661	1880	23.02	24.40	1.374	-	-	0.07	0.785	1.079
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Left Cheek	0mm	Ant 3	ECI 5	661	1880	23.02	24.40	1.374	-	-	-0.08	0.318	0.437
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Left Tilted	0mm	Ant 3	ECI 5	661	1880	23.02	24.40	1.374	-	-	0.14	0.388	0.533
11	GSM1900	-	-	-	-	GPRS 3 Tx slots	Right Cheek	0mm	Ant 3	ECI 5	512	1850.2	22.98	24.40	1.387	-	-	-0.14	0.861	1.194
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Right Cheek	0mm	Ant 3	ECI 5	810	1909.8	23.00	24.40	1.380	-	-	-0.03	0.843	1.164
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Right Tilted	0mm	Ant 3	ECI 5	512	1850.2	22.98	24.40	1.387	-	-	0.02	0.799	1.108
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Right Tilted	0mm	Ant 3	ECI 5	810	1909.8	23.00	24.40	1.380	-	-	0.06	0.768	1.060
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Right Cheek	0mm	Ant 3	ECI 10	512	1850.2	21.26	22.90	1.459	-	-	0.01	0.581	0.848
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 4	ECI 5	9400	1880	24.80	25.00	1.047	-	-	0.16	0.124	0.130
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 4	ECI 5	9400	1880	24.80	25.00	1.047	-	-	-0.17	0.079	0.083
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 4	ECI 5	9400	1880	24.80	25.00	1.047	-	-	0	0.121	0.127
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 4	ECI 5	9400	1880	24.80	25.00	1.047	-	-	-0.08	0.082	0.086
12	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 3	ECI 5	9400	1880	18.29	18.40	1.026	-	-	-0.03	1.090	1.118
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 3	ECI 5	9400	1880	18.29	18.40	1.026	-	-	0.03	1.030	1.056
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 3	ECI 5	9400	1880	18.29	18.40	1.026	-	-	-0.18	0.432	0.443
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 3	ECI 5	9400	1880	18.29	18.40	1.026	-	-	0.04	0.515	0.528
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 3	ECI 5	9262	1852.4	18.27	18.40	1.030	-	-	-0.11	1.000	1.030
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 3	ECI 5	9538	1907.6	18.25	18.40	1.035	-	-	-0.15	1.060	1.097
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 3	ECI 5	9262	1852.4	18.27	18.40	1.030	-	-	-0.15	0.925	0.953
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 3	ECI 5	9538	1907.6	18.25	18.40	1.035	-	-	-0.08	1.020	1.056
	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	ECI 5	18900	1880	24.00	24.30	1.072	-	-	-0.03	0.103	0.110
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	ECI 5	18900	1880	24.00	24.30	1.072	-	-	-0.07	0.067	0.072
	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	ECI 5	18900	1880	24.00	24.30	1.072	-	-	0.08	0.095	0.102
	LTE Band 2	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	ECI 5	18900	1880	24.00	24.30	1.072	-	-	0.08	0.074	0.079
	LTE Band 2	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	ECI 5	18900	1880	23.43	23.80	1.089	-	-	0.12	0.091	0.099
	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	ECI 5	18900	1880	23.43	23.80	1.089	-	-	0.12	0.058	0.063
	LTE Band 2	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	ECI 5	18900	1880	23.43	23.80	1.089	-	-	-0.05	0.085	0.093
	LTE Band 2	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	ECI 5	18900	1880	23.43	23.80	1.089	-	-	-0.19	0.068	0.074
13	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	18900	1880	18.00	18.20	1.047	-	-	0.09	0.959	1.004
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	ECI 5	18900	1880	18.00	18.20	1.047	-	-	0.02	0.910	0.953
	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 3	ECI 5	18900	1880	18.00	18.20	1.047	-	-	-0.09	0.420	0.440
	LTE Band 2	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 3	ECI 5	18900	1880	18.00	18.20	1.047	-	-	-0.18	0.492	0.515
	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	18700	1860	17.96	18.20	1.057	-	-	0.02	0.887	0.937
	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	19100	1900	17.92	18.20	1.067	-	-	0.09	0.907	0.967
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	ECI 5	18700	1860	17.96	18.20	1.057	-	-	-0.14	0.842	0.890
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	ECI 5	19100	1900	17.92	18.20	1.067	-	-	0.13	0.861	0.918
	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	18900	1880	15.08	15.20	1.028	-	-	0.01	0.496	0.510
	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 3	ECI 5	18900	1880	15.08	15.20	1.028	-	-	0.07	0.217	0.223
	LTE Band 2	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	18900	1880	17.98	18.20	1.052	-	-	-0.05	0.944	0.993
	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	ECI 5	18900	1880	17.98	18.20	1.052	-	-	-0.15	0.896	0.943



FCC SAR Test Report

Report No. : FA551908

	LTE Band 2	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	ECI 5	18900	1880	17.98	18.20	1.052	-	-	0.06	0.413	0.434
	LTE Band 2	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 3	ECI 5	18900	1880	17.98	18.20	1.052	-	-	-0.07	0.488	0.513
	LTE Band 2	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	18700	1860	17.93	18.20	1.064	-	-	-0.1	0.873	0.929
	LTE Band 2	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	19100	1900	17.90	18.20	1.072	-	-	0.06	0.893	0.957
	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	ECI 5	18700	1860	17.93	18.20	1.064	-	-	0	0.829	0.882
	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	ECI 5	19100	1900	17.90	18.20	1.072	-	-	-0.06	0.848	0.909
	LTE Band 2	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 3	ECI 5	18900	1880	17.95	18.20	1.059	-	-	-0.08	0.922	0.977
	LTE Band 2	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 3	ECI 5	18900	1880	17.95	18.20	1.059	-	-	0.1	0.900	0.953
	FR1 n2	20M	QPSK	1	53	DFT-15	Right Cheek	0mm	Ant 4	ECI 5	376000	1880	23.17	24.20	1.268	-	-	-0.08	0.093	0.118
	FR1 n2	20M	QPSK	1	53	DFT-15	Right Tilted	0mm	Ant 4	ECI 5	376000	1880	23.17	24.20	1.268	-	-	-0.17	0.063	0.080
	FR1 n2	20M	QPSK	1	53	DFT-15	Left Cheek	0mm	Ant 4	ECI 5	376000	1880	23.17	24.20	1.268	-	-	-0.02	0.082	0.104
	FR1 n2	20M	QPSK	1	53	DFT-15	Left Tilted	0mm	Ant 4	ECI 5	376000	1880	23.17	24.20	1.268	-	-	0.15	0.058	0.074
	FR1 n2	20M	QPSK	50	28	DFT-15	Right Cheek	0mm	Ant 4	ECI 5	376000	1880	23.15	24.20	1.274	-	-	0.09	0.093	0.118
	FR1 n2	20M	QPSK	50	28	DFT-15	Right Tilted	0mm	Ant 4	ECI 5	376000	1880	23.15	24.20	1.274	-	-	-0.05	0.061	0.078
	FR1 n2	20M	QPSK	50	28	DFT-15	Left Cheek	0mm	Ant 4	ECI 5	376000	1880	23.15	24.20	1.274	-	-	-0.03	0.080	0.102
	FR1 n2	20M	QPSK	50	28	DFT-15	Left Tilted	0mm	Ant 4	ECI 5	376000	1880	23.15	24.20	1.274	-	-	0.06	0.059	0.075
	FR1 n2	20M	QPSK	1	53	DFT-15	Right Cheek	0mm	Ant 3	ECI 5	376000	1880	17.30	18.20	1.230	-	-	-0.17	0.862	1.060
	FR1 n2	20M	QPSK	1	53	DFT-15	Right Tilted	0mm	Ant 3	ECI 5	376000	1880	17.30	18.20	1.230	-	-	0.06	0.853	1.049
	FR1 n2	20M	QPSK	1	53	DFT-15	Left Cheek	0mm	Ant 3	ECI 5	376000	1880	17.30	18.20	1.230	-	-	0.08	0.358	0.440
	FR1 n2	20M	QPSK	1	53	DFT-15	Left Tilted	0mm	Ant 3	ECI 5	376000	1880	17.30	18.20	1.230	-	-	0.03	0.412	0.507
	FR1 n2	20M	QPSK	1	53	DFT-15	Right Cheek	0mm	Ant 3	ECI 5	372000	1860	17.22	18.20	1.253	-	-	-0.12	0.822	1.030
	FR1 n2	20M	QPSK	1	53	DFT-15	Right Cheek	0mm	Ant 3	ECI 5	380000	1900	17.27	18.20	1.239	-	-	-0.07	0.845	1.047
	FR1 n2	20M	QPSK	1	53	DFT-15	Right Tilted	0mm	Ant 3	ECI 5	372000	1860	17.22	18.20	1.253	-	-	0.04	0.765	0.959
	FR1 n2	20M	QPSK	1	53	DFT-15	Right Tilted	0mm	Ant 3	ECI 5	380000	1900	17.27	18.20	1.239	-	-	-0.05	0.822	1.018
14	FR1 n2	20M	QPSK	50	28	DFT-15	Right Cheek	0mm	Ant 3	ECI 5	376000	1880	17.28	18.20	1.236	-	-	0.18	0.889	1.099
	FR1 n2	20M	QPSK	50	28	DFT-15	Right Tilted	0mm	Ant 3	ECI 5	376000	1880	17.28	18.20	1.236	-	-	-0.09	0.827	1.022
	FR1 n2	20M	QPSK	50	28	DFT-15	Left Cheek	0mm	Ant 3	ECI 5	376000	1880	17.28	18.20	1.236	-	-	0.04	0.350	0.433
	FR1 n2	20M	QPSK	50	28	DFT-15	Left Tilted	0mm	Ant 3	ECI 5	376000	1880	17.28	18.20	1.236	-	-	0.18	0.400	0.494
	FR1 n2	20M	QPSK	50	28	DFT-15	Right Cheek	0mm	Ant 3	ECI 5	372000	1860	17.20	18.20	1.259	-	-	-0.02	0.818	1.030
	FR1 n2	20M	QPSK	50	28	DFT-15	Right Cheek	0mm	Ant 3	ECI 5	380000	1900	17.26	18.20	1.242	-	-	0.1	0.831	1.032
	FR1 n2	20M	QPSK	50	28	DFT-15	Right Tilted	0mm	Ant 3	ECI 5	372000	1860	17.20	18.20	1.259	-	-	-0.13	0.769	0.968
	FR1 n2	20M	QPSK	50	28	DFT-15	Right Tilted	0mm	Ant 3	ECI 5	380000	1900	17.26	18.20	1.242	-	-	0.11	0.827	1.027
	FR1 n2	20M	QPSK	100	0	DFT-15	Right Cheek	0mm	Ant 3	ECI 5	376000	1880	17.25	18.20	1.245	-	-	0.06	0.849	1.057
	FR1 n2	20M	QPSK	100	0	DFT-15	Right Tilted	0mm	Ant 3	ECI 5	376000	1880	17.25	18.20	1.245	-	-	0	0.818	1.018
2600MHz																				
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	ECI 5	21100	2535	23.60	24.00	1.096	-	-	-0.06	0.100	0.110
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	ECI 5	21100	2535	23.60	24.00	1.096	-	-	0.03	0.085	0.093
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	ECI 5	21100	2535	23.60	24.00	1.096	-	-	0.09	0.136	0.149
	LTE Band 7C	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	ECI 5	21100+21298	2535+2554.8	23.58	24.00	1.102	-	-	0.06	0.092	0.101
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	ECI 5	21100	2535	23.60	24.00	1.096	-	-	-0.02	0.042	0.046
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	ECI 5	21100	2535	22.42	23.00	1.143	-	-	-0.03	0.076	0.087
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	ECI 5	21100	2535	22.42	23.00	1.143	-	-	-0.04	0.064	0.073
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	ECI 5	21100	2535	22.42	23.00	1.143	-	-	-0.14	0.103	0.118
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	ECI 5	21100	2535	22.42	23.00	1.143	-	-	0.11	0.032	0.037
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	21100	2535	21.05	21.50	1.109	-	-	0.07	0.784	0.870
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	ECI 5	21100	2535	21.05	21.50	1.109	-	-	-0.16	0.675	0.749
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 3	ECI 5	21100	2535	21.05	21.50	1.109	-	-	0.03	0.388	0.430
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 3	ECI 5	21100	2535	21.05	21.50	1.109	-	-	-0.06	0.455	0.505
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	20850	2510	21.03	21.50	1.114	-	-	-0.04	0.737	0.821
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	21350	2560	21.02	21.50	1.117	-	-	-0.14	0.858	0.958
	LTE Band 7C	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	21100+21298	2535+2554.8	21.01	21.50	1.119	-	-	0.02	0.836	0.936
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	21100	2535	21.03	21.50	1.114	-	-	0.1	0.816	0.909
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	ECI 5	21100	2535	21.03	21.50	1.114	-	-	0.14	0.697	0.777
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	ECI 5	21100	2535	21.03	21.50	1.114	-	-	0.15	0.390	0.435
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 3	ECI 5	21100	2535	21.03	21.50	1.114	-	-	-0.13	0.436	0.486
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	20850	2510	21.00	21.50	1.122	-	-	0.19	0.710	0.797



FCC SAR Test Report

Report No. : FA551908

15	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	21350	2560	21.01	21.50	1.119	-	-	0.09	0.881	0.986
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	21350	2560	18.02	18.50	1.117	-	-	0.12	0.434	0.485
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	ECI 5	21100	2535	18.06	18.50	1.107	-	-	0.05	0.195	0.216
	LTE Band 7	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 3	ECI 5	21100	2535	21.00	21.50	1.122	-	-	-0.09	0.808	0.907
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	ECI 5	21100	2535	22.33	23.00	1.167	-	-	-0.11	0.066	0.077
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	ECI 5	21100	2535	22.33	23.00	1.167	-	-	-0.02	0.033	0.039
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	ECI 5	21100	2535	22.33	23.00	1.167	-	-	0.12	0.041	0.048
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	ECI 5	21100	2535	22.33	23.00	1.167	-	-	0.03	0.020	0.023
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	ECI 5	21100	2535	21.15	22.00	1.216	-	-	0.11	0.050	0.061
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	ECI 5	21100	2535	21.15	22.00	1.216	-	-	0.07	0.025	0.030
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	ECI 5	21100	2535	21.15	22.00	1.216	-	-	0.19	0.031	0.038
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	ECI 5	21100	2535	21.15	22.00	1.216	-	-	-0.17	0.015	0.018
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	ECI 5	39750	2506	24.50	24.80	1.072	62.9	1.006	0.18	0.070	0.075
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	ECI 5	39750	2506	24.50	24.80	1.072	62.9	1.006	0.19	0.059	0.064
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	ECI 5	39750	2506	24.50	24.80	1.072	62.9	1.006	0.19	0.095	0.102
	LTE Band 41C	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	ECI 5	39750 39948	2506 2525.8	24.40	24.80	1.096	62.9	1.006	0.02	0.066	0.073
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	ECI 5	39750	2506	24.50	24.80	1.072	62.9	1.006	0.16	0.029	0.031
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	ECI 5	39750	2506	22.10	23.80	1.479	62.9	1.006	-0.17	0.053	0.079
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	ECI 5	39750	2506	22.10	23.80	1.479	62.9	1.006	-0.05	0.045	0.067
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	ECI 5	39750	2506	22.10	23.80	1.479	62.9	1.006	-0.1	0.072	0.107
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	ECI 5	39750	2506	22.10	23.80	1.479	62.9	1.006	-0.12	0.022	0.033
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	39750	2506	22.28	22.30	1.005	62.9	1.006	0.05	0.637	0.644
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 3	ECI 5	39750	2506	22.28	22.30	1.005	62.9	1.006	0.03	0.556	0.562
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 3	ECI 5	39750	2506	22.28	22.30	1.005	62.9	1.006	0.01	0.324	0.327
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 3	ECI 5	39750	2506	22.28	22.30	1.005	62.9	1.006	0.03	0.350	0.354
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	40620	2593	22.25	22.30	1.012	62.9	1.006	0.01	0.910	0.926
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	40185	2549.5	22.15	22.30	1.035	62.9	1.006	-0.04	0.773	0.805
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	41055	2636.5	22.22	22.30	1.019	62.9	1.006	0.19	0.905	0.927
16	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	41490	2680	22.18	22.30	1.028	62.9	1.006	0.16	0.929	0.961
	LTE Band 41C	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	39750 39948	2506 2525.8	22.20	22.30	1.023	62.9	1.006	0.05	0.579	0.596
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	39750	2506	21.43	22.30	1.222	62.9	1.006	0.18	0.515	0.633
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	ECI 5	39750	2506	21.43	22.30	1.222	62.9	1.006	-0.11	0.467	0.574
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	ECI 5	39750	2506	21.43	22.30	1.222	62.9	1.006	-0.1	0.256	0.315
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 3	ECI 5	39750	2506	21.43	22.30	1.222	62.9	1.006	0.14	0.283	0.348
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	40620	2593	21.42	22.30	1.225	62.9	1.006	0.01	0.741	0.913
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	40185	2549.5	21.40	22.30	1.230	62.9	1.006	-0.04	0.627	0.776
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	41055	2636.5	21.39	22.30	1.233	62.9	1.006	0.19	0.736	0.913
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 5	41490	2680	21.30	22.30	1.259	62.9	1.006	0.16	0.738	0.935
	LTE Band 41	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 3	ECI 5	39750	2506	21.38	22.30	1.236	62.9	1.006	-0.14	0.515	0.640
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	ECI 5	39750	2506	23.38	23.50	1.028	62.9	1.006	-0.18	0.046	0.048
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	ECI 5	39750	2506	23.38	23.50	1.028	62.9	1.006	0.03	0.023	0.024
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	ECI 5	39750	2506	23.38	23.50	1.028	62.9	1.006	-0.12	0.029	0.030
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	ECI 5	39750	2506	23.38	23.50	1.028	62.9	1.006	-0.19	0.014	0.014
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	ECI 5	39750	2506	20.69	22.50	1.517	62.9	1.006	0	0.035	0.053
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	ECI 5	39750	2506	20.69	22.50	1.517	62.9	1.006	-0.02	0.017	0.026
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	ECI 5	39750	2506	20.69	22.50	1.517	62.9	1.006	0.1	0.022	0.034
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	ECI 5	39750	2506	20.69	22.50	1.517	62.9	1.006	0.16	0.010	0.015
	FR1 n7	50M	QPSK	1	135	DFT-15	Right Cheek	0mm	Ant 4	ECI 5	507000	2535	23.22	24.20	1.253	-	-	-0.02	0.093	0.117
	FR1 n7	50M	QPSK	1	135	DFT-15	Right Tilted	0mm	Ant 4	ECI 5	507000	2535	23.22	24.20	1.253	-	-	-0.03	0.071	0.089
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Cheek	0mm	Ant 4	ECI 5	507000	2535	23.22	24.20	1.253	-	-	0.04	0.131	0.164
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Tilted	0mm	Ant 4	ECI 5	507000	2535	23.22	24.20	1.253	-	-	-0.12	0.040	0.050
	FR1 n7	50M	QPSK	135	68	DFT-15	Right Cheek	0mm	Ant 4	ECI 5	507000	2535	23.10	24.20	1.288	-	-	-0.16	0.091	0.117
	FR1 n7	50M	QPSK	135	68	DFT-15	Right Tilted	0mm	Ant 4	ECI 5	507000	2535	23.10	24.20	1.288	-	-	0.12	0.070	0.090
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Cheek	0mm	Ant 4	ECI 5	507000	2535	23.10	24.20	1.288	-	-	-0.11	0.132	0.170
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Tilted	0mm	Ant 4	ECI 5	507000	2535	23.10	24.20	1.288	-	-	-0.07	0.041	0.053



FCC SAR Test Report

Report No. : FA551908

	FR1 n7	50M	QPSK	1	135	DFT-15	Right Cheek	0mm	Ant 3	ECI 5	507000	2535	21.20	22.00	1.202	-	-	-0.15	0.739	0.888
	FR1 n7	50M	QPSK	1	135	DFT-15	Right Tilted	0mm	Ant 3	ECI 5	507000	2535	21.20	22.00	1.202	-	-	0.07	0.646	0.777
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Cheek	0mm	Ant 3	ECI 5	507000	2535	21.20	22.00	1.202	-	-	-0.15	0.350	0.421
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Tilted	0mm	Ant 3	ECI 5	507000	2535	21.20	22.00	1.202	-	-	-0.19	0.394	0.474
17	FR1 n7	50M	QPSK	135	68	DFT-15	Right Cheek	0mm	Ant 3	ECI 5	507000	2535	21.11	22.00	1.227	-	-	-0.05	0.739	0.907
	FR1 n7	50M	QPSK	135	68	DFT-15	Right Tilted	0mm	Ant 3	ECI 5	507000	2535	21.11	22.00	1.227	-	-	0.07	0.671	0.824
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Cheek	0mm	Ant 3	ECI 5	507000	2535	21.11	22.00	1.227	-	-	-0.16	0.352	0.432
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Tilted	0mm	Ant 3	ECI 5	507000	2535	21.11	22.00	1.227	-	-	0.19	0.392	0.481
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Cheek	0mm	Ant 3	ECI 5	507000	2535	18.23	19.00	1.194	-	-	0.06	0.174	0.208
	FR1 n7	50M	QPSK	270	0	DFT-15	Right Cheek	0mm	Ant 3	ECI 5	507000	2535	19.99	21.00	1.262	-	-	-0.14	0.559	0.705
	FR1 n7	50M	QPSK	270	0	DFT-15	Right Tilted	0mm	Ant 3	ECI 5	507000	2535	19.99	21.00	1.262	-	-	0.15	0.487	0.615
	FR1 n7	50M	QPSK	1	135	DFT-15	Right Cheek	0mm	Ant 1	ECI 5	507000	2535	22.25	23.00	1.189	-	-	-0.19	0.068	0.081
	FR1 n7	50M	QPSK	1	135	DFT-15	Right Tilted	0mm	Ant 1	ECI 5	507000	2535	22.25	23.00	1.189	-	-	-0.16	0.034	0.040
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Cheek	0mm	Ant 1	ECI 5	507000	2535	22.25	23.00	1.189	-	-	-0.17	0.042	0.050
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Tilted	0mm	Ant 1	ECI 5	507000	2535	22.25	23.00	1.189	-	-	0.19	0.021	0.025
	FR1 n7	50M	QPSK	135	68	DFT-15	Right Cheek	0mm	Ant 1	ECI 5	507000	2535	22.17	23.00	1.211	-	-	0.12	0.070	0.085
	FR1 n7	50M	QPSK	135	68	DFT-15	Right Tilted	0mm	Ant 1	ECI 5	507000	2535	22.17	23.00	1.211	-	-	0.07	0.035	0.042
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Cheek	0mm	Ant 1	ECI 5	507000	2535	22.17	23.00	1.211	-	-	0.01	0.041	0.050
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Tilted	0mm	Ant 1	ECI 5	507000	2535	22.17	23.00	1.211	-	-	0.04	0.020	0.024
	FR1 n41	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 4	ECI 5	518598	2592.99	23.71	24.70	1.256	-	-	-0.08	0.090	0.113
	FR1 n41	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 4	ECI 5	518598	2592.99	23.71	24.70	1.256	-	-	0.03	0.076	0.095
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 4	ECI 5	518598	2592.99	23.71	24.70	1.256	-	-	0.11	0.150	0.188
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 4	ECI 5	518598	2592.99	23.71	24.70	1.256	-	-	0.09	0.041	0.051
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 4	ECI 5	518598	2592.99	23.65	24.70	1.274	-	-	-0.12	0.091	0.116
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 4	ECI 5	518598	2592.99	23.65	24.70	1.274	-	-	-0.14	0.079	0.101
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 4	ECI 5	518598	2592.99	23.65	24.70	1.274	-	-	-0.06	0.152	0.194
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 4	ECI 5	518598	2592.99	23.65	24.70	1.274	-	-	-0.01	0.044	0.056
	FR1 n41	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 3	ECI 5	518598	2592.99	20.18	21.20	1.265	-	-	0.03	0.670	0.847
	FR1 n41	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 3	ECI 5	518598	2592.99	20.18	21.20	1.265	-	-	0.05	0.540	0.683
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 3	ECI 5	518598	2592.99	20.18	21.20	1.265	-	-	-0.03	0.299	0.378
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 3	ECI 5	518598	2592.99	20.18	21.20	1.265	-	-	-0.11	0.327	0.414
18	FR1 n41	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 3	ECI 5	518598	2592.99	20.15	21.20	1.274	-	-	-0.1	0.702	0.894
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 3	ECI 5	518598	2592.99	20.15	21.20	1.274	-	-	0.14	0.555	0.707
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 3	ECI 5	518598	2592.99	20.15	21.20	1.274	-	-	0.09	0.306	0.390
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 3	ECI 5	518598	2592.99	20.15	21.20	1.274	-	-	0.19	0.357	0.455
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 3	ECI 5	518598	2592.99	17.10	18.20	1.288	-	-	0.09	0.156	0.201
	FR1 n41	100M	QPSK	270	0	DFT-30	Right Cheek	0mm	Ant 3	ECI 5	518598	2592.99	20.09	21.20	1.291	-	-	0.1	0.678	0.875
	FR1 n41	100M	QPSK	270	0	DFT-30	Right Tilted	0mm	Ant 3	ECI 5	518598	2592.99	20.09	21.20	1.291	-	-	0.14	0.561	0.724
	FR1 n41	100M	QPSK	1	137	DFT-30	Right Cheek	0mm	Ant 1	ECI 5	518598	2592.99	22.70	24.00	1.349	-	-	0.19	0.087	0.117
	FR1 n41	100M	QPSK	1	137	DFT-30	Right Tilted	0mm	Ant 1	ECI 5	518598	2592.99	22.70	24.00	1.349	-	-	-0.17	0.044	0.059
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Cheek	0mm	Ant 1	ECI 5	518598	2592.99	22.70	24.00	1.349	-	-	-0.13	0.054	0.073
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Tilted	0mm	Ant 1	ECI 5	518598	2592.99	22.70	24.00	1.349	-	-	0.17	0.027	0.036
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Cheek	0mm	Ant 1	ECI 5	518598	2592.99	22.54	24.00	1.400	-	-	0.09	0.090	0.126
	FR1 n41	100M	QPSK	135	69	DFT-30	Right Tilted	0mm	Ant 1	ECI 5	518598	2592.99	22.54	24.00	1.400	-	-	-0.14	0.045	0.063
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Cheek	0mm	Ant 1	ECI 5	518598	2592.99	22.54	24.00	1.400	-	-	-0.01	0.052	0.073
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Tilted	0mm	Ant 1	ECI 5	518598	2592.99	22.54	24.00	1.400	-	-	0.14	0.026	0.036



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																
19	Bluetooth	DH5 1Mbps	Right Cheek	0mm	Ant 6	Full Power	78	2480	12.00	14.00	1.585	76.27	1.311	-0.17	0.087	0.181
	Bluetooth	DH5 1Mbps	Right Tilted	0mm	Ant 6	Full Power	78	2480	12.00	14.00	1.585	76.27	1.311	0.04	0.079	0.164
	Bluetooth	DH5 1Mbps	Left Cheek	0mm	Ant 6	Full Power	78	2480	12.00	14.00	1.585	76.27	1.311	-0.1	0.293	0.609
	Bluetooth	DH5 1Mbps	Left Tilted	0mm	Ant 6	Full Power	78	2480	12.00	14.00	1.585	76.27	1.311	-0.07	0.212	0.440
20	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 6	Standalone	6	2437	15.20	17.00	1.514	100	1.000	0.06	0.163	0.247
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 6	Standalone	6	2437	15.20	17.00	1.514	100	1.000	-0.16	0.161	0.244
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	Standalone	6	2437	15.20	17.00	1.514	100	1.000	-0.05	0.538	0.814
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 6	Standalone	6	2437	15.20	17.00	1.514	100	1.000	-0.03	0.356	0.539
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	Standalone	1	2412	15.10	17.00	1.549	100	1.000	0.05	0.458	0.709
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	Standalone	11	2462	15.10	17.00	1.549	100	1.000	-0.05	0.644	0.997
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	Simultaneous	11	2462	13.00	15.00	1.585	100	1.000	0.01	0.395	0.626
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	Simultaneous	11	2462	13.00	15.00	1.585	100	1.000	0.01	0.395	0.626
5000MHz																
21	WLAN5.3GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 9	Standalone	54	5270	15.18	17.00	1.521	91.3	1.095	0.11	0.126	0.210
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 9	Standalone	54	5270	15.18	17.00	1.521	91.3	1.095	0.12	0.045	0.075
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 9	Standalone	54	5270	15.18	17.00	1.521	91.3	1.095	-0.16	0.504	0.839
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 9	Standalone	54	5270	15.18	17.00	1.521	91.3	1.095	0.14	0.101	0.168
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 9	Standalone	62	5310	12.43	14.00	1.435	91.3	1.095	-0.15	0.238	0.374
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 9	Simultaneous	54	5270	12.62	14.50	1.542	91.3	1.095	0.05	0.273	0.461
22	WLAN5.5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 9	Standalone	110	5550	15.08	17.00	1.556	91.3	1.095	0.01	0.151	0.257
	WLAN5.5GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 9	Standalone	110	5550	15.08	17.00	1.556	91.3	1.095	-0.07	0.065	0.111
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 9	Standalone	110	5550	15.08	17.00	1.556	91.3	1.095	0.14	0.612	1.043
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 9	Standalone	110	5550	15.08	17.00	1.556	91.3	1.095	0.14	0.168	0.286
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 9	Standalone	102	5510	11.40	13.00	1.445	91.3	1.095	0.03	0.191	0.302
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 9	Standalone	126	5630	15.05	17.00	1.567	91.3	1.095	0.01	0.590	1.012
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 9	Standalone	134	5670	10.56	12.50	1.563	91.3	1.095	-0.04	0.366	0.626
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 9	Simultaneous	110	5550	12.18	14.00	1.521	91.3	1.095	-0.09	0.299	0.498
23	WLAN5.8GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 9	Standalone	151	5755	11.63	13.50	1.538	91.3	1.095	-0.1	0.081	0.136
	WLAN5.8GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 9	Standalone	151	5755	11.63	13.50	1.538	91.3	1.095	0.01	0.021	0.035
	WLAN5.8GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 9	Standalone	151	5755	11.63	13.50	1.538	91.3	1.095	0.1	0.313	0.527
	WLAN5.8GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 9	Standalone	151	5755	11.63	13.50	1.538	91.3	1.095	0	0.098	0.165



14.2 Hotspot SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																				
	LTE Band 12	10M	QPSK	1	0	-	Front	10mm	Ant 0	ECI 8	23095	707.5	23.88	24.80	1.236	-	-	-0.11	0.107	0.132
	LTE Band 12	10M	QPSK	1	0	-	Back	10mm	Ant 0	ECI 8	23095	707.5	23.88	24.80	1.236	-	-	0.01	0.134	0.166
	LTE Band 12	10M	QPSK	1	0	-	Right Side	10mm	Ant 0	ECI 8	23095	707.5	23.88	24.80	1.236	-	-	-0.09	0.224	0.277
	LTE Band 12	10M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	ECI 8	23095	707.5	23.88	24.80	1.236	-	-	0.05	0.071	0.088
	LTE Band 12	10M	QPSK	25	0	-	Front	10mm	Ant 0	ECI 8	23095	707.5	22.37	23.80	1.390	-	-	0.17	0.080	0.111
	LTE Band 12	10M	QPSK	25	0	-	Back	10mm	Ant 0	ECI 8	23095	707.5	22.37	23.80	1.390	-	-	-0.08	0.096	0.133
	LTE Band 12	10M	QPSK	25	0	-	Right Side	10mm	Ant 0	ECI 8	23095	707.5	22.37	23.80	1.390	-	-	-0.02	0.163	0.227
	LTE Band 12	10M	QPSK	25	0	-	Bottom Side	10mm	Ant 0	ECI 8	23095	707.5	22.37	23.80	1.390	-	-	-0.12	0.063	0.088
	LTE Band 12	10M	QPSK	1	0	-	Front	10mm	Ant 1	ECI 8	23095	707.5	23.92	24.50	1.143	-	-	0.15	0.169	0.193
	LTE Band 12	10M	QPSK	1	0	-	Back	10mm	Ant 1	ECI 8	23095	707.5	23.92	24.50	1.143	-	-	-0.18	0.219	0.250
24	LTE Band 12	10M	QPSK	1	0	-	Left Side	10mm	Ant 1	ECI 8	23095	707.5	23.92	24.50	1.143	-	-	0.17	0.379	0.433
	LTE Band 12	10M	QPSK	1	0	-	Top Side	10mm	Ant 1	ECI 8	23095	707.5	23.92	24.50	1.143	-	-	0.19	0.046	0.053
	LTE Band 12	10M	QPSK	25	0	-	Front	10mm	Ant 1	ECI 8	23095	707.5	22.36	23.50	1.300	-	-	-0.09	0.123	0.160
	LTE Band 12	10M	QPSK	25	0	-	Back	10mm	Ant 1	ECI 8	23095	707.5	22.36	23.50	1.300	-	-	-0.11	0.157	0.204
	LTE Band 12	10M	QPSK	25	0	-	Left Side	10mm	Ant 1	ECI 8	23095	707.5	22.36	23.50	1.300	-	-	-0.07	0.265	0.345
	LTE Band 12	10M	QPSK	25	0	-	Top Side	10mm	Ant 1	ECI 8	23095	707.5	22.36	23.50	1.300	-	-	0.05	0.033	0.043
	LTE Band 13	10M	QPSK	1	0	-	Front	10mm	Ant 0	ECI 8	23230	782	23.98	24.80	1.208	-	-	-0.1	0.167	0.202
	LTE Band 13	10M	QPSK	1	0	-	Back	10mm	Ant 0	ECI 8	23230	782	23.98	24.80	1.208	-	-	0.09	0.214	0.258
	LTE Band 13	10M	QPSK	1	0	-	Right Side	10mm	Ant 0	ECI 8	23230	782	23.98	24.80	1.208	-	-	0.09	0.257	0.310
	LTE Band 13	10M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	ECI 8	23230	782	23.98	24.80	1.208	-	-	-0.04	0.129	0.156
	LTE Band 13	10M	QPSK	25	0	-	Front	10mm	Ant 0	ECI 8	23230	782	22.50	23.80	1.349	-	-	-0.1	0.120	0.162
	LTE Band 13	10M	QPSK	25	0	-	Back	10mm	Ant 0	ECI 8	23230	782	22.50	23.80	1.349	-	-	0.07	0.150	0.202
	LTE Band 13	10M	QPSK	25	0	-	Right Side	10mm	Ant 0	ECI 8	23230	782	22.50	23.80	1.349	-	-	0.01	0.181	0.244
	LTE Band 13	10M	QPSK	25	0	-	Bottom Side	10mm	Ant 0	ECI 8	23230	782	22.50	23.80	1.349	-	-	-0.17	0.091	0.123
	LTE Band 13	10M	QPSK	1	0	-	Front	10mm	Ant 1	ECI 8	23230	782	24.00	24.50	1.122	-	-	0.17	0.208	0.233
	LTE Band 13	10M	QPSK	1	0	-	Back	10mm	Ant 1	ECI 8	23230	782	24.00	24.50	1.122	-	-	-0.15	0.271	0.304
25	LTE Band 13	10M	QPSK	1	0	-	Left Side	10mm	Ant 1	ECI 8	23230	782	24.00	24.50	1.122	-	-	-0.06	0.436	0.489
	LTE Band 13	10M	QPSK	1	0	-	Top Side	10mm	Ant 1	ECI 8	23230	782	24.00	24.50	1.122	-	-	0.03	0.060	0.067
	LTE Band 13	10M	QPSK	25	0	-	Front	10mm	Ant 1	ECI 8	23230	782	22.51	23.50	1.256	-	-	0.1	0.138	0.173
	LTE Band 13	10M	QPSK	25	0	-	Back	10mm	Ant 1	ECI 8	23230	782	22.51	23.50	1.256	-	-	-0.01	0.180	0.226
	LTE Band 13	10M	QPSK	25	0	-	Left Side	10mm	Ant 1	ECI 8	23230	782	22.51	23.50	1.256	-	-	0.14	0.289	0.363
	LTE Band 13	10M	QPSK	25	0	-	Top Side	10mm	Ant 1	ECI 8	23230	782	22.51	23.50	1.256	-	-	-0.07	0.040	0.050
835MHz																				
	GSM850	-	-	-	-	GPRS 4 Tx slots	Front	10mm	Ant 0	ECI 8	189	836.4	27.08	28.00	1.236	-	-	0.19	0.147	0.182
26	GSM850	-	-	-	-	GPRS 4 Tx slots	Back	10mm	Ant 0	ECI 8	189	836.4	27.08	28.00	1.236	-	-	0.19	0.202	0.250
	GSM850	-	-	-	-	GPRS 4 Tx slots	Right Side	10mm	Ant 0	ECI 8	189	836.4	27.08	28.00	1.236	-	-	-0.01	0.053	0.066
	GSM850	-	-	-	-	GPRS 4 Tx slots	Bottom Side	10mm	Ant 0	ECI 8	189	836.4	27.08	28.00	1.236	-	-	0.06	0.126	0.156
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 0	ECI 8	4182	836.4	24.22	25.00	1.197	-	-	-0.13	0.241	0.288
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 0	ECI 8	4182	836.4	24.22	25.00	1.197	-	-	0.04	0.309	0.370
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Side	10mm	Ant 0	ECI 8	4182	836.4	24.22	25.00	1.197	-	-	0.18	0.319	0.382
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 0	ECI 8	4182	836.4	24.22	25.00	1.197	-	-	-0.13	0.205	0.245
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 1	ECI 8	4182	836.4	24.20	25.00	1.202	-	-	0.09	0.226	0.272
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	ECI 8	4182	836.4	24.20	25.00	1.202	-	-	-0.08	0.280	0.337
27	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 1	ECI 8	4182	836.4	24.20	25.00	1.202	-	-	0.12	0.390	0.469
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 1	ECI 8	4182	836.4	24.20	25.00	1.202	-	-	0.01	0.064	0.077
	LTE Band 26	15M	QPSK	1	0	-	Front	10mm	Ant 0	ECI 8	26865	831.5	23.88	24.80	1.236	-	-	-0.03	0.164	0.203
	LTE Band 26	15M	QPSK	1	0	-	Back	10mm	Ant 0	ECI 8	26865	831.5	23.88	24.80	1.236	-	-	-0.07	0.215	0.266
	LTE Band 26	15M	QPSK	1	0	-	Right Side	10mm	Ant 0	ECI 8	26865	831.5	23.88	24.80	1.236	-	-	-0.06	0.238	0.294
	LTE Band 26	15M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	ECI 8	26865	831.5	23.88	24.80	1.236	-	-	-0.18	0.138	0.171
	LTE Band 26	15M	QPSK	36	0	-	Front	10mm	Ant 0	ECI 8	26865	831.5	22.87	23.80	1.239	-	-	0.03	0.138	0.171



FCC SAR Test Report

Report No. : FA551908

	LTE Band 26	15M	QPSK	36	0	-	Back	10mm	Ant 0	ECI 8	26865	831.5	22.87	23.80	1.239	-	-	-0.15	0.177	0.219
	LTE Band 26	15M	QPSK	36	0	-	Right Side	10mm	Ant 0	ECI 8	26865	831.5	22.87	23.80	1.239	-	-	0.13	0.193	0.239
	LTE Band 26	15M	QPSK	36	0	-	Bottom Side	10mm	Ant 0	ECI 8	26865	831.5	22.87	23.80	1.239	-	-	0	0.115	0.142
	LTE Band 26	15M	QPSK	1	0	-	Front	10mm	Ant 1	ECI 8	26865	831.5	23.95	24.60	1.161	-	-	0.08	0.223	0.259
	LTE Band 26	15M	QPSK	1	0	-	Back	10mm	Ant 1	ECI 8	26865	831.5	23.95	24.60	1.161	-	-	0	0.279	0.324
28	LTE Band 26	15M	QPSK	1	0	-	Left Side	10mm	Ant 1	ECI 8	26865	831.5	23.95	24.60	1.161	-	-	0.13	0.390	0.453
	LTE Band 26	15M	QPSK	1	0	-	Top Side	10mm	Ant 1	ECI 8	26865	831.5	23.95	24.60	1.161	-	-	-0.09	0.064	0.074
	LTE Band 26	15M	QPSK	36	0	-	Front	10mm	Ant 1	ECI 8	26865	831.5	22.90	23.60	1.175	-	-	0.16	0.180	0.211
	LTE Band 26	15M	QPSK	36	0	-	Back	10mm	Ant 1	ECI 8	26865	831.5	22.90	23.60	1.175	-	-	-0.13	0.220	0.258
	LTE Band 26	15M	QPSK	36	0	-	Left Side	10mm	Ant 1	ECI 8	26865	831.5	22.90	23.60	1.175	-	-	-0.19	0.316	0.371
	LTE Band 26	15M	QPSK	36	0	-	Top Side	10mm	Ant 1	ECI 8	26865	831.5	22.90	23.60	1.175	-	-	0.17	0.055	0.065
	FR1 n26	20M	QPSK	1	53	DFT-15	Front	10mm	Ant 0	ECI 8	166300	831.5	23.45	24.70	1.334	-	-	-0.02	0.179	0.239
	FR1 n26	20M	QPSK	1	53	DFT-15	Back	10mm	Ant 0	ECI 8	166300	831.5	23.45	24.70	1.334	-	-	-0.13	0.226	0.301
	FR1 n26	20M	QPSK	1	53	DFT-15	Right Side	10mm	Ant 0	ECI 8	166300	831.5	23.45	24.70	1.334	-	-	-0.11	0.244	0.325
	FR1 n26	20M	QPSK	1	53	DFT-15	Bottom Side	10mm	Ant 0	ECI 8	166300	831.5	23.45	24.70	1.334	-	-	0.12	0.152	0.203
	FR1 n26	20M	QPSK	50	28	DFT-15	Front	10mm	Ant 0	ECI 8	166300	831.5	23.40	24.70	1.349	-	-	0.04	0.181	0.244
	FR1 n26	20M	QPSK	50	28	DFT-15	Back	10mm	Ant 0	ECI 8	166300	831.5	23.40	24.70	1.349	-	-	0.07	0.234	0.316
29	FR1 n26	20M	QPSK	50	28	DFT-15	Right Side	10mm	Ant 0	ECI 8	166300	831.5	23.40	24.70	1.349	-	-	-0.15	0.259	0.349
	FR1 n26	20M	QPSK	50	28	DFT-15	Bottom Side	10mm	Ant 0	ECI 8	166300	831.5	23.40	24.70	1.349	-	-	-0.15	0.152	0.205
	FR1 n26	20M	QPSK	1	53	DFT-15	Front	10mm	Ant 1	ECI 8	166300	831.5	23.40	24.50	1.288	-	-	0.12	0.162	0.209
	FR1 n26	20M	QPSK	1	53	DFT-15	Back	10mm	Ant 1	ECI 8	166300	831.5	23.40	24.50	1.288	-	-	0.05	0.197	0.254
	FR1 n26	20M	QPSK	1	53	DFT-15	Left Side	10mm	Ant 1	ECI 8	166300	831.5	23.40	24.50	1.288	-	-	-0.17	0.259	0.334
	FR1 n26	20M	QPSK	1	53	DFT-15	Top Side	10mm	Ant 1	ECI 8	166300	831.5	23.40	24.50	1.288	-	-	-0.06	0.045	0.058
	FR1 n26	20M	QPSK	50	28	DFT-15	Front	10mm	Ant 1	ECI 8	166300	831.5	23.37	24.50	1.297	-	-	0.1	0.132	0.171
	FR1 n26	20M	QPSK	50	28	DFT-15	Back	10mm	Ant 1	ECI 8	166300	831.5	23.37	24.50	1.297	-	-	-0.09	0.166	0.215
	FR1 n26	20M	QPSK	50	28	DFT-15	Left Side	10mm	Ant 1	ECI 8	166300	831.5	23.37	24.50	1.297	-	-	0.04	0.210	0.272
	FR1 n26	20M	QPSK	50	28	DFT-15	Top Side	10mm	Ant 1	ECI 8	166300	831.5	23.37	24.50	1.297	-	-	0.02	0.038	0.049
1750MHz																				
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	ECI 8	1413	1732.6	20.99	21.50	1.125	-	-	-0.11	0.227	0.255
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	ECI 8	1413	1732.6	20.99	21.50	1.125	-	-	0.01	0.314	0.353
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 4	ECI 8	1413	1732.6	20.99	21.50	1.125	-	-	0.02	0.075	0.084
30	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 4	ECI 8	1413	1732.6	20.99	21.50	1.125	-	-	0.08	0.425	0.478
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 3	ECI 8	1413	1732.6	20.63	21.00	1.089	-	-	0.19	0.207	0.225
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 3	ECI 8	1413	1732.6	20.63	21.00	1.089	-	-	0.08	0.199	0.217
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 3	ECI 8	1413	1732.6	20.63	21.00	1.089	-	-	0.14	0.079	0.086
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 3	ECI 8	1413	1732.6	20.63	21.00	1.089	-	-	-0.03	0.260	0.283
	LTE Band 66	20M	QPSK	1	0	-	Front	10mm	Ant 4	ECI 8	132322	1745	21.12	21.60	1.117	-	-	0.05	0.222	0.248
	LTE Band 66	20M	QPSK	1	0	-	Back	10mm	Ant 4	ECI 8	132322	1745	21.12	21.60	1.117	-	-	0.09	0.276	0.308
	LTE Band 66	20M	QPSK	1	0	-	Left Side	10mm	Ant 4	ECI 8	132322	1745	21.12	21.60	1.117	-	-	-0.19	0.068	0.076
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 4	ECI 8	132322	1745	21.12	21.60	1.117	-	-	-0.02	0.382	0.427
	LTE Band 66C	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 4	ECI 8	132322 132520	1745 1764.8	21.05	21.60	1.135	-	-	-0.02	0.365	0.414
	LTE Band 66	20M	QPSK	50	0	-	Front	10mm	Ant 4	ECI 8	132322	1745	21.10	21.60	1.122	-	-	0.09	0.217	0.243
	LTE Band 66	20M	QPSK	50	0	-	Back	10mm	Ant 4	ECI 8	132322	1745	21.10	21.60	1.122	-	-	0.11	0.279	0.313
	LTE Band 66	20M	QPSK	50	0	-	Left Side	10mm	Ant 4	ECI 8	132322	1745	21.10	21.60	1.122	-	-	-0.16	0.066	0.074
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 4	ECI 8	132322	1745	21.10	21.60	1.122	-	-	-0.19	0.387	0.434
	LTE Band 66	20M	QPSK	1	0	-	Front	10mm	Ant 3	ECI 8	132322	1745	20.76	21.20	1.107	-	-	-0.12	0.222	0.246
	LTE Band 66	20M	QPSK	1	0	-	Back	10mm	Ant 3	ECI 8	132322	1745	20.76	21.20	1.107	-	-	-0.09	0.193	0.214
	LTE Band 66	20M	QPSK	1	0	-	Left Side	10mm	Ant 3	ECI 8	132322	1745	20.76	21.20	1.107	-	-	0.1	0.071	0.079
	LTE Band 66	20M	QPSK	1	0	-	Top Side	10mm	Ant 3	ECI 8	132322	1745	20.76	21.20	1.107	-	-	0	0.253	0.280
	LTE Band 66	20M	QPSK	1	0	-	Top Side	10mm	Ant 3	ECI 8	132322 132520	1745 1764.8	20.69	21.20	1.125	-	-	0.05	0.218	0.245
	LTE Band 66	20M	QPSK	50	0	-	Front	10mm	Ant 3	ECI 8	132322	1745	20.73	21.20	1.114	-	-	-0.05	0.233	0.260
	LTE Band 66	20M	QPSK	50	0	-	Back	10mm	Ant 3	ECI 8	132322	1745	20.73	21.20	1.114	-	-	0.13	0.212	0.236
	LTE Band 66	20M	QPSK	50	0	-	Left Side	10mm	Ant 3	ECI 8	132322	1745	20.73	21.20	1.114	-	-	-0.11	0.082	0.091
	LTE Band 66	20M	QPSK	50	0	-	Top Side	10mm	Ant 3	ECI 8	132322	1745	20.73	21.20	1.114	-	-	0.01	0.267	0.298
	LTE Band 66	20M	QPSK	1	0	-	Front	10mm	Ant 1	ECI 8	132322	1745	22.98	23.20	1.052	-	-	0.16	0.220	0.231



FCC SAR Test Report

Report No. : FA551908

	LTE Band 66	20M	QPSK	1	0	-	Back	10mm	Ant 1	ECI 8	132322	1745	22.98	23.20	1.052	-	-	-0.19	0.250	0.263
31	LTE Band 66	20M	QPSK	1	0	-	Left Side	10mm	Ant 1	ECI 8	132322	1745	22.98	23.20	1.052	-	-	-0.1	0.498	0.524
	LTE Band 66	20M	QPSK	1	0	-	Top Side	10mm	Ant 1	ECI 8	132322	1745	22.98	23.20	1.052	-	-	-	n/a	n/a
	LTE Band 66	20M	QPSK	50	0	-	Front	10mm	Ant 1	ECI 8	132322	1745	21.96	22.20	1.057	-	-	-0.15	0.174	0.184
	LTE Band 66	20M	QPSK	50	0	-	Back	10mm	Ant 1	ECI 8	132322	1745	21.96	22.20	1.057	-	-	0.17	0.188	0.199
	LTE Band 66	20M	QPSK	50	0	-	Left Side	10mm	Ant 1	ECI 8	132322	1745	21.96	22.20	1.057	-	-	0.06	0.378	0.399
	LTE Band 66	20M	QPSK	50	0	-	Top Side	10mm	Ant 1	ECI 8	132322	1745	21.96	22.20	1.057	-	-	-	n/a	n/a
	FR1 n66	40M	QPSK	1	108	DFT-15	Front	10mm	Ant 4	ECI 8	349000	1745	23.12	24.40	1.343	-	-	0.18	0.372	0.500
	FR1 n66	40M	QPSK	1	108	DFT-15	Back	10mm	Ant 4	ECI 8	349000	1745	23.12	24.40	1.343	-	-	-0.07	0.421	0.565
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Side	10mm	Ant 4	ECI 8	349000	1745	23.12	24.40	1.343	-	-	0.12	0.119	0.160
	FR1 n66	40M	QPSK	1	108	DFT-15	Bottom Side	10mm	Ant 4	ECI 8	349000	1745	23.12	24.40	1.343	-	-	0.02	0.694	0.932
	FR1 n66	40M	QPSK	108	54	DFT-15	Front	10mm	Ant 4	ECI 8	349000	1745	23.07	24.40	1.358	-	-	-0.14	0.380	0.516
	FR1 n66	40M	QPSK	108	54	DFT-15	Back	10mm	Ant 4	ECI 8	349000	1745	23.07	24.40	1.358	-	-	0.13	0.430	0.584
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Side	10mm	Ant 4	ECI 8	349000	1745	23.07	24.40	1.358	-	-	0.02	0.120	0.163
32	FR1 n66	40M	QPSK	108	54	DFT-15	Bottom Side	10mm	Ant 4	ECI 8	349000	1745	23.07	24.40	1.358	-	-	0.06	0.712	0.967
	FR1 n66	40M	QPSK	216	0	DFT-15	Bottom Side	10mm	Ant 4	ECI 8	349000	1745	21.44	23.40	1.570	-	-	-0.09	0.456	0.716
	FR1 n66	40M	QPSK	1	108	DFT-15	Front	10mm	Ant 3	ECI 8	349000	1745	22.95	23.90	1.245	-	-	0.14	0.393	0.489
	FR1 n66	40M	QPSK	1	108	DFT-15	Back	10mm	Ant 3	ECI 8	349000	1745	22.95	23.90	1.245	-	-	0.07	0.372	0.463
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Side	10mm	Ant 3	ECI 8	349000	1745	22.95	23.90	1.245	-	-	-0.05	0.146	0.182
	FR1 n66	40M	QPSK	1	108	DFT-15	Top Side	10mm	Ant 3	ECI 8	349000	1745	22.95	23.90	1.245	-	-	-0.14	0.509	0.633
	FR1 n66	40M	QPSK	108	54	DFT-15	Front	10mm	Ant 3	ECI 8	349000	1745	22.88	23.90	1.265	-	-	-0.05	0.393	0.497
	FR1 n66	40M	QPSK	108	54	DFT-15	Back	10mm	Ant 3	ECI 8	349000	1745	22.88	23.90	1.265	-	-	-0.01	0.370	0.468
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Side	10mm	Ant 3	ECI 8	349000	1745	22.88	23.90	1.265	-	-	0.1	0.147	0.186
	FR1 n66	40M	QPSK	108	54	DFT-15	Top Side	10mm	Ant 3	ECI 8	349000	1745	22.88	23.90	1.265	-	-	-0.17	0.514	0.650
	FR1 n66	40M	QPSK	1	108	DFT-15	Front	10mm	Ant 1	ECI 8	349000	1745	22.21	23.20	1.256	-	-	0.12	0.167	0.210
	FR1 n66	40M	QPSK	1	108	DFT-15	Back	10mm	Ant 1	ECI 8	349000	1745	22.21	23.20	1.256	-	-	-0.18	0.187	0.235
	FR1 n66	40M	QPSK	1	108	DFT-15	Left Side	10mm	Ant 1	ECI 8	349000	1745	22.21	23.20	1.256	-	-	-0.16	0.376	0.472
	FR1 n66	40M	QPSK	1	108	DFT-15	Top Side	10mm	Ant 1	ECI 8	349000	1745	22.21	23.20	1.256	-	-	-	n/a	n/a
	FR1 n66	40M	QPSK	108	54	DFT-15	Front	10mm	Ant 1	ECI 8	349000	1745	22.16	23.20	1.271	-	-	-0.14	0.172	0.219
	FR1 n66	40M	QPSK	108	54	DFT-15	Back	10mm	Ant 1	ECI 8	349000	1745	22.16	23.20	1.271	-	-	0.09	0.186	0.236
	FR1 n66	40M	QPSK	108	54	DFT-15	Left Side	10mm	Ant 1	ECI 8	349000	1745	22.16	23.20	1.271	-	-	-0.03	0.376	0.478
	FR1 n66	40M	QPSK	108	54	DFT-15	Top Side	10mm	Ant 1	ECI 8	349000	1745	22.16	23.20	1.271	-	-	-	n/a	n/a
1900MHz																				
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Front	10mm	Ant 4	ECI 8	661	1880	25.70	26.50	1.202	-	-	0.13	0.204	0.245
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Back	10mm	Ant 4	ECI 8	661	1880	25.70	26.50	1.202	-	-	-0.06	0.279	0.335
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Left Side	10mm	Ant 4	ECI 8	661	1880	25.70	26.50	1.202	-	-	0.06	0.082	0.099
33	GSM1900	-	-	-	-	GPRS 3 Tx slots	Bottom Side	10mm	Ant 4	ECI 8	661	1880	25.70	26.50	1.202	-	-	-0.06	0.407	0.489
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Front	10mm	Ant 3	ECI 8	661	1880	25.20	25.90	1.175	-	-	0.08	0.216	0.254
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Back	10mm	Ant 3	ECI 8	661	1880	25.20	25.90	1.175	-	-	-0.16	0.245	0.288
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Left Side	10mm	Ant 3	ECI 8	661	1880	25.20	25.90	1.175	-	-	0.09	0.096	0.113
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Top Side	10mm	Ant 3	ECI 8	661	1880	25.20	25.90	1.175	-	-	-0.01	0.388	0.456
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 4	ECI 8	9400	1880	21.35	21.50	1.035	-	-	0.17	0.195	0.202
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 4	ECI 8	9400	1880	21.35	21.50	1.035	-	-	-0.05	0.266	0.275
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 4	ECI 8	9400	1880	21.35	21.50	1.035	-	-	-0.11	0.057	0.059
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 4	ECI 8	9400	1880	21.35	21.50	1.035	-	-	0.09	0.381	0.394
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 3	ECI 8	9400	1880	20.30	20.40	1.023	-	-	-0.02	0.329	0.337
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 3	ECI 8	9400	1880	20.30	20.40	1.023	-	-	-0.18	0.337	0.345
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 3	ECI 8	9400	1880	20.30	20.40	1.023	-	-	-0.11	0.134	0.137
34	WCDMA II	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 3	ECI 8	9400	1880	20.30	20.40	1.023	-	-	0.08	0.506	0.518
	LTE Band 2	20M	QPSK	1	0	-	Front	10mm	Ant 4	ECI 8	18900	1880	21.05	21.30	1.059	-	-	-0.07	0.189	0.200
	LTE Band 2	20M	QPSK	1	0	-	Back	10mm	Ant 4	ECI 8	18900	1880	21.05	21.30	1.059	-	-	0.04	0.267	0.283
	LTE Band 2	20M	QPSK	1	0	-	Left Side	10mm	Ant 4	ECI 8	18900	1880	21.05	21.30	1.059	-	-	0.03	0.071	0.075
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 4	ECI 8	18900	1880	21.05	21.30	1.059	-	-	-0.17	0.373	0.395
	LTE Band 2	20M	QPSK	50	0	-	Front	10mm	Ant 4	ECI 8	18900	1880	21.03	21.30	1.064	-	-	0.06	0.179	0.190
	LTE Band 2	20M	QPSK	50	0	-	Back	10mm	Ant 4	ECI 8	18900	1880	21.03	21.30	1.064	-	-	0.02	0.252	0.268
	LTE Band 2	20M	QPSK	50	0	-	Left Side	10mm	Ant 4	ECI 8	18900	1880	21.03	21.30	1.064	-	-	-0.07	0.067	0.071



FCC SAR Test Report

Report No. : FA551908

	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 4	ECI 8	18900	1880	21.03	21.30	1.064	-	-	0.07	0.355	0.378
	LTE Band 2	20M	QPSK	1	0	-	Front	10mm	Ant 3	ECI 8	18900	1880	20.49	20.70	1.050	-	-	0.12	0.385	0.404
	LTE Band 2	20M	QPSK	1	0	-	Back	10mm	Ant 3	ECI 8	18900	1880	20.49	20.70	1.050	-	-	-0.15	0.356	0.374
	LTE Band 2	20M	QPSK	1	0	-	Left Side	10mm	Ant 3	ECI 8	18900	1880	20.49	20.70	1.050	-	-	0.13	0.143	0.150
	LTE Band 2	20M	QPSK	1	0	-	Top Side	10mm	Ant 3	ECI 8	18900	1880	20.49	20.70	1.050	-	-	0.05	0.502	0.527
	LTE Band 2	20M	QPSK	50	0	-	Front	10mm	Ant 3	ECI 8	18900	1880	20.47	20.70	1.054	-	-	-0.14	0.371	0.391
	LTE Band 2	20M	QPSK	50	0	-	Back	10mm	Ant 3	ECI 8	18900	1880	20.47	20.70	1.054	-	-	-0.03	0.381	0.402
	LTE Band 2	20M	QPSK	50	0	-	Left Side	10mm	Ant 3	ECI 8	18900	1880	20.47	20.70	1.054	-	-	0.15	0.152	0.160
35	LTE Band 2	20M	QPSK	50	0	-	Top Side	10mm	Ant 3	ECI 8	18900	1880	20.47	20.70	1.054	-	-	-0.08	0.561	0.592
	FR1 n2	20M	QPSK	1	53	DFT-15	Front	10mm	Ant 4	ECI 8	376000	1880	23.17	24.20	1.268	-	-	0.19	0.310	0.393
	FR1 n2	20M	QPSK	1	53	DFT-15	Back	10mm	Ant 4	ECI 8	376000	1880	23.17	24.20	1.268	-	-	0.05	0.422	0.535
	FR1 n2	20M	QPSK	1	53	DFT-15	Left Side	10mm	Ant 4	ECI 8	376000	1880	23.17	24.20	1.268	-	-	0.02	0.124	0.157
	FR1 n2	20M	QPSK	1	53	DFT-15	Bottom Side	10mm	Ant 4	ECI 8	376000	1880	23.17	24.20	1.268	-	-	0.13	0.637	0.807
	FR1 n2	20M	QPSK	1	53	DFT-15	Bottom Side	10mm	Ant 4	ECI 8	372000	1860	23.15	24.20	1.274	-	-	-0.14	0.635	0.809
	FR1 n2	20M	QPSK	1	53	DFT-15	Bottom Side	10mm	Ant 4	ECI 8	380000	1900	23.12	24.20	1.282	-	-	-0.17	0.553	0.709
	FR1 n2	20M	QPSK	50	28	DFT-15	Front	10mm	Ant 4	ECI 8	376000	1880	23.15	24.20	1.274	-	-	0.12	0.306	0.390
	FR1 n2	20M	QPSK	50	28	DFT-15	Back	10mm	Ant 4	ECI 8	376000	1880	23.15	24.20	1.274	-	-	-0.07	0.409	0.521
	FR1 n2	20M	QPSK	50	28	DFT-15	Left Side	10mm	Ant 4	ECI 8	376000	1880	23.15	24.20	1.274	-	-	-0.08	0.118	0.150
	FR1 n2	20M	QPSK	50	28	DFT-15	Bottom Side	10mm	Ant 4	ECI 8	376000	1880	23.15	24.20	1.274	-	-	-0.15	0.630	0.802
36	FR1 n2	20M	QPSK	50	28	DFT-15	Bottom Side	10mm	Ant 4	ECI 8	372000	1860	23.14	24.20	1.276	-	-	-0.02	0.657	0.839
	FR1 n2	20M	QPSK	50	28	DFT-15	Bottom Side	10mm	Ant 4	ECI 8	380000	1900	23.10	24.20	1.288	-	-	-0.08	0.573	0.738
	FR1 n2	20M	QPSK	100	0	DFT-15	Bottom Side	10mm	Ant 4	ECI 8	376000	1880	22.04	23.20	1.306	-	-	0.17	0.509	0.665
	FR1 n2	20M	QPSK	1	53	DFT-15	Front	10mm	Ant 3	ECI 8	376000	1880	19.80	20.70	1.230	-	-	0.19	0.306	0.376
	FR1 n2	20M	QPSK	1	53	DFT-15	Back	10mm	Ant 3	ECI 8	376000	1880	19.80	20.70	1.230	-	-	0	0.311	0.383
	FR1 n2	20M	QPSK	1	53	DFT-15	Left Side	10mm	Ant 3	ECI 8	376000	1880	19.80	20.70	1.230	-	-	-0.11	0.121	0.149
	FR1 n2	20M	QPSK	1	53	DFT-15	Top Side	10mm	Ant 3	ECI 8	376000	1880	19.80	20.70	1.230	-	-	-0.16	0.477	0.587
	FR1 n2	20M	QPSK	50	28	DFT-15	Front	10mm	Ant 3	ECI 8	376000	1880	19.78	20.70	1.236	-	-	-0.03	0.315	0.389
	FR1 n2	20M	QPSK	50	28	DFT-15	Back	10mm	Ant 3	ECI 8	376000	1880	19.78	20.70	1.236	-	-	-0.09	0.327	0.404
	FR1 n2	20M	QPSK	50	28	DFT-15	Left Side	10mm	Ant 3	ECI 8	376000	1880	19.78	20.70	1.236	-	-	0.11	0.130	0.161
	FR1 n2	20M	QPSK	50	28	DFT-15	Top Side	10mm	Ant 3	ECI 8	376000	1880	19.78	20.70	1.236	-	-	0	0.484	0.598
2600MHz																				
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 4	ECI 8	21100	2535	21.55	22.00	1.109	-	-	-0.07	0.162	0.180
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 4	ECI 8	21100	2535	21.55	22.00	1.109	-	-	0.02	0.239	0.265
	LTE Band 7	20M	QPSK	1	0	-	Left Side	10mm	Ant 4	ECI 8	21100	2535	21.55	22.00	1.109	-	-	0.15	0.073	0.081
37	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 4	ECI 8	21100	2535	21.55	22.00	1.109	-	-	0.14	0.349	0.387
	LTE Band 7C	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 4	ECI 8	21100+21298	2535+2554.8	21.49	22.00	1.125	-	-	0.01	0.328	0.369
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 4	ECI 8	21100	2535	21.54	22.00	1.112	-	-	-0.16	0.136	0.151
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 4	ECI 8	21100	2535	21.54	22.00	1.112	-	-	-0.01	0.191	0.212
	LTE Band 7	20M	QPSK	50	0	-	Left Side	10mm	Ant 4	ECI 8	21100	2535	21.54	22.00	1.112	-	-	0.16	0.060	0.067
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 4	ECI 8	21100	2535	21.54	22.00	1.112	-	-	0.17	0.287	0.319
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 3	ECI 8	21100	2535	19.10	19.50	1.096	-	-	0.07	0.073	0.080
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 3	ECI 8	21100	2535	19.10	19.50	1.096	-	-	0.18	0.100	0.110
	LTE Band 7	20M	QPSK	1	0	-	Left Side	10mm	Ant 3	ECI 8	21100	2535	19.10	19.50	1.096	-	-	0.04	0.048	0.053
	LTE Band 7	20M	QPSK	1	0	-	Top Side	10mm	Ant 3	ECI 8	21100	2535	19.10	19.50	1.096	-	-	0.12	0.142	0.156
	LTE Band 7C	20M	QPSK	1	0	-	Top Side	10mm	Ant 3	ECI 8	21100+21298	2535+2554.8	19.04	19.50	1.112	-	-	0.11	0.137	0.152
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 3	ECI 8	21100	2535	19.07	19.50	1.104	-	-	-0.12	0.080	0.088
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 3	ECI 8	21100	2535	19.07	19.50	1.104	-	-	-0.14	0.100	0.110
	LTE Band 7	20M	QPSK	50	0	-	Left Side	10mm	Ant 3	ECI 8	21100	2535	19.07	19.50	1.104	-	-	0.03	0.047	0.052
	LTE Band 7	20M	QPSK	50	0	-	Top Side	10mm	Ant 3	ECI 8	21100	2535	19.07	19.50	1.104	-	-	-0.15	0.154	0.170
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 1	ECI 8	21100	2535	22.33	23.00	1.167	-	-	-	n/a	n/a
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 1	ECI 8	21100	2535	22.33	23.00	1.167	-	-	-	n/a	n/a
	LTE Band 7	20M	QPSK	1	0	-	Left Side	10mm	Ant 1	ECI 8	21100	2535	22.33	23.00	1.167	-	-	0.12	0.053	0.062
	LTE Band 7	20M	QPSK	1	0	-	Top Side	10mm	Ant 1	ECI 8	21100	2535	22.33	23.00	1.167	-	-	-	n/a	n/a
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 1	ECI 8	21100	2535	21.15	22.00	1.216	-	-	-	n/a	n/a
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 1	ECI 8	21100	2535	21.15	22.00	1.216	-	-	-	n/a	n/a
	LTE Band 7	20M	QPSK	50	0	-	Left Side	10mm	Ant 1	ECI 8	21100	2535	21.15	22.00	1.216	-	-	0.14	0.037	0.045



FCC SAR Test Report

Report No. : FA551908

	LTE Band 7	20M	QPSK	50	0	-	Top Side	10mm	Ant 1	ECI 8	21100	2535	21.15	22.00	1.216	-	-	-	n/a	n/a
	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 4	ECI 8	39750	2506	22.52	22.80	1.067	62.9	1.006	-0.06	0.115	0.123
	LTE Band 41	20M	QPSK	1	0	-	Back	10mm	Ant 4	ECI 8	39750	2506	22.52	22.80	1.067	62.9	1.006	-0.13	0.176	0.189
	LTE Band 41	20M	QPSK	1	0	-	Left Side	10mm	Ant 4	ECI 8	39750	2506	22.52	22.80	1.067	62.9	1.006	-0.18	0.059	0.063
38	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 4	ECI 8	39750	2506	22.52	22.80	1.067	62.9	1.006	-0.15	0.265	0.284
	LTE Band 41C	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 4	ECI 8	39750+39948	2506+2525.8	22.47	22.80	1.079	62.9	1.006	-0.03	0.248	0.269
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 4	ECI 8	39750	2506	22.50	22.80	1.072	62.9	1.006	0.08	0.071	0.077
	LTE Band 41	20M	QPSK	50	0	-	Back	10mm	Ant 4	ECI 8	39750	2506	22.50	22.80	1.072	62.9	1.006	-0.05	0.105	0.113
	LTE Band 41	20M	QPSK	50	0	-	Left Side	10mm	Ant 4	ECI 8	39750	2506	22.50	22.80	1.072	62.9	1.006	0.07	0.040	0.043
	LTE Band 41	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 4	ECI 8	39750	2506	22.50	22.80	1.072	62.9	1.006	0.03	0.156	0.168
	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 3	ECI 8	39750	2506	19.77	19.80	1.007	62.9	1.006	-0.02	0.046	0.047
	LTE Band 41	20M	QPSK	1	0	-	Back	10mm	Ant 3	ECI 8	39750	2506	19.77	19.80	1.007	62.9	1.006	0.02	0.066	0.067
	LTE Band 41	20M	QPSK	1	0	-	Left Side	10mm	Ant 3	ECI 8	39750	2506	19.77	19.80	1.007	62.9	1.006	-0.16	0.027	0.027
	LTE Band 41	20M	QPSK	1	0	-	Top Side	10mm	Ant 3	ECI 8	39750	2506	19.77	19.80	1.007	62.9	1.006	0.05	0.092	0.093
	LTE Band 41C	20M	QPSK	1	0	-	Top Side	10mm	Ant 3	ECI 8	39750+39948	2506+2525.8	19.69	19.80	1.026	62.9	1.006	0.08	0.088	0.091
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 3	ECI 8	39750	2506	19.75	19.80	1.012	62.9	1.006	-0.19	0.037	0.038
	LTE Band 41	20M	QPSK	50	0	-	Back	10mm	Ant 3	ECI 8	39750	2506	19.75	19.80	1.012	62.9	1.006	-0.11	0.052	0.053
	LTE Band 41	20M	QPSK	50	0	-	Left Side	10mm	Ant 3	ECI 8	39750	2506	19.75	19.80	1.012	62.9	1.006	0.13	0.024	0.024
	LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 3	ECI 8	39750	2506	19.75	19.80	1.012	62.9	1.006	0	0.079	0.080
	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 1	ECI 8	39750	2506	23.38	23.50	1.028	62.9	1.006	-	n/a	n/a
	LTE Band 41	20M	QPSK	1	0	-	Back	10mm	Ant 1	ECI 8	39750	2506	23.38	23.50	1.028	62.9	1.006	-	n/a	n/a
	LTE Band 41	20M	QPSK	1	0	-	Left Side	10mm	Ant 1	ECI 8	39750	2506	23.38	23.50	1.028	62.9	1.006	0.03	0.043	0.044
	LTE Band 41	20M	QPSK	1	0	-	Top Side	10mm	Ant 1	ECI 8	39750	2506	23.38	23.50	1.028	62.9	1.006	-	n/a	n/a
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 1	ECI 8	39750	2506	20.69	22.50	1.517	62.9	1.006	-	n/a	n/a
	LTE Band 41	20M	QPSK	50	0	-	Back	10mm	Ant 1	ECI 8	39750	2506	20.69	22.50	1.517	62.9	1.006	-	n/a	n/a
	LTE Band 41	20M	QPSK	50	0	-	Left Side	10mm	Ant 1	ECI 8	39750	2506	20.69	22.50	1.517	62.9	1.006	0.01	0.031	0.047
	LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 1	ECI 8	39750	2506	20.69	22.50	1.517	62.9	1.006	-	n/a	n/a
	FR1 n7	50M	QPSK	1	135	DFT-15	Front	10mm	Ant 4	ECI 8	507000	2535	22.70	23.70	1.259	-	-	-0.08	0.186	0.234
	FR1 n7	50M	QPSK	1	135	DFT-15	Back	10mm	Ant 4	ECI 8	507000	2535	22.70	23.70	1.259	-	-	0.13	0.271	0.341
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Side	10mm	Ant 4	ECI 8	507000	2535	22.70	23.70	1.259	-	-	-0.1	0.088	0.111
	FR1 n7	50M	QPSK	1	135	DFT-15	Bottom Side	10mm	Ant 4	ECI 8	507000	2535	22.70	23.70	1.259	-	-	-0.17	0.439	0.553
	FR1 n7	50M	QPSK	135	68	DFT-15	Front	10mm	Ant 4	ECI 8	507000	2535	22.69	23.70	1.262	-	-	-0.08	0.192	0.242
	FR1 n7	50M	QPSK	135	68	DFT-15	Back	10mm	Ant 4	ECI 8	507000	2535	22.69	23.70	1.262	-	-	-0.1	0.265	0.334
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Side	10mm	Ant 4	ECI 8	507000	2535	22.69	23.70	1.262	-	-	-0.11	0.092	0.116
39	FR1 n7	50M	QPSK	135	68	DFT-15	Bottom Side	10mm	Ant 4	ECI 8	507000	2535	22.69	23.70	1.262	-	-	-0.13	0.447	0.564
	FR1 n7	50M	QPSK	1	135	DFT-15	Front	10mm	Ant 3	ECI 8	507000	2535	21.68	22.50	1.208	-	-	0.07	0.140	0.169
	FR1 n7	50M	QPSK	1	135	DFT-15	Back	10mm	Ant 3	ECI 8	507000	2535	21.68	22.50	1.208	-	-	-0.12	0.202	0.244
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Side	10mm	Ant 3	ECI 8	507000	2535	21.68	22.50	1.208	-	-	0.13	0.097	0.117
	FR1 n7	50M	QPSK	1	135	DFT-15	Top Side	10mm	Ant 3	ECI 8	507000	2535	21.68	22.50	1.208	-	-	0	0.323	0.390
	FR1 n7	50M	QPSK	135	68	DFT-15	Front	10mm	Ant 3	ECI 8	507000	2535	21.64	22.50	1.219	-	-	0.04	0.148	0.180
	FR1 n7	50M	QPSK	135	68	DFT-15	Back	10mm	Ant 3	ECI 8	507000	2535	21.64	22.50	1.219	-	-	-0.03	0.199	0.243
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Side	10mm	Ant 3	ECI 8	507000	2535	21.64	22.50	1.219	-	-	0.14	0.094	0.115
	FR1 n7	50M	QPSK	135	68	DFT-15	Top Side	10mm	Ant 3	ECI 8	507000	2535	21.64	22.50	1.219	-	-	-0.17	0.316	0.385
	FR1 n7	50M	QPSK	1	135	DFT-15	Front	10mm	Ant 1	ECI 8	507000	2535	22.25	23.00	1.189	-	-	-	n/a	n/a
	FR1 n7	50M	QPSK	1	135	DFT-15	Back	10mm	Ant 1	ECI 8	507000	2535	22.25	23.00	1.189	-	-	-	n/a	n/a
	FR1 n7	50M	QPSK	1	135	DFT-15	Left Side	10mm	Ant 1	ECI 8	507000	2535	22.25	23.00	1.189	-	-	0.19	0.054	0.064
	FR1 n7	50M	QPSK	1	135	DFT-15	Top Side	10mm	Ant 1	ECI 8	507000	2535	22.25	23.00	1.189	-	-	-	n/a	n/a
	FR1 n7	50M	QPSK	135	68	DFT-15	Front	10mm	Ant 1	ECI 8	507000	2535	22.17	23.00	1.211	-	-	-	n/a	n/a
	FR1 n7	50M	QPSK	135	68	DFT-15	Back	10mm	Ant 1	ECI 8	507000	2535	22.17	23.00	1.211	-	-	-	n/a	n/a
	FR1 n7	50M	QPSK	135	68	DFT-15	Left Side	10mm	Ant 1	ECI 8	507000	2535	22.17	23.00	1.211	-	-	-0.1	0.050	0.061
	FR1 n7	50M	QPSK	135	68	DFT-15	Top Side	10mm	Ant 1	ECI 8	507000	2535	22.17	23.00	1.211	-	-	-	n/a	n/a
	FR1 n41	100M	QPSK	1	137	DFT-30	Front	10mm	Ant 4	ECI 8	518598	2592.99	22.75	23.70	1.245	-	-	-0.15	0.197	0.245
	FR1 n41	100M	QPSK	1	137	DFT-30	Back	10mm	Ant 4	ECI 8	518598	2592.99	22.75	23.70	1.245	-	-	0.18	0.276	0.343
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Side	10mm	Ant 4	ECI 8	518598	2592.99	22.75	23.70	1.245	-	-	0.06	0.085	0.106
	FR1 n41	100M	QPSK	1	137	DFT-30	Bottom Side	10mm	Ant 4	ECI 8	518598	2592.99	22.75	23.70	1.245	-	-	-0.09	0.442	0.550



FCC SAR Test Report

Report No. : FA551908

	FR1 n41	100M	QPSK	135	69	DFT-30	Front	10mm	Ant 4	ECI 8	518598	2592.99	22.71	23.70	1.256	-	-	-0.18	0.201	0.252
	FR1 n41	100M	QPSK	135	69	DFT-30	Back	10mm	Ant 4	ECI 8	518598	2592.99	22.71	23.70	1.256	-	-	0.02	0.282	0.354
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Side	10mm	Ant 4	ECI 8	518598	2592.99	22.71	23.70	1.256	-	-	0.1	0.086	0.108
40	FR1 n41	100M	QPSK	135	69	DFT-30	Bottom Side	10mm	Ant 4	ECI 8	518598	2592.99	22.71	23.70	1.256	-	-	0.05	0.447	0.561
	FR1 n41	100M	QPSK	1	137	DFT-30	Front	10mm	Ant 3	ECI 8	518598	2592.99	20.60	21.70	1.288	-	-	-0.13	0.157	0.202
	FR1 n41	100M	QPSK	1	137	DFT-30	Back	10mm	Ant 3	ECI 8	518598	2592.99	20.60	21.70	1.288	-	-	0.06	0.188	0.242
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Side	10mm	Ant 3	ECI 8	518598	2592.99	20.60	21.70	1.288	-	-	-0.02	0.110	0.142
	FR1 n41	100M	QPSK	1	137	DFT-30	Top Side	10mm	Ant 3	ECI 8	518598	2592.99	20.60	21.70	1.288	-	-	-0.19	0.294	0.379
	FR1 n41	100M	QPSK	135	69	DFT-30	Front	10mm	Ant 3	ECI 8	518598	2592.99	20.49	21.70	1.321	-	-	0.13	0.156	0.206
	FR1 n41	100M	QPSK	135	69	DFT-30	Back	10mm	Ant 3	ECI 8	518598	2592.99	20.49	21.70	1.321	-	-	-0.16	0.191	0.252
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Side	10mm	Ant 3	ECI 8	518598	2592.99	20.49	21.70	1.321	-	-	-0.15	0.112	0.148
	FR1 n41	100M	QPSK	135	69	DFT-30	Top Side	10mm	Ant 3	ECI 8	518598	2592.99	20.49	21.70	1.321	-	-	-0.18	0.292	0.386
	FR1 n41	100M	QPSK	1	137	DFT-30	Front	10mm	Ant 1	ECI 8	518598	2592.99	22.70	24.00	1.349	-	-	-	n/a	n/a
	FR1 n41	100M	QPSK	1	137	DFT-30	Back	10mm	Ant 1	ECI 8	518598	2592.99	22.70	24.00	1.349	-	-	-	n/a	n/a
	FR1 n41	100M	QPSK	1	137	DFT-30	Left Side	10mm	Ant 1	ECI 8	518598	2592.99	22.70	24.00	1.349	-	-	-0.09	0.067	0.090
	FR1 n41	100M	QPSK	1	137	DFT-30	Top Side	10mm	Ant 1	ECI 8	518598	2592.99	22.70	24.00	1.349	-	-	-	n/a	n/a
	FR1 n41	100M	QPSK	135	69	DFT-30	Front	10mm	Ant 1	ECI 8	518598	2592.99	22.54	24.00	1.400	-	-	-	n/a	n/a
	FR1 n41	100M	QPSK	135	69	DFT-30	Back	10mm	Ant 1	ECI 8	518598	2592.99	22.54	24.00	1.400	-	-	-	n/a	n/a
	FR1 n41	100M	QPSK	135	69	DFT-30	Left Side	10mm	Ant 1	ECI 8	518598	2592.99	22.54	24.00	1.400	-	-	0.14	0.069	0.097
	FR1 n41	100M	QPSK	135	69	DFT-30	Top Side	10mm	Ant 1	ECI 8	518598	2592.99	22.54	24.00	1.400	-	-	-	n/a	n/a

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																
	Bluetooth	DH5 1Mbps	Front	10mm	Ant 6	Full Power	78	2480	12.00	14.00	1.585	76.27	1.311	0.13	0.114	0.237
41	Bluetooth	DH5 1Mbps	Back	10mm	Ant 6	Full Power	78	2480	12.00	14.00	1.585	76.27	1.311	0.1	0.176	0.366
	Bluetooth	DH5 1Mbps	Right Side	10mm	Ant 6	Full Power	78	2480	12.00	14.00	1.585	76.27	1.311	0	0.149	0.310
	Bluetooth	DH5 1Mbps	Top Side	10mm	Ant 6	Full Power	78	2480	12.00	14.00	1.585	76.27	1.311	-0.02	0.077	0.160
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 6	Standalone	6	2437	18.10	20.00	1.549	100	1.000	-0.09	0.181	0.280
42	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 6	Standalone	6	2437	18.10	20.00	1.549	100	1.000	0.03	0.256	0.396
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 6	Standalone	6	2437	18.10	20.00	1.549	100	1.000	0.04	0.221	0.342
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 6	Standalone	6	2437	18.10	20.00	1.549	100	1.000	0	0.143	0.221
5000MHz																
	WLAN5.2GHz	802.11n-HT40 MCS0	Front	10mm	Ant 9	Standalone	46	5230	13.08	15.00	1.556	91.3	1.095	-0.15	0.061	0.104
	WLAN5.2GHz	802.11n-HT40 MCS0	Back	10mm	Ant 9	Standalone	46	5230	13.08	15.00	1.556	91.3	1.095	-0.11	0.078	0.133
43	WLAN5.2GHz	802.11n-HT40 MCS0	Right Side	10mm	Ant 9	Standalone	46	5230	13.08	15.00	1.556	91.3	1.095	0.05	0.147	0.250
	WLAN5.2GHz	802.11n-HT40 MCS0	Top Side	10mm	Ant 9	Standalone	46	5230	13.08	15.00	1.556	91.3	1.095	-0.03	0.120	0.204
	WLAN5.8GHz	802.11n-HT40 MCS0	Front	10mm	Ant 9	Standalone	151	5755	11.63	13.50	1.538	91.3	1.095	-0.19	0.132	0.222
	WLAN5.8GHz	802.11n-HT40 MCS0	Back	10mm	Ant 9	Standalone	151	5755	11.63	13.50	1.538	91.3	1.095	-0.05	0.136	0.229
44	WLAN5.8GHz	802.11n-HT40 MCS0	Right Side	10mm	Ant 9	Standalone	151	5755	11.63	13.50	1.538	91.3	1.095	0.11	0.165	0.278
	WLAN5.8GHz	802.11n-HT40 MCS0	Top Side	10mm	Ant 9	Standalone	151	5755	11.63	13.50	1.538	91.3	1.095	0.1	0.124	0.209

14.3 Body Worn Accessory SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																				
	LTE Band 12	10M	QPSK	1	0	-	Front	15mm	Ant 0	ECI 3	23095	707.5	23.88	24.80	1.236	-	-	0.02	0.087	0.108
	LTE Band 12	10M	QPSK	1	0	-	Back	15mm	Ant 0	ECI 3	23095	707.5	23.88	24.80	1.236	-	-	0.15	0.091	0.112
	LTE Band 12	10M	QPSK	25	0	-	Front	15mm	Ant 0	ECI 3	23095	707.5	22.37	23.80	1.390	-	-	0.09	0.066	0.092
	LTE Band 12	10M	QPSK	25	0	-	Back	15mm	Ant 0	ECI 3	23095	707.5	22.37	23.80	1.390	-	-	0.16	0.066	0.092
	LTE Band 12	10M	QPSK	1	0	-	Front	15mm	Ant 1	ECI 3	23095	707.5	23.92	24.50	1.143	-	-	0.08	0.093	0.106
45	LTE Band 12	10M	QPSK	1	0	-	Back	15mm	Ant 1	ECI 3	23095	707.5	23.92	24.50	1.143	-	-	-0.01	0.111	0.127
	LTE Band 12	10M	QPSK	25	0	-	Front	15mm	Ant 1	ECI 3	23095	707.5	22.36	23.50	1.300	-	-	0.15	0.066	0.086
	LTE Band 12	10M	QPSK	25	0	-	Back	15mm	Ant 1	ECI 3	23095	707.5	22.36	23.50	1.300	-	-	0.17	0.082	0.107
	LTE Band 13	10M	QPSK	1	0	-	Front	15mm	Ant 0	ECI 3	23230	782	23.98	24.80	1.208	-	-	-0.14	0.160	0.193
46	LTE Band 13	10M	QPSK	1	0	-	Back	15mm	Ant 0	ECI 3	23230	782	23.98	24.80	1.208	-	-	-0.03	0.177	0.214
	LTE Band 13	10M	QPSK	25	0	-	Front	15mm	Ant 0	ECI 3	23230	782	22.50	23.80	1.349	-	-	0.11	0.115	0.155
	LTE Band 13	10M	QPSK	25	0	-	Back	15mm	Ant 0	ECI 3	23230	782	22.50	23.80	1.349	-	-	0.1	0.125	0.169
	LTE Band 13	10M	QPSK	1	0	-	Front	15mm	Ant 1	ECI 3	23230	782	24.00	24.50	1.122	-	-	-0.07	0.121	0.136
	LTE Band 13	10M	QPSK	1	0	-	Back	15mm	Ant 1	ECI 3	23230	782	24.00	24.50	1.122	-	-	-0.09	0.147	0.165
	LTE Band 13	10M	QPSK	25	0	-	Front	15mm	Ant 1	ECI 3	23230	782	22.51	23.50	1.256	-	-	-0.18	0.079	0.099
	LTE Band 13	10M	QPSK	25	0	-	Back	15mm	Ant 1	ECI 3	23230	782	22.51	23.50	1.256	-	-	0.19	0.098	0.123
835MHz																				
	GSM850	-	-	-	-	GPRS 4 Tx slots	Front	15mm	Ant 0	ECI 3	189	836.4	27.08	28.00	1.236	-	-	-0.06	0.157	0.194
47	GSM850	-	-	-	-	GPRS 4 Tx slots	Back	15mm	Ant 0	ECI 3	189	836.4	27.08	28.00	1.236	-	-	-0.04	0.190	0.235
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	15mm	Ant 0	ECI 3	4182	836.4	24.22	25.00	1.197	-	-	0.18	0.116	0.139
48	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 0	ECI 3	4182	836.4	24.22	25.00	1.197	-	-	-0.11	0.139	0.166
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	15mm	Ant 1	ECI 3	4182	836.4	24.20	25.00	1.202	-	-	0.1	0.055	0.066
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 1	ECI 3	4182	836.4	24.20	25.00	1.202	-	-	-0.09	0.051	0.061
	LTE Band 26	15M	QPSK	1	0	-	Front	15mm	Ant 0	ECI 3	26865	831.5	23.88	24.80	1.236	-	-	0.1	0.171	0.211
49	LTE Band 26	15M	QPSK	1	0	-	Back	15mm	Ant 0	ECI 3	26865	831.5	23.88	24.80	1.236	-	-	-0.03	0.202	0.250
	LTE Band 26	15M	QPSK	36	0	-	Front	15mm	Ant 0	ECI 3	26865	831.5	22.87	23.80	1.239	-	-	0.13	0.142	0.176
	LTE Band 26	15M	QPSK	36	0	-	Back	15mm	Ant 0	ECI 3	26865	831.5	22.87	23.80	1.239	-	-	0.18	0.165	0.204
	LTE Band 26	15M	QPSK	1	0	-	Front	15mm	Ant 1	ECI 3	26865	831.5	23.95	24.60	1.161	-	-	0.11	0.048	0.056
	LTE Band 26	15M	QPSK	1	0	-	Back	15mm	Ant 1	ECI 3	26865	831.5	23.95	24.60	1.161	-	-	-0.11	0.059	0.069
	LTE Band 26	15M	QPSK	36	0	-	Front	15mm	Ant 1	ECI 3	26865	831.5	22.90	23.60	1.175	-	-	-0.12	0.043	0.051
	LTE Band 26	15M	QPSK	36	0	-	Back	15mm	Ant 1	ECI 3	26865	831.5	22.90	23.60	1.175	-	-	-0.08	0.045	0.053
	FR1 n26	20M	QPSK	1	53	DFT-15	Front	15mm	Ant 0	ECI 3	166300	831.5	23.45	24.70	1.334	-	-	-0.11	0.158	0.211
	FR1 n26	20M	QPSK	1	53	DFT-15	Back	15mm	Ant 0	ECI 3	166300	831.5	23.45	24.70	1.334	-	-	-0.07	0.179	0.239
	FR1 n26	20M	QPSK	50	28	DFT-15	Front	15mm	Ant 0	ECI 3	166300	831.5	23.40	24.70	1.349	-	-	-0.03	0.170	0.229
50	FR1 n26	20M	QPSK	50	28	DFT-15	Back	15mm	Ant 0	ECI 3	166300	831.5	23.40	24.70	1.349	-	-	-0.03	0.185	0.250
	FR1 n26	20M	QPSK	1	53	DFT-15	Front	15mm	Ant 1	ECI 3	166300	831.5	23.40	24.50	1.288	-	-	0.09	0.065	0.084
	FR1 n26	20M	QPSK	1	53	DFT-15	Back	15mm	Ant 1	ECI 3	166300	831.5	23.40	24.50	1.288	-	-	0.02	0.062	0.080
	FR1 n26	20M	QPSK	50	28	DFT-15	Front	15mm	Ant 1	ECI 3	166300	831.5	23.37	24.50	1.297	-	-	0.17	0.056	0.073
	FR1 n26	20M	QPSK	50	28	DFT-15	Back	15mm	Ant 1	ECI 3	166300	831.5	23.37	24.50	1.297	-	-	0.12	0.051	0.066
1750MHz																				
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	15mm	Ant 4	ECI 3	1413	1732.6	22.98	23.50	1.127	-	-	-0.18	0.183	0.206
51	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 4	ECI 3	1413	1732.6	22.98	23.50	1.127	-	-	-0.07	0.237	0.267
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	15mm	Ant 3	ECI 3	1413	1732.6	22.69	23.00	1.074	-	-	-0.12	0.160	0.172
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 3	ECI 3	1413	1732.6	22.69	23.00	1.074	-	-	0.11	0.152	0.163
	LTE Band 4	20M	QPSK	1	0	-	Front	15mm	Ant 4	ECI 3	20175	1732.5	22.66	23.30	1.159	-	-	0.06	0.176	0.204
52	LTE Band 4	20M	QPSK	1	0	-	Back	15mm	Ant 4	ECI 3	20175	1732.5	22.66	23.30	1.159	-	-	-0.09	0.228	0.264
	LTE Band 4	20M	QPSK	50	0	-	Front	15mm	Ant 4	ECI 3	20175	1732.5	22.64	23.30	1.164	-	-	0.15	0.177	0.206
	LTE Band 4	20M	QPSK	50	0	-	Back	15mm	Ant 4	ECI 3	20175	1732.5	22.64	23.30	1.164	-	-	-0.07	0.223	0.260
	LTE Band 66	20M	QPSK	1	0	-	Front	15mm	Ant 4	ECI 3	132322	1745	22.60	23.10	1.122	-	-	0	0.165	0.185
53	LTE Band 66	20M	QPSK	1	0	-	Back	15mm	Ant 4	ECI 3	132322	1745	22.60	23.10	1.122	-	-	-0.01	0.212	0.238



FCC SAR Test Report

Report No. : FA551908

	LTE Band 66C	20M	QPSK	1	0	-	Back	15mm	Ant 4	ECI 3	132322+ 132520	1745+ 1764.8	22.53	23.10	1.140	-	-	0.03	0.189	0.216
	LTE Band 66	20M	QPSK	50	0	-	Front	15mm	Ant 4	ECI 3	132322	1745	22.58	23.10	1.127	-	-	-0.17	0.158	0.178
	LTE Band 66	20M	QPSK	50	0	-	Back	15mm	Ant 4	ECI 3	132322	1745	22.58	23.10	1.127	-	-	0.19	0.203	0.229
	LTE Band 66	20M	QPSK	1	0	-	Front	15mm	Ant 3	ECI 3	132322	1745	22.72	23.20	1.117	-	-	0.16	0.163	0.182
	LTE Band 66	20M	QPSK	1	0	-	Back	15mm	Ant 3	ECI 3	132322	1745	22.72	23.20	1.117	-	-	0.05	0.159	0.178
	LTE Band 66C	20M	QPSK	1	0	-	Front	15mm	Ant 3	ECI 3	132322+ 132520	1745+ 1764.8	22.62	23.20	1.143	-	-	-0.05	0.162	0.185
	LTE Band 66	20M	QPSK	50	0	-	Front	15mm	Ant 3	ECI 3	132322	1745	22.70	23.20	1.122	-	-	0.07	0.171	0.192
	LTE Band 66	20M	QPSK	50	0	-	Back	15mm	Ant 3	ECI 3	132322	1745	22.70	23.20	1.122	-	-	0.08	0.165	0.185
	LTE Band 66	20M	QPSK	1	0	-	Front	15mm	Ant 1	ECI 3	132322	1745	22.98	23.20	1.052	-	-	0.07	0.093	0.098
	LTE Band 66	20M	QPSK	1	0	-	Back	15mm	Ant 1	ECI 3	132322	1745	22.98	23.20	1.052	-	-	0.04	0.104	0.109
	LTE Band 66	20M	QPSK	50	0	-	Front	15mm	Ant 1	ECI 3	132322	1745	21.96	22.20	1.057	-	-	-0.02	0.063	0.067
	LTE Band 66	20M	QPSK	50	0	-	Back	15mm	Ant 1	ECI 3	132322	1745	21.96	22.20	1.057	-	-	0.18	0.076	0.080
	FR1 n66	40M	QPSK	1	108	DFT-15	Front	15mm	Ant 4	ECI 3	349000	1745	23.12	24.40	1.343	-	-	-0.11	0.199	0.267
	FR1 n66	40M	QPSK	1	108	DFT-15	Back	15mm	Ant 4	ECI 3	349000	1745	23.12	24.40	1.343	-	-	0.04	0.248	0.333
	FR1 n66	40M	QPSK	108	54	DFT-15	Front	15mm	Ant 4	ECI 3	349000	1745	23.07	24.40	1.358	-	-	0.1	0.198	0.269
54	FR1 n66	40M	QPSK	108	54	DFT-15	Back	15mm	Ant 4	ECI 3	349000	1745	23.07	24.40	1.358	-	-	0.06	0.249	0.338
	FR1 n66	40M	QPSK	1	108	DFT-15	Front	15mm	Ant 3	ECI 3	349000	1745	22.95	23.90	1.245	-	-	0	0.191	0.238
	FR1 n66	40M	QPSK	1	108	DFT-15	Back	15mm	Ant 3	ECI 3	349000	1745	22.95	23.90	1.245	-	-	0.12	0.184	0.229
	FR1 n66	40M	QPSK	108	54	DFT-15	Front	15mm	Ant 3	ECI 3	349000	1745	22.88	23.90	1.265	-	-	0.1	0.188	0.238
	FR1 n66	40M	QPSK	108	54	DFT-15	Back	15mm	Ant 3	ECI 3	349000	1745	22.88	23.90	1.265	-	-	0.04	0.181	0.229
	FR1 n66	40M	QPSK	1	108	DFT-15	Front	15mm	Ant 1	ECI 3	349000	1745	22.21	23.20	1.256	-	-	0.01	0.076	0.095
	FR1 n66	40M	QPSK	1	108	DFT-15	Back	15mm	Ant 1	ECI 3	349000	1745	22.21	23.20	1.256	-	-	-0.11	0.084	0.106
	FR1 n66	40M	QPSK	108	54	DFT-15	Front	15mm	Ant 1	ECI 3	349000	1745	22.16	23.20	1.271	-	-	0.13	0.074	0.094
	FR1 n66	40M	QPSK	108	54	DFT-15	Back	15mm	Ant 1	ECI 3	349000	1745	22.16	23.20	1.271	-	-	0.11	0.088	0.112
1900MHz																				
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Front	15mm	Ant 4	ECI 3	661	1880	25.70	26.50	1.202	-	-	-0.01	0.108	0.130
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Back	15mm	Ant 4	ECI 3	661	1880	25.70	26.50	1.202	-	-	-0.01	0.126	0.151
	GSM1900	-	-	-	-	GPRS 3 Tx slots	Front	15mm	Ant 3	ECI 3	661	1880	25.20	25.90	1.175	-	-	-0.07	0.278	0.327
55	GSM1900	-	-	-	-	GPRS 3 Tx slots	Back	15mm	Ant 3	ECI 3	661	1880	25.20	25.90	1.175	-	-	-0.03	0.346	0.407
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	15mm	Ant 4	ECI 3	9400	1880	23.32	23.50	1.042	-	-	-0.08	0.169	0.176
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 4	ECI 3	9400	1880	23.32	23.50	1.042	-	-	-0.05	0.222	0.231
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	15mm	Ant 3	ECI 3	9400	1880	22.32	22.40	1.019	-	-	-0.03	0.232	0.236
56	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	15mm	Ant 3	ECI 3	9400	1880	22.32	22.40	1.019	-	-	0.00	0.297	0.303
	LTE Band 2	20M	QPSK	1	0	-	Front	15mm	Ant 4	ECI 3	18900	1880	22.97	23.30	1.079	-	-	-0.01	0.169	0.182
	LTE Band 2	20M	QPSK	1	0	-	Back	15mm	Ant 4	ECI 3	18900	1880	22.97	23.30	1.079	-	-	-0.05	0.219	0.236
	LTE Band 2	20M	QPSK	50	0	-	Front	15mm	Ant 4	ECI 3	18900	1880	22.88	23.30	1.102	-	-	-0.19	0.158	0.174
	LTE Band 2	20M	QPSK	50	0	-	Back	15mm	Ant 4	ECI 3	18900	1880	22.88	23.30	1.102	-	-	-0.16	0.202	0.223
	LTE Band 2	20M	QPSK	1	0	-	Front	15mm	Ant 3	ECI 3	18900	1880	22.48	22.70	1.052	-	-	0.16	0.276	0.290
	LTE Band 2	20M	QPSK	1	0	-	Back	15mm	Ant 3	ECI 3	18900	1880	22.48	22.70	1.052	-	-	-0.19	0.305	0.321
	LTE Band 2	20M	QPSK	50	0	-	Front	15mm	Ant 3	ECI 3	18900	1880	22.45	22.70	1.059	-	-	0.04	0.275	0.291
57	LTE Band 2	20M	QPSK	50	0	-	Back	15mm	Ant 3	ECI 3	18900	1880	22.45	22.70	1.059	-	-	0.12	0.315	0.334
	FR1 n2	20M	QPSK	1	53	DFT-15	Front	15mm	Ant 4	ECI 3	376000	1880	23.17	24.20	1.268	-	-	0.15	0.160	0.203
	FR1 n2	20M	QPSK	1	53	DFT-15	Back	15mm	Ant 4	ECI 3	376000	1880	23.17	24.20	1.268	-	-	0.08	0.202	0.256
	FR1 n2	20M	QPSK	50	28	DFT-15	Front	15mm	Ant 4	ECI 3	376000	1880	23.15	24.20	1.274	-	-	-0.01	0.161	0.205
	FR1 n2	20M	QPSK	50	28	DFT-15	Back	15mm	Ant 4	ECI 3	376000	1880	23.15	24.20	1.274	-	-	-0.01	0.204	0.260
	FR1 n2	20M	QPSK	1	53	DFT-15	Front	15mm	Ant 3	ECI 3	376000	1880	21.80	22.70	1.230	-	-	0.18	0.242	0.298
	FR1 n2	20M	QPSK	1	53	DFT-15	Back	15mm	Ant 3	ECI 3	376000	1880	21.80	22.70	1.230	-	-	0.08	0.254	0.312
	FR1 n2	20M	QPSK	50	28	DFT-15	Front	15mm	Ant 3	ECI 3	376000	1880	21.75	22.70	1.245	-	-	0.07	0.250	0.311
58	FR1 n2	20M	QPSK	50	28	DFT-15	Back	15mm	Ant 3	ECI 3	376000	1880	21.75	22.70	1.245	-	-	0.04	0.278	0.346
2600MHz																				
	LTE Band 7	20M	QPSK	1	0	-	Front	15mm	Ant 4	ECI 3	21100	2535	23.08	23.50	1.102	-	-	-0.13	0.150	0.165
59	LTE Band 7	20M	QPSK	1	0	-	Back	15mm	Ant 4	ECI 3	21100	2535	23.08	23.50	1.102	-	-	-0.07	0.185	0.204
	LTE Band 7C	20M	QPSK	1	0	-	Back	15mm	Ant 4	ECI 3	21100+ 21298	2535+ 2554.8	22.99	23.50	1.125	-	-	0.09	0.177	0.199
	LTE Band 7	20M	QPSK	50	0	-	Front	15mm	Ant 4	ECI 3	21100	2535	22.42	23.00	1.143	-	-	0.04	0.123	0.141
	LTE Band 7	20M	QPSK	50	0	-	Back	15mm	Ant 4	ECI 3	21100	2535	22.42	23.00	1.143	-	-	-0.13	0.156	0.178



FCC SAR Test Report

Report No. : FA551908

	LTE Band 7	20M	QPSK	1	0	-	Front	15mm	Ant 3	ECI 3	21100	2535	21.05	21.50	1.109	-	-	-	n/a	n/a
	LTE Band 7	20M	QPSK	1	0	-	Back	15mm	Ant 3	ECI 3	21100	2535	21.05	21.50	1.109	-	-	-0.1	0.056	0.062
	LTE Band 7C	20M	QPSK	1	0	-	Back	15mm	Ant 3	ECI 3	21100+ 21298	2535+ 2554.8	21.01	21.50	1.119	-	-	0.08	0.050	0.056
	LTE Band 7	20M	QPSK	50	0	-	Front	15mm	Ant 3	ECI 3	21100	2535	21.03	21.50	1.114	-	-	-	n/a	n/a
	LTE Band 7	20M	QPSK	50	0	-	Back	15mm	Ant 3	ECI 3	21100	2535	21.03	21.50	1.114	-	-	-0.06	0.058	0.065
	LTE Band 7	20M	QPSK	1	0	-	Front	15mm	Ant 1	ECI 3	21100	2535	22.33	23.00	1.167	-	-	-	n/a	n/a
	LTE Band 7	20M	QPSK	1	0	-	Back	15mm	Ant 1	ECI 3	21100	2535	22.33	23.00	1.167	-	-	-	n/a	n/a
	LTE Band 7	20M	QPSK	50	0	-	Front	15mm	Ant 1	ECI 3	21100	2535	21.15	22.00	1.216	-	-	-	n/a	n/a
	LTE Band 7	20M	QPSK	50	0	-	Back	15mm	Ant 1	ECI 3	21100	2535	21.15	22.00	1.216	-	-	-	n/a	n/a
	LTE Band 41	20M	QPSK	1	0	-	Front	15mm	Ant 4	ECI 3	39750	2506	24.50	24.80	1.072	62.9	1.006	-0.03	0.118	0.127
	LTE Band 41	20M	QPSK	1	0	-	Back	15mm	Ant 4	ECI 3	39750	2506	24.50	24.80	1.072	62.9	1.006	0.05	0.146	0.157
	LTE Band 41C	20M	QPSK	1	0	-	Back	15mm	Ant 4	ECI 3	39750 39948	2506 2525.8	24.40	24.80	1.096	62.9	1.006	0.02	0.135	0.149
	LTE Band 41	20M	QPSK	50	0	-	Front	15mm	Ant 4	ECI 3	39750	2506	22.10	23.80	1.479	62.9	1.006	-0.18	0.133	0.198
60	LTE Band 41	20M	QPSK	50	0	-	Back	15mm	Ant 4	ECI 3	39750	2506	22.10	23.80	1.479	62.9	1.006	0.18	0.151	0.225
	LTE Band 41	20M	QPSK	1	0	-	Front	15mm	Ant 3	ECI 3	39750	2506	22.28	22.30	1.005	62.9	1.006	-	n/a	n/a
	LTE Band 41	20M	QPSK	1	0	-	Back	15mm	Ant 3	ECI 3	39750	2506	22.28	22.30	1.005	62.9	1.006	-	n/a	n/a
	LTE Band 41C	20M	QPSK	1	0	-	Back	15mm	Ant 3	ECI 3	39750	2506	22.20	22.30	1.023	62.9	1.006	-	n/a	n/a
	LTE Band 41	20M	QPSK	50	0	-	Front	15mm	Ant 3	ECI 3	39750	2506	21.43	22.30	1.222	62.9	1.006	-	n/a	n/a
	LTE Band 41	20M	QPSK	50	0	-	Back	15mm	Ant 3	ECI 3	39750	2506	21.43	22.30	1.222	62.9	1.006	-	n/a	n/a
	LTE Band 41	20M	QPSK	1	0	-	Front	15mm	Ant 1	ECI 3	39750	2506	23.38	23.50	1.028	62.9	1.006	-	n/a	n/a
	LTE Band 41	20M	QPSK	1	0	-	Back	15mm	Ant 1	ECI 3	39750	2506	23.38	23.50	1.028	62.9	1.006	-	n/a	n/a
	LTE Band 41	20M	QPSK	50	0	-	Front	15mm	Ant 1	ECI 3	39750	2506	20.69	22.50	1.517	62.9	1.006	-	n/a	n/a
	LTE Band 41	20M	QPSK	50	0	-	Back	15mm	Ant 1	ECI 3	39750	2506	20.69	22.50	1.517	62.9	1.006	-	n/a	n/a
	FR1 n7	50M	QPSK	1	135	DFT-15	Front	15mm	Ant 4	ECI 3	507000	2535	22.70	23.70	1.259	-	-	0.15	0.128	0.161
	FR1 n7	50M	QPSK	1	135	DFT-15	Back	15mm	Ant 4	ECI 3	507000	2535	22.70	23.70	1.259	-	-	0.16	0.160	0.201
	FR1 n7	50M	QPSK	135	68	DFT-15	Front	15mm	Ant 4	ECI 3	507000	2535	22.69	23.70	1.262	-	-	0.06	0.133	0.168
61	FR1 n7	50M	QPSK	135	68	DFT-15	Back	15mm	Ant 4	ECI 3	507000	2535	22.69	23.70	1.262	-	-	-0.05	0.169	0.213
	FR1 n7	50M	QPSK	1	135	DFT-15	Front	15mm	Ant 3	ECI 3	507000	2535	21.68	22.50	1.208	-	-	-0.04	0.072	0.087
	FR1 n7	50M	QPSK	1	135	DFT-15	Back	15mm	Ant 3	ECI 3	507000	2535	21.68	22.50	1.208	-	-	-0.15	0.089	0.107
	FR1 n7	50M	QPSK	135	68	DFT-15	Front	15mm	Ant 3	ECI 3	507000	2535	21.64	22.50	1.219	-	-	-0.04	0.068	0.083
	FR1 n7	50M	QPSK	135	68	DFT-15	Back	15mm	Ant 3	ECI 3	507000	2535	21.64	22.50	1.219	-	-	-0.17	0.088	0.107
	FR1 n7	50M	QPSK	1	135	DFT-15	Front	15mm	Ant 1	ECI 3	507000	2535	22.25	23.00	1.189	-	-	-	n/a	n/a
	FR1 n7	50M	QPSK	1	135	DFT-15	Back	15mm	Ant 1	ECI 3	507000	2535	22.25	23.00	1.189	-	-	-	n/a	n/a
	FR1 n7	50M	QPSK	135	68	DFT-15	Front	15mm	Ant 1	ECI 3	507000	2535	22.17	23.00	1.211	-	-	-	n/a	n/a
	FR1 n7	50M	QPSK	135	68	DFT-15	Back	15mm	Ant 1	ECI 3	507000	2535	22.17	23.00	1.211	-	-	-	n/a	n/a
	FR1 n41	100M	QPSK	1	137	DFT-30	Front	15mm	Ant 4	ECI 3	518598	2592.99	22.75	23.70	1.245	-	-	-0.14	0.127	0.158
	FR1 n41	100M	QPSK	1	137	DFT-30	Back	15mm	Ant 4	ECI 3	518598	2592.99	22.75	23.70	1.245	-	-	-0.16	0.141	0.175
	FR1 n41	100M	QPSK	135	69	DFT-30	Front	15mm	Ant 4	ECI 3	518598	2592.99	22.71	23.70	1.256	-	-	0.05	0.125	0.157
62	FR1 n41	100M	QPSK	135	69	DFT-30	Back	15mm	Ant 4	ECI 3	518598	2592.99	22.71	23.70	1.256	-	-	0.11	0.158	0.198
	FR1 n41	100M	QPSK	1	137	DFT-30	Front	15mm	Ant 3	ECI 3	518598	2592.99	20.60	21.70	1.288	-	-	-0.14	0.072	0.093
	FR1 n41	100M	QPSK	1	137	DFT-30	Back	15mm	Ant 3	ECI 3	518598	2592.99	20.60	21.70	1.288	-	-	0.01	0.087	0.112
	FR1 n41	100M	QPSK	135	69	DFT-30	Front	15mm	Ant 3	ECI 3	518598	2592.99	20.49	21.70	1.321	-	-	0	0.073	0.096
	FR1 n41	100M	QPSK	135	69	DFT-30	Back	15mm	Ant 3	ECI 3	518598	2592.99	20.49	21.70	1.321	-	-	-0.07	0.085	0.112
	FR1 n41	100M	QPSK	1	137	DFT-30	Front	15mm	Ant 1	ECI 3	518598	2592.99	22.70	24.00	1.349	-	-	-	n/a	n/a
	FR1 n41	100M	QPSK	1	137	DFT-30	Back	15mm	Ant 1	ECI 3	518598	2592.99	22.70	24.00	1.349	-	-	-	n/a	n/a
	FR1 n41	100M	QPSK	135	69	DFT-30	Front	15mm	Ant 1	ECI 3	518598	2592.99	22.54	24.00	1.400	-	-	-	n/a	n/a
	FR1 n41	100M	QPSK	135	69	DFT-30	Back	15mm	Ant 1	ECI 3	518598	2592.99	22.54	24.00	1.400	-	-	-	n/a	n/a



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																
	Bluetooth	DH5 1Mbps	Front	15mm	Ant 6	Full Power	78	2480	12.00	14.00	1.585	76.27	1.311	0.16	0.028	0.058
63	Bluetooth	DH5 1Mbps	Back	15mm	Ant 6	Full Power	78	2480	12.00	14.00	1.585	76.27	1.311	-0.01	0.033	0.068
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Ant 6	Standalone	6	2437	18.10	20.00	1.549	100	1.000	0.08	0.103	0.160
64	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 6	Standalone	6	2437	18.10	20.00	1.549	100	1.000	-0.18	0.119	0.184
5000MHz																
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	15mm	Ant 9	Standalone	54	5270	15.18	17.00	1.521	91.3	1.095	0.01	0.021	0.035
65	WLAN5.3GHz	802.11n-HT40 MCS0	Back	15mm	Ant 9	Standalone	54	5270	15.18	17.00	1.521	91.3	1.095	-0.06	0.026	0.043
	WLAN5.5GHz	802.11n-HT40 MCS0	Front	15mm	Ant 9	Standalone	110	5550	15.08	17.00	1.556	91.3	1.095	-0.08	0.098	0.167
66	WLAN5.5GHz	802.11n-HT40 MCS0	Back	15mm	Ant 9	Standalone	110	5550	15.08	17.00	1.556	91.3	1.095	-0.03	0.121	0.206
	WLAN5.8GHz	802.11n-HT40 MCS0	Front	15mm	Ant 9	Standalone	151	5755	11.63	13.50	1.538	91.3	1.095	-0.08	0.080	0.135
67	WLAN5.8GHz	802.11n-HT40 MCS0	Back	15mm	Ant 9	Standalone	151	5755	11.63	13.50	1.538	91.3	1.095	-0.01	0.083	0.140



14.4 Product specific 10g SAR

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
5000MHz																
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	0mm	Ant 9	Standalone	54	5270	15.18	17.00	1.521	91.3	1.095	0.08	0.461	0.768
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0mm	Ant 9	Standalone	54	5270	15.18	17.00	1.521	91.3	1.095	-0.11	0.194	0.323
68	WLAN5.3GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 9	Standalone	54	5270	15.18	17.00	1.521	91.3	1.095	-0.03	0.792	1.319
	WLAN5.3GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 9	Standalone	54	5270	15.18	17.00	1.521	91.3	1.095	-0.18	0.019	0.032
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 9	Standalone	62	5310	12.43	14.00	1.435	91.3	1.095	-0.01	0.302	0.475
	WLAN5.5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 9	Standalone	110	5550	15.08	17.00	1.556	91.3	1.095	0.04	0.808	1.377
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 9	Standalone	110	5550	15.08	17.00	1.556	91.3	1.095	0.07	0.410	0.699
	WLAN5.5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 9	Standalone	110	5550	15.08	17.00	1.556	91.3	1.095	-0.18	1.250	2.130
	WLAN5.5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 9	Standalone	110	5550	15.08	17.00	1.556	91.3	1.095	-0.06	0.072	0.123
	WLAN5.5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 9	Standalone	102	5510	11.40	13.00	1.445	91.3	1.095	0.04	0.540	0.855
69	WLAN5.5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 9	Standalone	126	5630	15.05	17.00	1.567	91.3	1.095	0.13	1.370	2.350
	WLAN5.5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 9	Standalone	134	5670	10.56	12.50	1.563	91.3	1.095	-0.07	0.522	0.893



14.5 Repeated SAR Measurement

<1g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	ECI 5	4182	836.4	24.20	25.00	1.202	-	-	0.11	0.888	1	1.068
2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	ECI 5	4182	836.4	24.20	25.00	1.202	-	-	0.02	0.871	1.020	1.047
1st	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	ECI 5	132072	1720	22.95	23.20	1.059	-	-	0.06	1.110	1	1.176
2nd	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	ECI 5	132072	1720	22.95	23.20	1.059	-	-	-0.09	1.050	1.057	1.112
1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 3	ECI 5	9400	1880	18.29	18.40	1.026	-	-	-0.03	1.090	1	1.118
2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 3	ECI 5	9400	1880	18.29	18.40	1.026	-	-	0.07	1.020	1.069	1.046
1st	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	41490	2680	22.18	22.30	1.028	62.9	1.006	0.16	0.929	1	0.961
2nd	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 3	ECI 5	41490	2680	22.18	22.30	1.028	62.9	1.006	0.07	0.914	1.016	0.945

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	WWAN + 2.4GHz WLAN	Yes	Yes	Yes	Yes
2.	WWAN + 5GHz WLAN	Yes	Yes	Yes	Yes
3.	WWAN + Bluetooth	Yes	Yes	Yes	Yes
4.	5GHz WLAN + Bluetooth	Yes	Yes	Yes	Yes
5.	WWAN +5GHz WLAN + Bluetooth	Yes	Yes	Yes	Yes
6.	WWAN + 2.4GHz WLAN + NFC				Yes
7.	WWAN + 5GHz WLAN + NFC				Yes
8.	WWAN + Bluetooth + NFC				Yes
9.	5GHz WLAN + Bluetooth + NFC				Yes
10.	WWAN +5GHz WLAN + Bluetooth + NFC				Yes

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA, LTE and 5GNR (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
- EUT will choose each GSM, WCDMA, LTE and 5GNR according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- WWAN above includes 5G NR bands and EN-DC combination.
- This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
- This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
- WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz and Bluetooth can transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz and WLAN 2.4GHz can't transmit simultaneously.
- NFC can transmit simultaneously with other Radios in extremity exposure condition.
- The maximum SAR summation is calculated based on the same configuration and test position.
- All licensed modes share the same antenna part and cannot transmit simultaneously.
- For standalone WWAN, always choose the highest SAR among all the selected WWAN bands within the selected antenna for each exposure position to perform simultaneous transmission analysis with WLAN/BT. This is the worst co-located analysis and can represent each band.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.



15.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	3	4	5	1+3	1+4+5
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 9	Bluetooth Ant 6	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
All Bands Ant 0	Right Cheek	0.288	0.247	0.257	0.181	0.54	0.73
	Right Tilted	0.171	0.244	0.111	0.164	0.42	0.45
	Left Cheek	0.263	0.626	0.527	0.609	0.89	1.40
	Left Tilted	0.124	0.539	0.286	0.440	0.66	0.85
All Bands Ant 1	Right Cheek	1.068	0.247	0.257	0.181	1.32	1.51
	Right Tilted	0.794	0.244	0.111	0.164	1.04	1.07
	Left Cheek	0.360	0.626	0.527	0.609	0.99	1.50
	Left Tilted	0.222	0.539	0.286	0.440	0.76	0.95
All Bands Ant 3	Right Cheek	1.118	0.247	0.257	0.181	1.37	1.56
	Right Tilted	1.108	0.244	0.111	0.164	1.35	1.38
	Left Cheek	0.443	0.626	0.527	0.609	1.07	1.58
	Left Tilted	0.533	0.539	0.286	0.440	1.07	1.26
All Bands Ant 4	Right Cheek	0.151	0.247	0.257	0.181	0.40	0.59
	Right Tilted	0.101	0.244	0.111	0.164	0.35	0.38
	Left Cheek	0.194	0.626	0.527	0.609	0.82	1.33
	Left Tilted	0.086	0.539	0.286	0.440	0.63	0.81

WWAN Band	FR1 Band	Exposure Position	1	2	3	4	5	1+2+3	1+2+4+5
			WWAN	FR1	WLAN2.4GHz Ant 6	WLAN5GHz Ant 9	Bluetooth Ant 6	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
LTE All Bands Ant 0	NR All Bands Ant 1	Right Cheek	0.222	0.393	0.247	0.257	0.181	0.86	1.05
		Right Tilted	0.131	0.336	0.244	0.111	0.164	0.71	0.74
		Left Cheek	0.188	0.168	0.626	0.527	0.609	0.98	1.49
		Left Tilted	0.096	0.222	0.539	0.286	0.440	0.86	1.04
LTE All Bands Ant 0	NR All Bands Ant 3	Right Cheek	0.222	0.907	0.247	0.257	0.181	1.38	1.57
		Right Tilted	0.131	0.824	0.244	0.111	0.164	1.20	1.23
		Left Cheek	0.188	0.208	0.626	0.527	0.609	1.02	1.53
		Left Tilted	0.096	0.481	0.539	0.286	0.440	1.12	1.30
LTE All Bands Ant 0	NR All Bands Ant 4	Right Cheek	0.222	0.132	0.247	0.257	0.181	0.60	0.79
		Right Tilted	0.131	0.101	0.244	0.111	0.164	0.48	0.51
		Left Cheek	0.188	0.194	0.626	0.527	0.609	1.01	1.52
		Left Tilted	0.096	0.071	0.539	0.286	0.440	0.71	0.89
LTE All Bands Ant 3	NR All Bands Ant 0	Right Cheek	0.519	0.232	0.247	0.257	0.181	1.00	1.19
		Right Tilted	0.953	0.131	0.244	0.111	0.164	1.33	1.36
		Left Cheek	0.223	0.198	0.626	0.527	0.609	1.05	1.56
		Left Tilted	0.515	0.104	0.539	0.286	0.440	1.16	1.35
LTE All Bands Ant 3	NR All Bands Ant 1	Right Cheek	0.519	0.393	0.247	0.257	0.181	1.16	1.35
		Right Tilted	0.953	0.336	0.244	0.111	0.164	1.53	1.56
		Left Cheek	0.223	0.168	0.626	0.527	0.609	1.02	1.53
		Left Tilted	0.515	0.222	0.539	0.286	0.440	1.28	1.46
LTE All Bands Ant 3	NR All Bands Ant 4	Right Cheek	0.519	0.132	0.247	0.257	0.181	0.90	1.09
		Right Tilted	0.953	0.101	0.244	0.111	0.164	1.30	1.33
		Left Cheek	0.223	0.194	0.626	0.527	0.609	1.04	1.55
		Left Tilted	0.515	0.071	0.539	0.286	0.440	1.13	1.31
LTE All Bands Ant 4	NR All Bands Ant 0	Right Cheek	0.125	0.232	0.247	0.257	0.181	0.60	0.80
		Right Tilted	0.093	0.131	0.244	0.111	0.164	0.47	0.50
		Left Cheek	0.149	0.198	0.626	0.527	0.609	0.97	1.48
		Left Tilted	0.072	0.104	0.539	0.286	0.440	0.72	0.90
LTE All Bands Ant 4	NR All Bands Ant 1	Right Cheek	0.125	0.393	0.247	0.257	0.181	0.77	0.96



FCC SAR Test Report

Report No. : FA551908

		Right Tilted	0.093	0.336	0.244	0.111	0.164	0.67	0.70
		Left Cheek	0.149	0.168	0.626	0.527	0.609	0.94	1.45
		Left Tilted	0.072	0.222	0.539	0.286	0.440	0.83	1.02
		Right Cheek	0.125	0.907	0.247	0.257	0.181	1.28	1.47
LTE All Bands Ant 4	NR All Bands Ant 3	Right Tilted	0.093	0.824	0.244	0.111	0.164	1.16	1.19
		Left Cheek	0.149	0.208	0.626	0.527	0.609	0.98	1.49
		Left Tilted	0.072	0.481	0.539	0.286	0.440	1.09	1.28

WWAN Band	WWAN Band	Exposure Position	1	2	3	4	5	1+2+3	1+2+4+5
			WWAN	WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 9	Bluetooth Ant 6	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
LTE All Bands Ant 0	LTE All Bands Ant 1	Right Cheek	0.222	0.410	0.247	0.257	0.181	0.88	1.07
		Right Tilted	0.131	0.344	0.244	0.111	0.164	0.72	0.75
		Left Cheek	0.188	0.175	0.626	0.527	0.609	0.99	1.50
		Left Tilted	0.096	0.201	0.539	0.286	0.440	0.84	1.02
LTE All Bands Ant 0	LTE All Bands Ant 3	Right Cheek	0.222	0.519	0.247	0.257	0.181	0.99	1.18
		Right Tilted	0.131	0.953	0.244	0.111	0.164	1.33	1.36
		Left Cheek	0.188	0.223	0.626	0.527	0.609	1.04	1.55
		Left Tilted	0.096	0.515	0.539	0.286	0.440	1.15	1.34
LTE All Bands Ant 0	LTE All Bands Ant 4	Right Cheek	0.222	0.125	0.247	0.257	0.181	0.59	0.79
		Right Tilted	0.131	0.093	0.244	0.111	0.164	0.47	0.50
		Left Cheek	0.188	0.149	0.626	0.527	0.609	0.96	1.47
		Left Tilted	0.096	0.072	0.539	0.286	0.440	0.71	0.89
LTE All Bands Ant 1	LTE All Bands Ant 3	Right Cheek	0.410	0.519	0.247	0.257	0.181	1.18	1.37
		Right Tilted	0.344	0.953	0.244	0.111	0.164	1.54	1.57
		Left Cheek	0.175	0.223	0.626	0.527	0.609	1.02	1.53
		Left Tilted	0.201	0.515	0.539	0.286	0.440	1.26	1.44
LTE All Bands Ant 1	LTE All Bands Ant 4	Right Cheek	0.410	0.125	0.247	0.257	0.181	0.78	0.97
		Right Tilted	0.344	0.093	0.244	0.111	0.164	0.68	0.71
		Left Cheek	0.175	0.149	0.626	0.527	0.609	0.95	1.46
		Left Tilted	0.201	0.072	0.539	0.286	0.440	0.81	1.00
LTE All Bands Ant 3	LTE All Bands Ant 4	Right Cheek	0.519	0.125	0.247	0.257	0.181	0.89	1.08
		Right Tilted	0.953	0.093	0.244	0.111	0.164	1.29	1.32
		Left Cheek	0.223	0.149	0.626	0.527	0.609	1.00	1.51
		Left Tilted	0.515	0.072	0.539	0.286	0.440	1.13	1.31

15.2 Hotspot Exposure Conditions

Exposure Position	4	5	4+5
	WLAN5GHz Ant 9	Bluetooth Ant 6	Summed
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
Front	0.222	0.237	0.46
Back	0.229	0.366	0.60
Left side			0.00
Right side	0.278	0.310	0.59
Top side	0.209	0.160	0.37
Bottom side			0.00

WWAN Band	Exposure Position	1	3	4	5	1+3	1+4+5
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 9	Bluetooth Ant 6	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
All Bands Ant 0	Front	0.288	0.280	0.222	0.237	0.57	0.75
	Back	0.370	0.396	0.229	0.366	0.77	0.97
	Left side					0.00	0.00
	Right side	0.382	0.342	0.278	0.310	0.72	0.97
	Top side		0.221	0.209	0.160	0.22	0.37
	Bottom side	0.245				0.25	0.25
All Bands Ant 1	Front	0.272	0.280	0.222	0.237	0.55	0.73
	Back	0.337	0.396	0.229	0.366	0.73	0.93
	Left side	0.524				0.52	0.52
	Right side		0.342	0.278	0.310	0.34	0.59
	Top side	0.077	0.221	0.209	0.160	0.30	0.45
	Bottom side					0.00	0.00
All Bands Ant 3	Front	0.497	0.280	0.222	0.237	0.78	0.96
	Back	0.468	0.396	0.229	0.366	0.86	1.06
	Left side	0.186				0.19	0.19
	Right side		0.342	0.278	0.310	0.34	0.59
	Top side	0.650	0.221	0.209	0.160	0.87	1.02
	Bottom side					0.00	0.00
All Bands Ant 4	Front	0.516	0.280	0.222	0.237	0.80	0.98
	Back	0.584	0.396	0.229	0.366	0.98	1.18
	Left side	0.163				0.16	0.16
	Right side		0.342	0.278	0.310	0.34	0.59
	Top side		0.221	0.209	0.160	0.22	0.37
	Bottom side	0.967				0.97	0.97

WWAN Band	FR1 Band	Exposure Position	1	2	3	4	5	1+2+3	1+2+4+5
			WWAN	FR1	WLAN2.4GHz Ant 6	WLAN5GHz Ant 9	Bluetooth Ant 6	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
LTE All Bands Ant 0	NR All Bands Ant 1	Front	0.203	0.219	0.280	0.222	0.237	0.70	0.88
		Back	0.266	0.254	0.396	0.229	0.366	0.92	1.12
		Left side		0.478				0.48	0.48
		Right side	0.294		0.342	0.278	0.310	0.64	0.88
		Top side		0.058	0.221	0.209	0.160	0.28	0.43
		Bottom side	0.171					0.17	0.17
LTE All Bands Ant 0	NR All Bands Ant 3	Front	0.203	0.497	0.280	0.222	0.237	0.98	1.16
		Back	0.266	0.468	0.396	0.229	0.366	1.13	1.33
		Left side		0.186				0.19	0.19
		Right side	0.294		0.342	0.278	0.310	0.64	0.88
		Top side		0.650	0.221	0.209	0.160	0.87	1.02
		Bottom side	0.171					0.17	0.17



FCC SAR Test Report

Report No. : FA551908

LTE All Bands Ant 0	NR All Bands Ant 4	Front	0.203	0.516	0.280	0.222	0.237	1.00	1.18
		Back	0.266	0.584	0.396	0.229	0.366	1.25	1.45
		Left side		0.163				0.16	0.16
		Right side	0.294		0.342	0.278	0.310	0.64	0.88
		Top side			0.221	0.209	0.160	0.22	0.37
		Bottom side	0.171	0.967				1.14	1.14
LTE All Bands Ant 3	NR All Bands Ant 0	Front	0.404	0.244	0.280	0.222	0.237	0.93	1.11
		Back	0.402	0.316	0.396	0.229	0.366	1.11	1.31
		Left side	0.160					0.16	0.16
		Right side		0.349	0.342	0.278	0.310	0.69	0.94
		Top side	0.592		0.221	0.209	0.160	0.81	0.96
		Bottom side		0.205				0.21	0.21
LTE All Bands Ant 3	NR All Bands Ant 1	Front	0.404	0.219	0.280	0.222	0.237	0.90	1.08
		Back	0.402	0.254	0.396	0.229	0.366	1.05	1.25
		Left side	0.160	0.478				0.64	0.64
		Right side			0.342	0.278	0.310	0.34	0.59
		Top side	0.592	0.058	0.221	0.209	0.160	0.87	1.02
		Bottom side						0.00	0.00
LTE All Bands Ant 3	NR All Bands Ant 4	Front	0.404	0.516	0.280	0.222	0.237	1.20	1.38
		Back	0.402	0.584	0.396	0.229	0.366	1.38	1.58
		Left side	0.160	0.163				0.32	0.32
		Right side			0.342	0.278	0.310	0.34	0.59
		Top side	0.592		0.221	0.209	0.160	0.81	0.96
		Bottom side		0.967				0.97	0.97
LTE All Bands Ant 4	NR All Bands Ant 0	Front	0.248	0.244	0.280	0.222	0.237	0.77	0.95
		Back	0.313	0.316	0.396	0.229	0.366	1.03	1.22
		Left side	0.081					0.08	0.08
		Right side		0.349	0.342	0.278	0.310	0.69	0.94
		Top side			0.221	0.209	0.160	0.22	0.37
		Bottom side	0.434	0.205				0.64	0.64
LTE All Bands Ant 4	NR All Bands Ant 1	Front	0.248	0.219	0.280	0.222	0.237	0.75	0.93
		Back	0.313	0.254	0.396	0.229	0.366	0.96	1.16
		Left side	0.081	0.478				0.56	0.56
		Right side			0.342	0.278	0.310	0.34	0.59
		Top side		0.058	0.221	0.209	0.160	0.28	0.43
		Bottom side	0.434					0.43	0.43
LTE All Bands Ant 4	NR All Bands Ant 3	Front	0.248	0.497	0.280	0.222	0.237	1.03	1.20
		Back	0.313	0.468	0.396	0.229	0.366	1.18	1.38
		Left side	0.081	0.186				0.27	0.27
		Right side			0.342	0.278	0.310	0.34	0.59
		Top side		0.650	0.221	0.209	0.160	0.87	1.02
		Bottom side	0.434					0.43	0.43



WWAN Band	WWAN Band	Exposure Position	1	2	3	4	5	1+2+3	1+2+4+5
			WWAN	WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 9	Bluetooth Ant 6	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
LTE All Bands Ant 0	LTE All Bands Ant 1	Front	0.203	0.259	0.280	0.222	0.237	0.74	0.92
		Back	0.266	0.324	0.396	0.229	0.366	0.99	1.19
		Left side		0.453				0.45	0.45
		Right side	0.294		0.342	0.278	0.310	0.64	0.88
		Top side		0.074	0.221	0.209	0.160	0.30	0.44
		Bottom side	0.171					0.17	0.17
LTE All Bands Ant 0	LTE All Bands Ant 3	Front	0.203	0.404	0.280	0.222	0.237	0.89	1.07
		Back	0.266	0.402	0.396	0.229	0.366	1.06	1.26
		Left side		0.160				0.16	0.16
		Right side	0.294		0.342	0.278	0.310	0.64	0.88
		Top side		0.592	0.221	0.209	0.160	0.81	0.96
		Bottom side	0.171					0.17	0.17
LTE All Bands Ant 0	LTE All Bands Ant 4	Front	0.203	0.248	0.280	0.222	0.237	0.73	0.91
		Back	0.266	0.313	0.396	0.229	0.366	0.98	1.17
		Left side		0.081				0.08	0.08
		Right side	0.294		0.342	0.278	0.310	0.64	0.88
		Top side			0.221	0.209	0.160	0.22	0.37
		Bottom side	0.171	0.434				0.61	0.61
LTE All Bands Ant 1	LTE All Bands Ant 3	Front	0.259	0.404	0.280	0.222	0.237	0.94	1.12
		Back	0.324	0.402	0.396	0.229	0.366	1.12	1.32
		Left side	0.453	0.160				0.61	0.61
		Right side			0.342	0.278	0.310	0.34	0.59
		Top side	0.074	0.592	0.221	0.209	0.160	0.89	1.04
		Bottom side						0.00	0.00
LTE All Bands Ant 1	LTE All Bands Ant 4	Front	0.259	0.248	0.280	0.222	0.237	0.79	0.97
		Back	0.324	0.313	0.396	0.229	0.366	1.03	1.23
		Left side	0.453	0.081				0.53	0.53
		Right side			0.342	0.278	0.310	0.34	0.59
		Top side	0.074		0.221	0.209	0.160	0.30	0.44
		Bottom side		0.434				0.43	0.43
LTE All Bands Ant 3	LTE All Bands Ant 4	Front	0.404	0.248	0.280	0.222	0.237	0.93	1.11
		Back	0.402	0.313	0.396	0.229	0.366	1.11	1.31
		Left side	0.160	0.081				0.24	0.24
		Right side			0.342	0.278	0.310	0.34	0.59
		Top side	0.592		0.221	0.209	0.160	0.81	0.96
		Bottom side		0.434				0.43	0.43

**15.3 Body-Worn Accessory Exposure Conditions**

WWAN Band	Exposure Position	1	3	4	5	1+3	1+4+5
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 9	Bluetooth Ant 6	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
All Bands Ant 0	Front	0.229	0.160	0.167	0.058	0.39	0.45
	Back	0.250	0.184	0.206	0.068	0.43	0.52
All Bands Ant 1	Front	0.136	0.160	0.167	0.058	0.30	0.36
	Back	0.165	0.184	0.206	0.068	0.35	0.44
All Bands Ant 3	Front	0.327	0.160	0.167	0.058	0.49	0.55
	Back	0.407	0.184	0.206	0.068	0.59	0.68
All Bands Ant 4	Front	0.269	0.160	0.167	0.058	0.43	0.49
	Back	0.338	0.184	0.206	0.068	0.52	0.61

WWAN Band	FR1 Band	Exposure Position	1	2	3	4	5	1+2+3	1+2+4+5
			WWAN	FR1	WLAN2.4GHz Ant 6	WLAN5GHz Ant 9	Bluetooth Ant 6	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
LTE All Bands Ant 0	NR All Bands Ant 1	Front	0.211	0.095	0.160	0.167	0.058	0.47	0.53
		Back	0.250	0.112	0.184	0.206	0.068	0.55	0.64
LTE All Bands Ant 0	NR All Bands Ant 3	Front	0.211	0.238	0.160	0.167	0.058	0.61	0.67
		Back	0.250	0.229	0.184	0.206	0.068	0.66	0.75
LTE All Bands Ant 0	NR All Bands Ant 4	Front	0.211	0.269	0.160	0.167	0.058	0.64	0.71
		Back	0.250	0.338	0.184	0.206	0.068	0.77	0.86
LTE All Bands Ant 3	NR All Bands Ant 0	Front	0.291	0.229	0.160	0.167	0.058	0.68	0.75
		Back	0.334	0.250	0.184	0.206	0.068	0.77	0.86
LTE All Bands Ant 3	NR All Bands Ant 1	Front	0.291	0.095	0.160	0.167	0.058	0.55	0.61
		Back	0.334	0.112	0.184	0.206	0.068	0.63	0.72
LTE All Bands Ant 3	NR All Bands Ant 4	Front	0.291	0.269	0.160	0.167	0.058	0.72	0.79
		Back	0.334	0.338	0.184	0.206	0.068	0.86	0.95
LTE All Bands Ant 4	NR All Bands Ant 0	Front	0.206	0.229	0.160	0.167	0.058	0.60	0.66
		Back	0.264	0.250	0.184	0.206	0.068	0.70	0.79
LTE All Bands Ant 4	NR All Bands Ant 1	Front	0.206	0.095	0.160	0.167	0.058	0.46	0.53
		Back	0.264	0.112	0.184	0.206	0.068	0.56	0.65
LTE All Bands Ant 4	NR All Bands Ant 3	Front	0.206	0.238	0.160	0.167	0.058	0.60	0.67
		Back	0.264	0.229	0.184	0.206	0.068	0.68	0.77

WWAN Band	WWAN Band	Exposure Position	1	2	3	4	5	1+2+3	1+2+4+5
			WWAN	WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 9	Bluetooth Ant 6	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
LTE All Bands Ant 0	LTE All Bands Ant 1	Front	0.211	0.056	0.160	0.167	0.058	0.43	0.49
		Back	0.250	0.069	0.184	0.206	0.068	0.50	0.59
LTE All Bands Ant 0	LTE All Bands Ant 3	Front	0.211	0.291	0.160	0.167	0.058	0.66	0.73
		Back	0.250	0.334	0.184	0.206	0.068	0.77	0.86
LTE All Bands Ant 0	LTE All Bands Ant 4	Front	0.211	0.206	0.160	0.167	0.058	0.58	0.64
		Back	0.250	0.264	0.184	0.206	0.068	0.70	0.79
LTE All Bands Ant 1	LTE All Bands Ant 3	Front	0.056	0.291	0.160	0.167	0.058	0.51	0.57
		Back	0.069	0.334	0.184	0.206	0.068	0.59	0.68
LTE All Bands Ant 1	LTE All Bands Ant 4	Front	0.056	0.206	0.160	0.167	0.058	0.42	0.49
		Back	0.069	0.264	0.184	0.206	0.068	0.52	0.61
LTE All Bands Ant 3	LTE All Bands Ant 4	Front	0.291	0.206	0.160	0.167	0.058	0.66	0.72
		Back	0.334	0.264	0.184	0.206	0.068	0.78	0.87

15.4 Product specific 10g SAR Exposure Conditions

Remark:

- For WLAN2.4G/Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.

WWAN Band	Exposure Position	1	4	6	1+6	1+4+6
		WWAN	WLAN5GHz Ant 9	NFC	Summed	Summed
		10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)
All Bands Ant 0	Front		1.377		0.00	1.38
	Back		0.699	0.036	0.04	0.74
	Left side				0.00	0.00
	Right side		2.350		0.00	2.35
	Top side		0.123		0.00	0.12
	Bottom side				0.00	0.00
All Bands Ant 1	Front		1.377		0.00	1.38
	Back		0.699	0.036	0.04	0.74
	Left side				0.00	0.00
	Right side		2.350		0.00	2.35
	Top side		0.123		0.00	0.12
	Bottom side				0.00	0.00
All Bands Ant 3	Front		1.377		0.00	1.38
	Back		0.699	0.036	0.04	0.74
	Left side				0.00	0.00
	Right side		2.350		0.00	2.35
	Top side		0.123		0.00	0.12
	Bottom side				0.00	0.00
All Bands Ant 4	Front		1.377		0.00	1.38
	Back		0.699	0.036	0.04	0.74
	Left side				0.00	0.00
	Right side		2.350		0.00	2.35
	Top side		0.123		0.00	0.12
	Bottom side				0.00	0.00

WWAN Band	FR1 Band	Exposure Position	1	2	4	6	1+2+6	1+2+4+6
			WWAN	FR1	WLAN5GHz Ant 9	NFC	Summed	Summed
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)
LTE All Bands Ant 0	NR All Bands Ant 1	Front			1.377		0.00	1.38
		Back			0.699	0.036	0.04	0.74
		Left side					0.00	0.00
		Right side			2.350		0.00	2.35
		Top side			0.123		0.00	0.12
		Bottom side					0.00	0.00
LTE All Bands Ant 0	NR All Bands Ant 3	Front			1.377		0.00	1.38
		Back			0.699	0.036	0.04	0.74
		Left side					0.00	0.00
		Right side			2.350		0.00	2.35
		Top side			0.123		0.00	0.12
		Bottom side					0.00	0.00
LTE All Bands Ant 0	NR All Bands Ant 4	Front			1.377		0.00	1.38
		Back			0.699	0.036	0.04	0.74
		Left side					0.00	0.00
		Right side			2.350		0.00	2.35
		Top side			0.123		0.00	0.12



FCC SAR Test Report

Report No. : FA551908

		Bottom side					0.00	0.00
LTE All Bands Ant 3	NR All Bands Ant 0	Front			1.377		0.00	1.38
		Back			0.699	0.036	0.04	0.74
		Left side					0.00	0.00
		Right side			2.350		0.00	2.35
		Top side			0.123		0.00	0.12
		Bottom side					0.00	0.00
LTE All Bands Ant 3	NR All Bands Ant 1	Front			1.377		0.00	1.38
		Back			0.699	0.036	0.04	0.74
		Left side					0.00	0.00
		Right side			2.350		0.00	2.35
		Top side			0.123		0.00	0.12
		Bottom side					0.00	0.00
LTE All Bands Ant 3	NR All Bands Ant 4	Front			1.377		0.00	1.38
		Back			0.699	0.036	0.04	0.74
		Left side					0.00	0.00
		Right side			2.350		0.00	2.35
		Top side			0.123		0.00	0.12
		Bottom side					0.00	0.00
LTE All Bands Ant 4	NR All Bands Ant 0	Front			1.377		0.00	1.38
		Back			0.699	0.036	0.04	0.74
		Left side					0.00	0.00
		Right side			2.350		0.00	2.35
		Top side			0.123		0.00	0.12
		Bottom side					0.00	0.00
LTE All Bands Ant 4	NR All Bands Ant 1	Front			1.377		0.00	1.38
		Back			0.699	0.036	0.04	0.74
		Left side					0.00	0.00
		Right side			2.350		0.00	2.35
		Top side			0.123		0.00	0.12
		Bottom side					0.00	0.00
LTE All Bands Ant 4	NR All Bands Ant 3	Front			1.377		0.00	1.38
		Back			0.699	0.036	0.04	0.74
		Left side					0.00	0.00
		Right side			2.350		0.00	2.35
		Top side			0.123		0.00	0.12
		Bottom side					0.00	0.00

WWAN Band	FR1 Band	Exposure Position	1	2	4	6	1+2+6	1+2+4+6
			WWAN	WWAN	WLAN5GHz Ant 9	NFC	Summed	Summed
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)
LTE All Bands Ant 0	LTE All Bands Ant 1	Front			1.377		0.00	1.38
		Back			0.699	0.036	0.04	0.74
		Left side					0.00	0.00
		Right side			2.350		0.00	2.35
		Top side			0.123		0.00	0.12
		Bottom side					0.00	0.00
LTE All Bands Ant 0	LTE All Bands Ant 3	Front			1.377		0.00	1.38
		Back			0.699	0.036	0.04	0.74
		Left side					0.00	0.00
		Right side			2.350		0.00	2.35
		Top side			0.123		0.00	0.12
		Bottom side					0.00	0.00
LTE All Bands Ant 0	LTE All Bands Ant 4	Front			1.377		0.00	1.38
		Back			0.699	0.036	0.04	0.74



		Left side					0.00	0.00
		Right side			2.350		0.00	2.35
		Top side			0.123		0.00	0.12
		Bottom side					0.00	0.00
LTE All Bands Ant 1	LTE All Bands Ant 3	Front			1.377		0.00	1.38
		Back			0.699	0.036	0.04	0.74
		Left side					0.00	0.00
		Right side			2.350		0.00	2.35
		Top side			0.123		0.00	0.12
		Bottom side					0.00	0.00
LTE All Bands Ant 1	LTE All Bands Ant 4	Front			1.377		0.00	1.38
		Back			0.699	0.036	0.04	0.74
		Left side					0.00	0.00
		Right side			2.350		0.00	2.35
		Top side			0.123		0.00	0.12
		Bottom side					0.00	0.00
LTE All Bands Ant 3	LTE All Bands Ant 4	Front			1.377		0.00	1.38
		Back			0.699	0.036	0.04	0.74
		Left side					0.00	0.00
		Right side			2.350		0.00	2.35
		Top side			0.123		0.00	0.12
		Bottom side					0.00	0.00

Test Engineer : Kevin Xu, David Dai, Bin He

16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [9] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [10] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [11] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [12] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [13] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015

Appendixes

Please refer to separated files for the following appendixes

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASY Calibration Certificate

Appendix D. Test Setup Photos

Appendix E. Conducted RF Output Power Table

Appendix F. Power measurement connection diagram and CA Conducted RF Output Power Table

-----THE END-----