


emotn

Emotn N2
Smart Projector

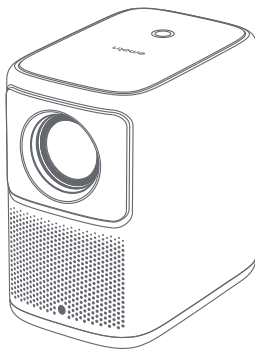

User Manual

Language

English	01-19
Deutsch	20-38
Français	39-57
Italiano	58-76
Español	77-95
日本語	96-113

Contents

Read before Use	01
Packing List	02
Projector Overview	03
Remote Control Overview	04
Getting Started	05
Network Settings	08
Focus Settings	08
Image Correction Settings	09
Bluetooth Speaker Mode	10
Screen Mirroring & Casting	10
Inputs	11
More Settings	11
Specifications	12
Troubleshooting	13
Important Precautions	15
Statement	16

Read before Use

Please read the product instructions carefully:

Thank you for purchasing and using these products.

For your safety and interests, please read the Product Instructions carefully before using the product.

About the Product Instructions:

The trademarks and names mentioned in the Product Instructions are the property of their respective owners.

All Product Instructions shown are for illustration purposes only. The actual product may vary due to product enhancements.

We shall not be liable for any personal injury, property damage, or other damages caused by the failure of the user to comply with the Product Instructions or precautions.

* emotn reserves the right to interpret and modify the Product Instructions.

Packing List

Before using this product, please check that all items are included in the box.




Projector




Remote Control



AAA batteries



Power Adapter



Power Cable



User Manual


Projector Overview

Overview and interface description.



Remote Control Overview

- Open the battery compartment cover of the remote control.
- Install 2 AAA batteries *.
- Put back the battery compartment cover.

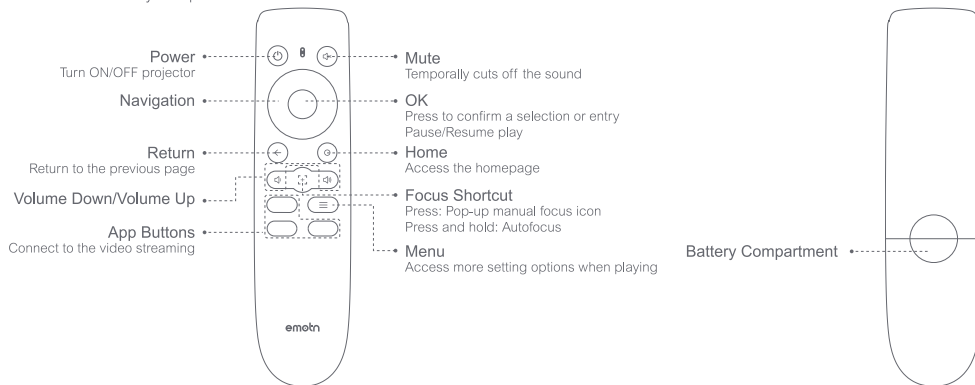

* Please insert new batteries according to the polarity indication.

Getting Started


1.Placement

Position the projector on a stable, flat surface in front of the projection surface. A flat and white projection surface is recommended. Please follow the instructions below to determine the distance between the projector and the projection surface, and the corresponding projection size:

Size	Screen (Length × Width)
60 inches	133 × 75 cm 4.36 × 2.46 ft
80 inches	177 × 100 cm 5.8 × 3.28 ft
100 inches	221 × 124 cm 7.25 × 4.06 ft
120 inches	265 × 149 cm 8.69 × 4.88 ft




The best recommended projection size is 100 inches.

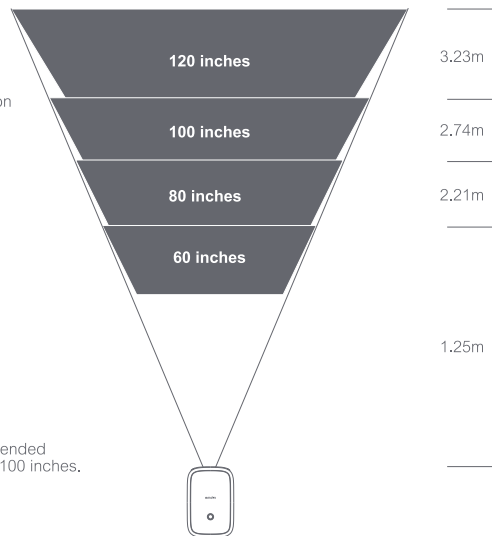

2.Power on

- ① Connect the projector to the power outlet.




- ② Press the power button on either the projector or the remote control to turn on the projector.



3.Remote Control Pairing

- Place the remote control within 10 cm of the projector.
- For first-time use, follow the on-screen projector instructions:
Simultaneously press and hold the [Volume Down] and [Right] buttons until the indicator light begins to flash.
(This means that the remote control is entering pairing mode.)
- The connection is successful when the indicator light stops flashing.

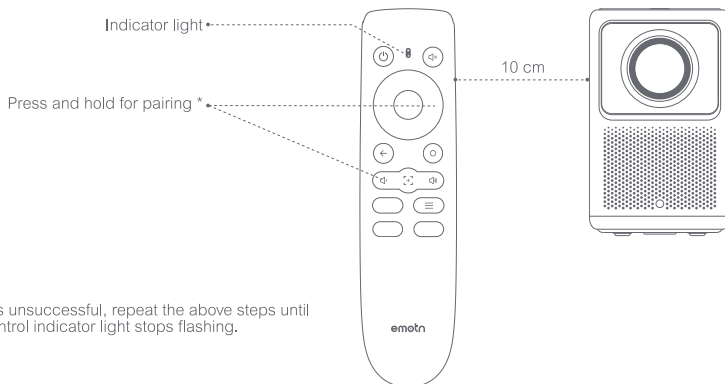

* If the pairing is unsuccessful, repeat the above steps until the remote control indicator light stops flashing.

Network Settings

Go to [Settings] — [Network].

Focus Settings

- Go to [Settings] — [Focus].
- To use **Auto focus**, select [Auto], and the screen will automatically become clear.
- To use **Manual focus**, select [Manual], and use the up/down buttons on the navigation keys of the remote control to adjust the focus based on what is displayed.


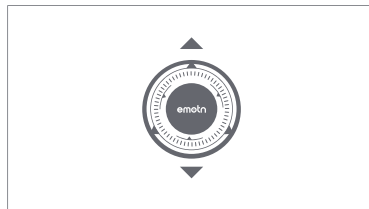


Image Correction Settings

1. Keystone Correction

- Go to [Settings] → [Keystone].
- To use **Auto keystone correction**, select [Auto], and the screen will automatically be corrected.
- To use **Manual keystone correction**, select [Manual] to adjust the four points and the image shape.



2. Intelligent Screen Fit


- Go to [Settings] → [Keystone], and turn on [Fit to Screen].
- Follow the on-screen instructions to automatically adjust the projected image to fit the screen.

3. Intelligent Obstacle Avoidance

- Go to [Settings] → [Keystone] → [Advanced], and turn on [Avoid Obstacles].
- Follow the on-screen instructions to automatically adjust the projected image to avoid any objects on the projection surface.

Bluetooth Speaker Mode

- Open the Bluetooth Speaker application on the device.
- Turn on the Bluetooth of your mobile phone/tablet/laptop, select the device of [Emotn_N2], and connect to it.
- Use the projector to play audio from the devices mentioned above, or connect the projector to a speaker/headphone to play the audio from the projector.




Screen Mirroring & Casting

1.Mirrorcast

To mirror the screen of an Android/Windows device to the projector, open the app Mirrorcast, and follow the on-screen instructions.

2.Homeshare

To stream content from an iOS/Android device to the projector, open the app Homeshare, and follow the on-screen instructions.

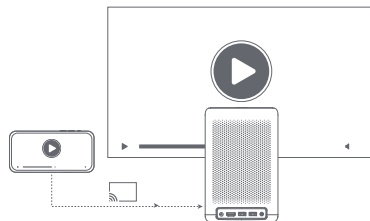


* Mirrorcast does not support iOS devices.
Homeshare only supports apps with DLNA protocol.

Inputs

- Go to [Inputs]—HDMI/HOME/USB.
- Watch the content from the different signal sources.

*This product's HDMI interface is HDMI 1.4 and does not support 4K video signal input.

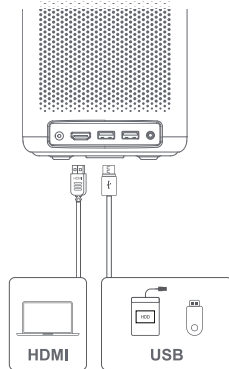

More Settings

1. Picture Mode

Go to [Settings] — [Picture Mode] to choose a picture mode from [Standard/Custom/Cinema/Sport/Vivid].

2. Sound Mode

Go to [Settings] — [Audio] to choose a sound mode from [Standard/Sport/Movie/Music].

3. Projection Mode

Go to [Settings] — [Projection] to choose the placement method of the projector.

4. Zoom

Go to [Settings] — [Zoom] to decrease the image size from 100% to 50%.

5. Product Info

Go to [Settings]— [About] to check the product information.

Specifications

Display Technology	LCD	Bluetooth Version	5.0
Display Resolution	1920 x 1080	Wi-Fi	Dual Frequency 2.4/5.0 GHz
Throw Ratio	1.26:1	Dimensions (L x W x H)	197 × 130 × 207 mm 7.76 × 5.12 × 8.15 inches
Speakers	2 × 6 W	Weight	2.2kg / 4.85lb

Troubleshooting

1.No audio output

- a. Check if the remote control "Mute" button is pressed.
- b. Check if the projector interface "3.5mm Audio", "HDMI" or Bluetooth is connected to an external audio device.

2. No image output

- a. Press the power button on the top cover. The power button indicator light will turn off if the projector is powered on successfully.
- b. Ensure that the power adaptor has power output.

3. No network

- a. Enter settings, and check the network connection status in the network option.
- b. Ensure that the router is correctly configured.

4. Blurry Image

- a. Adjust the focus or keystone.
- b. The projector and screen/wall must be positioned with an effective distance.
- c. Projector lens is not clean.

5. Non-rectangular Image

- a. Place the projector perpendicular to the screen/wall if keystone correction function is not used.
- b. Use the keystone correction function to adjust the display.

6. Automatic keystone correction failed

- a. Ensure that the Camera on the front panel is not blocked or dirty.
- b. The best automatic keystone correction distance is 1.3-3.0 m, horizontal $\pm 20^\circ$.

7. Autofocus failure

- a. Ensure that the Camera on the front panel is not blocked or dirty.
- b. The best autofocus distance is 1.3-3.0 m, horizontal $\pm 20^\circ$.

8. The Remote Control is unresponsive

- a. Ensure that the remote control is successfully paired via Bluetooth connection. If the pairing is successful, the indicator light will not flash when the button is pressed.
- b. If the pairing is unsuccessful, and the Remote Control is at IR communication, the indicator light will flash when the button is pressed.
- c. Ensure that there are no interferences or obstructions between the projector and remote control.
- d. Check the battery and installation polarity.

9. Connect the Bluetooth devices

Enter settings, open the Bluetooth option to check the Bluetooth device list, and connect the device.

10. Others

Please feel free to contact us at support@emotn.com.

Important Precautions

- Do not look directly at the projection beam with your eyes, because the strong beam may harm your eyes. RG1 IEC 62471 -5:201 5
- Do not block or cover the heat dissipation holes of the device to avoid affecting the heat dissipation of internal parts and damaging the device.
- Keep away from humidity, exposure, high temperature, low pressure, and magnetic environment.
- Do not place the device in areas susceptible to excessive dust and dirt.
- Put the device in the flat and stable station, do not put it in the place prone to vibration.
- Do not allow children to handle the device without supervision.
- No not place heavy or sharp objects on this device.
- Avoid extreme vibrations as they may damage the internal components.
- Please use correct type of battery for the remote control.
- Only use attachments/accessories specified or provided by the manufacturer. (such as the exclusive power adapter, bracket, etc)
- Do not disassemble the device personally, repair the device only for staff authorized by the company.
- Place and use the device in an environment of 0°C-40°C.
- Do not use the earphones for a long time. Excessive sound from the earphones can damage your hearing.
- The plug is considered as disconnect device of adapter.
- As with any bright source, do not stare into the direct beam.
- The adapter shall be installed near the equipment and shall be easily accessible.
- Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit from this device.
- Unplug this device if there are lightning storms or when unused for a long period of time.
- Where the power plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.
- Before you make or change any connections, ensure that all devices are disconnected from the power outlet.
- Never touch the power cable or the power connector with wet hands.

Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

We declare that this device is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. Satisfies all the technical regulations applicable to the product within the scope of UK Radio Equipment Regulations (SI 2017/1206); UK Electrical Equipment (Safety) Regulations (SI 2016/1101); and UK Electromagnetic Compatibility Regulations (SI 2016/1091). This device operating frequency: 2402-2480MHz(EIRP < 20dBm), 2412-2472MHz(EIRP < 20dBm), 5150-5250MHz(EIRP < 23dBm), 5250-5350MHz(EIRP < 20dBm), 5470-5725MHz(EIRP < 27dBm), 5725-5850MHz(EIRP < 13.98dBm).



Manufactured under license from Dolby Laboratories. Dolby, Dolby Audio, and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation.

CAN ICES-3 (B)/NMB-3 (B)

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de classe B est conforme à la norme canadienne ICES-003.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause.

undesired operation of the device

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage;

2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

For projectors only

The distance between user and products should be no less than 20cm.

La distance entre l'utilisateur et le produit ne doit pas être inférieure à 20 cm.

5150-5350MHz band is restricted to indoor use only.

La bande de 5150-5350MHz est réservée à l'usage intérieur.



05T_UK_202081700095

We simply act as UK representative for cross-border sellers, and are not manufacturers/importers/distributors for the product, nor involved in the manufacture/import/sale of the product. Therefore, we are not responsible for any after-sales services related to the product. In case of any product quality or infringement issues, the manufacturer/importer/seller shall be solely held responsible.



05T_EU_202081700095

We simply act as EU representative for cross-border sellers, and are not manufacturers/importers/distributors for the product, nor involved in the manufacture/import/sale of the product. Therefore, we are not responsible for any after-sales services related to the product. In case of any product quality or infringement issues, the manufacturer/importer/seller shall be solely held responsible.

EU DECLARATION OF CONFORMITY



Product : Smart Projector

Trademark : emotn

Model Designation : N2

Manufacturer' s Name : Shenzhen Dangs Science and Technology Co., Ltd.

Manufacturer' s Address : 901, GDC Building, Gaoxin Mid 3rd Road, Maling Community, Yuehai Sub-district, Nanshan District, Shenzhen,China.

Manufacturer' s Phone : 86-755-26907499

We, Shenzhen Dangs Science and Technology Co.,Ltd.declare under our sole responsibility that the above referenced product is in conformity with the applicable requirements of the following directives:

RED Directive : 2014/53/EU

RoHS Directive : 2011/65/EU (EU) 2015/863

WEEE Directive : 2012/19/EU

REACH Regulation : 2006/1907/EC

Conformity with these directives has been assessed for the product by demonstrating compliance to the following harmonized standards and/or regulations:

EN 62311:2008

EN IEC 62368-1:2020+A11:2020

EN 301489-1 V2.2.3 (2019-11)

EN 301489-3 V2.3.2 (2023-01)

EN 301489-17 V3.2.4 (2020-09)

EN 55032:2015+A11:2020

EN 55035:2017+A11:2020

EN 61000-3-2:2019+A1:2021

EN 61000-3-3:2013+A2:2021

EN 301893 V2.1.1 (2017-05)

EN 300440 V2.1.1 (2017-03)

EN 300328 V2.2.2 (2019-07)

2011/65/EU, (EU) 2015/863

2006/1907/EC

2012/19/EU


Signed for and on behalf of: Shenzhen Dangs Science and Technology Co., Ltd.

Place: Shenzhen, China

Date: 2024-02-07

Name: Libing Zhang

Position: Certification Engineer

Signature: 

UKCA DECLARATION OF CONFORMITY



Product : Smart Projector

Trademark : emotn

Model Designation : N2

Manufacturer' s Name : Shenzhen Dangs Science and Technology Co., Ltd.

Manufacturer' s Address : 901, GDC Building, Gaoxin Mid 3nd Road, Maling Community, Yuehai Sub-district, Nanshan District, Shenzhen,China.

Manufacturer' s Phone : 86-755-26907499

We, Shenzhen Dangs Science and Technology Co.,Ltd.declare under our sole responsibility that the above referenced product is in conformity with the applicable requirements of the following directives:

RoHS Directive : SI 2022 No.622

REACH Directive : SI 2019 No.758

RED Directive : SI 2017 No.1206

PSTI Directive : SI 2023 No.1007

Conformity with these directives has been assessed for the product by demonstrating compliance to the following harmonized standards and/or regulations:

BS EN IEC 62311:2008

BS EN IEC 62368-1:2020+A11:2020

ETSI EN 301489-1 V2.2.3 (2019-11)

ETSI EN 301489-3 V2.3.2 (2023-01)

ETSI EN 301489-17 V3.2.4 (2020-09)

BS EN 55032:2015+A11:2020

BS EN 55035:2017+A11:2020

BS EN 61000-3-2:2019+A1:2021

BS EN 61000-3-3:2013+A2:2021

ETSI EN 301893 V2.1.1 (2017-05)

ETSI EN 300440 V2.1.1 (2017-03)

ETSI EN 300328 V2.2.2 (2019-07)

SI 2022 No.622

SI 2019 No.758 and its amendment(UK REACH)

EIEN 303 645 V2.1.1(2020-06)

ISO/IEC 29147:2018

Signed for and on behalf of: Shenzhen Dangs Science and Technology Co., Ltd.

Place : Shenzhen, China

Date : 2024-02-07

Name : Libing Zhang

Position : Certification Engineer

Signature : 

Sprache

English	01-19
Deutsch	20-38
Français	39-57
Italiano	58-76
Español	77-95
日本語	96-113

Inhalt

Vor gebrauch lesen	21
Lieferumfang	22
Projektorübersicht	23
Überblick über die Fernbedienung	24
Erste Schritte	25
Netzwerkeinstellungen	28
Einstellung des Fokus	28
Bildkorrektureinstellungen	29
Bluetooth-Lautsprechermodus	30
Screen Mirroring & Casting	30
Eingangsquellen	31
Weitere Einstellungen	31
Technische Daten	32
Fehlersuche	33
Wichtige Vorsichtsmaßnahmen	35
Erklärung	36

Vor gebrauch lesen

Bitte lesen Sie die Produktanweisungen sorgfältig durch:

Wir danken Ihnen für den Kauf und die Verwendung unserer Produkte.

Für Ihre Sicherheit und zu Ihrer Information, lesen Sie bitte die Anleitung sorgfältig durch, bevor Sie das Produkt verwenden.

Über die Produktanweisungen:

Alle in den Produktanweisungen erwähnten Marken und Namen sind Eigentum der jeweiligen Inhaber.


Alle abgebildeten Produktabbildungen dienen nur zu Illustrationszwecken. Das tatsächliche Produkt kann aufgrund von Produktverbesserungen abweichen.

Wir haften nicht für Personen-, Sach- oder sonstige Schäden, die durch die Nichtbeachtung der Produktanweisungen bzw. Vorsichtsmaßnahmen seitens des Benutzers verursacht werden.

* emotn behält sich das Recht zur Auslegung und Änderung der Produktanweisungen vor.

Lieferumfang

Bevor Sie das Produkt in Betrieb nehmen, überprüfen Sie bitte, ob alle Teile im Karton enthalten sind.




Beamer



Fernbedienung



AAA-Batterien



Netzadapter



Netzkabel



Bedienungsanleitung



Projektorübersicht

Übersicht und Schnittstellenbeschreibung.



Überblick über die Fernbedienung

- Öffnen Sie die Abdeckung des Batteriefachs an der Fernbedienung.
- Legen Sie 2 AAA-Batterien ein *.
- Schließen Sie die Abdeckung des Batteriefachs wieder.

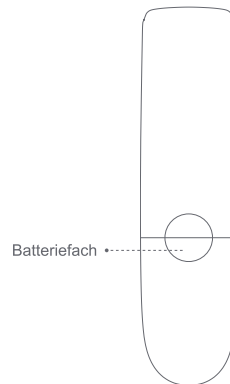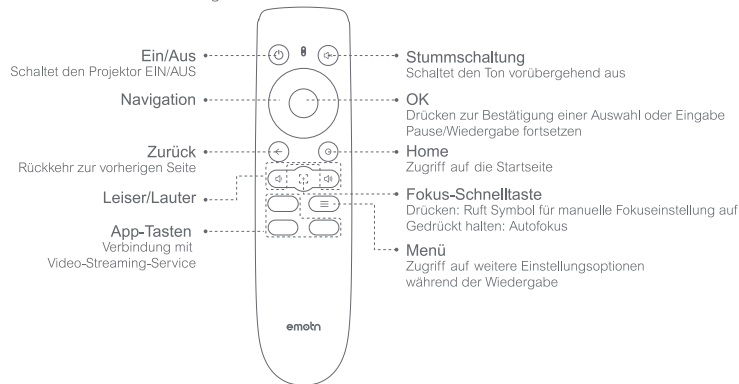

* Bitte legen Sie neue Batterien entsprechend der Polaritätskennzeichnung ein.

Erste Schritte


1. Aufstellung

Stellen Sie den Projektor auf eine stabile, ebene Fläche vor der Projektionsfläche. Es wird eine glatte, weiße Projektionsfläche empfohlen. Bitte befolgen Sie die nachstehenden Anweisungen zur Bestimmung des Abstands zwischen Projektor und Projektionsfläche sowie der entsprechenden Projektionsgröße:

Größe	Bildfläche (Länge x Breite)
60 Zoll	133 x 75 cm 4.36x2.46 ft
80 Zoll	177 x 100 cm 5.8x 3.28 ft
100 Zoll	221 x 124 cm 7.25 x 4.06 ft
120 Zoll	265 x 149 cm 8.69 x 4.88 ft




Die beste empfohlene Projektionsgröße ist 100 Zoll.

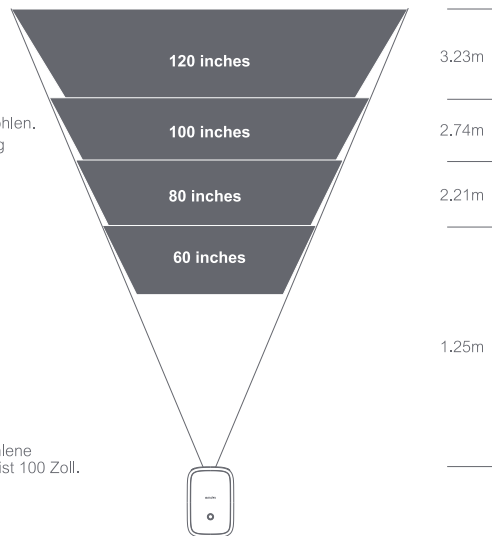

2.Einschalten

- ① Schließen Sie den Projektor an die Steckdose an.




- ② Drücken Sie die Ein-/Aus-Taste am Projektor oder auf der Fernbedienung, um den Projektor einzuschalten.



3. Kopplung mit der Fernbedienung

- Halten Sie die Fernbedienung in einer Entfernung von 10 cm zum Projektor.
- Befolgen Sie bei der erstmaligen Verbindung die Anweisungen auf der Projektionsfläche: Halten Sie gleichzeitig die Tasten [Leiser] und [Rechts] gedrückt, bis die Kontrollanzeige zu blinken beginnt (dies bedeutet, dass die Fernbedienung im Kopplungsmodus ist).
- Die Verbindung ist erfolgreich, wenn die Kontrollanzeige nicht mehr blinkt.

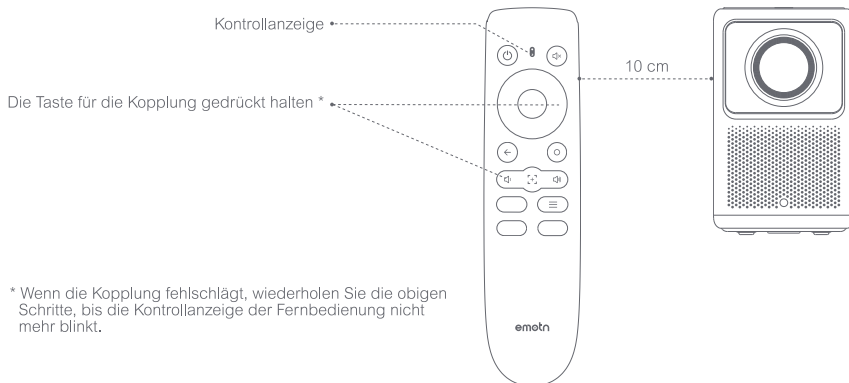


Netzwerkeinstellungen

Gehen Sie auf [Einstellungen] – [Netzwerk].

Einstellung des Fokus


- Gehen Sie auf [Einstellungen] – [Fokus].
- Zur Verwendung **des Autofokus**, wählen Sie [Auto] und die Bildscharfe wird automatisch eingestellt.
- Zur Verwendung **des manuellen Fokus**, wählen Sie [Handbuch] und verwenden Sie die Auf-/Ab-Tasten der Navigationstasten auf der Fernbedienung, um den Fokus entsprechend des Bilds einzustellen.

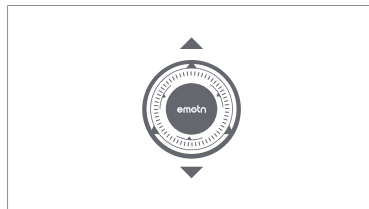

Bildkorrektureinstellungen

1. Trapezkorrektur

- Gehen Sie auf [Einstellungen] – [Schlussstein].
- Zur Verwendung **der Auto Trapezkorrektur**, wählen Sie [Auto] und die Bildfläche wird automatisch ausgerichtet.
- Zur Verwendung **der Manuelle Trapezkorrektur**, wählen Sie [Handbuch], um die vier Punkte und die Bildform einzustellen.



2. Intelligente Bildgrößenanpassung


- Gehen Sie auf [Einstellungen] – [Schlussstein] und aktivieren Sie [An Bildschirm anpassen].
- Follow the on-screen instructions to automatically adjust the projected image to fit the screen.

3. Intelligente Hindernisvermeidung

- Gehen Sie auf [Einstellungen] – [Schlussstein] -- [Erweiterte Einstellungen] und aktivieren Sie [Vermeiden Sie Hindernisse].
- Befolgen Sie die Anweisungen auf der Projektionsfläche, um das projizierte Bild automatisch so anzupassen, dass Objekte auf der Projektionsfläche gemieden werden.

Bluetooth-Lautsprechermodus

- Öffnen Sie die Anwendung "Bluetooth-Lautsprecher" auf dem Gerät.
- Aktivieren Sie die Bluetooth-Funktion Ihres Mobiltelefons/ Tablets/Laptops ein, wählen Sie das Gerät [Emotn_N2] und stellen Sie eine Verbindung her.
- Verwenden Sie den Projektor zur Wiedergabe von Audiosignalen von den oben genannten Geräten bzw. verbinden Sie für die Wiedergabe der Audiosignale vom Projektor einen Lautsprecher/Kopfhörer mit dem Projektor.




Screen Mirroring & Casting

1.Mirrorcast

Zur Spiegelung eines Android/Windows-Geräts auf dem Projektor, öffnen Sie die App "Mirrorcast" und folgen Sie den Anweisungen auf der Projektionsfläche.

2.Homeshare

Zum Streamen von Inhalten eines iOS/Android-Geräts auf dem Projektor, öffnen Sie die App "Homeshare" und folgen Sie den Anweisungen auf dem Bildschirm.

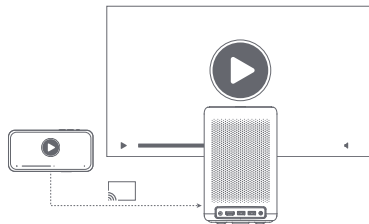


* Mirrorcast unterstützt keine iOS-Geräte. Homeshare unterstützt nur Apps mit DLNA-Protokoll.

Eingangsquelle

- Gehen Sie auf [Eingänge] – HDMI/HOME/USB.
- Schauen Sie Inhalte von verschiedenen Signalquellen.

*Die HDMI-Schnittstelle dieses Produkts entspricht HDMI 1.4 und unterstützt keinen 4K-Videoeingang.

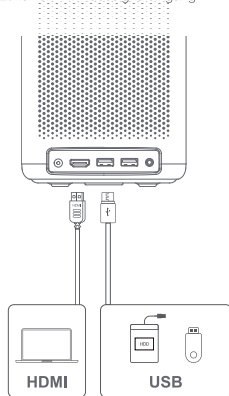

Weitere Einstellungen

1. Bildmodus

Gehen Sie auf [Einstellungen] – [Bildmodus], um den Bildmodus [Standard/Brauch/Kino/Sport/Lebendig] auszuwählen.

2. Klangmodus

Gehen Sie auf [Einstellungen] – [Audio], um den Tonmodus [Standard/Sport/Film/Musik] auszuwählen.

3. Projektionsmodus

Gehen Sie auf [Einstellungen] – [Projektion], um die Aufstellungsmethode des Projektors auszuwählen.

4. Zoom

Gehen Sie auf [Einstellungen] – [Zoomen], um die Bildgröße von 100 % auf 50 % zu verringern.

5. Produktinformationen

Gehen Sie auf [Einstellungen] -- [Um], um die Produktinformationen anzuzeigen.

Technische Daten

Display-Technologie	LCD	Bluetooth-Version	5.0
Bildauflösung	1920 x 1080	WLAN	Doppelfrequenz 2,4/5,0 GHz
Projektionsverhältnis	1,26:1	Abmessungen (L x B x H)	197 × 130 × 207 mm 7,76 × 5,12 × 8,15 Zoll
Lautsprecher	2 x 6 W	Gewicht	2,2kg / 4,85lb

Fehlersuche

1. Keine Audioausgabe

- a. Prüfen Sie, ob die Taste "Stummschalten" der Fernbedienung gedrückt ist.
- b. Prüfen Sie, ob die Projektorschnittstelle "3.5 mm Audioklinke", "HDMI", oder das Bluetooth mit einem externen Audiogerät verbunden ist.

2. Keine Bildausgabe

- a. Drücken Sie die Ein-/Aus-Taste an der Oberseite des Geräts. Die Kontrollanzeige der Ein-/Aus-Taste erlischt, sobald der Projektor erfolgreich eingeschaltet wurde.
- b. Vergewissern Sie sich, dass das Netzteil Strom ausgibt.

3. Kein Netzwerk

- a. Rufen Sie die Einstellungen auf und überprüfen Sie den Netzwerkverbindungsstatus unter der Option Netzwerk.
- b. Stellen Sie sicher, dass der Router ordnungsgemäß konfiguriert ist.

4. Verschwommenes Bild

- a. Nehmen Sie Einstellungen für den Fokus bzw. die Trapezkorrektur vor.
- b. Der Projektor und die Leinwand/Wand müssen sich in einem ordnungsgemäßen Abstand zueinander befinden.
- c. Das Objektiv des Projektors ist nicht sauber.

5. Nicht rechtwinkliges Bild

- a. Falls die Trapezkorrekturfunktion nicht verwendet wird, stellen Sie den Projektor senkrecht zur Leinwand/Wand auf.
- b. Verwenden Sie die Funktion Trapezkorrektur zur Anpassung der Bildfläche.

6. Automatische Trapezkorrektur schlägt fehl

- a. Vergewissern Sie sich, dass die Kamera an der Vorderseite nicht blockiert oder verschmutzt ist.
- b. Der beste Abstand für die automatische Trapezkorrektur beträgt 1,3–3,0 m, horizontal $\pm 20^\circ$.

7. Autofokus-Fehler

- a. Stellen Sie sicher, dass die Kamera an der Vorderseite nicht blockiert oder verschmutzt ist.
- b. Die beste Entfernung für die Funktion Autofokus beträgt 1,3–3,0 m, horizontal $\pm 20^\circ$.

8. Die Fernbedienung reagiert nicht

- a. Vergewissern Sie sich, dass die Fernbedienung erfolgreich über eine Bluetooth-Verbindung gekoppelt wurde. Bei erfolgreicher Kopplung blinkt die Kontrollanzeige nicht auf, wenn die Taste gedrückt wird.
- b. Bei fehlgeschlagener Kopplung und wenn die Fernbedienung sich im **IR**-Kommunikationsmodus befindet, blinkt die Kontrollanzeige, sobald die Taste gedrückt wird.
- c. Achten Sie darauf, dass sich keine Störquellen oder Hindernisse zwischen dem Projektor und der Fernbedienung befinden.
- d. Überprüfen Sie die Batterieleistung sowie die Polarität der eingelegten Batterien.

9. Verbinden von Bluetooth-Geräten

Gehen Sie auf Einstellungen, öffnen Sie die Bluetooth-Option, um die Liste der Bluetooth-Geräte aufzurufen und verbinden Sie das Gerät.

10. Sonstiges

Bitte kontaktieren Sie uns unter support.eu@emotn.com.

Wichtige Vorsichtsmaßnahmen

- Bitte schauen Sie nicht direkt mit den Augen in den Projektionsstrahl, da der starke Strahl Ihre Augen schädigen kann.
RG1 IEC 62471 -5:201 5
- Die Kühlungsöffnungen des Geräts dürfen nicht blockiert oder verstopft werden, da dies die Wärmeableitung der internen Teile beeinträchtigen und das Gerät beschädigen kann.
- Bitte halten Sie es von Feuchtigkeit, Sonnenlicht, hohen Temperaturen, niedrigem Druck und magnetischer Umgebung fern.
- Stellen Sie das Gerät nicht an einem Ort auf, an dem es übermäßig viel Staub und Schmutz ausgesetzt ist.
- Stellen Sie das Gerät auf eine flache und stabile Unterlage, nicht in einem Bereich, der zu Vibrationen neigt.
- Lassen Sie Kinder nicht unbeaufsichtigt mit dem Gerät hantieren.
- Stellen Sie keine schweren oder scharfkantigen Gegenstände auf dieses Gerät.
- Vermeiden Sie extreme Vibrationen, da sonst interne Komponenten beschädigt werden könnten.
- Bitte verwenden Sie den richtigen Batterietyp für die Fernbedienung
- Verwenden Sie nur vom Hersteller angegebenes oder mitgeliefertes Zubehör (z. B. spezielles Adapter, Ständer usw.)
- Demontieren Sie das Gerät nicht selbst. Nur autorisiertes Firmenpersonal kann das Gerät reparieren
- Stellen Sie das Gerät in einer Umgebung von 0°C-40°C auf.
- Bitte verwenden Sie den Kopfhörer nicht zu lang, da die Geräusche zu Hörschäden führen können.
- Der Stecker ist das getrennte Gerät des Adapters.
- Wie bei jeder hellen Lichtquelle, schauen Sie nicht auf den direkten Strahl,
- Der Adapter sollte in der Nähe des Geräts installiert werden und leicht zugänglich sein.
- Schützen Sie das Netzkabel, damit niemand darauf tritt oder es anderweitig gequetscht wird, insbesondere an Steckern, an Mehrfachsteckdosen und am Austrittspunkt des Kabels am Gerät.
- Trennen Sie das Gerät bei Gewittern oder längerer Nichtverwendung vom Stromnetz.
- Wenn ein Netzstecker oder ein Gerätekoppler als Trennvorrichtung verwendet wird, bleibt die Trennvorrichtung einsatzbereit.
- Vor dem Herstellen oder Ändern von Verbindungen stellen Sie bitte sicher, dass alle Geräte vom Stromnetz getrennt sind.
- Berühren Sie niemals das Netzkabel oder den Netzanschluss mit feuchten Händen.

Erklärung

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

We declare that this device is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. Satisfies all the technical regulations applicable to the product within the scope of UK Radio Equipment Regulations (SI 2017/1206); UK Electrical Equipment (Safety) Regulations (SI 2016/1101); and UK Electromagnetic Compatibility Regulations (SI 2016/1091). This device operating frequency: 2402-2480MHz(EIRP < 20dBm), 2412-2472MHz(EIRP < 20dBm), 5150~5250MHz(EIRP < 23dBm), 5250~5350MHz(EIRP < 20dBm), 5470~5725MHz(EIRP < 27dBm), 5725~5850MHz(EIRP < 13.98dBm).



Manufactured under license from Dolby Laboratories. Dolby, Dolby Audio, and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation.

CAN ICES-3 (B)/NMB-3 (B)

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de classe B est conforme à la norme canadienne ICES-003.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1.L'appareil ne doit pas produire de brouillage;

2.L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

For projectors only

The distance between user and products should be no less than 20cm.

La distance entre l'utilisateur et le produit ne doit pas être inférieure à 20 cm.

5150-5350MHz band is restricted to indoor use only.

La bande de 5150-5350MHz est réservée à l'usage intérieur.



08T_UK_2022011700055

EVATOST CONSULTING LTD
Suite 11,First Floor,Moy Road Business
Centre,Taffs Well,Cardiff,Wales,CF15 7QR
contact@evatmaster.com

We simply act as UK representative for cross-border sellers, and are not manufacturers/importers/distributors for the product, nor involved in the manufacture/import/sale of the product. Therefore, we are not responsible for any after-sales services related to the product. In case of any product quality or infringement issues, the manufacturer/importer/seller shall be solely held responsible.



08T_EU_2022011700055

eVatmaster Consulting GmbH
Bettnaster, 30
60325 Frankfurt am Main, Germany
contact@evatmaster.com

We simply act as EU representative for cross-border sellers, and are not manufacturers/importers/distributors for the product, nor involved in the manufacture/import/sale of the product. Therefore, we are not responsible for any after-sales services related to the product. In case of any product quality or infringement issues, the manufacturer/importer/seller shall be solely held responsible.

EU DECLARATION OF CONFORMITY



Product : Smart Projector

Trademark : emotn

Model Designation : N2

Manufacturer' s Name : Shenzhen Dangs Science and Technology Co., Ltd.

Manufacturer' s Address : 901, GDC Building, Gaoxin Mid 3rd Road, Maling Community, Yuehai Sub-district, Nanshan District, Shenzhen,China.

Manufacturer' s Phone : 86-755-26907499

We, Shenzhen Dangs Science and Technology Co.,Ltd.declare under our sole responsibility that the above referenced product is in conformity with the applicable requirements of the following directives:

RED Directive : 2014/53/EU

RoHS Directive : 2011/65/EU (EU) 2015/863

WEEE Directive : 2012/19/EU

REACH Regulation : 2006/1907/EC

Conformity with these directives has been assessed for the product by demonstrating compliance to the following harmonized standards and/or regulations:

EN 62311:2008

EN IEC 62368-1:2020+A11:2020

EN 301489-1 V2.2.3 (2019-11)

EN 301489-3 V2.3.2 (2023-01)

EN 301489-17 V3.2.4 (2020-09)

EN 55032:2015+A11:2020

EN 55035:2017+A11:2020

EN 61000-3-2:2019+A1:2021

EN 61000-3-3:2013+A2:2021

EN 301893 V2.1.1 (2017-05)

EN 300440 V2.1.1 (2017-03)

EN 300328 V2.2.2 (2019-07)

2011/65/EU, (EU) 2015/863

2006/1907/EC

2012/19/EU


Signed for and on behalf of: Shenzhen Dangs Science and Technology Co., Ltd.

Place: Shenzhen, China

Date: 2024-02-07

Name: Libing Zhang

Position: Certification Engineer

Signature: 

Langue

English	01-19
Deutsch	20-38
Français	39-57
Italiano	58-76
Español	77-95
日本語	96-113

Contenu

Lire avant toute utilisation	40
Liste de colisage	41
Présentation du projecteur	42
Présentation de la télécommande	43
Comment démarrer	44
Paramètres réseau	47
Paramètres de mise au point	47
Paramètres de correction de l'image	48
Mode haut-parleur Bluetooth	49
Miroir d'écran et diffusion	49
Entrées	50
Autres paramètres	50
Spécifications	51
Dépannage	52
Précautions importantes	54
Déclaration	55

Lire avant toute utilisation

Veillez lire attentivement les instructions relatives au produit:

Nous vous remercions d'avoir acheté et d'utiliser nos produits.

Pour votre sécurité et dans votre intérêt, veuillez lire attentivement les instructions du produit avant de l'utiliser.

A propos des instructions du produit:

Les marques et les noms mentionnés dans les instructions du produit sont la propriété de leurs détenteurs respectifs.

Toutes les instructions du produit sont présentées uniquement à des fins d'illustration. Le produit réel peut varier en raison des améliorations apportées au produit.

Nous ne serons pas tenus responsables de toute blessure corporelle, de tout dommage matériel ou de tout autre dommage causé par le non-respect des instructions ou des précautions du produit par l'utilisateur.

* emotn se réserve le droit d'interpréter et de modifier les instructions du produit.


Présentation du projecteur

Présentation et description de l'interface.



Présentation de la télécommande

- Ouvrir le couvercle du compartiment à piles de la télécommande.
- Installer 2 piles du type AAA *.
- Remettre en place le couvercle du compartiment à piles.

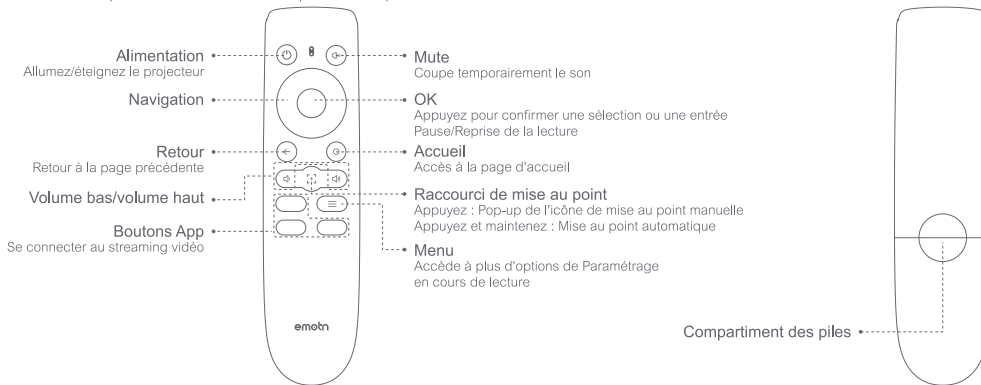

* Veuillez mettre en place des piles neuves en respectant les indications de polarité.