

Appendix B

RF Test Data for BT V5.0(LE) (Conducted Measurement)

Product Name: Formuler Z8 pro

Trade Mark: FORMULER


Test Model: Z8 pro

Environmental Conditions

Temperature:	24.6° C
Relative Humidity:	54.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Jay Li
Supervised by:	Li Huan

B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

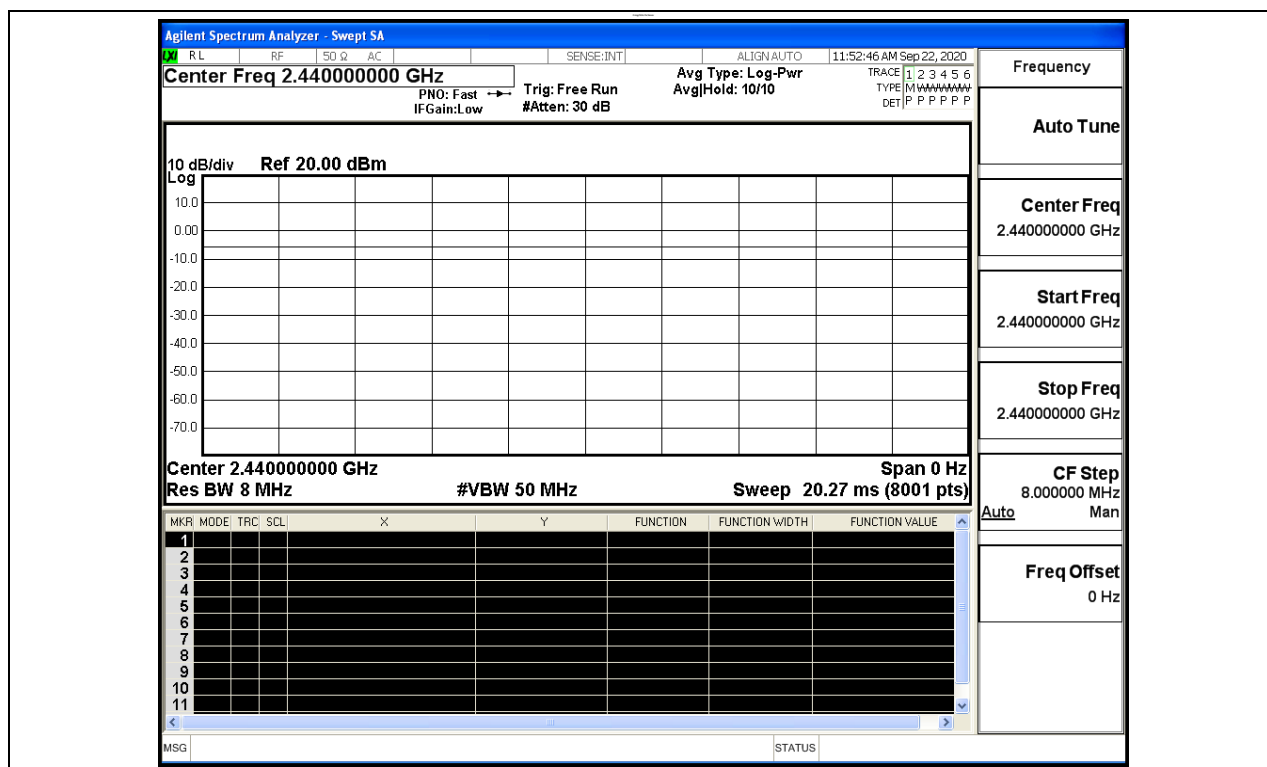


B.2 Maximum Conducted Peak Output Power


Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	1.035	30	PASS
BT LE	MCH	1.172	30	PASS
BT LE	HCH	0.986	30	PASS

Test Graphs


LCH

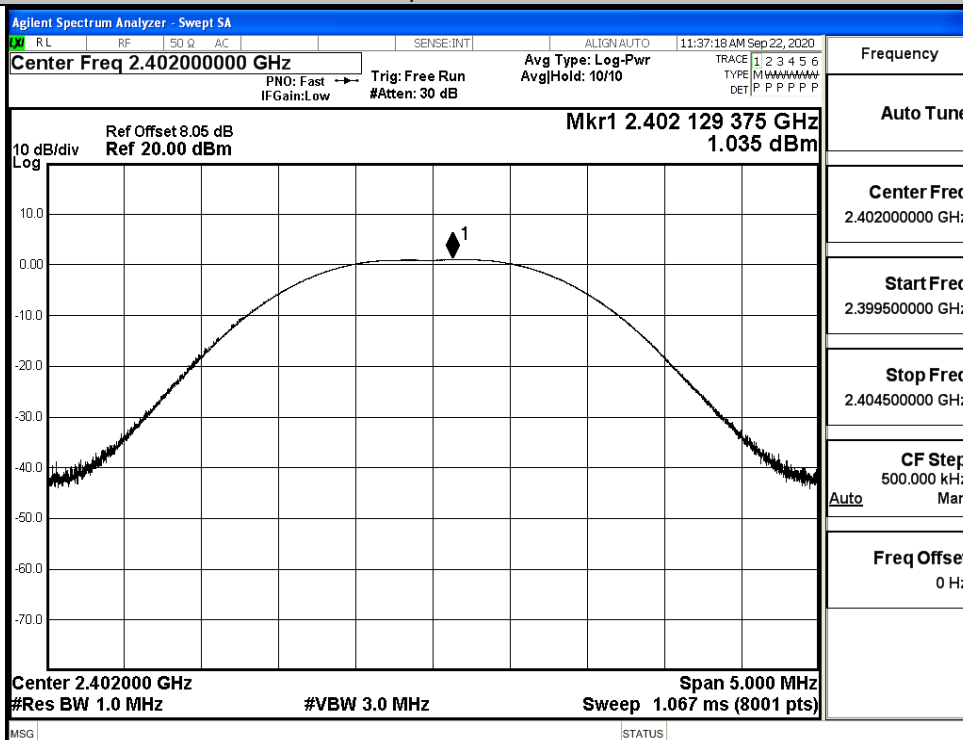

MCH

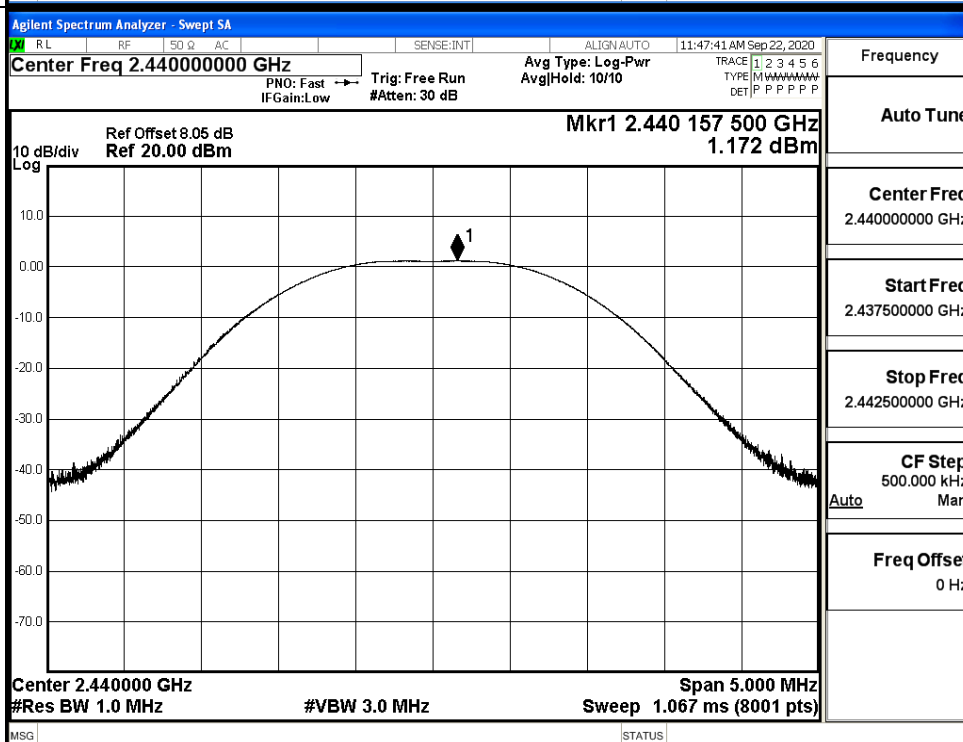

HCH

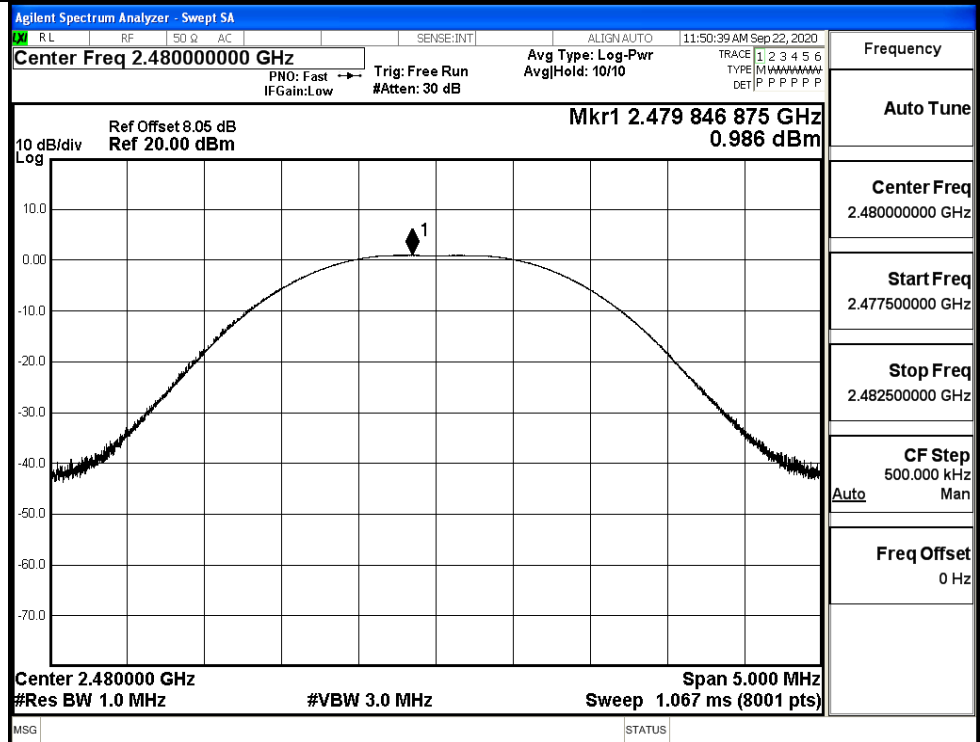


B.3 Maximum Power Spectral Density


Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-14.083	8	PASS
BT LE	MCH	-13.502	8	PASS
BT LE	HCH	-13.963	8	PASS

Test Graphs


LCH

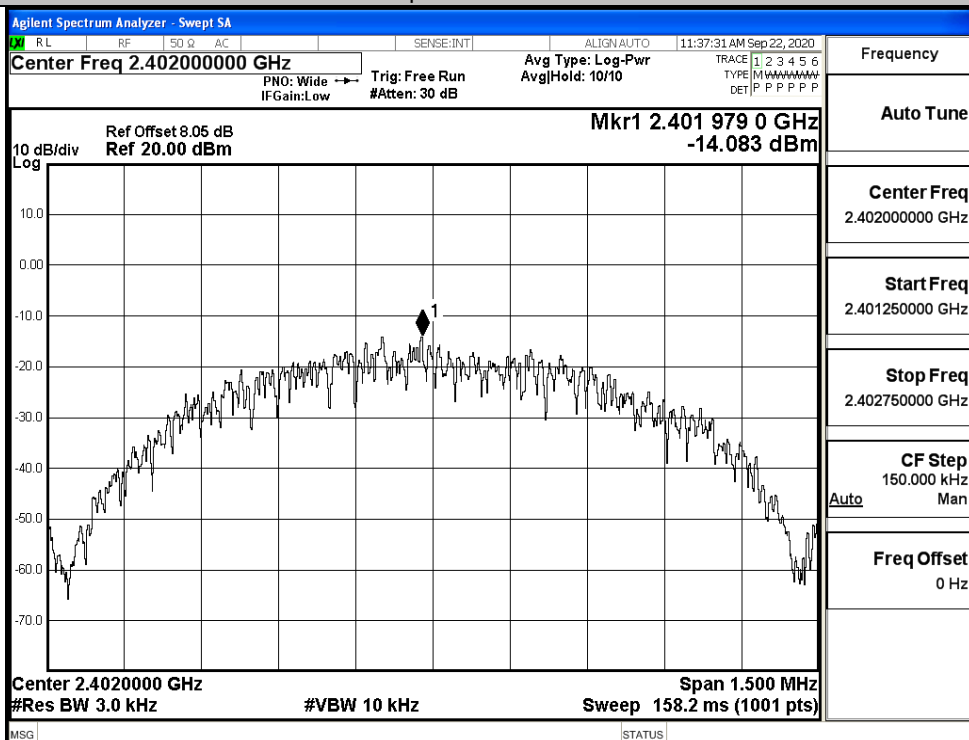

MCH

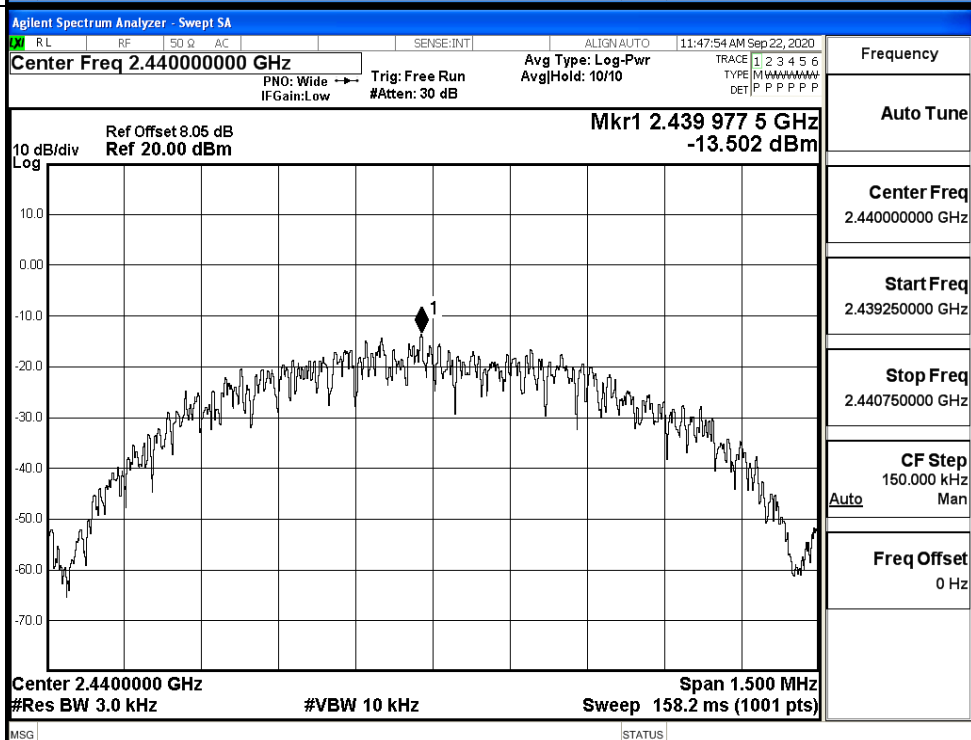

HCH

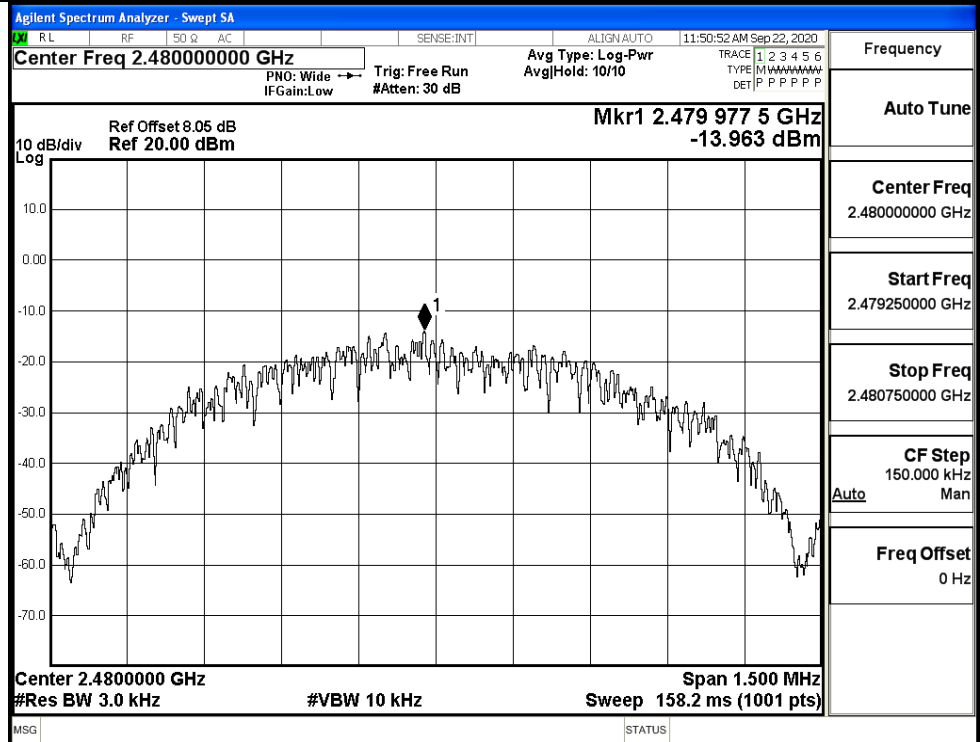


B.4 6dB Bandwidth


Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6670	≥ 0.5	PASS
BT LE	MCH	0.6726	≥ 0.5	PASS
BT LE	HCH	0.6590	≥ 0.5	PASS

Test Graphs


LCH

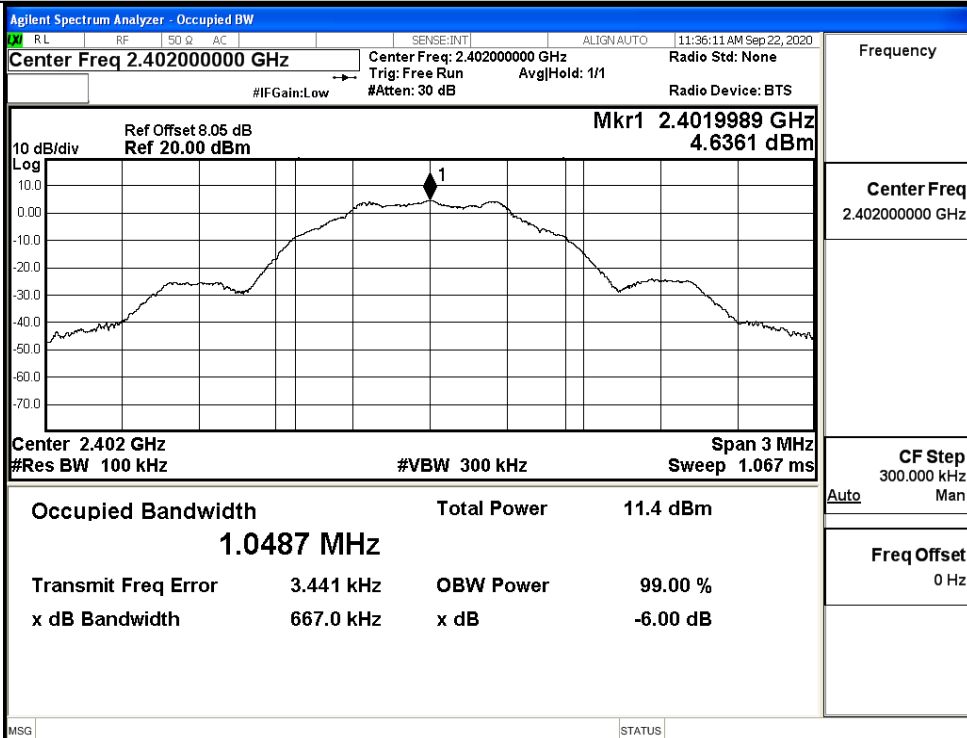

MCH

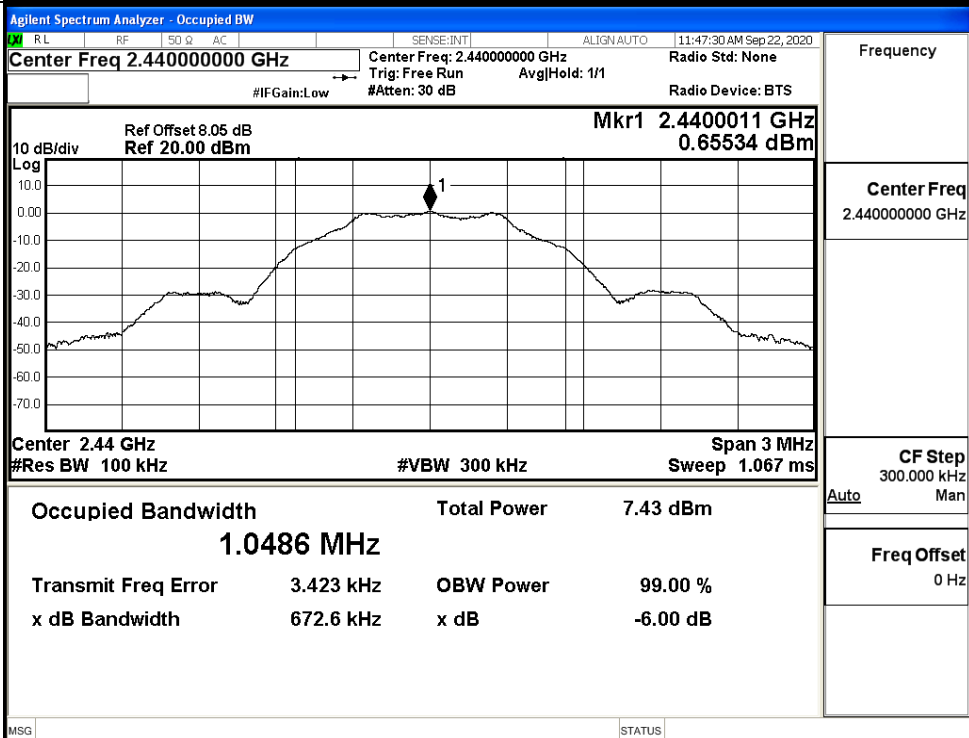

HCH

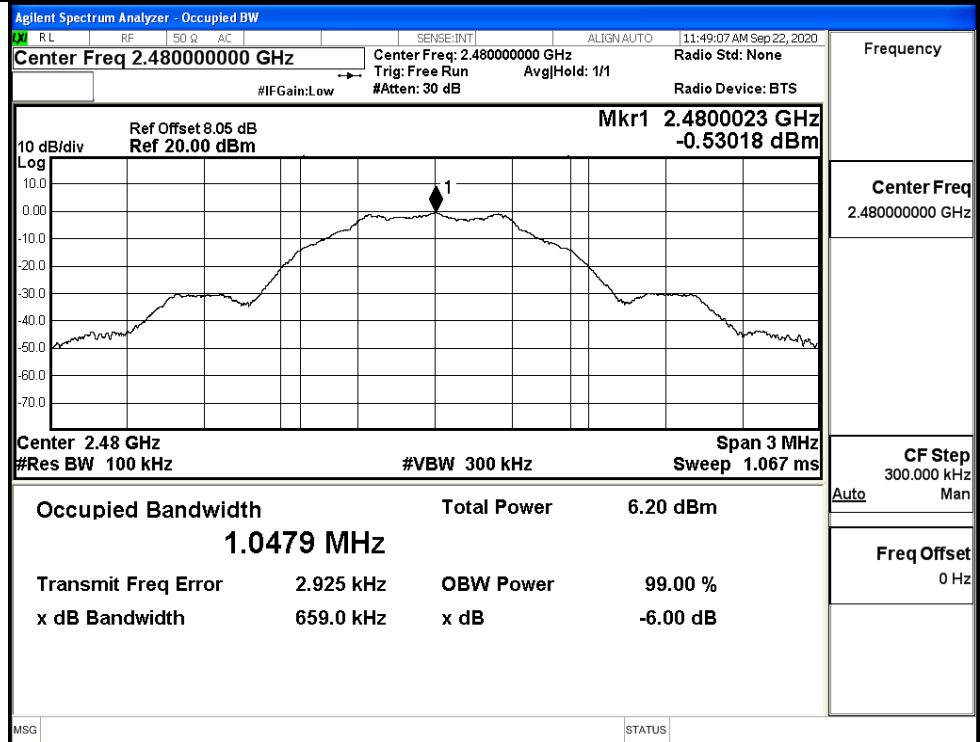


B.5 RF Conducted Spurious Emissions

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	0.426	-37.423	-19.574	PASS
BT LE	MCH	0.669	-37.516	-19.331	PASS
BT LE	HCH	0.465	-37.426	-19.535	PASS

BT LE LCH Graphs

Pref/BT LE/LCH

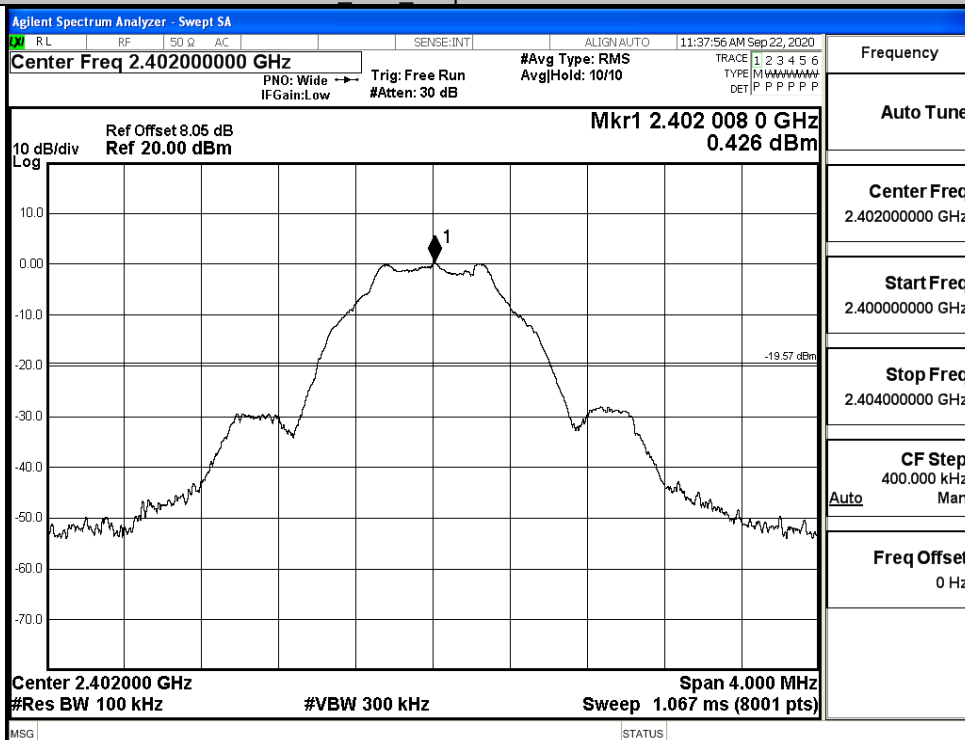


Puw/BT LE/LCH




BT LE MCH Graphs

Pref/BT LE/MCH

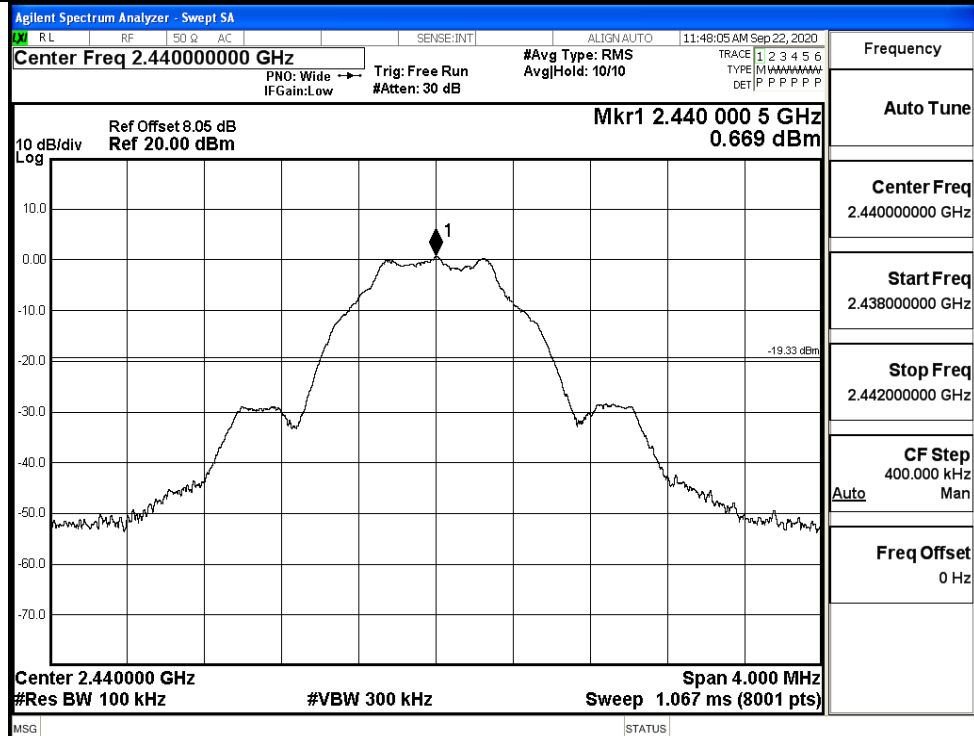


Puw/BT LE/MCH

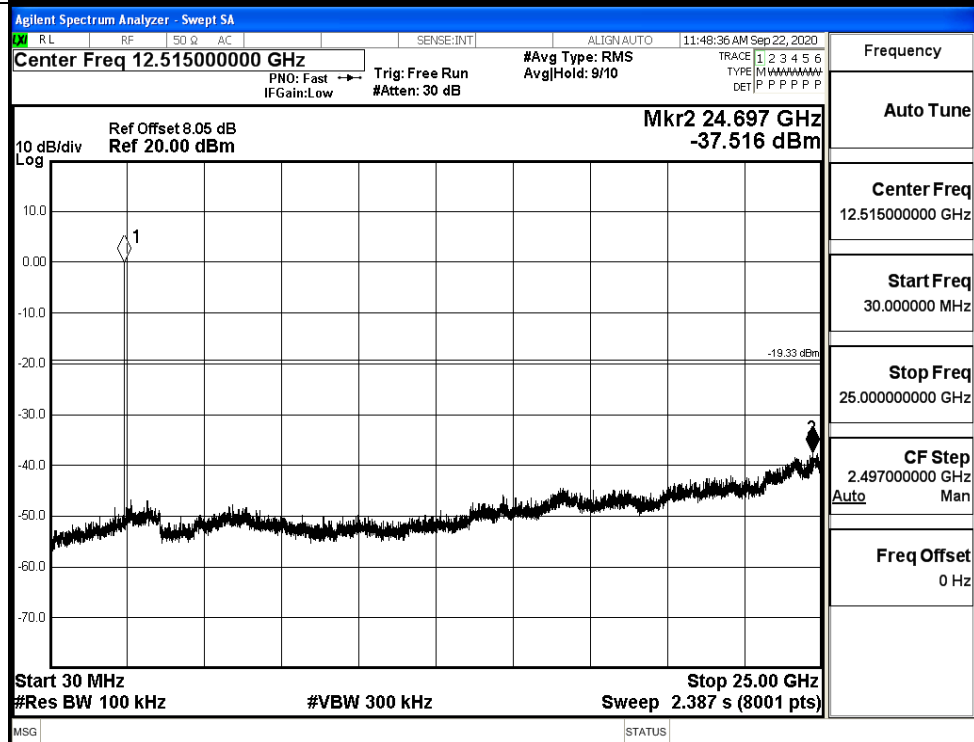


BT LE HCH Graphs

Pref/BT LE/HCH

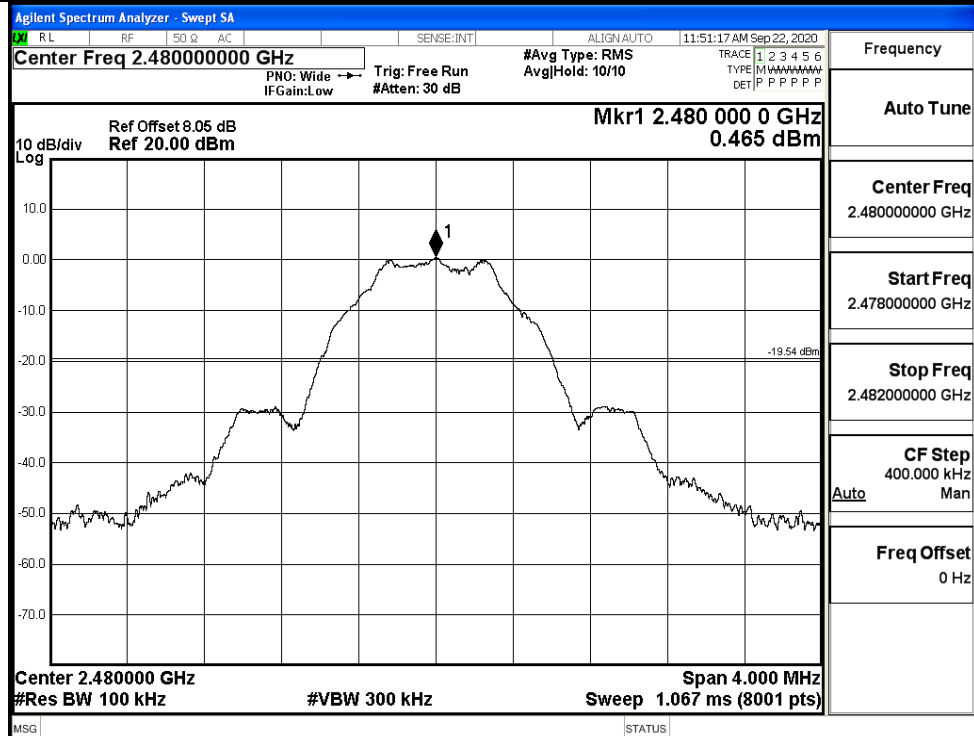

Puw/BT LE/HCH

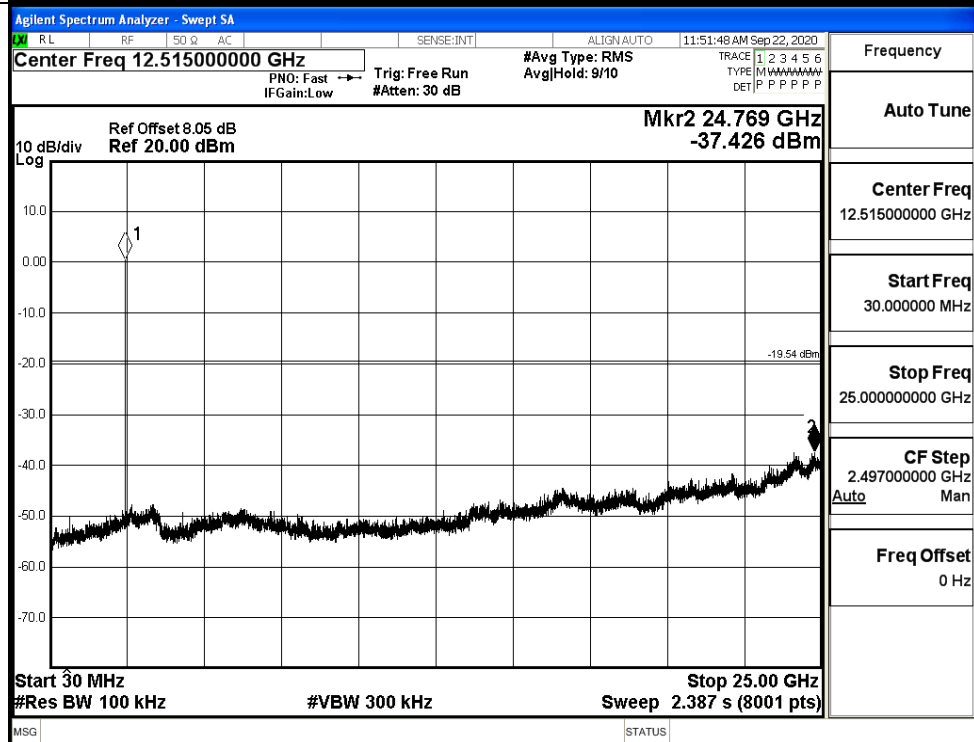


B.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	0.638	-50.069	-19.36	PASS
BT LE	HCH	0.519	-49.853	-19.48	PASS

Test Graphs

LCH

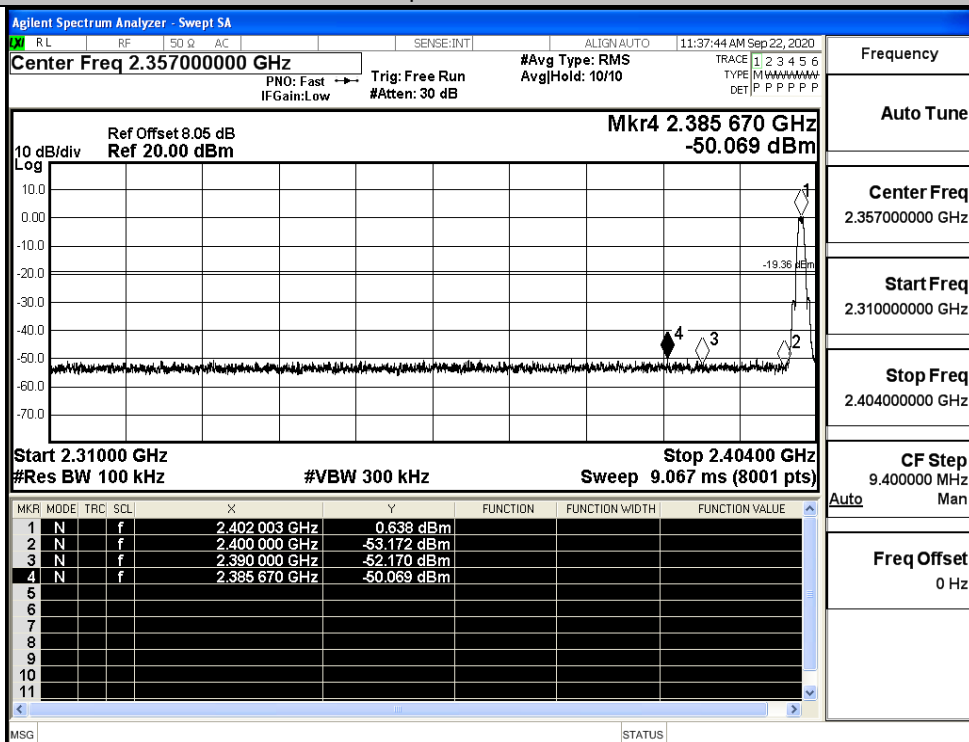


Frequency

Auto Tune

Center Freq
2.357000000 GHzStart Freq
2.310000000 GHzStop Freq
2.404000000 GHzCF Step
9.400000 MHz
Auto ManFreq Offset
0 Hz

HCH

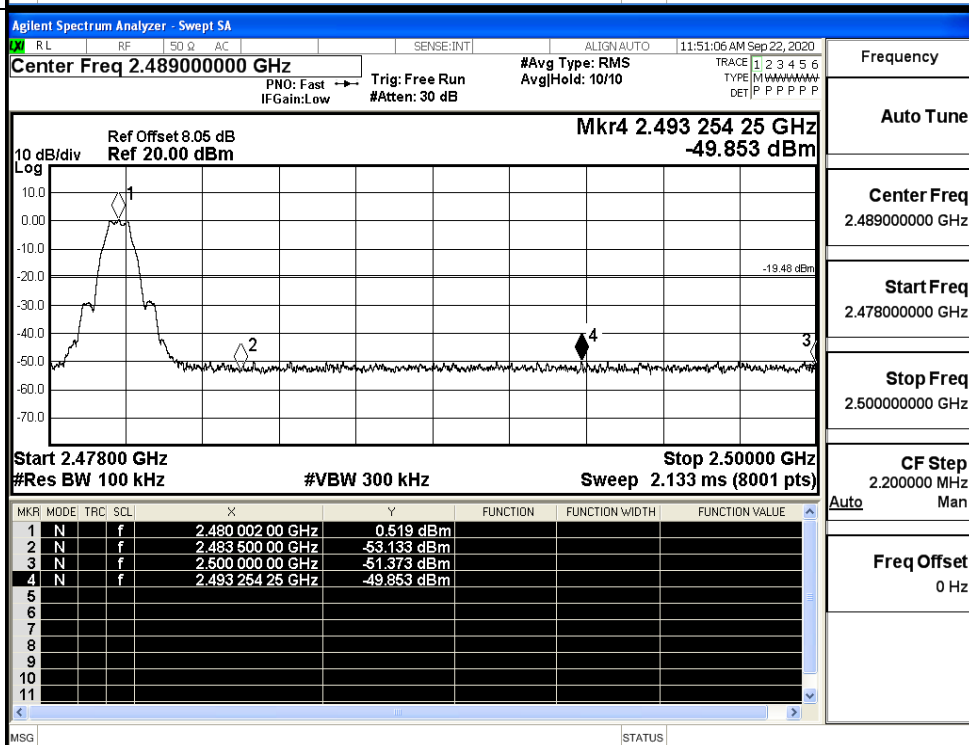

Frequency


Auto Tune

Center Freq
2.489000000 GHzStart Freq
2.478000000 GHzStop Freq
2.500000000 GHzCF Step
2.200000 MHz
Auto ManFreq Offset
0 Hz


B.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-42.57	2.0	0	52.68	PEAK	74	PASS
		Ant1	2310.0	-53.48	2.0	0	41.77	AV	54	PASS
		Ant1	2390.0	-42.50	2.0	0	52.75	PEAK	74	PASS
		Ant1	2390.0	-52.94	2.0	0	42.31	AV	54	PASS
	2480	Ant1	2483.5	-40.34	2.0	0	54.92	PEAK	74	PASS
		Ant1	2483.5	-52.48	2.0	0	42.78	AV	54	PASS
		Ant1	2500.0	-42.26	2.0	0	53.00	PEAK	74	PASS
		Ant1	2500.0	-52.08	2.0	0	43.18	AV	54	PASS


Restrict-band band-edge measurements_BT LE_2402_Ant1_PEAK

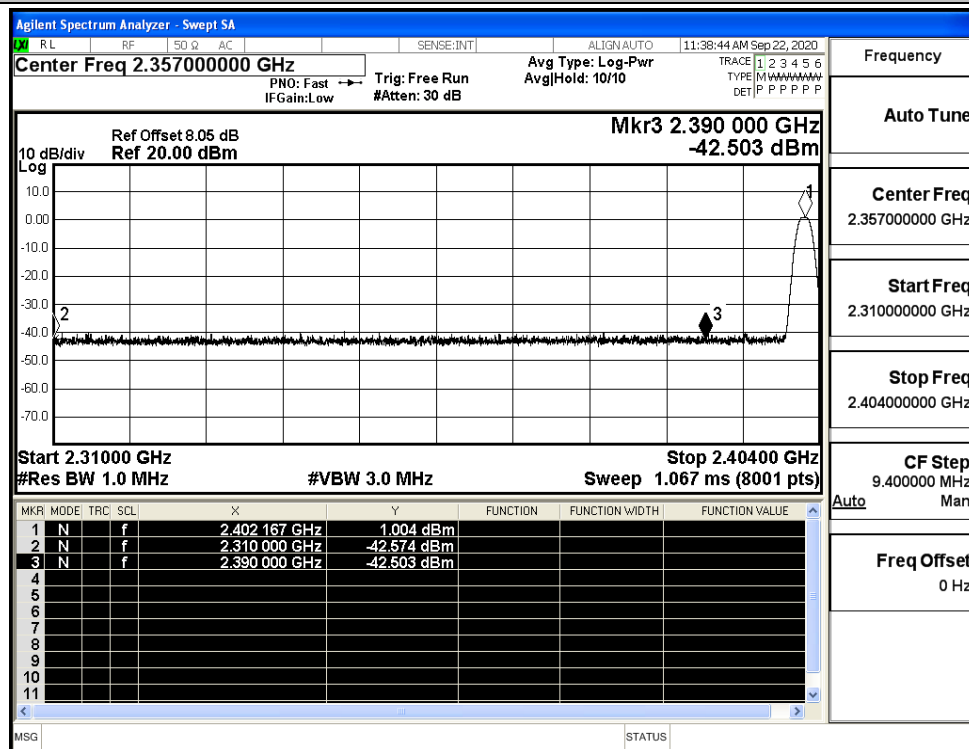

Restrict-band band-edge measurements_BT LE_2402_Ant1_AV

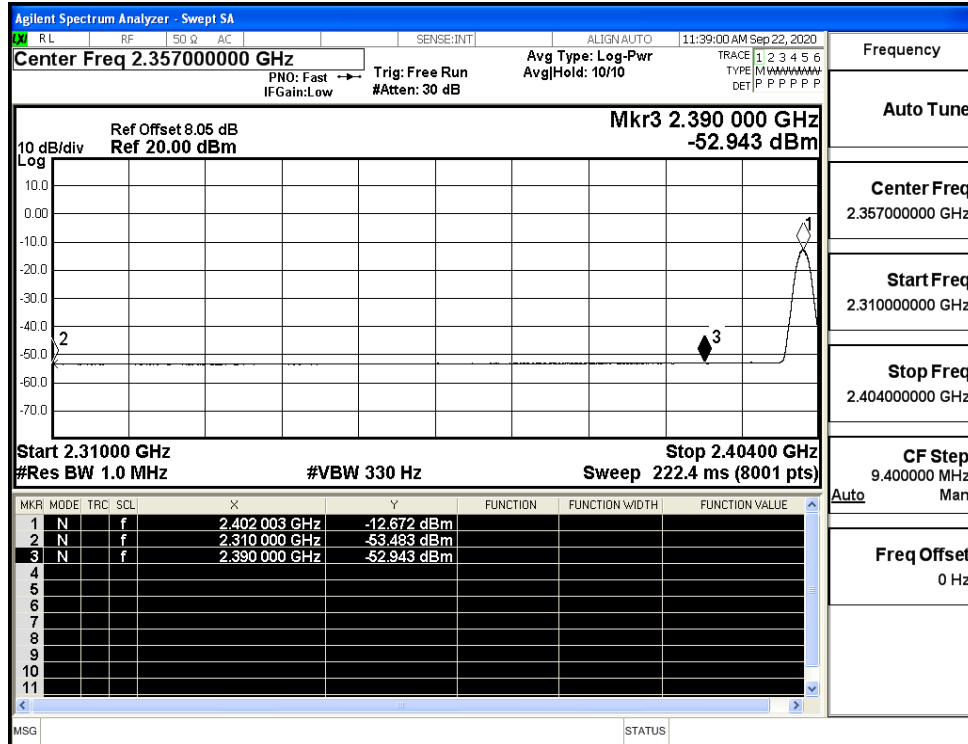

Restrict-band band-edge measurements_BT LE_2480_Ant1_PEAK

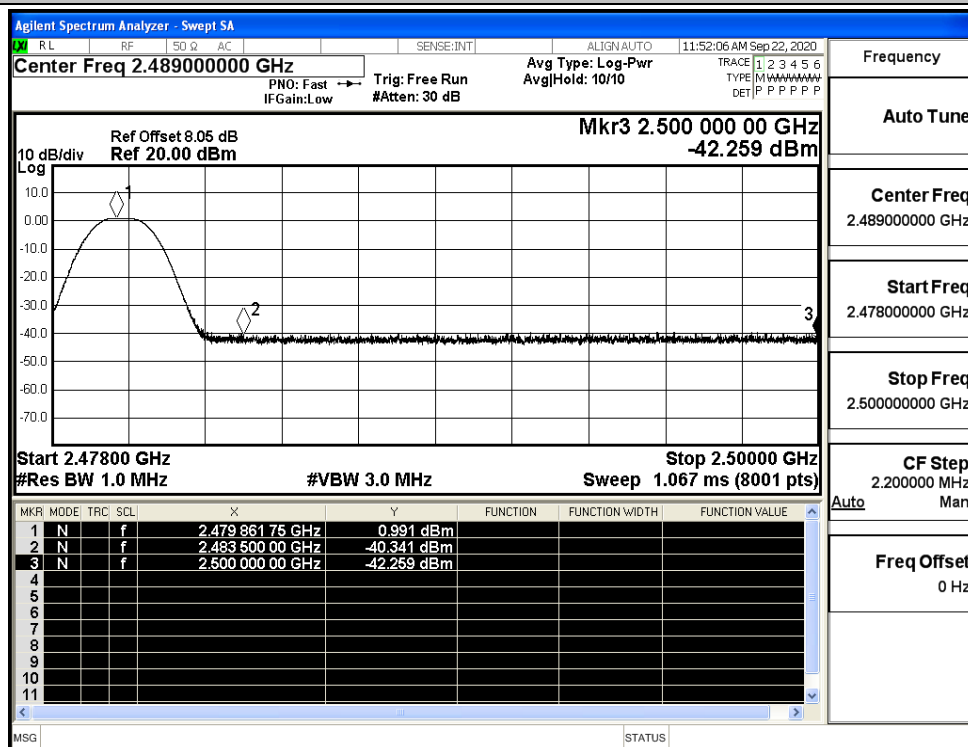

Restrict-band band-edge measurements_BT LE_2480_Ant1_AV

