

TEST REPORT

Report No.: BCTC2112684739-3E


Applicant: L FORWARD INC.

Product Name: 14.1inch laptop

Model/Type
reference: SGIN_X14

Tested Date: 2021-12-09 to 2021-12-28

Issued Date: 2021-12-29



Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2A3YZ-SGINX14


Product Name: 14.1inch laptop
Trademark: N/A
Model/Type reference: SGIN_X14
M1415N
Prepared For: L FORWARD INC.
Address: 1908 Thomes Ave Cheyenne,Laramie, WY 82001, us
Manufacturer: Shenzhen NST Industry and Trade Co., Ltd.
Address: 3/F, Bldg 1, Hongbang Technology Park, No.30 Cuibao Road, Baolong Street, Longgang District, Shenzhen, China
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2021-12-09
Sample tested Date: 2021-12-09 to 2021-12-28
Issue Date: 2021-12-29
Report No.: BCTC2112684739-3E
Test Standards: FCC Part15.247
ANSI C63.10-2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	8
4.3 Support Equipment	9
4.4 Channel List	9
4.5 Test Mode	10
4.6 Table Of Parameters Of Text Software Setting	10
5. Test Facility And Test Instrument Used	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. Conducted Emissions	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test Procedure	13
6.4 EUT Operating Conditions	14
6.5 Test Result	15
7. Radiated Emissions	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	18
7.3 Test Procedure	19
7.4 EUT Operating Conditions	20
7.5 Test Result	21
8. Radiated Band Emission Measurement And Restricted Bands Of Operation	30
8.1 Block Diagram Of Test Setup	30
8.2 Limit	30
8.3 Test Procedure	31
8.4 EUT Operating Conditions	31
8.5 Test Result	32
9. Power Spectral Density Test	35
9.1 Block Diagram Of Test Setup	35
9.2 Limit	35
9.3 Test Procedure	35
9.4 EUT Operating Conditions	35
9.5 Test Result	36
10. Bandwidth Test	43
10.1 Block Diagram Of Test Setup	43
10.2 Limit	43
10.3 Test Procedure	43
10.4 EUT Operating Conditions	43

10.5	Test Result.....	44
11.	Peak Output Power Test	51
11.1	Block Diagram Of Test Setup.....	51
11.2	Limit	51
11.3	Test Procedure	51
11.4	EUT Operating Conditions	51
11.5	Test Result.....	52
12.	100 KHz Bandwidth Of Frequency Band Edge.....	53
12.1	Block Diagram Of Test Setup.....	53
12.2	Limit	53
12.3	Test Procedure	53
12.4	EUT Operating Conditions	53
12.5	Test Result.....	53
13.	Duty Cycle Of Test Signal	74
13.1	Standard Requirement	74
13.2	Formula.....	74
13.3	Test Procedure	74
13.4	Test Result.....	74
14.	Antenna Requirement	88
14.1	Limit	88
14.1	Test Result.....	88
15.	EUT Photographs.....	89
16.	EUT Test Setup Photographs.....	90

(Note: N/A means not applicable)

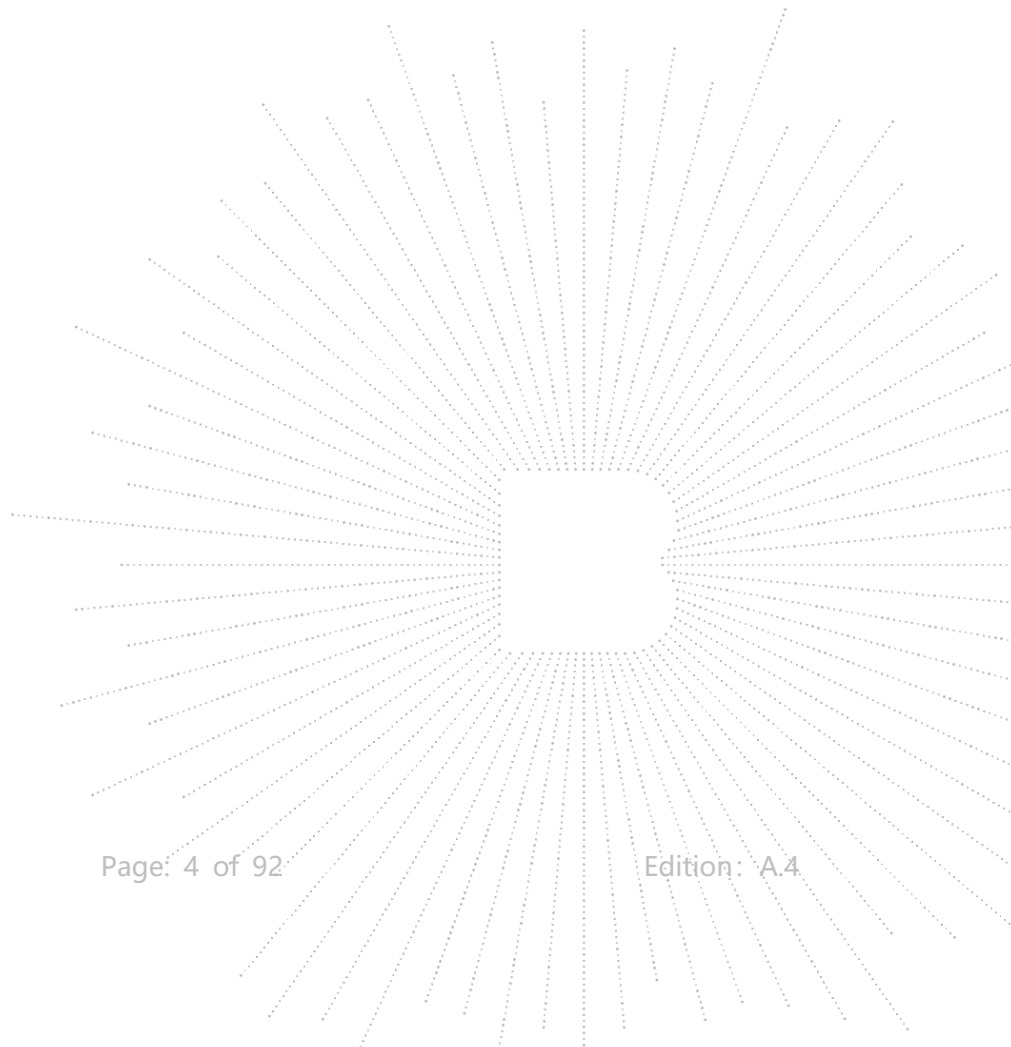

1. Version

Report No.	Issue Date	Description	Approved
BCTC2112684739-3E	2021-12-29	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	Conducted Emission	15.207	PASS
2	6dB Bandwidth	15.247 (a)(2)	PASS
3	Peak Output Power	15.247 (b)	PASS
4	Radiated Spurious Emission	15.247 (d)	PASS
5	Power Spectral Density	15.247 (e)	PASS
6	Restricted Band of Operation	15.205	PASS
7	Band Edge (Out of Band Emissions)	15.247 (d)	PASS
8	Antenna Requirement	15.203	PASS

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission(150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. Product Information And Test Setup


4.1 Product Information

Model/Type reference:	SGIN_X14 M1415N
Model differences:	All the model are the same circuit and RF module, except model names.
Hardware Version:	P142K-1-REV003
Software Version:	E.P142K_6.D12.E1.006
Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz
Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 75Mbps
Type of Modulation:	WIFI: OFDM/DSSS
Number Of Channel	802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH
Antenna installation:	Internal antenna*2
Antenna Gain:	Antenna A:3.42dBi Antenna B:3.42dBi
Ratings:	AC 120V/60Hz/DC 7.6V MODEL: JZB024-120250UX
Adapter:	INPUT: 100-240V 50/60Hz 0.7A OUTPUT: DC 12V 2.5A 30W


4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	14.1inch laptop	N/A	SGIN_X14	N/A	EUT
E-2	Adapter	N/A	JZB024-120250UX	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.2M	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List for 802.11b/g/n(20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422
04	2427	05	2432	06	2437
07	2442	08	2447	09	2452
10	2457	11	2462		

Channel List for 802.11n(40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	04	2427	05	2432
06	2437	07	2442	08	2447
09	2452				

Table for Internal antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
A	N/A	N/A	Internal antenna	3.42	N/A
B	N/A	N/A	Internal antenna	3.42	N/A

EUT has two Internal antennas with Max gain GANT 3.42dBi on every antenna, CDD device with two spatial streams, also can operate with one spatial streams according to KDB662911 D01 v02r01, Directional gain= GANT + Array Gain, where Array Gain is as follows.

- 1) For power spectral density (PSD) measurements,
 $\text{Array Gain} = 10 \log(\text{NANT}/\text{NSS}) \text{ dB} = 10 \log(2/1) = 3.01 \text{ dB}$,
 So the directional gain for PSD is 6.43dBi
- 2) For power measurements,
 The Array gain = 0 dB for $\text{NANT} \leq 4$,
 So the directional gain for Power measurements is 3.42dBi

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode

Radiated Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Note:	
(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.	
(2) We're testing antenna A data	

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	CMD		
Frequency	2412 MHz	2437 MHz	2462 MHz
Parameters	DEF	DEF	DEF
Frequency	2422MHz	2437MHz	2452MHz
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.
FCC Test Firm Registration Number: 712850
IC Registered No.: 23583

5.2 Test Instrument Used


Conducted emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
LISN	R&S	ENV216	101375	May 28, 2021	May 27, 2022
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Attenuator	\	10dB DC-6GHz	1650	May 28, 2021	May 27, 2022

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419	\	May 28, 2021	May 27, 2022
Power Sensor (AV)	Keysight	E9300A	\	May 28, 2021	May 27, 2022
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 28, 2021	May 27, 2022
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	\	May 28, 2021	May 27, 2022

Radiated emissions Test (966 chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
Receiver	R&S	ESRP	101154	May 28, 2021	May 27, 2022
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 28, 2021	May 27, 2022
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 28, 2021	May 27, 2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	Jun. 01, 2021	May 31, 2022
Horn Antenna	Schwarzbeck	BBHA9120D	1541	Jun. 02, 2021	Jun. 01, 2022
Horn Antenn(18GHz -40GHz)	Schwarzbeck	BBHA9170	00822	Jun. 15, 2021	Jun. 14, 2022
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35- HG	2034381	May 28, 2021	May 27, 2022
Loop Antenna(9kHz -30MHz)	Schwarzbeck	FMZB1519B	00014	Jun. 02, 2021	Jun. 01, 2022
RF cables1(9kHz- 30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-00 08	May 28, 2021	May 27, 2022
RF cables2(30MH z-1GHz)	Huber+Suhnar	30MHz-1GH z	1486150	May 28, 2021	May 27, 2022
RF cables3(1GHz- 40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	May 28, 2021	May 27, 2022
Power Metter	Keysight	E4419	\	May 28, 2021	May 27, 2022
Power Sensor (AV)	Keysight	E9300A	\	May 28, 2021	May 27, 2022
Signal Analyzer20kHz -26.5GHz	Keysight	N9020A	MY49100060	May 28, 2021	May 27, 2022
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	\	May 28, 2021	May 27, 2022
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

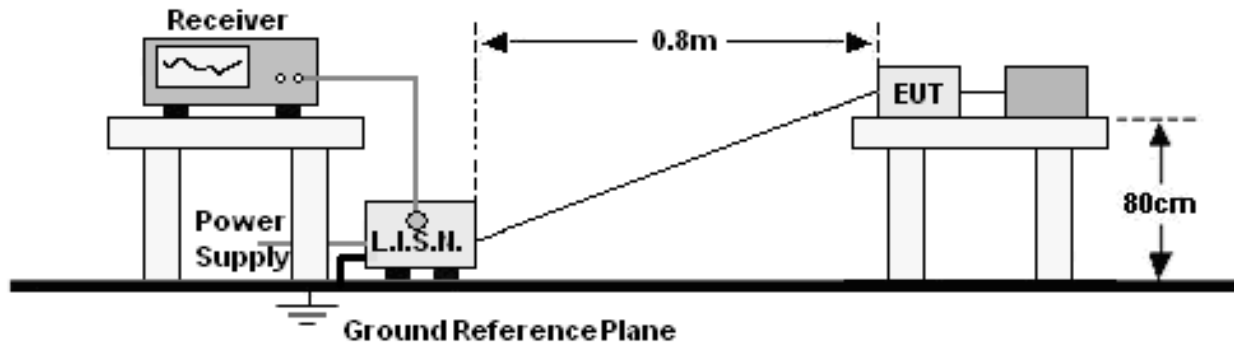

6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test Procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Line
Test Voltage :	AC120/60Hz	Test Mode:	Mode 2(802.11g CH1)

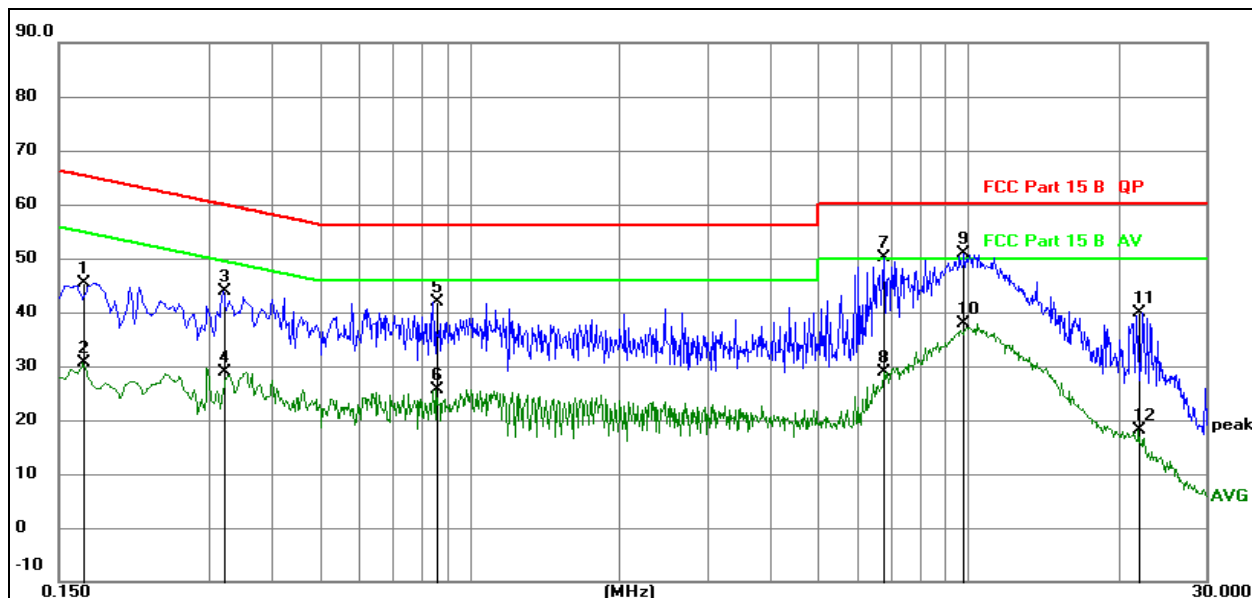


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No. Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	0.1677	25.80	19.61	45.41	65.07	-19.66	QP
2	0.1677	10.90	19.61	30.51	55.07	-24.56	AVG
3	0.3200	24.23	19.61	43.84	59.71	-15.87	QP
4	0.3200	9.39	19.61	29.00	49.71	-20.71	AVG
5	0.8573	22.36	19.62	41.98	56.00	-14.02	QP
6	0.8573	6.07	19.62	25.69	46.00	-20.31	AVG
7	6.7691	30.30	19.74	50.04	60.00	-9.96	QP
8	6.7691	9.05	19.74	28.79	50.00	-21.21	AVG
9 *	9.8085	31.06	19.80	50.86	60.00	-9.14	QP
10	9.8085	18.01	19.80	37.81	50.00	-12.19	AVG
11	21.9463	20.15	19.75	39.90	60.00	-20.10	QP
12	21.9463	-1.62	19.75	18.13	50.00	-31.87	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Neutral
Test Voltage :	AC120/60Hz	Test Mode:	Mode 2(802.11g CH1)

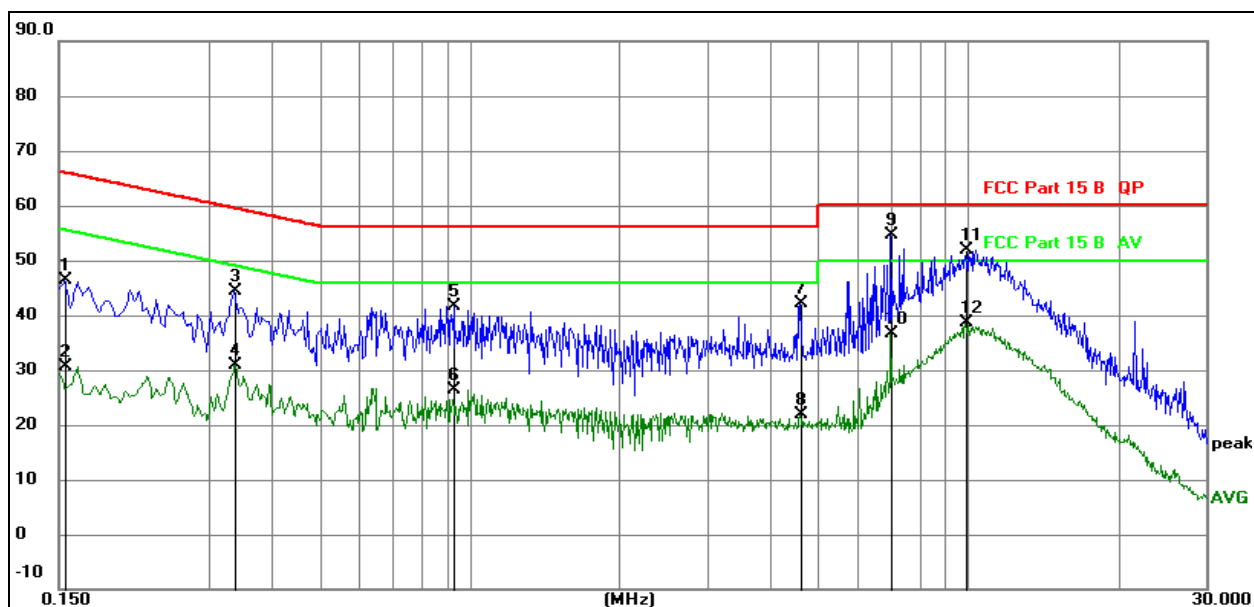

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1545	26.74	19.61	46.35	65.75	-19.40	QP
2		0.1545	11.01	19.61	30.62	55.75	-25.13	AVG
3		0.3390	24.89	19.61	44.50	59.23	-14.73	QP
4		0.3390	11.32	19.61	30.93	49.23	-18.30	AVG
5		0.9330	22.00	19.62	41.62	56.00	-14.38	QP
6		0.9330	6.70	19.62	26.32	46.00	-19.68	AVG
7		4.6095	22.31	19.70	42.01	56.00	-13.99	QP
8		4.6095	2.09	19.70	21.79	46.00	-24.21	AVG
9	*	7.0125	35.01	19.74	54.75	60.00	-5.25	QP
10		7.0125	16.86	19.74	36.60	50.00	-13.40	AVG
11		9.8790	32.08	19.80	51.88	60.00	-8.12	QP
12		9.8790	18.79	19.80	38.59	50.00	-11.41	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

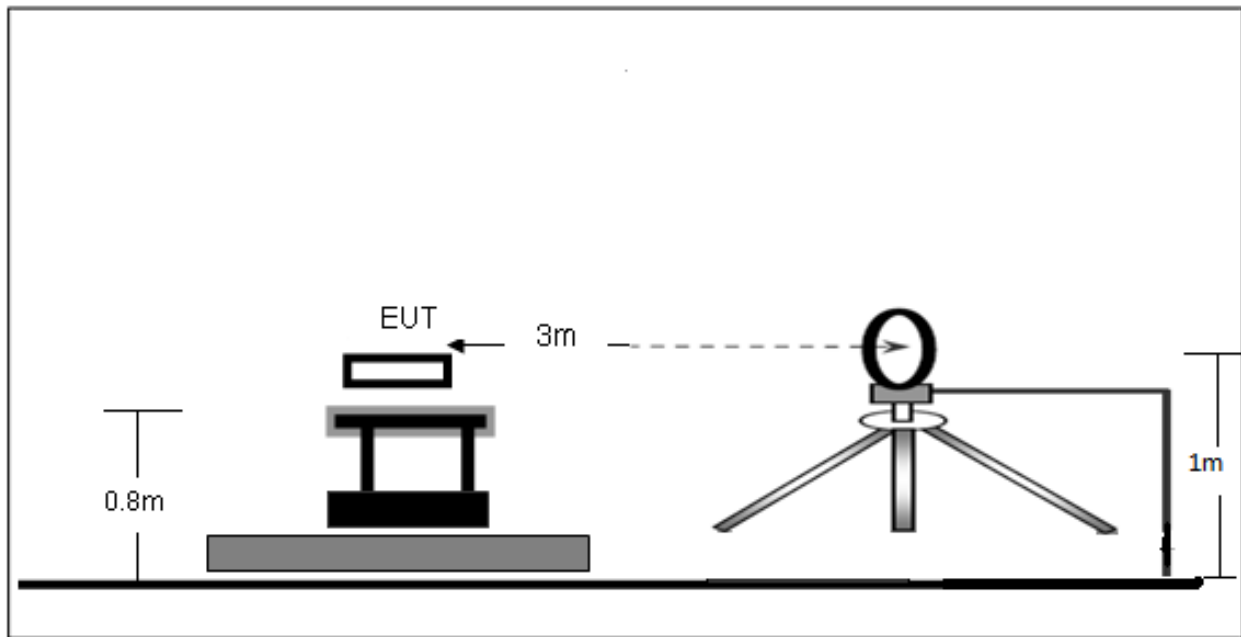

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

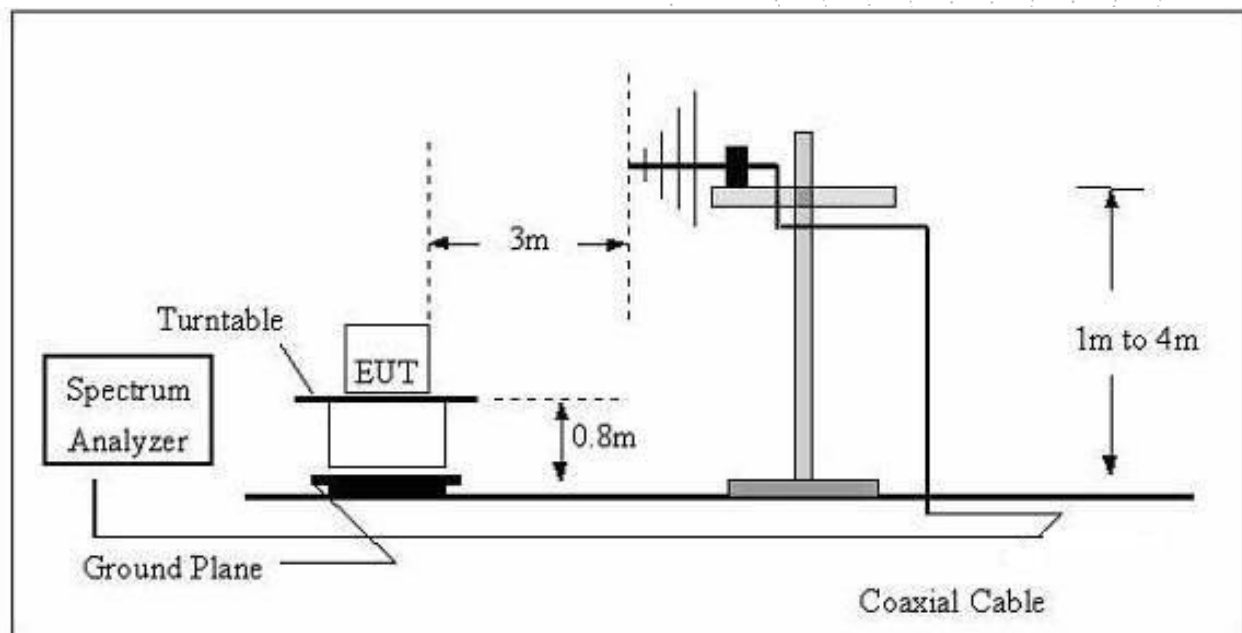

(C) Radiated Emission Test-Up Frequency Above 1GHz

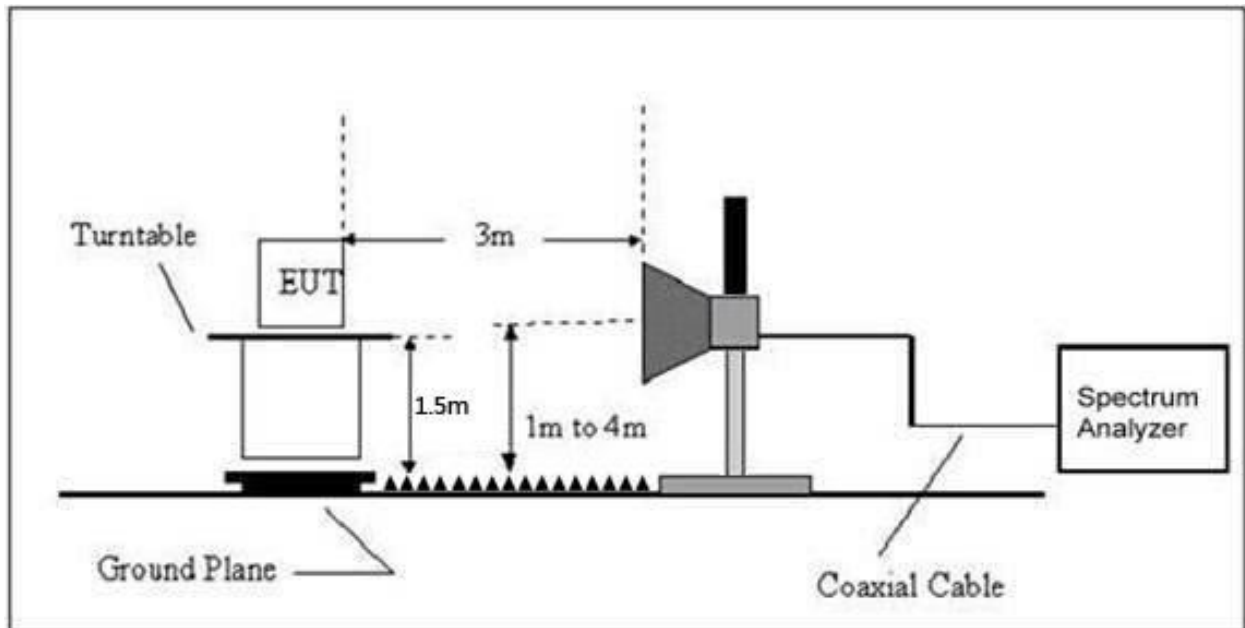

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1)The limit for radiated test was performed according to FCC PART 15C.

(2)The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

7.3 Test Procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).

h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Above 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel,the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26℃	Relative Humidity:	24%
Pressure:	101 kPa	Test Voltage :	DC 7.6V
Test Mode :	Mode 5	Polarization :	--


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

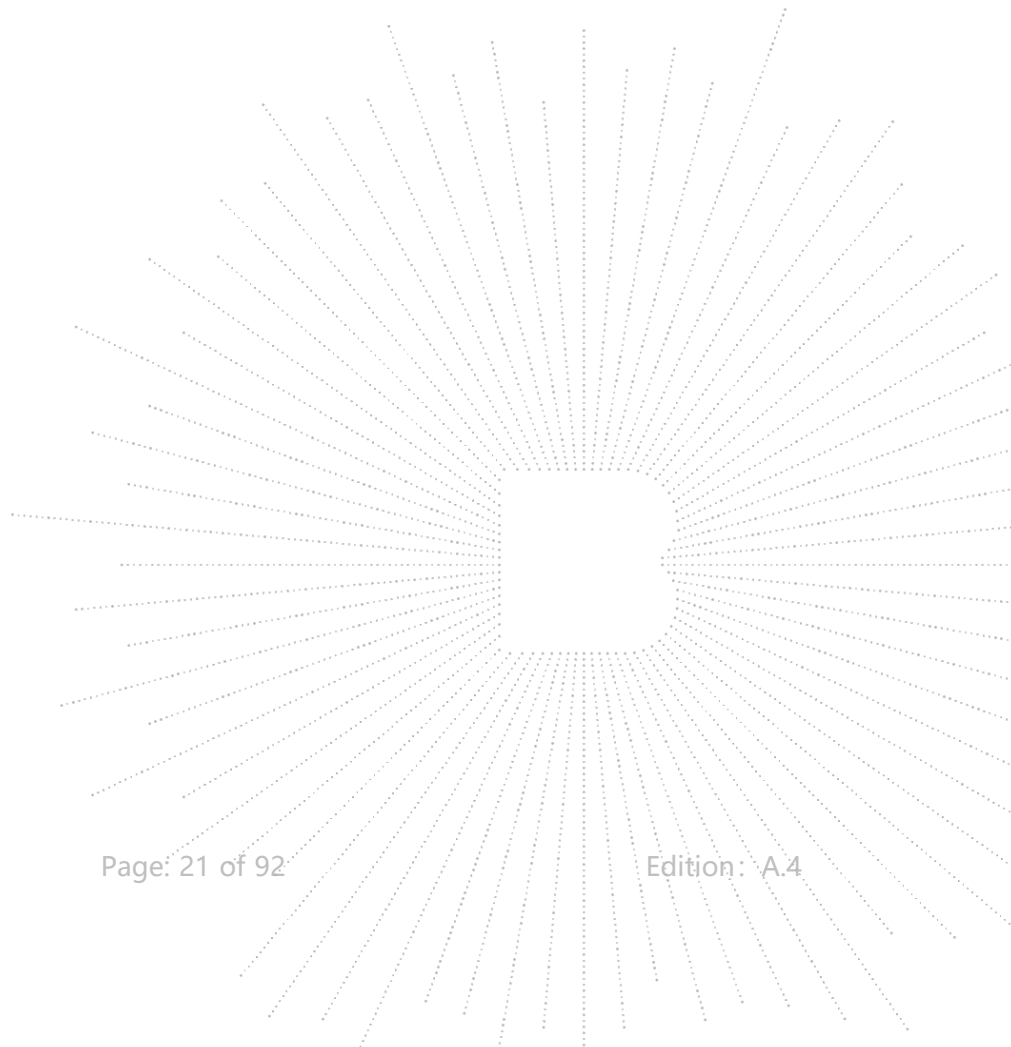

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 7.6V
Test Mode :	Mode 2(802.11g CH1)	Polarization :	Horizontal

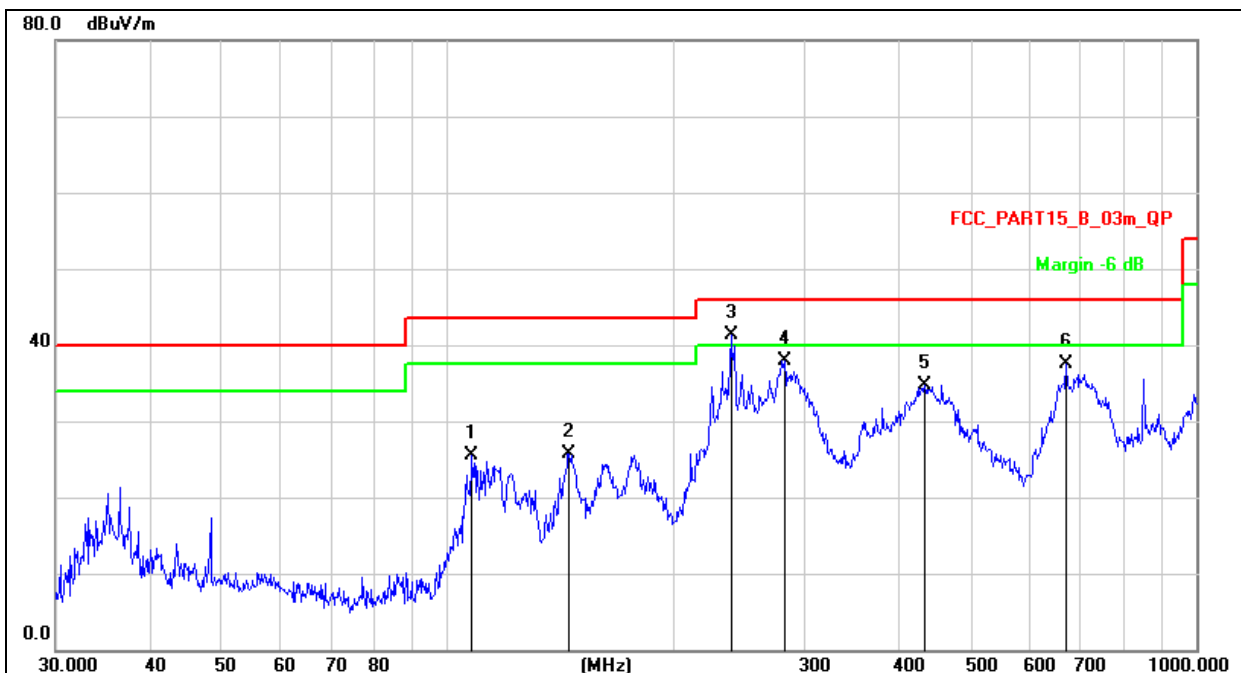


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	107.8877	42.15	-16.66	25.49	43.50	-18.01	QP
2	145.3506	44.94	-19.18	25.76	43.50	-17.74	QP
3 *	239.1473	56.19	-14.82	41.37	46.00	-4.63	QP
4	281.9946	51.99	-14.08	37.91	46.00	-8.09	QP
5	434.0651	44.63	-9.98	34.65	46.00	-11.35	QP
6	670.4893	41.88	-4.34	37.54	46.00	-8.46	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	DC 7.6V
Test Mode :	Mode 2(802.11g CH1)	Polarization :	Vertical

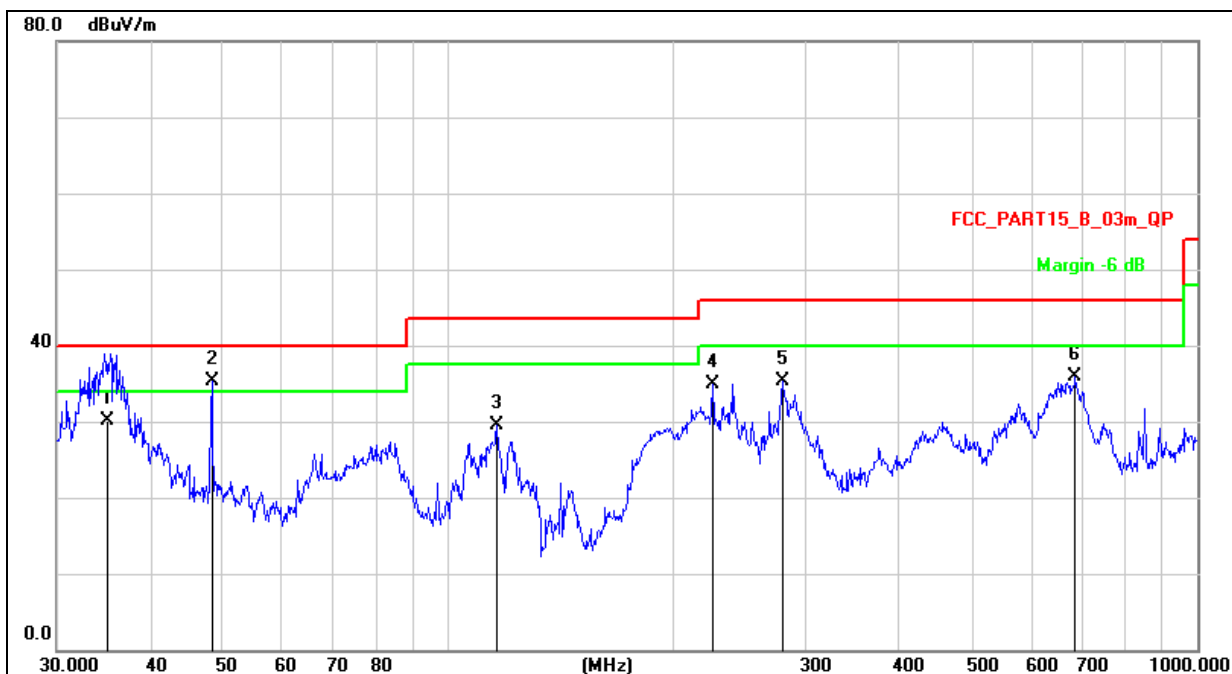

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		35.0933	47.84	-17.66	30.18	40.00	-9.82	QP
2	*	48.3318	50.95	-15.67	35.28	40.00	-4.72	QP
3		116.1321	46.63	-17.21	29.42	43.50	-14.08	QP
4		225.3080	50.02	-15.04	34.98	46.00	-11.02	QP
5		279.0436	49.36	-14.13	35.23	46.00	-10.77	QP
6		687.1507	39.83	-3.96	35.87	46.00	-10.13	QP

Between 1GHz – 25GHz
802.11b

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	54.03	-0.43	53.60	74.00	-20.40	PK
V	4824.00	45.66	-0.43	45.23	54.00	-8.77	AV
V	7236.00	45.44	8.31	53.75	74.00	-20.25	PK
V	7236.00	35.75	8.31	44.06	54.00	-9.94	AV
H	4824.00	50.96	-0.43	50.53	74.00	-23.47	PK
H	4824.00	40.41	-0.43	39.98	54.00	-14.02	AV
H	7236.00	43.31	8.31	51.62	74.00	-22.38	PK
H	7236.00	35.87	8.31	44.18	54.00	-9.82	AV
Middle channel:2437MHz							
V	4874.00	51.75	-0.38	51.37	74.00	-22.63	PK
V	4874.00	44.18	-0.38	43.80	54.00	-10.20	AV
V	7311.00	43.66	8.83	52.49	74.00	-21.51	PK
V	7311.00	33.91	8.83	42.74	54.00	-11.26	AV
H	4874.00	47.23	-0.38	46.85	74.00	-27.15	PK
H	4874.00	36.32	-0.38	35.94	54.00	-18.06	AV
H	7311.00	42.61	8.83	51.44	74.00	-22.56	PK
H	7311.00	35.17	8.83	44.00	54.00	-10.00	AV
High channel:2462MHz							
V	4924.00	54.28	-0.32	53.96	74.00	-20.04	PK
V	4924.00	44.38	-0.32	44.06	54.00	-9.94	AV
V	7386.00	46.32	9.35	55.67	74.00	-18.33	PK
V	7386.00	36.35	9.35	45.70	54.00	-8.30	AV
H	4924.00	51.67	-0.32	51.35	74.00	-22.65	PK
H	4924.00	40.75	-0.32	40.43	54.00	-13.57	AV
H	7386.00	43.90	9.35	53.25	74.00	-20.75	PK
H	7386.00	36.55	9.35	45.90	54.00	-8.10	AV

Remark:

- 1.Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 5.The worst mode is antenna A.

802.11g

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	54.87	-0.43	54.44	74.00	-19.56	PK
V	4824.00	45.27	-0.43	44.84	54.00	-9.16	AV
V	7236.00	46.48	8.31	54.79	74.00	-19.21	PK
V	7236.00	36.85	8.31	45.16	54.00	-8.84	AV
H	4824.00	51.14	-0.43	50.71	74.00	-23.29	PK
H	4824.00	41.85	-0.43	41.42	54.00	-12.58	AV
H	7236.00	44.77	8.31	53.08	74.00	-20.92	PK
H	7236.00	35.83	8.31	44.14	54.00	-9.86	AV
Middle channel:2437MHz							
V	4874.00	52.23	-0.38	51.85	74.00	-22.15	PK
V	4874.00	44.37	-0.38	43.99	54.00	-10.01	AV
V	7311.00	43.09	8.83	51.92	74.00	-22.08	PK
V	7311.00	33.37	8.83	42.20	54.00	-11.80	AV
H	4874.00	51.21	-0.38	50.83	74.00	-23.17	PK
H	4874.00	40.28	-0.38	39.90	54.00	-14.10	AV
H	7311.00	40.62	8.83	49.45	74.00	-24.55	PK
H	7311.00	32.72	8.83	41.55	54.00	-12.45	AV
High channel:2462MHz							
V	4924.00	53.60	-0.32	53.28	74.00	-20.72	PK
V	4924.00	44.71	-0.32	44.39	54.00	-9.61	AV
V	7386.00	47.29	9.35	56.64	74.00	-17.36	PK
V	7386.00	37.98	9.35	47.33	54.00	-6.67	AV
H	4924.00	51.07	-0.32	50.75	74.00	-23.25	PK
H	4924.00	40.78	-0.32	40.46	54.00	-13.54	AV
H	7386.00	45.26	9.35	54.61	74.00	-19.39	PK
H	7386.00	37.95	9.35	47.30	54.00	-6.70	AV

Remark:

- 1.Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 5.The worst mode is antenna A.

802.11n20

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	52.57	-0.43	52.14	74.00	-21.86	PK
V	4824.00	42.84	-0.43	42.41	54.00	-11.59	AV
V	7236.00	45.38	8.31	53.69	74.00	-20.31	PK
V	7236.00	36.11	8.31	44.42	54.00	-9.58	AV
H	4824.00	47.57	-0.43	47.14	74.00	-26.86	PK
H	4824.00	38.27	-0.43	37.84	54.00	-16.16	AV
H	7236.00	44.08	8.31	52.39	74.00	-21.61	PK
H	7236.00	37.01	8.31	45.32	54.00	-8.68	AV
Middle channel:2437MHz							
V	4874.00	49.31	-0.38	48.93	74.00	-25.07	PK
V	4874.00	41.26	-0.38	40.88	54.00	-13.12	AV
V	7311.00	39.90	8.83	48.73	74.00	-25.27	PK
V	7311.00	31.88	8.83	40.71	54.00	-13.29	AV
H	4874.00	47.05	-0.38	46.67	74.00	-27.33	PK
H	4874.00	36.13	-0.38	35.75	54.00	-18.25	AV
H	7311.00	38.38	8.83	47.21	74.00	-26.79	PK
H	7311.00	29.53	8.83	38.36	54.00	-15.64	AV
High channel:2462MHz							
V	4924.00	51.59	-0.32	51.27	74.00	-22.73	PK
V	4924.00	42.70	-0.32	42.38	54.00	-11.62	AV
V	7386.00	42.73	9.35	52.08	74.00	-21.92	PK
V	7386.00	32.05	9.35	41.40	54.00	-12.60	AV
H	4924.00	49.53	-0.32	49.21	74.00	-24.79	PK
H	4924.00	39.13	-0.32	38.81	54.00	-15.19	AV
H	7386.00	39.92	9.35	49.27	74.00	-24.73	PK
H	7386.00	31.67	9.35	41.02	54.00	-12.98	AV

Remark:

- 1.Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 5.Test Mode is MIMO Mode.

802.11n20

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	52.10	-0.43	51.67	74.00	-22.33	PK
V	4824.00	41.57	-0.43	41.14	54.00	-12.86	AV
V	7236.00	43.98	8.31	52.29	74.00	-21.71	PK
V	7236.00	33.34	8.31	41.65	54.00	-12.35	AV
H	4824.00	49.19	-0.43	48.76	74.00	-25.24	PK
H	4824.00	39.47	-0.43	39.04	54.00	-14.96	AV
H	7236.00	41.29	8.31	49.60	74.00	-24.40	PK
H	7236.00	33.58	8.31	41.89	54.00	-12.11	AV
Middle channel:2437MHz							
V	4874.00	50.65	-0.38	50.27	74.00	-23.73	PK
V	4874.00	43.82	-0.38	43.44	54.00	-10.56	AV
V	7311.00	40.55	8.83	49.38	74.00	-24.62	PK
V	7311.00	32.27	8.83	41.10	54.00	-12.90	AV
H	4874.00	46.51	-0.38	46.13	74.00	-27.87	PK
H	4874.00	37.42	-0.38	37.04	54.00	-16.96	AV
H	7311.00	37.68	8.83	46.51	74.00	-27.49	PK
H	7311.00	29.37	8.83	38.20	54.00	-15.80	AV
High channel:2462MHz							
V	4924.00	52.35	-0.32	52.03	74.00	-21.97	PK
V	4924.00	42.92	-0.32	42.60	54.00	-11.40	AV
V	7386.00	44.81	9.35	54.16	74.00	-19.84	PK
V	7386.00	35.51	9.35	44.86	54.00	-9.14	AV
H	4924.00	50.57	-0.32	50.25	74.00	-23.75	PK
H	4924.00	41.19	-0.32	40.87	54.00	-13.13	AV
H	7386.00	42.34	9.35	51.69	74.00	-22.31	PK
H	7386.00	34.56	9.35	43.91	54.00	-10.09	AV

Remark:

1.Emission Level = Meter Reading + Factor,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit

2.If peak below the average limit, the average emission was no test.

3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5.The worst mode is antenna A

802.11n40

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2422MHz							
V	4844.00	54.47	-0.43	54.04	74.00	-19.96	PK
V	4844.00	44.21	-0.43	43.78	54.00	-10.22	AV
V	7266.00	44.48	8.31	52.79	74.00	-21.21	PK
V	7266.00	34.49	8.31	42.80	54.00	-11.20	AV
H	4844.00	51.38	-0.43	50.95	74.00	-23.05	PK
H	4844.00	41.93	-0.43	41.50	54.00	-12.50	AV
H	7266.00	43.06	8.31	51.37	74.00	-22.63	PK
H	7266.00	35.88	8.31	44.19	54.00	-9.81	AV
Middle channel:2437MHz							
V	4874.00	53.43	-0.38	53.05	74.00	-20.95	PK
V	4874.00	46.61	-0.38	46.23	54.00	-7.77	AV
V	7311.00	43.03	8.83	51.86	74.00	-22.14	PK
V	7311.00	33.66	8.83	42.49	54.00	-11.51	AV
H	4874.00	49.94	-0.38	49.56	74.00	-24.44	PK
H	4874.00	39.83	-0.38	39.45	54.00	-14.55	AV
H	7311.00	40.85	8.83	49.68	74.00	-24.32	PK
H	7311.00	32.19	8.83	41.02	54.00	-12.98	AV
High channel:2452MHz							
V	4904.00	56.07	-0.32	55.75	74.00	-18.25	PK
V	4904.00	47.09	-0.32	46.77	54.00	-7.23	AV
V	7356.00	50.05	9.35	59.40	74.00	-14.60	PK
V	7356.00	39.45	9.35	48.80	54.00	-5.20	AV
H	4904.00	54.11	-0.32	53.79	74.00	-20.21	PK
H	4904.00	44.80	-0.32	44.48	54.00	-9.52	AV
H	7356.00	48.36	9.35	57.71	74.00	-16.29	PK
H	7356.00	39.77	9.35	49.12	54.00	-4.88	AV

Remark:

- 1.Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 5.The worst mode is antenna A

802.11n40

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2422MHz							
V	4844.00	54.41	-0.43	53.98	74.00	-20.02	PK
V	4844.00	43.43	-0.43	43.00	54.00	-11.00	AV
V	7266.00	46.41	8.31	54.72	74.00	-19.28	PK
V	7266.00	36.83	8.31	45.14	54.00	-8.86	AV
H	4844.00	52.98	-0.43	52.55	74.00	-21.45	PK
H	4844.00	43.12	-0.43	42.69	54.00	-11.31	AV
H	7266.00	45.28	8.31	53.59	74.00	-20.41	PK
H	7266.00	37.70	8.31	46.01	54.00	-7.99	AV
Middle channel:2437MHz							
V	4874.00	53.10	-0.38	52.72	74.00	-21.28	PK
V	4874.00	45.83	-0.38	45.45	54.00	-8.55	AV
V	7311.00	42.67	8.83	51.50	74.00	-22.50	PK
V	7311.00	34.53	8.83	43.36	54.00	-10.64	AV
H	4874.00	49.91	-0.38	49.53	74.00	-24.47	PK
H	4874.00	39.04	-0.38	38.66	54.00	-15.34	AV
H	7311.00	40.96	8.83	49.79	74.00	-24.21	PK
H	7311.00	32.39	8.83	41.22	54.00	-12.78	AV
High channel:2452MHz							
V	4904.00	55.01	-0.32	54.69	74.00	-19.31	PK
V	4904.00	44.46	-0.32	44.14	54.00	-9.86	AV
V	7356.00	47.63	9.35	56.98	74.00	-17.02	PK
V	7356.00	38.33	9.35	47.68	54.00	-6.32	AV
H	4904.00	53.92	-0.32	53.60	74.00	-20.40	PK
H	4904.00	44.48	-0.32	44.16	54.00	-9.84	AV
H	7356.00	44.90	9.35	54.25	74.00	-19.75	PK
H	7356.00	37.36	9.35	46.71	54.00	-7.29	AV


Remark:

- 1.Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 5.Test Mode is MIMO Mode.

8. Radiated Band Emission Measurement And Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

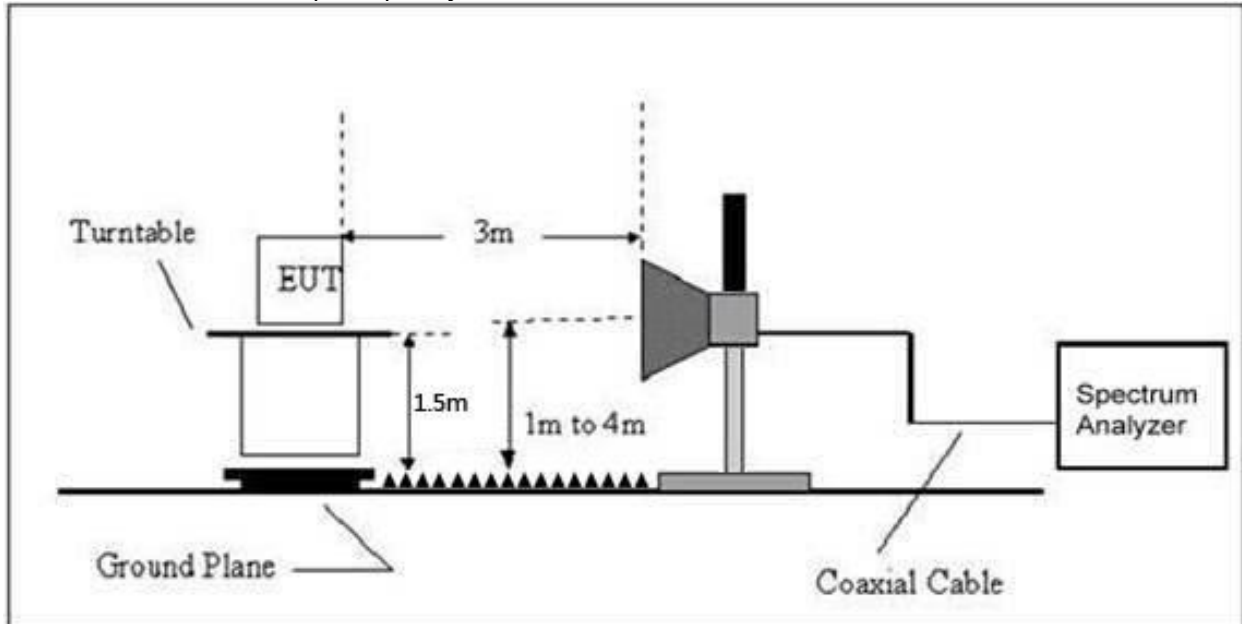

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1)The limit for radiated test was performed according to FCC PART 15C.

(2)The tighter limit applies at the band edges.

(3)Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test Procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g.Test the EUT in the lowest channel,the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11b	Low Channel 2412MHz							
	H	2390.00	54.44	-6.70	47.74	74.00	54.00	PASS
	H	2400.00	58.46	-6.71	51.75	74.00	54.00	PASS
	V	2390.00	53.56	-6.70	46.86	74.00	54.00	PASS
	V	2400.00	58.47	-6.71	51.76	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	57.31	-6.79	50.52	74.00	54.00	PASS
	H	2500.00	53.47	-6.81	46.66	74.00	54.00	PASS
	V	2483.50	57.28	-6.79	50.49	74.00	54.00	PASS
	V	2500.00	52.46	-6.81	45.65	74.00	54.00	PASS
802.11g	Low Channel 2412MHz							
	H	2390.00	53.48	-6.70	46.78	74.00	54.00	PASS
	H	2400.00	57.28	-6.71	50.57	74.00	54.00	PASS
	V	2390.00	53.22	-6.70	46.52	74.00	54.00	PASS
	V	2400.00	57.60	-6.71	50.89	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	56.50	-6.79	49.71	74.00	54.00	PASS
	H	2500.00	51.10	-6.81	44.29	74.00	54.00	PASS
	V	2483.50	56.73	-6.79	49.94	74.00	54.00	PASS
	V	2500.00	52.30	-6.81	45.49	74.00	54.00	PASS
Remark: 1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level – Limit 2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit. 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								

	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11n20	Low Channel 2412MHz							
	H	2390.00	54.73	-6.70	48.03	74.00	54.00	PASS
	H	2400.00	59.11	-6.71	52.40	74.00	54.00	PASS
	V	2390.00	54.45	-6.70	47.75	74.00	54.00	PASS
	V	2400.00	58.19	-6.71	51.48	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	57.16	-6.79	50.37	74.00	54.00	PASS
	H	2500.00	54.02	-6.81	47.21	74.00	54.00	PASS
	V	2483.50	57.33	-6.79	50.54	74.00	54.00	PASS
	V	2500.00	52.93	-6.81	46.12	74.00	54.00	PASS
802.11n40	Low Channel 2422MHz							
	H	2390.00	53.17	-6.70	46.47	74.00	54.00	PASS
	H	2400.00	56.96	-6.71	50.25	74.00	54.00	PASS
	V	2390.00	52.90	-6.70	46.20	74.00	54.00	PASS
	V	2400.00	56.92	-6.71	50.21	74.00	54.00	PASS
	High Channel 2452MHz							
	H	2483.50	55.66	-6.79	48.87	74.00	54.00	PASS
	H	2500.00	51.82	-6.81	45.01	74.00	54.00	PASS
	V	2483.50	56.42	-6.79	49.63	74.00	54.00	PASS
	V	2500.00	52.00	-6.81	45.19	74.00	54.00	PASS
Remark: 1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level – Limit 2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit. 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported. 5.Test Mode is MIMO Mode.								

	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11n20	Low Channel 2412MHz							
	H	2390.00	54.86	-6.70	48.16	74.00	54.00	PASS
	H	2400.00	58.21	-6.71	51.50	74.00	54.00	PASS
	V	2390.00	54.05	-6.70	47.35	74.00	54.00	PASS
	V	2400.00	57.84	-6.71	51.13	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	58.75	-6.79	51.96	74.00	54.00	PASS
	H	2500.00	53.29	-6.81	46.48	74.00	54.00	PASS
	V	2483.50	58.48	-6.79	51.69	74.00	54.00	PASS
	V	2500.00	55.81	-6.81	49.00	74.00	54.00	PASS
802.11n40	Low Channel 2422MHz							
	H	2390.00	54.56	-6.70	47.86	74.00	54.00	PASS
	H	2400.00	58.12	-6.71	51.41	74.00	54.00	PASS
	V	2390.00	55.16	-6.70	48.46	74.00	54.00	PASS
	V	2400.00	59.68	-6.71	52.97	74.00	54.00	PASS
	High Channel 2452MHz							
	H	2483.50	57.28	-6.79	50.49	74.00	54.00	PASS
	H	2500.00	52.16	-6.81	45.35	74.00	54.00	PASS
	V	2483.50	59.36	-6.79	52.57	74.00	54.00	PASS
	V	2500.00	56.17	-6.81	49.36	74.00	54.00	PASS
Remark: 1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level – Limit 2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit. 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								

9. Power Spectral Density Test

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

9.3 Test Procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.4 EUT Operating Conditions


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.



Note: Power Spectral Density(dBm)=Reading+Cable Loss



9.5 Test Result



Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 7.6V



Test Mode	Frequency	Power Spectral Density (dBm/10kHz) ANTA	Power Spectral Density (dBm/3kHz) ANTA	Power Spectral Density (dBm/10kHz) ANTB	Power Spectral Density (dBm/3kHz) ANTB	Total power density (dBm/3KHz)	Limit (dBm/3kHz)	Result
TX b Mode	2412 MHz	-14.13	-19.36	-14.37	-19.60	/	8	PASS
	2437 MHz	-14.73	-19.96	-14.68	-19.91	/	8	PASS
	2462 MHz	-15.07	-20.30	-14.92	-20.15	/	8	PASS
TX g Mode	2412 MHz	-19.86	-25.09	-19.83	-25.06	/	8	PASS
	2437 MHz	-20.01	-25.24	-20.27	-25.50	/	8	PASS
	2462 MHz	-20.46	-25.69	-20.2	-25.43	/	8	PASS
TX n Mode (20M)	2412 MHz	-19.26	-24.49	-19.89	-25.12	-21.78	8	PASS
	2437 MHz	-20.58	-25.81	-20.06	-25.29	-22.53	8	PASS
	2462 MHz	-19.9	-25.13	-20.45	-25.68	-22.39	8	PASS
TX n Mode (40M)	2422 MHz	-23.01	-28.24	-23.17	-28.40	-25.31	8	PASS
	2437 MHz	-23.83	-29.06	-22.76	-27.99	-25.48	8	PASS
	2452 MHz	-23.21	-28.44	-23.71	-28.94	-25.67	8	PASS


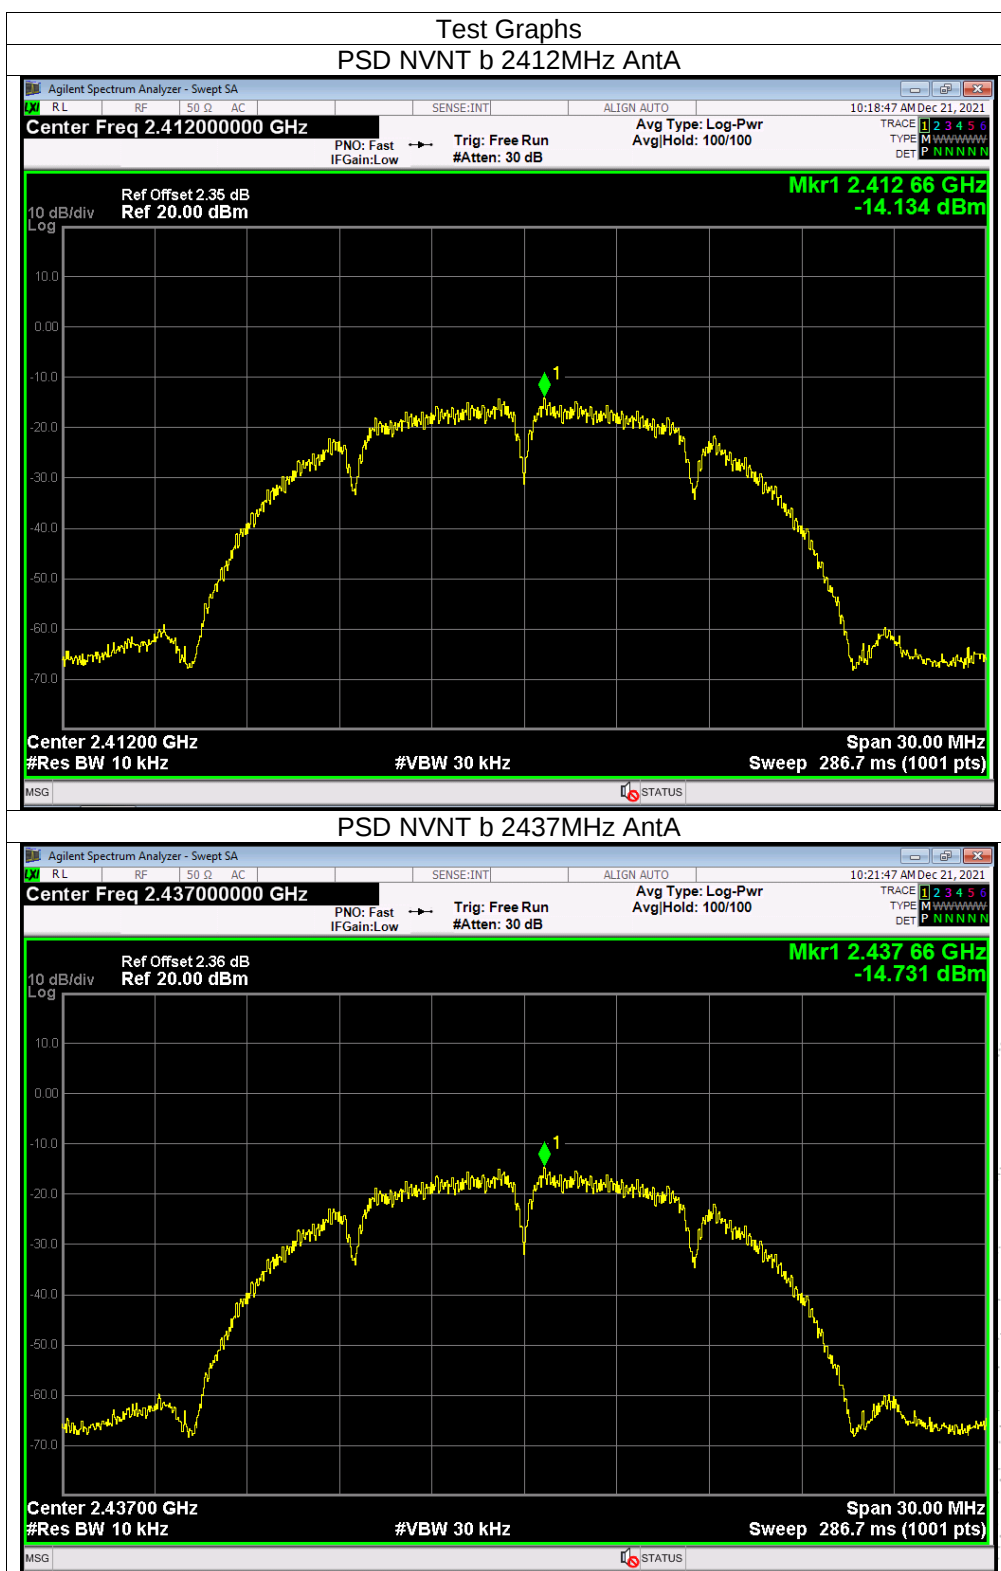


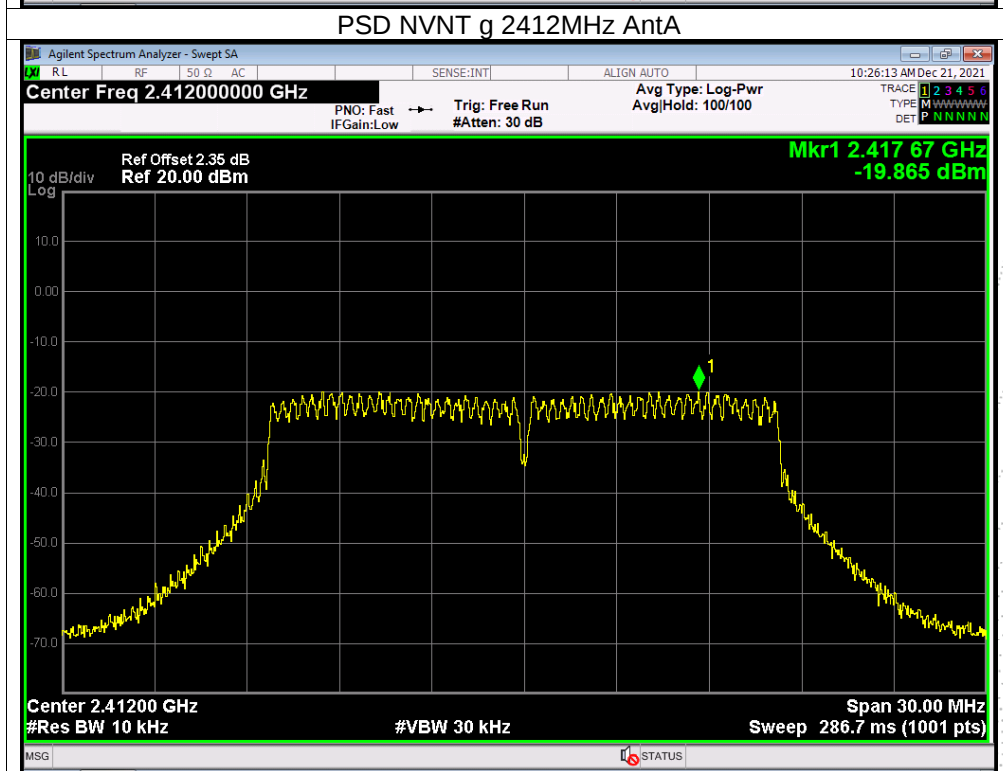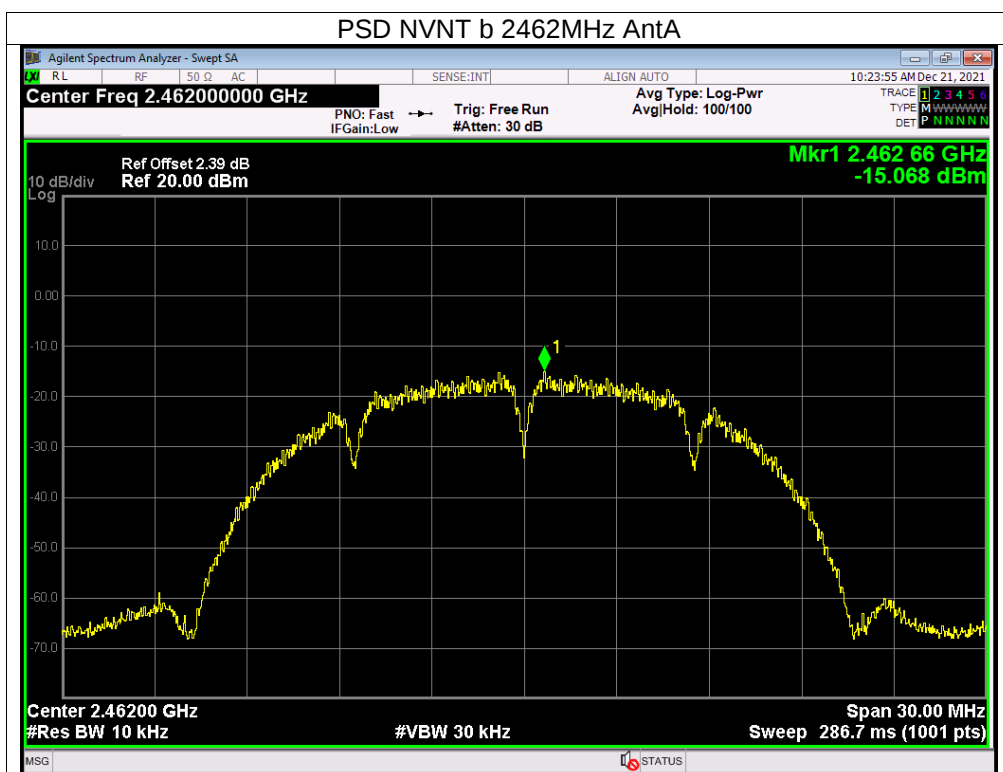

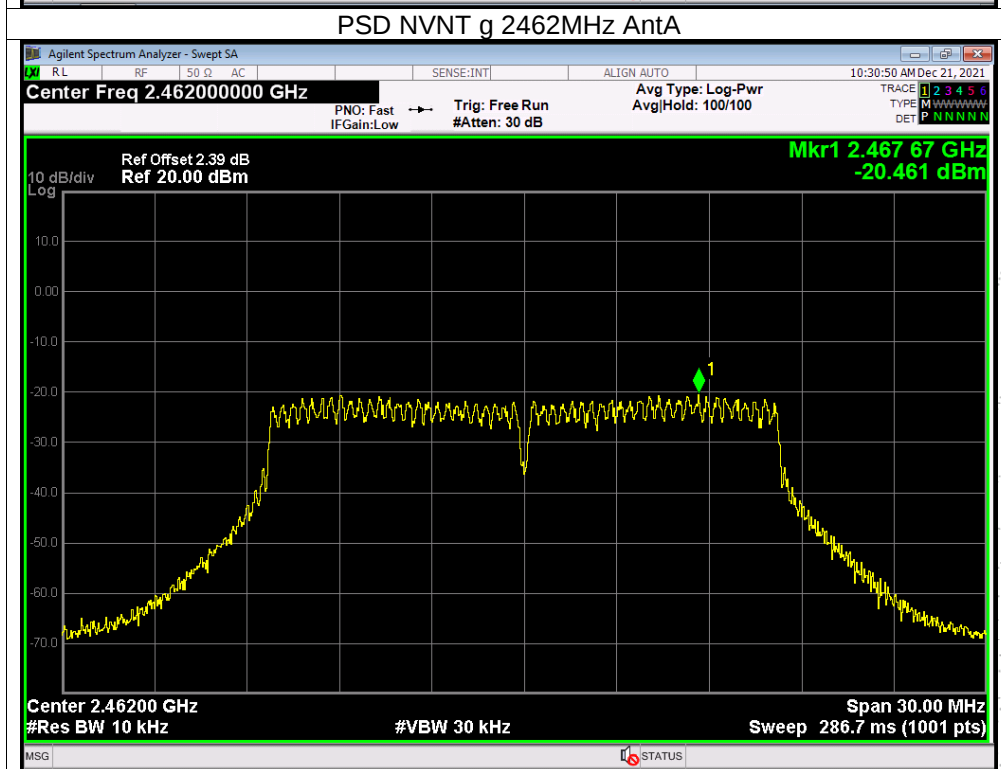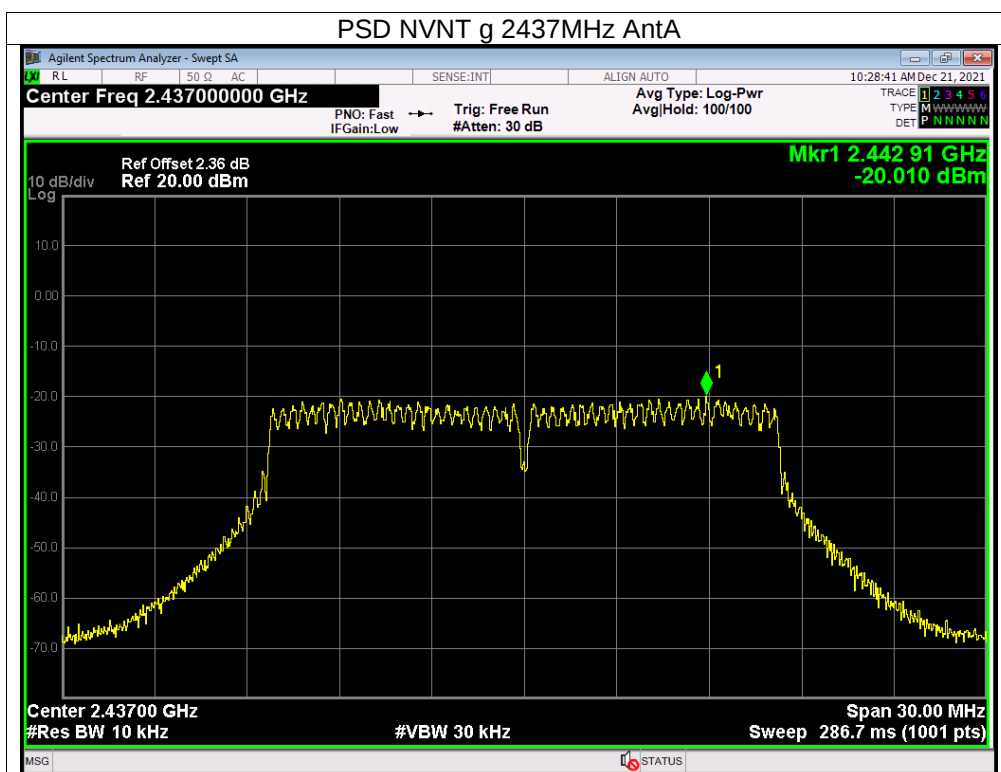

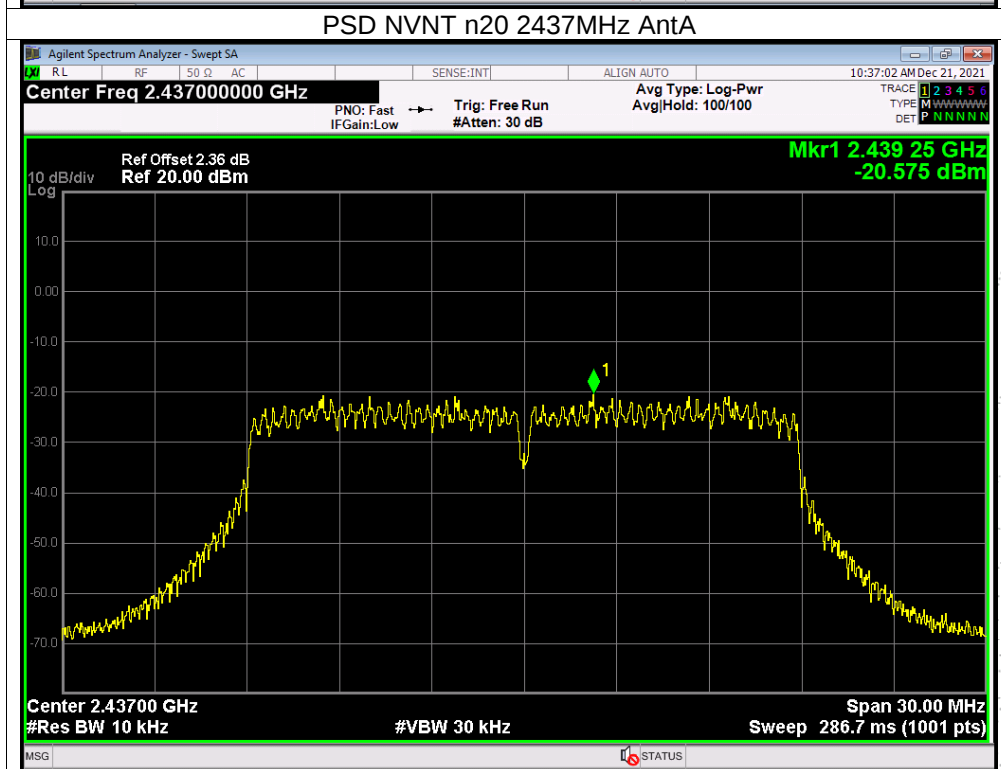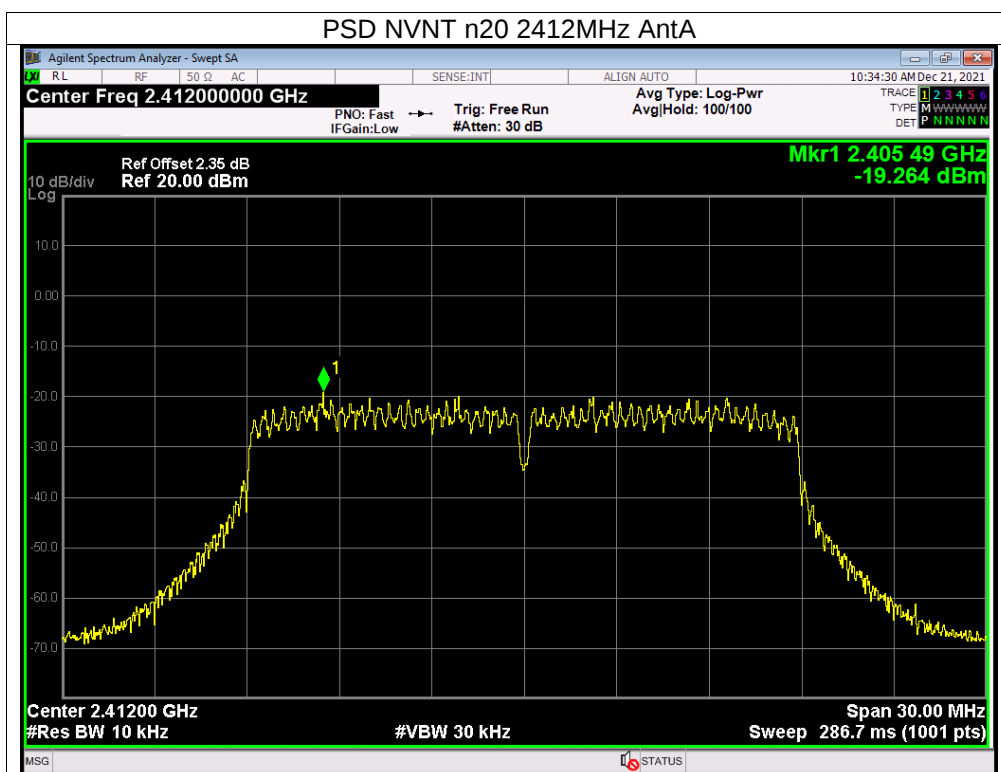

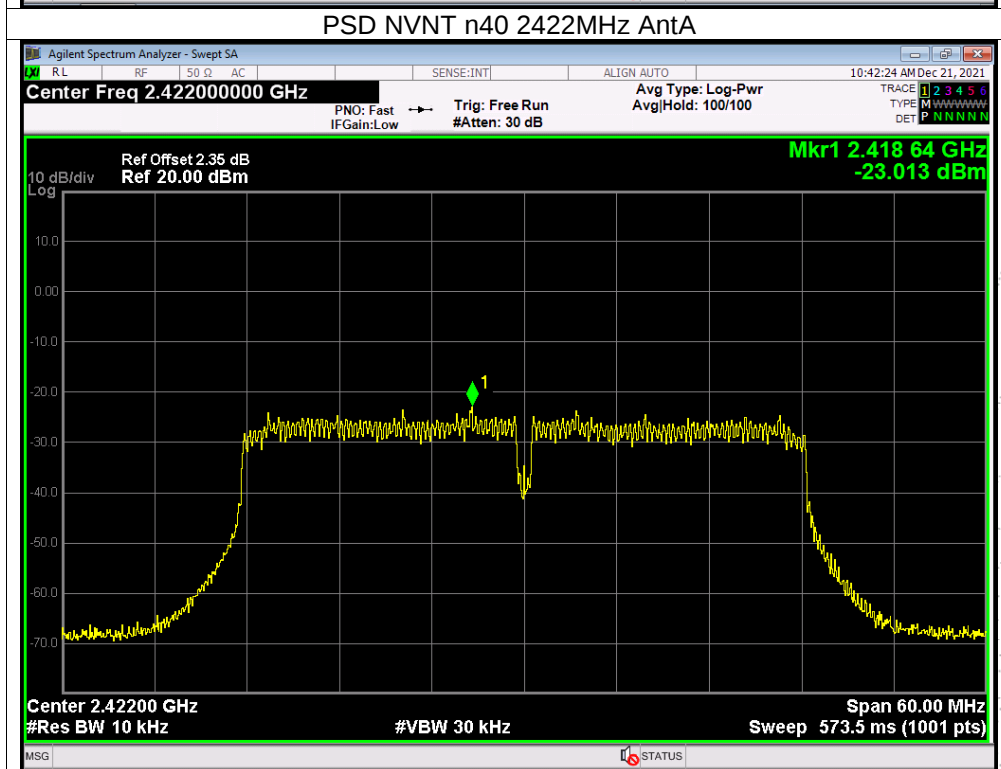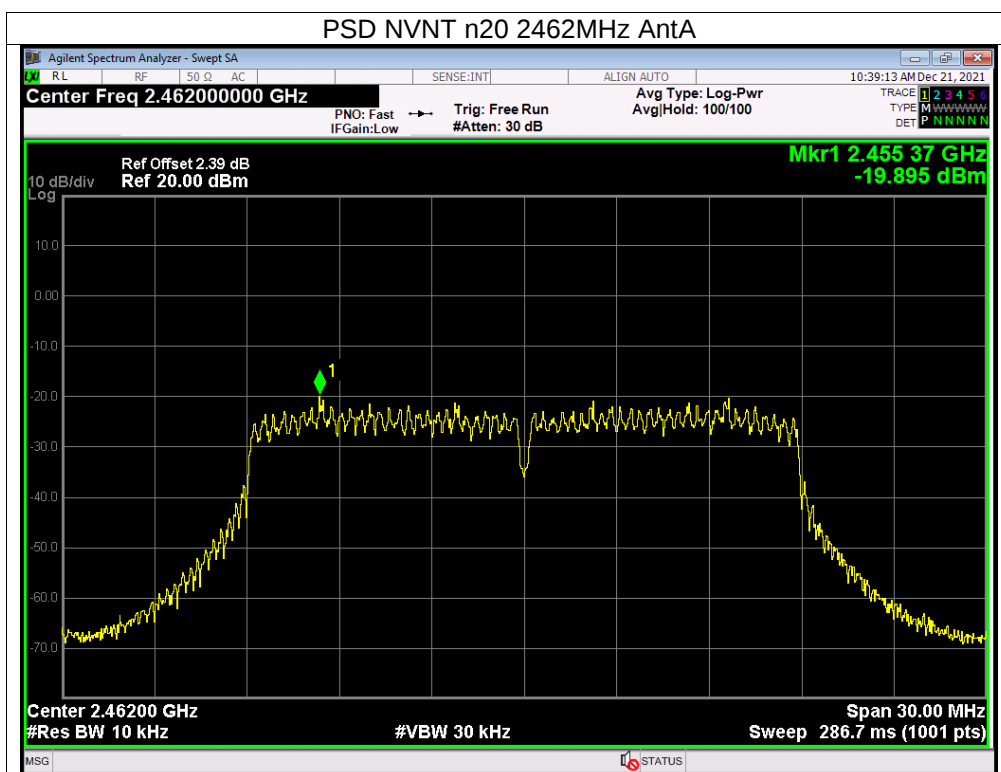

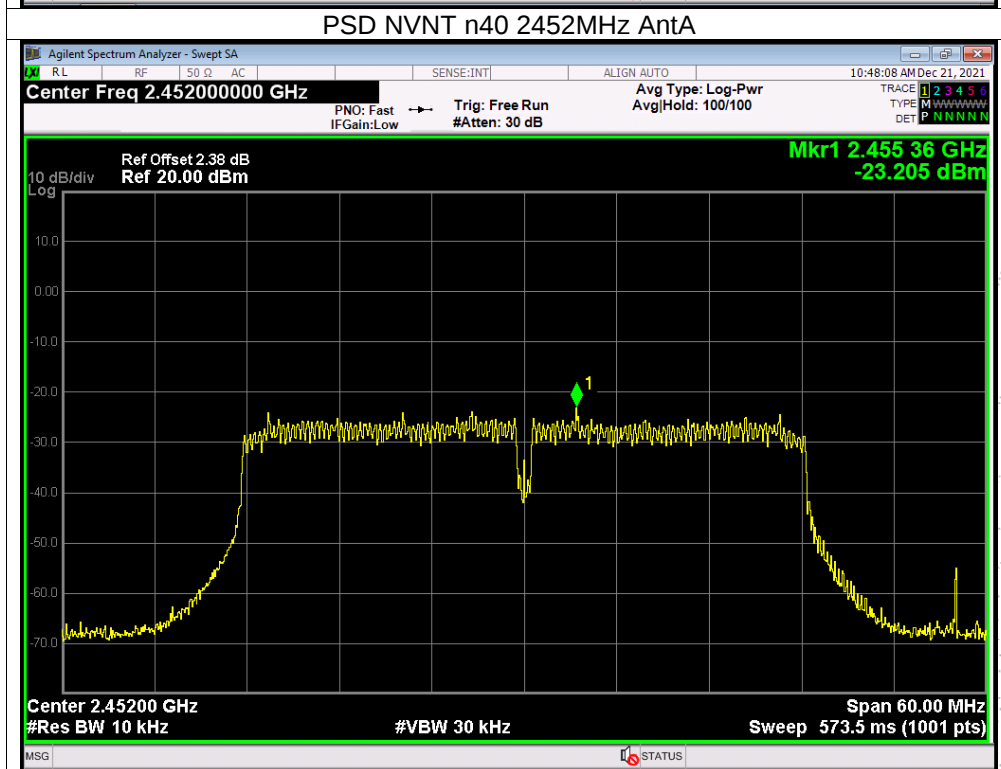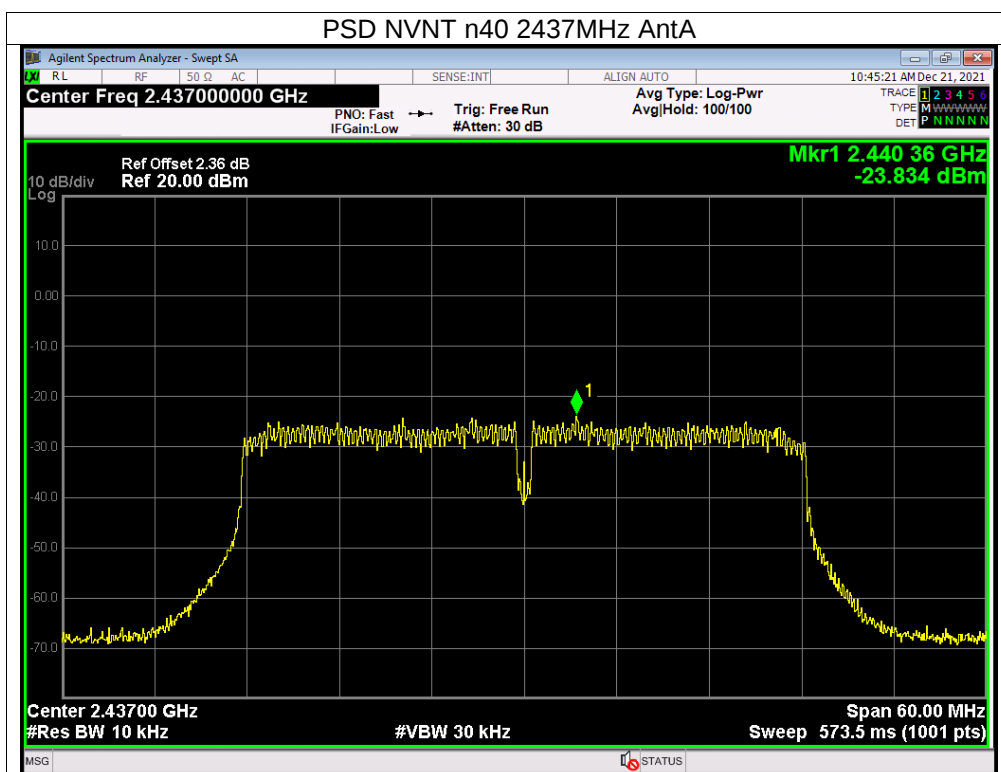

10. Bandwidth Test

10.1 Block Diagram Of Test Setup



10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test Procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

10.5 Test Result


Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 7.6V

Test Mode	Frequency (MHz)	6dB bandwidth (MHz) ANTA	6dB bandwidth (MHz) ANTB	Limit (kHz)	Result
TX b Mode	2412	10.105	10.089	500	Pass
	2437	10.101	10.084	500	Pass
	2462	10.105	10.086	500	Pass
TX g Mode	2412	16.468	16.47	500	Pass
	2437	16.448	16.495	500	Pass
	2462	16.483	16.449	500	Pass
TX N20 Mode	2412	17.600	17.602	500	Pass
	2437	17.597	17.609	500	Pass
	2462	17.618	17.65	500	Pass
TX N40 Mode	2422	36.358	36.329	500	Pass
	2437	36.349	36.304	500	Pass
	2452	36.357	36.341	500	Pass


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.



Test Graphs



-6dB Bandwidth NVNT b 2412MHz AntA


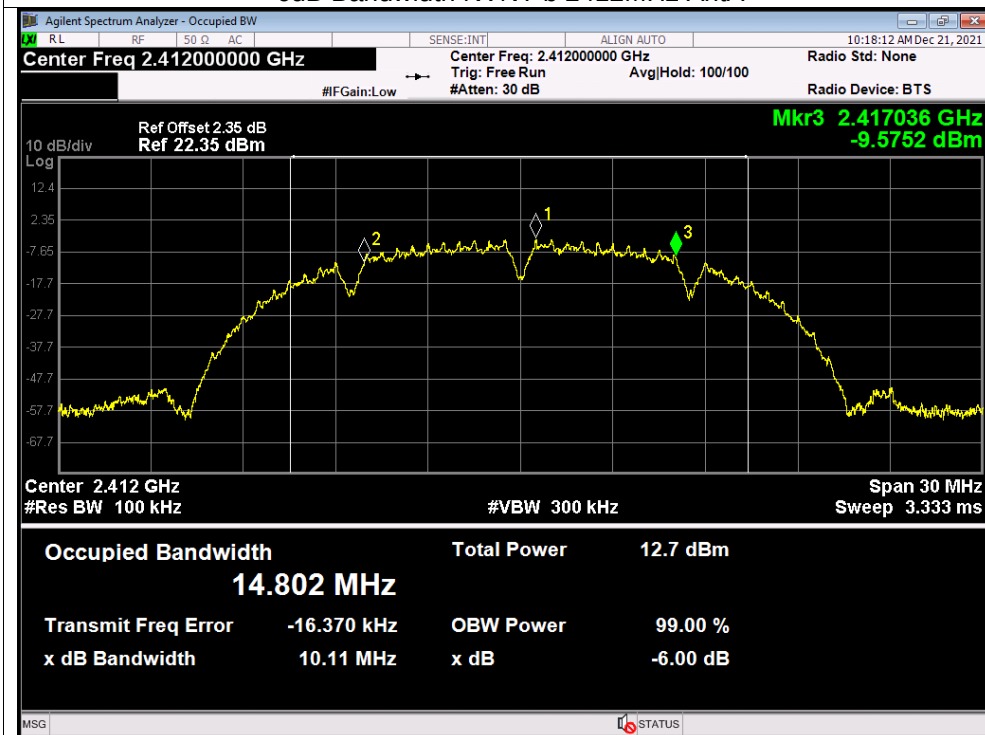




-6dB Bandwidth NVNT b 2437MHz AntA


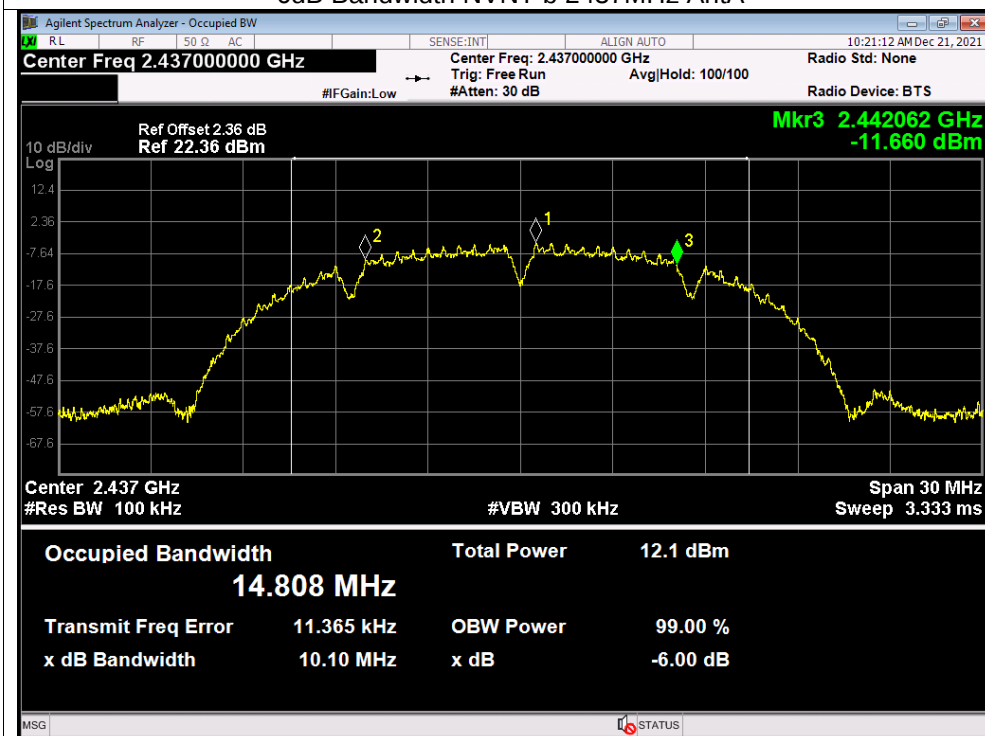


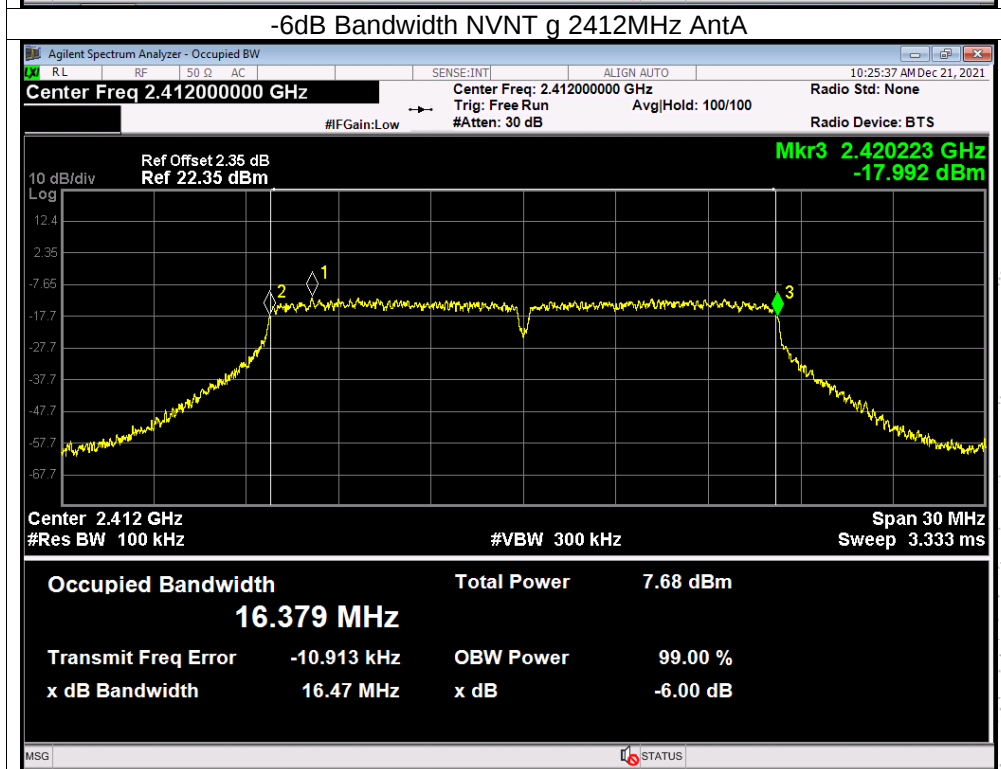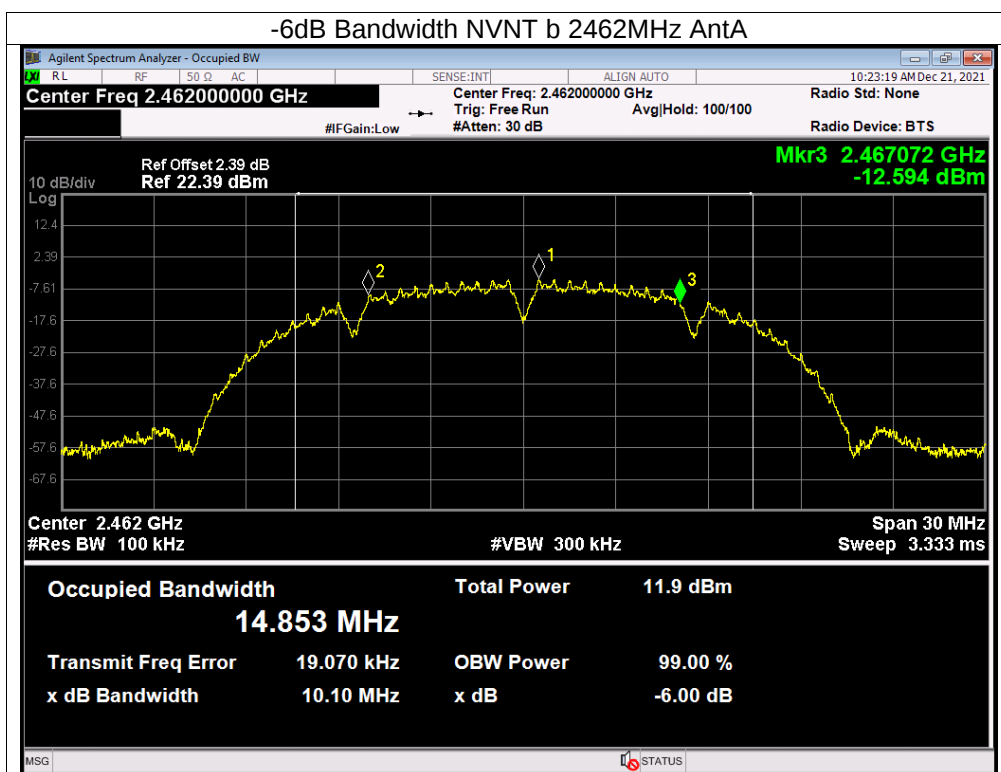

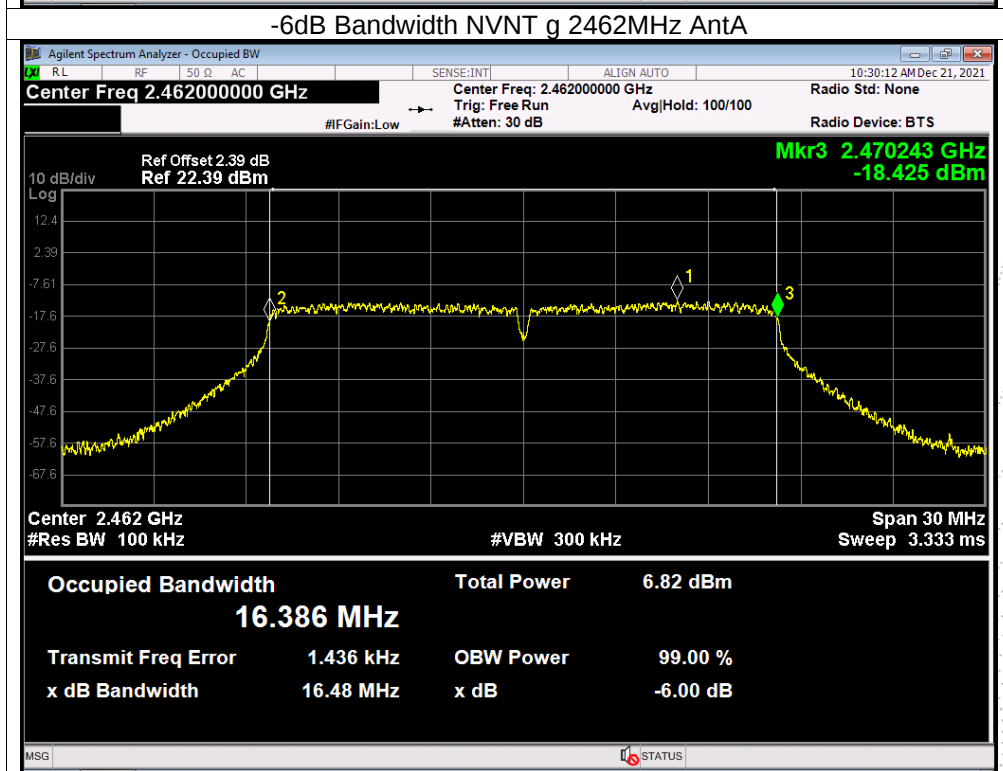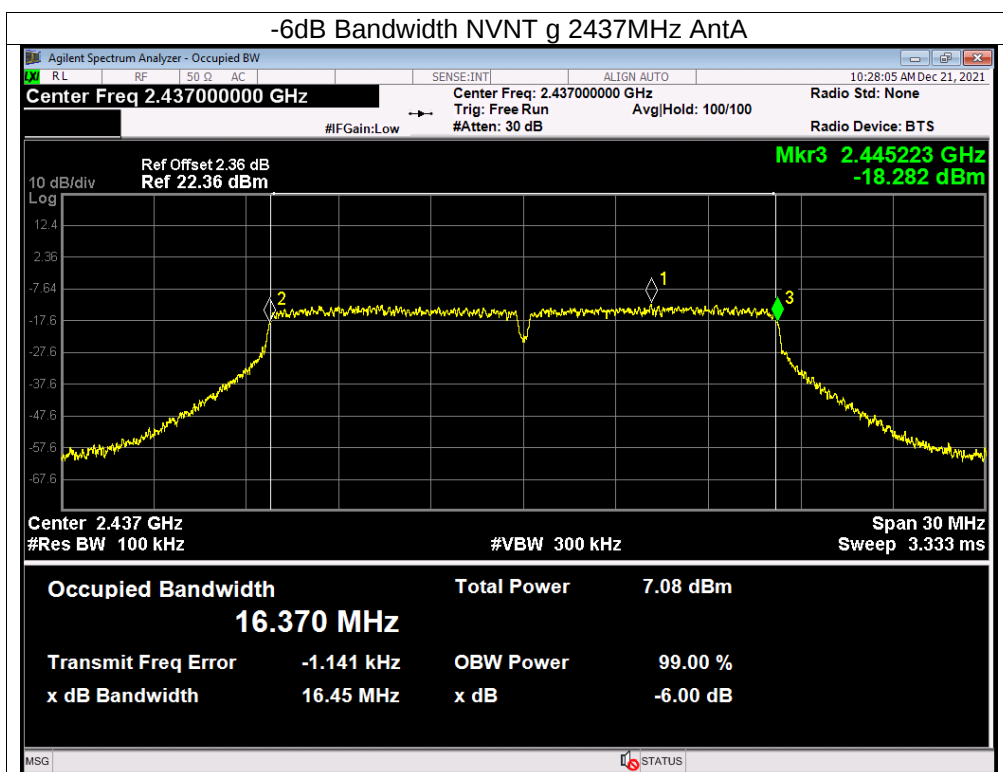

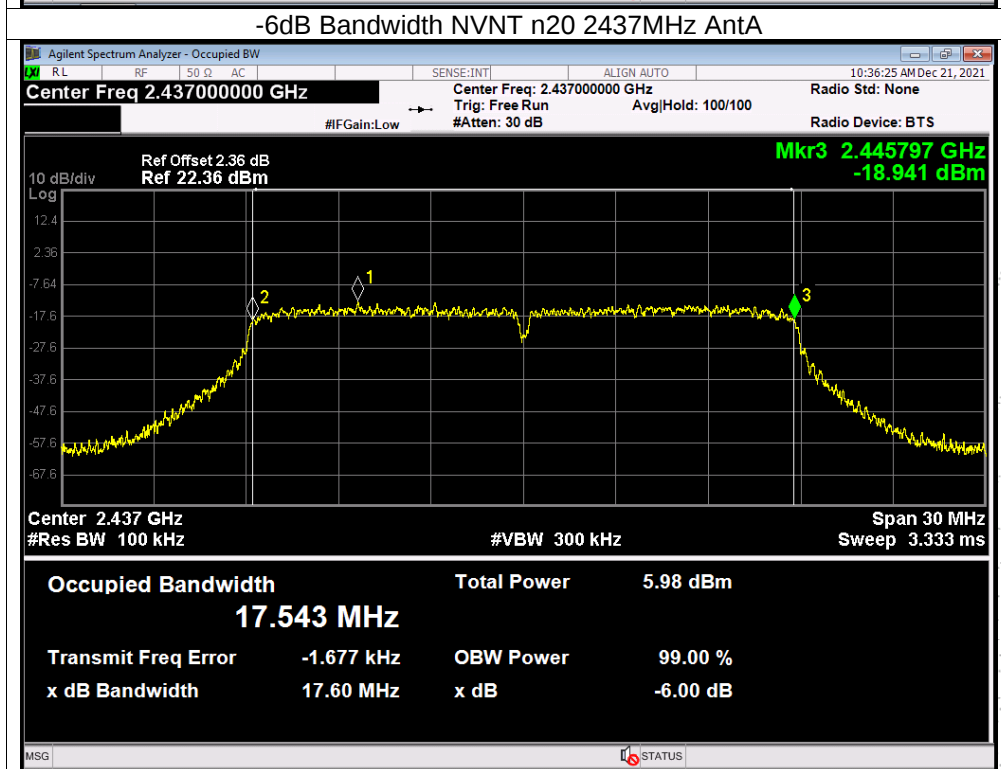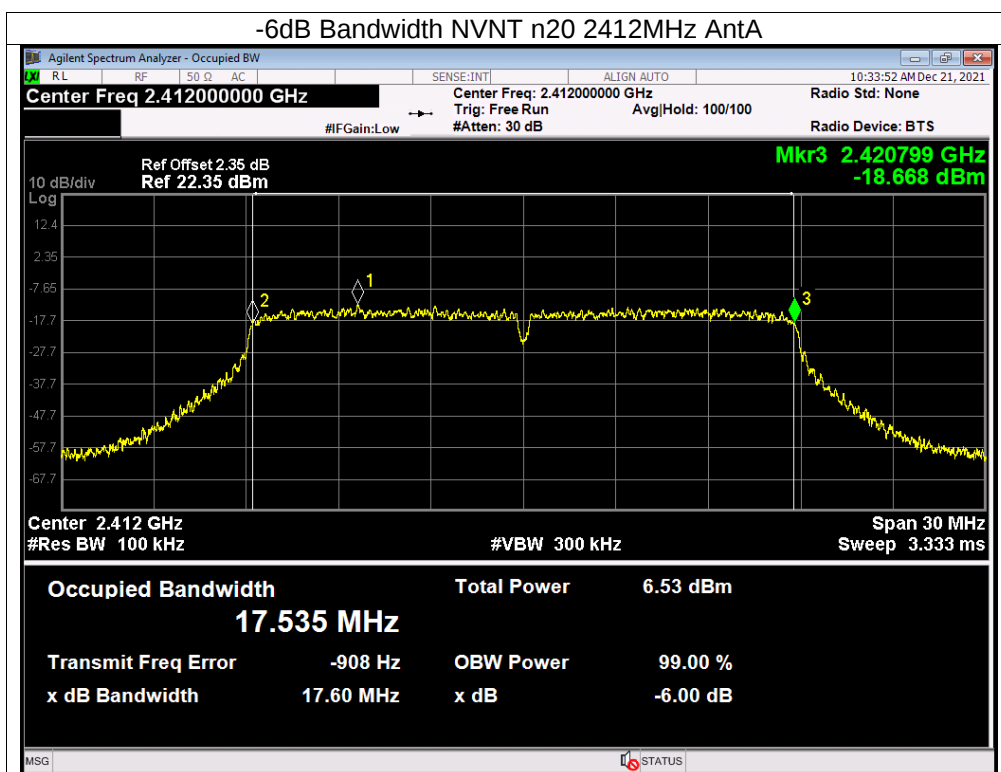

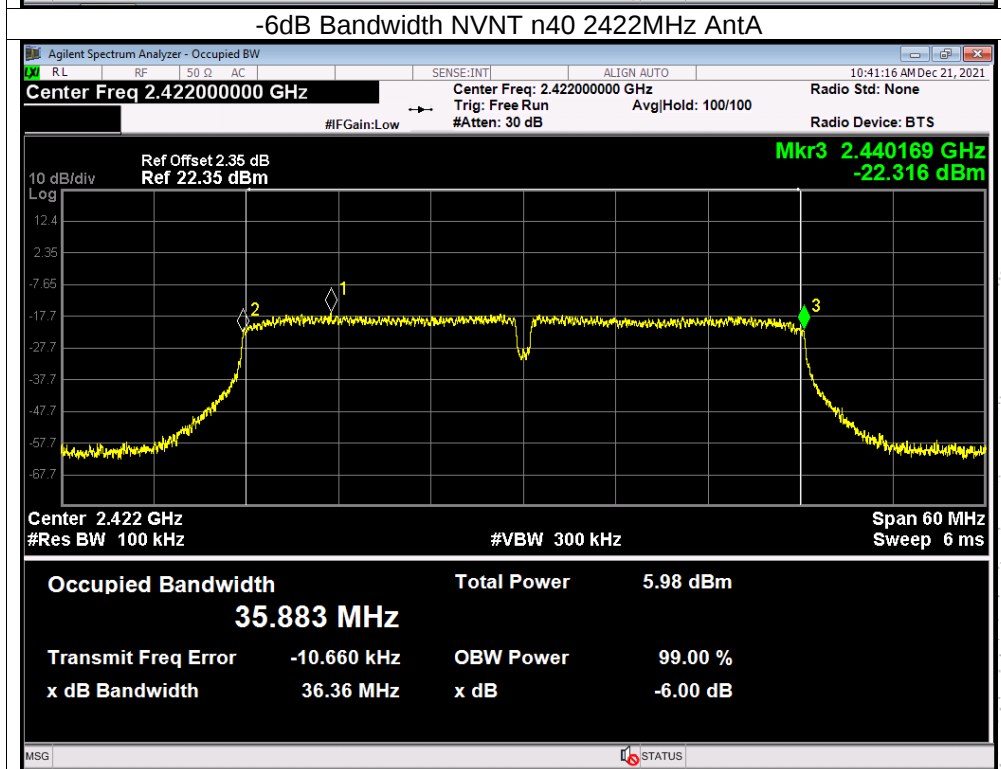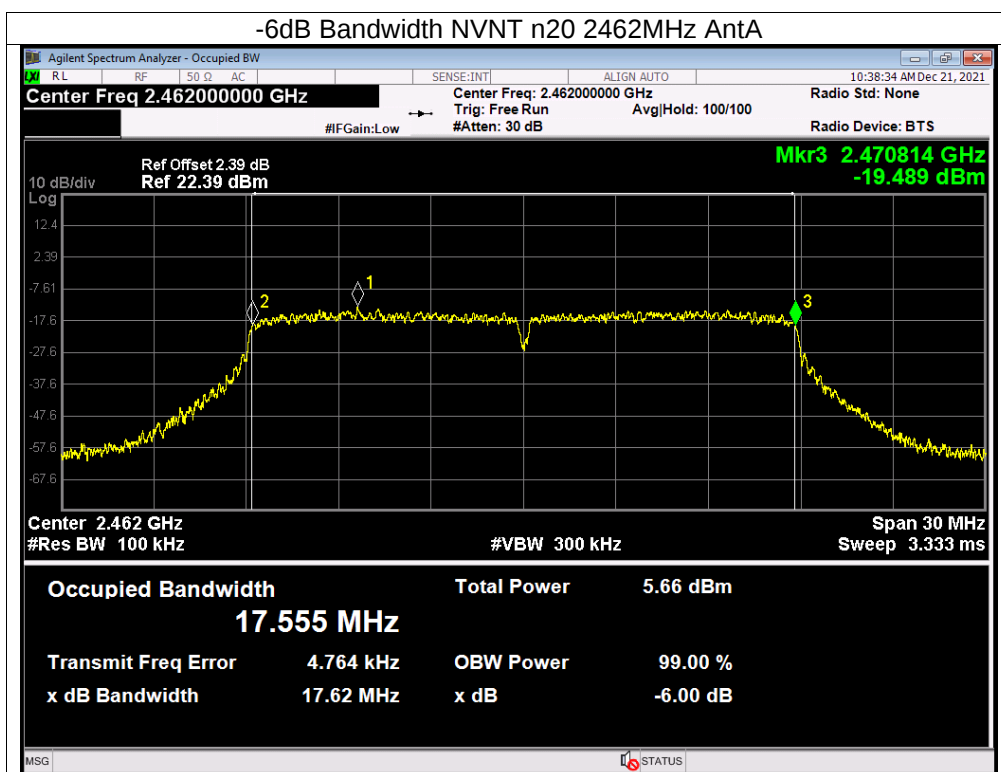

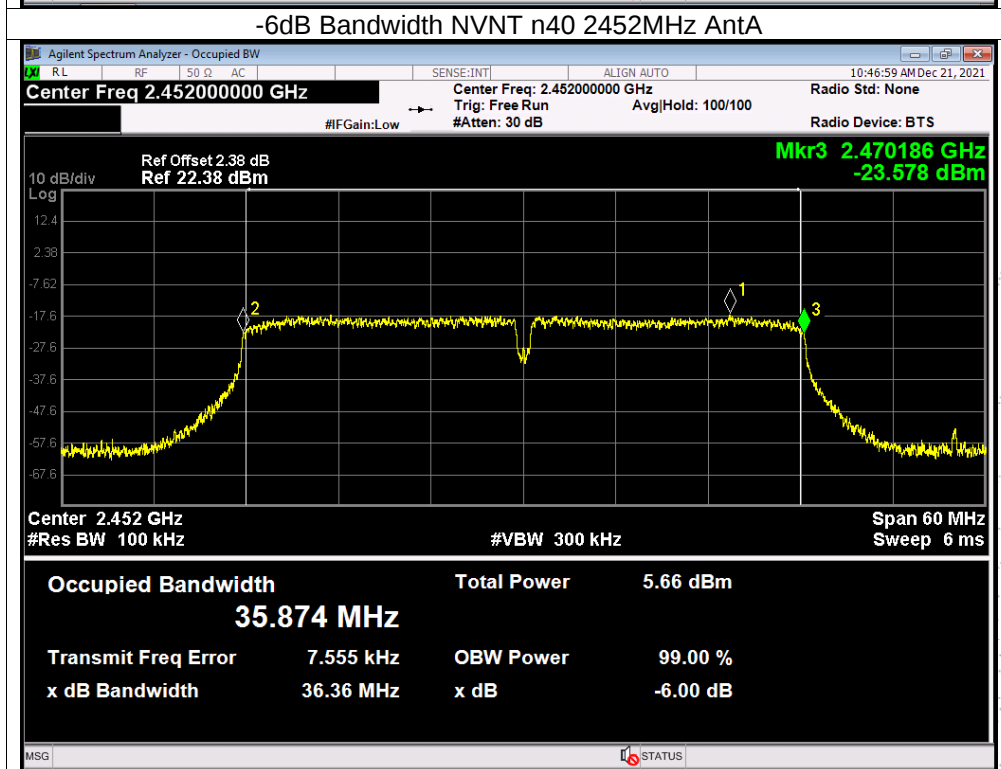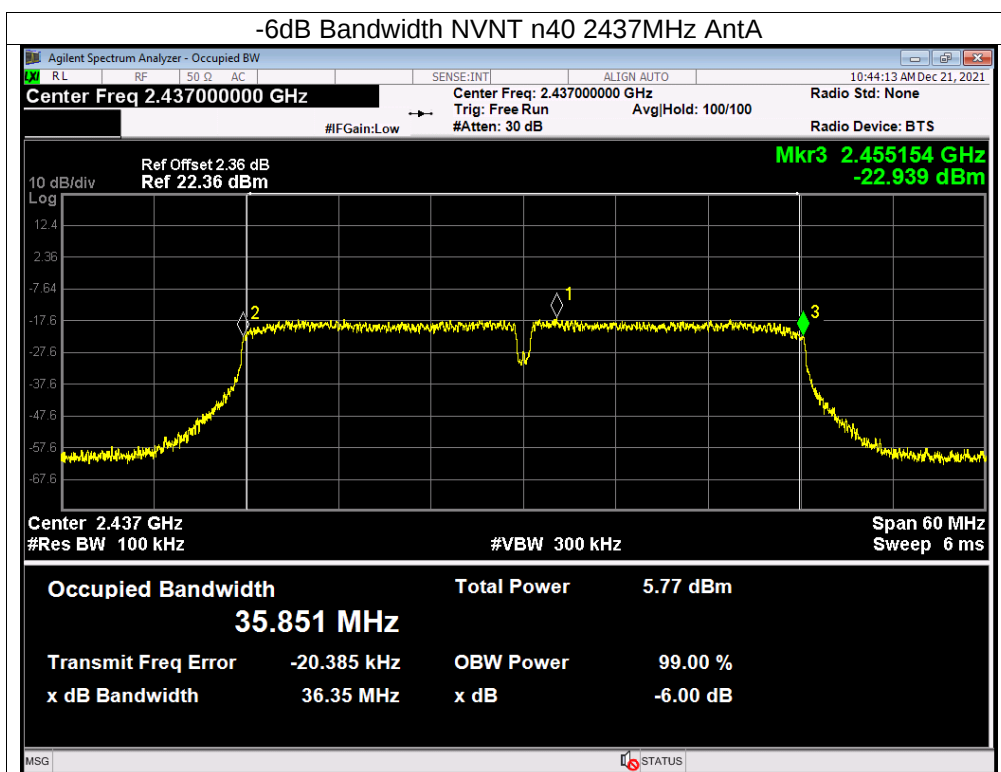

11. Peak Output Power Test

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

11.3 Test Procedure

- The EUT was directly connected to the Power meter

11.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

11.5 Test Result

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 7.6V

Test Mode	Frequency	Maximum Conducted Output Power(PK) ANTA	Maximum Conducted Output Power(PK) ANT B	Total Power Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	(dBm)	(dBm)	dBm
802.11b	2412	7.84	7.51	/	30
	2437	7.29	7.2	/	30
	2462	7.02	7.08	/	30
802.11g	2412	6.63	6.72	/	30
	2437	6.17	6.19	/	30
	2462	5.84	5.96	/	30
802.11n20	2412	5.73	5.69	8.72	30
	2437	5.29	5.12	8.22	30
	2462	4.95	4.93	7.95	30
802.11n40	2422	4.93	4.64	7.80	30
	2437	4.7	4.54	7.63	30
	2452	4.5	4.44	7.48	30

12. 100 KHz Bandwidth Of Frequency Band Edge

12.1 Block Diagram Of Test Setup



12.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

12.3 Test Procedure

Using the following spectrum analyzer setting:

- Set the RBW = 100KHz.
- Set the VBW = 300KHz.
- Sweep time = auto couple.
- Detector function = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize..

12.4 EUT Operating Conditions


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.



Note: Power Spectral Density(dBm)=Reading+Cable Loss



12.5 Test Result



Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 7.6V



Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.


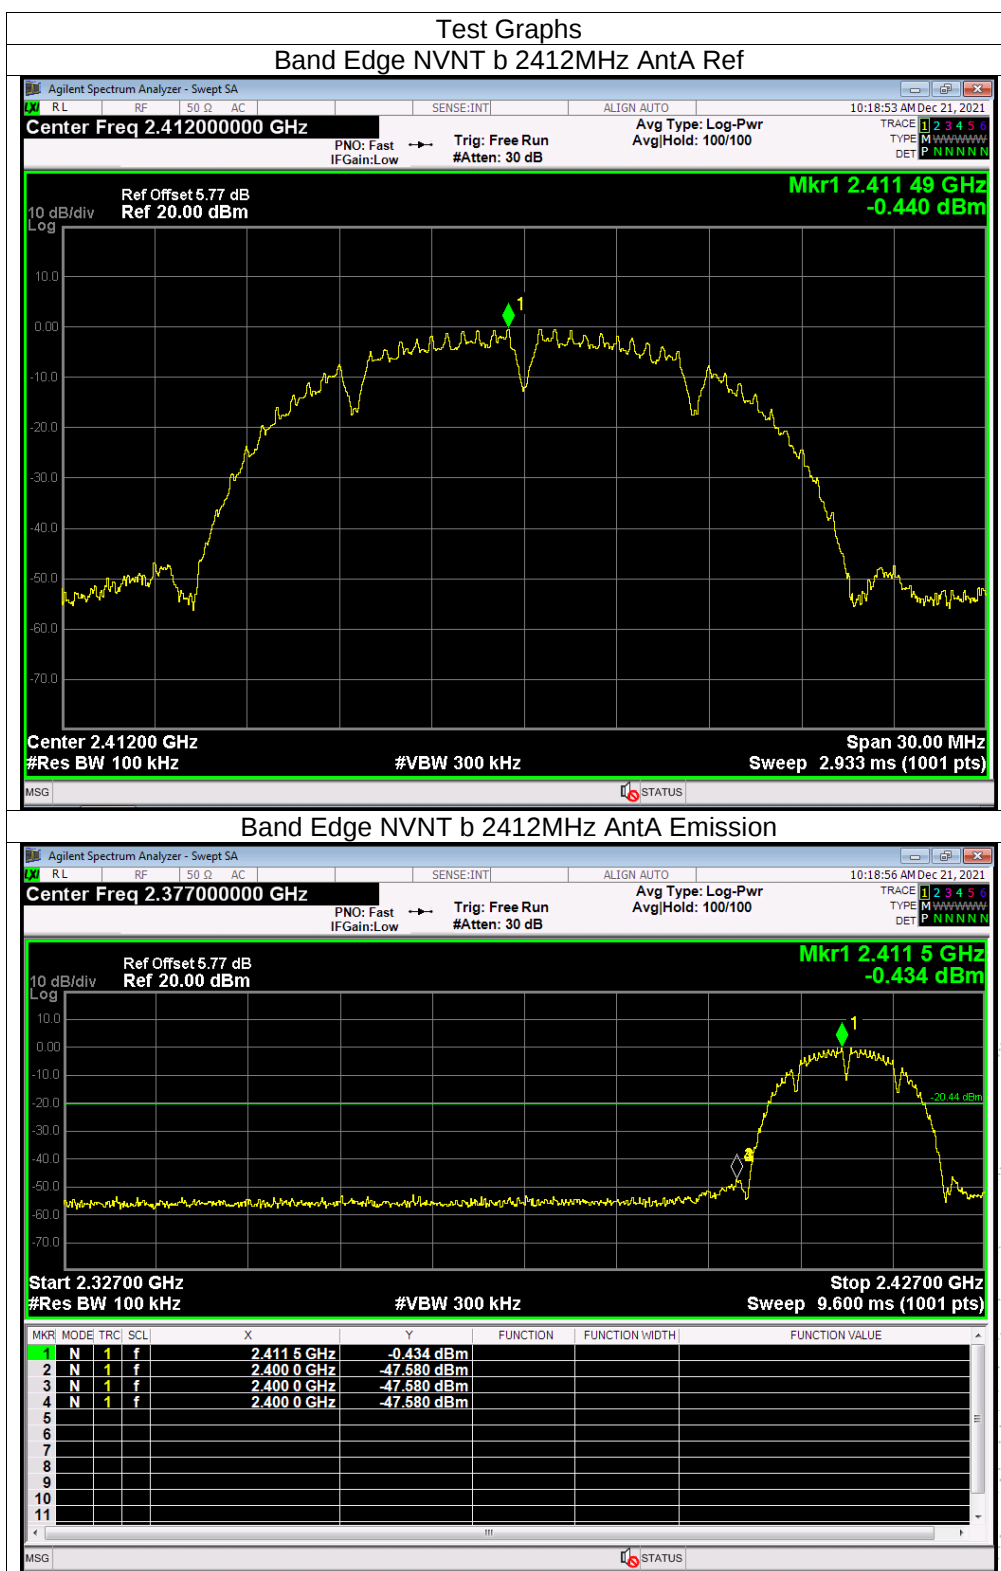


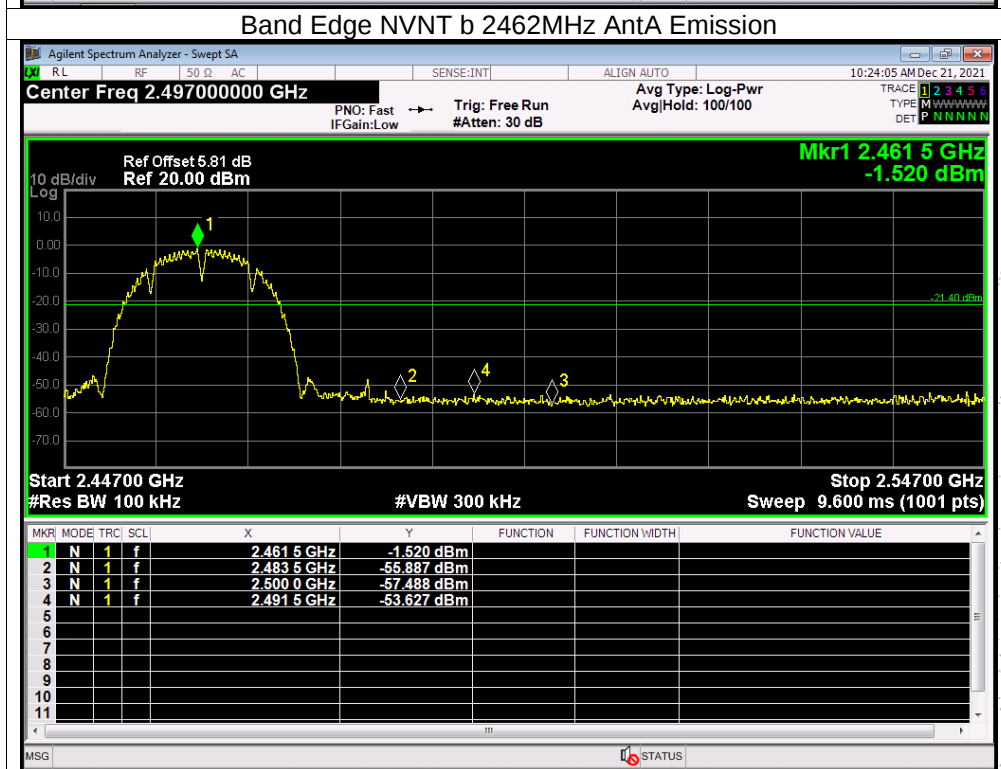
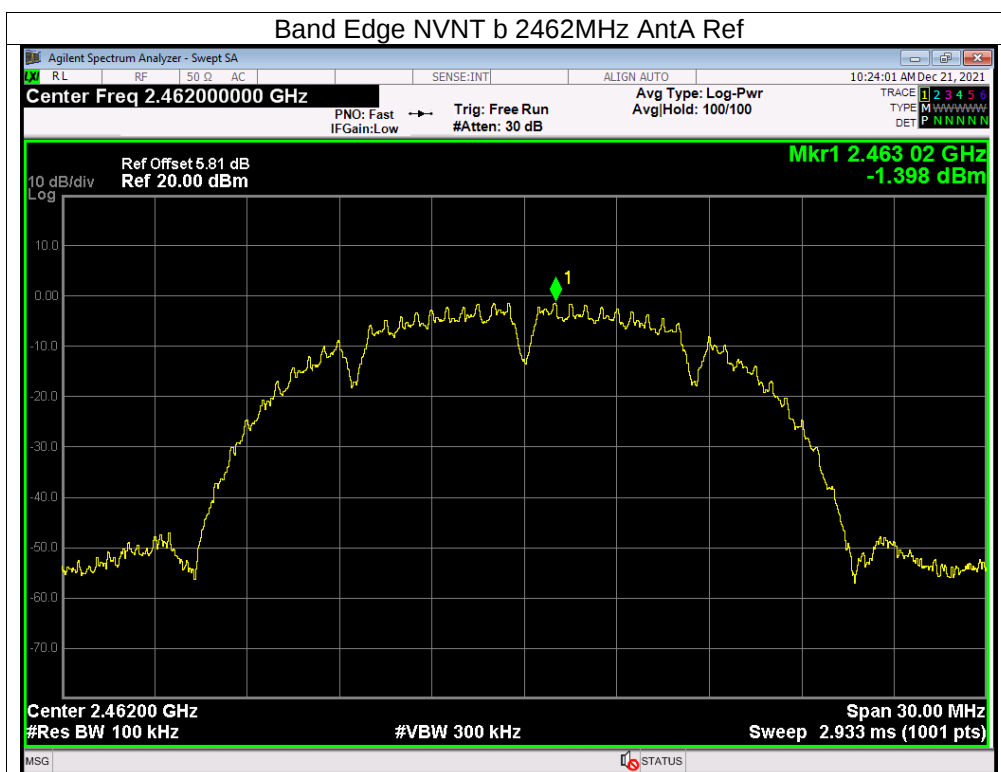


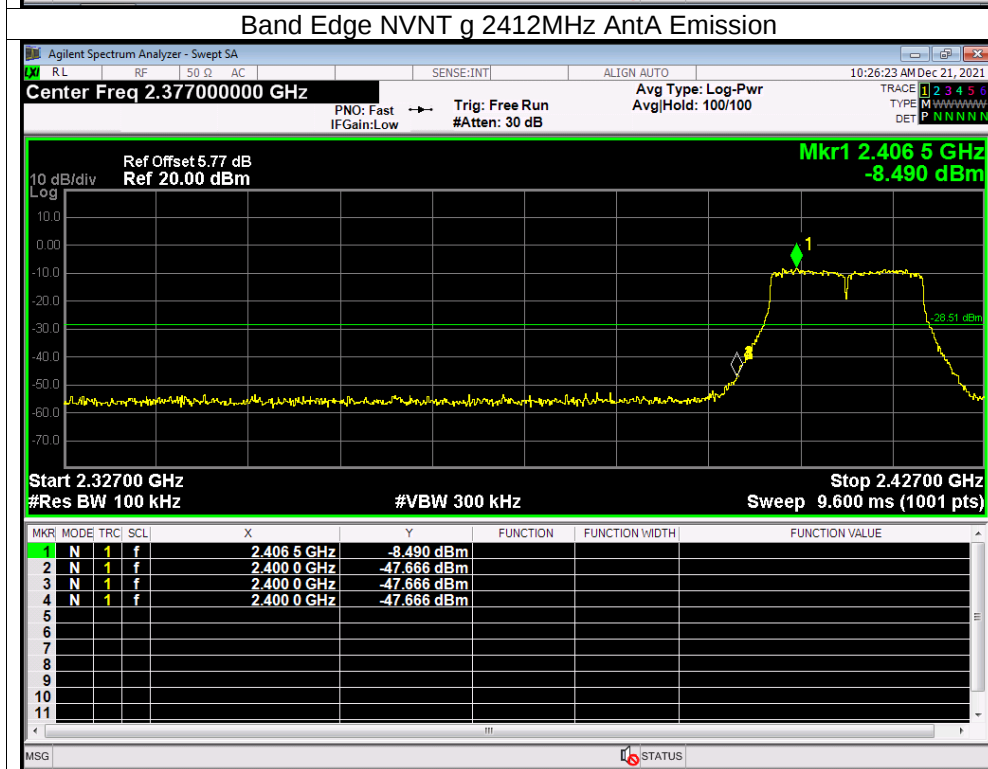
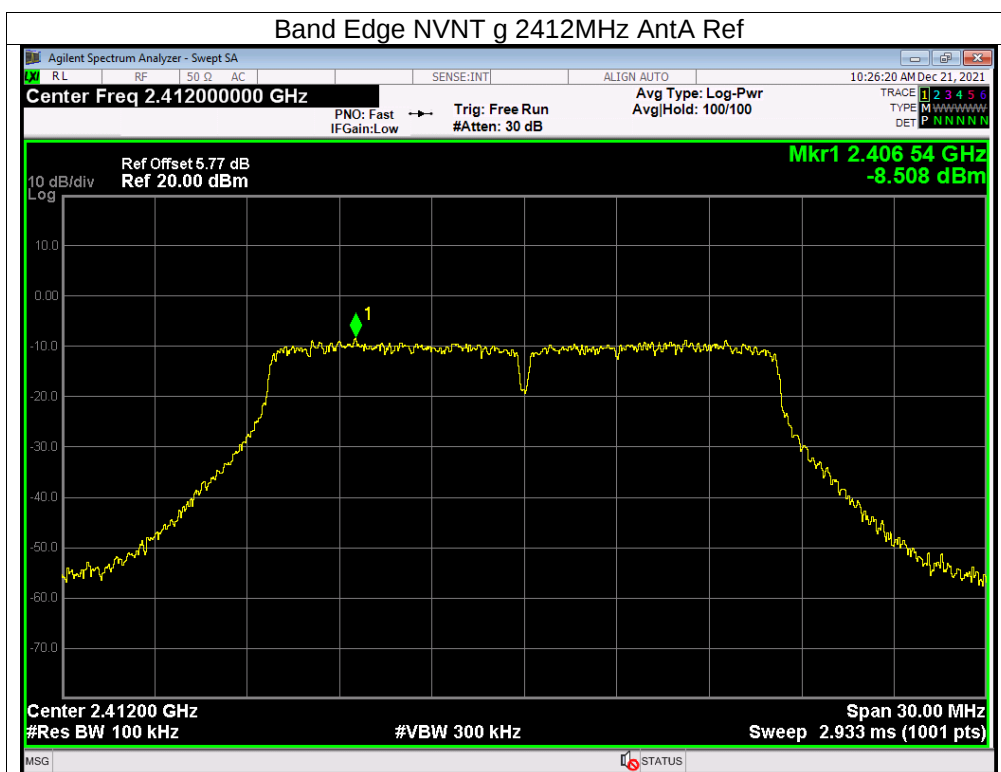


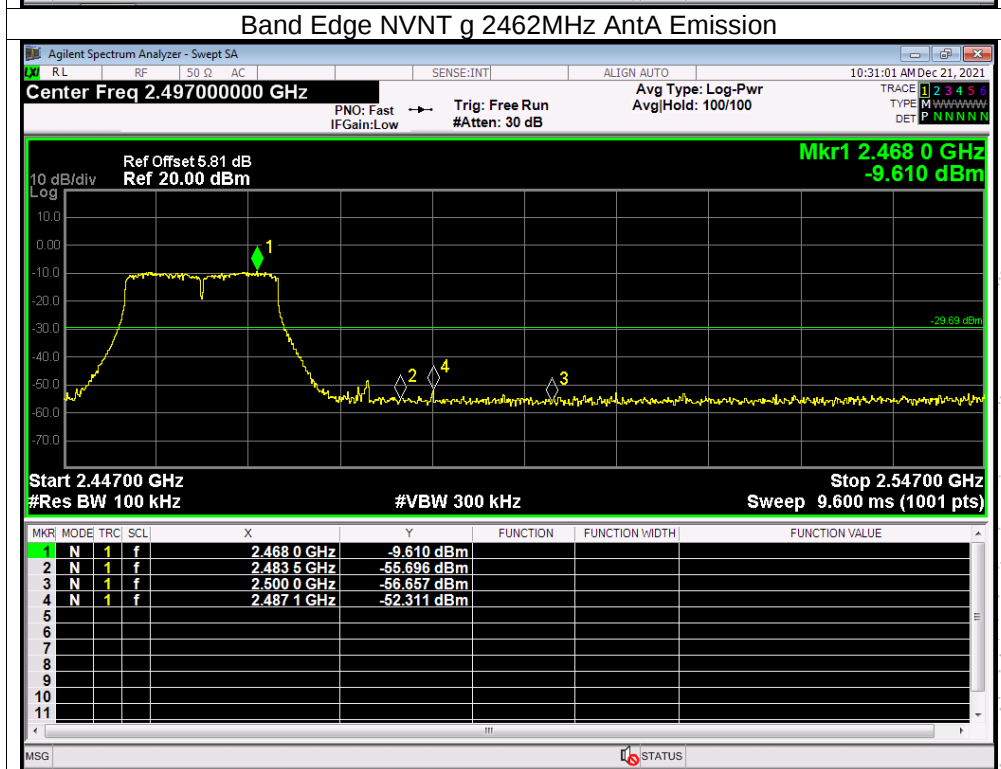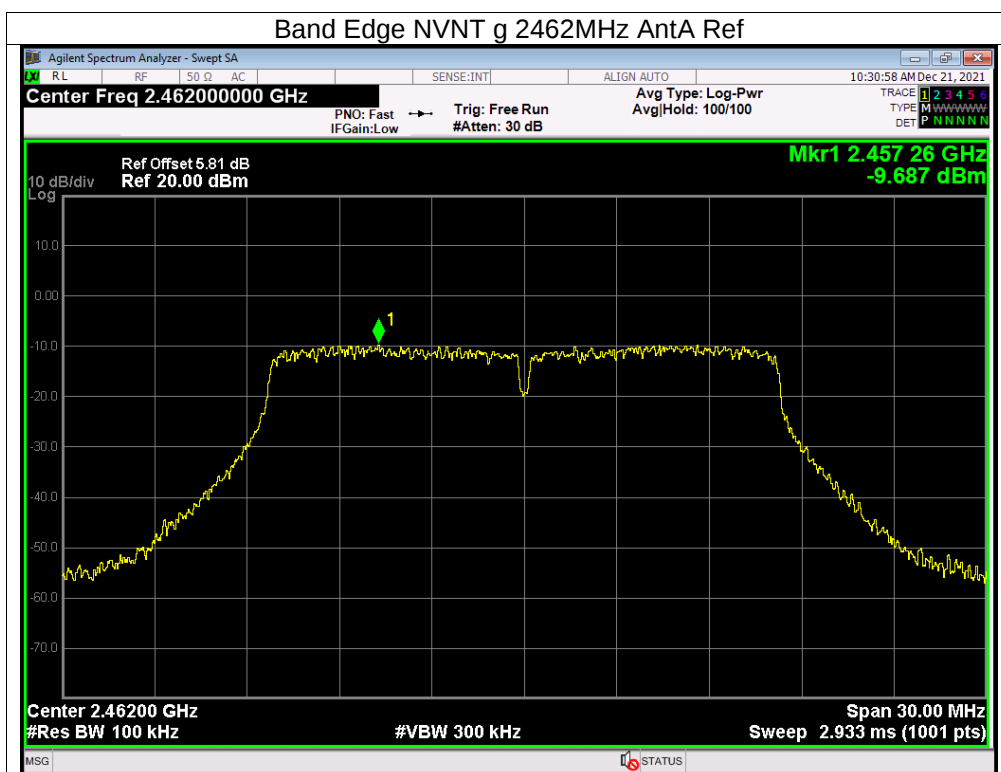

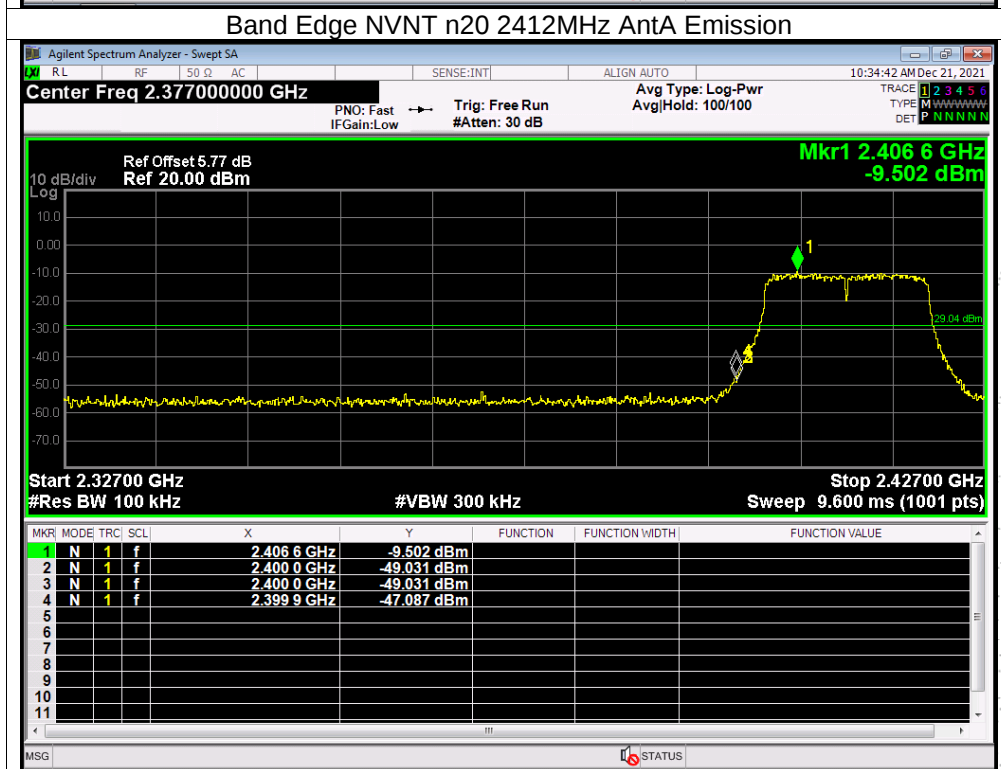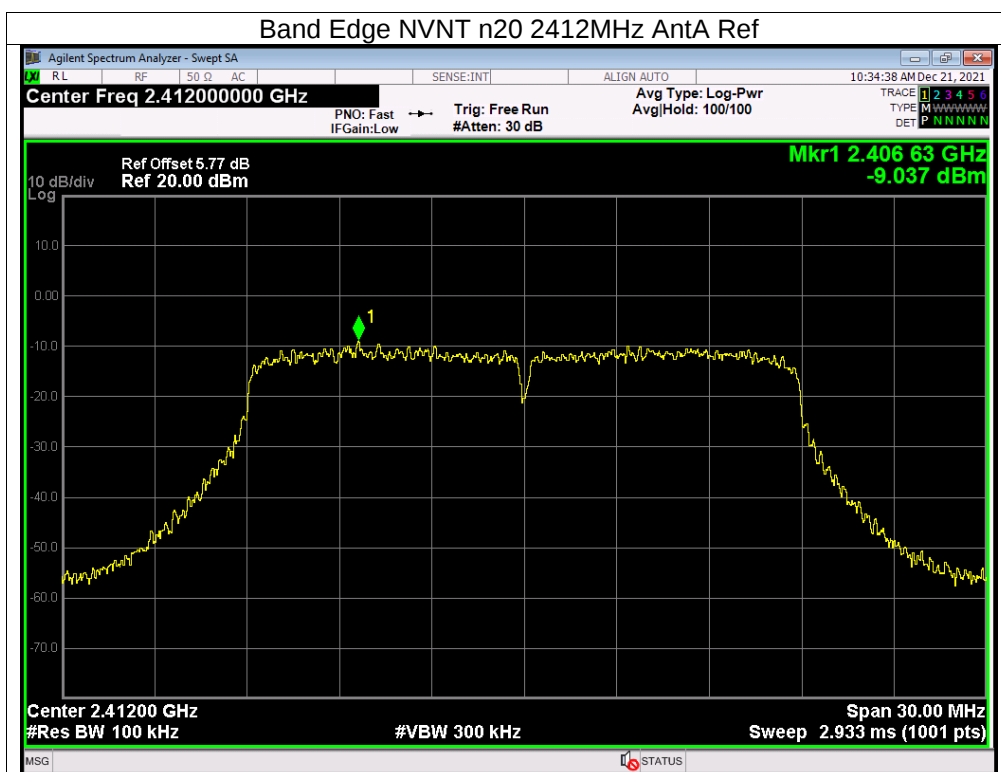

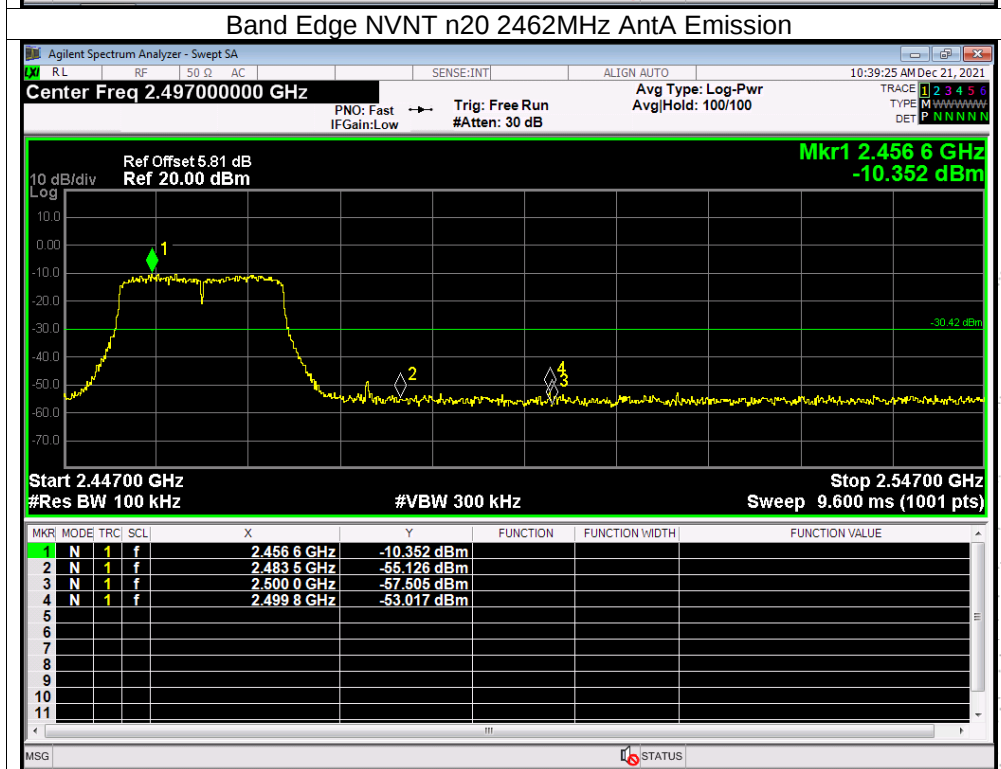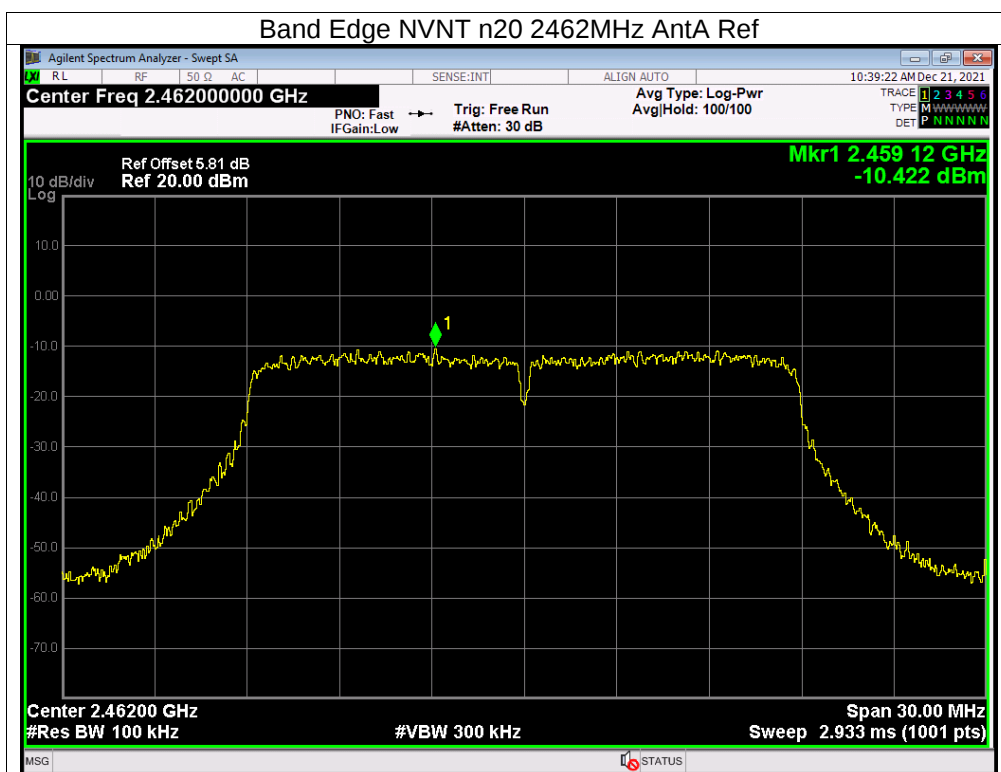


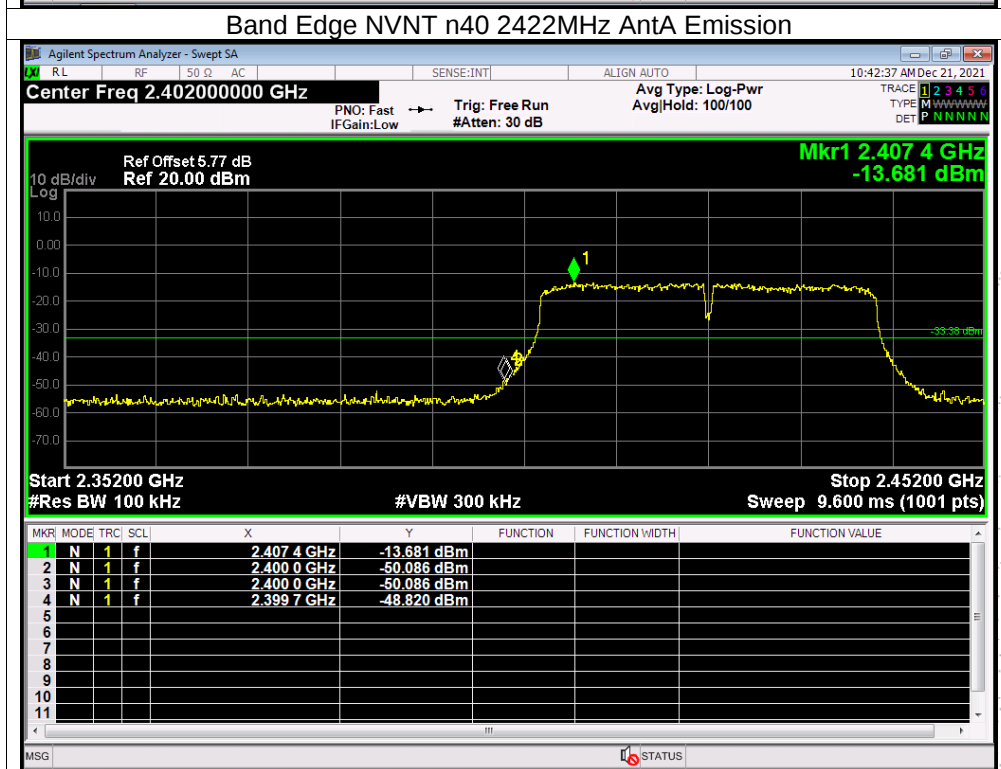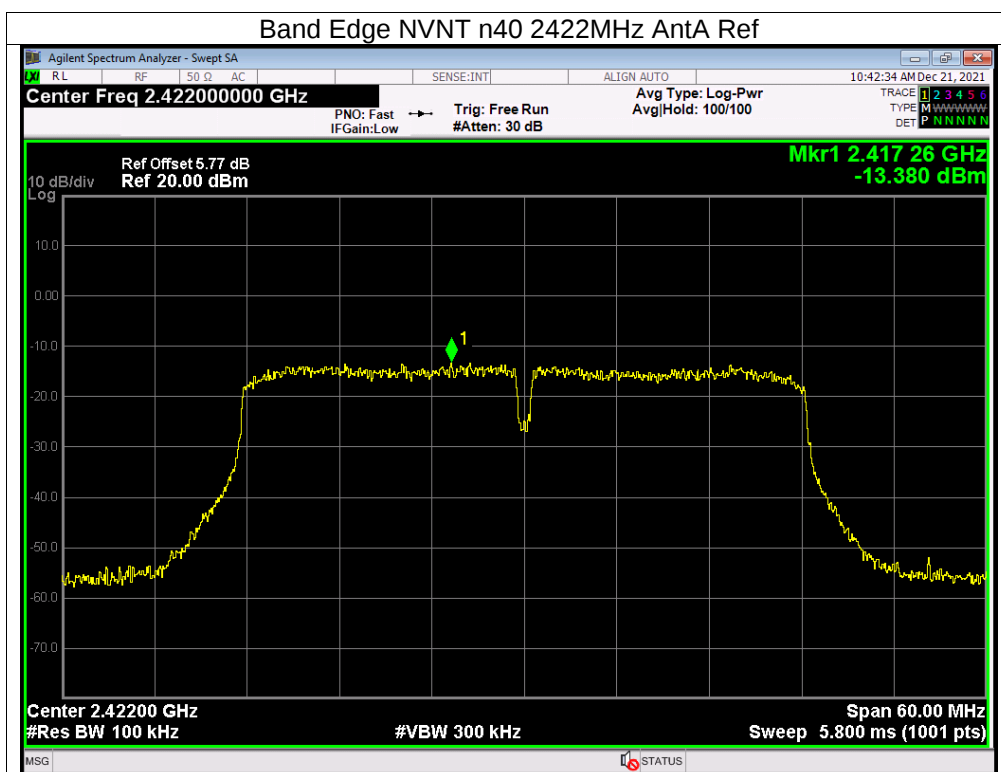

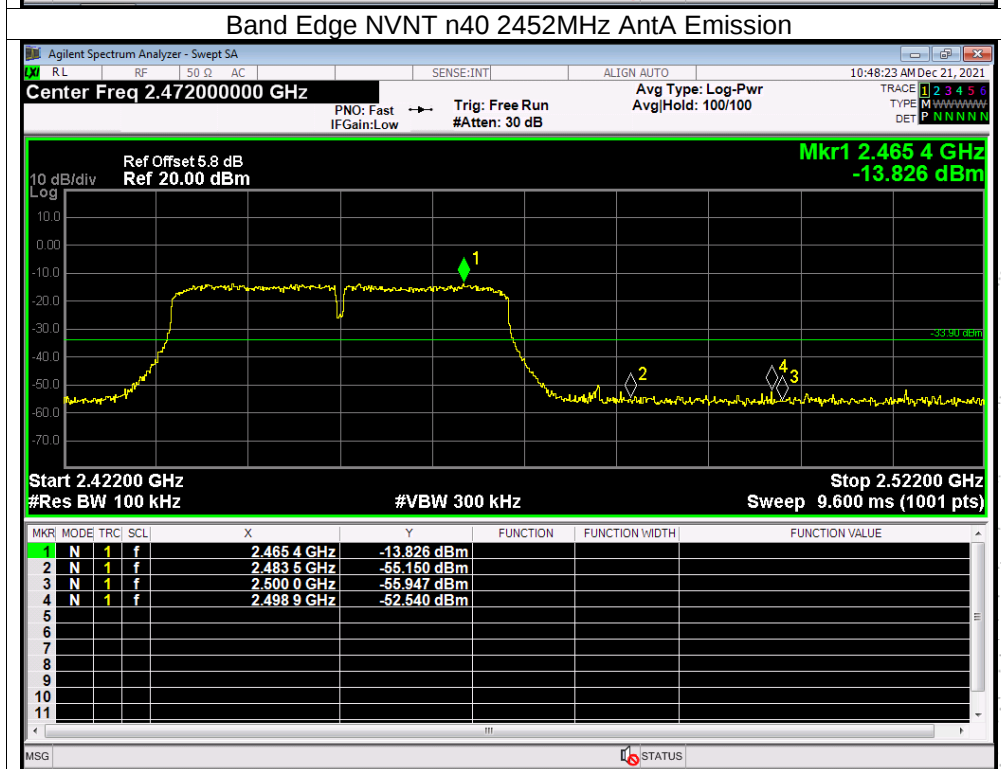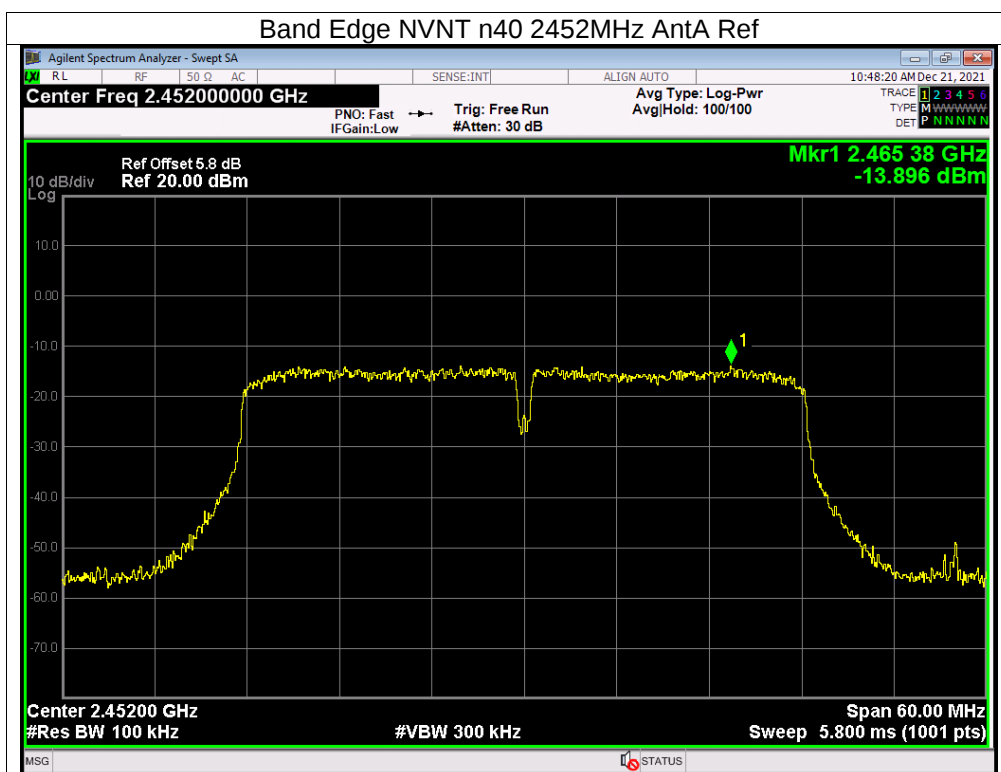


CONDUCTED EMISSION MEASUREMENT

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.

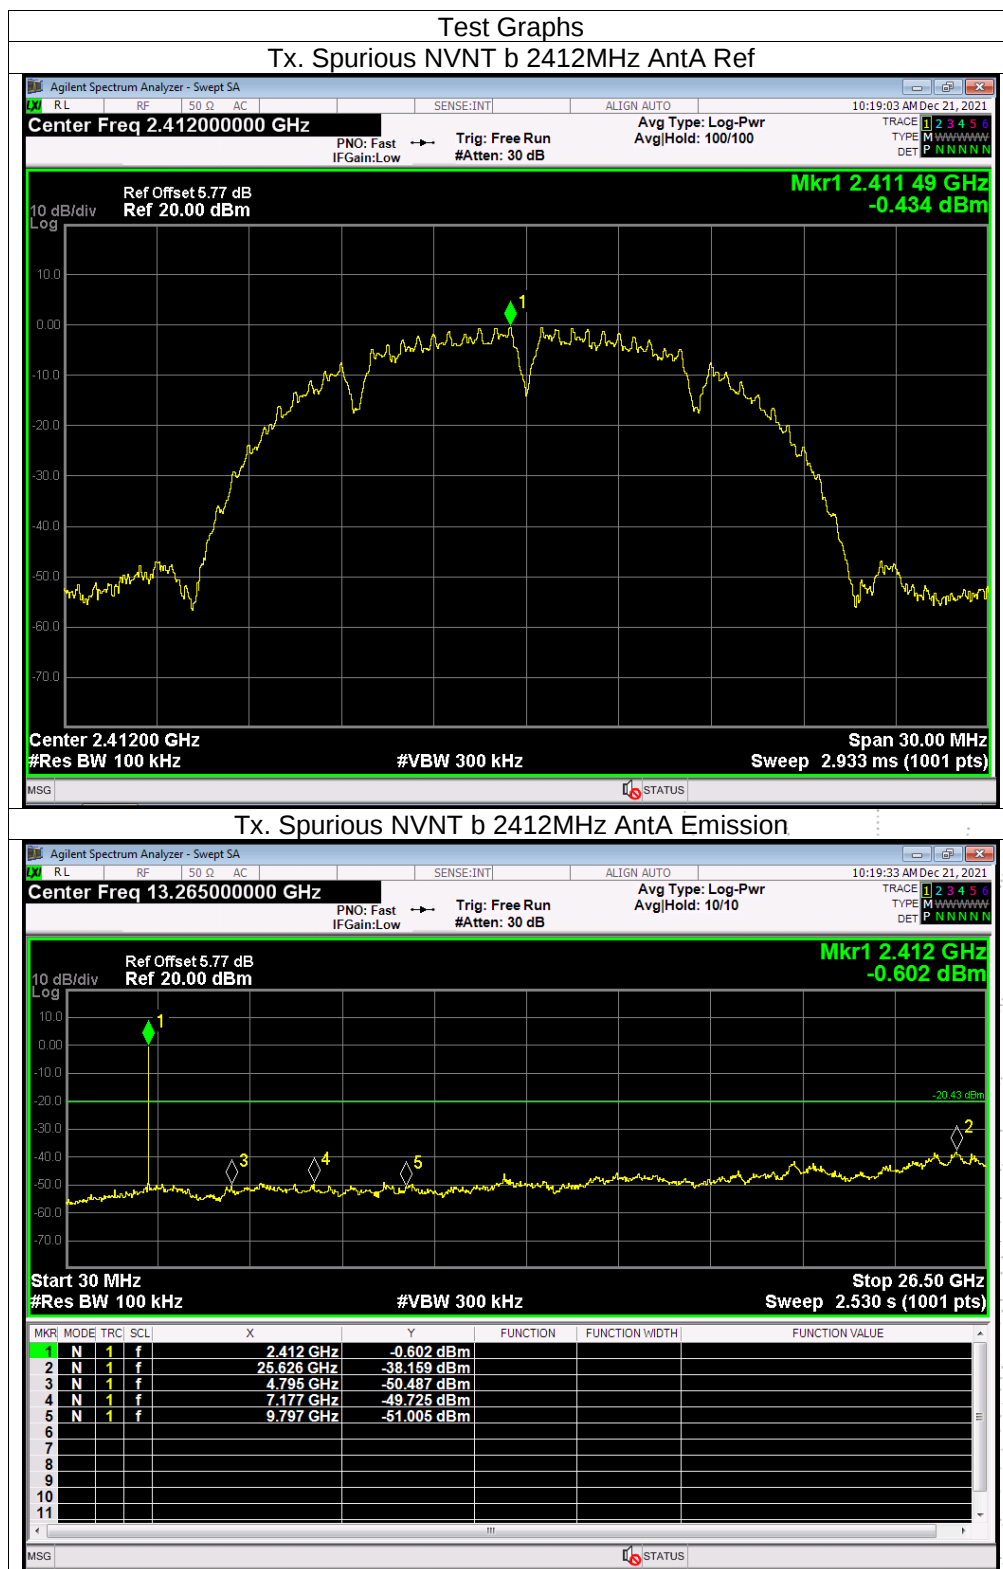

Tx. Spurious NVNT b 2437MHz AntA Ref

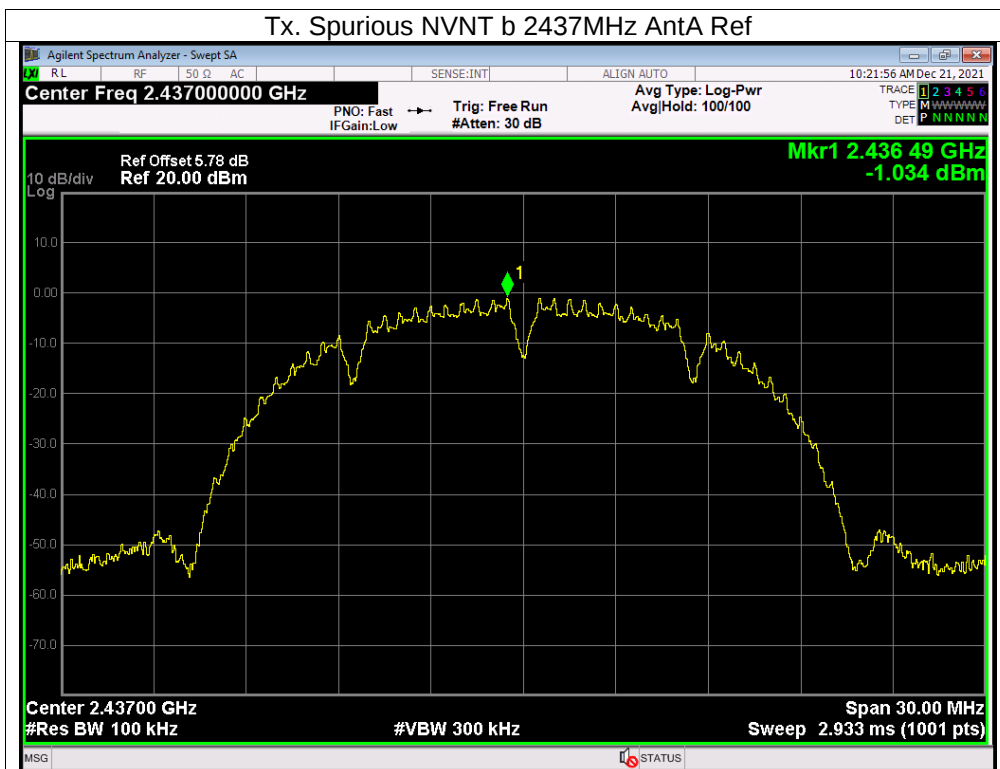

Tx. Spurious NVNT b 2437MHz AntA Emission

