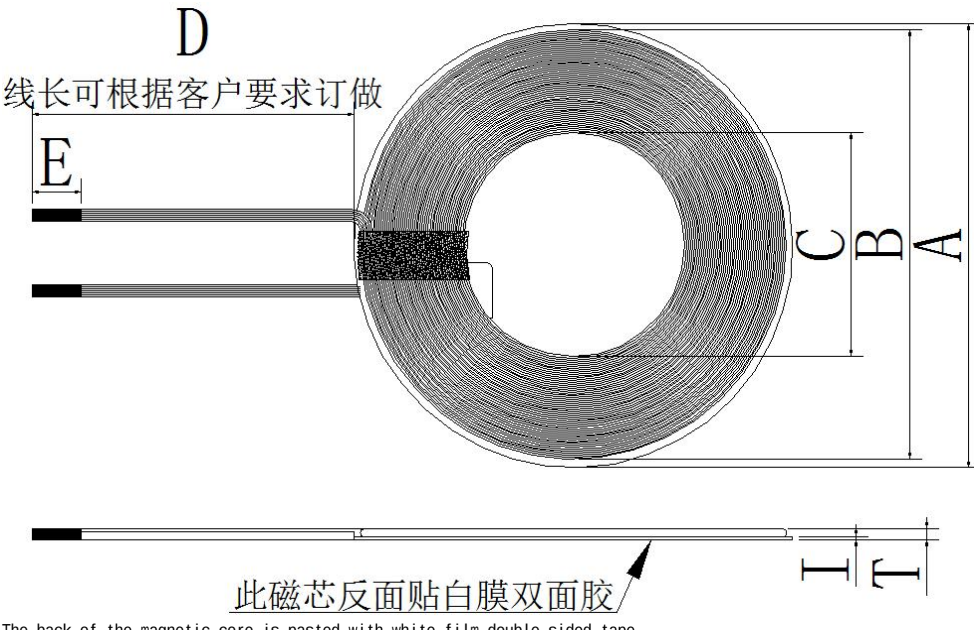



佛山市鑫逸丰电子有限公司
Foshan Xin Yifeng Electronics Co., LTD
产品规格承认书

SPECIFICATION FOR APPROVAL

产品型号 DESC	43.5双槽背胶线圈线长50mm6.8uh 43.5 The wire length of the double-slot rubber backing coil is 50mm6.8uh	版本 REV:A	客户		
			客户料号		
			鑫逸丰料号		
一、尺寸 DIMENSION: (mm)			A	43.5±1.00	
			B	39.5±0.50	
			C	20.5±1.00	
			D	40.00±2.00	
			线长可根据客户要求订做		
			E	3.00±2.00	
			T	1.80±0.50	
			I	0.60±0.10	
			备注		
			1	Wire diameter :0.08*24P*2 enamelled wire	
			2	Number of coils :10TS	
			3	Whether the start and end lines cross: Yes	
			4	Wrap the coil with about 8mm high-temperature tape	
			5	Ferrite disc double-sided tape	
			6		

二、原理图 SCHEMATIC DIAGRAM:

三、绕线参数 Winding Specification:

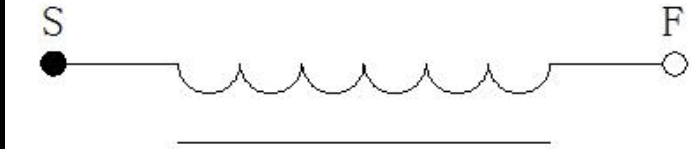

序号 NO	端子 TERMINAL		线径 WIRE	圈数 Tums	绕线方向 Winding Direction
1	S	F	0.08*48P	10Ts	CCW

四、电子特性 ELECTRICAL CHARACTERISTICS:

温度TEMPERATURE:25±10°C, 湿度RELATIVE HUMIDITY:65±20%

序号 NO	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	L	S-F	6.80±10% μH	100KHz/1.0V	■TH2817B ■TH2817B ■CH-502BC
2	Q Value	S-F	70 (Min)	100KHz/1.0V	
3	DCR	S-F	50mΩ (Max)	@ 25°C	

address : Shop 1, No. 1, West Chung Third Lane, Qicha Hongxing Village, Shiwan Town, Chancheng District, Foshan City