



Appendix C

RF Test Data for 5.8G WIFI (Conducted Measurement)

Product Name: Industrial 5G/4G/3G Router

Test Model: QUARTZ-ONYX

Environmental Conditions

Temperature:	23.8 ° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Ling Zhu
Supervised by:	Li Huan



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



C.1 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant0	16.322	≥ 0.5	Pass
NVNT	a	5785	Ant0	16.33	≥ 0.5	Pass
NVNT	a	5825	Ant0	16.268	≥ 0.5	Pass
NVNT	n20	5745	Ant0	17.52	≥ 0.5	Pass
NVNT	n20	5785	Ant0	17.55	≥ 0.5	Pass
NVNT	n20	5825	Ant0	17.546	≥ 0.5	Pass
NVNT	n40	5755	Ant0	34.212	≥ 0.5	Pass
NVNT	n40	5795	Ant0	35.398	≥ 0.5	Pass
NVNT	ac20	5745	Ant0	17.538	≥ 0.5	Pass
NVNT	ac20	5785	Ant0	17.531	≥ 0.5	Pass
NVNT	ac20	5825	Ant0	16.908	≥ 0.5	Pass
NVNT	ac40	5755	Ant0	35.101	≥ 0.5	Pass
NVNT	ac40	5795	Ant0	35.056	≥ 0.5	Pass
NVNT	ac80	5775	Ant0	75	≥ 0.5	Pass








Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant0

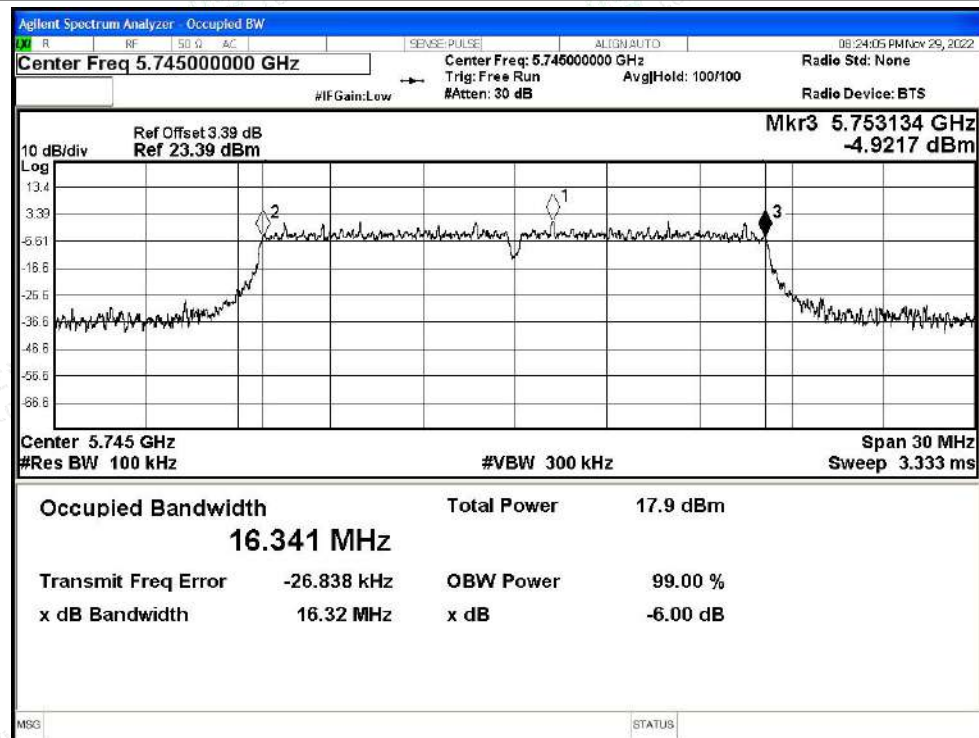


-6dB Bandwidth NVNT a 5785MHz Ant0

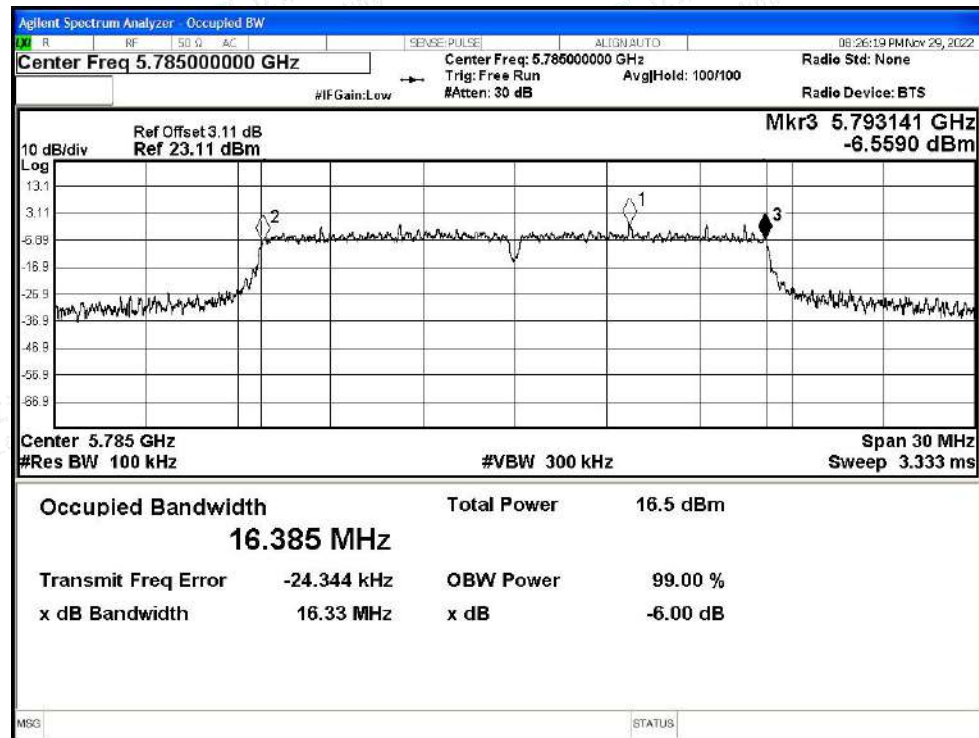

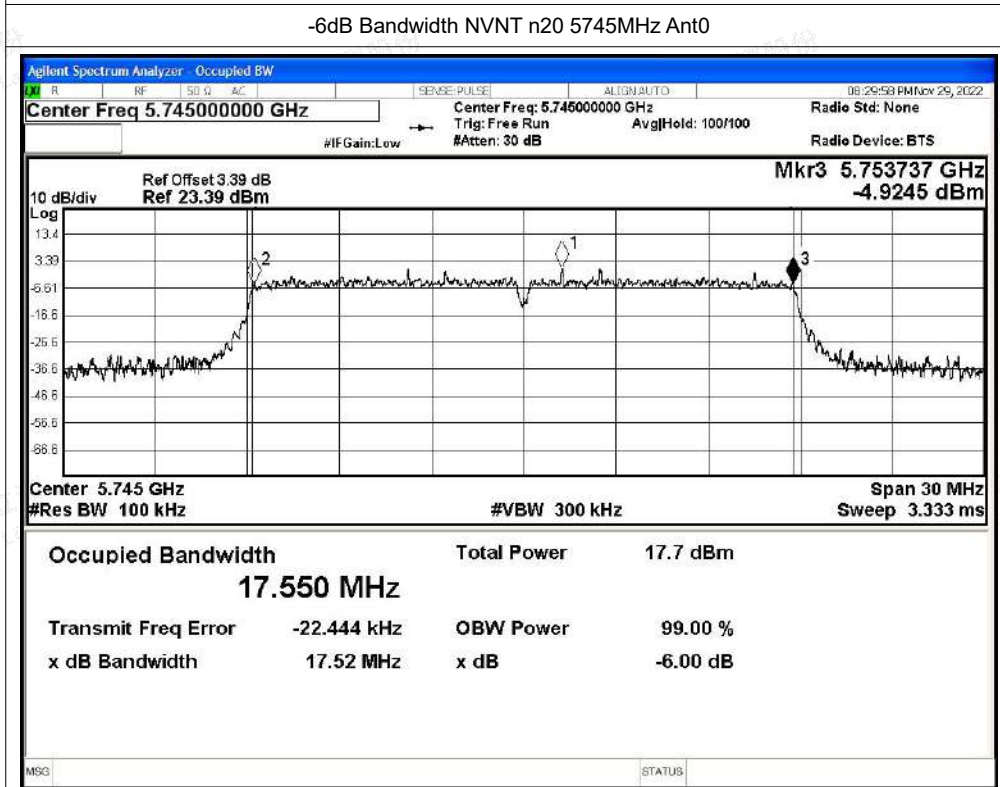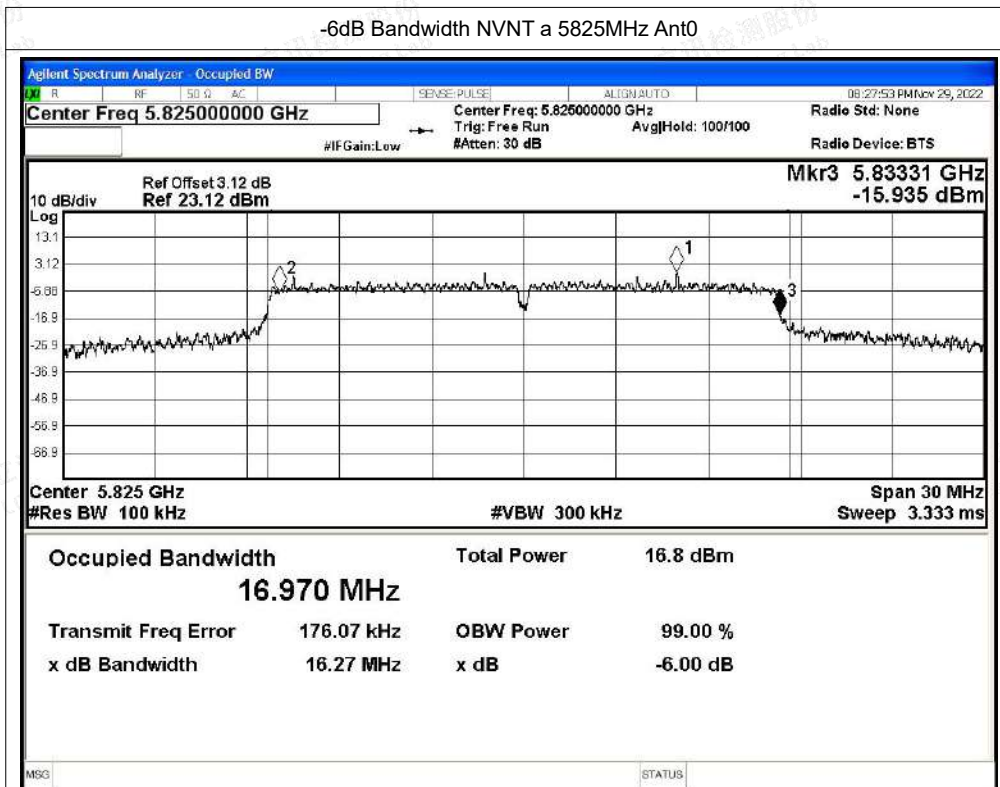




-6dB Bandwidth NVNT n20 5785MHz Ant0

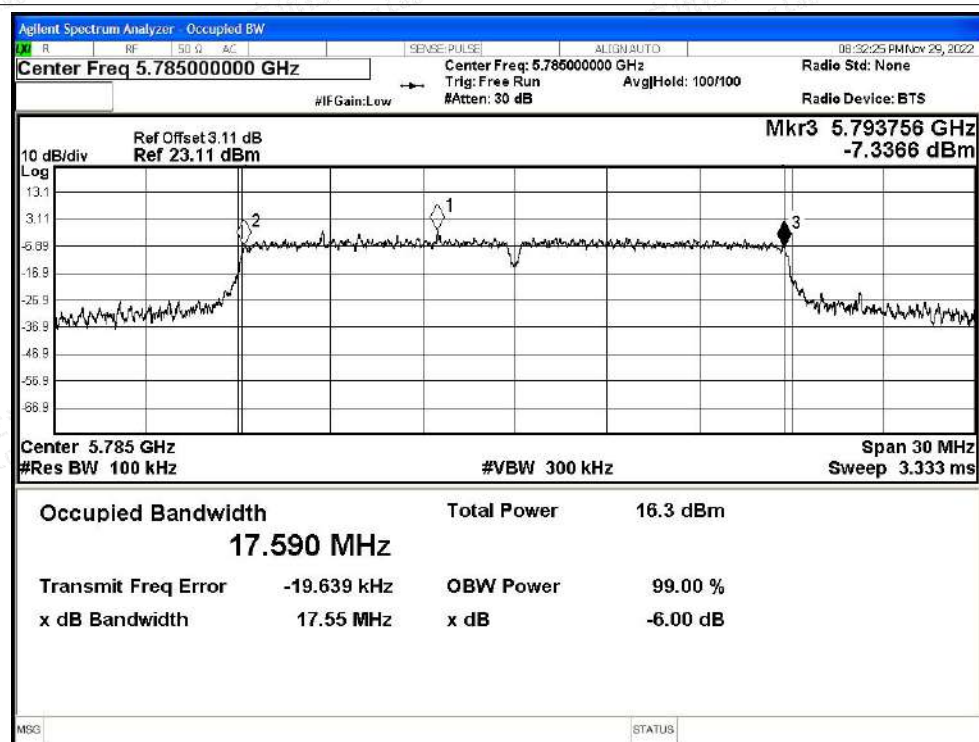


-6dB Bandwidth NVNT n20 5825MHz Ant0

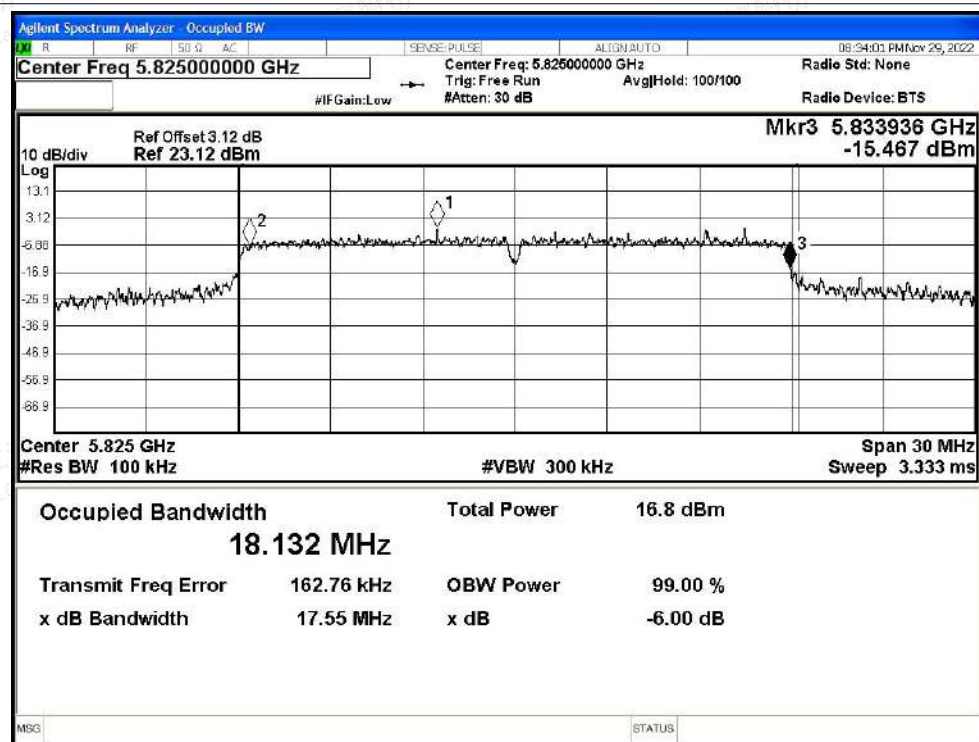




-6dB Bandwidth NVNT n40 5755MHz Ant0

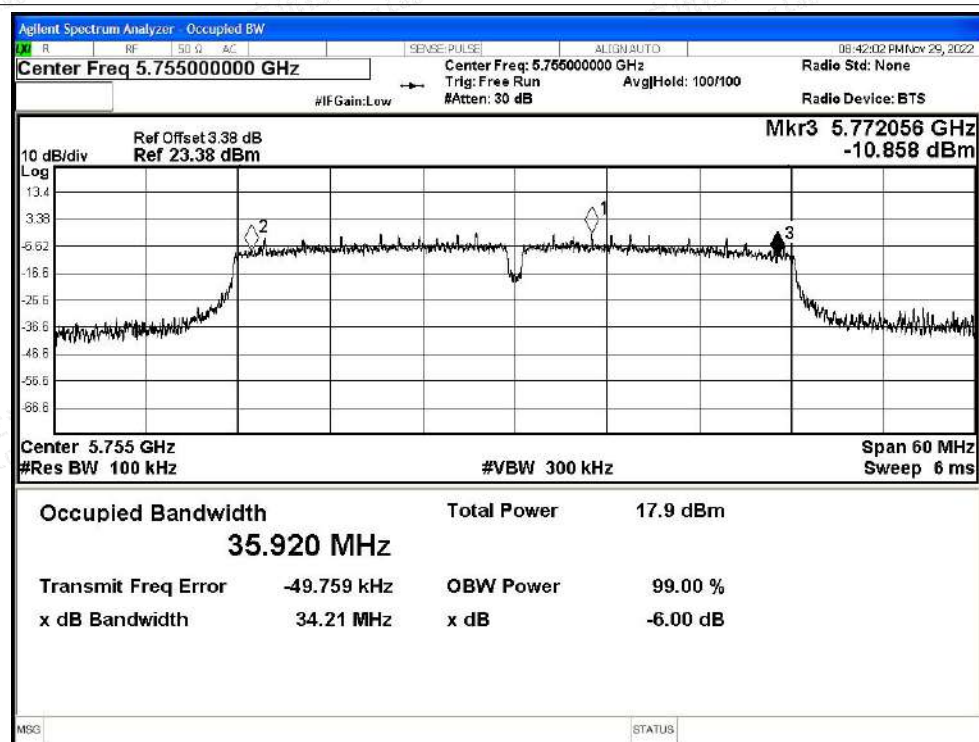


-6dB Bandwidth NVNT n40 5795MHz Ant0

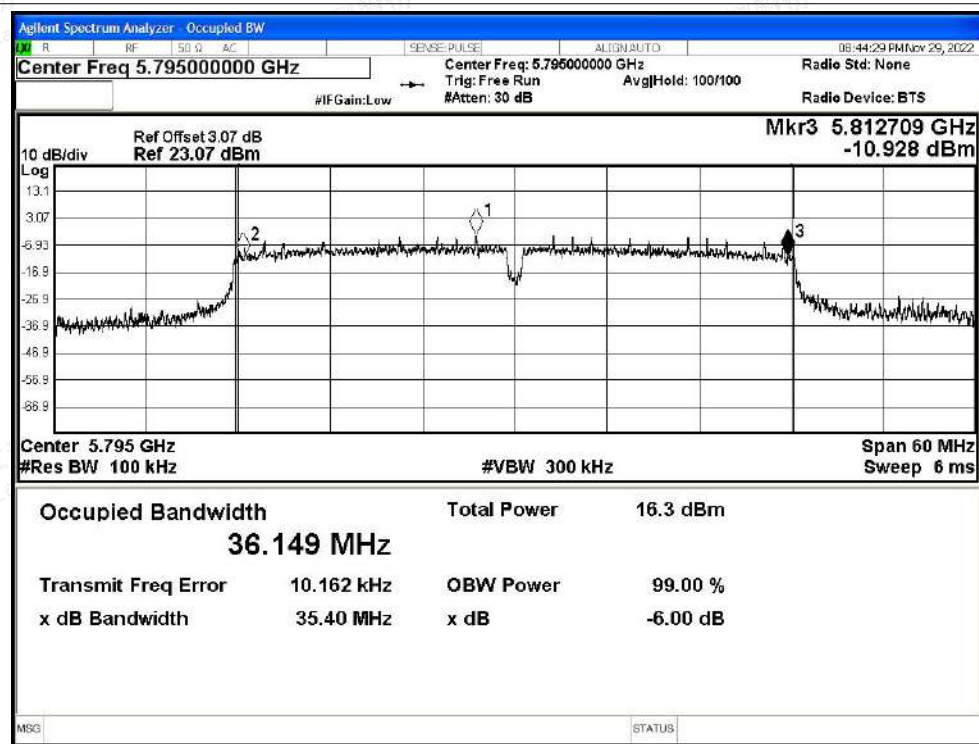




-6dB Bandwidth NVNT ac20 5745MHz Ant0

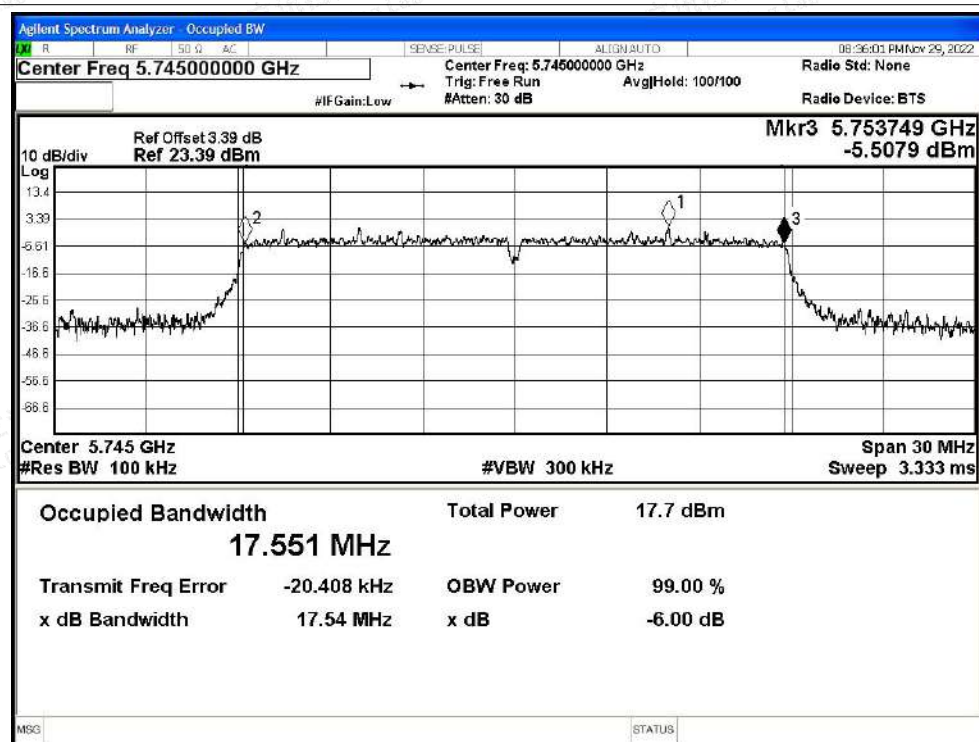


-6dB Bandwidth NVNT ac20 5785MHz Ant0

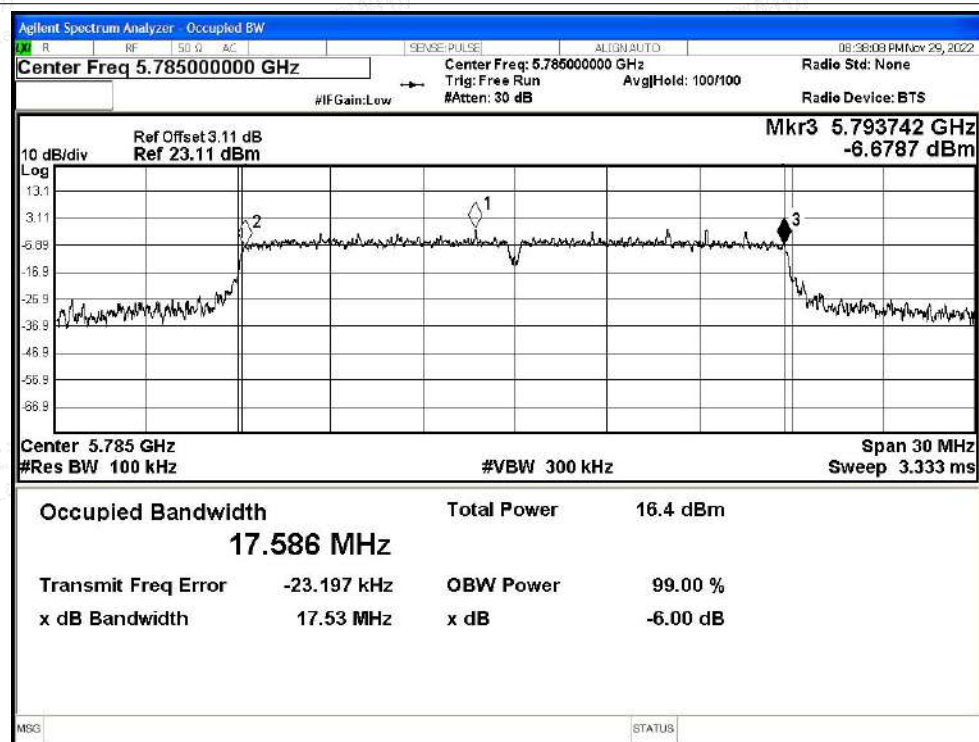




-6dB Bandwidth NVNT ac20 5825MHz Ant0

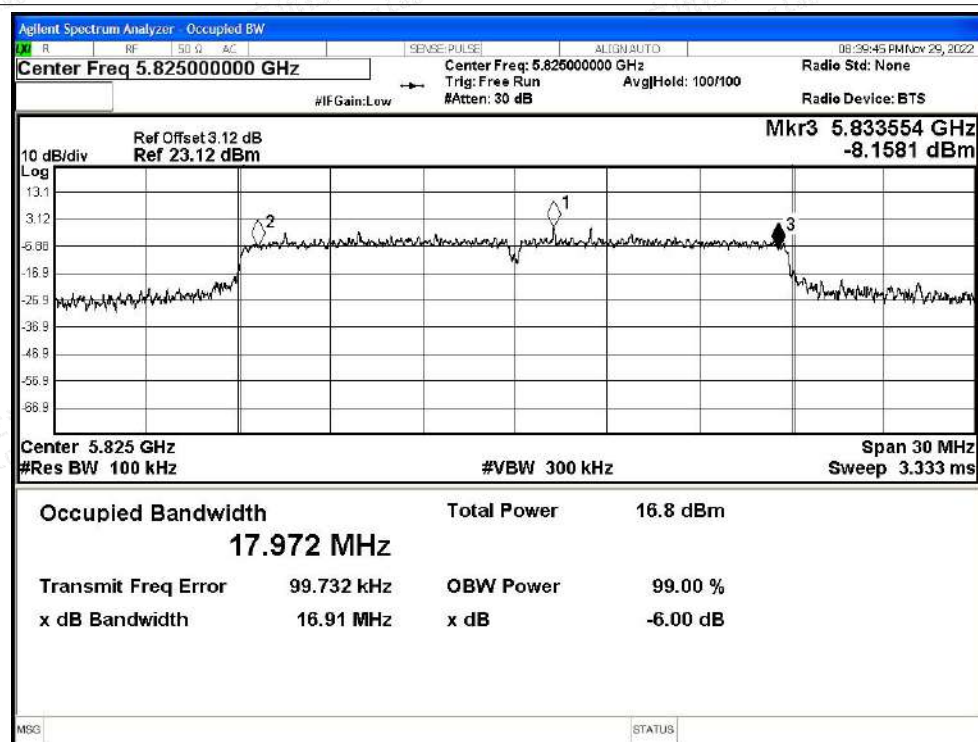


-6dB Bandwidth NVNT ac40 5755MHz Ant0

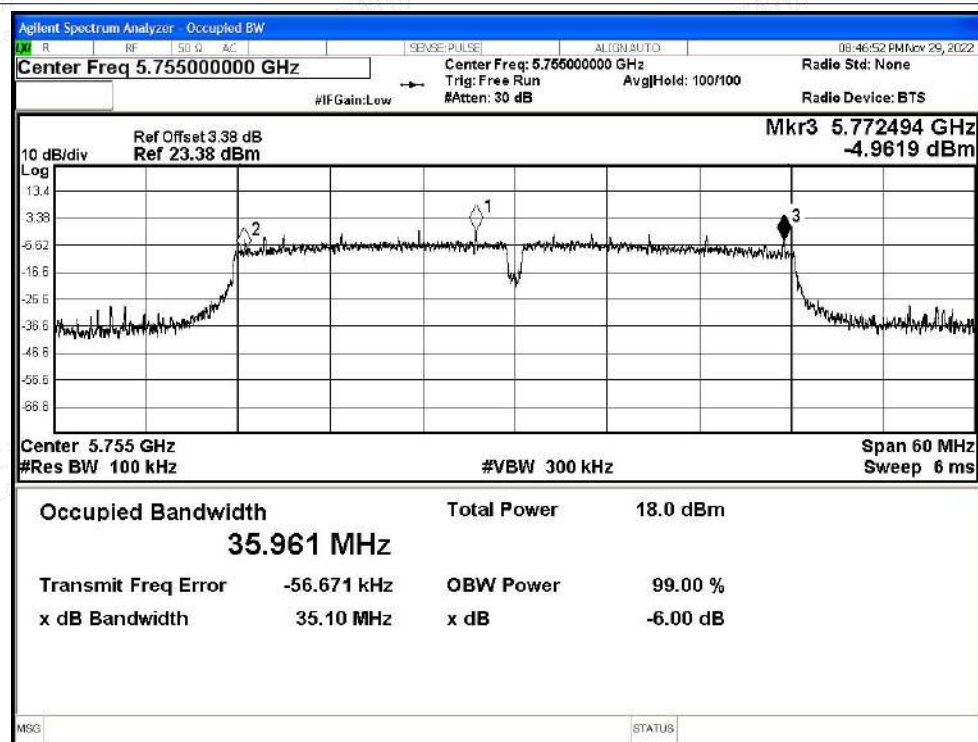




-6dB Bandwidth NVNT ac40 5795MHz Ant0

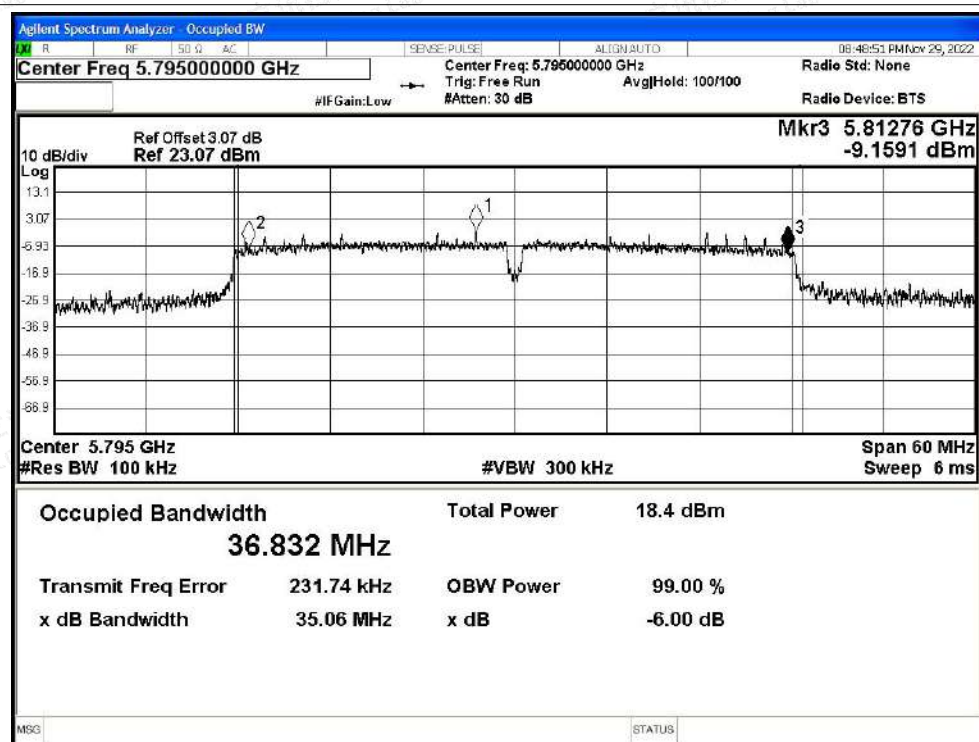

-6dB Bandwidth NVNT ac80 5775MHz Ant0

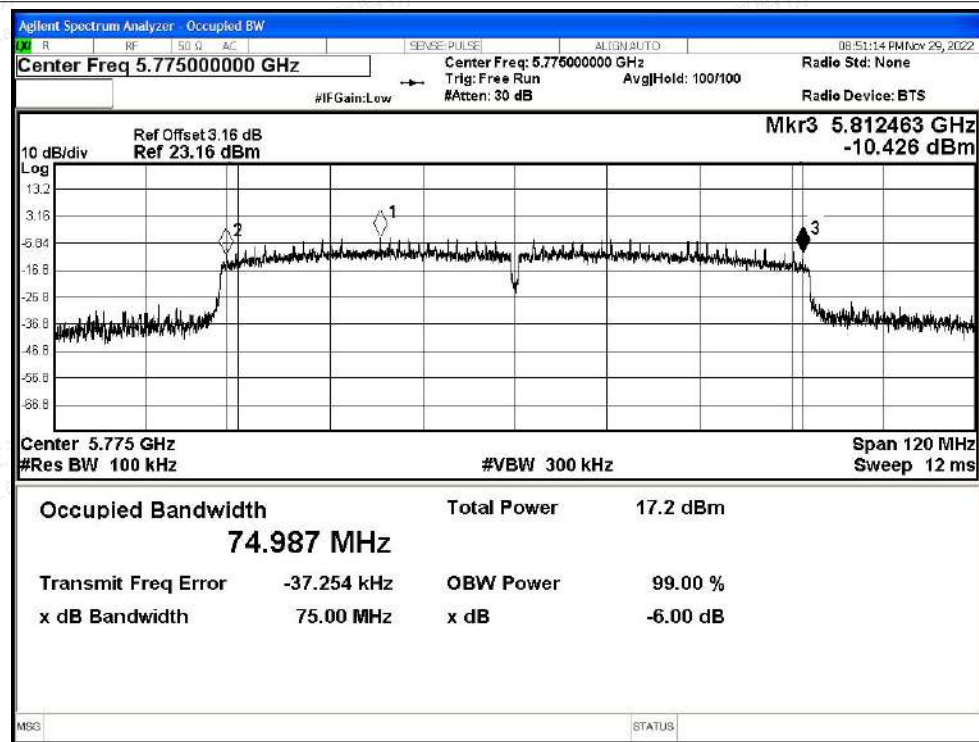




Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.329	≥ 0.5	Pass
NVNT	a	5785	Ant1	16.316	≥ 0.5	Pass
NVNT	a	5825	Ant1	16.317	≥ 0.5	Pass
NVNT	n20	5745	Ant1	17.295	≥ 0.5	Pass
NVNT	n20	5785	Ant1	17.541	≥ 0.5	Pass
NVNT	n20	5825	Ant1	17.293	≥ 0.5	Pass
NVNT	n40	5755	Ant1	35.434	≥ 0.5	Pass
NVNT	n40	5795	Ant1	35.434	≥ 0.5	Pass
NVNT	ac20	5745	Ant1	17.283	≥ 0.5	Pass
NVNT	ac20	5785	Ant1	17.556	≥ 0.5	Pass
NVNT	ac20	5825	Ant1	17.275	≥ 0.5	Pass
NVNT	ac40	5755	Ant1	35.078	≥ 0.5	Pass
NVNT	ac40	5795	Ant1	35.002	≥ 0.5	Pass
NVNT	ac80	5775	Ant1	74.996	≥ 0.5	Pass






Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant1

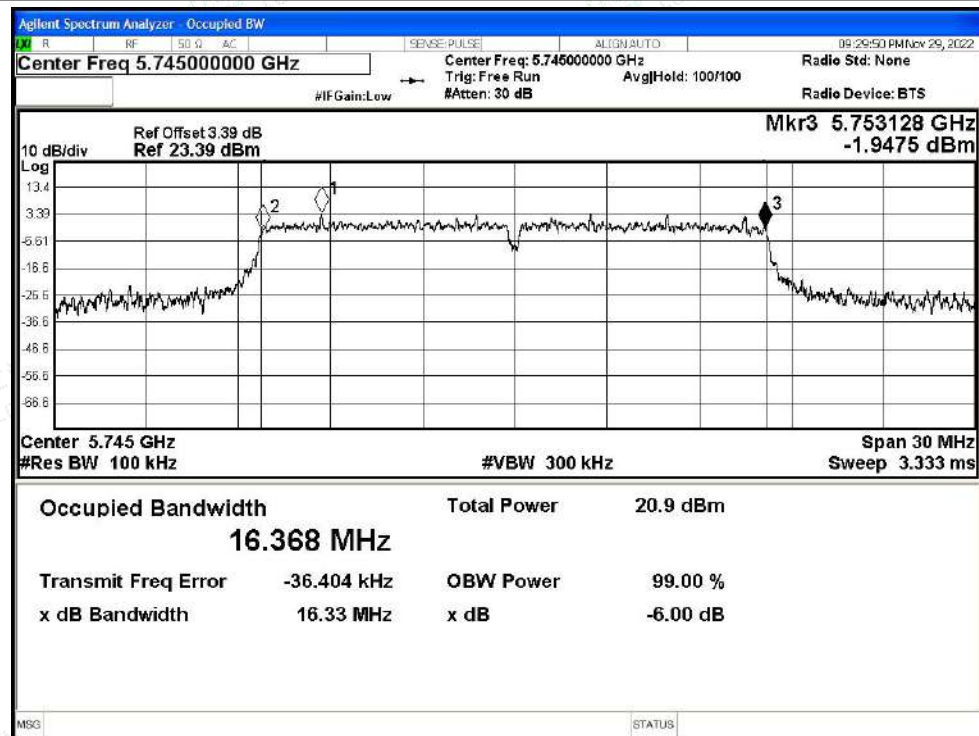


-6dB Bandwidth NVNT a 5785MHz Ant1

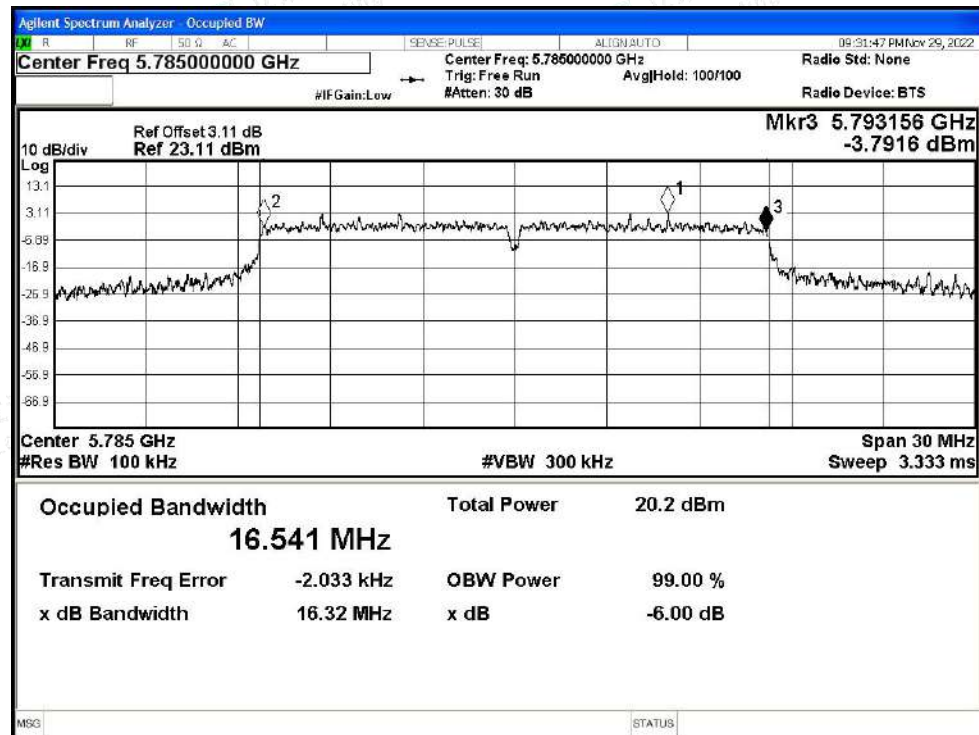




-6dB Bandwidth NVNT a 5825MHz Ant1

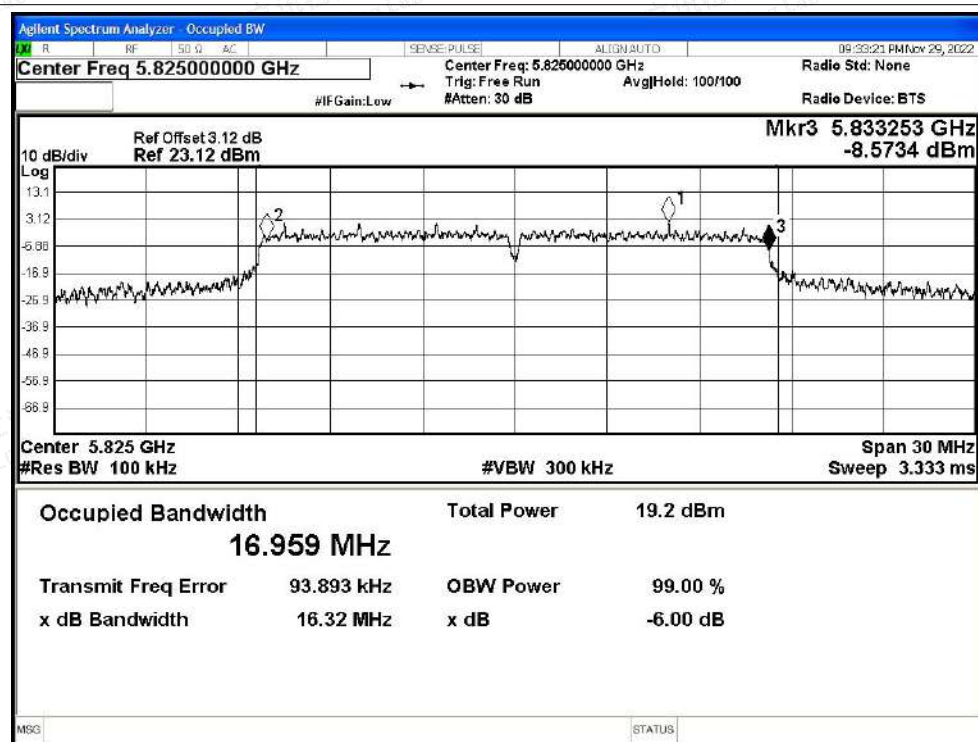


-6dB Bandwidth NVNT n20 5745MHz Ant1

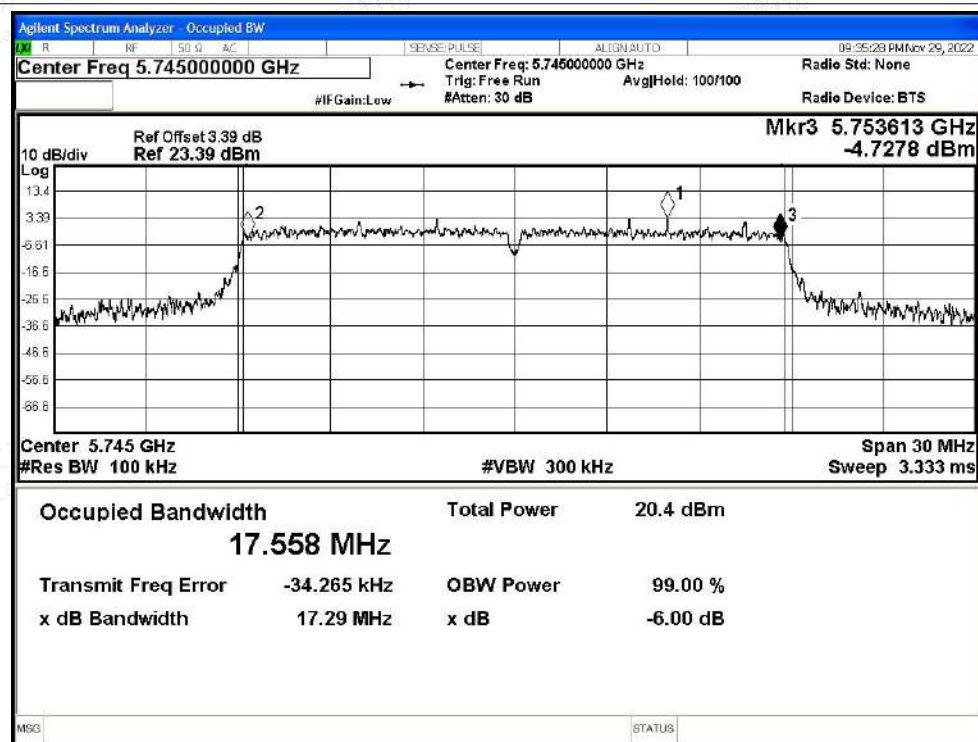




-6dB Bandwidth NVNT n20 5785MHz Ant1

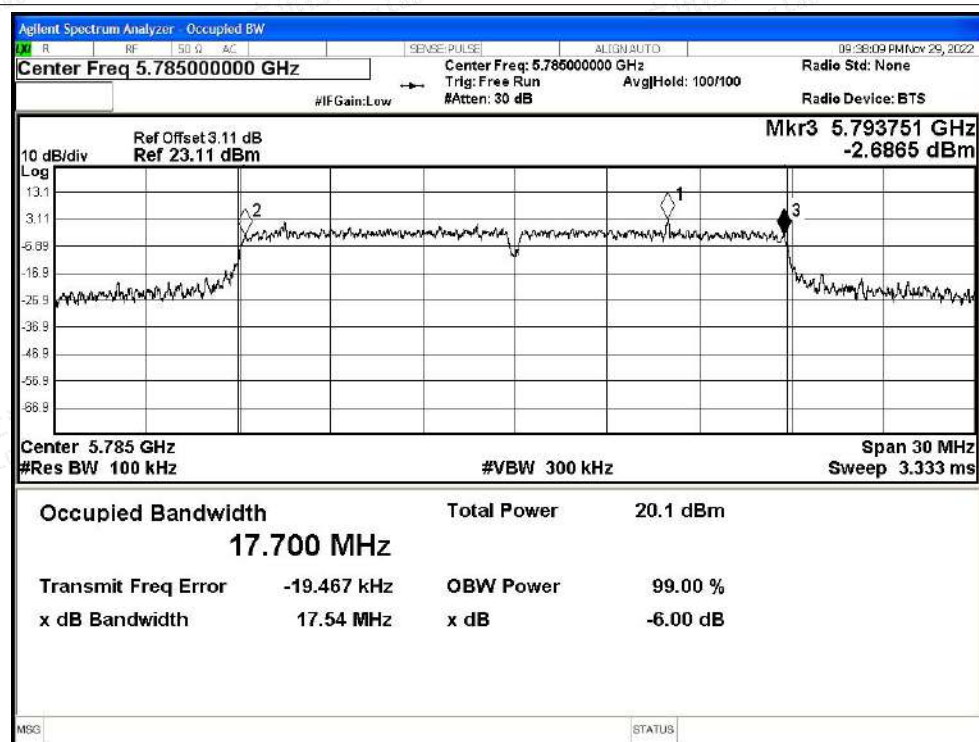


-6dB Bandwidth NVNT n20 5825MHz Ant1

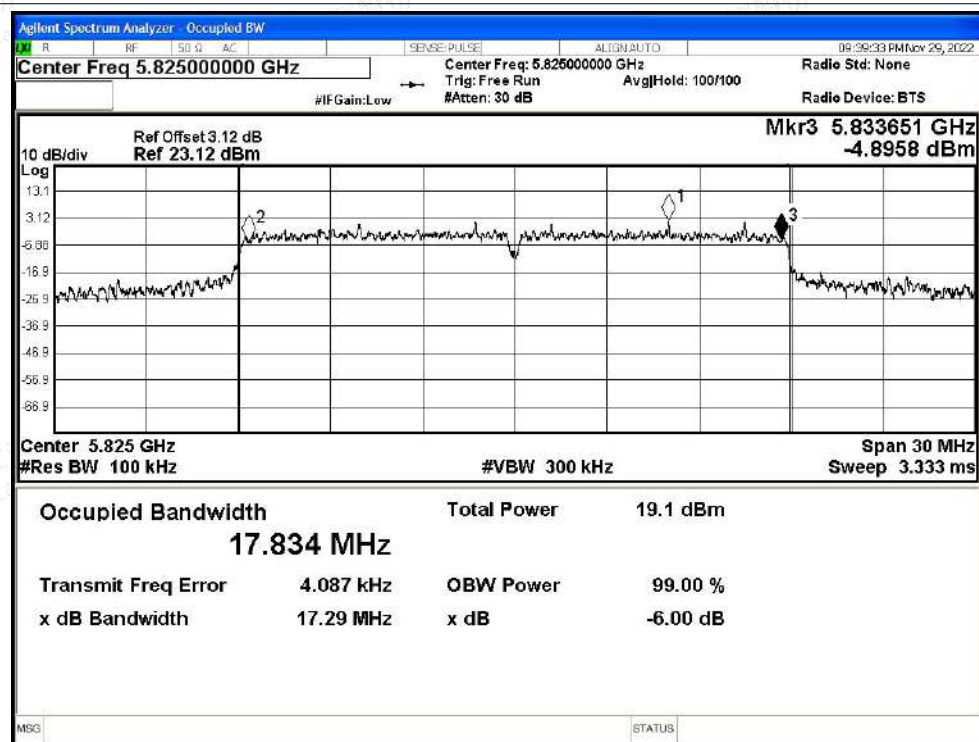




-6dB Bandwidth NVNT n40 5755MHz Ant1

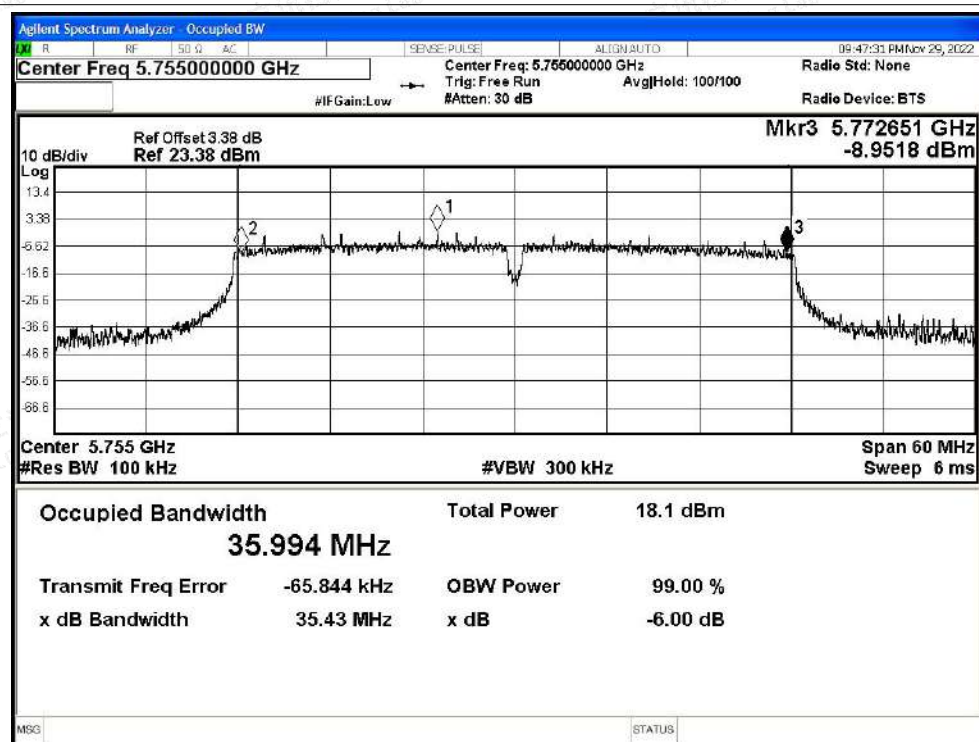


-6dB Bandwidth NVNT n40 5795MHz Ant1

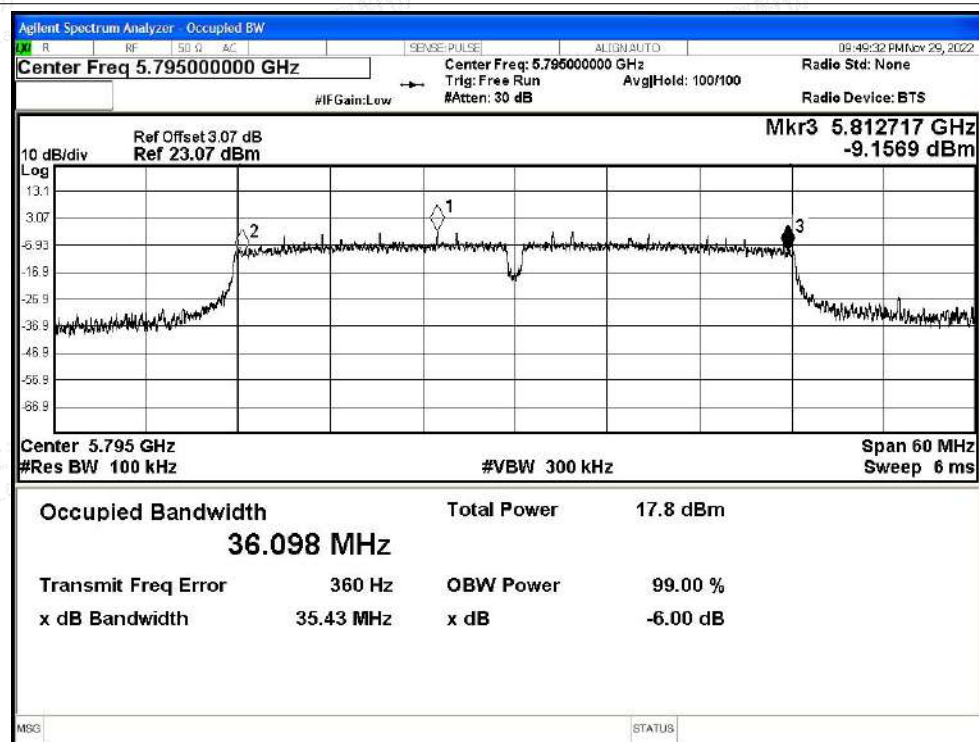






-6dB Bandwidth NVNT ac20 5745MHz Ant1

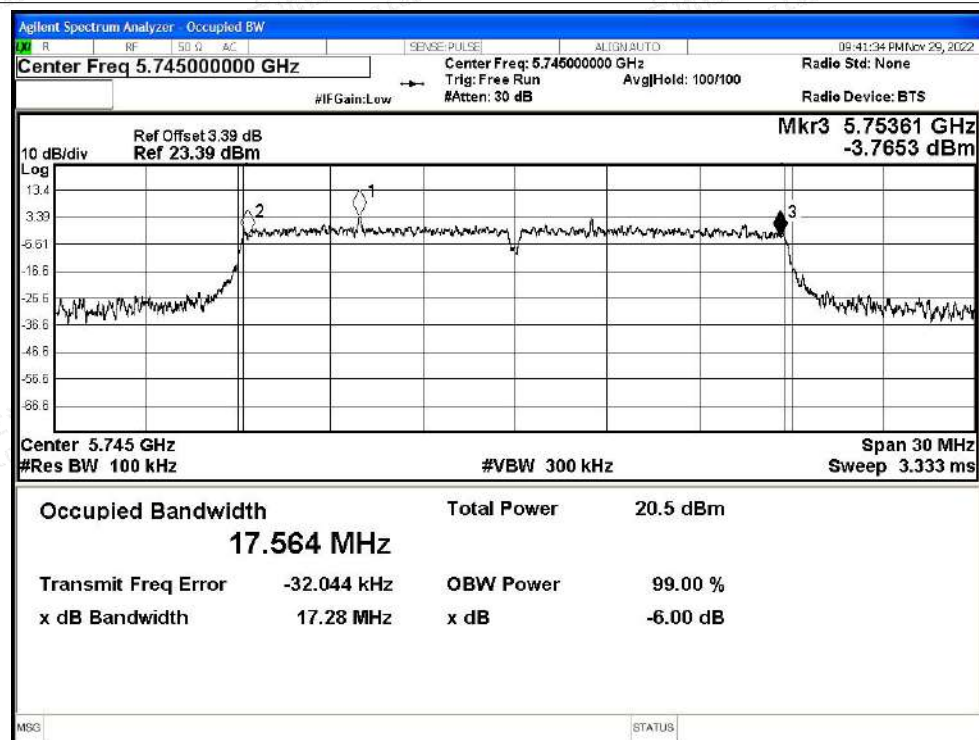


-6dB Bandwidth NVNT ac20 5785MHz Ant1

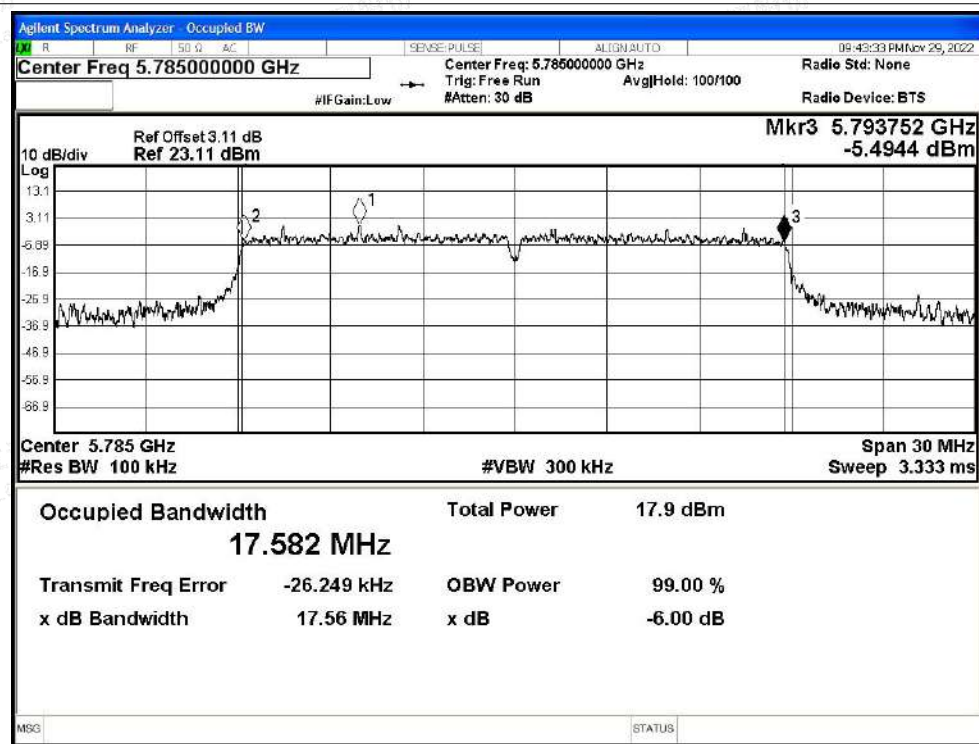

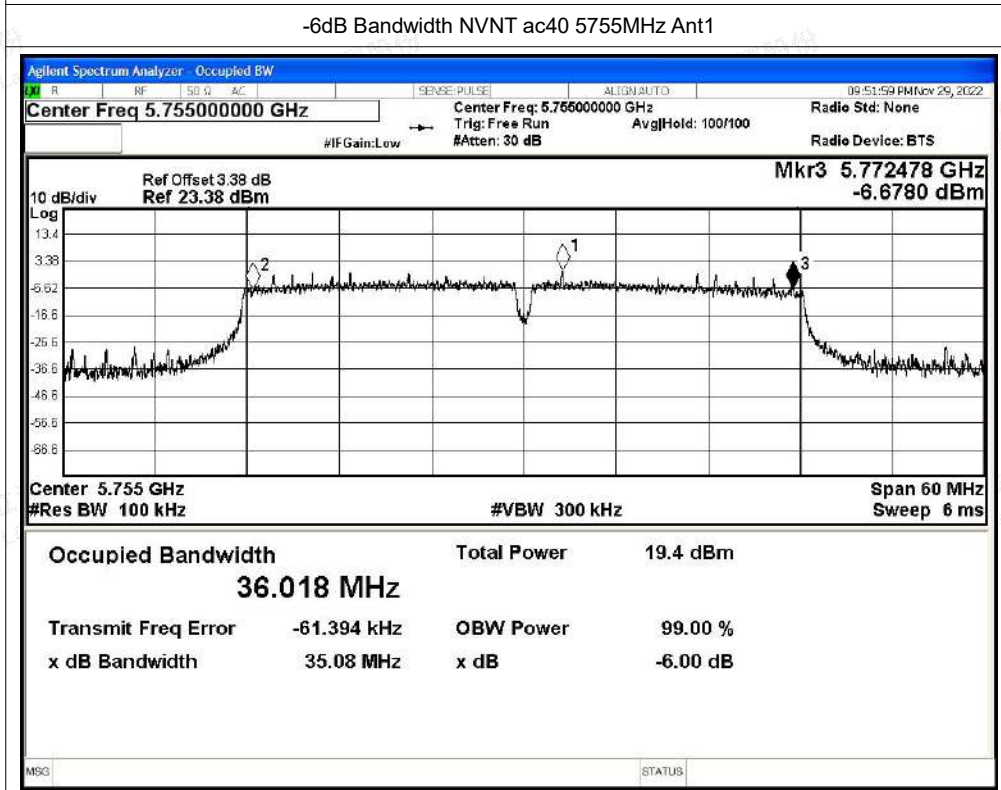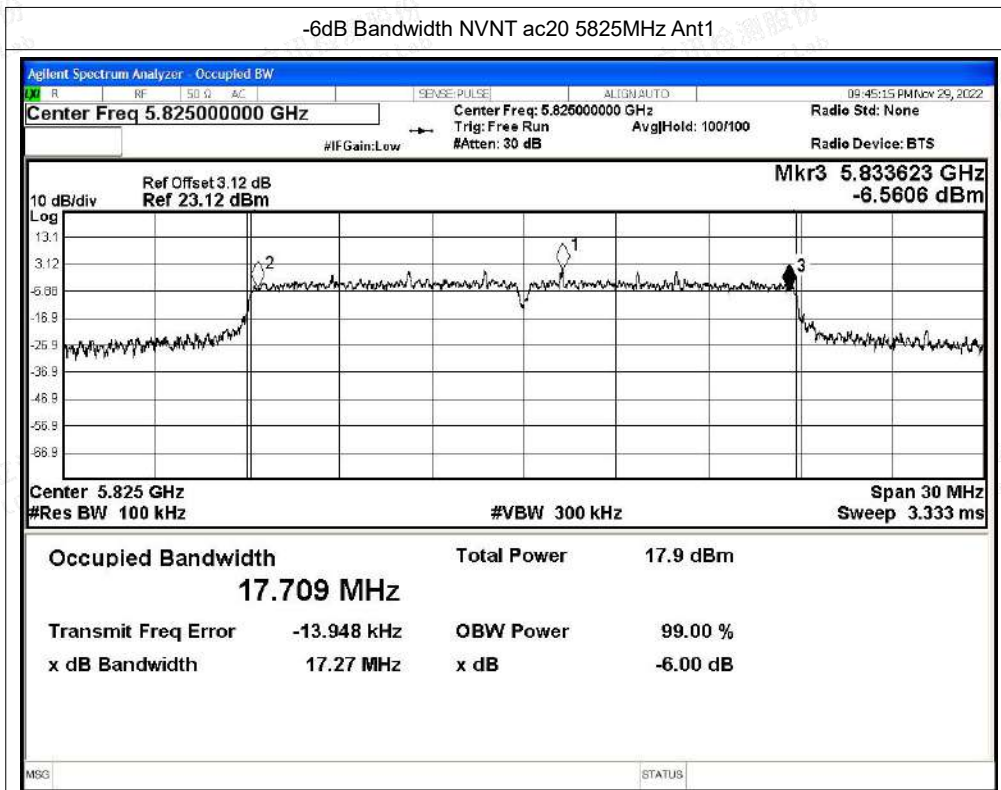




-6dB Bandwidth NVNT ac40 5795MHz Ant1

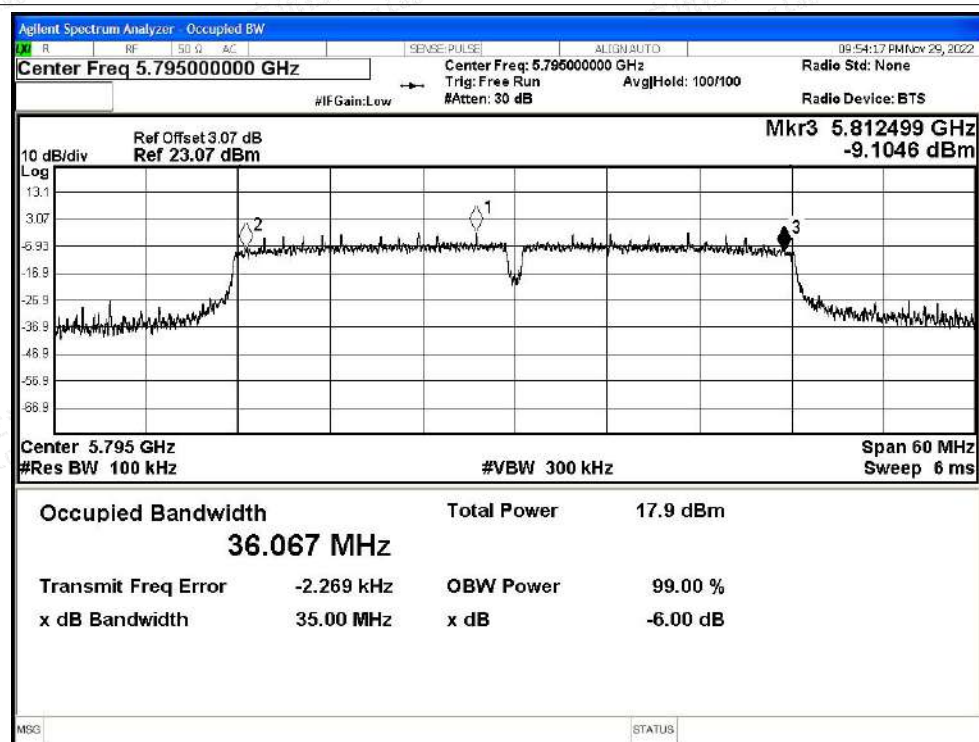

-6dB Bandwidth NVNT ac80 5775MHz Ant1

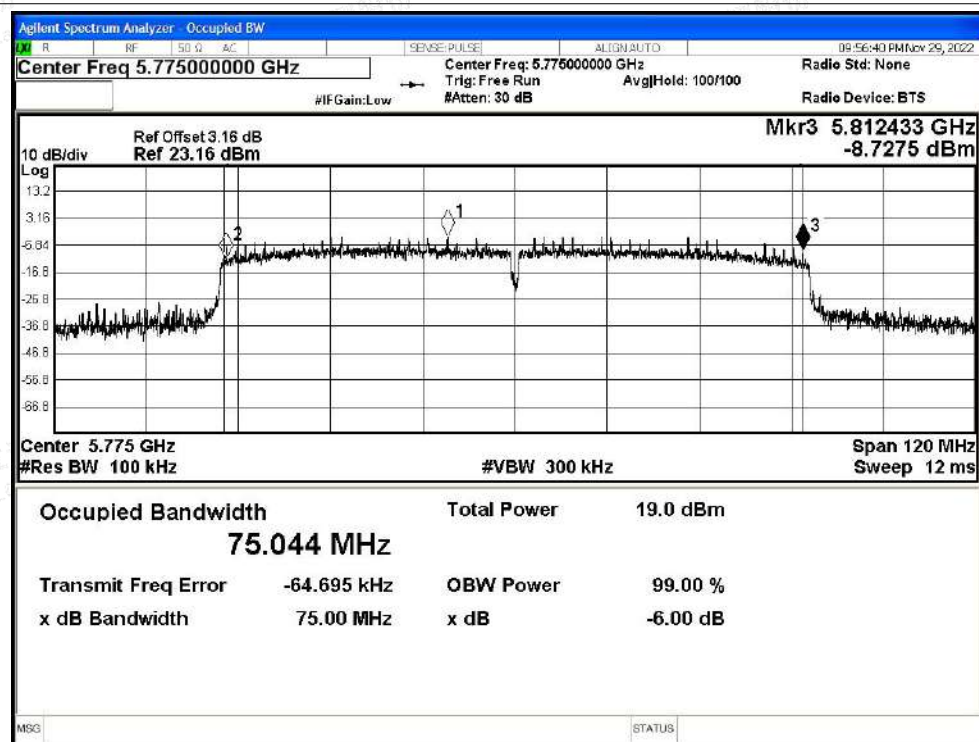



C.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant0	11.33	0.96	12.29	30	Pass
NVNT	a	5785	Ant0	11.39	0.96	12.35	30	Pass
NVNT	a	5825	Ant0	10.26	0.96	11.22	30	Pass
NVNT	n20	5745	Ant0	10.75	1.02	11.77	30	Pass
NVNT	n20	5785	Ant0	10.94	1.02	11.96	30	Pass
NVNT	n20	5825	Ant0	10.44	1.02	11.46	30	Pass
NVNT	n40	5755	Ant0	10	1.87	11.87	30	Pass
NVNT	n40	5795	Ant0	10.8	1.87	12.67	30	Pass
NVNT	ac20	5745	Ant0	11.26	1.02	12.28	30	Pass
NVNT	ac20	5785	Ant0	10.23	1.02	11.25	30	Pass
NVNT	ac20	5825	Ant0	10.03	1.02	11.05	30	Pass
NVNT	ac40	5755	Ant0	10.51	1.87	12.38	30	Pass
NVNT	ac40	5795	Ant0	10.66	1.87	12.53	30	Pass
NVNT	ac80	5775	Ant0	9.86	3.23	13.09	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	11.78	0.96	12.74	30	Pass
NVNT	a	5785	Ant1	10.3	0.96	11.26	30	Pass
NVNT	a	5825	Ant1	10.71	0.96	11.67	30	Pass
NVNT	n20	5745	Ant1	11.71	1.02	12.73	30	Pass
NVNT	n20	5785	Ant1	10.23	1.02	11.25	30	Pass
NVNT	n20	5825	Ant1	10.54	1.02	11.56	30	Pass
NVNT	n40	5755	Ant1	10.96	1.87	12.83	30	Pass
NVNT	n40	5795	Ant1	10.13	1.87	12	30	Pass
NVNT	ac20	5745	Ant1	11.73	1.02	12.75	30	Pass
NVNT	ac20	5785	Ant1	11.4	1.02	12.42	30	Pass
NVNT	ac20	5825	Ant1	10.82	1.02	11.84	30	Pass
NVNT	ac40	5755	Ant1	11.94	1.87	13.81	30	Pass
NVNT	ac40	5795	Ant1	10.6	1.87	12.47	30	Pass
NVNT	ac80	5775	Ant1	9.51	3.22	12.73	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+Ant1		
NVNT	n20	5745	11.77	12.73	15.29	30	Pass
NVNT	n20	5785	11.96	11.25	14.63	30	Pass
NVNT	n20	5825	11.46	11.56	14.52	30	Pass
NVNT	n40	5755	11.87	12.83	15.39	30	Pass
NVNT	n40	5795	12.67	12	15.36	30	Pass
NVNT	ac20	5745	12.28	12.75	15.53	30	Pass
NVNT	ac20	5785	11.25	12.42	14.88	30	Pass
NVNT	ac20	5825	11.05	11.84	14.47	30	Pass
NVNT	ac40	5755	12.38	13.81	16.16	30	Pass
NVNT	ac40	5795	12.53	12.47	15.51	30	Pass
NVNT	ac80	5775	13.09	12.73	15.92	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



C.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/510kHz)	Duty Factor (dB)	RBW factor (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
NVNT	a	5745	Ant0	-13.41	0.96	-0.086	-12.536	30	Pass
NVNT	a	5785	Ant0	-15.73	0.96	-0.086	-14.856	30	Pass
NVNT	a	5825	Ant0	-12.83	0.96	-0.086	-11.956	30	Pass
NVNT	n20	5745	Ant0	-11.6	1.02	-0.086	-10.666	30	Pass
NVNT	n20	5785	Ant0	-12.51	1.02	-0.086	-11.576	30	Pass
NVNT	n20	5825	Ant0	-16.59	1.02	-0.086	-15.656	30	Pass
NVNT	n40	5755	Ant0	-23.17	1.87	-0.086	-21.386	30	Pass
NVNT	n40	5795	Ant0	-23.18	1.87	-0.086	-21.396	30	Pass
NVNT	ac20	5745	Ant0	-13.09	1.02	-0.086	-12.156	30	Pass
NVNT	ac20	5785	Ant0	-14.36	1.02	-0.086	-13.426	30	Pass
NVNT	ac20	5825	Ant0	-14.09	1.02	-0.086	-13.156	30	Pass
NVNT	ac40	5755	Ant0	-23.09	1.87	-0.086	-21.306	30	Pass
NVNT	ac40	5795	Ant0	-24.01	1.87	-0.086	-22.226	30	Pass
NVNT	ac80	5775	Ant0	-32.84	3.23	-0.086	-29.696	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/510kHz)	Duty Factor (dB)	RBW factor (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
NVNT	a	5745	Ant1	-11.41	0.96	-0.086	-10.536	30	Pass
NVNT	a	5785	Ant1	-12.71	0.96	-0.086	-11.836	30	Pass
NVNT	a	5825	Ant1	-14.85	0.96	-0.086	-13.976	30	Pass
NVNT	n20	5745	Ant1	-13.71	1.02	-0.086	-12.776	30	Pass
NVNT	n20	5785	Ant1	-13.93	1.02	-0.086	-12.996	30	Pass
NVNT	n20	5825	Ant1	-13.58	1.02	-0.086	-12.646	30	Pass
NVNT	n40	5755	Ant1	-23.34	1.87	-0.086	-21.556	30	Pass
NVNT	n40	5795	Ant1	-25.12	1.87	-0.086	-23.336	30	Pass
NVNT	ac20	5745	Ant1	-11.67	1.02	-0.086	-10.736	30	Pass
NVNT	ac20	5785	Ant1	-13.62	1.02	-0.086	-12.686	30	Pass
NVNT	ac20	5825	Ant1	-14.06	1.02	-0.086	-13.126	30	Pass
NVNT	ac40	5755	Ant1	-24.78	1.87	-0.086	-22.996	30	Pass
NVNT	ac40	5795	Ant1	-25.59	1.87	-0.086	-23.806	30	Pass
NVNT	ac80	5775	Ant1	-33.27	3.22	-0.086	-30.136	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



MIMO

Condition	Mode	Frequency (MHz)	Total PSD (dBm/500kHz)			Limit (dBm/500kHz)	Verdict
			Ant0	Ant1	Ant0+Ant1		
NVNT	n20	5745	-10.666	-12.776	-8.58	29.99	Pass
NVNT	n20	5785	-11.576	-12.996	-9.22	29.99	Pass
NVNT	n20	5825	-15.656	-12.646	-10.88	29.99	Pass
NVNT	n40	5755	-21.386	-21.556	-18.46	29.99	Pass
NVNT	n40	5795	-21.396	-23.336	-19.25	29.99	Pass
NVNT	ac20	5745	-12.156	-10.736	-8.38	29.99	Pass
NVNT	ac20	5785	-13.426	-12.686	-10.03	29.99	Pass
NVNT	ac20	5825	-13.156	-13.126	-10.13	29.99	Pass
NVNT	ac40	5755	-21.306	-22.996	-19.06	29.99	Pass
NVNT	ac40	5795	-22.226	-23.806	-19.93	29.99	Pass
NVNT	ac80	5775	-29.696	-30.136	-26.90	29.99	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

PSD NVNT a 5745MHz Ant0

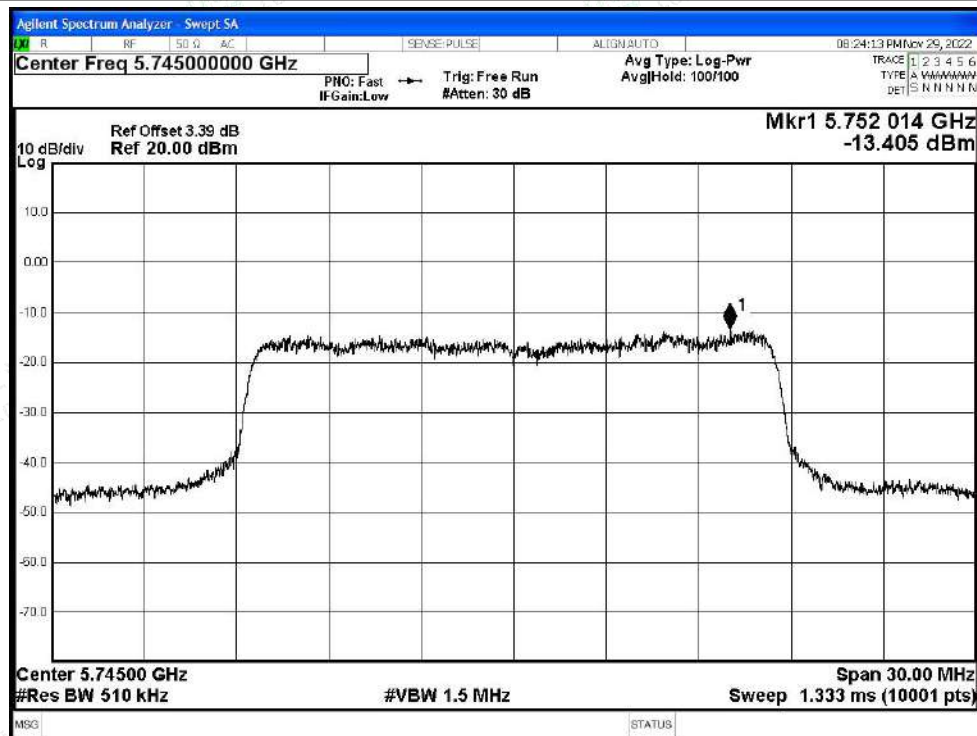


PSD NVNT a 5785MHz Ant0

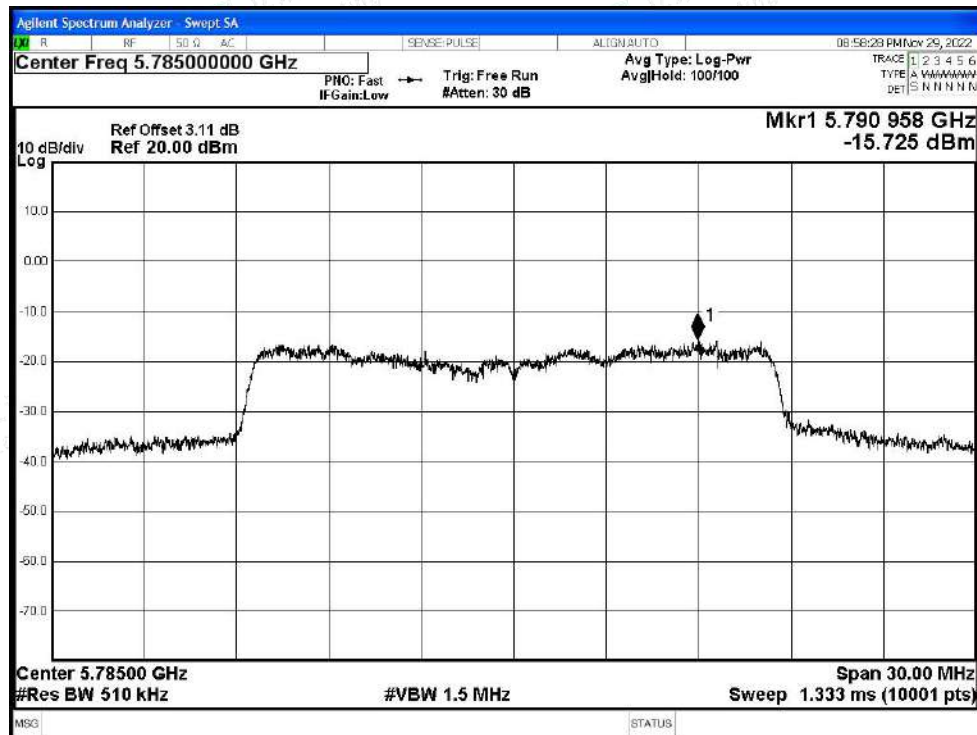








PSD NVNT a 5825MHz Ant0


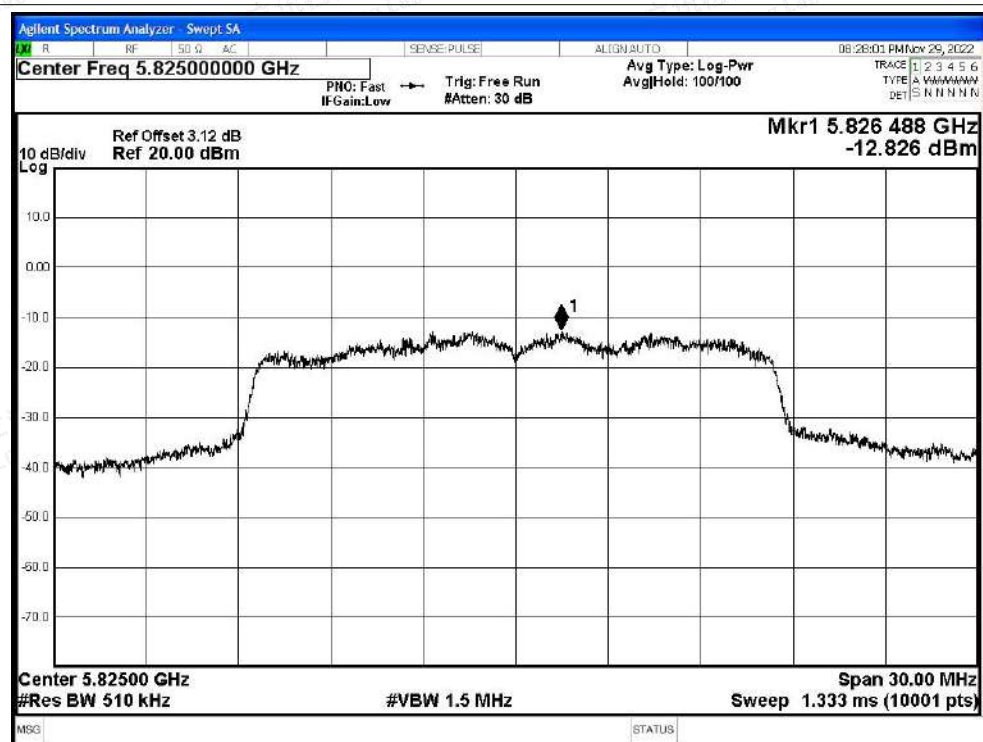




PSD NVNT n20 5745MHz Ant0


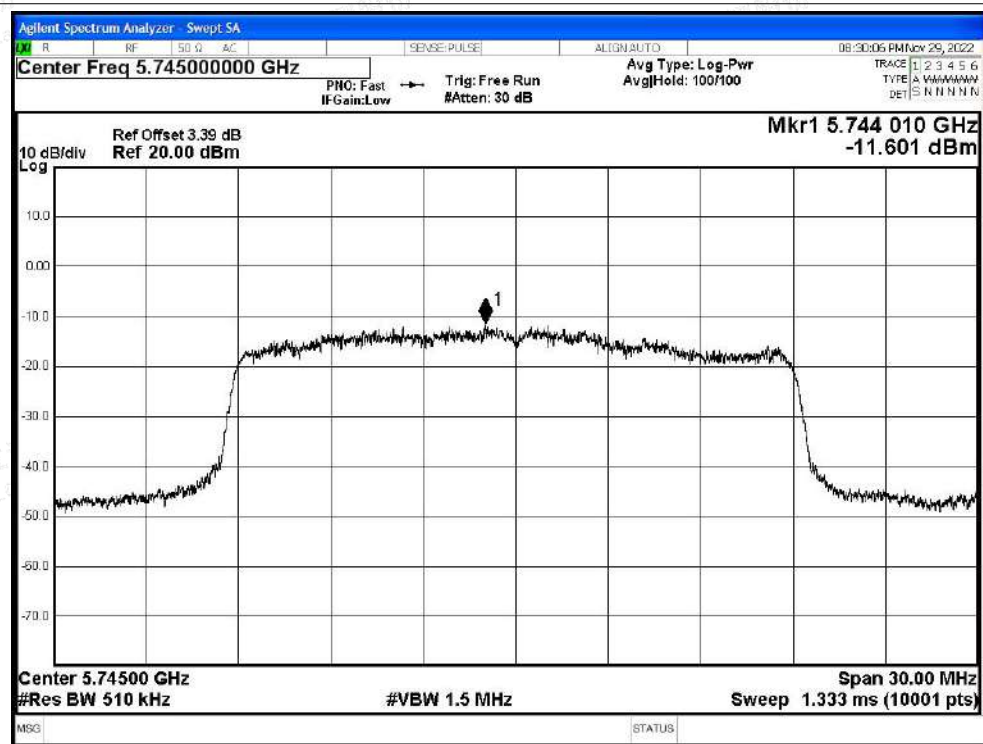


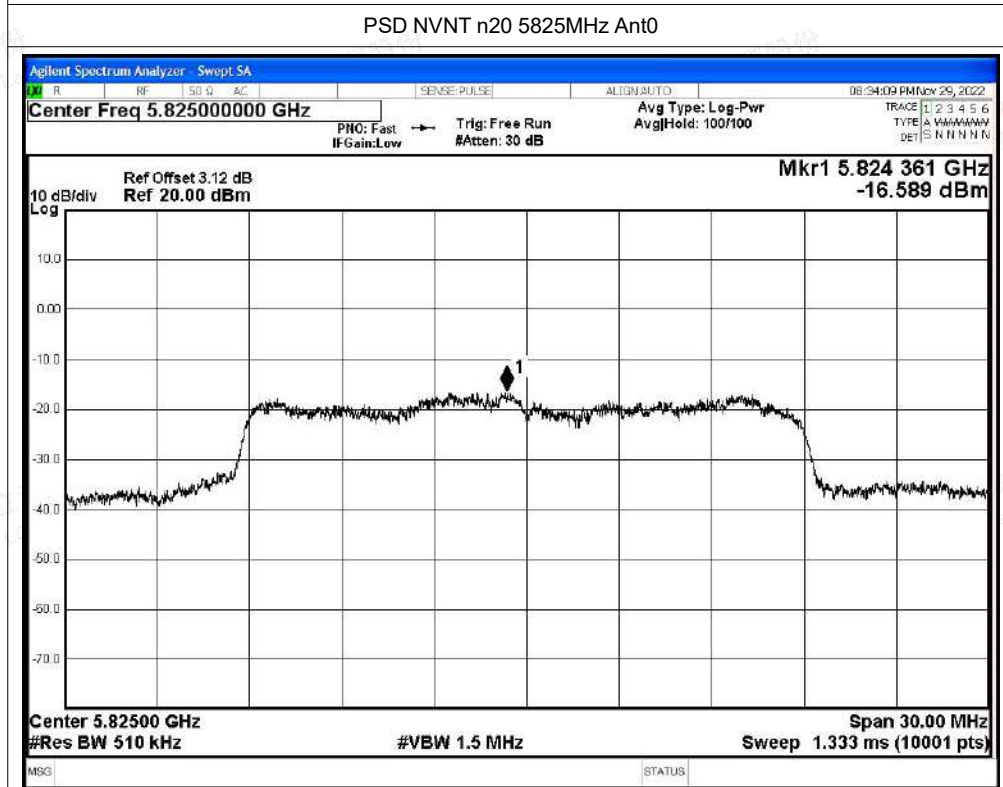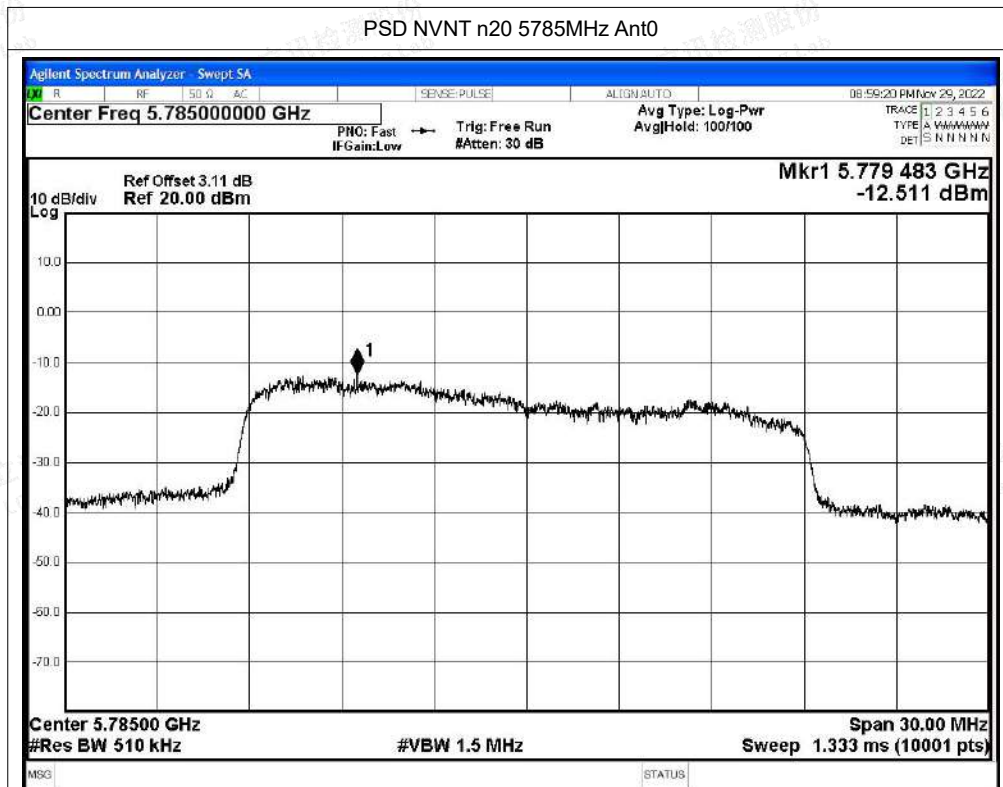

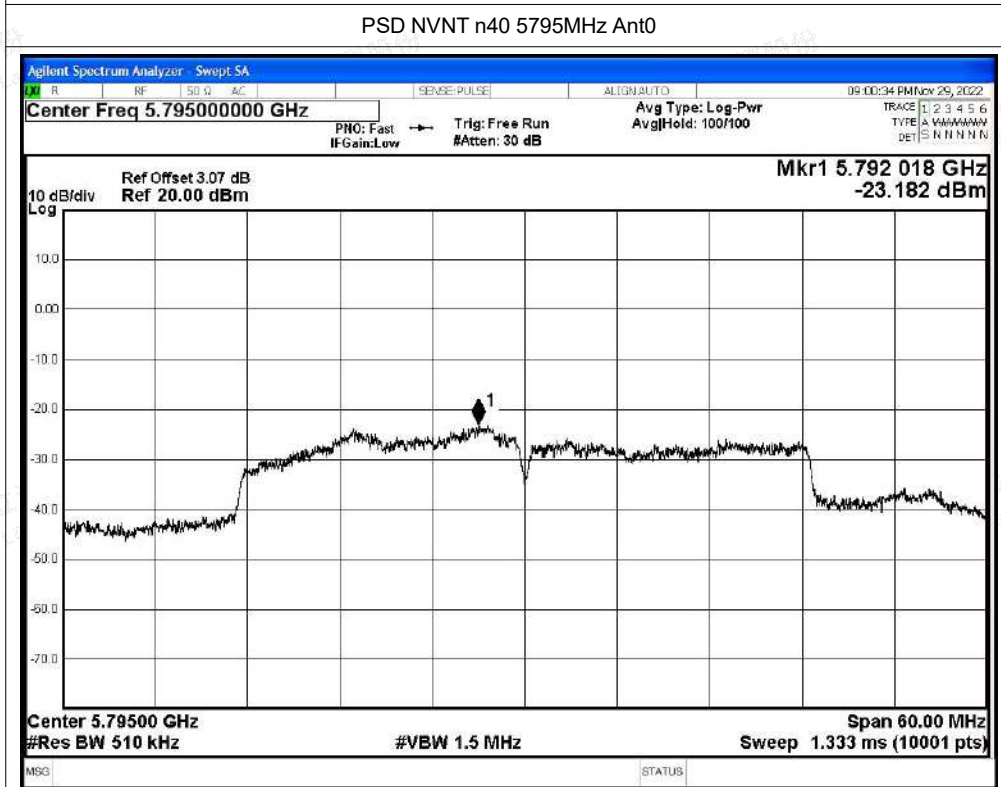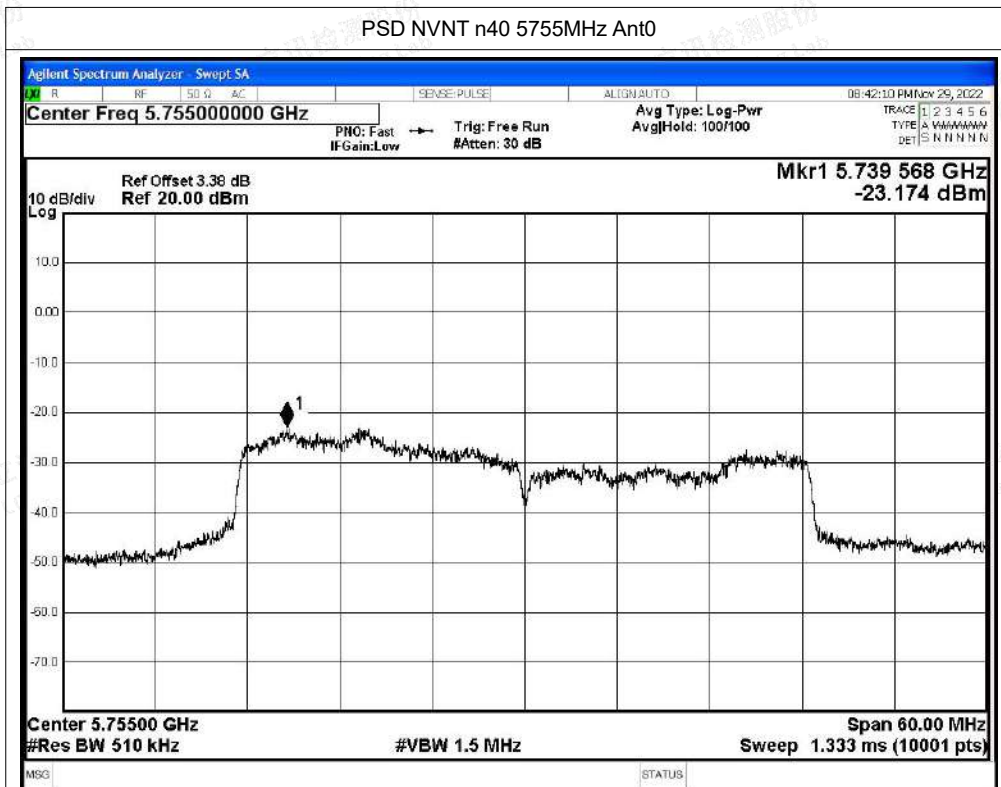

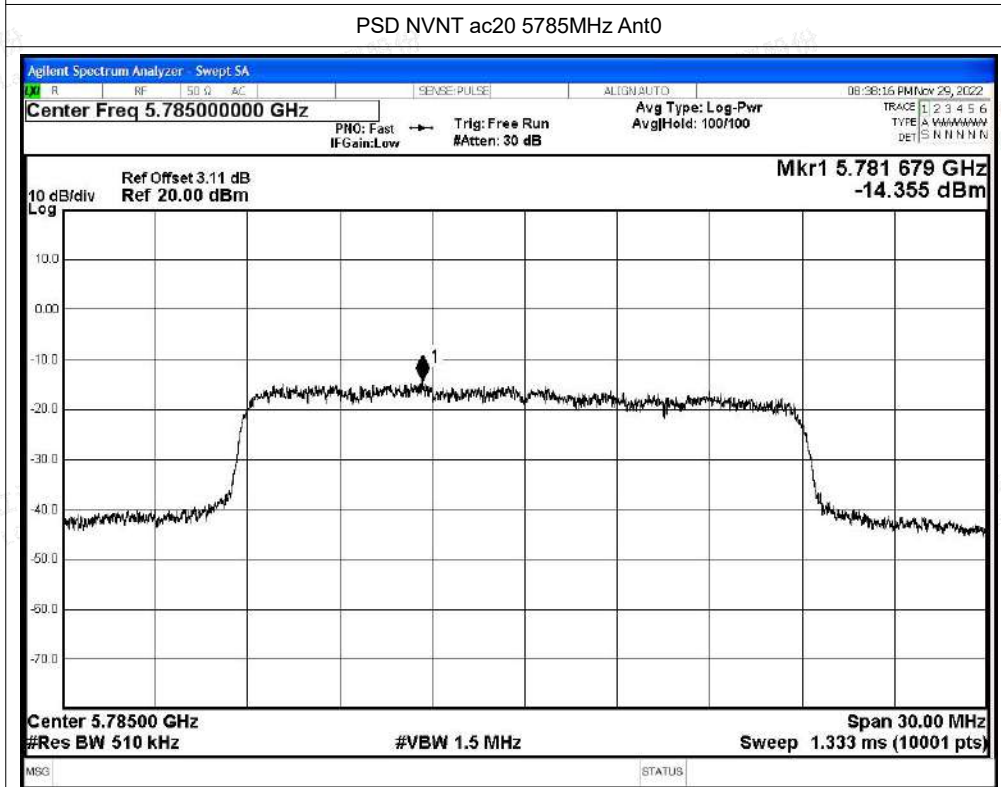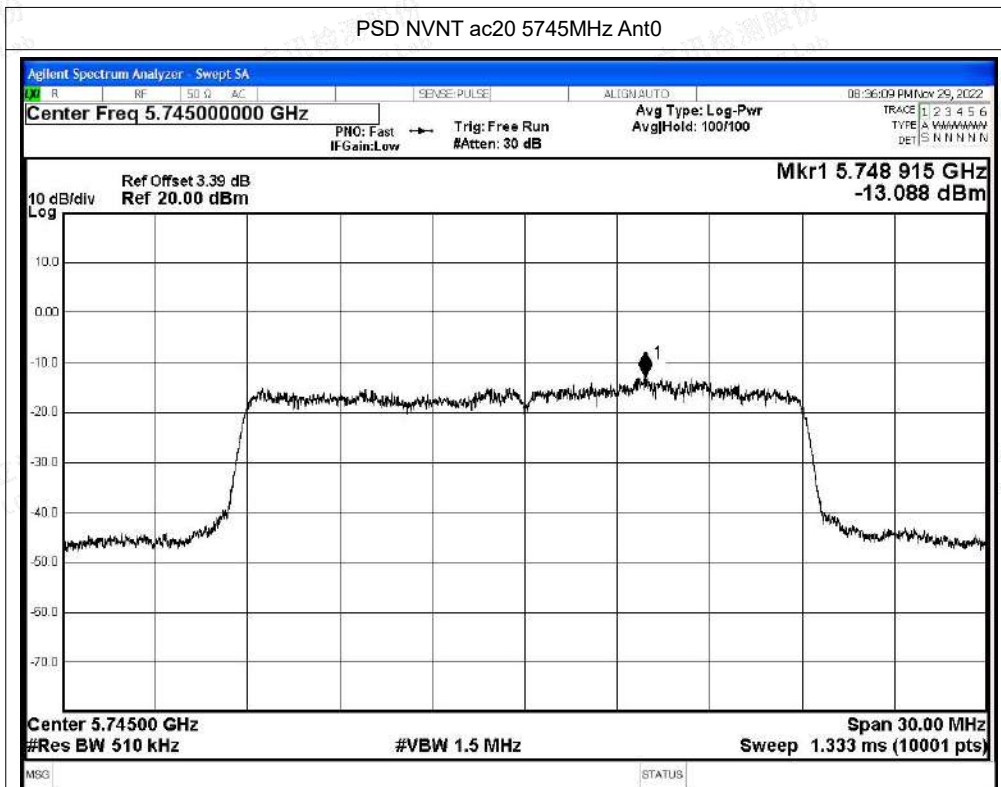

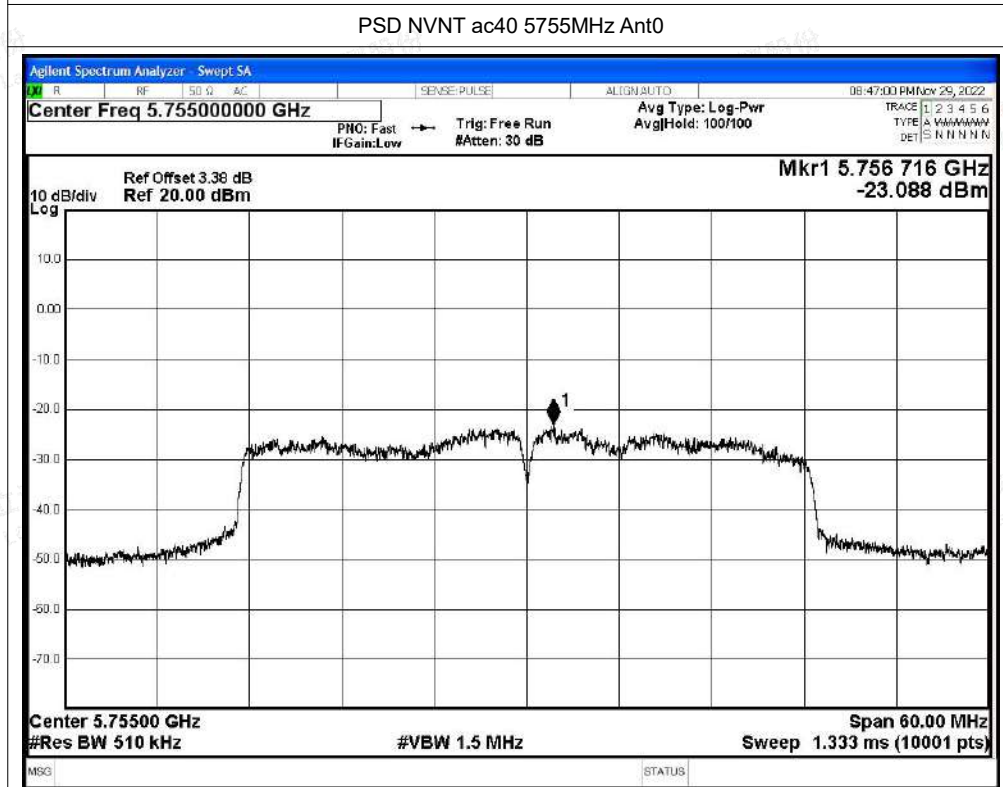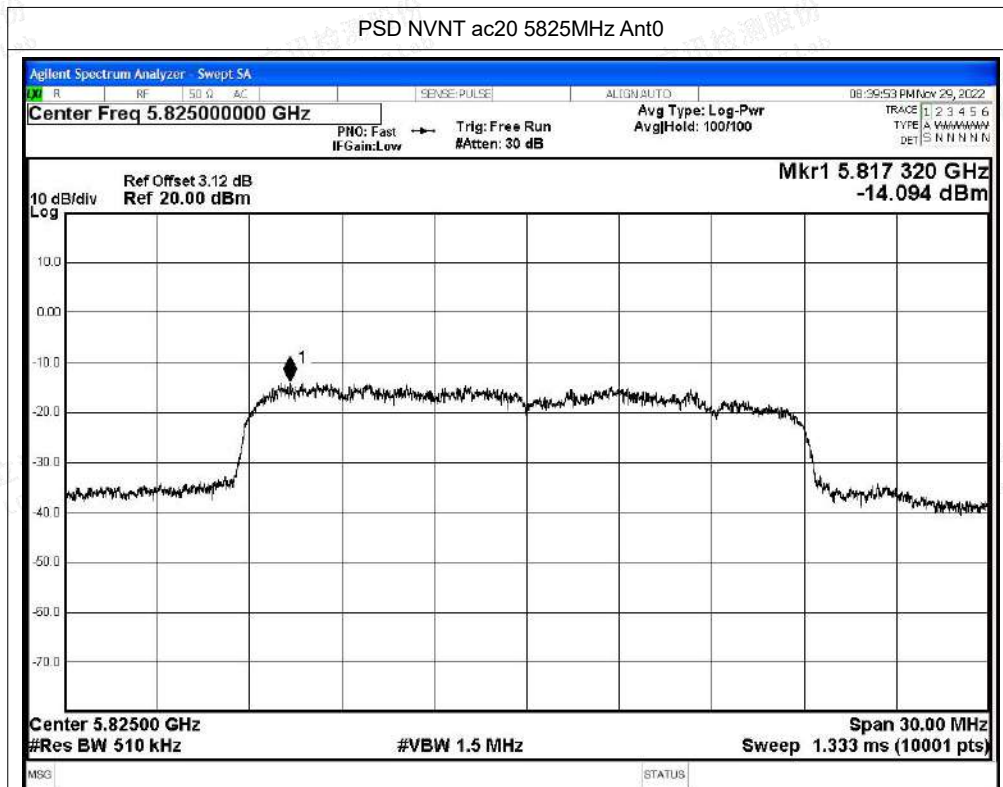


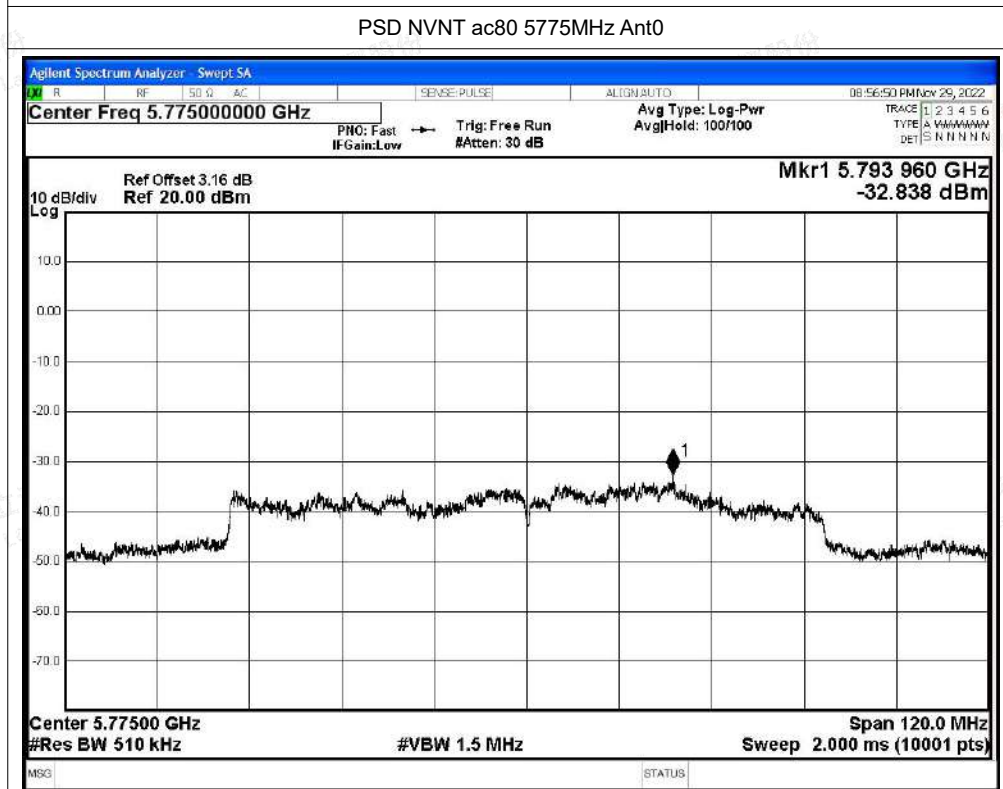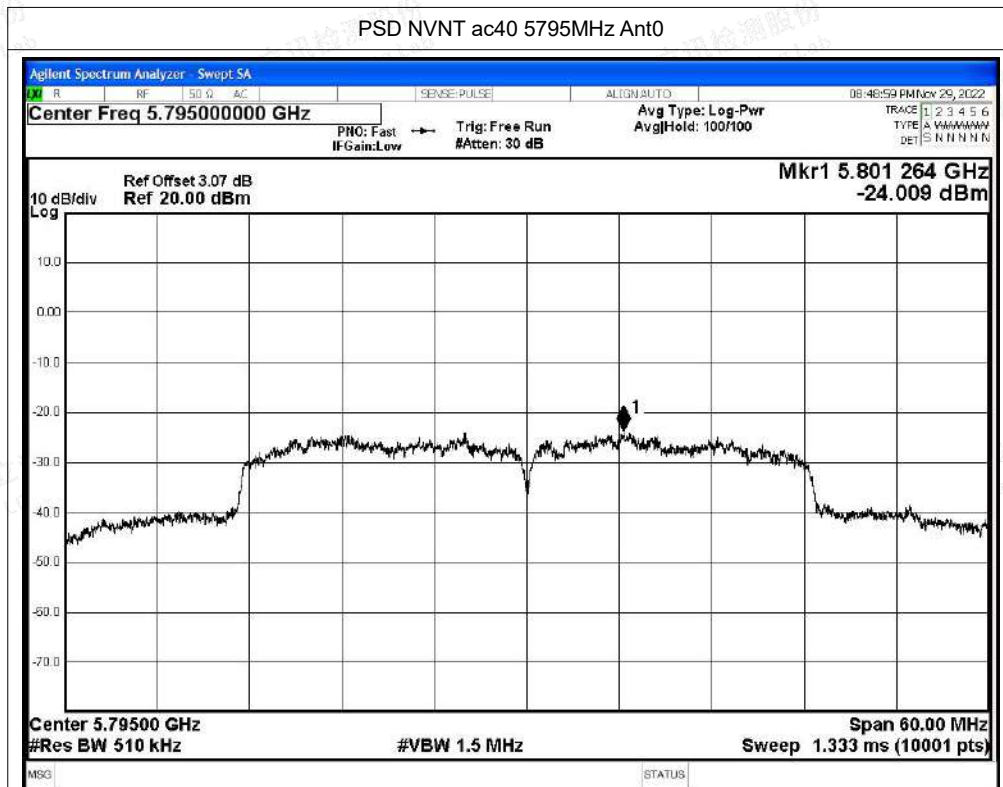




Test Graphs

PSD NVNT a 5745MHz Ant1

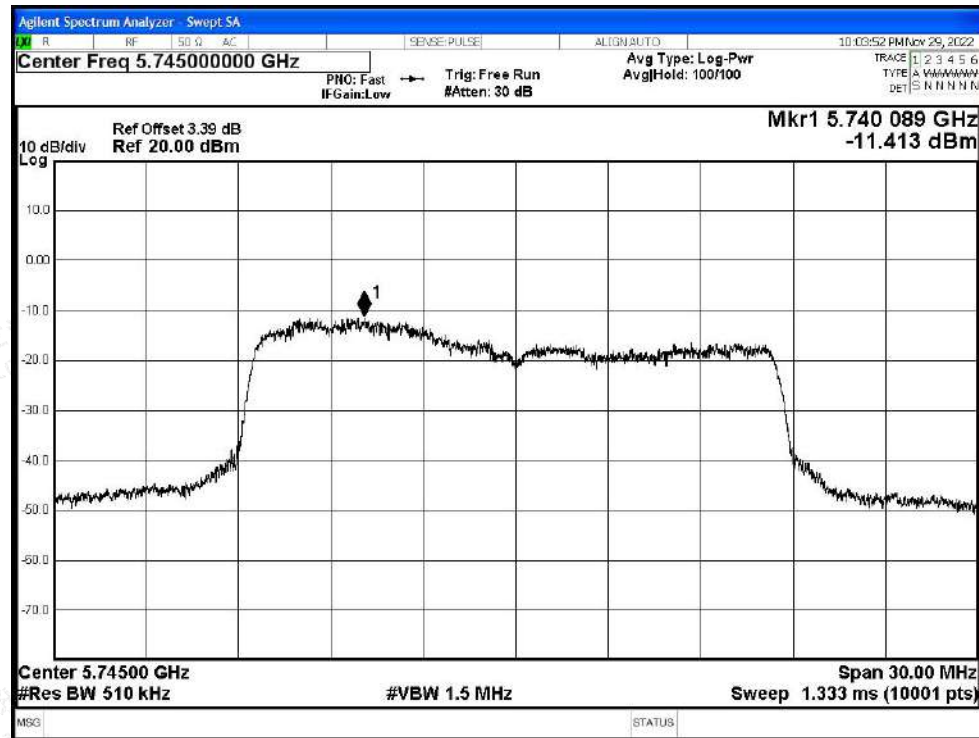


PSD NVNT a 5785MHz Ant1

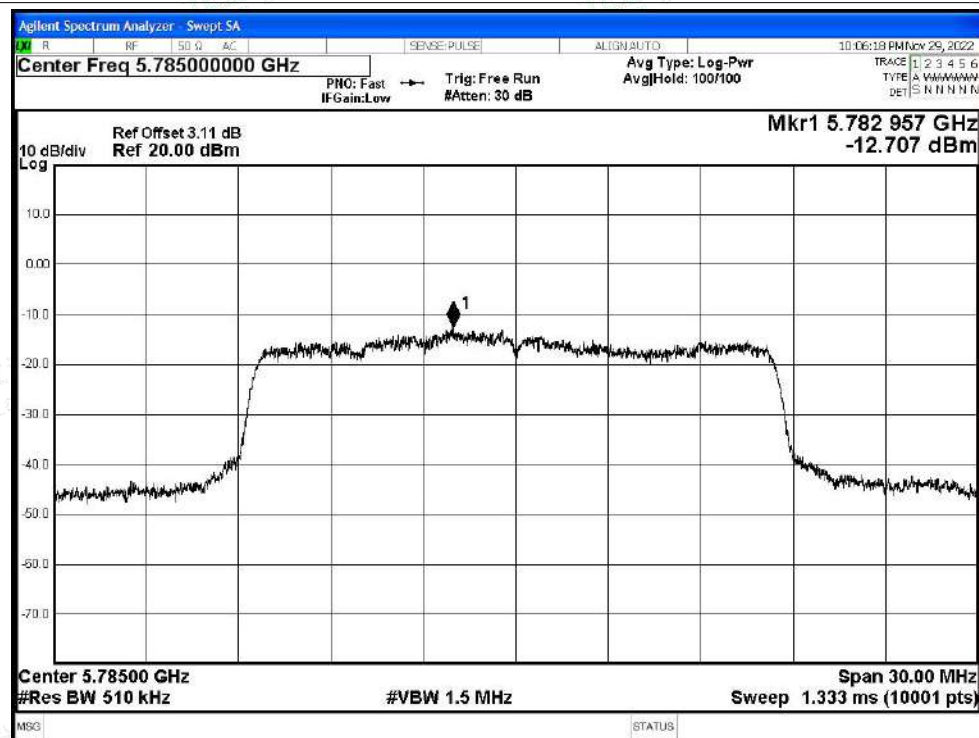








PSD NVNT a 5825MHz Ant1


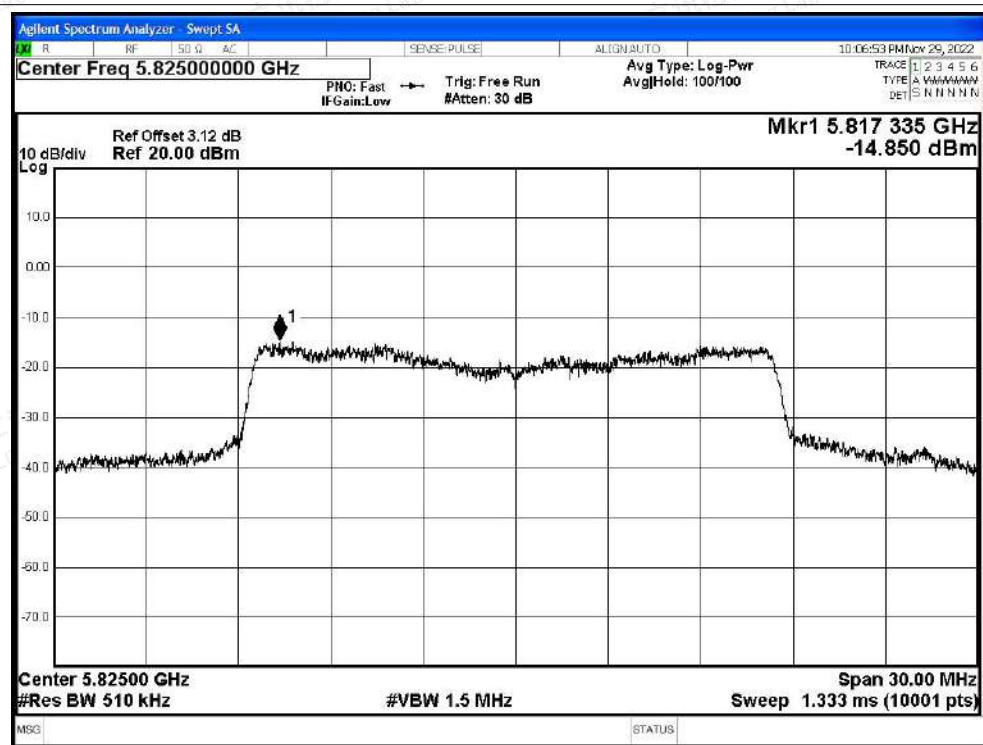




PSD NVNT n20 5745MHz Ant1


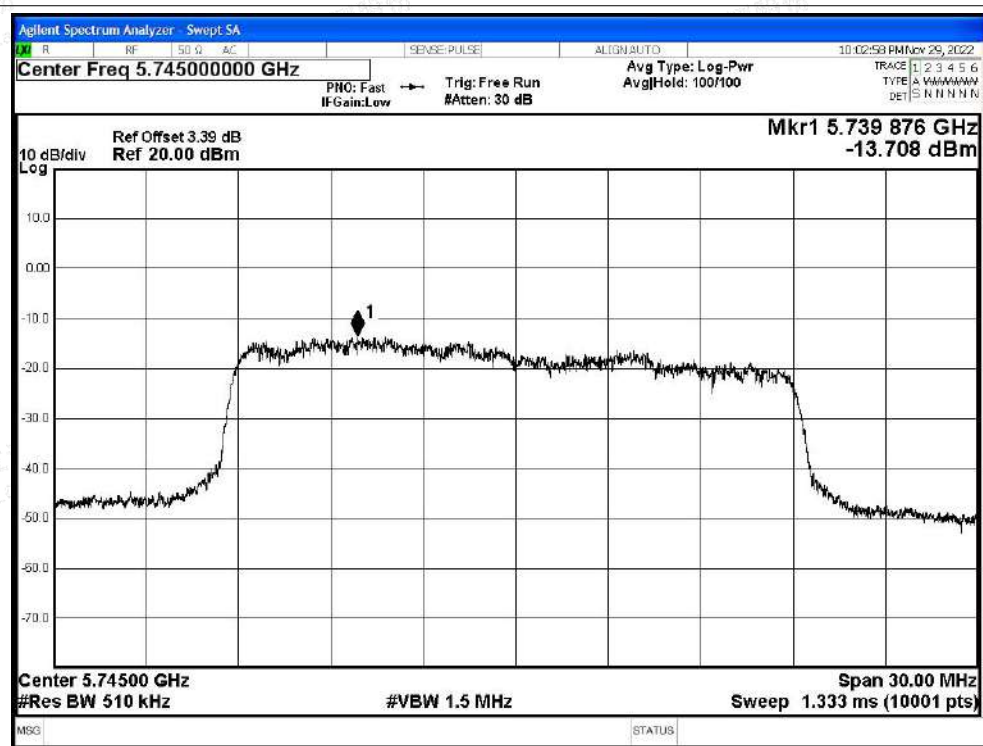


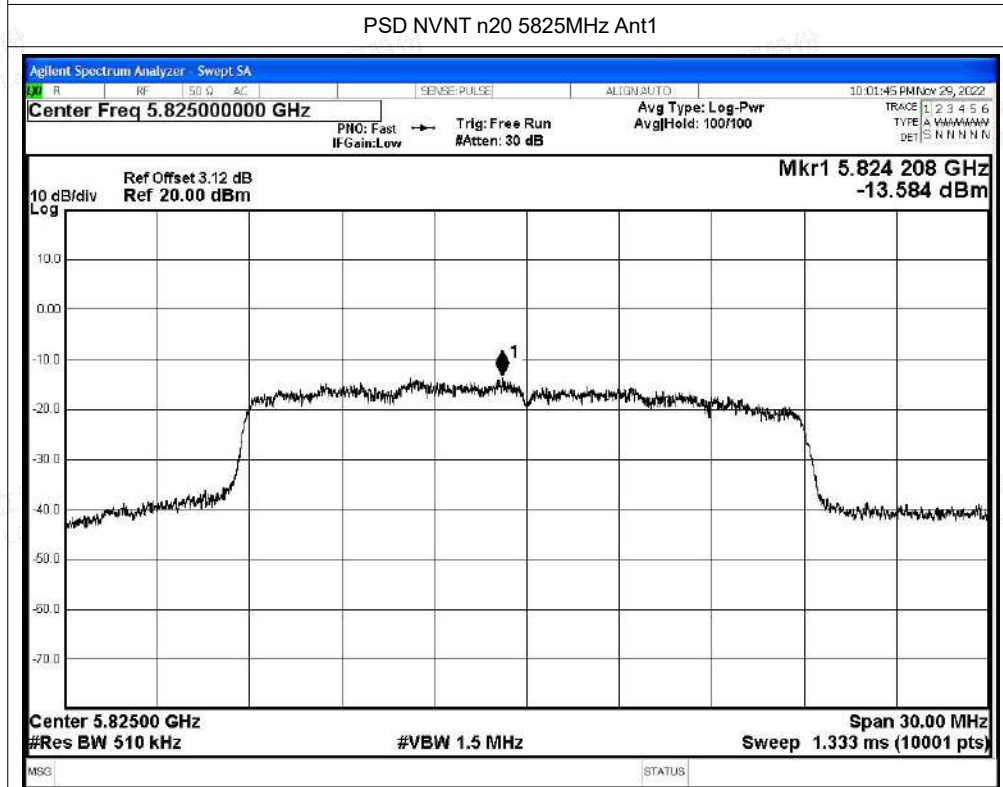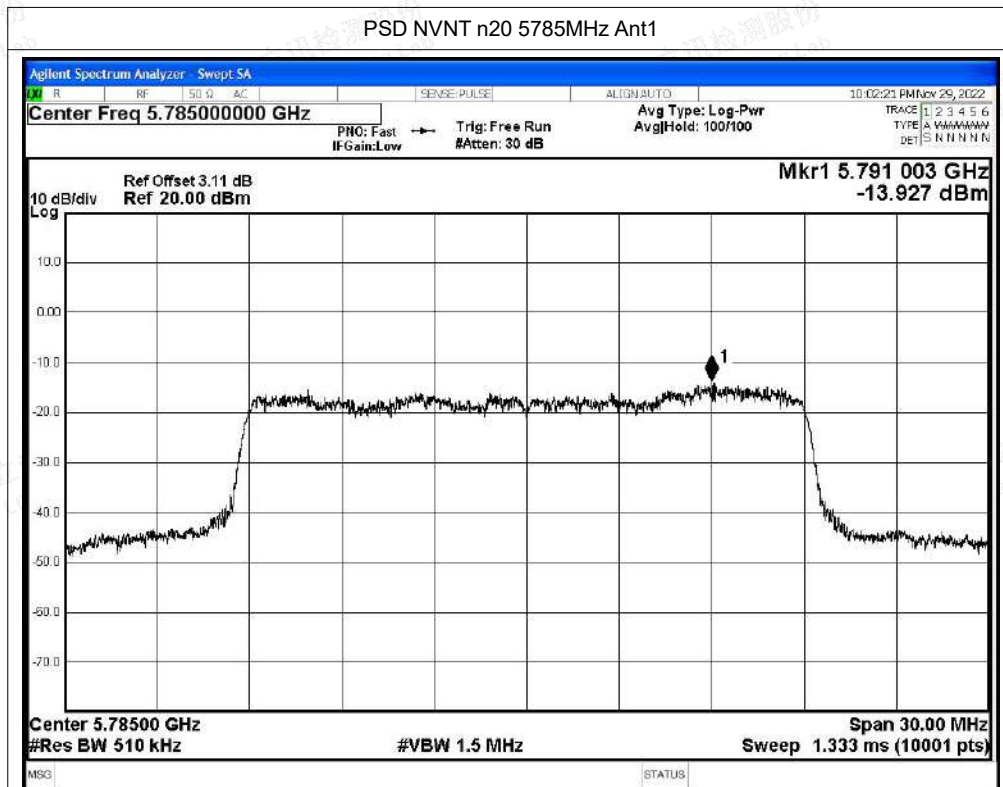

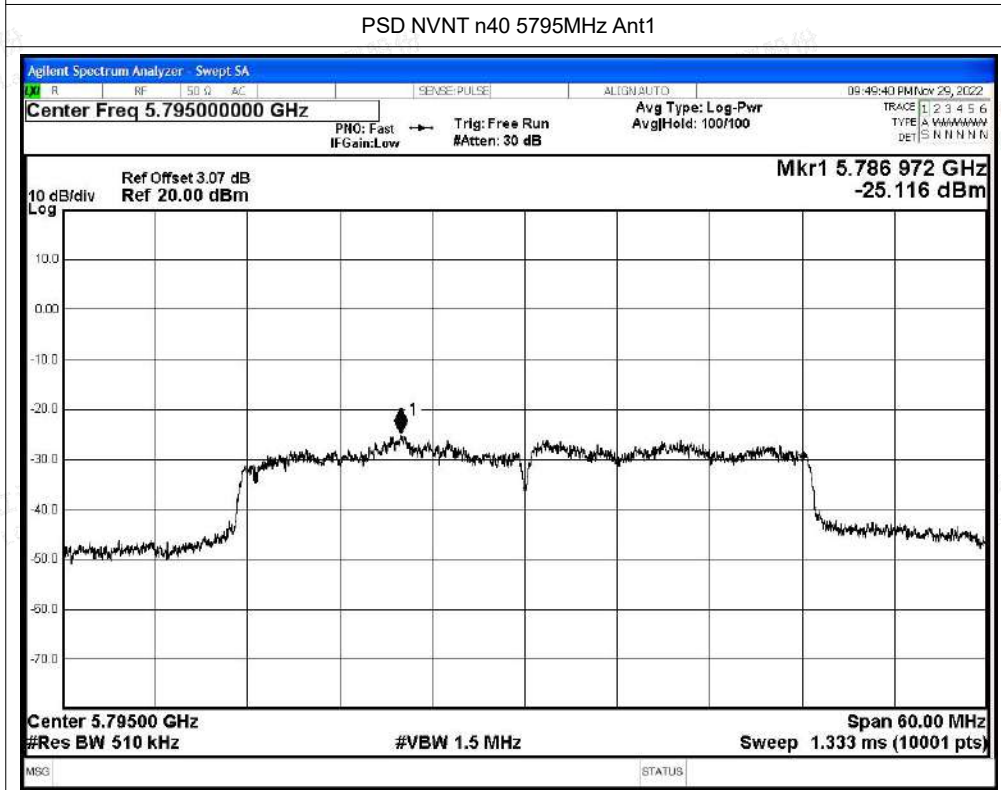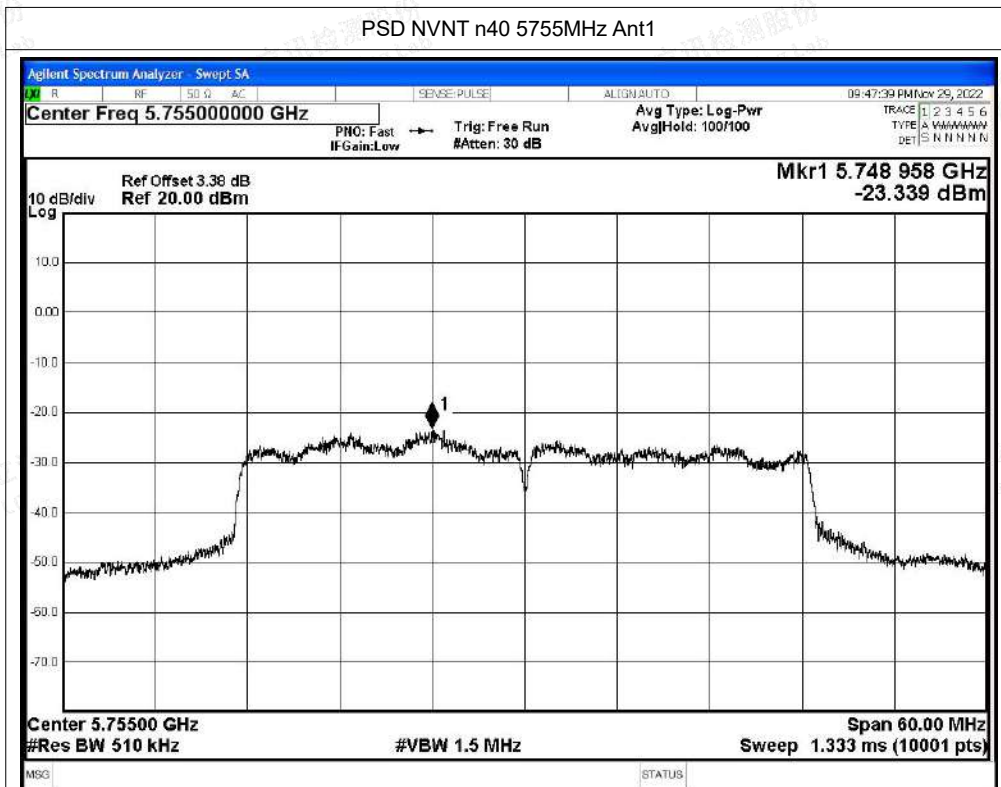

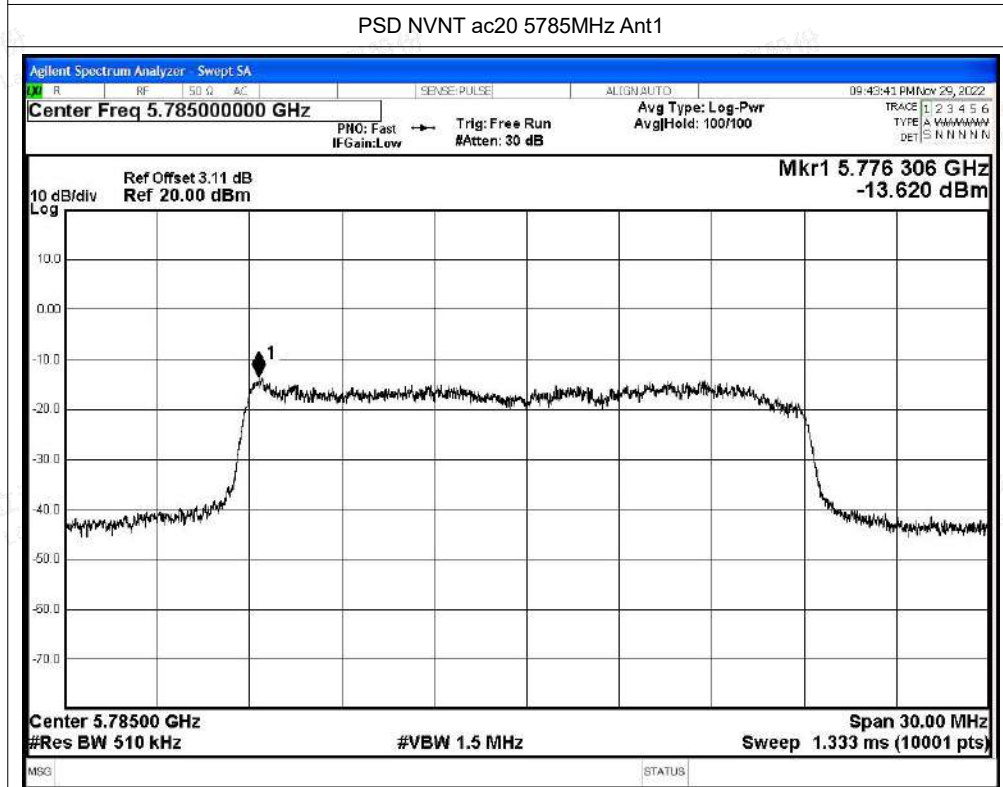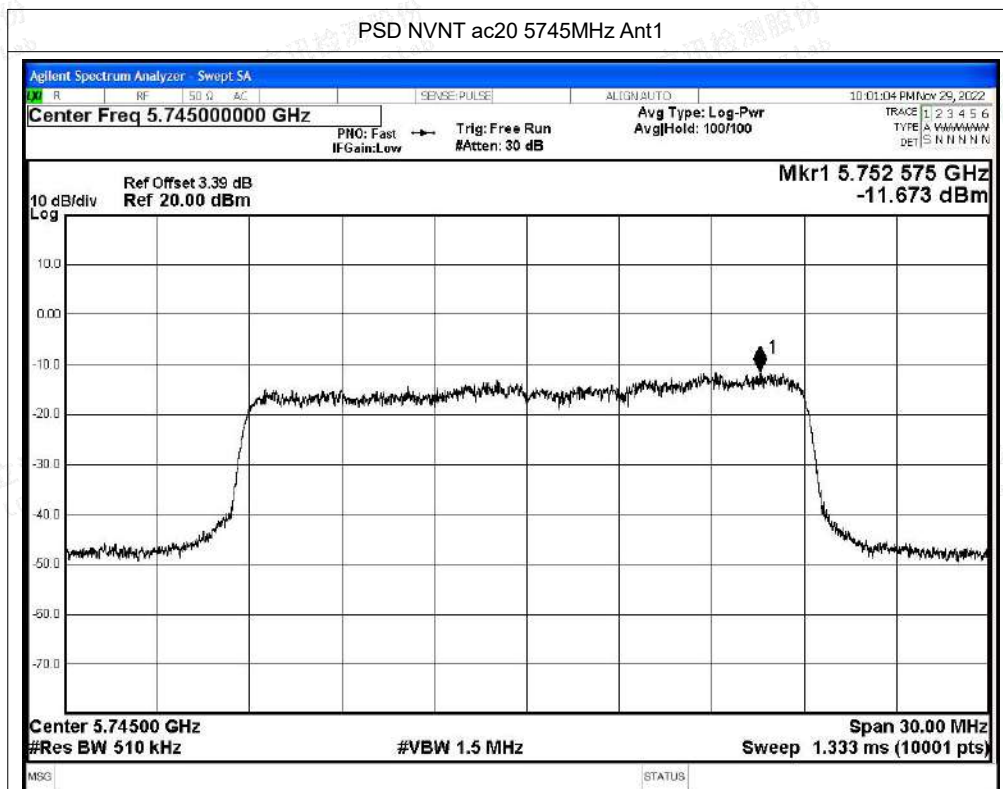

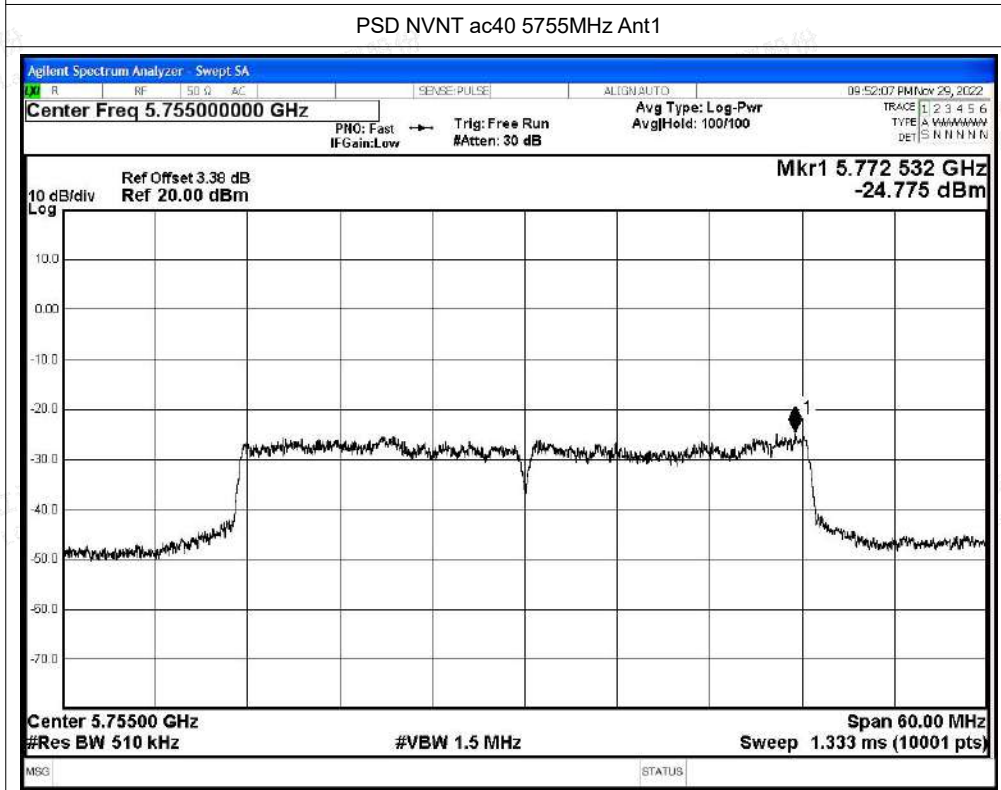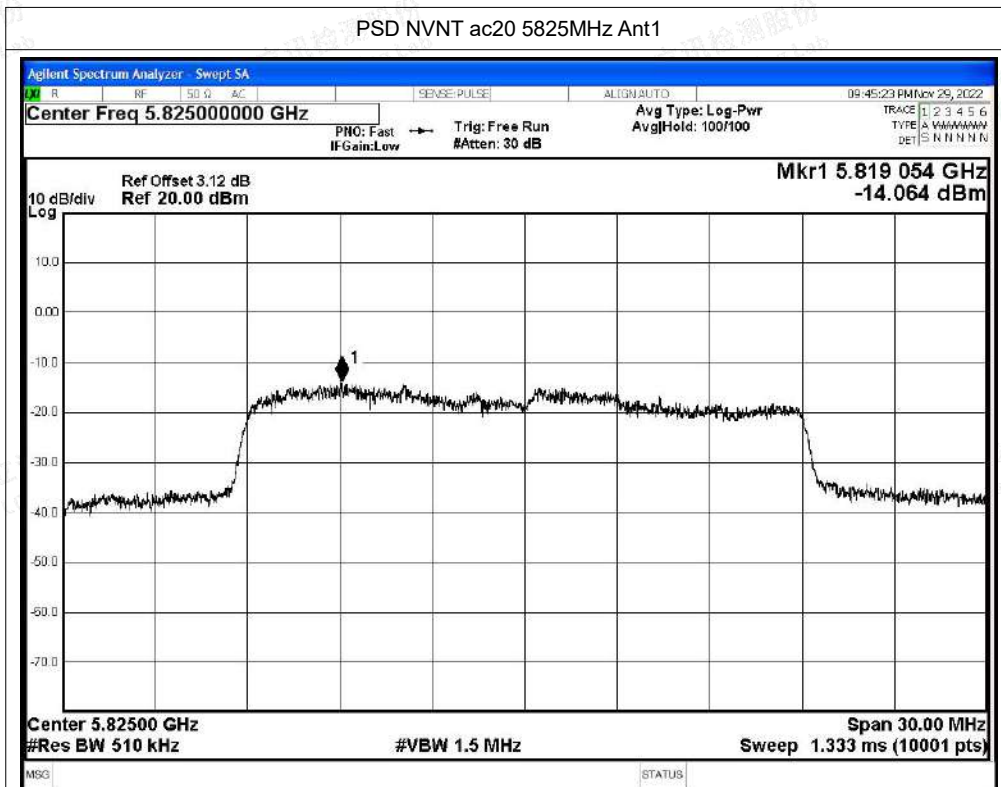

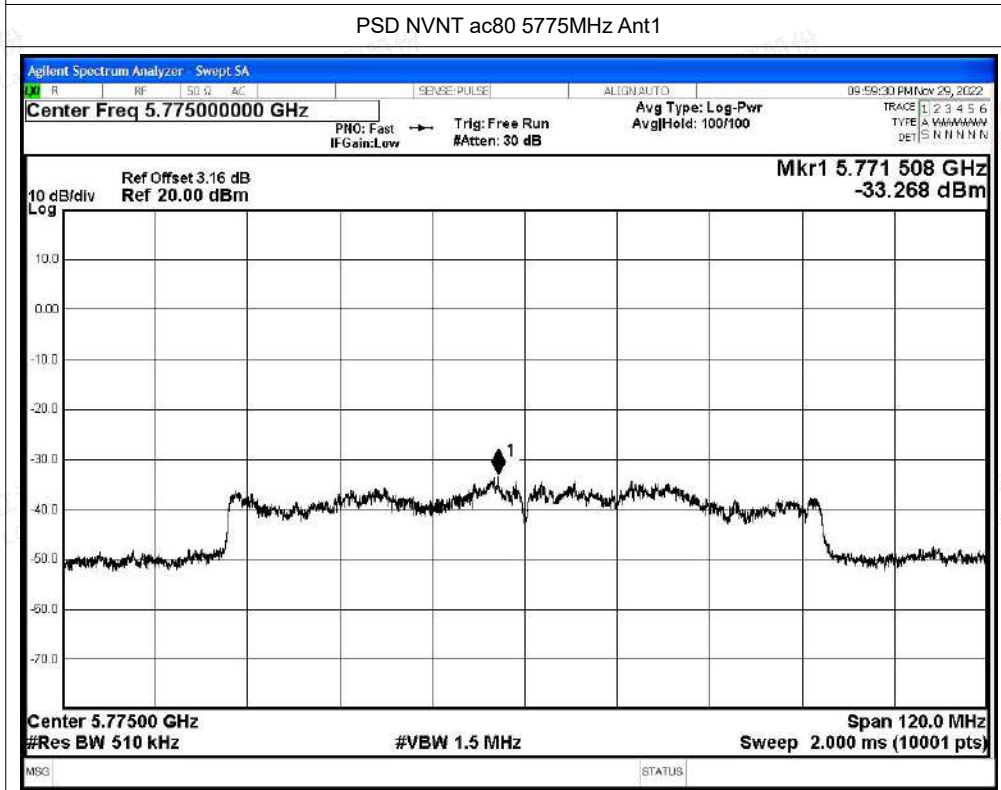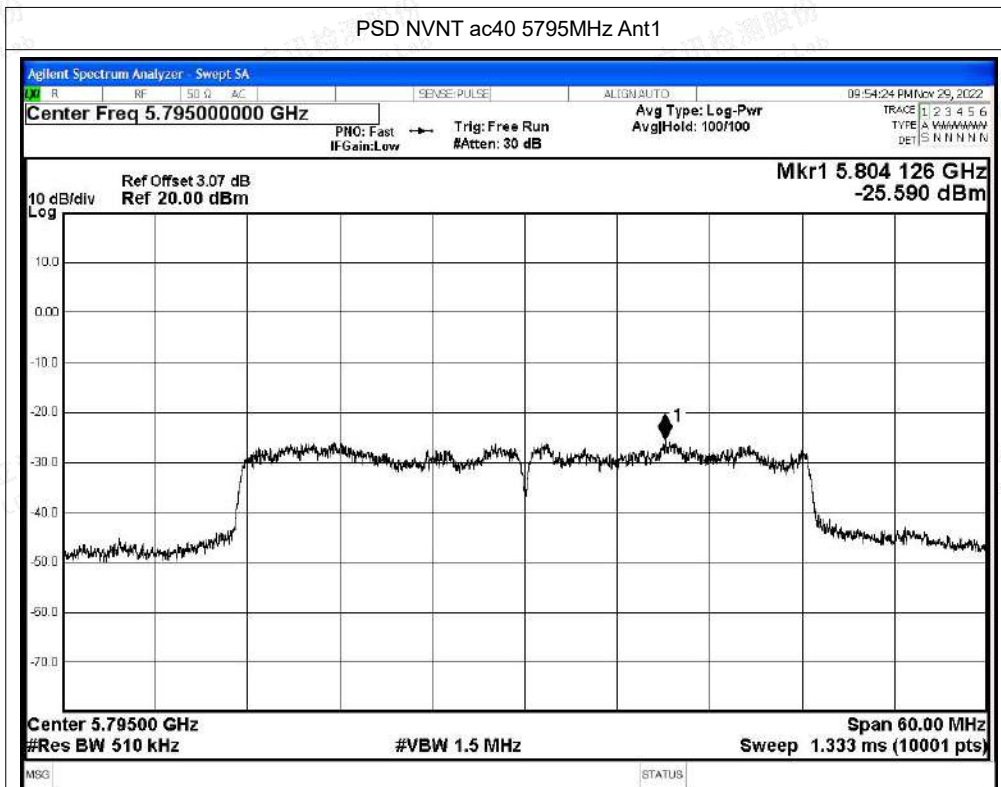



C.4 Restrict Band

Condition	Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	EIRP Power (dBm)	Detector	Limit (dBm)	Verdict
NVNT	a	5745	5650	-41.64	4	-37.64	Peak	-27	Pass
NVNT	a	5745	5650	-51.06	4	-47.06	Average	-27	Pass
NVNT	a	5745	5700	-39.77	4	-35.77	Peak	10	Pass
NVNT	a	5745	5700	-50.08	4	-46.08	Average	10	Pass
NVNT	a	5745	5720	-23.83	4	-19.83	Peak	15.6	Pass
NVNT	a	5745	5720	-38.41	4	-34.41	Average	15.6	Pass
NVNT	a	5745	5725	-20.04	4	-16.04	Peak	27	Pass
NVNT	a	5745	5725	-34.49	4	-30.49	Average	27	Pass
NVNT	a	5825	5850	-16.8	4	-12.8	Peak	27	Pass
NVNT	a	5825	5850	-31.37	4	-27.37	Average	27	Pass
NVNT	a	5825	5855	-22.46	4	-18.46	Peak	15.6	Pass
NVNT	a	5825	5855	-34.9	4	-30.9	Average	15.6	Pass
NVNT	a	5825	5875	-29.84	4	-25.84	Peak	10	Pass
NVNT	a	5825	5875	-47.14	4	-43.14	Average	10	Pass
NVNT	a	5825	5925	-40.05	4	-36.05	Peak	-27	Pass
NVNT	a	5825	5925	-50.6	4	-46.6	Average	-27	Pass
NVNT	n20-MIMO	5745	5650	-40.93	7.01	-33.92	Peak	-27	Pass
NVNT	n20-MIMO	5745	5650	-50.98	7.01	-43.97	Average	-27	Pass
NVNT	n20-MIMO	5745	5700	-40.49	7.01	-33.48	Peak	10	Pass
NVNT	n20-MIMO	5745	5700	-49.56	7.01	-42.55	Average	10	Pass
NVNT	n20-MIMO	5745	5720	-22.88	7.01	-15.87	Peak	15.6	Pass
NVNT	n20-MIMO	5745	5720	-37.28	7.01	-30.27	Average	15.6	Pass
NVNT	n20-MIMO	5745	5725	-18.73	7.01	-11.72	Peak	27	Pass
NVNT	n20-MIMO	5745	5725	-33.83	7.01	-26.82	Average	27	Pass
NVNT	n20-MIMO	5825	5850	-16.28	7.01	-9.27	Peak	27	Pass
NVNT	n20-MIMO	5825	5850	-29.67	7.01	-22.66	Average	27	Pass
NVNT	n20-MIMO	5825	5855	-20.34	7.01	-13.33	Peak	15.6	Pass
NVNT	n20-MIMO	5825	5855	-33.5	7.01	-26.49	Average	15.6	Pass
NVNT	n20-MIMO	5825	5875	-31.06	7.01	-24.05	Peak	10	Pass
NVNT	n20-MIMO	5825	5875	-45.89	7.01	-38.88	Average	10	Pass
NVNT	n20-MIMO	5825	5925	-40.32	7.01	-33.31	Peak	-27	Pass
NVNT	n20-MIMO	5825	5925	-50.6	7.01	-43.59	Average	-27	Pass
NVNT	n40-MIMO	5755	5650	-41.61	7.01	-34.6	Peak	-27	Pass
NVNT	n40-MIMO	5755	5650	-50.79	7.01	-43.78	Average	-27	Pass
NVNT	n40-MIMO	5755	5700	-40.26	7.01	-33.25	Peak	10	Pass
NVNT	n40-MIMO	5755	5700	-49.97	7.01	-42.96	Average	10	Pass
NVNT	n40-MIMO	5755	5720	-30.5	7.01	-23.49	Peak	15.6	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



NVNT	n40-MIMO	5755	5720	-44.95	7.01	-37.94	Average	15.6	Pass
NVNT	n40-MIMO	5755	5725	-34.09	7.01	-27.08	Peak	27	Pass
NVNT	n40-MIMO	5755	5725	-43.01	7.01	-36	Average	27	Pass
NVNT	n40-MIMO	5795	5850	-40.67	7.01	-33.66	Peak	27	Pass
NVNT	n40-MIMO	5795	5850	-50.2	7.01	-43.19	Average	27	Pass
NVNT	n40-MIMO	5795	5855	-41.32	7.01	-34.31	Peak	15.6	Pass
NVNT	n40-MIMO	5795	5855	-50.29	7.01	-43.28	Average	15.6	Pass
NVNT	n40-MIMO	5795	5875	-40.9	7.01	-33.89	Peak	10	Pass
NVNT	n40-MIMO	5795	5875	-50.48	7.01	-43.47	Average	10	Pass
NVNT	n40-MIMO	5795	5925	-40.85	7.01	-33.84	Peak	-27	Pass
NVNT	n40-MIMO	5795	5925	-50.61	7.01	-43.6	Average	-27	Pass
NVNT	ac20-MIMO	5745	5650	-40.19	7.01	-33.18	Peak	-27	Pass
NVNT	ac20-MIMO	5745	5650	-51.11	7.01	-44.1	Average	-27	Pass
NVNT	ac20-MIMO	5745	5700	-39.94	7.01	-32.93	Peak	10	Pass
NVNT	ac20-MIMO	5745	5700	-49.75	7.01	-42.74	Average	10	Pass
NVNT	ac20-MIMO	5745	5720	-21.35	7.01	-14.34	Peak	15.6	Pass
NVNT	ac20-MIMO	5745	5720	-37.06	7.01	-30.05	Average	15.6	Pass
NVNT	ac20-MIMO	5745	5725	-20.42	7.01	-13.41	Peak	27	Pass
NVNT	ac20-MIMO	5745	5725	-33.39	7.01	-26.38	Average	27	Pass
NVNT	ac20-MIMO	5825	5850	-18.4	7.01	-11.39	Peak	27	Pass
NVNT	ac20-MIMO	5825	5850	-29.35	7.01	-22.34	Average	27	Pass
NVNT	ac20-MIMO	5825	5855	-19.69	7.01	-12.68	Peak	15.6	Pass
NVNT	ac20-MIMO	5825	5855	-32.99	7.01	-25.98	Average	15.6	Pass
NVNT	ac20-MIMO	5825	5875	-33.22	7.01	-26.21	Peak	10	Pass
NVNT	ac20-MIMO	5825	5875	-45.5	7.01	-38.49	Average	10	Pass
NVNT	ac20-MIMO	5825	5925	-41.45	7.01	-34.44	Peak	-27	Pass
NVNT	ac20-MIMO	5825	5925	-50.65	7.01	-43.64	Average	-27	Pass
NVNT	ac40-MIMO	5755	5650	-41.19	7.01	-34.18	Peak	-27	Pass
NVNT	ac40-MIMO	5755	5650	-50.73	7.01	-43.72	Average	-27	Pass
NVNT	ac40-MIMO	5755	5700	-39.79	7.01	-32.78	Peak	10	Pass
NVNT	ac40-MIMO	5755	5700	-50.18	7.01	-43.17	Average	10	Pass
NVNT	ac40-MIMO	5755	5720	-33.52	7.01	-26.51	Peak	15.6	Pass
NVNT	ac40-MIMO	5755	5720	-44.87	7.01	-37.86	Average	15.6	Pass
NVNT	ac40-MIMO	5755	5725	-34.82	7.01	-27.81	Peak	27	Pass
NVNT	ac40-MIMO	5755	5725	-43.17	7.01	-36.16	Average	27	Pass
NVNT	ac40-MIMO	5795	5850	-42.26	7.01	-35.25	Peak	27	Pass
NVNT	ac40-MIMO	5795	5850	-50.02	7.01	-43.01	Average	27	Pass
NVNT	ac40-MIMO	5795	5855	-41.49	7.01	-34.48	Peak	15.6	Pass
NVNT	ac40-MIMO	5795	5855	-50.5	7.01	-43.49	Average	15.6	Pass
NVNT	ac40-MIMO	5795	5875	-40.23	7.01	-33.22	Peak	10	Pass
NVNT	ac40-MIMO	5795	5875	-50.29	7.01	-43.28	Average	10	Pass






NVNT	ac40-MIMO	5795	5925	-41.35	7.01	-34.34	Peak	-27	Pass
NVNT	ac40-MIMO	5795	5925	-50.43	7.01	-43.42	Average	-27	Pass
NVNT	ac80-MIMO	5775	5650	-42.37	7.01	-35.36	Peak	-27	Pass
NVNT	ac80-MIMO	5775	5650	-50.37	7.01	-43.36	Average	-27	Pass
NVNT	ac80-MIMO	5775	5700	-40.74	7.01	-33.73	Peak	10	Pass
NVNT	ac80-MIMO	5775	5700	-49.19	7.01	-42.18	Average	10	Pass
NVNT	ac80-MIMO	5775	5720	-39.59	7.01	-32.58	Peak	15.6	Pass
NVNT	ac80-MIMO	5775	5720	-46.26	7.01	-39.25	Average	15.6	Pass
NVNT	ac80-MIMO	5775	5725	-36.93	7.01	-29.92	Peak	27	Pass
NVNT	ac80-MIMO	5775	5725	-45.52	7.01	-38.51	Average	27	Pass
NVNT	ac80-MIMO	5775	5850	-42.7	7.01	-35.69	Peak	27	Pass
NVNT	ac80-MIMO	5775	5850	-51.31	7.01	-44.3	Average	27	Pass
NVNT	ac80-MIMO	5775	5855	-42.81	7.01	-35.8	Peak	15.6	Pass
NVNT	ac80-MIMO	5775	5855	-51.56	7.01	-44.55	Average	15.6	Pass
NVNT	ac80-MIMO	5775	5875	-42.24	7.01	-35.23	Peak	10	Pass
NVNT	ac80-MIMO	5775	5875	-50.97	7.01	-43.96	Average	10	Pass
NVNT	ac80-MIMO	5775	5925	-41	7.01	-33.99	Peak	-27	Pass
NVNT	ac80-MIMO	5775	5925	-50.81	7.01	-43.8	Average	-27	Pass







Test Graphs

Restrict Band NVNT a 5745MHz Peak

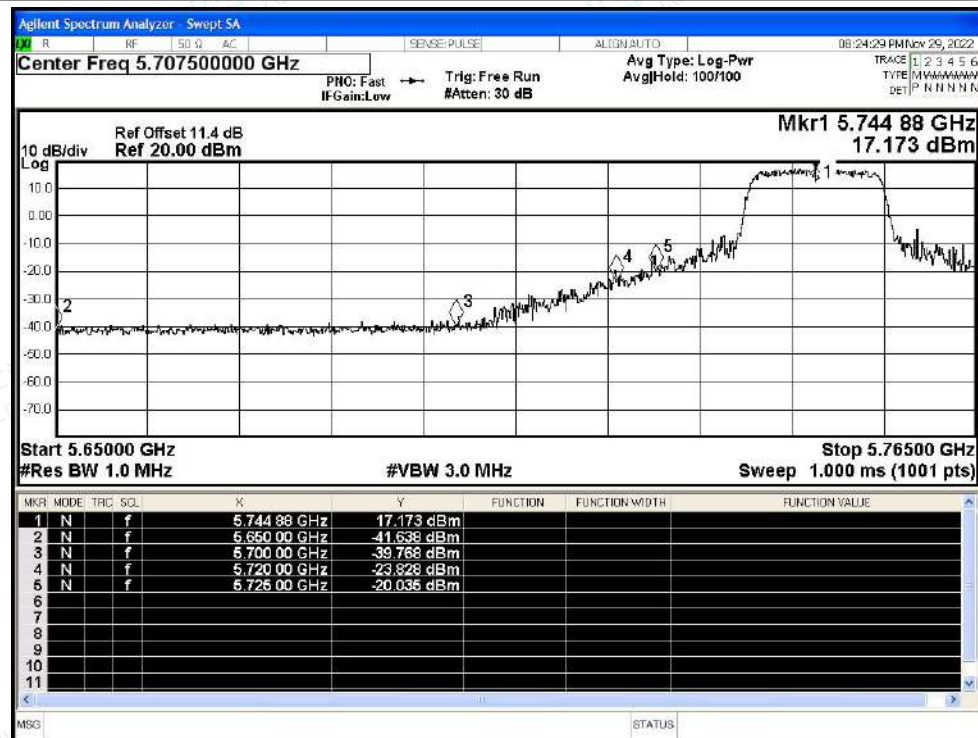


Restrict Band NVNT a 5745MHz Average

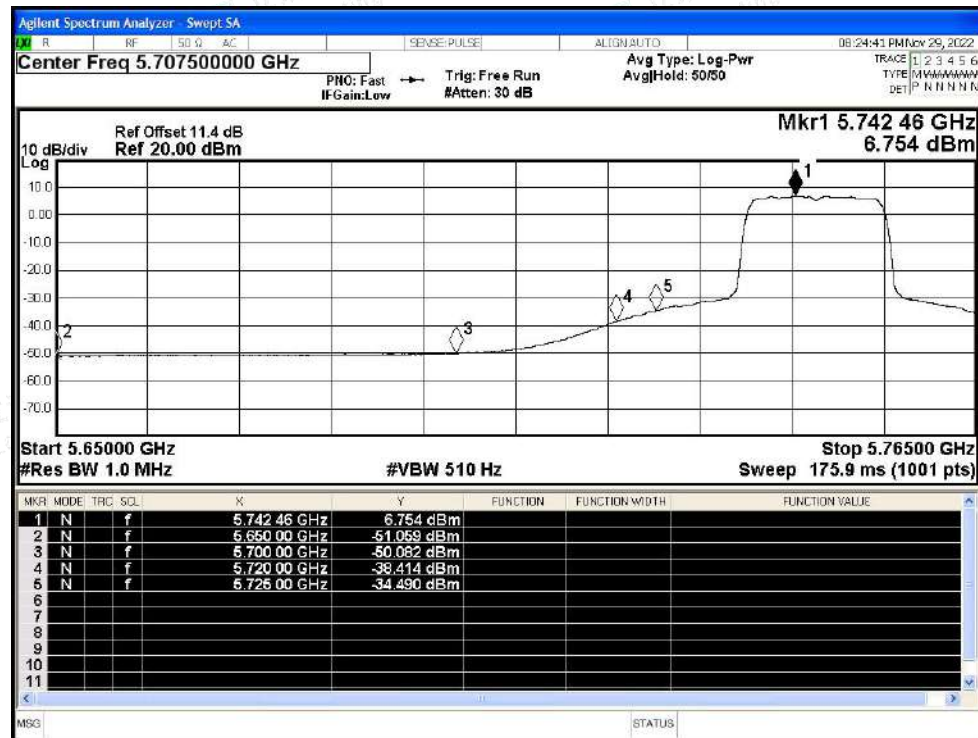

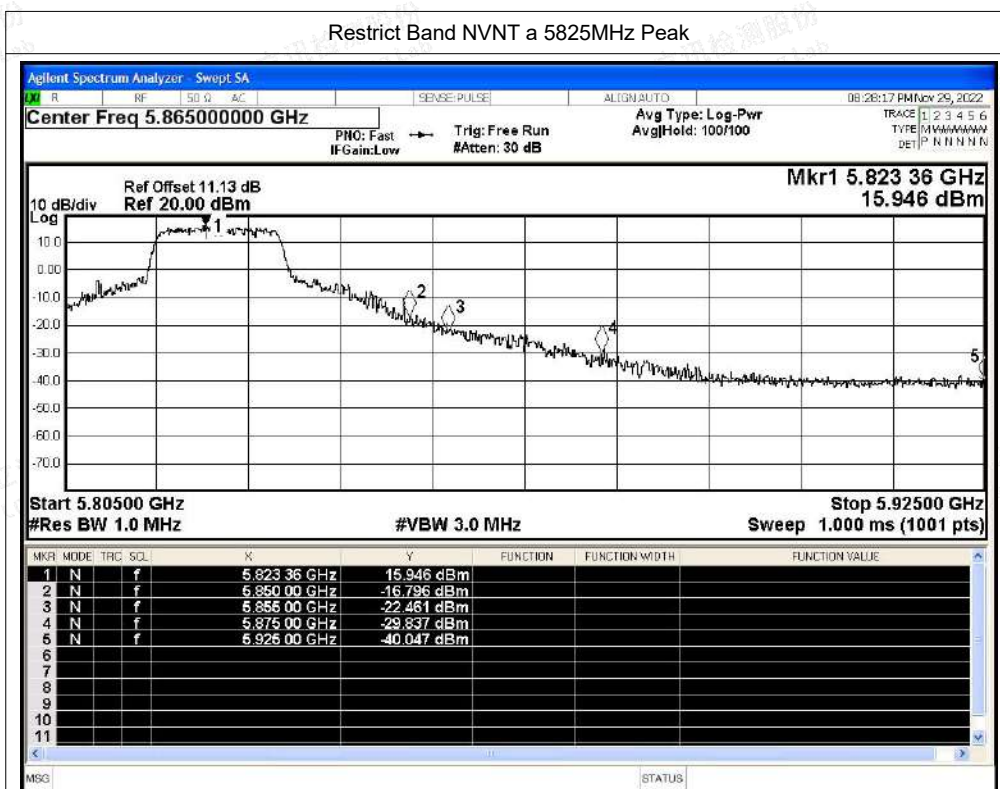

Restrict Band NVNT a 5825MHz Average

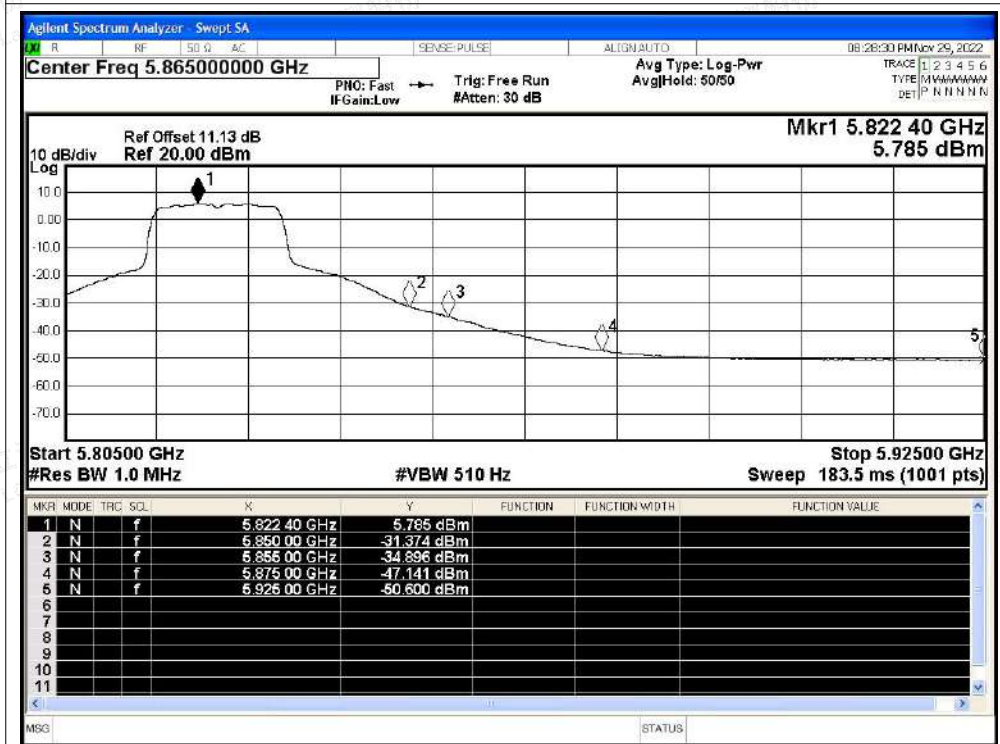

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT n20 5745MHz Peak

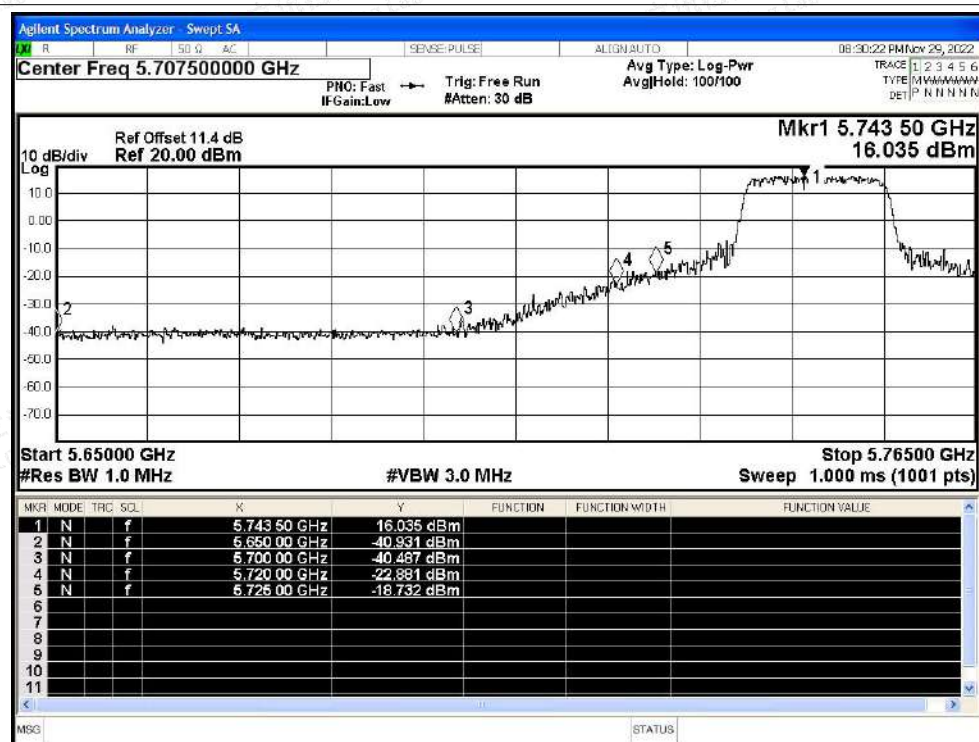


Restrict Band NVNT n20 5745MHz Average

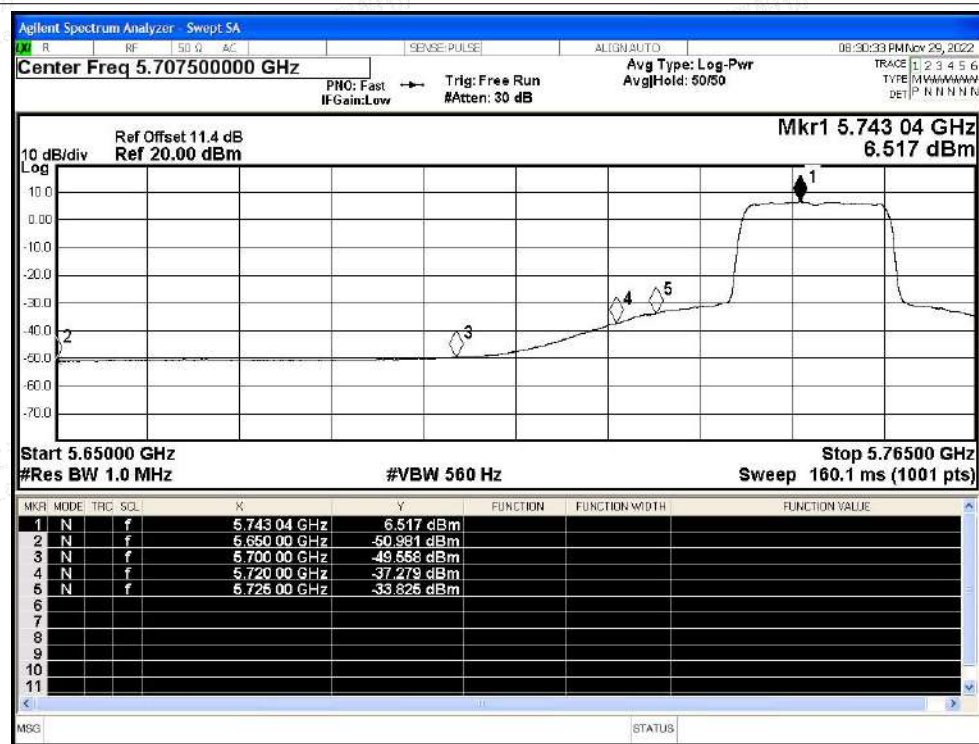




Restrict Band NVNT n20 5825MHz Peak

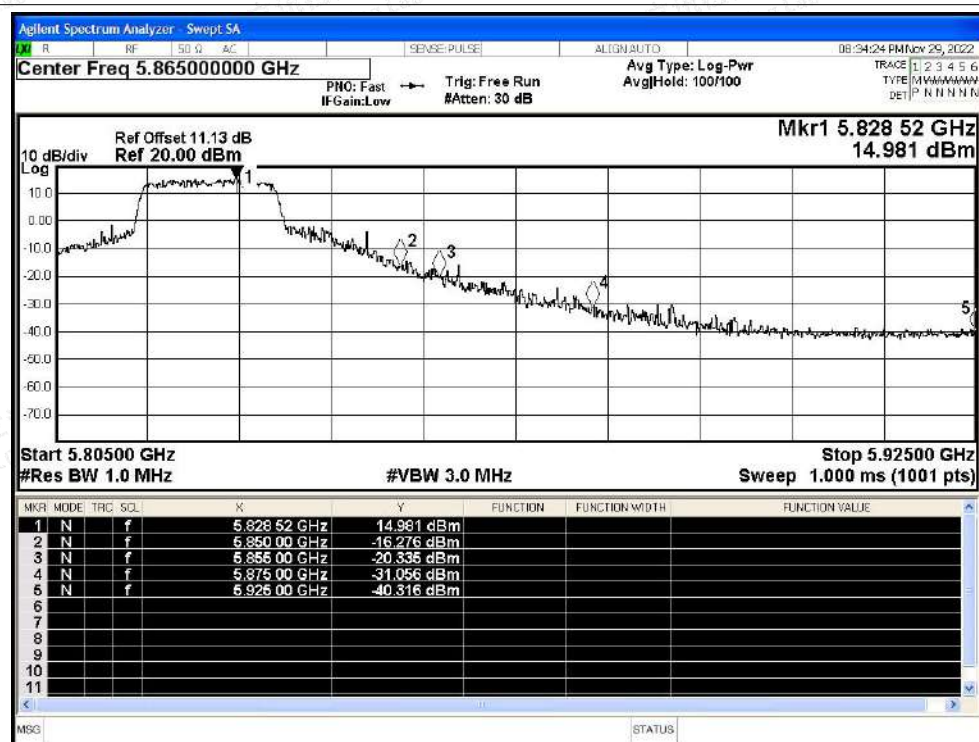


Restrict Band NVNT n20 5825MHz Average

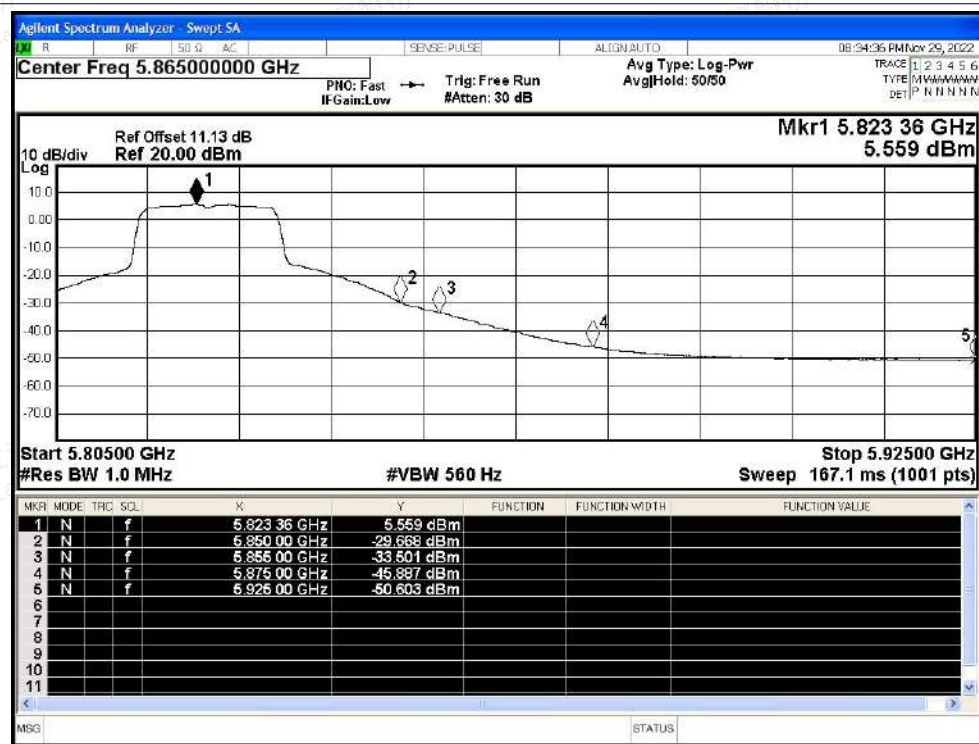





Restrict Band NVNT n40 5755MHz Peak

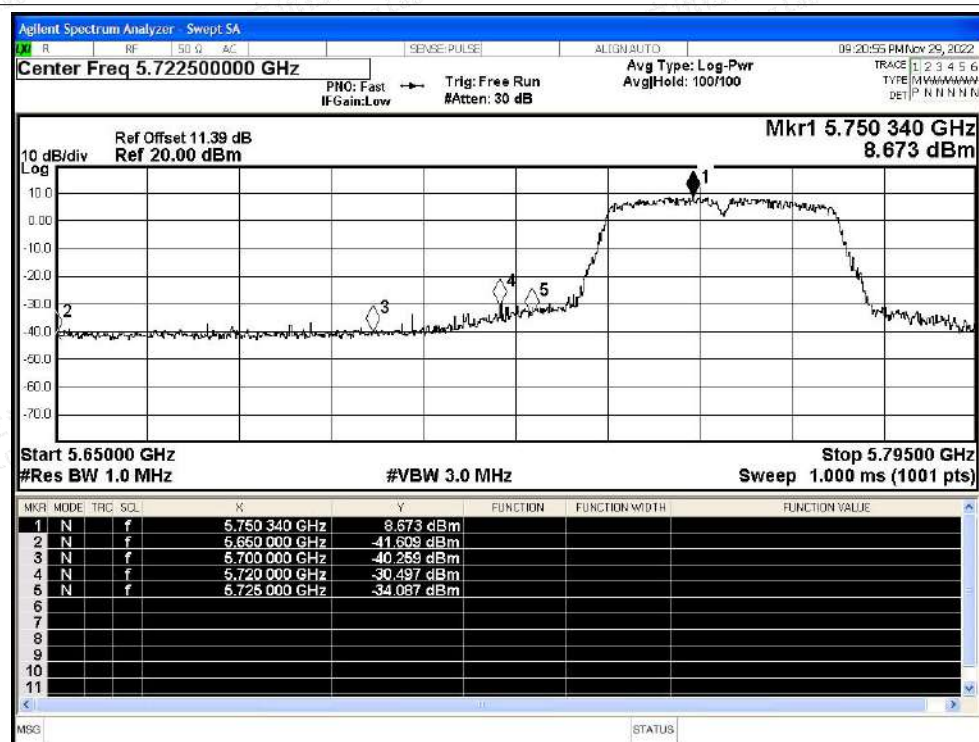


Restrict Band NVNT n40 5755MHz Average

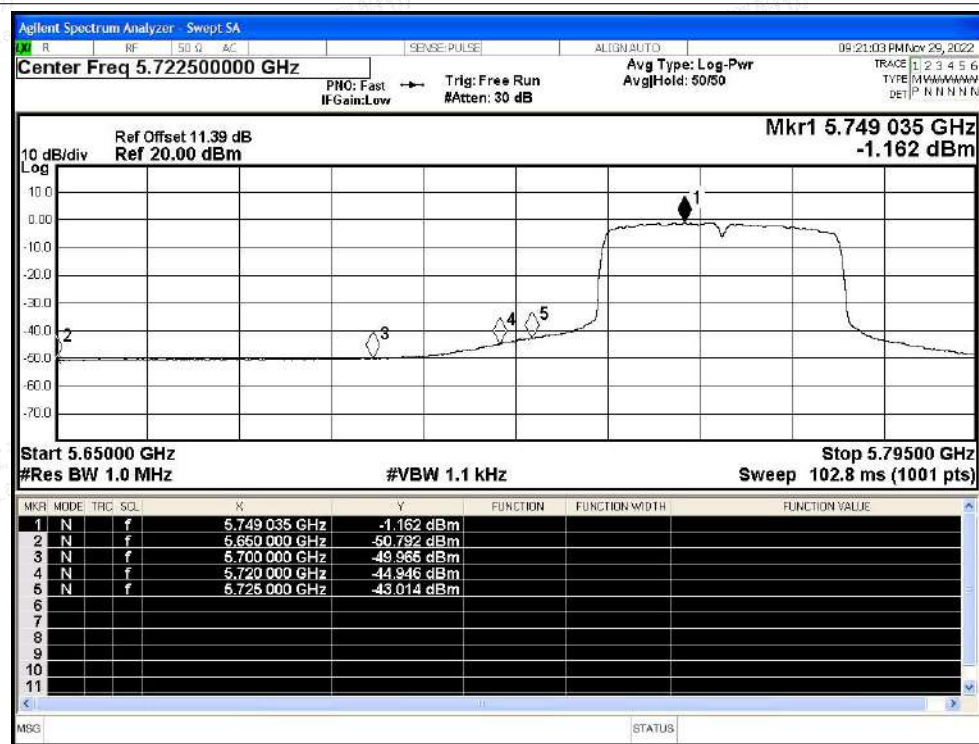

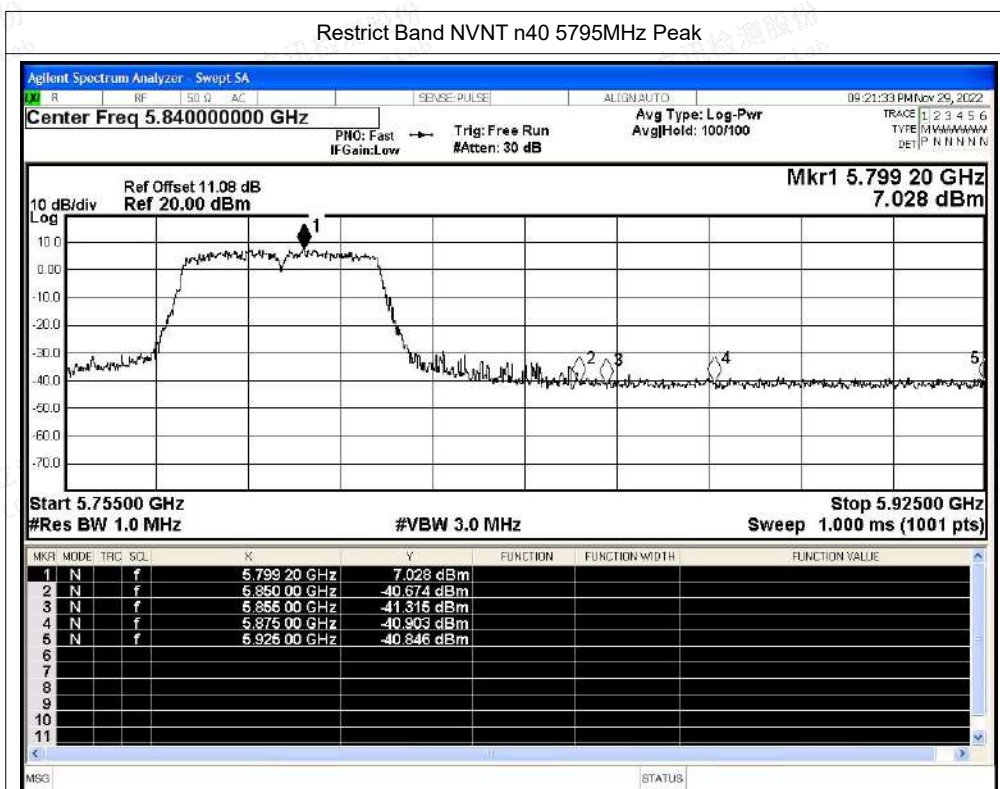

Restrict Band NVNT n40 5795MHz Average

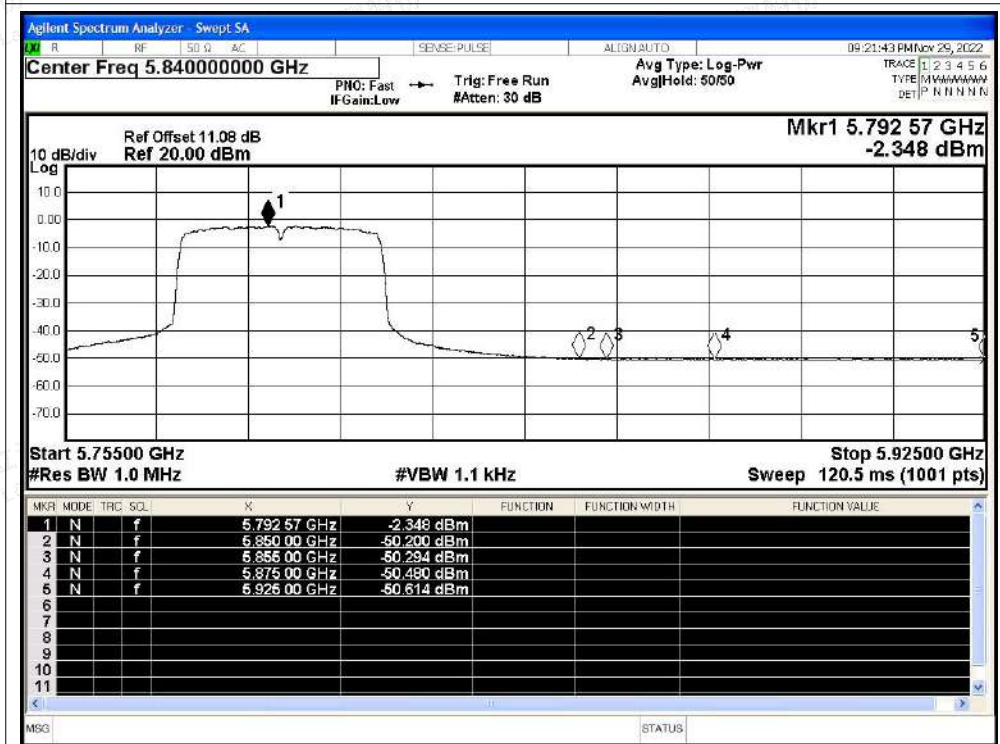

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT ac20 5745MHz Peak

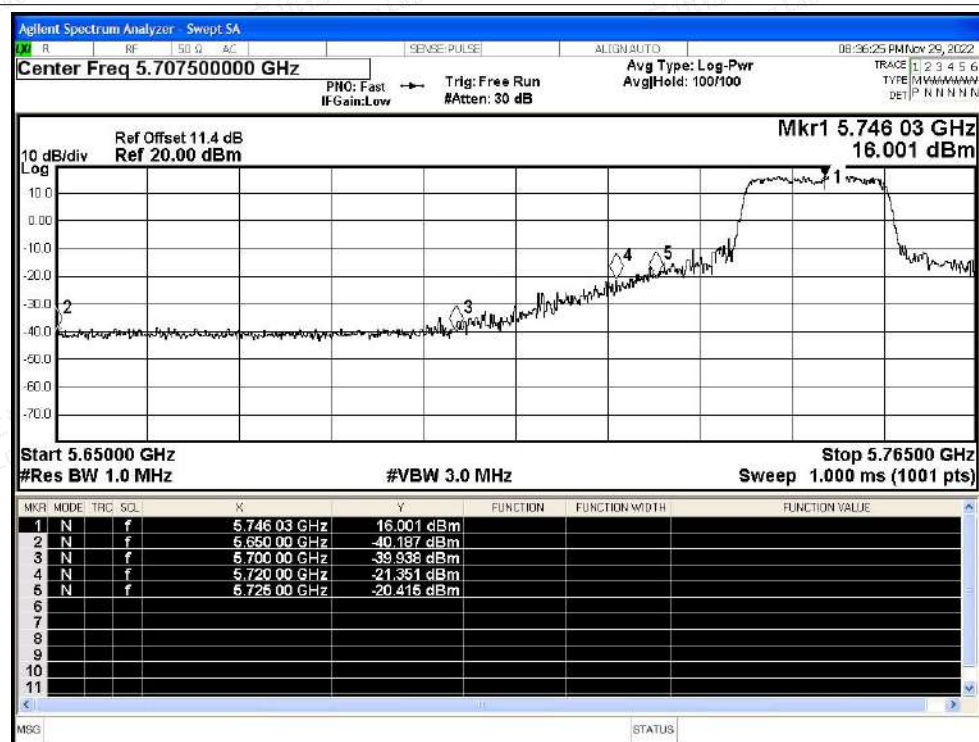


Restrict Band NVNT ac20 5745MHz Average

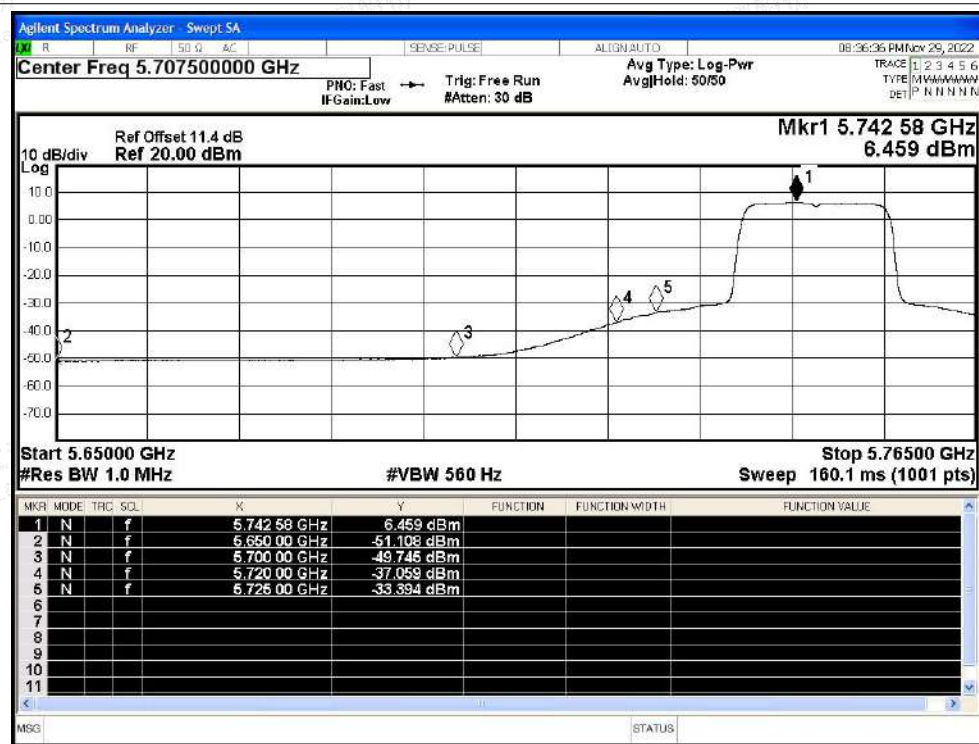



Restrict Band NVNT ac20 5825MHz Peak

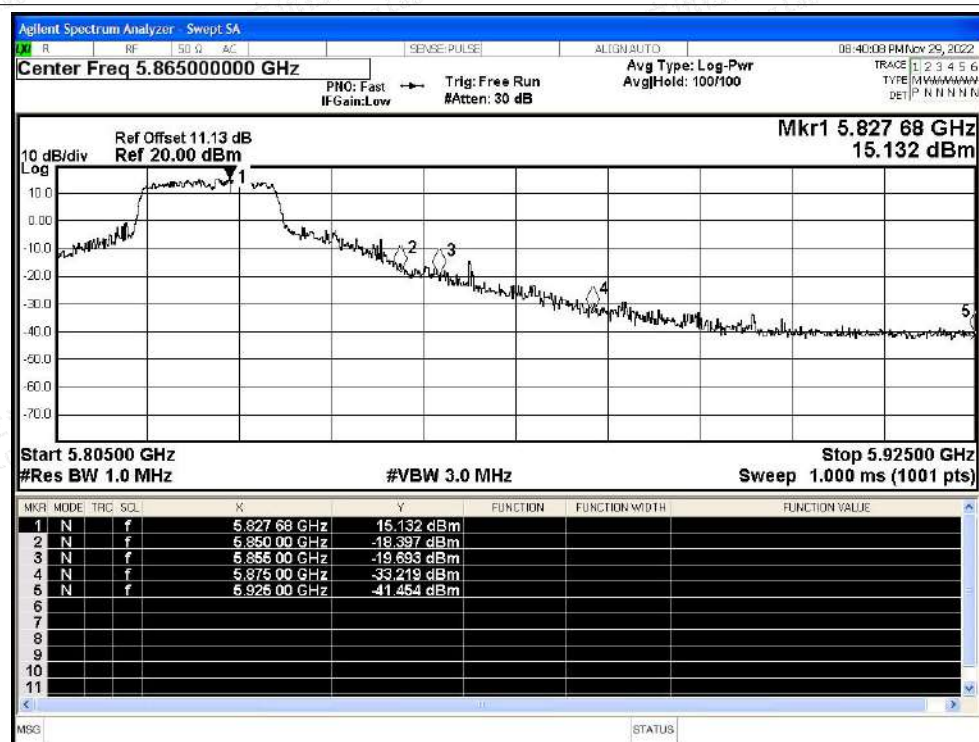

Restrict Band NVNT ac20 5825MHz Average

