

## TEST REPORT

<b>Product</b>	:	Wearable watch
<b>Trade mark</b>	:	SenScan
<b>Model/Type reference</b>	:	SF-1xx, SF-110, SF-120, SF-130, SF-131
<b>Serial Number</b>	:	N/A
<b>Report Number</b>	:	EED32L00349802
<b>FCC ID</b>	:	2AVLV-SPS-20190001
<b>Date of Issue</b>	:	Aug.19,2020
<b>Test Standards</b>	:	47 CFR Part 15 Subpart C
<b>Test result</b>	:	PASS

Prepared for:

**SPS, Inc.**

**70, Techno 8-ro, Yuseong-gu, Daejeon, Korea (34028)**

Prepared by:

**Centre Testing International Group Co., Ltd.  
Hongwei Industrial Zone, Bao'an 70 District,  
Shenzhen, Guangdong, China**

**TEL: +86-755-3368 3668**

**FAX: +86-755-3368 3385**

Compiled by:

Smile Zhong

Reviewed by:

Jok Yang

Approved by:

Smile Zhong

Jok Yang

CTI

Sam Chuang

Date:

Aug.19, 2020


Sam Chuang

Check No.: 4038852739



## 2 Version

Version No.	Date	Description
00	Aug.19,2020	Original

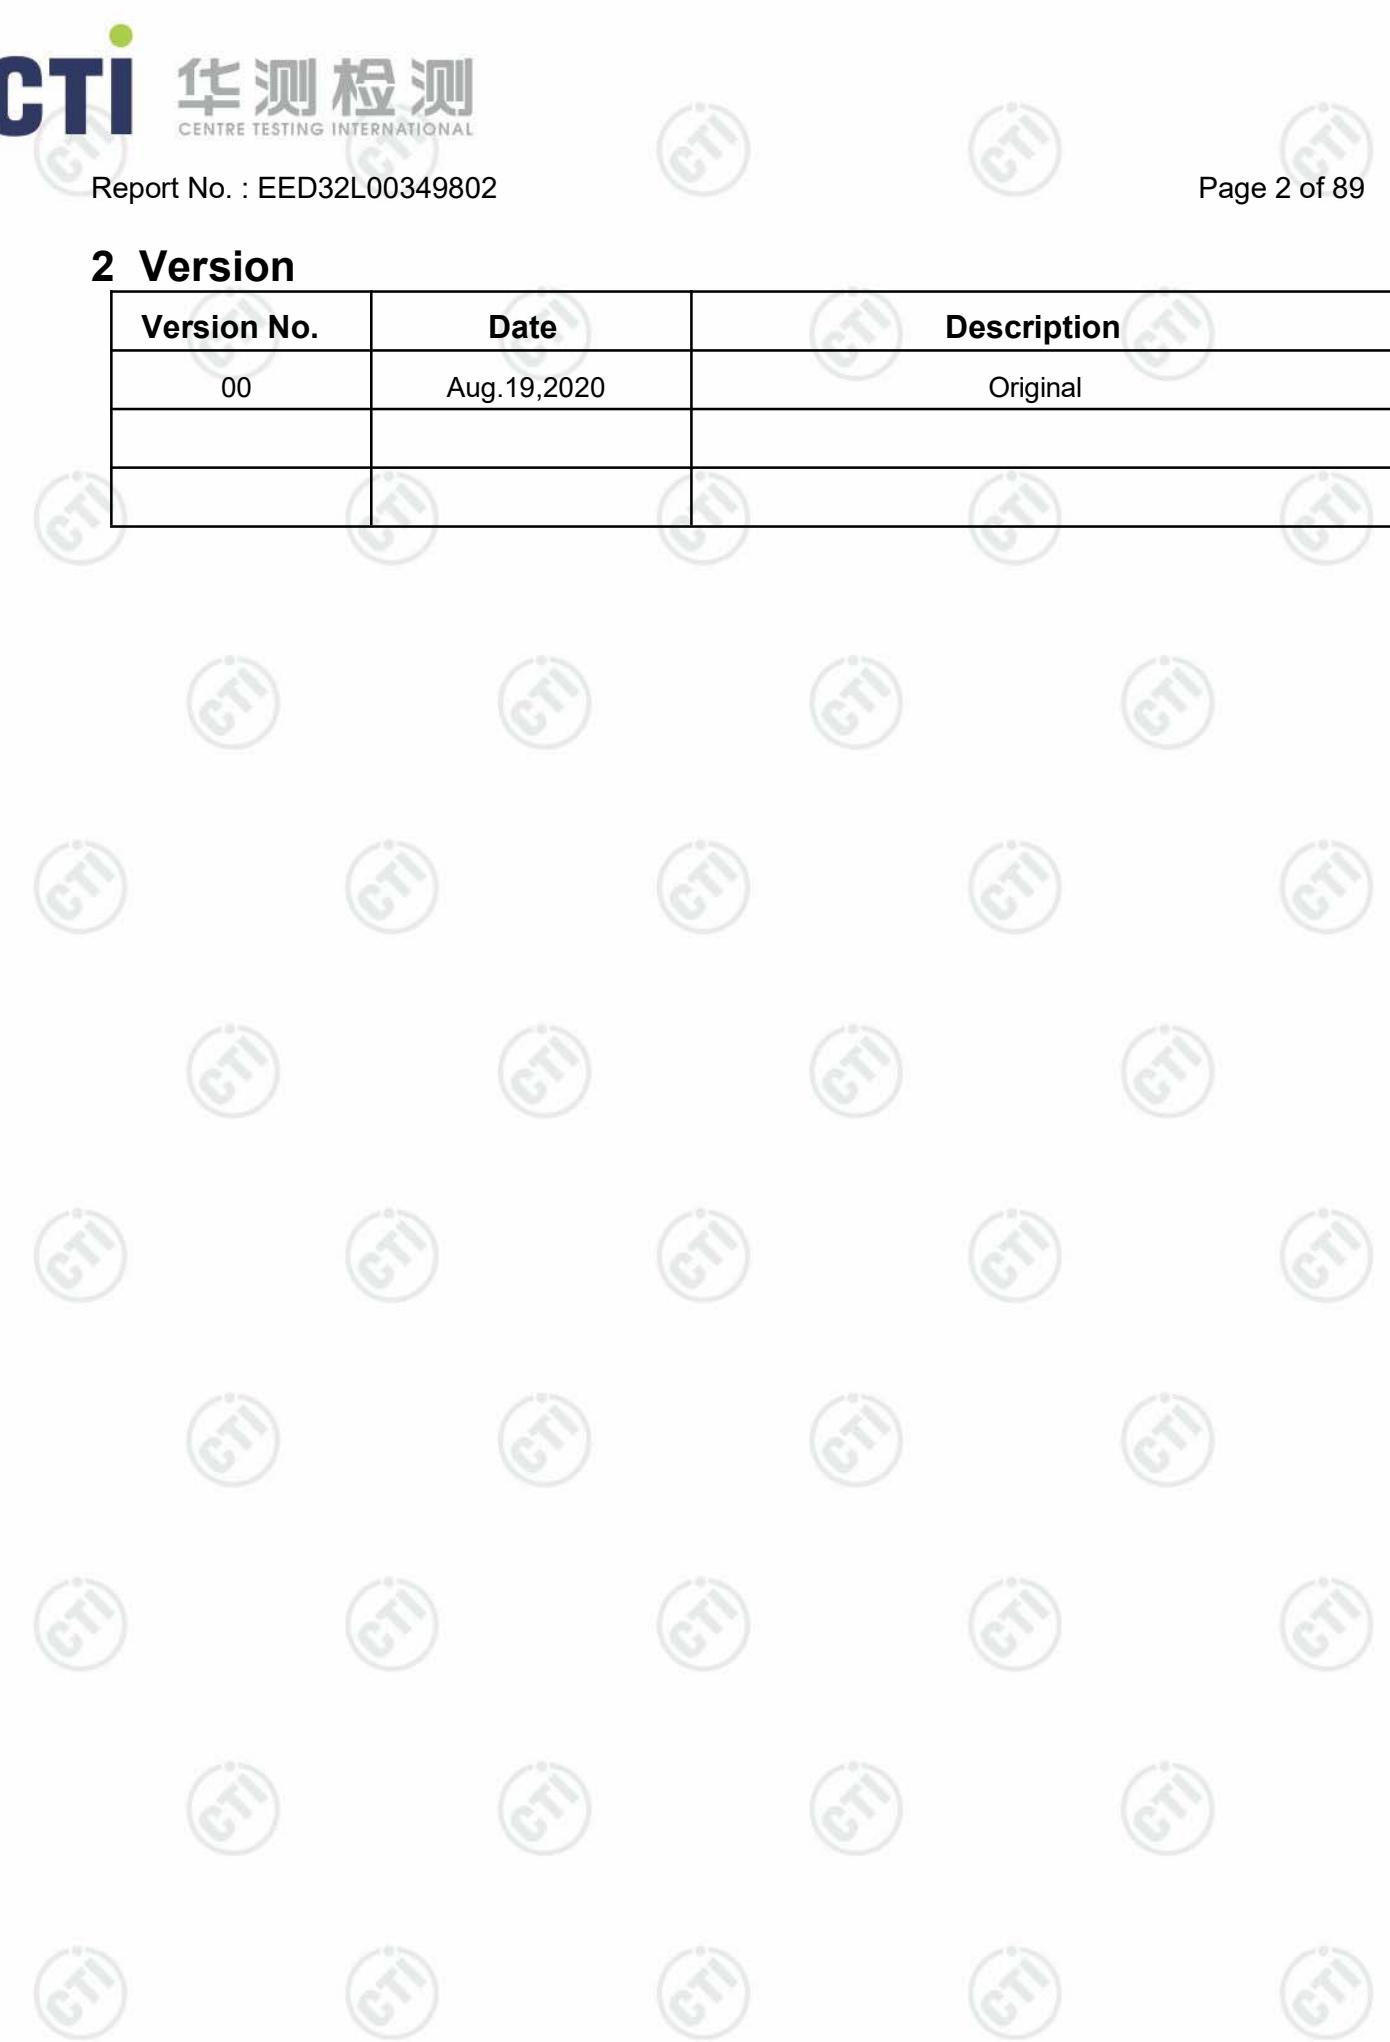

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
<b>20dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Carrier Frequencies Separation</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Hopping Channel Number</b>	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
<b>Dwell Time</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Pseudorandom Frequency Hopping Sequence</b>	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
<b>Band-edge for RF Conducted Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
<b>RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Duty cycle</b>	N/A	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.

Model No.:SF-1xx, SF-110, SF-120, SF-130, SF-131

Only the model SF-120 was tested, Their electrical circuit design, layout, components used and internal wiring are identical, only the model name and appearance color are different.


## 4 Content

<b>1 COVER PAGE</b> .....	1
<b>2 VERSION</b> .....	2
<b>3 TEST SUMMARY</b> .....	3
<b>4 CONTENT</b> .....	4
<b>5 TEST REQUIREMENT</b> .....	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
<b>6 GENERAL INFORMATION</b> .....	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	9
6.5 TEST LOCATION.....	9
6.6 DEVIATION FROM STANDARDS.....	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
<b>7 EQUIPMENT LIST</b> .....	10
<b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b> .....	13
Appendix A): 20dB Occupied Bandwidth.....	15
Appendix B): Carrier Frequency Separation.....	23
Appendix C): Dwell Time.....	28
Appendix D): Hopping Channel Number.....	33
Appendix E): Conducted Peak Output Power.....	36
Appendix F): Band-edge for RF Conducted Emissions.....	41
Appendix G): RF Conducted Spurious Emissions.....	47
Appendix H): Pseudorandom Frequency Hopping Sequence.....	58
Appendix I): Antenna Requirement.....	59
Appendix J): AC Power Line Conducted Emission.....	60
Appendix K): Restricted bands around fundamental frequency (Radiated).....	63
Appendix L): Radiated Spurious Emissions.....	80
<b>PHOTOGRAPHS OF TEST SETUP</b> .....	86
<b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b> .....	89

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

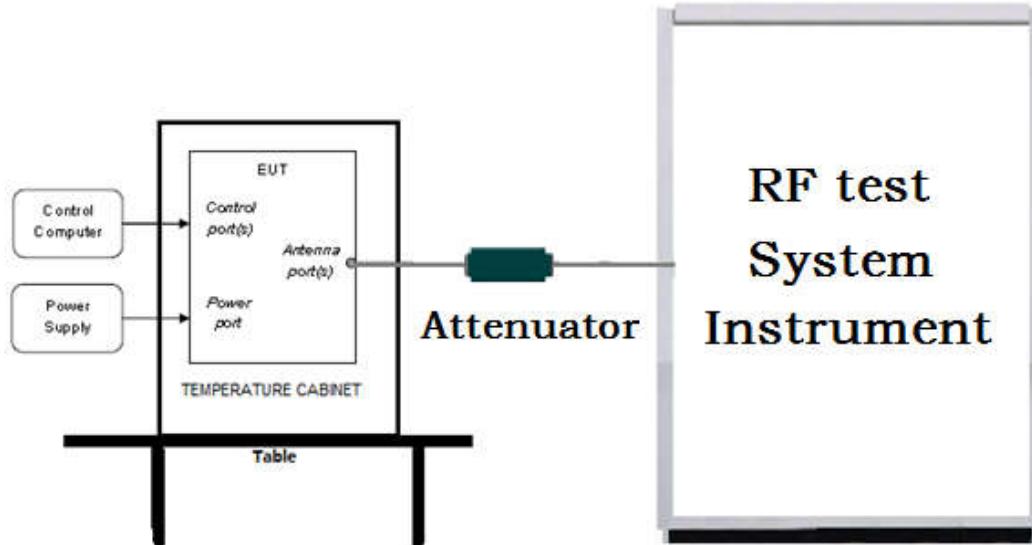

#### 5.1.2 For Radiated Emissions test setup

##### Radiated Emissions setup:

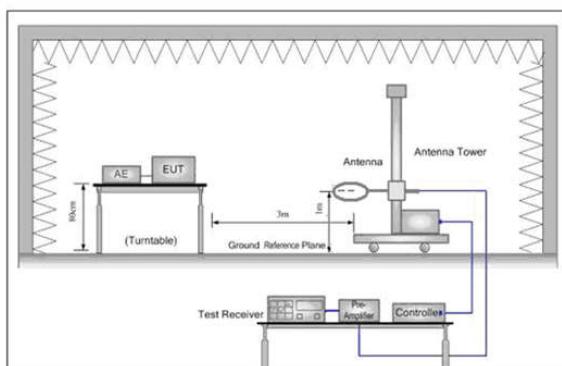


Figure 1. Below 30MHz

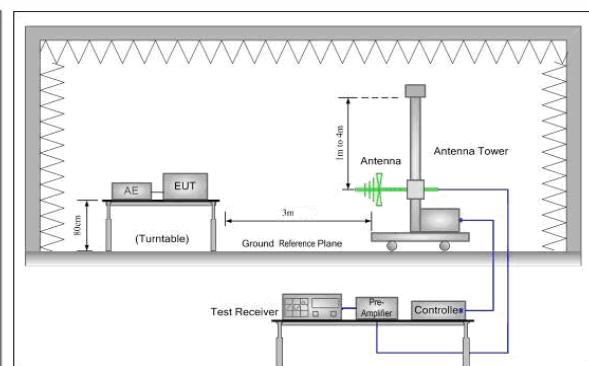


Figure 2. 30MHz to 1GHz


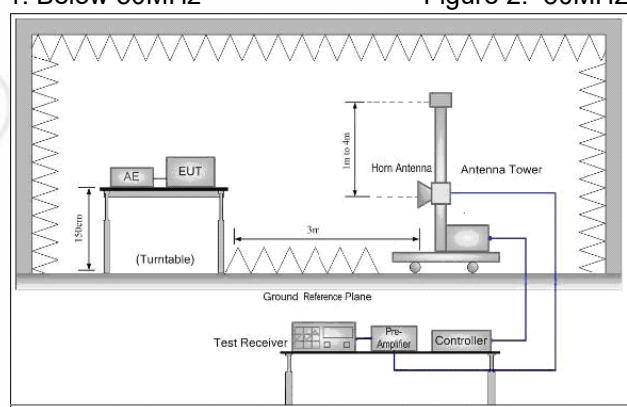


Figure 3. Above 1GHz

### 5.1.3 For Conducted Emissions test setup

#### Conducted Emissions setup

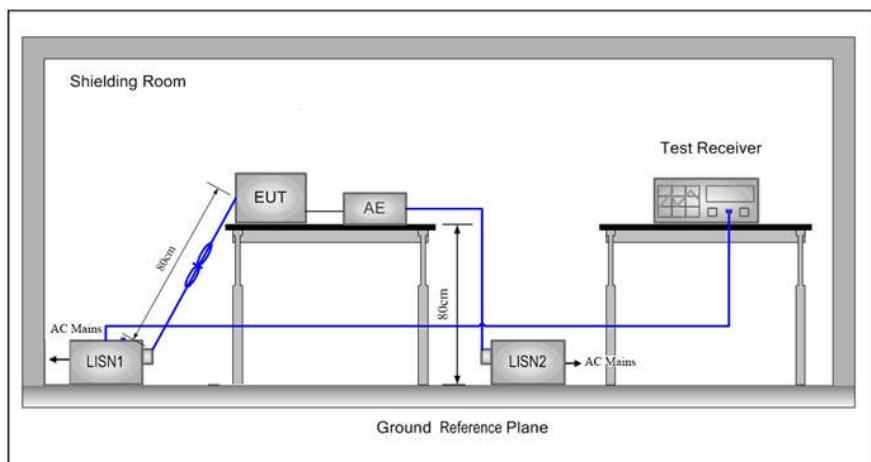

## 5.2 Test Environment

### Operating Environment:

Temperature:	23.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

## 5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/π/4DQPSK/ 8DPSK(DH1,DH3, DH5)	2402MHz ~2480 MHz	Channel 1 2402MHz	Channel 40 2441MHz	Channel79 2480MHz
TX mode: The EUT transmitted the continuous modulation test signal at the specific channel(s).				

## 6 General Information

### 6.1 Client Information

Applicant:	SPS, Inc.
Address of Applicant:	70, Techno 8-ro, Yuseong-gu, Daejeon, Korea (34028)
Manufacturer:	Shenzhen Skinod Technology Co. Ltd
Address of Manufacturer:	Building 28, No.9, Chuangxin Road, Jiangyang District, Luzhou City, Sichuan Province, China
Factory:	Shenzhen Skinod Technology Co. Ltd
Address of Factory:	Building 28, No.9, Chuangxin Road, Jiangyang District, Luzhou City, Sichuan Province, China

### 6.2 General Description of EUT

Product Name:	Wearable watch	
Model No.(EUT):	SF-1xx, SF-110, SF-120, SF-130, SF-131	
Test Model No.:	SF-120	
Trade mark:	SenScan	
EUT Supports Radios application:	BT4.2 Dual mode 2402MHz to 2480MHz	
Power Supply:	Battery	DC 3.8V 1500mAh
Sample Received Date:	Nov. 22, 2019	
Sample tested Date:	Nov. 22, 2019 to Dec. 25, 2019	

### 6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	2.1+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Hardware Version:	N/A
Software Version:	N/A
Test Power Grade:	Default
Test Software of EUT:	Default
Antenna Type:	FPC antenna
Antenna Gain:	0.33dBi
Test Voltage:	DC 3.8V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

## 6.4 Description of Support Units

The EUT has been tested independently.

## 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

## 6.6 Deviation from Standards

None.

## 6.7 Abnormalities from Standard Conditions

None.

## 6.8 Other Information Requested by the Customer

None.

## 6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

## 7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019	02-29-2020
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019	02-29-2020
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	07-26-2019	07-25-2020
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
DC Power	Keysight	E3642A	MY56376072	03-01-2019	02-29-2020
PC-1	Lenovo	R4960d	---	03-01-2019	02-29-2020
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019	02-29-2020
RF control unit	JS Tonscend	JS0806-2	158060006	03-01-2019	02-29-2020
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	03-01-2019	02-29-2020

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-20-2019	05-19-2020
Temperature/ Humidity Indicator	Defu	TH128	/	06-14-2019	06-13-2020
LISN	R&S	ENV216	100098	05-08-2019	05-07-2020
Barometer	changchun	DYM3	1188	06-20-2019	06-19-2020

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-26-2019	07-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-21-2019	10-20-2020
Multi device Controller	maturo	NCD/070/107 11112	---	01-09-2019	01-08-2020
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	07-26-2019	07-25-2020
Cable line	Fulai(7M)	SF106	5219/6A	01-09-2019	01-08-2020
Cable line	Fulai(6M)	SF106	5220/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5216/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5217/6A	01-09-2019	01-08-2020

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-18-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019	03-26-2020
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	5-21-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-07-2020
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-16-2019	01-15-2020
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-30-2019	04-29-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-09-2019	01-08-2020
Cable line	Times	EMC104-NMNM-1000	SN160710	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-09-2019	01-08-2020
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-09-2019	01-08-2020

## 8 Radio Technical Requirements Specification

### Reference documents for testing:


No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)

## EUT DUTY CYCLE

Duty Cycle			
Configuration	TX ON(ms)	TX ALL(ms)	Duty Cycle(%)
BDR-1Mbps	2.873	3.75	76.6%
EDR-3Mbps	2.880	3.7502	76.80%

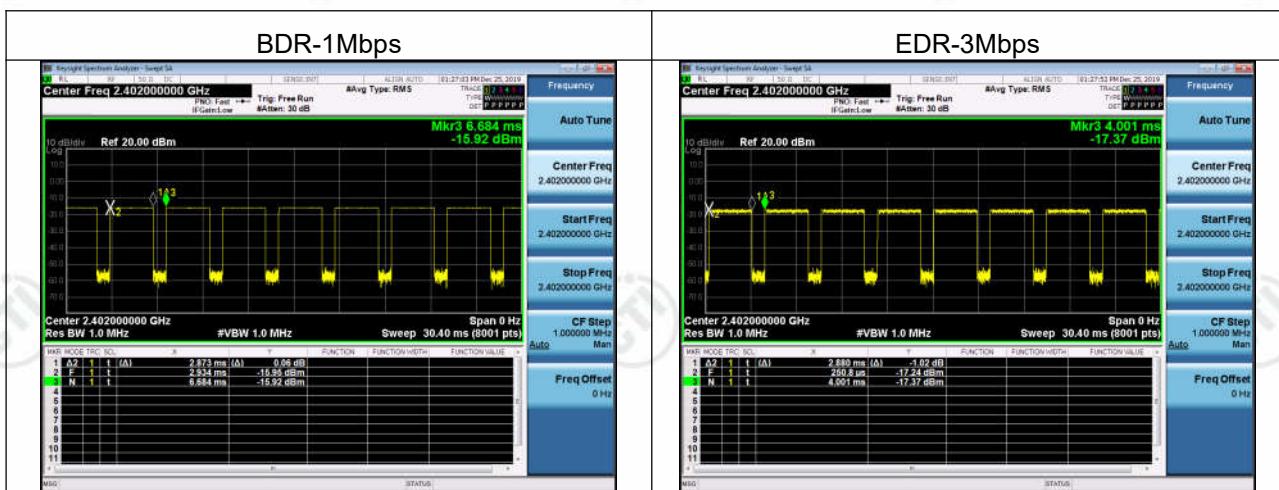

## Appendix A): 20dB Occupied Bandwidth

### Test Limit

According to §15.247(a) (1),

**20 dB Bandwidth** : For reporting purposes only.


**Occupied Bandwidth(99%)** : For reporting purposes only.

### Test Procedure

Test method Refer as Section 8.1 and ANSI C63.10: 2013 clause 7.8.7,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =100kHz, VBW = 300kHz and Detector = Peak, to measurement 20dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.
- 6.

### Test Setup

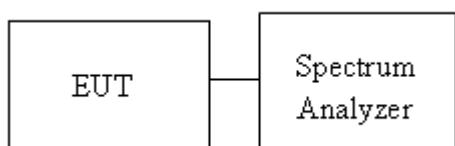

### Test Result

#### 99% Bandwidth


Mode	Channel.	99% OBW [MHz]	Verdict
GFSK	LCH	0.89207	PASS
GFSK	MCH	0.89464	PASS
GFSK	HCH	0.89606	PASS
$\pi/4$ DQPSK	LCH	1.1829	PASS
$\pi/4$ DQPSK	MCH	1.1910	PASS
$\pi/4$ DQPSK	HCH	1.1824	PASS
8DPSK	LCH	1.1960	PASS
8DPSK	MCH	1.2097	PASS
8DPSK	HCH	1.1985	PASS


#### 20 dB Bandwidth

Mode	Channel.	20dB Bandwidth [MHz]	Verdict
GFSK	LCH	1.118	PASS
GFSK	MCH	1.119	PASS
GFSK	HCH	1.125	PASS
$\pi/4$ DQPSK	LCH	1.363	PASS
$\pi/4$ DQPSK	MCH	1.367	PASS
$\pi/4$ DQPSK	HCH	1.357	PASS
8DPSK	LCH	1.367	PASS
8DPSK	MCH	1.372	PASS
8DPSK	HCH	1.372	PASS


## Test Graph



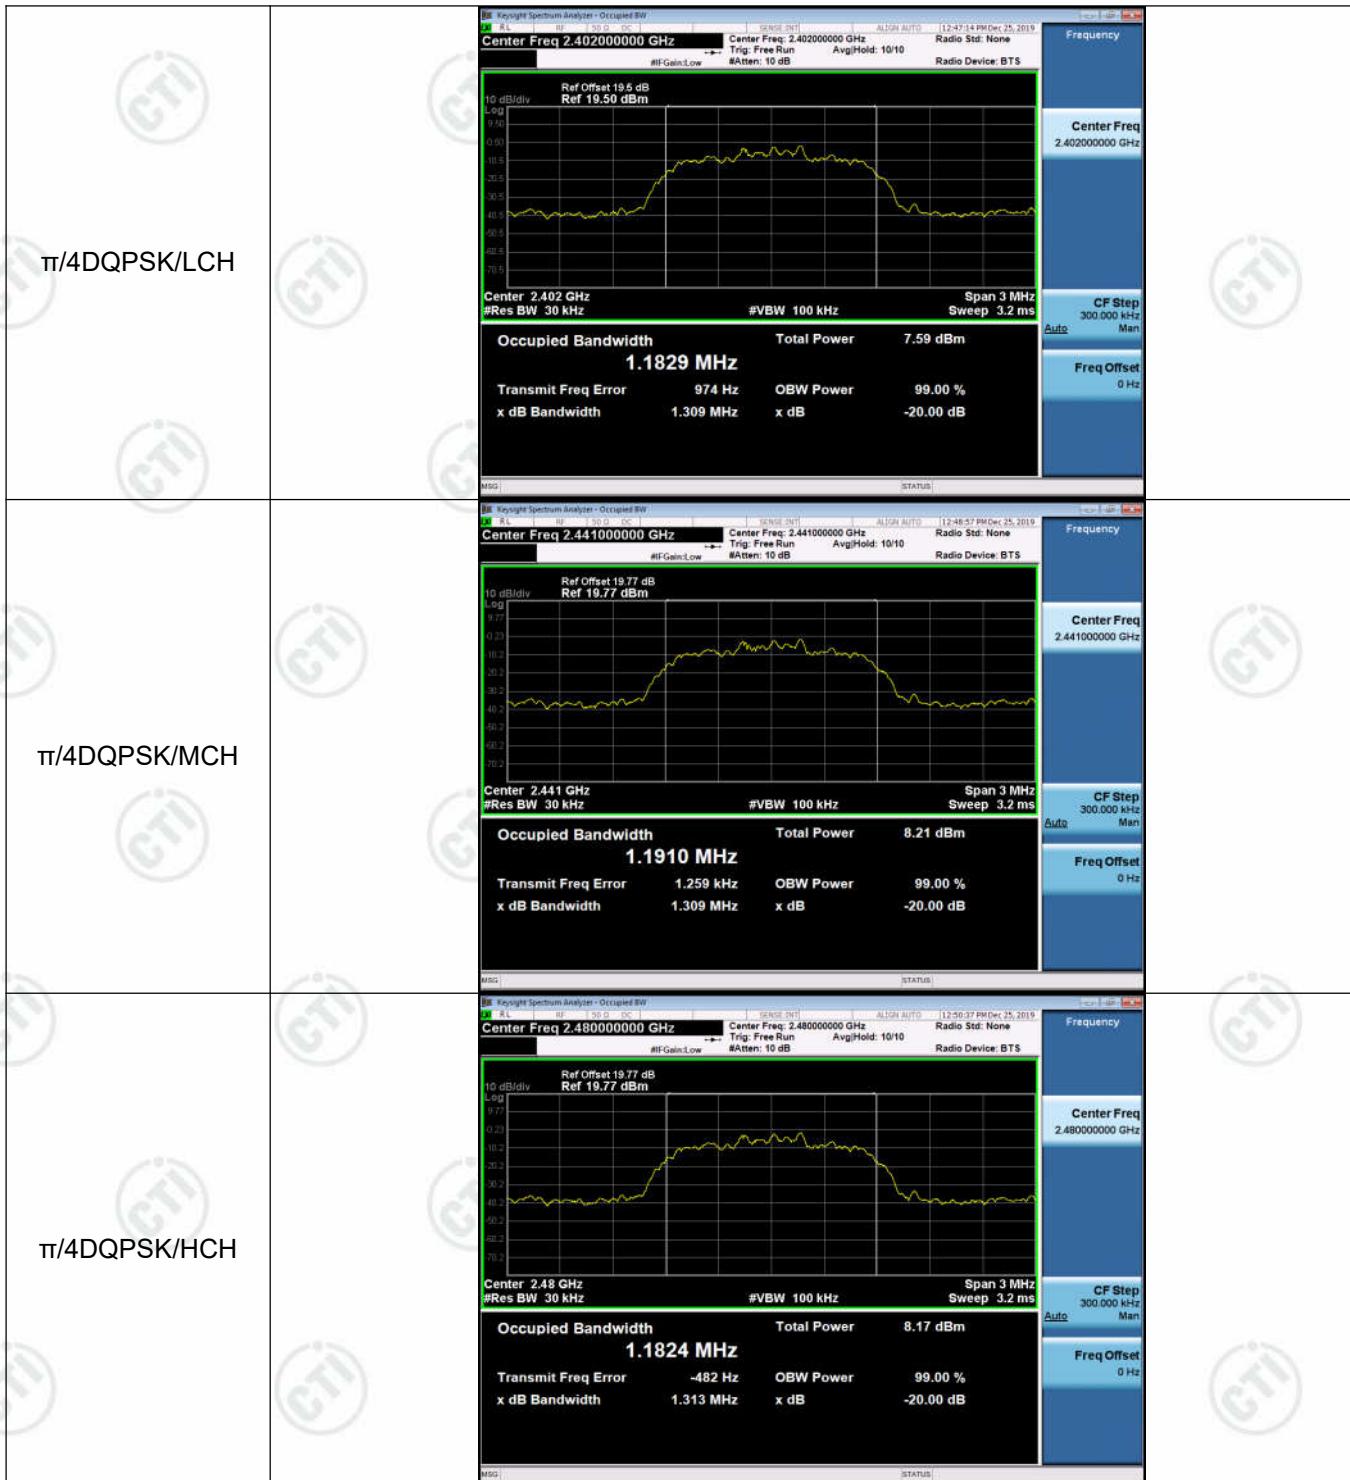

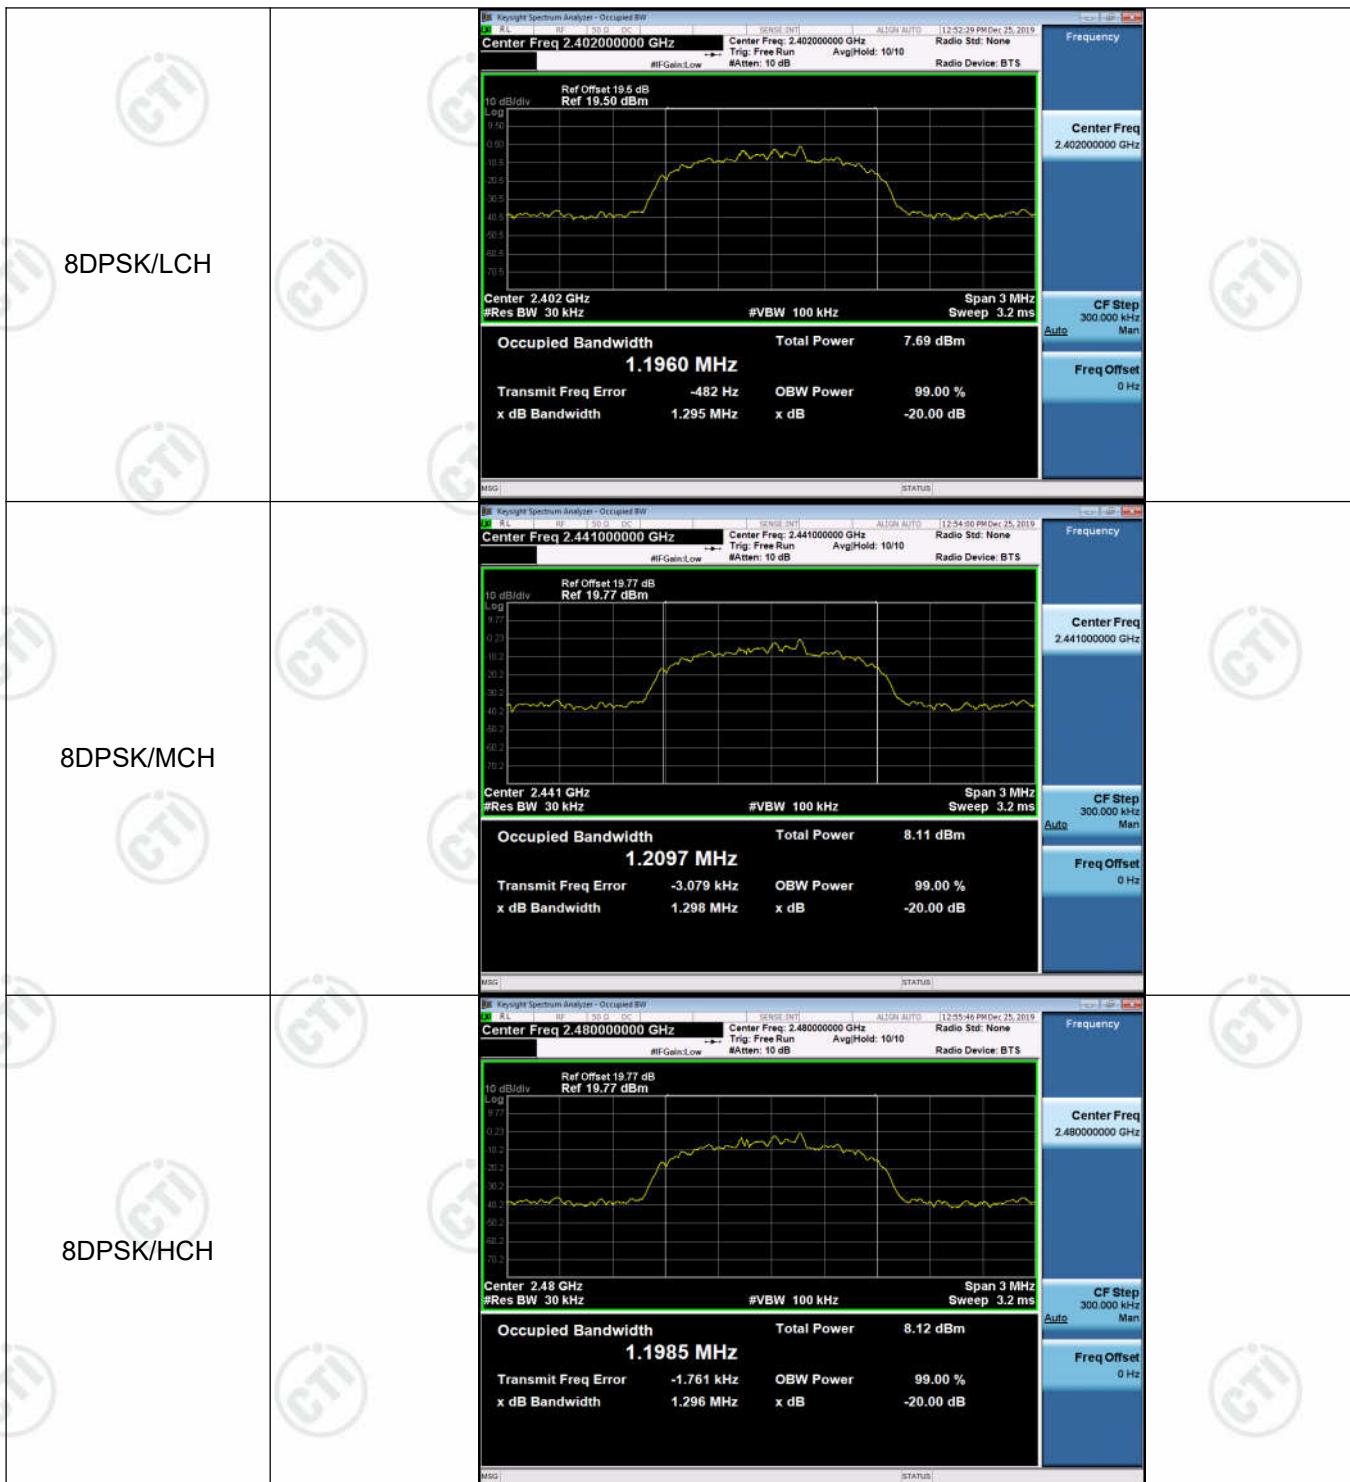

## 20dB Bandwidth

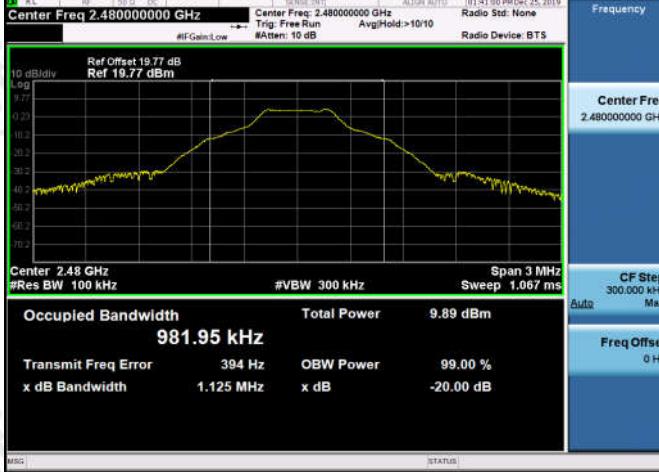Graphs	
GFSK/LCH	 <p>Occupied Bandwidth: <b>980.88 kHz</b></p>
GFSK/MCH	 <p>Occupied Bandwidth: <b>985.46 kHz</b></p>
GFSK/HCH	 <p>Occupied Bandwidth: <b>981.95 kHz</b></p>



8DPSK/LCH	 <p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 19.56 dB Ref 19.50 dBm</p> <p>Occupied Bandwidth 1.2184 MHz</p> <p>Total Power 9.39 dBm</p> <p>Transmit Freq Error 3.528 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.367 MHz</p> <p>x dB -20.00 dB</p>
8DPSK/MCH	 <p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Occupied Bandwidth 1.2252 MHz</p> <p>Total Power 9.83 dBm</p> <p>Transmit Freq Error 4.063 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.372 MHz</p> <p>x dB -20.00 dB</p>
8DPSK/HCH	 <p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Occupied Bandwidth 1.2180 MHz</p> <p>Total Power 9.68 dBm</p> <p>Transmit Freq Error 2.620 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.372 MHz</p> <p>x dB -20.00 dB</p>

## Appendix B): Carrier Frequency Separation

### Test Limit

According to §15.247(a)(1),


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

### Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Sweep = auto.  
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency

### Test Setup

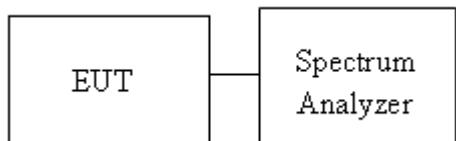



**Result Table**

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.040	PASS
GFSK	MCH	1.034	PASS
GFSK	HCH	0.986	PASS
$\pi/4$ DQPSK	LCH	1.036	PASS
$\pi/4$ DQPSK	MCH	1.144	PASS
$\pi/4$ DQPSK	HCH	1.046	PASS
8DPSK	LCH	1.008	PASS
8DPSK	MCH	1.102	PASS
8DPSK	HCH	1.062	PASS

### Test Graph



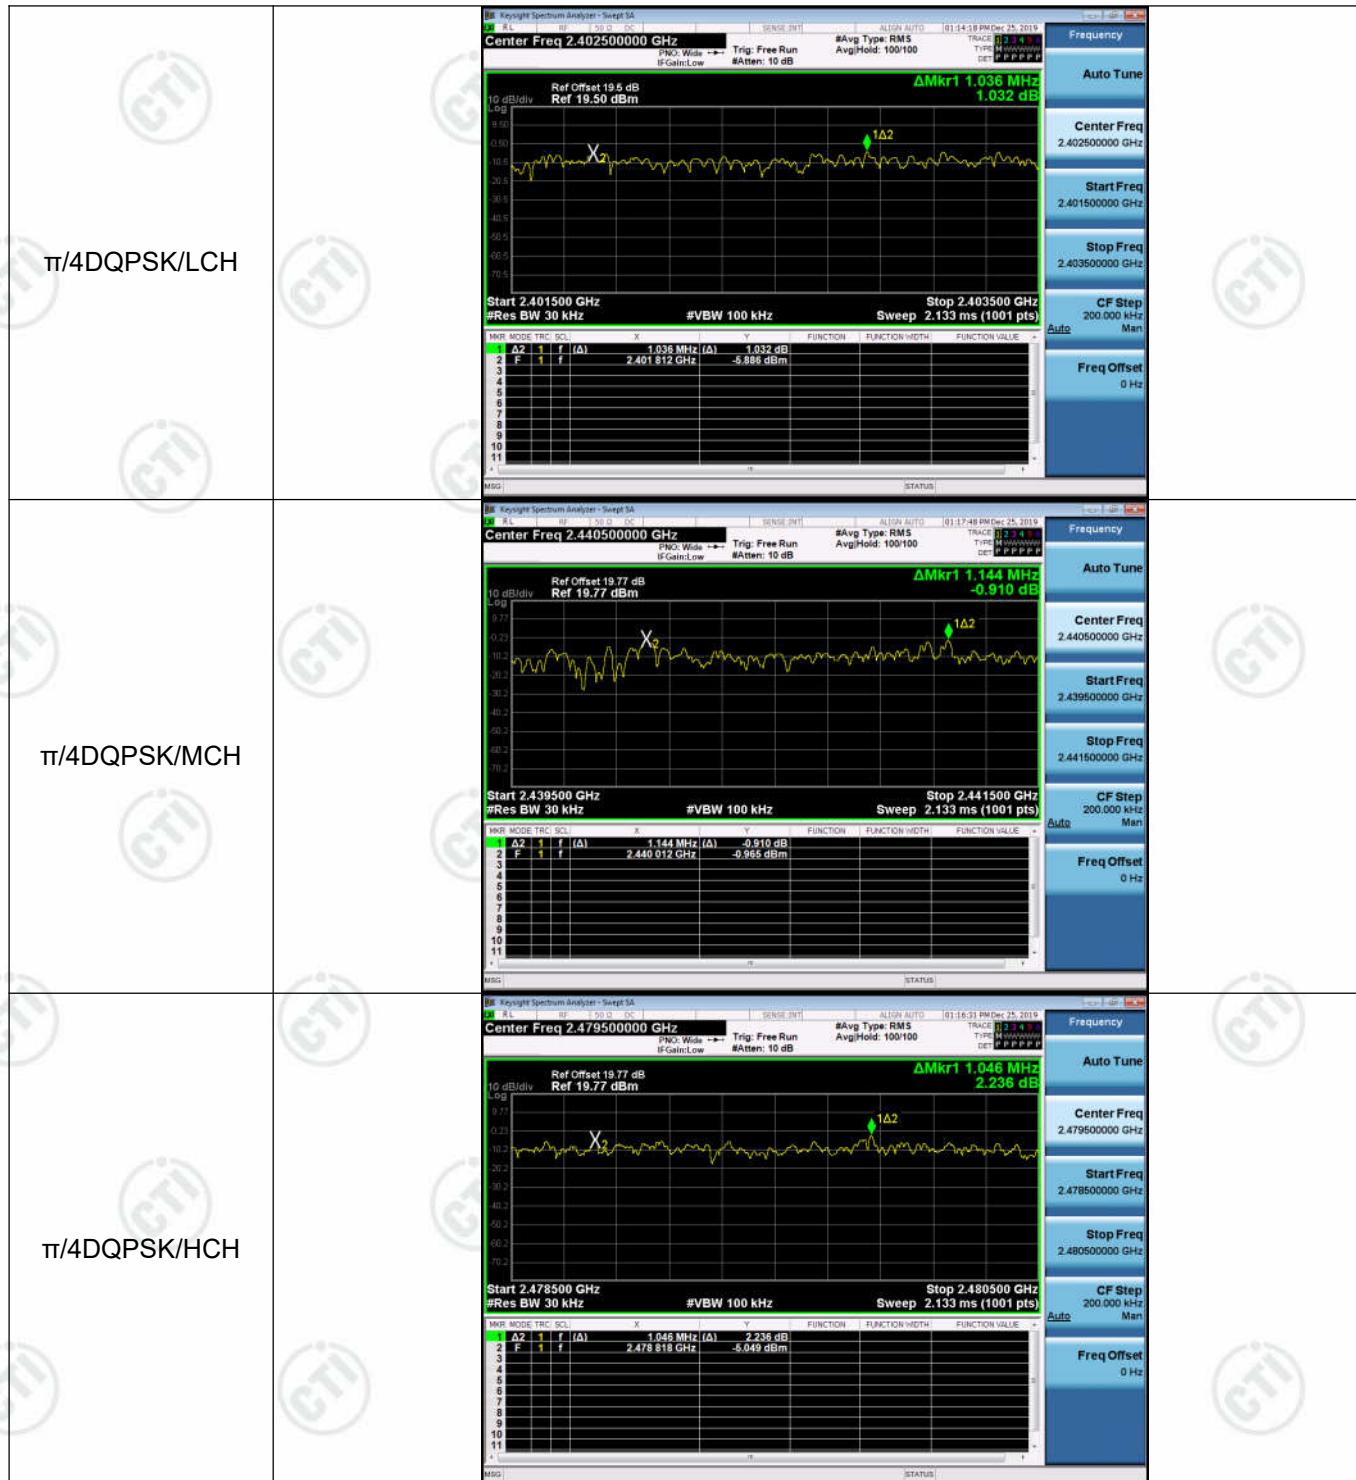

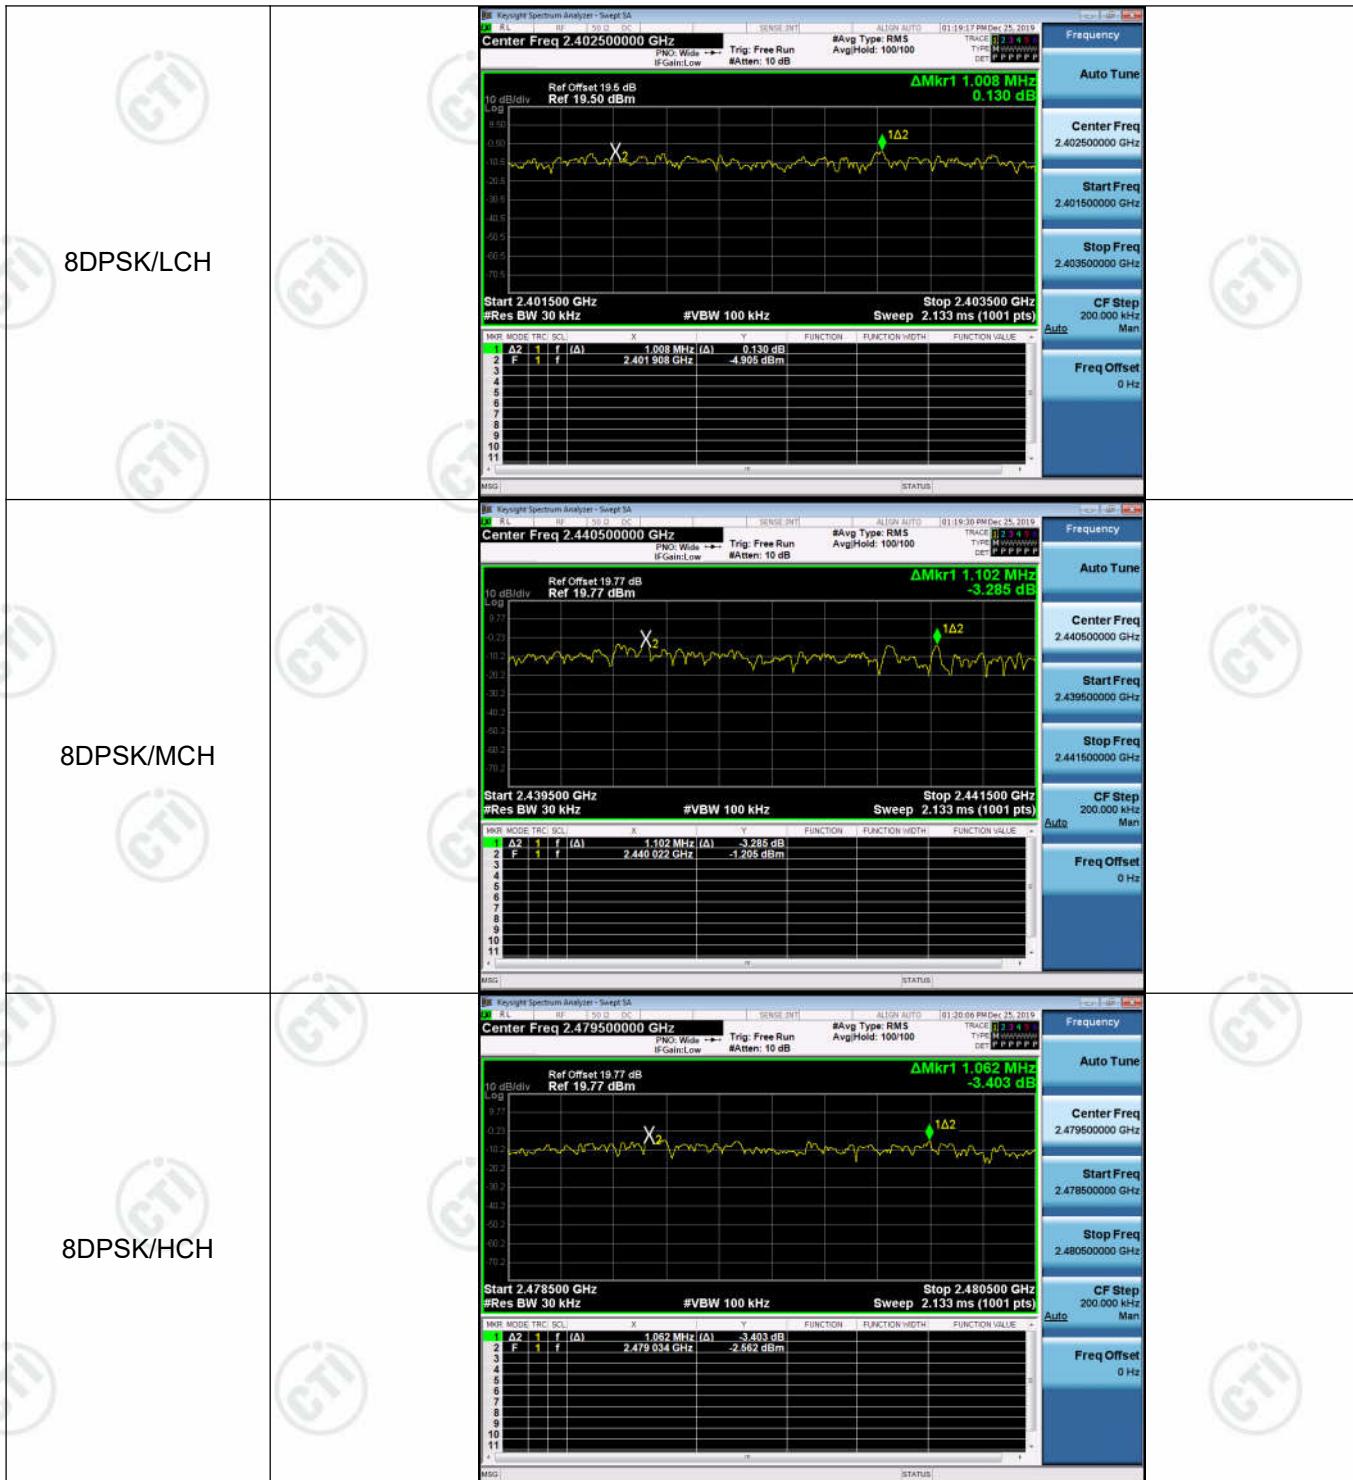

## Appendix C): Dwell Time

### Test Limit


According to §15.247(a)(1)(iii),

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Sweep = AUTO


### Test Setup

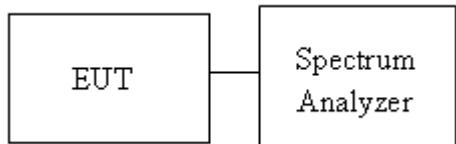



**Result Table**

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.3762	320	0.12	0.30	PASS
GFSK	DH1	MCH	0.3762	320	0.12	0.30	PASS
GFSK	DH1	HCH	0.37494	320	0.12	0.30	PASS
GFSK	DH3	LCH	1.63147	160	0.261	0.65	PASS
GFSK	DH3	MCH	1.63147	160	0.261	0.65	PASS
GFSK	DH3	HCH	1.63146	160	0.261	0.65	PASS
GFSK	DH5	LCH	2.8612	106.7	0.305	0.76	PASS
GFSK	DH5	MCH	2.8612	106.7	0.305	0.76	PASS
GFSK	DH5	HCH	2.8612	106.7	0.305	0.76	PASS

### Test Graph

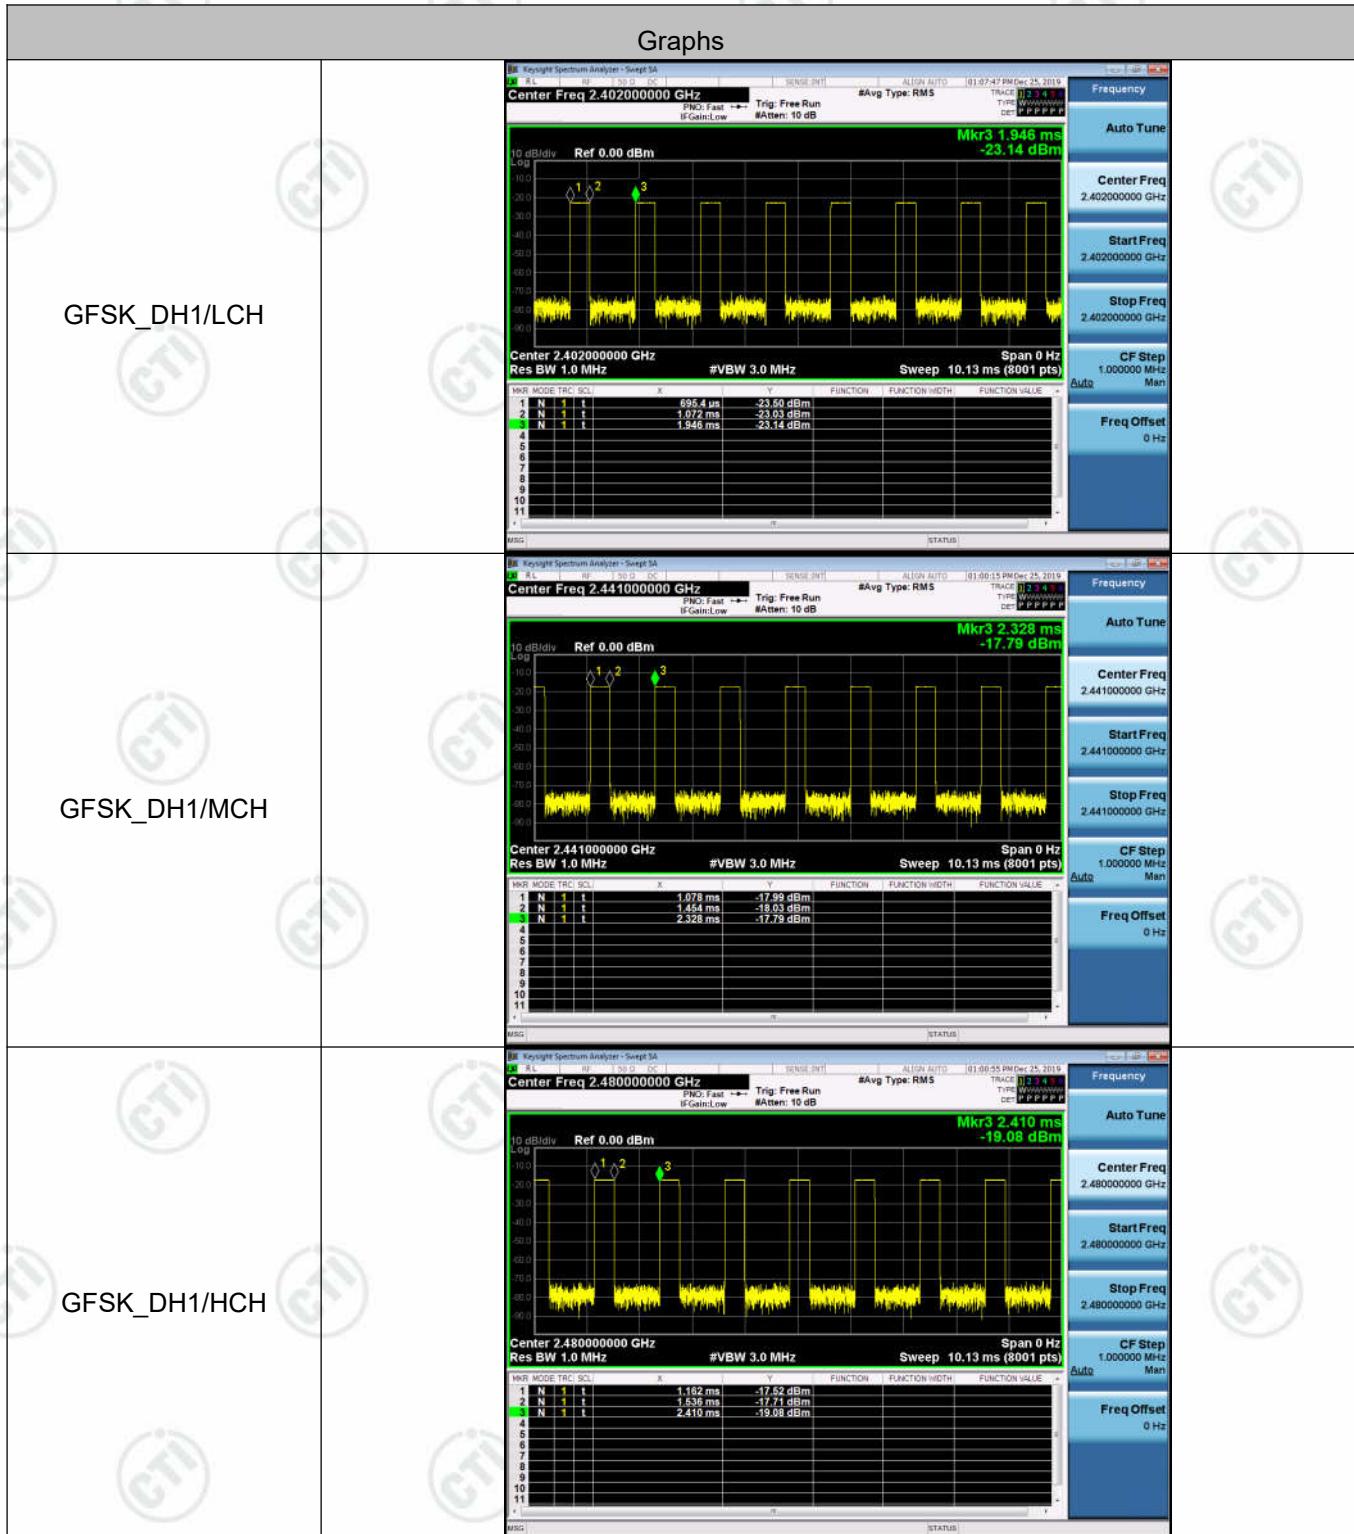

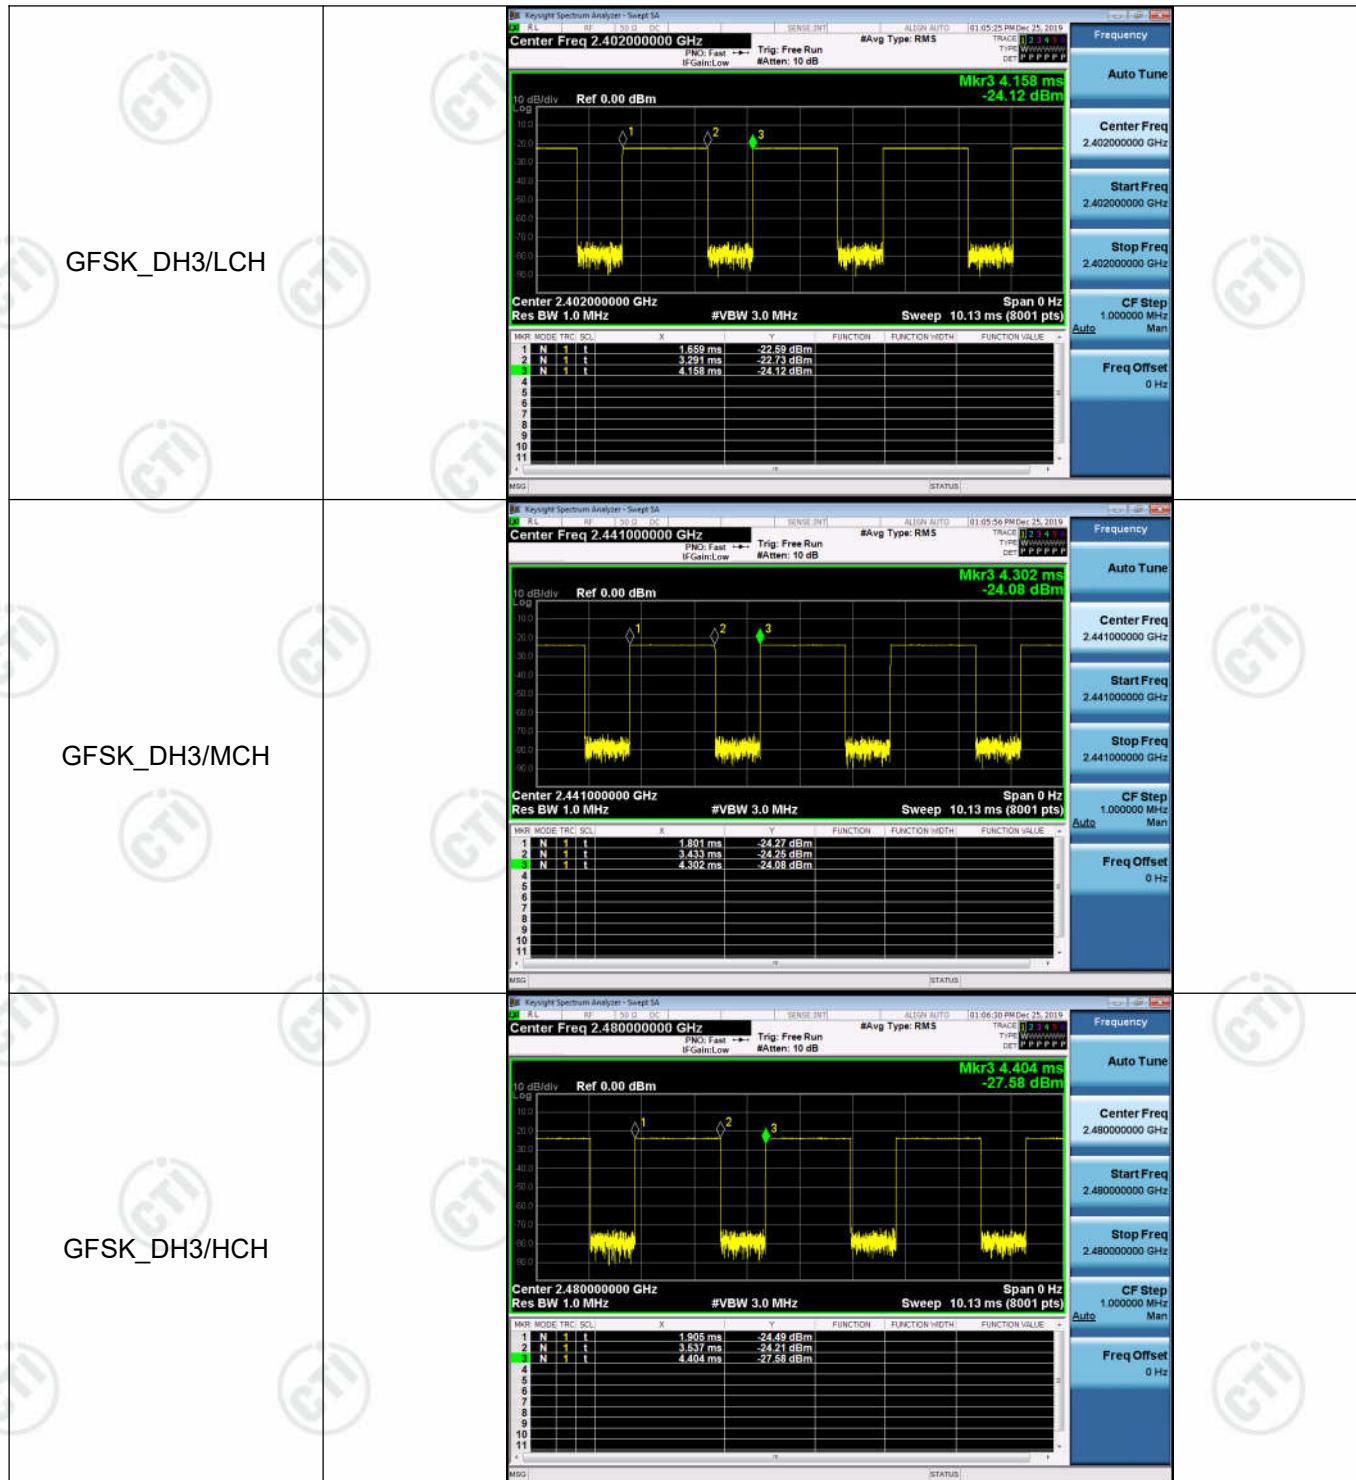

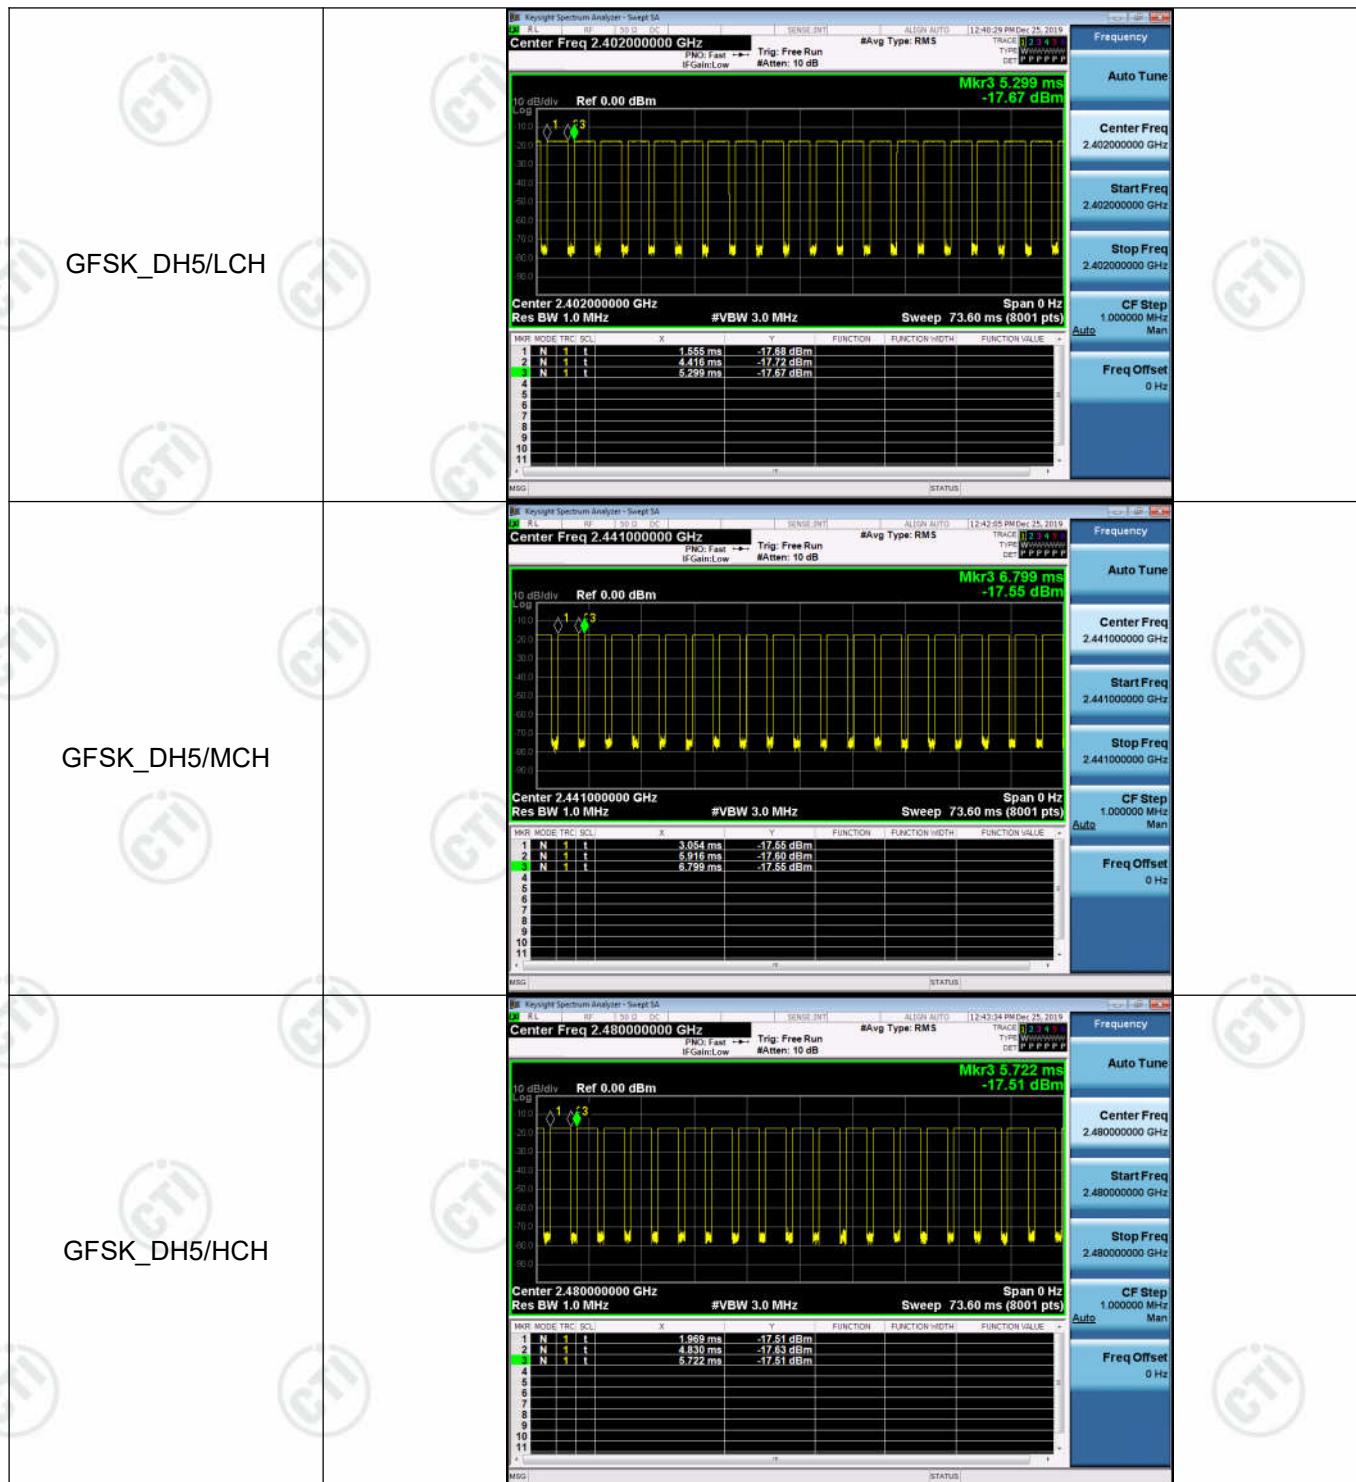

## Appendix D): Hopping Channel Number Test Limit

According to §15.247(a)(1)(iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz,  
RBW =100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.


### Test Setup

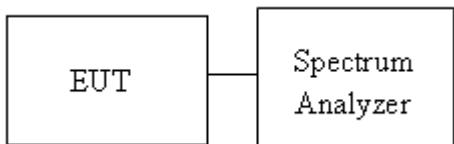

### Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

### Test Graph

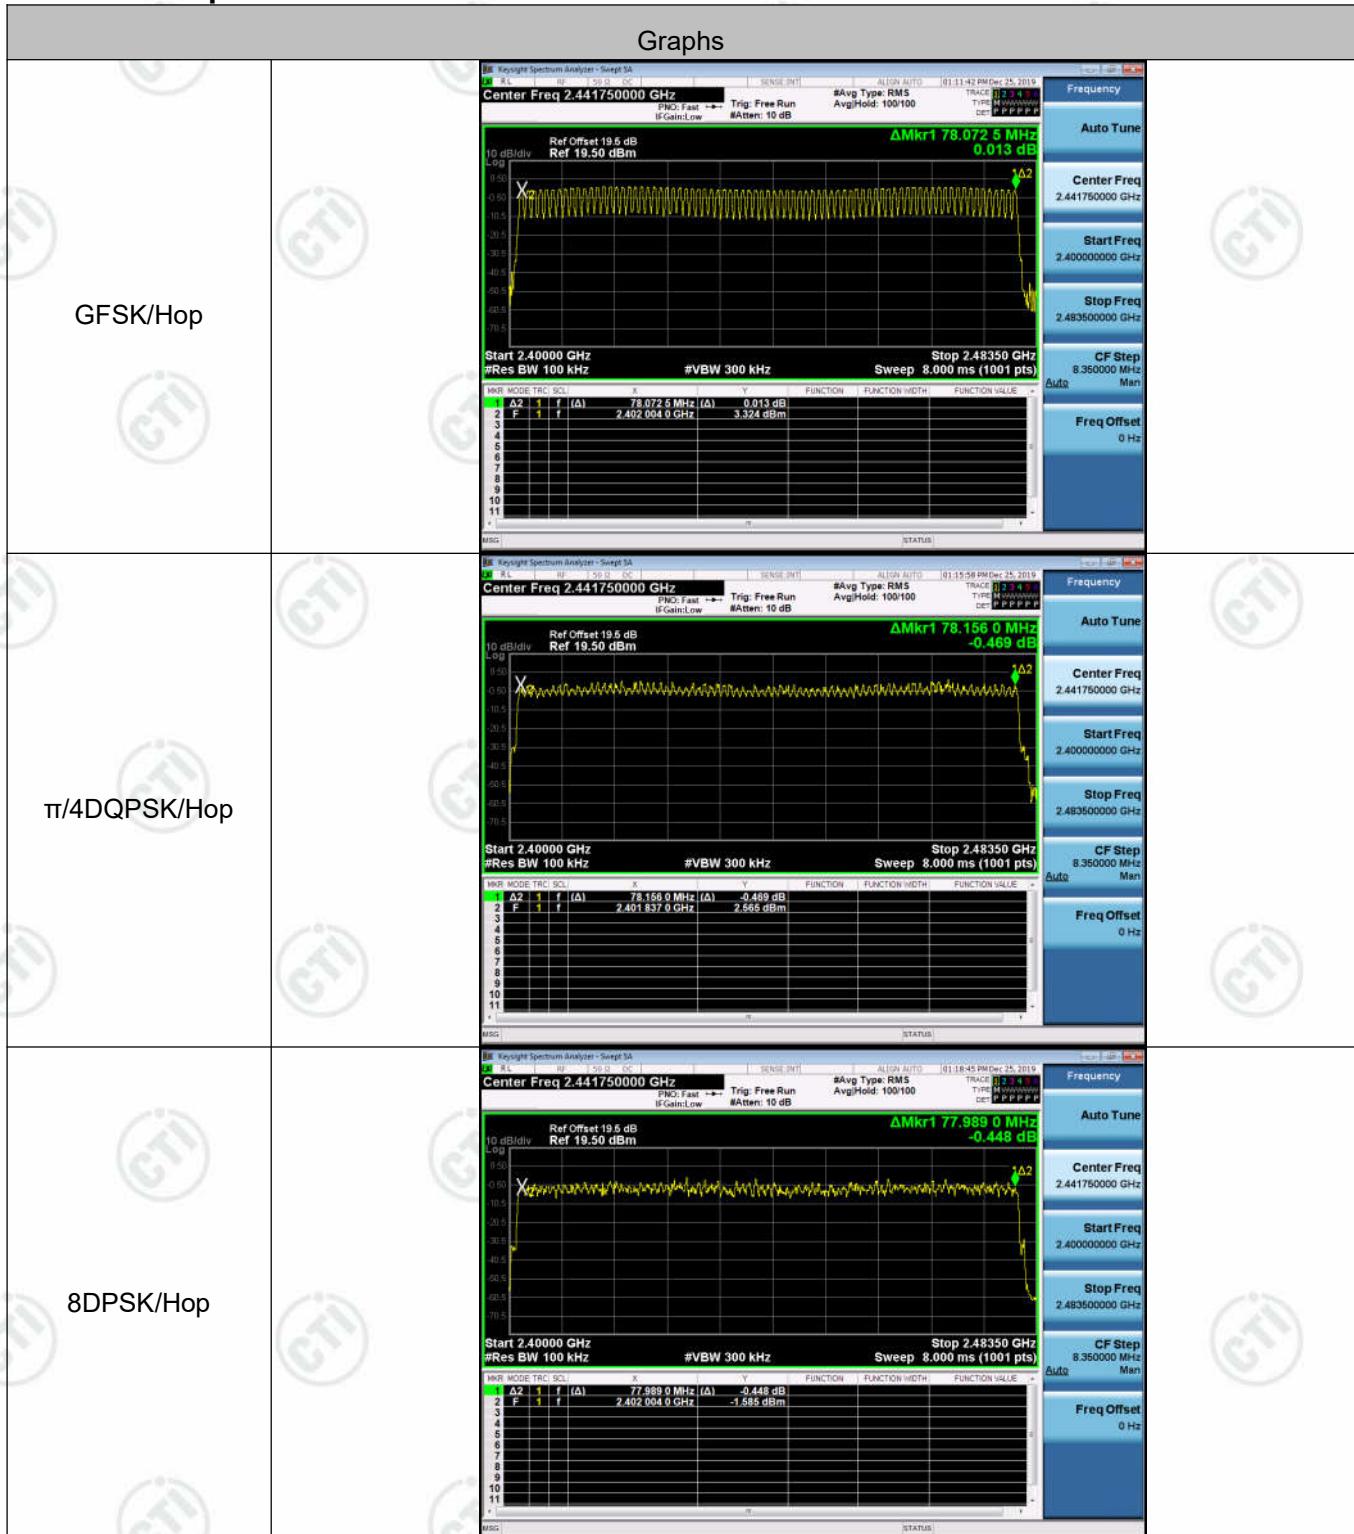

## Appendix E): Conducted Peak Output Power Test Limit

According to §15.247(b)(1).

### Peak output power :

#### FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 21dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : 21dBm [ Limit = 30 – (DG – 6) ]
-------	--

Average output power : For reporting purposes only.

### Test Procedure

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.


### Test Setup

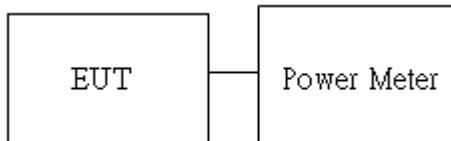



**Result Table**

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	1.942	PASS
GFSK	MCH	2.307	PASS
GFSK	HCH	2.366	PASS
$\pi/4$ DQPSK	LCH	1.325	PASS
$\pi/4$ DQPSK	MCH	1.738	PASS
$\pi/4$ DQPSK	HCH	1.799	PASS
8DPSK	LCH	1.529	PASS
8DPSK	MCH	1.949	PASS
8DPSK	HCH	2.000	PASS

### Test Graph

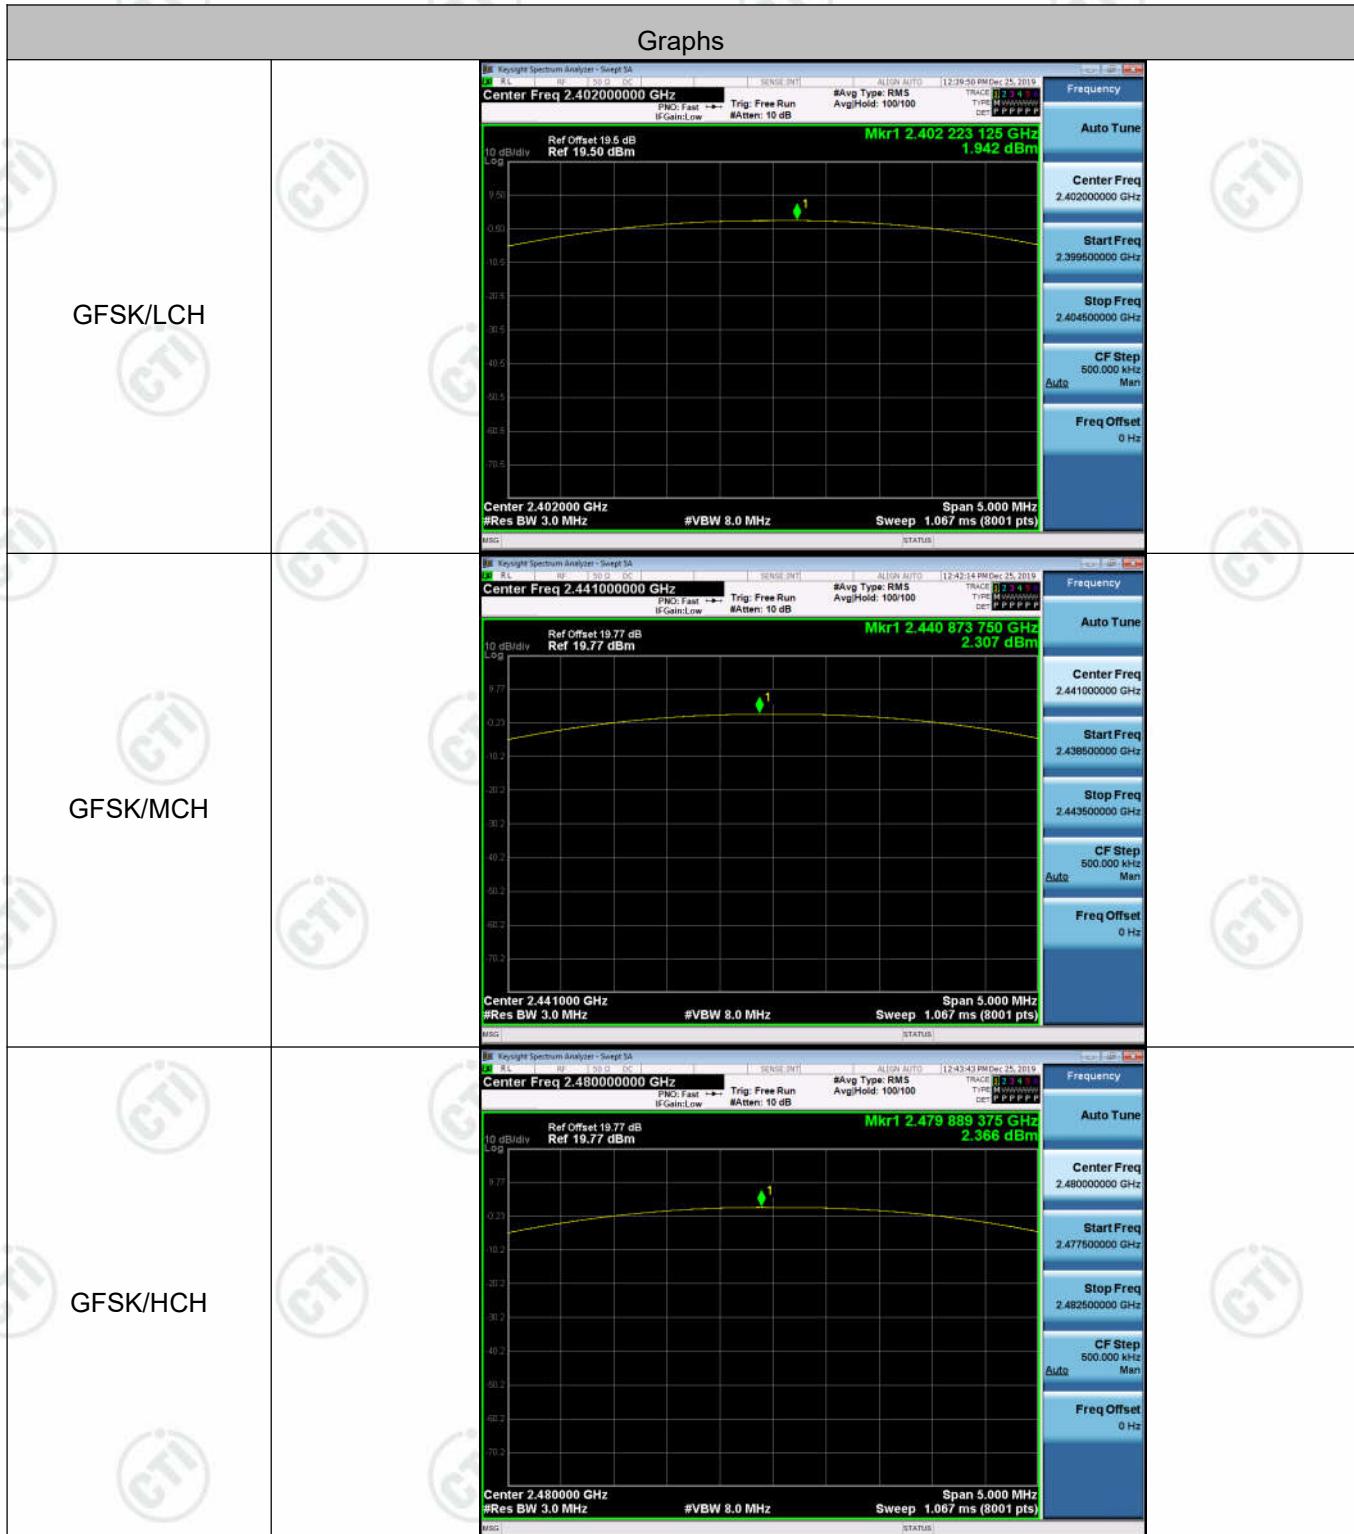

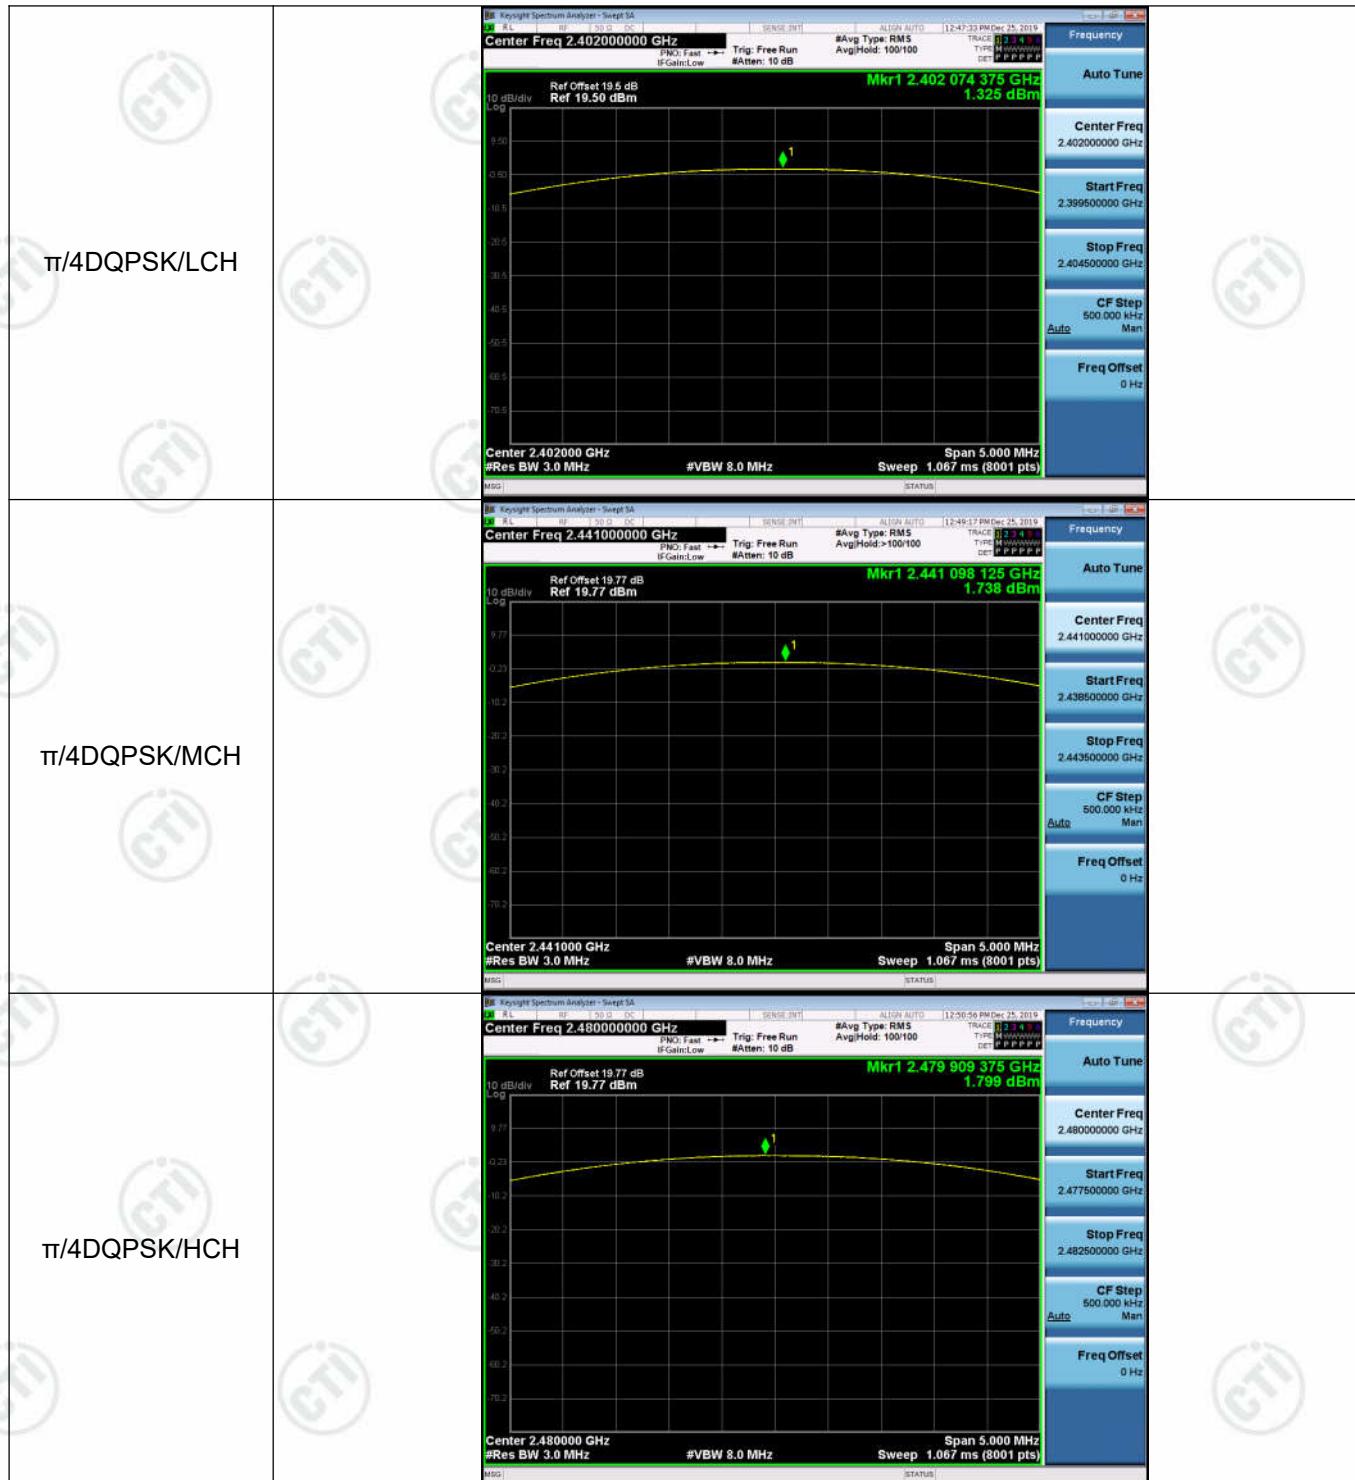

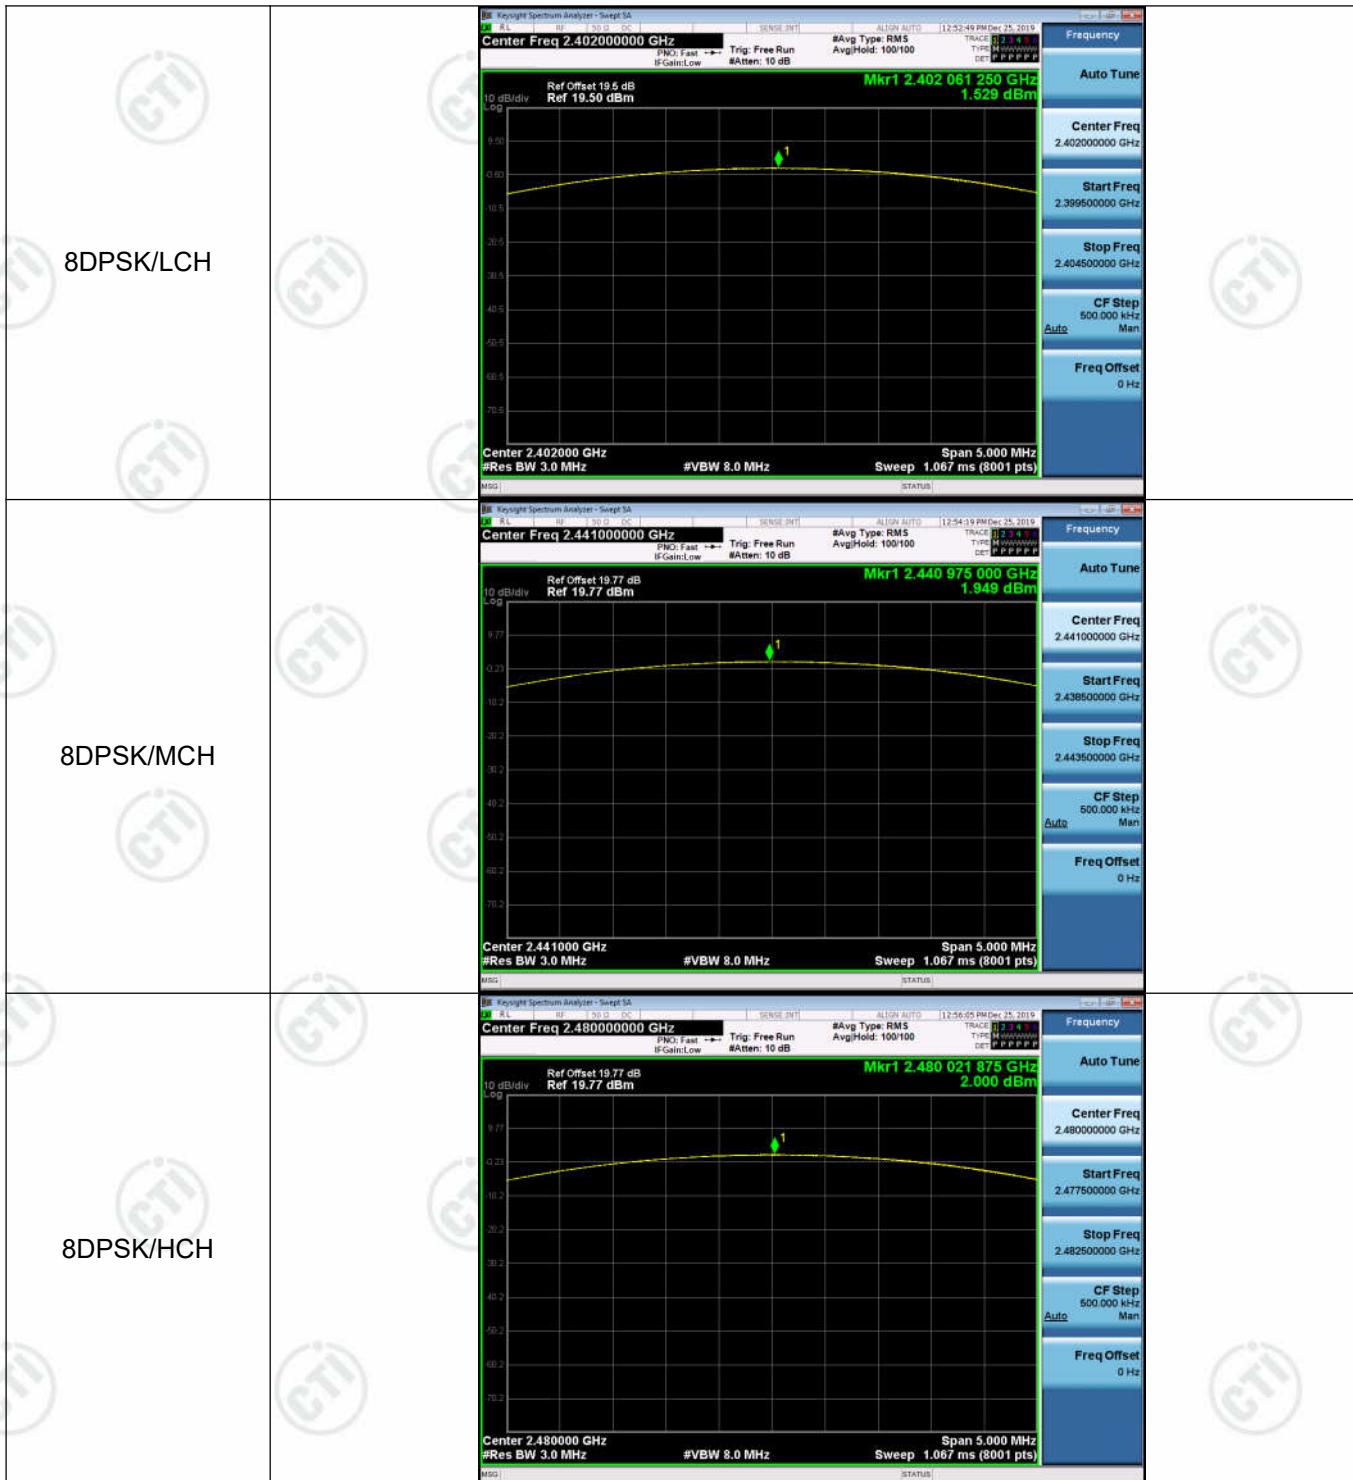

## Appendix F): Band-edge for RF Conducted Emissions

### Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

### Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with normal hopping mode.

### Test Setup

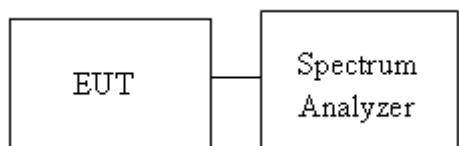


**Result Table**

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	1.852	Off	-60.124	-18.15	PASS
			4.480	On	-59.286	-15.52	PASS
GFSK	HCH	2480	1.996	Off	-46.860	-18	PASS
			5.550	On	-51.434	-14.45	PASS
$\pi/4$ DQPSK	LCH	2402	0.529	Off	-60.416	-19.47	PASS
			1.864	On	-60.503	-18.14	PASS
$\pi/4$ DQPSK	HCH	2480	1.127	Off	-53.631	-18.87	PASS
			3.233	On	-56.973	-16.77	PASS
8DPSK	LCH	2402	0.727	Off	-60.666	-19.27	PASS
			2.387	On	-60.301	-17.61	PASS
8DPSK	HCH	2480	1.149	Off	-52.572	-18.85	PASS
			2.555	On	-54.798	-17.45	PASS


### Test Graph



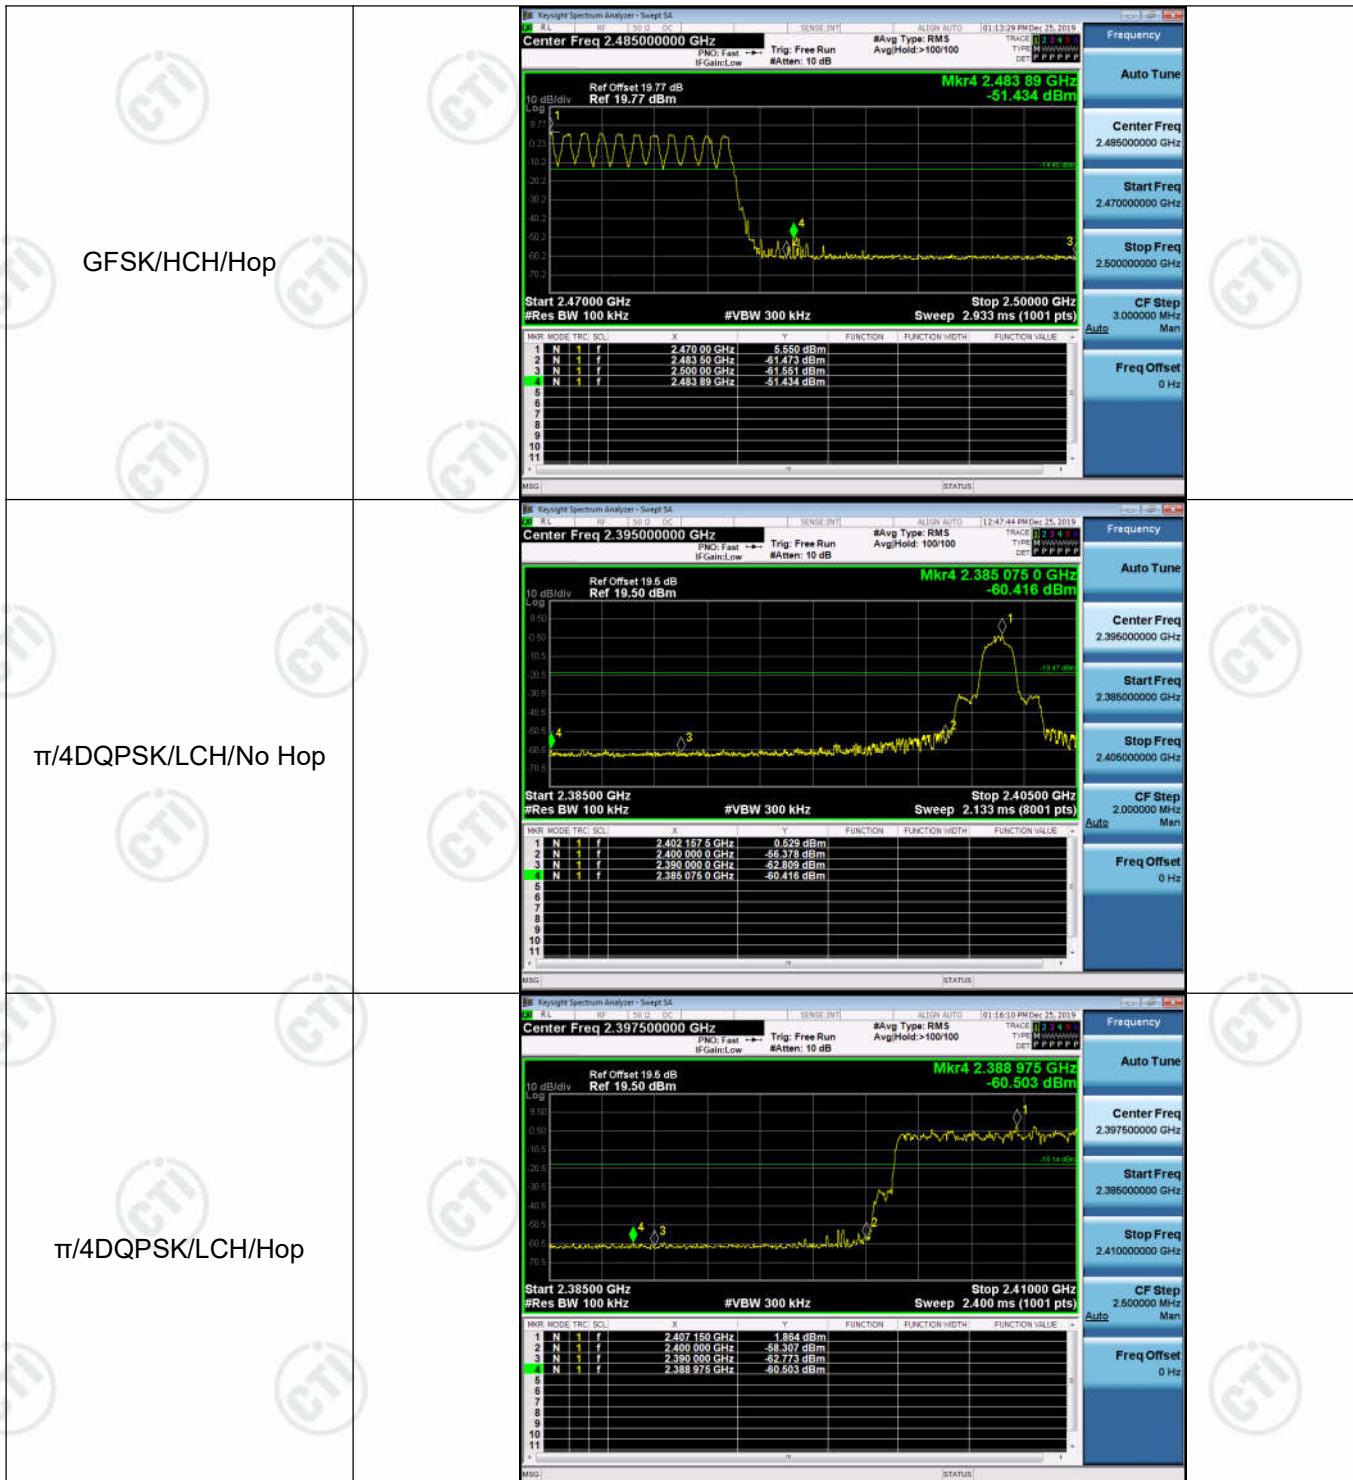





8DPSK/LCH/Hop

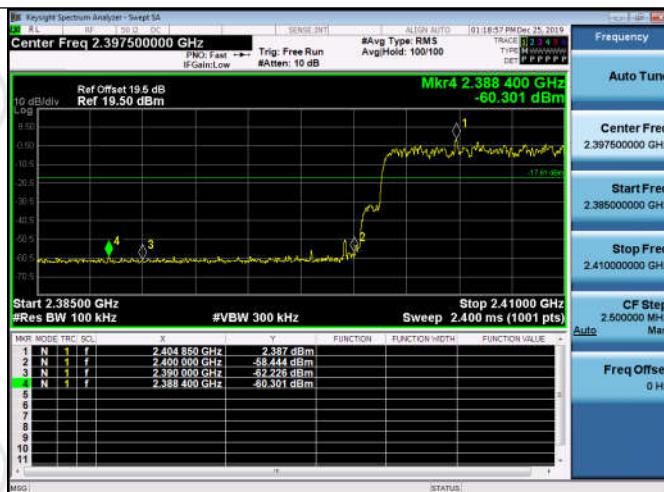

8DPSK/HCH/No Hop

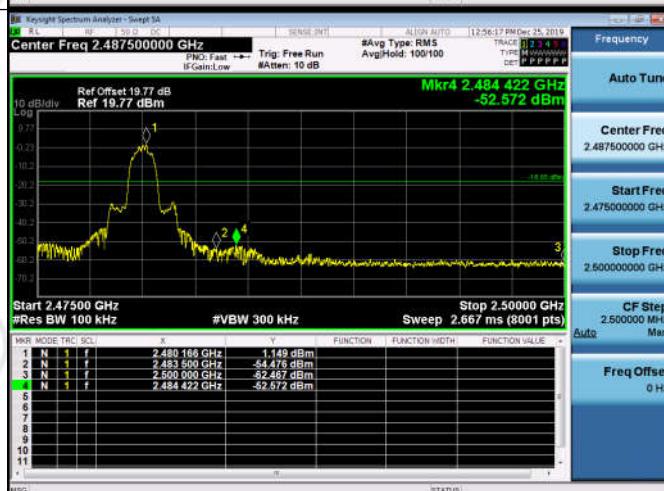

8DPSK/HCH/Hop

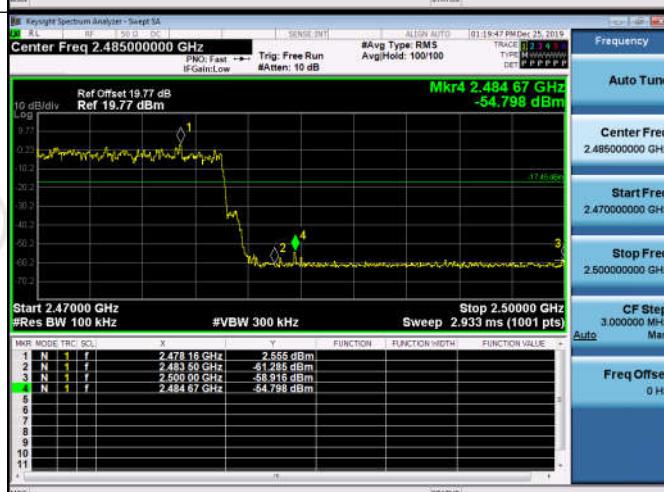

## Appendix G): RF Conducted Spurious Emissions

### Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

### Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.

### Test Setup

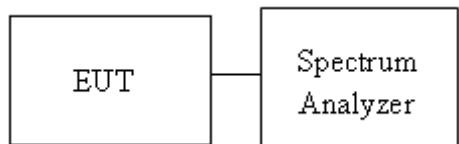


**Result Table**


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	1.621	<Limit	PASS
GFSK	MCH	1.664	<Limit	PASS
GFSK	HCH	2.128	<Limit	PASS
$\pi/4$ DQPSK	LCH	0.506	<Limit	PASS
$\pi/4$ DQPSK	MCH	0.977	<Limit	PASS
$\pi/4$ DQPSK	HCH	1.124	<Limit	PASS
8DPSK	LCH	0.67	<Limit	PASS
8DPSK	MCH	1.127	<Limit	PASS
8DPSK	HCH	1.043	<Limit	PASS


### Test Graph



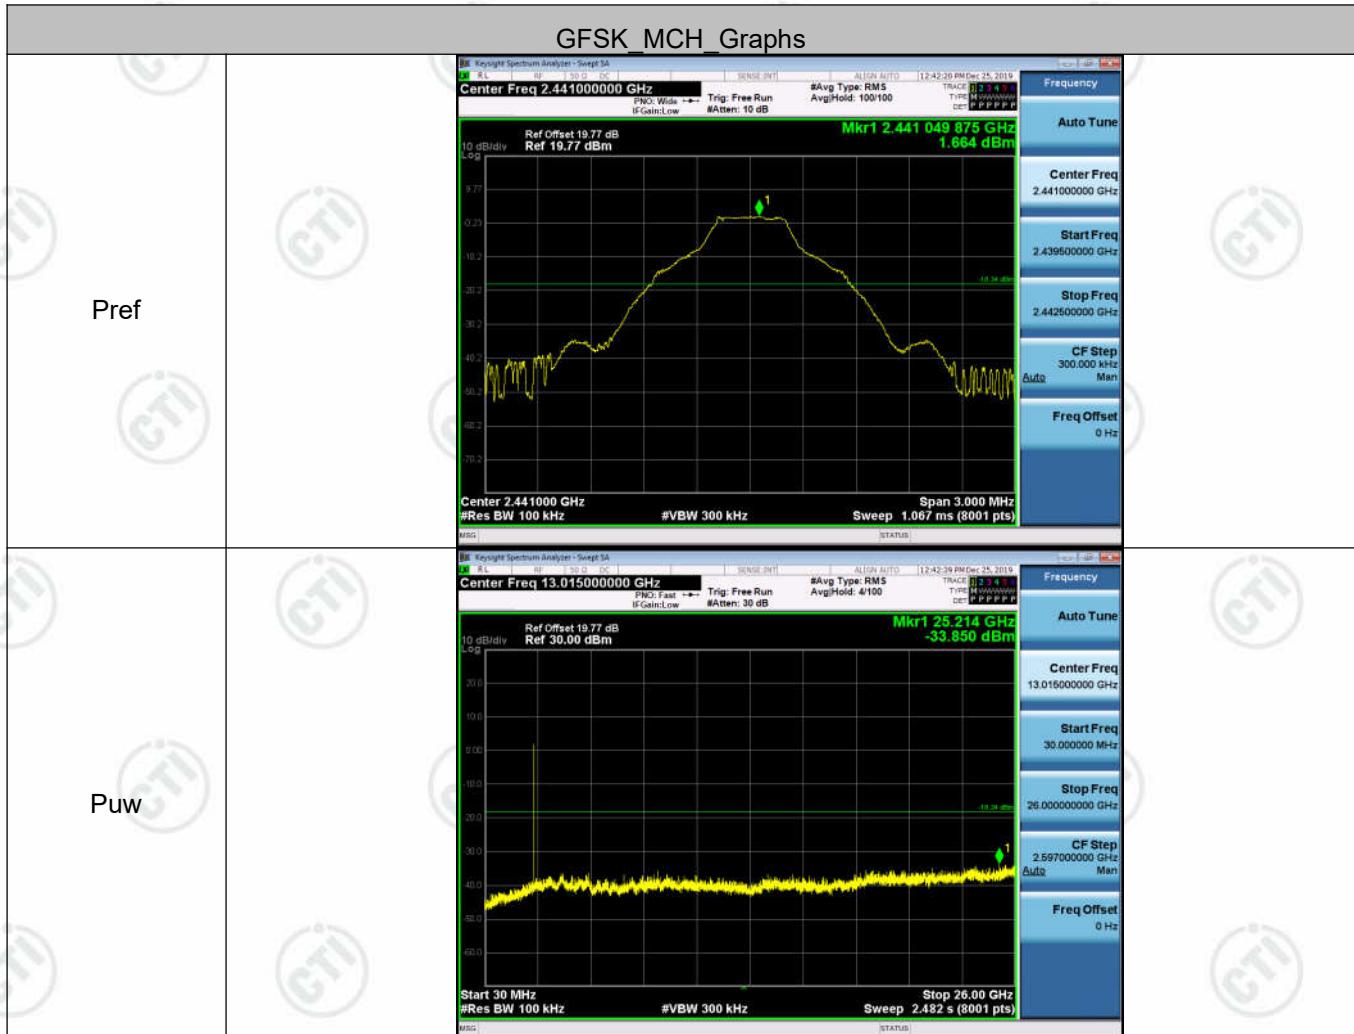



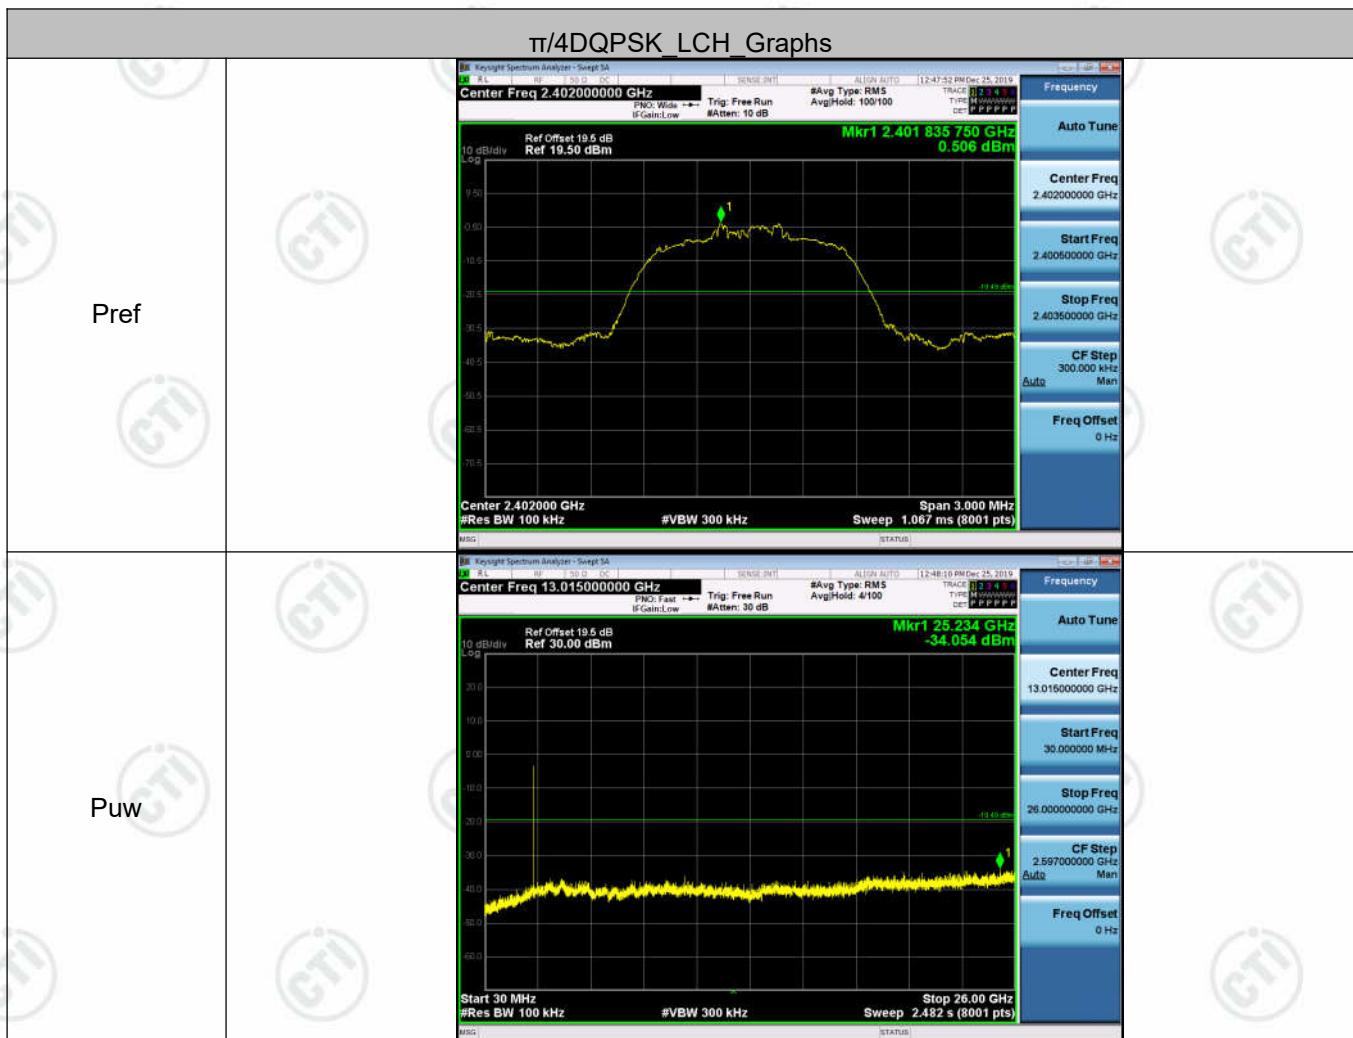

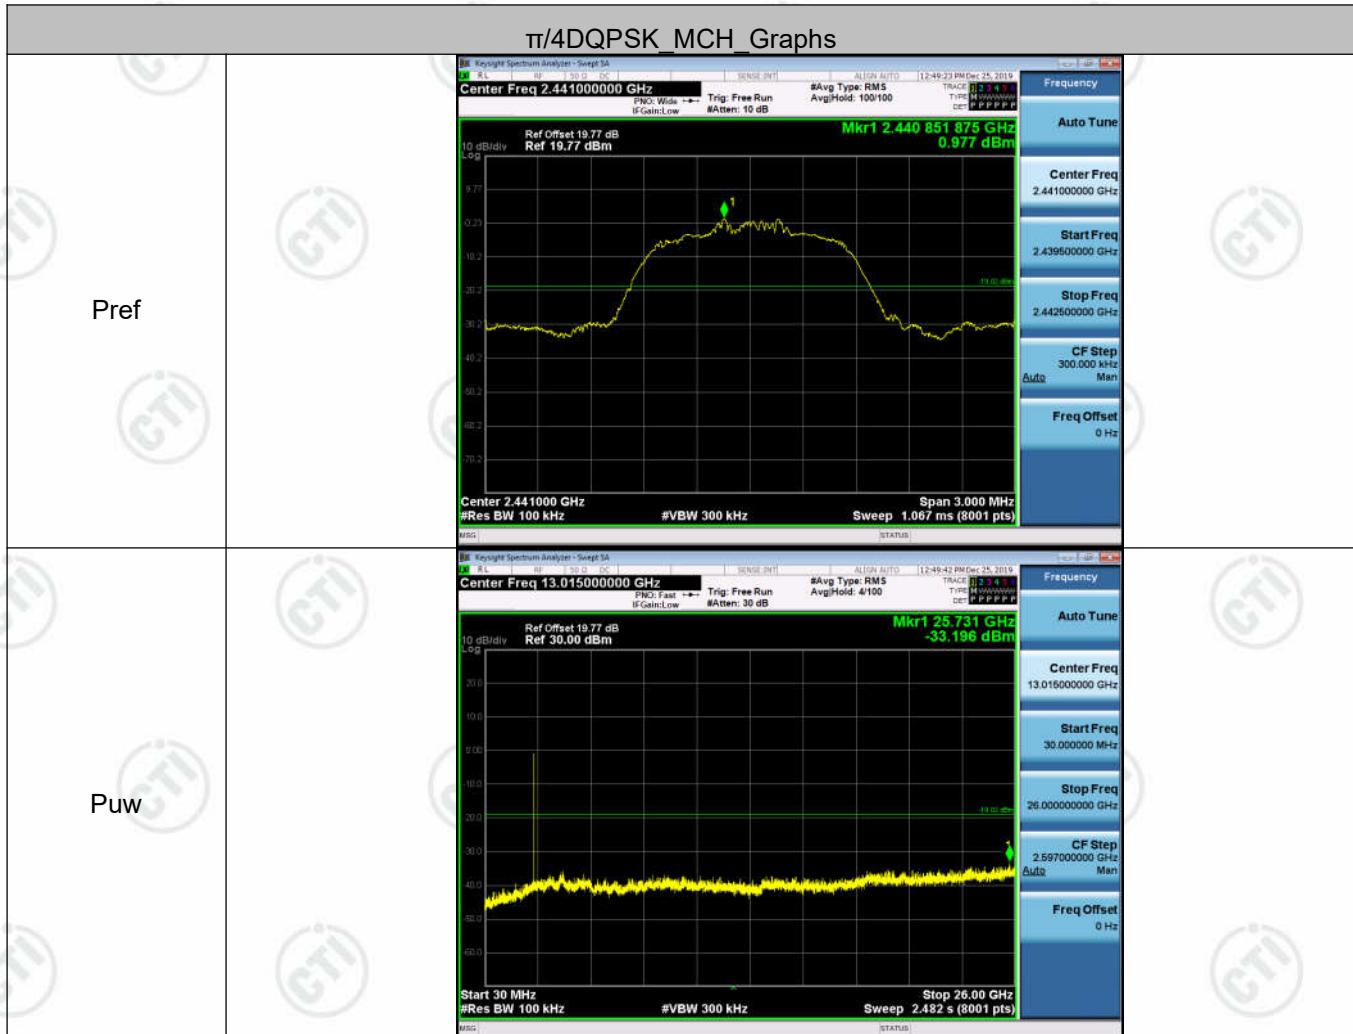










## Appendix H): Pseudorandom Frequency Hopping Sequence
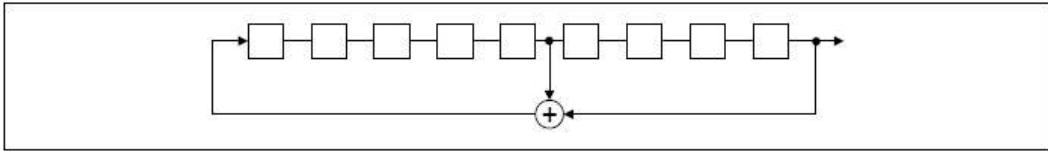
<b>Test Requirement:</b>	47 CFR Part 15C Section 15.247 (a)(1) requirement:																						
	<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.</p> <p>The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>																						
<b>EUT Pseudorandom Frequency Hopping Sequence</b>																							
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> <li>Number of shift register stages: 9</li> <li>Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>Longest sequence of zeros: 8 (non-inverted signal)</li> </ul>																							
 <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <table border="1"> <tr> <td>20</td> <td>62</td> <td>46</td> <td>77</td> <td>7</td> <td>64</td> <td>8</td> <td>73</td> <td>16</td> <td>75</td> <td>1</td> </tr> <tr> <td>  </td> </tr> </table> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p> <p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>		20	62	46	77	7	64	8	73	16	75	1											
20	62	46	77	7	64	8	73	16	75	1													

## Appendix I): Antenna Requirement


### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**EUT Antenna:**

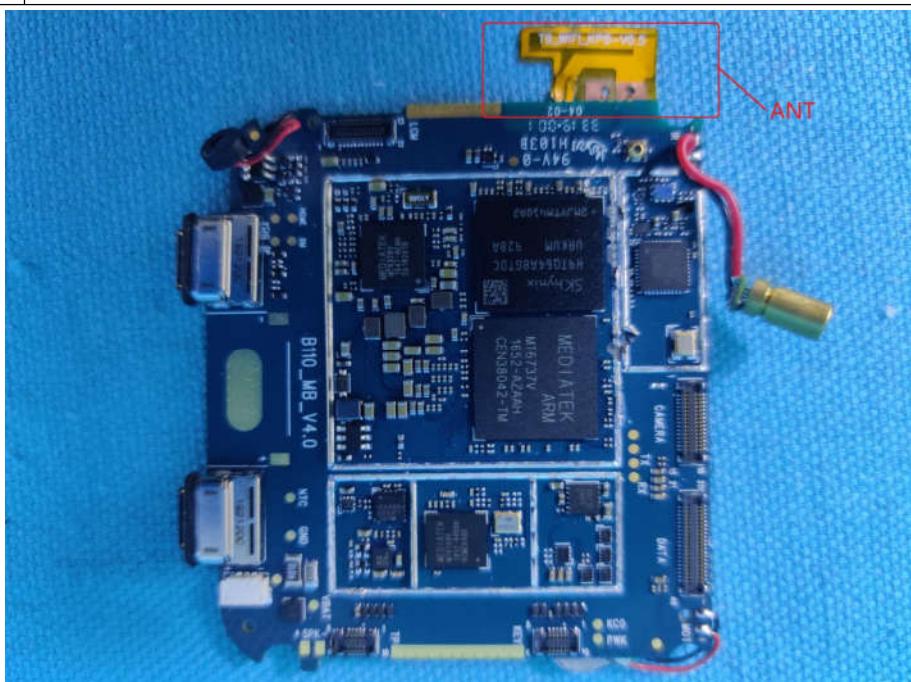

The antenna type is FPC with I-PEX connector, that is a unique connector and compliant with the requirement for 15.203. The best case gain of the antenna is 0.33dBi.

## Appendix J): AC Power Line Conducted Emission

Test Procedure:	Test frequency range :150KHz-30MHz 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.																
Limit:	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.          NOTE : The lower limit is applicable at the transition frequency</p>			Frequency range (MHz)	Limit (dB $\mu$ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB $\mu$ V)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															

### Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

**Product** : Wearable watch  
**Temperature** : 24°C


**Model/Type reference** : SF-120  
**Humidity** : 52%

Live line:

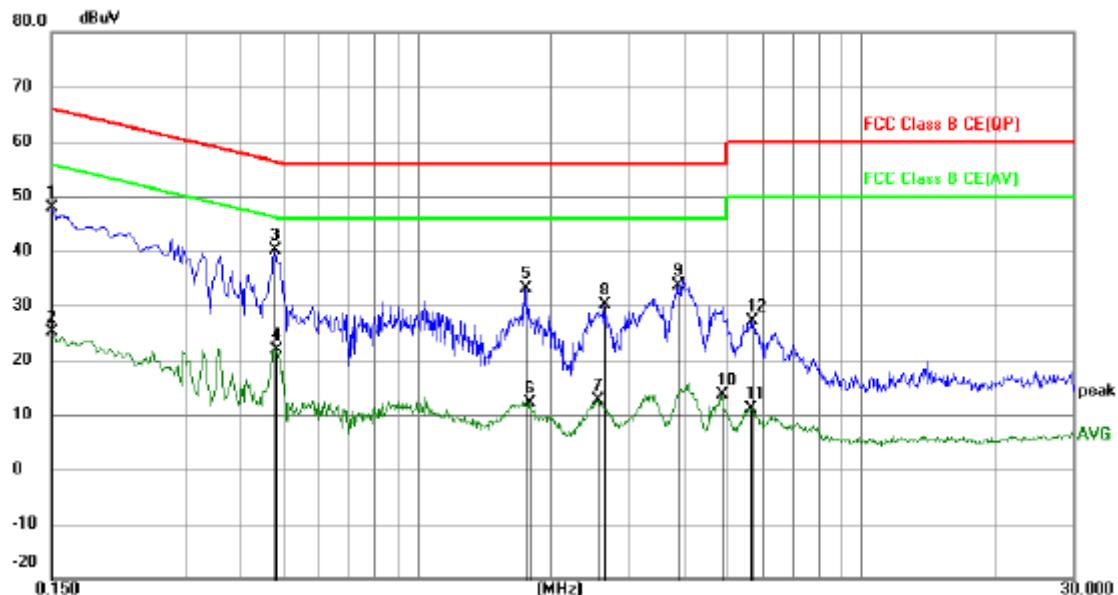

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment	
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	37.91	9.97	47.88	66.00	-18.12	QP	
2		0.1500	15.10	9.97	25.07	56.00	-30.93	AVG	
3	*	0.4785	30.21	10.00	40.21	56.37	-16.16	QP	
4		0.4830	11.98	10.00	21.98	46.29	-24.31	AVG	
5		1.7475	23.31	9.85	33.16	56.00	-22.84	QP	
6		1.7835	2.26	9.85	12.11	46.00	-33.89	AVG	
7		2.5485	2.89	9.83	12.72	46.00	-33.28	AVG	
8		2.6475	20.29	9.83	30.12	56.00	-25.88	QP	
9		3.8715	23.90	9.83	33.73	56.00	-22.27	QP	
10		4.8300	3.83	9.83	13.66	46.00	-32.34	AVG	
11		5.6400	1.31	9.84	11.15	50.00	-38.85	AVG	
12		5.6715	17.21	9.84	27.05	60.00	-32.95	QP	

Neutral line:

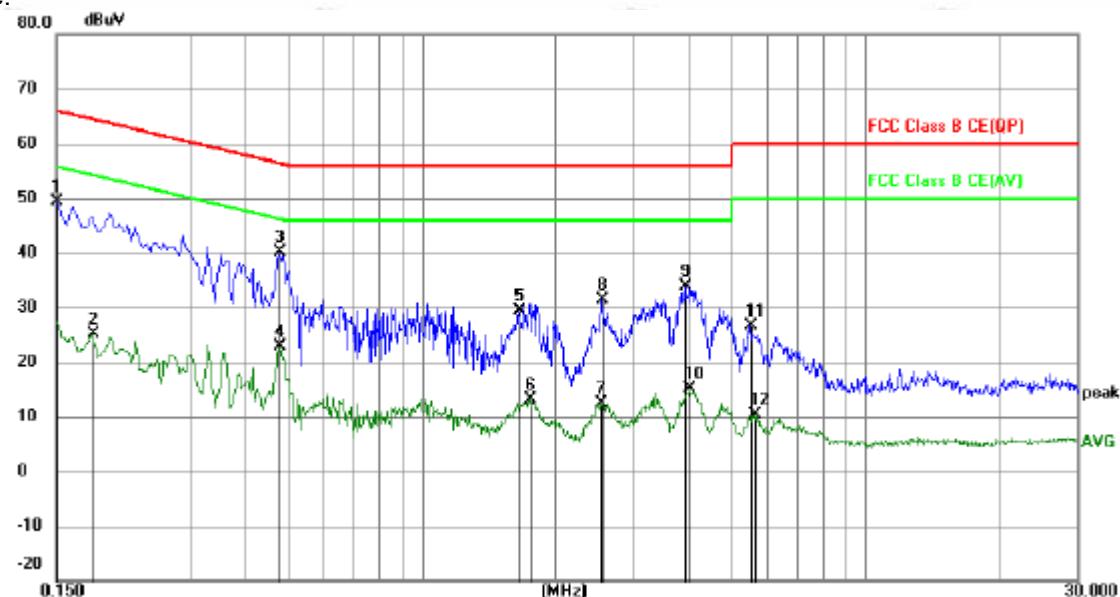

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment		Limit dBuV	Margin dB	Detector	Comment
					Measurement	Limit				
1		0.1500	39.53	9.97	49.50	66.00	-16.50	QP		
2		0.1815	15.04	10.00	25.04	54.42	-29.38	AVG		
3	*	0.4785	30.02	10.00	40.02	56.37	-16.35	QP		
4		0.4785	12.78	10.00	22.78	46.37	-23.59	AVG		
5		1.6620	19.47	9.86	29.33	56.00	-26.67	QP		
6		1.7475	3.18	9.85	13.03	46.00	-32.97	AVG		
7		2.5305	2.57	9.83	12.40	46.00	-33.60	AVG		
8		2.5530	21.45	9.83	31.28	56.00	-24.72	QP		
9		3.9255	23.97	9.83	33.80	56.00	-22.20	QP		
10		4.0155	5.35	9.83	15.18	46.00	-30.82	AVG		
11		5.4915	16.75	9.83	26.58	60.00	-33.42	QP		
12		5.6175	0.42	9.84	10.26	50.00	-39.74	AVG		

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


## Appendix K): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark	
Test Procedure:	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak	
	Above 1GHz	Peak	1MHz	3MHz	Peak	
		Peak	1MHz	10Hz	Average	
<b>Below 1GHz test procedure as below:</b>						
<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol>						
<b>Above 1GHz test procedure as below:</b>						
<ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</li> <li>Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>						
Limit:	Frequency	Limit (dB $\mu$ V/m @3m)	Remark			
	30MHz-88MHz	40.0	Quasi-peak Value			
	88MHz-216MHz	43.5	Quasi-peak Value			
	216MHz-960MHz	46.0	Quasi-peak Value			
	960MHz-1GHz	54.0	Quasi-peak Value			
	Above 1GHz	54.0	Average Value			
		74.0	Peak Value			

**Test plot as follows:**

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


**Test Graph**

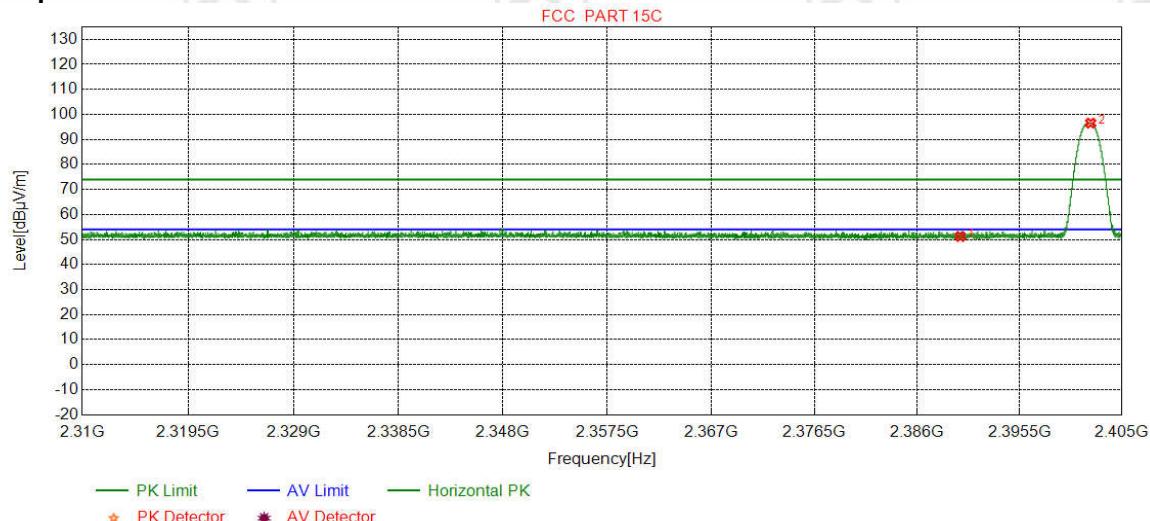

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	48.03	51.21	74.00	22.79	Pass	Horizontal
2	2402.1055	32.26	13.31	-42.43	93.38	96.52	74.00	-22.52	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


**Test Graph**

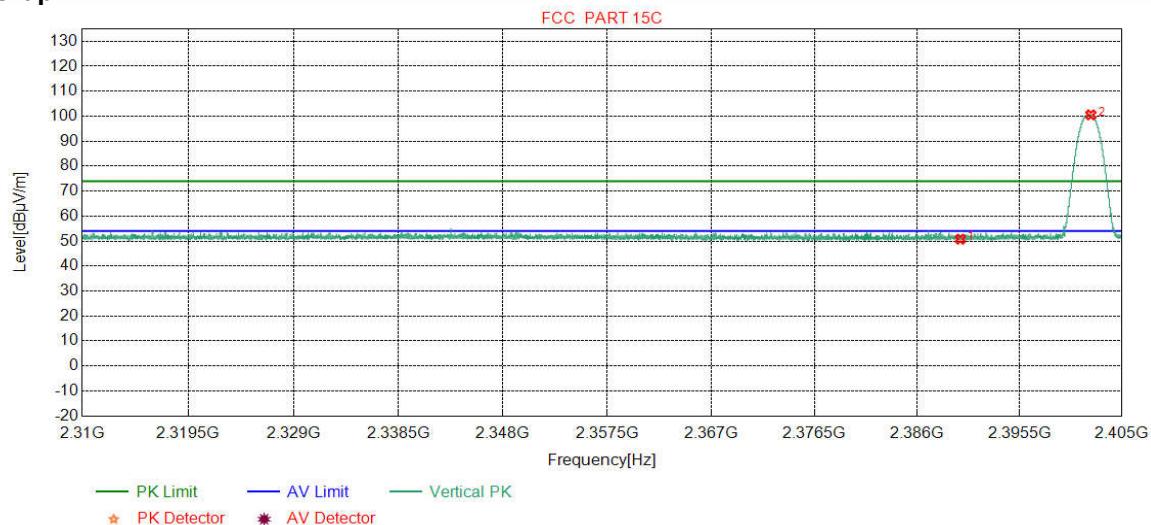

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	47.57	50.75	74.00	23.25	Pass	Vertical
2	2402.1245	32.26	13.31	-42.43	97.39	100.53	74.00	-26.53	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


**Test Graph**

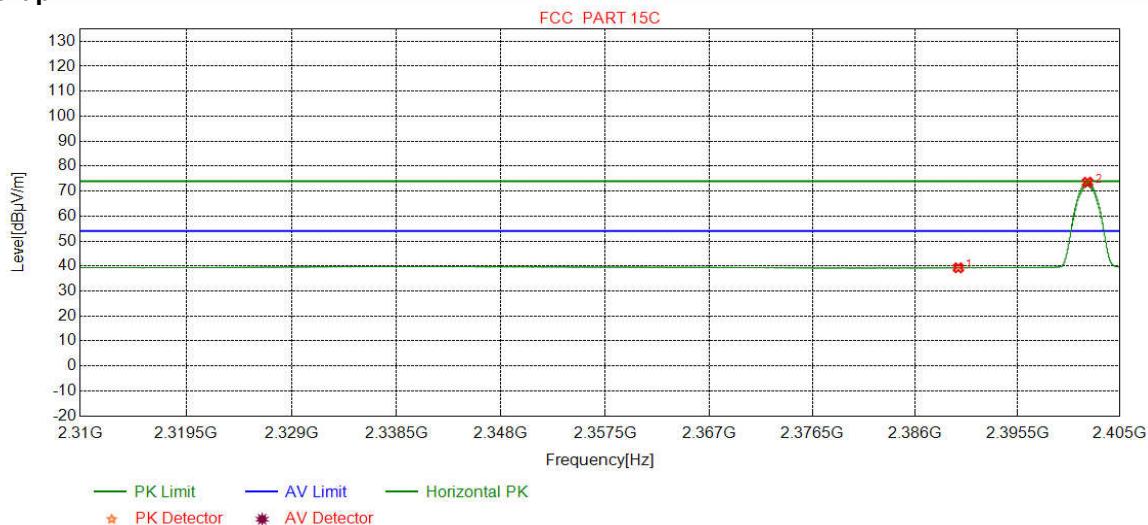

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	36.10	39.28	54.00	14.72	Pass	Horizontal
2	2401.9978	32.26	13.31	-42.43	70.43	73.57	54.00	-19.57	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


**Test Graph**

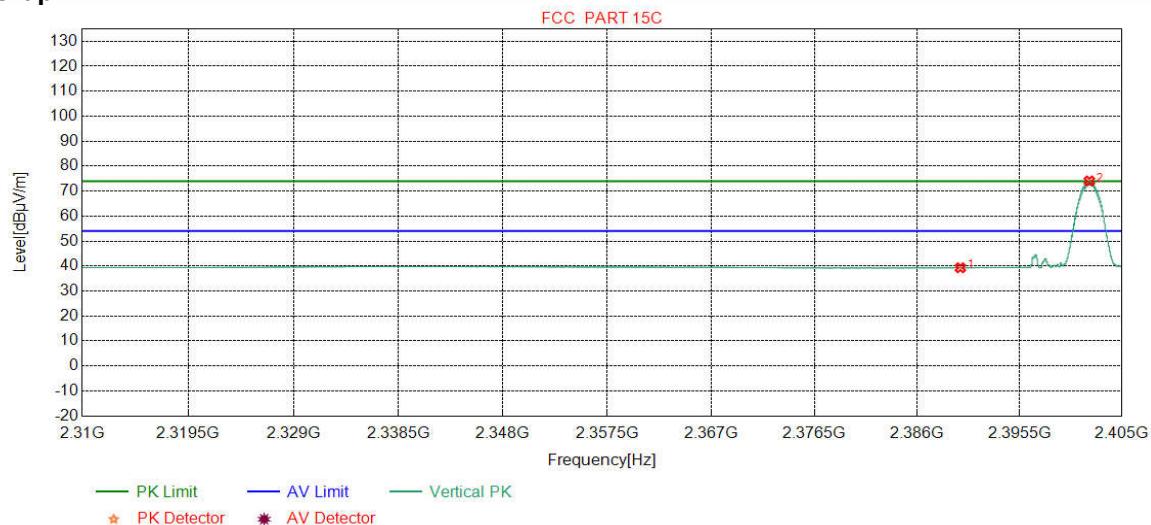

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	36.11	39.29	54.00	14.71	Pass	Vertical
2	2401.9851	32.26	13.31	-42.43	70.94	74.08	54.00	-20.08	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


**Test Graph**

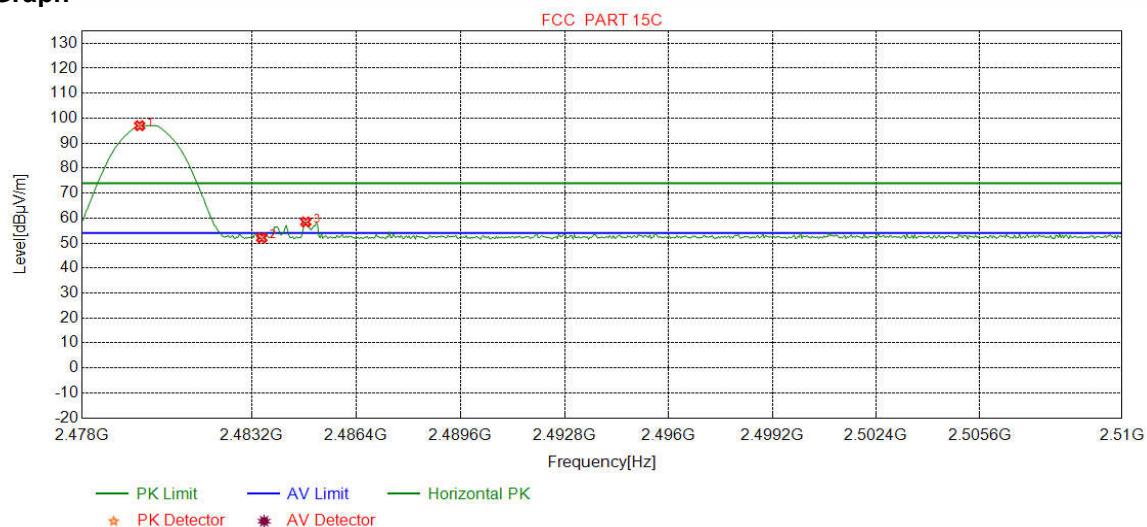

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2479.7622	32.37	13.39	-42.39	93.63	97.00	74.00	-23.00	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	48.75	52.11	74.00	21.89	Pass	Horizontal
3	2484.8486	32.38	13.37	-42.40	55.12	58.47	74.00	15.53	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


**Test Graph**

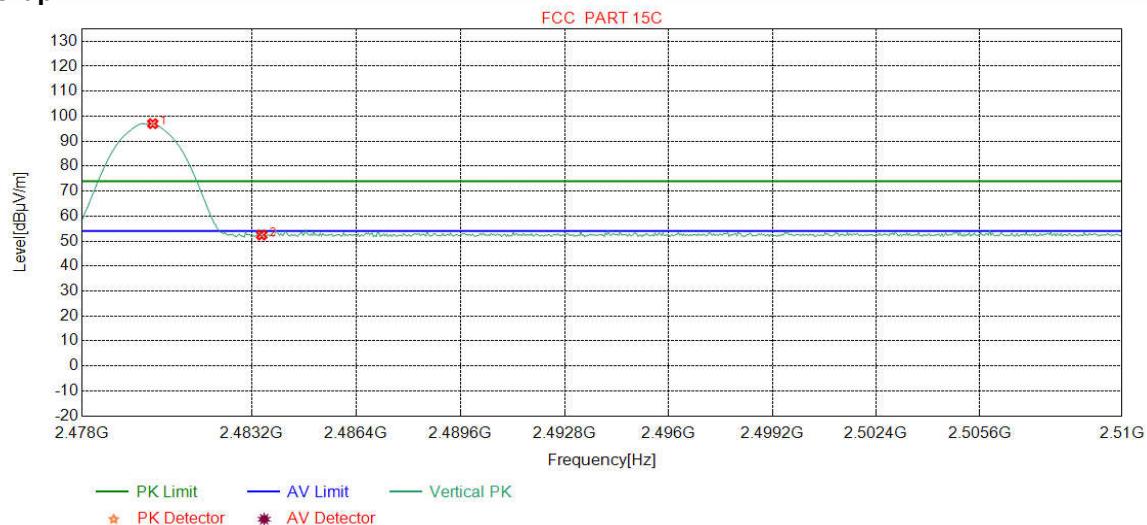

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2480.1627	32.37	13.39	-42.40	93.64	97.00	74.00	-23.00	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	49.06	52.42	74.00	21.58	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


**Test Graph**

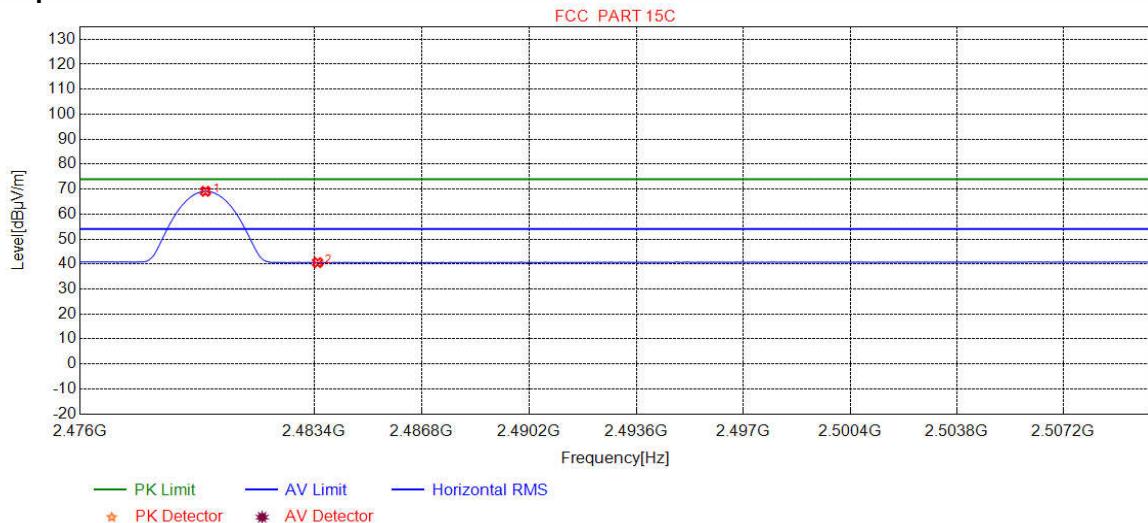

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2479.9574	32.37	13.39	-43.10	66.46	69.12	54.00	-15.12	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	37.94	40.59	54.00	13.41	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


**Test Graph**

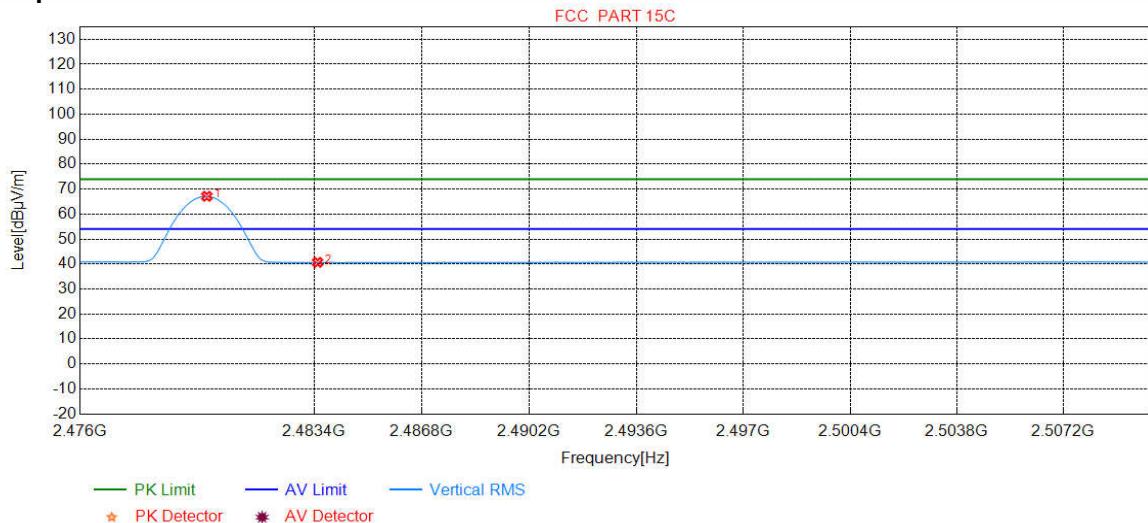

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2480.0000	32.37	13.39	-43.10	64.47	67.13	54.00	-13.13	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	38.03	40.68	54.00	13.32	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


**Test Graph**

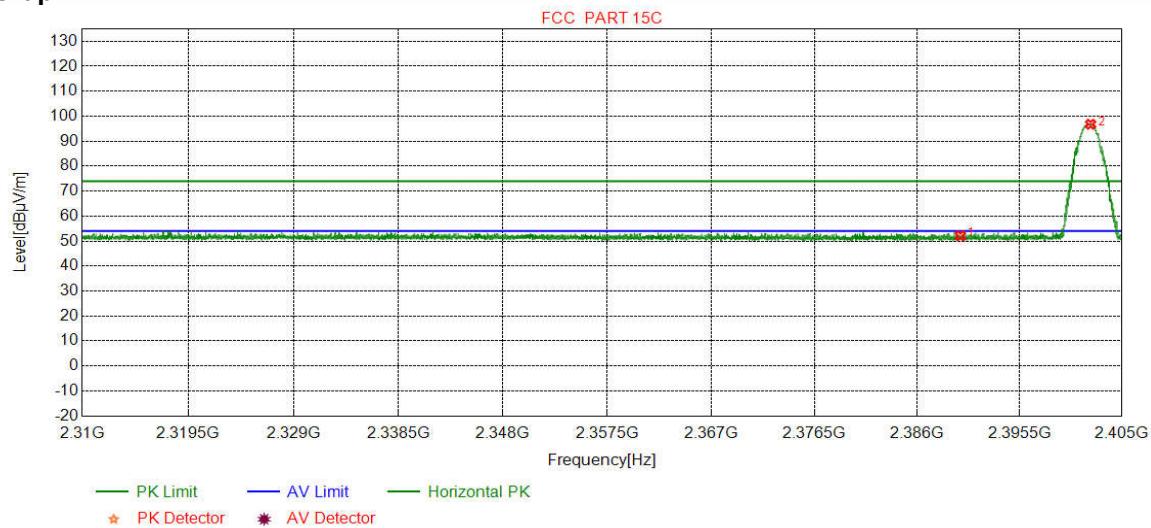

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	48.95	52.13	74.00	21.87	Pass	Horizontal
2	2402.0991	32.26	13.31	-42.43	93.63	96.77	74.00	-22.77	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


**Test Graph**

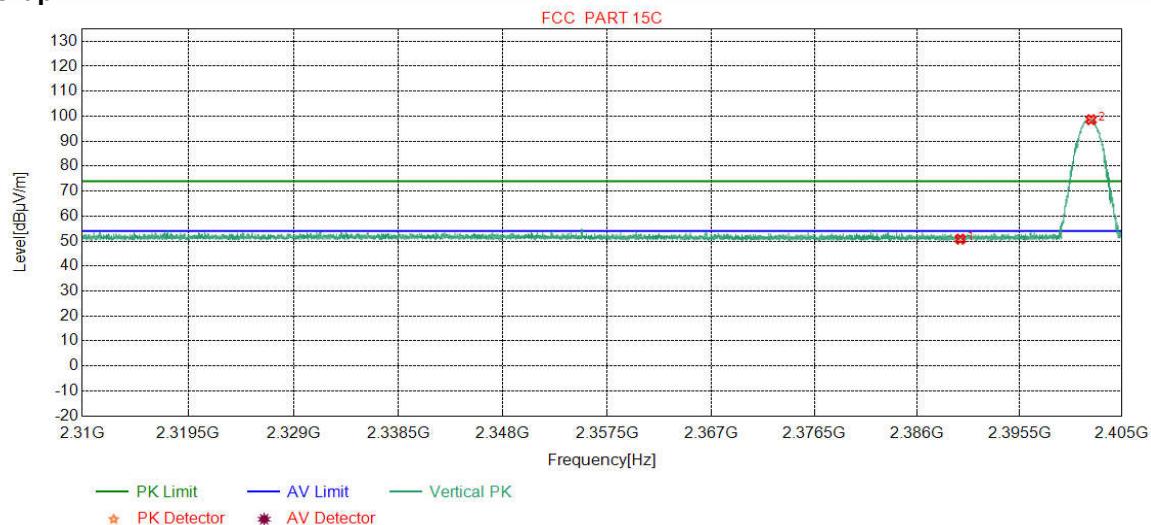

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	47.60	50.78	74.00	23.22	Pass	Vertical
2	2402.1435	32.26	13.31	-42.43	95.46	98.60	74.00	-24.60	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


**Test Graph**

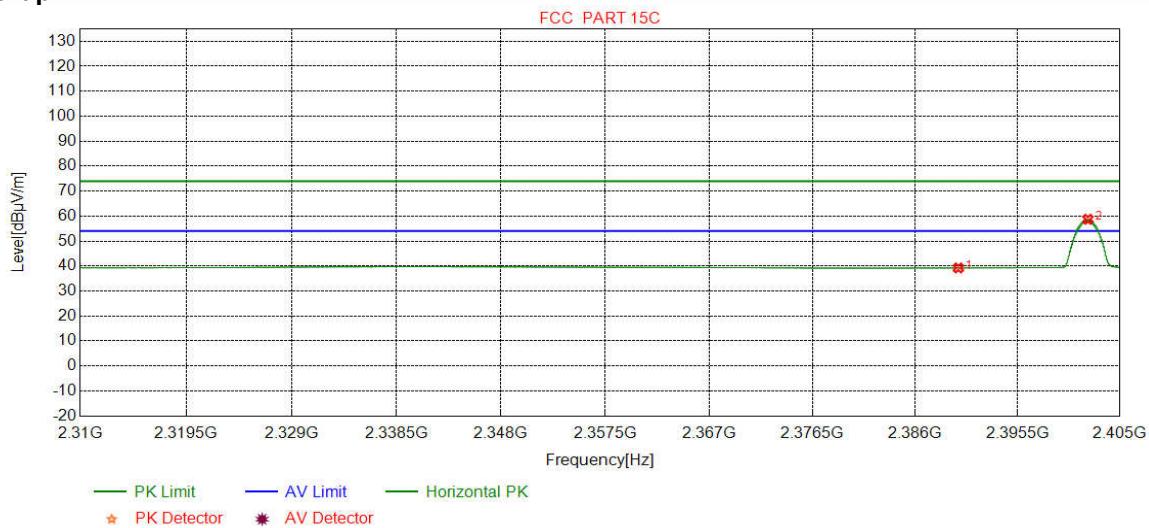

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	36.07	39.25	54.00	14.75	Pass	Horizontal
2	2402.0358	32.26	13.31	-42.43	55.58	58.72	54.00	-4.72	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


**Test Graph**

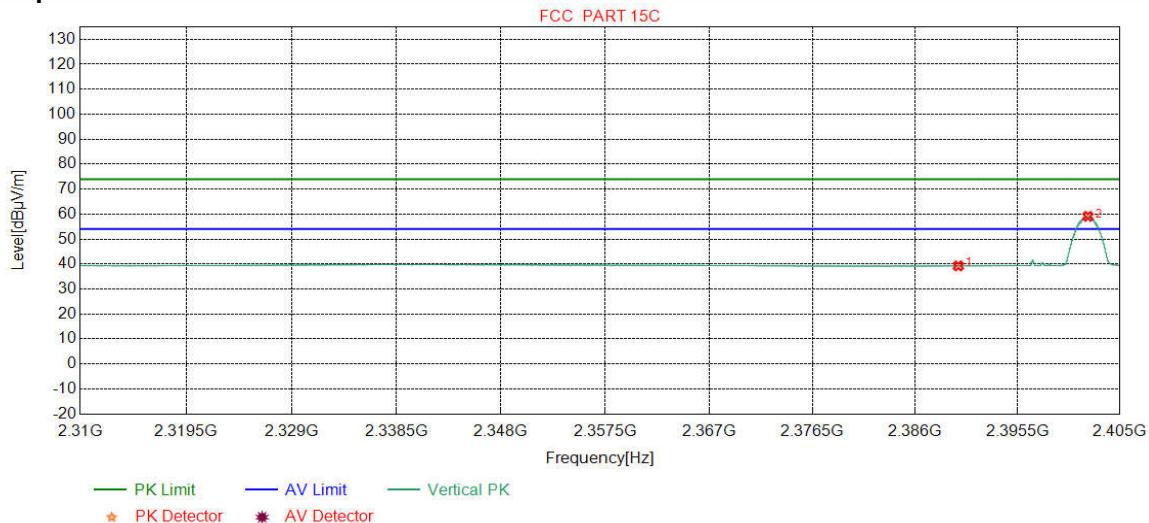

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	36.09	39.27	54.00	14.73	Pass	Vertical
2	2402.0358	32.26	13.31	-42.43	55.95	59.09	54.00	-5.09	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


**Test Graph**

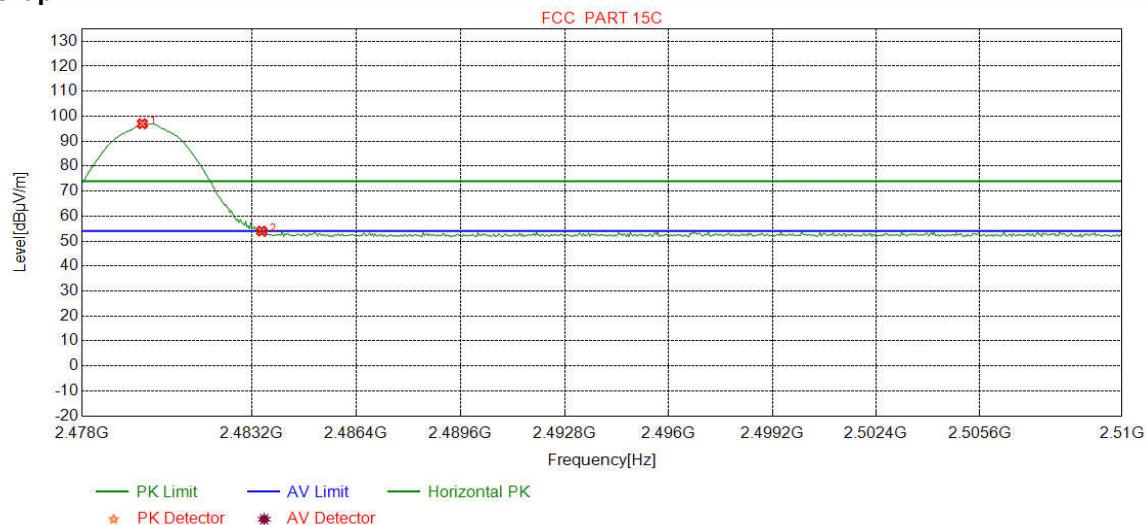

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2479.8423	32.37	13.39	-42.39	93.60	96.97	74.00	-22.97	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	50.65	54.01	74.00	19.99	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


**Test Graph**

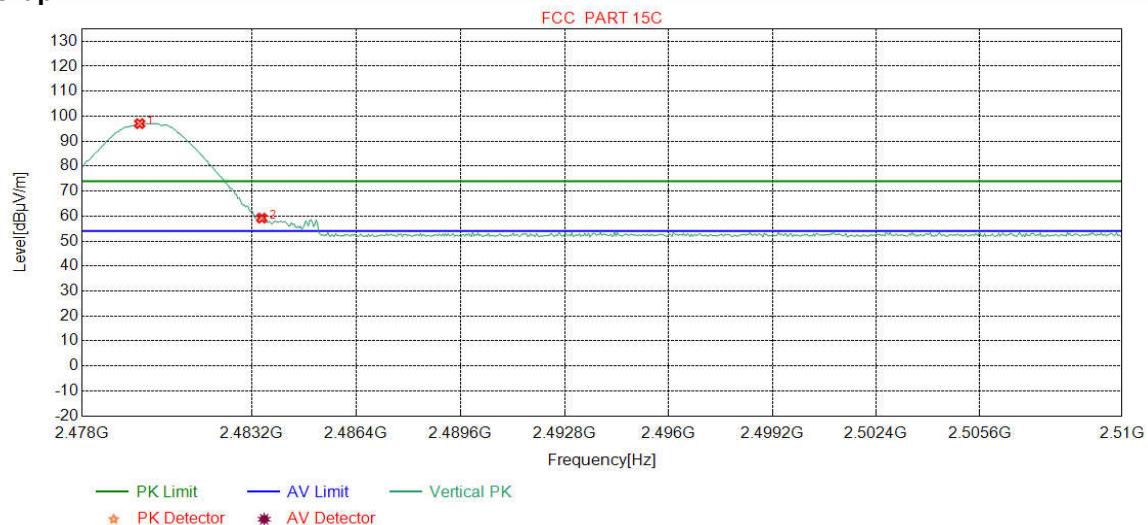

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2479.7622	32.37	13.39	-42.39	93.64	97.01	74.00	-23.01	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	55.83	59.19	74.00	14.81	Pass	Vertical


Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		

**Test Graph**

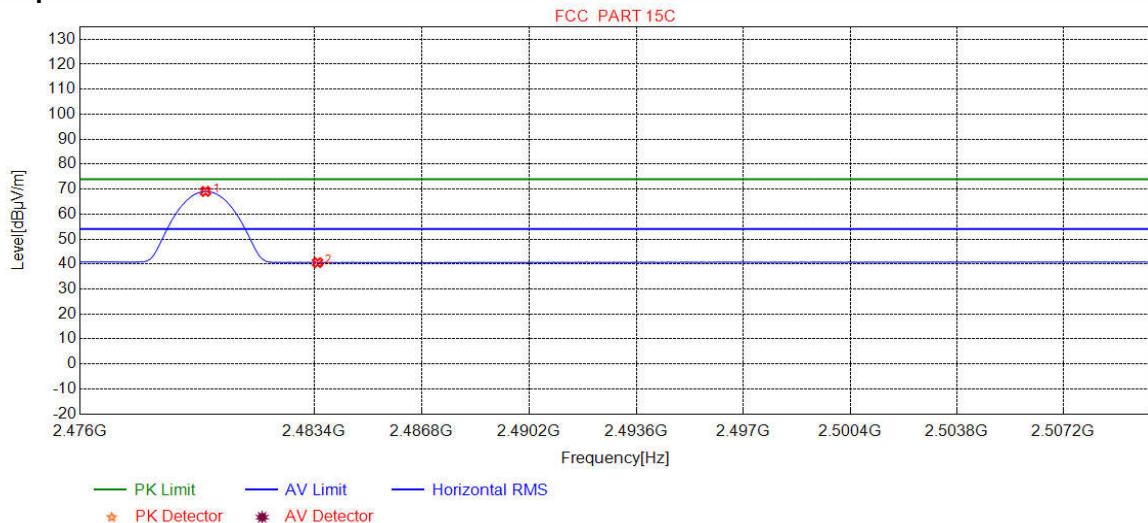

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2479.9574	32.37	13.39	-43.10	66.42	69.08	54.00	-15.08	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	37.93	40.58	54.00	13.42	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		

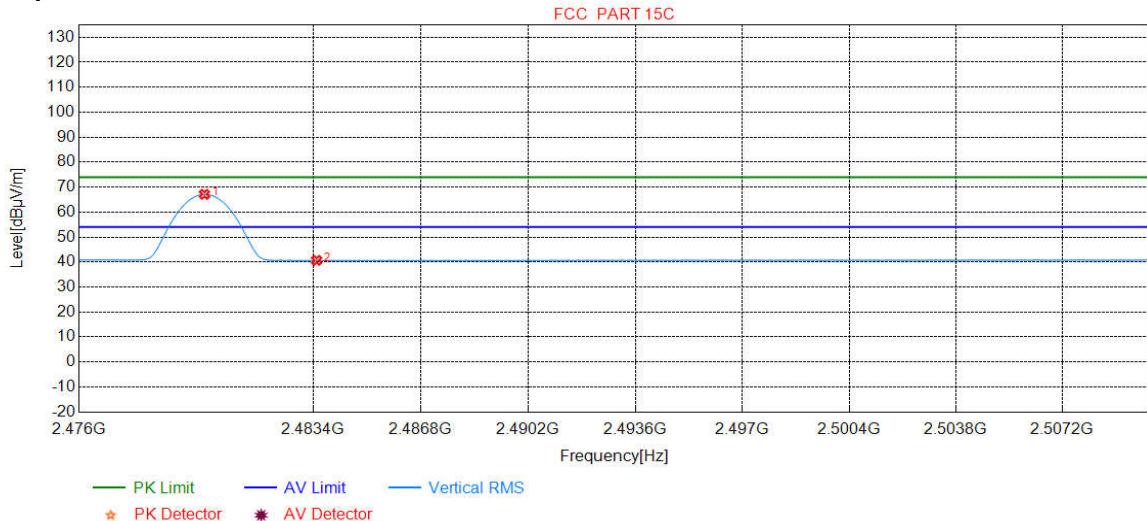**Test Graph**

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity
1	2479.9574	32.37	13.39	-43.10	64.45	67.11	54.00	-13.11	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	38.03	40.68	54.00	13.32	Pass	Vertical

**Note:**

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of  $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) As shown in this section, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

## Appendix L): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark					
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak					
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average					
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak					
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak					
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average					
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak					
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak					
	Above 1GHz	Peak	1MHz	3MHz	Peak					
		Peak	1MHz	10Hz	Average					
Test Procedure:										
<b>Below 1GHz test procedure as below:</b>										
a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.										
<b>Above 1GHz test procedure as below:</b>										
g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter). h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.										
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)					
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300					
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30					
	1.705MHz-30MHz	30	-	-	30					
	30MHz-88MHz	100	40.0	Quasi-peak	3					
	88MHz-216MHz	150	43.5	Quasi-peak	3					
	216MHz-960MHz	200	46.0	Quasi-peak	3					
	960MHz-1GHz	500	54.0	Quasi-peak	3					
	Above 1GHz	500	54.0	Average	3					
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.										

**Radiated Spurious Emissions test Data:  
Radiated Emission below 1GHz**

Mode:			8DPSK Transmitting					Channel:		2440	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	71.8112	8.66	0.97	-32.06	34.26	11.83	40.00	28.17	Pass	H	PK
2	130.3080	7.68	1.33	-32.01	35.50	12.50	43.50	31.00	Pass	H	PK
3	240.0260	11.94	1.84	-31.90	36.54	18.42	46.00	27.58	Pass	H	PK
4	325.0065	13.75	2.14	-31.79	38.63	22.73	46.00	23.27	Pass	H	PK
5	600.0290	19.00	2.96	-31.99	42.06	32.03	46.00	13.97	Pass	H	PK
6	974.9715	22.55	3.75	-30.95	43.27	38.62	54.00	15.38	Pass	H	PK
7	54.6405	12.46	0.84	-32.09	39.94	21.15	40.00	18.85	Pass	V	PK
8	130.0170	7.70	1.33	-32.02	40.78	17.79	43.50	25.71	Pass	V	PK
9	184.3424	9.41	1.59	-31.98	45.79	24.81	43.50	18.69	Pass	V	PK
10	325.0065	13.75	2.14	-31.79	38.15	22.25	46.00	23.75	Pass	V	PK
11	600.0290	19.00	2.96	-31.99	42.30	32.27	46.00	13.73	Pass	V	PK
12	974.9715	22.55	3.75	-30.95	42.34	37.69	54.00	16.31	Pass	V	PK

**Transmitter Emission above 1GHz**

Mode:			GFSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	3588.0392	33.47	4.36	-41.63	50.36	46.56	74.00	27.44	Pass	H	PK
2	4804.0000	34.50	4.55	-40.66	48.81	47.20	74.00	26.80	Pass	H	PK
3	5961.1974	35.74	5.32	-41.05	49.92	49.93	74.00	24.07	Pass	H	PK
4	7206.0000	36.31	5.81	-41.02	48.57	49.67	74.00	24.33	Pass	H	PK
5	9608.0000	37.64	6.63	-40.76	47.64	51.15	74.00	22.85	Pass	H	PK
6	12010.0000	39.31	7.60	-41.21	45.76	51.46	74.00	22.54	Pass	H	PK
7	2076.9077	31.81	3.57	-42.58	51.09	43.89	74.00	30.11	Pass	V	PK
8	3928.0619	33.74	4.34	-40.93	50.48	47.63	74.00	26.37	Pass	V	PK
9	4804.0000	34.50	4.55	-40.66	49.97	48.36	74.00	25.64	Pass	V	PK
10	7206.0000	36.31	5.81	-41.02	47.40	48.50	74.00	25.50	Pass	V	PK
11	9608.0000	37.64	6.63	-40.76	46.93	50.44	74.00	23.56	Pass	V	PK
12	12010.0000	39.31	7.60	-41.21	46.62	52.32	74.00	21.68	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1711.4711	29.80	3.21	-42.67	51.48	41.82	74.00	32.18	Pass	H	PK
2	3856.0571	33.68	4.36	-41.08	50.80	47.76	74.00	26.24	Pass	H	PK
3	4882.0000	34.50	4.81	-40.60	47.10	45.81	74.00	28.19	Pass	H	PK
4	7323.0000	36.42	5.85	-40.92	46.53	47.88	74.00	26.12	Pass	H	PK
5	9764.0000	37.71	6.71	-40.62	47.58	51.38	74.00	22.62	Pass	H	PK
6	12205.0000	39.42	7.67	-41.16	45.74	51.67	74.00	22.33	Pass	H	PK
7	1362.2362	28.26	2.84	-42.72	51.32	39.70	74.00	34.30	Pass	V	PK
8	3071.0047	33.23	4.78	-42.08	50.20	46.13	74.00	27.87	Pass	V	PK
9	4882.0000	34.50	4.81	-40.60	47.19	45.90	74.00	28.10	Pass	V	PK
10	7323.0000	36.42	5.85	-40.92	47.36	48.71	74.00	25.29	Pass	V	PK
11	9764.0000	37.71	6.71	-40.62	46.88	50.68	74.00	23.32	Pass	V	PK
12	12205.0000	39.42	7.67	-41.16	46.61	52.54	74.00	21.46	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	1960.6961	31.44	3.43	-42.63	51.62	43.86	74.00	30.14	Pass	H	PK
2	4157.0771	34.02	4.51	-40.83	49.32	47.02	74.00	26.98	Pass	H	PK
3	4960.0000	34.50	4.82	-40.53	51.50	50.29	74.00	23.71	Pass	H	PK
4	7440.0000	36.54	5.85	-40.82	46.88	48.45	74.00	25.55	Pass	H	PK
5	9920.0000	37.77	6.79	-40.48	45.39	49.47	74.00	24.53	Pass	H	PK
6	12400.0000	39.54	7.86	-41.12	46.57	52.85	74.00	21.15	Pass	H	PK
7	1921.6922	31.18	3.42	-42.65	51.51	43.46	74.00	30.54	Pass	V	PK
8	4591.1061	34.50	5.00	-40.84	50.03	48.69	74.00	25.31	Pass	V	PK
9	4960.0000	34.50	4.82	-40.53	50.92	49.71	74.00	24.29	Pass	V	PK
10	7440.0000	36.54	5.85	-40.82	46.61	48.18	74.00	25.82	Pass	V	PK
11	9920.0000	37.77	6.79	-40.48	46.39	50.47	74.00	23.53	Pass	V	PK
12	12400.0000	39.54	7.86	-41.12	46.75	53.03	74.00	20.97	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	3914.0609	33.73	4.34	-40.96	50.55	47.66	74.00	26.34	Pass	H	PK
2	4804.0000	34.50	4.55	-40.66	47.40	45.79	74.00	28.21	Pass	H	PK
3	6478.2319	35.90	5.49	-41.19	49.97	50.17	74.00	23.83	Pass	H	PK
4	7206.0000	36.31	5.81	-41.02	48.82	49.92	74.00	24.08	Pass	H	PK
5	9608.0000	37.64	6.63	-40.76	48.80	52.31	74.00	21.69	Pass	H	PK
6	12010.0000	39.31	7.60	-41.21	45.36	51.06	74.00	22.94	Pass	H	PK
7	2027.1027	31.74	3.52	-42.60	51.28	43.94	74.00	30.06	Pass	V	PK
8	4804.0000	34.50	4.55	-40.66	49.27	47.66	74.00	26.34	Pass	V	PK
9	5583.1722	35.13	5.11	-40.71	50.12	49.65	74.00	24.35	Pass	V	PK
10	7206.0000	36.31	5.81	-41.02	46.83	47.93	74.00	26.07	Pass	V	PK
11	9608.0000	37.64	6.63	-40.76	47.60	51.11	74.00	22.89	Pass	V	PK
12	12010.0000	39.31	7.60	-41.21	46.40	52.10	74.00	21.90	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	4882.0000	34.50	4.81	-40.60	47.25	45.96	74.00	28.04	Pass	H	PK
2	5619.1746	35.19	5.04	-40.74	51.21	50.70	74.00	23.30	Pass	H	PK
3	6452.2301	35.89	5.52	-41.18	49.70	49.93	74.00	24.07	Pass	H	PK
4	7323.0000	36.42	5.85	-40.92	46.72	48.07	74.00	25.93	Pass	H	PK
5	9764.0000	37.71	6.71	-40.62	46.81	50.61	74.00	23.39	Pass	H	PK
6	12205.0000	39.42	7.67	-41.16	45.42	51.35	74.00	22.65	Pass	H	PK
7	1881.8882	30.92	3.41	-42.67	50.73	42.39	74.00	31.61	Pass	V	PK
8	4164.0776	34.03	4.50	-40.82	49.70	47.41	74.00	26.59	Pass	V	PK
9	4882.0000	34.50	4.81	-40.60	48.01	46.72	74.00	27.28	Pass	V	PK
10	7323.0000	36.42	5.85	-40.92	47.10	48.45	74.00	25.55	Pass	V	PK
11	9764.0000	37.71	6.71	-40.62	48.04	51.84	74.00	22.16	Pass	V	PK
12	12205.0000	39.42	7.67	-41.16	45.27	51.20	74.00	22.80	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB $\mu$ V]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Result	Polarity	Remark
1	2062.7063	31.79	3.57	-42.59	51.37	44.14	74.00	29.86	Pass	H	PK
2	4960.0000	34.50	4.82	-40.53	48.47	47.26	74.00	26.74	Pass	H	PK
3	5594.1729	35.15	5.10	-40.73	49.73	49.25	74.00	24.75	Pass	H	PK
4	7440.0000	36.54	5.85	-40.82	46.86	48.43	74.00	25.57	Pass	H	PK
5	9920.0000	37.77	6.79	-40.48	45.65	49.73	74.00	24.27	Pass	H	PK
6	12400.0000	39.54	7.86	-41.12	47.14	53.42	74.00	20.58	Pass	H	PK
7	3288.0192	33.32	4.55	-41.95	50.32	46.24	74.00	27.76	Pass	V	PK
8	3837.0558	33.67	4.36	-41.12	50.43	47.34	74.00	26.66	Pass	V	PK
9	4960.0000	34.50	4.82	-40.53	48.66	47.45	74.00	26.55	Pass	V	PK
10	7440.0000	36.54	5.85	-40.82	47.16	48.73	74.00	25.27	Pass	V	PK
11	9920.0000	37.77	6.79	-40.48	45.21	49.29	74.00	24.71	Pass	V	PK
12	12400.0000	39.54	7.86	-41.12	47.11	53.39	74.00	20.61	Pass	V	PK

## Note:

- 1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of  $\pi/4$ DQPSK modulation type, he 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.
- 2) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.
- 3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

- 4) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.