


MBC-10 15W用户手册 (产品说明书)

尺寸: 350*100mm 双面印刷

User Manual

Motorcycle Phone Holder Magnetic Wireless Power Bank

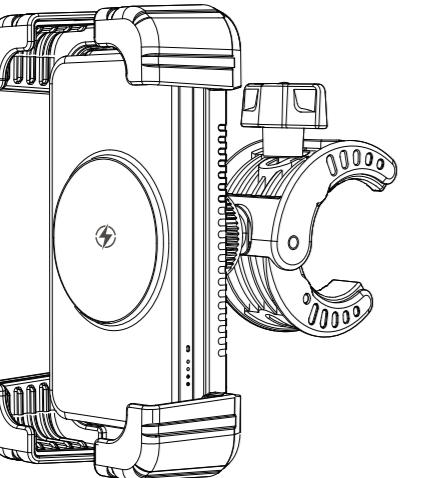


Product Features

1. This is a 5000mAh magnetic wireless charger power bank. There are 4 magnets between the power bank and car mount, the power bank is dismountable and can be used separately.
2. The power bank supports wireless charging for mobile phones. The Type-C charging port of the power bank support input and output at the same time.
3. The car mount is adjustable, bottom clips and upper clips are equipped with anti-slip silicone. Adjust the orange button on the back to lock the clips.
4. The product supports dustproof and waterproof. (IP65)
5. Standby mode: When removing the charging cable or pressing the power button, the power indicator light will show the power percentage, then turn off after 32±3 seconds if not discharged.
6. Charging mode: The power indicator lights will breathe and increase in sequence to 4, then remain on when full.
7. Discharging mode: The power indicator (White light) will turn on, decrease in sequence to 1, then flash. After powering off due to low power, use the charging function again, 1 power indicator light will flash to remind low power. The blue light keeps on when the wireless charging is normal, and flashes when abnormal. Double-click the power button to turn off the discharge function and support automatic wake-up.
8. Perfect protective function based on over-voltage, over-current, over-temperature and short-circuit protection.


Specifications

USB-C Input	DC5V=3A 9V=1.67A
USB-C Output	DC5V=3A 9V=2.22A 12V=1.67A (20W MAX)
Wireless output	15W(EPP)/10W/7.5W/5W
Capacity	5000mAh /3.7V (18.5Wh)
Rated capacity	2900mAh (5V/2A Discharge)
Product Standard	Qi
Charging Distance	≤3mm
Charging Efficiency	≤70%
Product Dimension	97.4*158.6*68.6mm
Product Material	ABS+PC

Product Parts Description 1-1

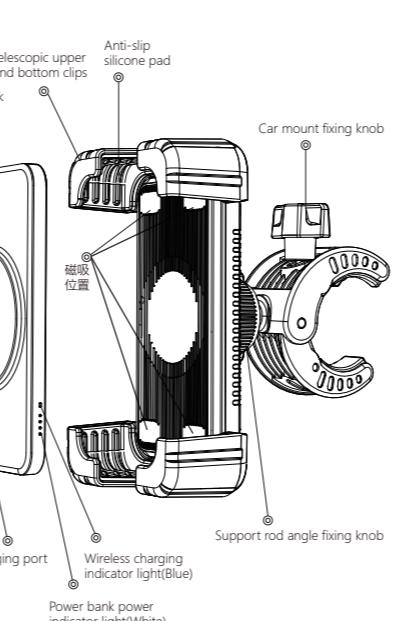

Product Parts Description 1-2

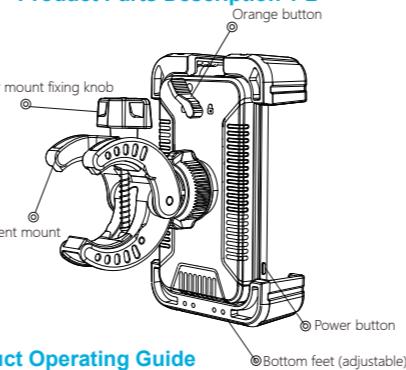

Product Operating Guide

1. Before using, please check whether the power bank has power, or connect it to the power source.
2. After powering on, press the button and the power indicator light will display the power percentage. When wireless charging phone, the blue indicator light at the top will be on.
3. When putting phone in the car holder, the upper and lower clips will automatically clamp. Rotate the orange button on the back to lock the clips. If you need to take out the phone, rotate the button to unlock it and take it out.
4. This device is not equipped with a wireless charging receiver. If your phone does not support wireless charging, please purchase a wireless receiver suitable for your phone, or use this product for wired charging.
5. The power bank and the mobile phone holder can be used separately without affecting each other.

Attention

1. Please do not vigorously extrude or collide.
2. Please do not dismantle or put it into fire or water when the product is power on, to avoid short circuit or leakage.
3. Please do not use it in severely high temperature, high humidity or corrosive environment, to avoid damage to the circuit leakage.
4. Please do not put the magnetic strip or chip card (Such as ID card, bankcard etc.) on the charging pad to avoid to cause magnetic card lose efficacy.
5. Please do not put the metal (Such as coin etc.) on the charging pad when charging, to avoid damage from heating.

If use a power adapter to supply power, please purchase a meeting standard requirements power adapter with CCC certification.

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC RF exposure statement:
The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.