

Appendix: 2.4GHz Wi-Fi

Contents

Duty Cycle 3

Maximum Peak Conducted Output Power 22

-6dB Bandwidth 24

Occupied Channel Bandwidth 43


Maximum Power Spectral Density Level 62

Band Edge 94


Conducted RF Spurious Emission 119

Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	99.64	0	0.51
NVNT	b	2437	Ant1	99.64	0	0.51
NVNT	b	2462	Ant1	99.64	0	0.51
NVNT	b	2412	Ant2	99.64	0	0.51
NVNT	b	2437	Ant2	99.69	0	0.51
NVNT	b	2462	Ant2	99.64	0	0.51
NVNT	g	2412	Ant1	98.11	0	2.97
NVNT	g	2437	Ant1	98.11	0	2.97
NVNT	g	2462	Ant1	98.11	0	2.97
NVNT	g	2412	Ant2	97.96	0.09	2.97
NVNT	g	2437	Ant2	97.96	0.09	2.97
NVNT	g	2462	Ant2	98.11	0	2.97
NVNT	n20	2412	Ant1	97.89	0.09	3.08
NVNT	n20	2437	Ant1	98.04	0	3.08
NVNT	n20	2462	Ant1	98.04	0	3.08
NVNT	n20	2412	Ant2	98.04	0	3.08
NVNT	n20	2437	Ant2	97.89	0.09	3.08
NVNT	n20	2462	Ant2	98.04	0	3.08
NVNT	n40	2422	Ant1	96.59	0.15	5.64
NVNT	n40	2437	Ant1	96.59	0.15	5.64
NVNT	n40	2452	Ant1	96.59	0.15	5.64
NVNT	n40	2422	Ant2	96.46	0.16	5.65
NVNT	n40	2437	Ant2	99.51	0	6.53
NVNT	n40	2452	Ant2	96.59	0.15	5.64
NVNT	ax20	2412	Ant1	97.51	0.11	3.65
NVNT	ax20	2437	Ant1	97.51	0.11	3.65
NVNT	ax20	2462	Ant1	97.51	0.11	3.65
NVNT	ax20	2412	Ant2	99.65	0	7.01
NVNT	ax20	2437	Ant2	94.94	0.23	7.89
NVNT	ax20	2462	Ant2	94.77	0.23	7.89
NVNT	ax40	2422	Ant1	96.37	0.16	6.02
NVNT	ax40	2437	Ant1	96.37	0.16	6.02
NVNT	ax40	2452	Ant1	96.23	0.17	6.03
NVNT	ax40	2422	Ant2	96.23	0.17	6.02
NVNT	ax40	2437	Ant2	96.37	0.16	6.02
NVNT	ax40	2452	Ant2	96.23	0.17	6.03

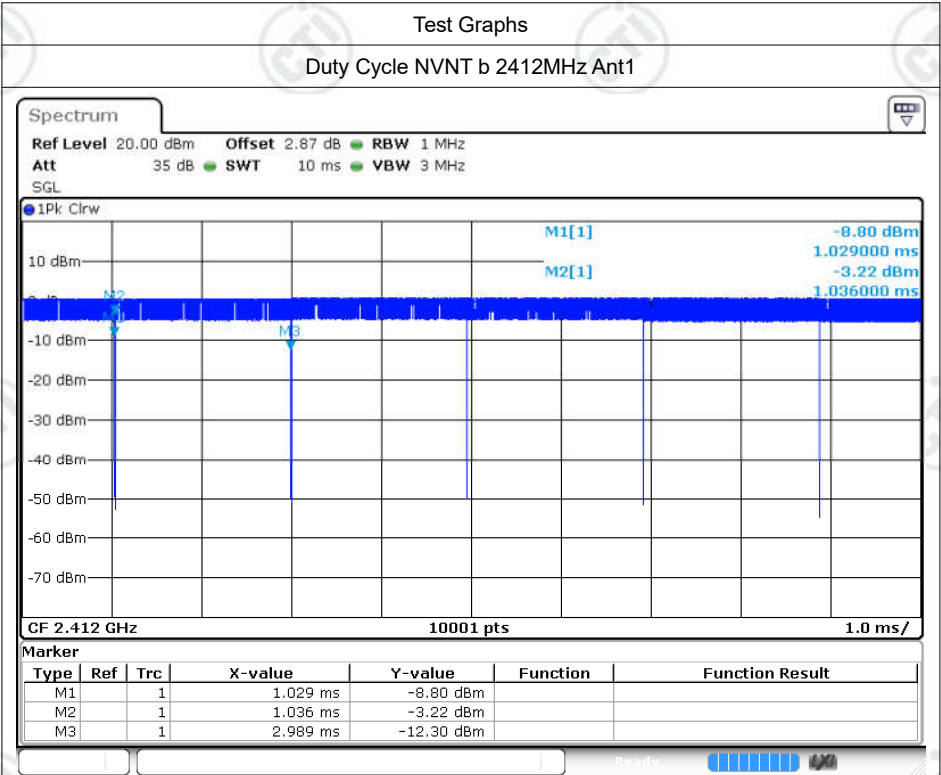


Date: 14.FEB.2025 14:16:41

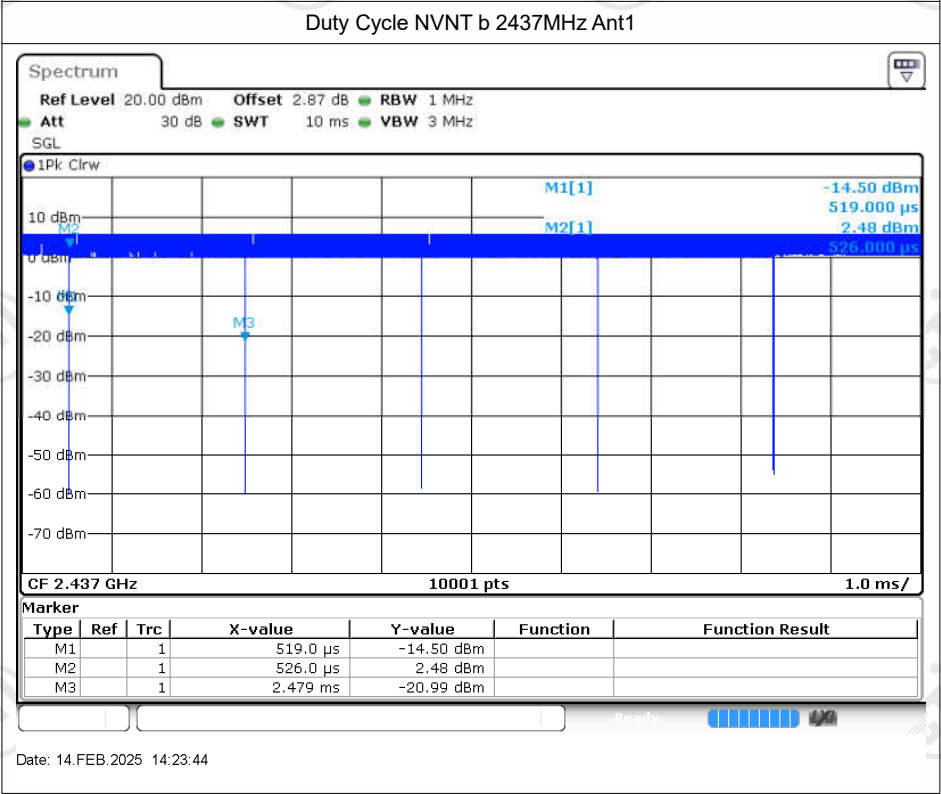


Date: 14.FEB.2025 14:23:44

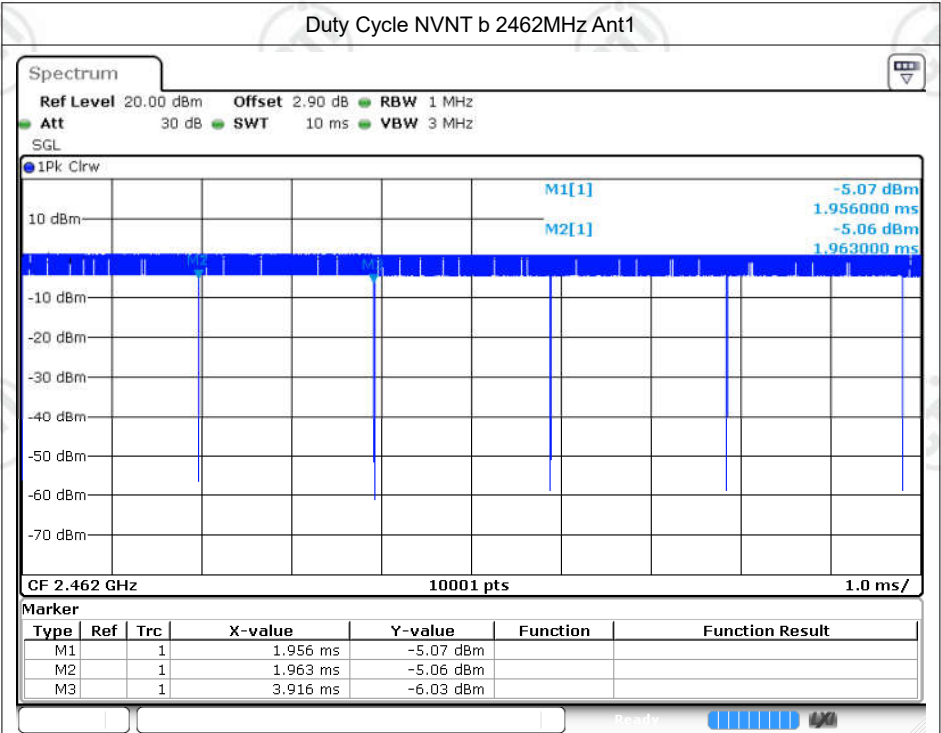


Date: 14.FEB.2025 14:25:30

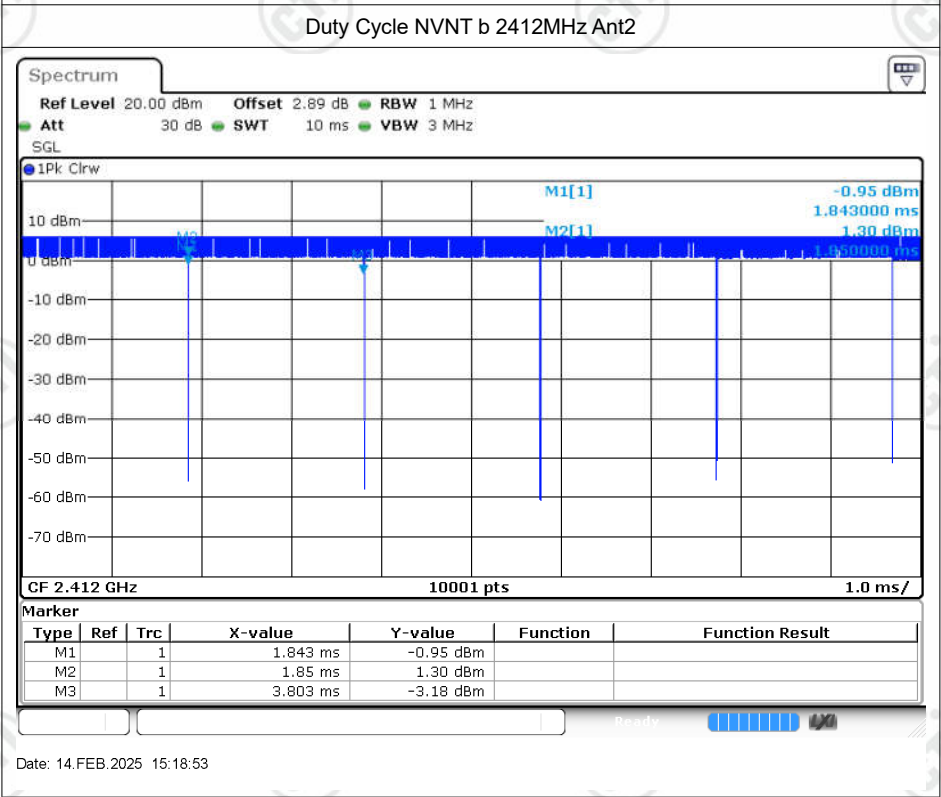


Date: 14.FEB.2025 15:18:53

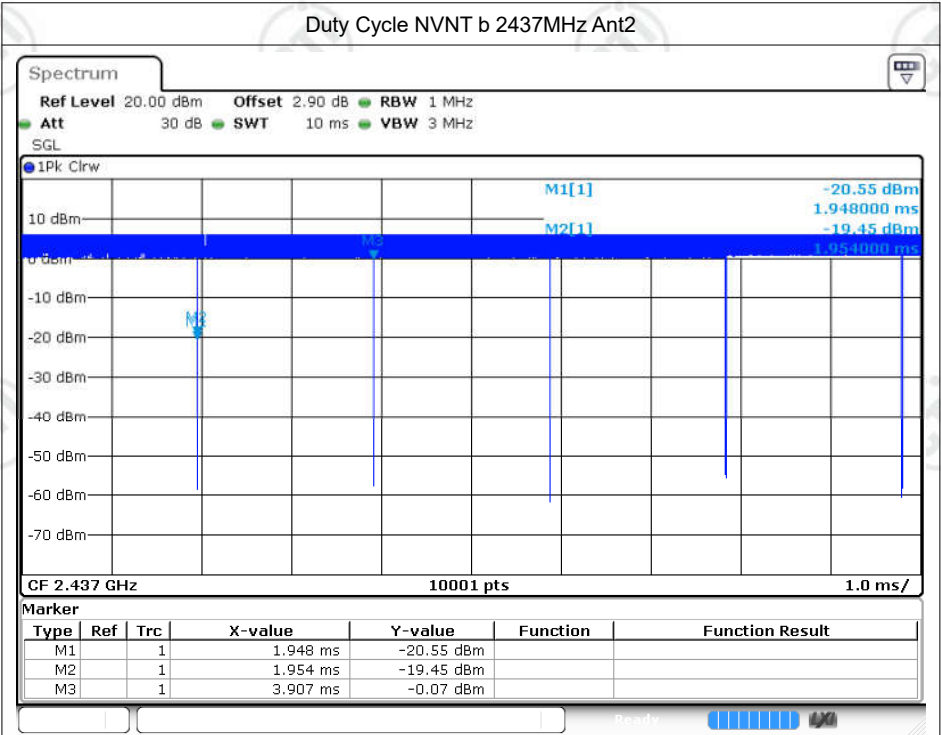


Date: 14.FEB.2025 15:21:14

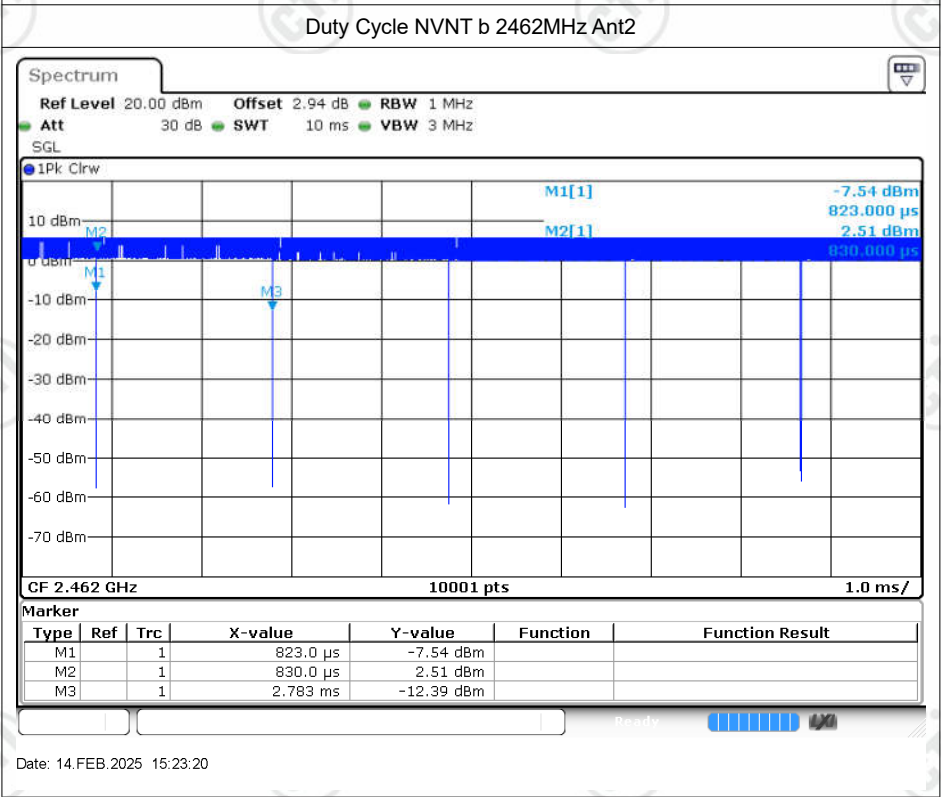


Date: 14.FEB.2025 15:23:20

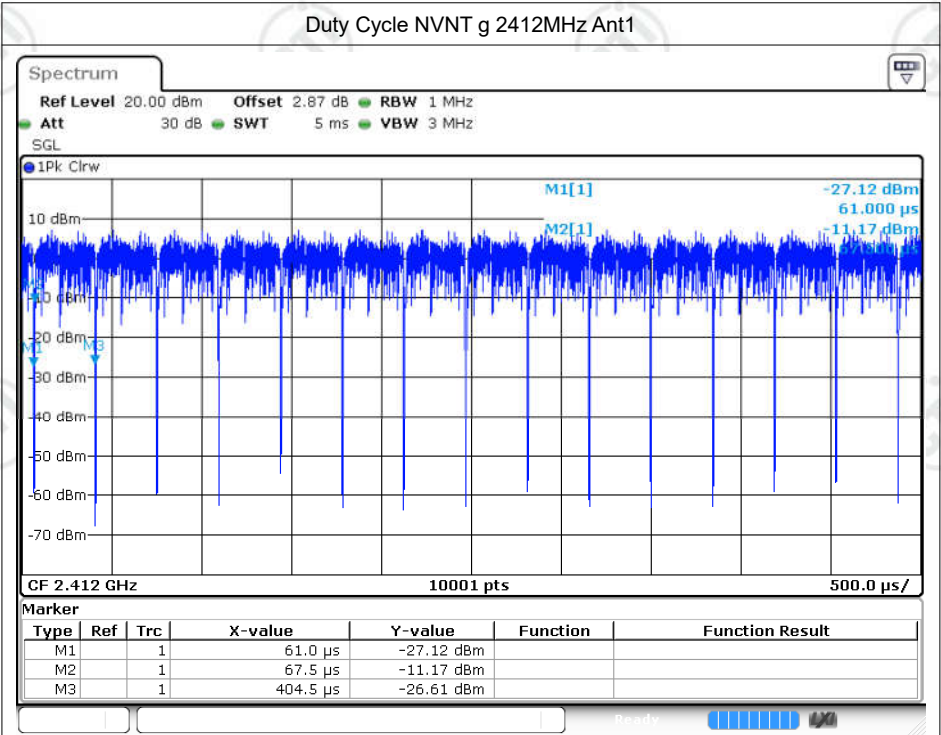


Date: 14.FEB.2025 14:30:12

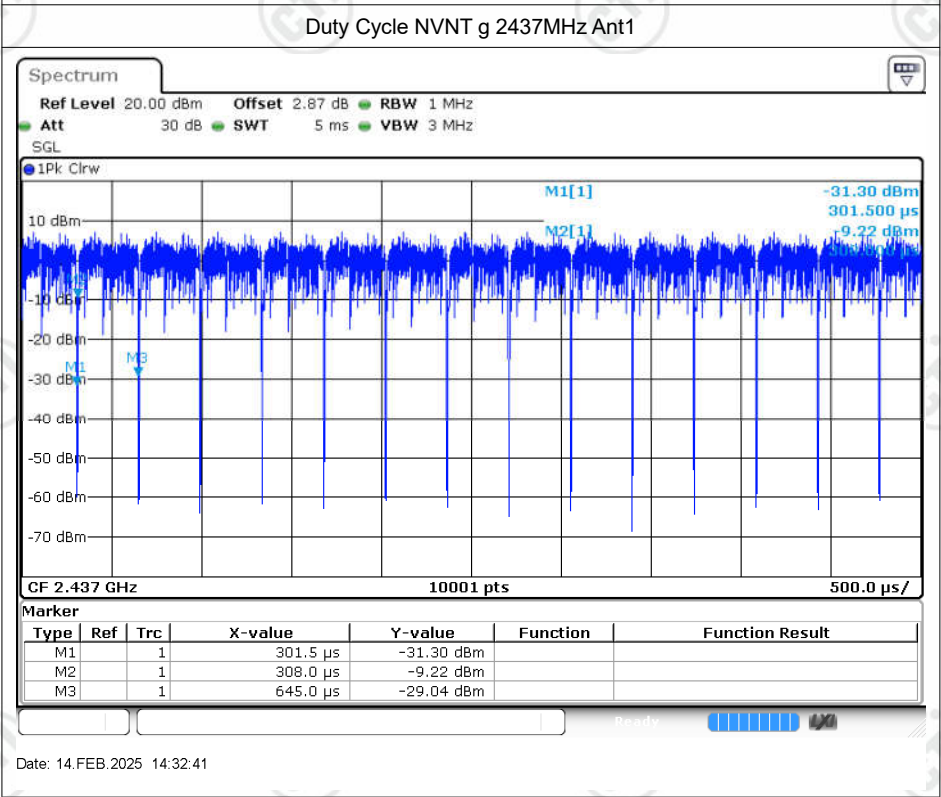


Date: 14.FEB.2025 14:32:41

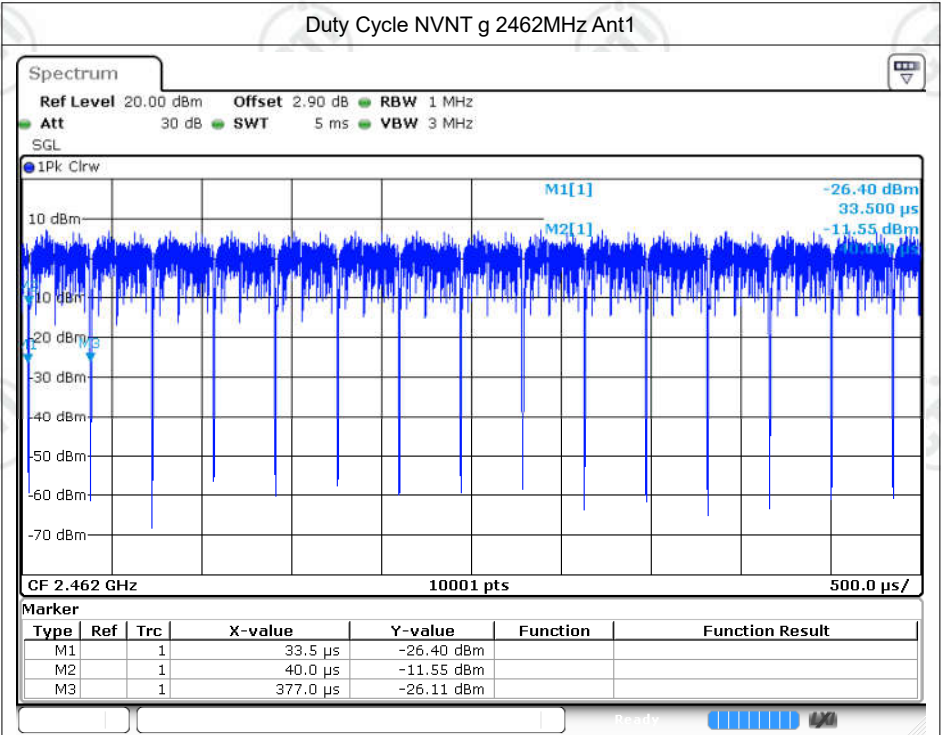


Date: 14.FEB.2025 14:35:00

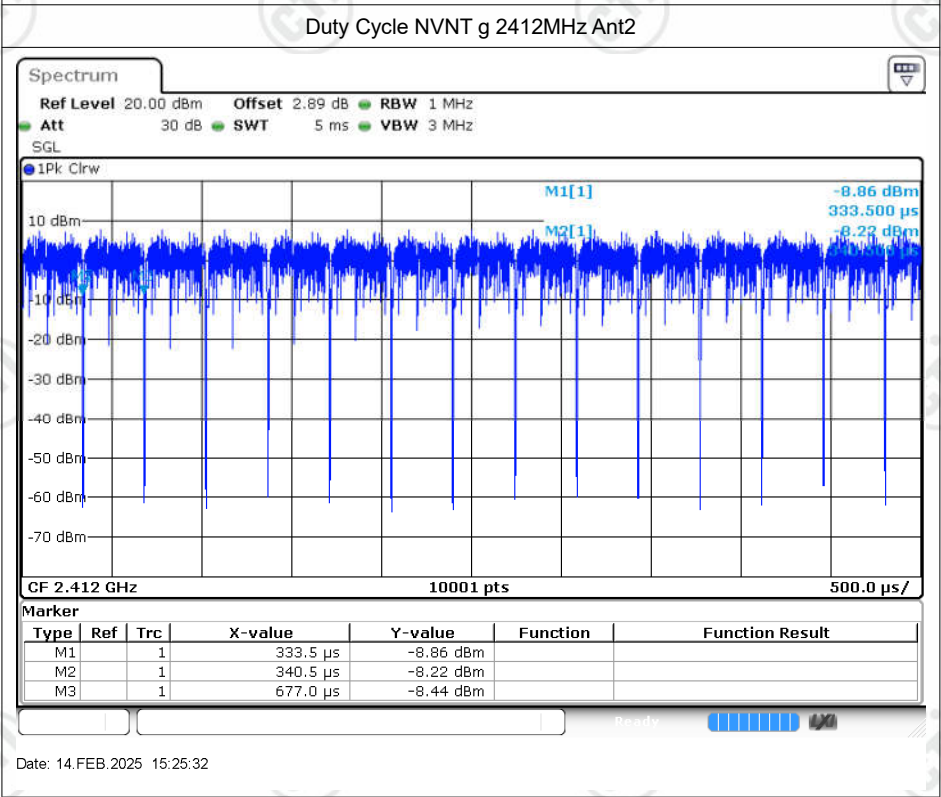


Date: 14.FEB.2025 15:25:32

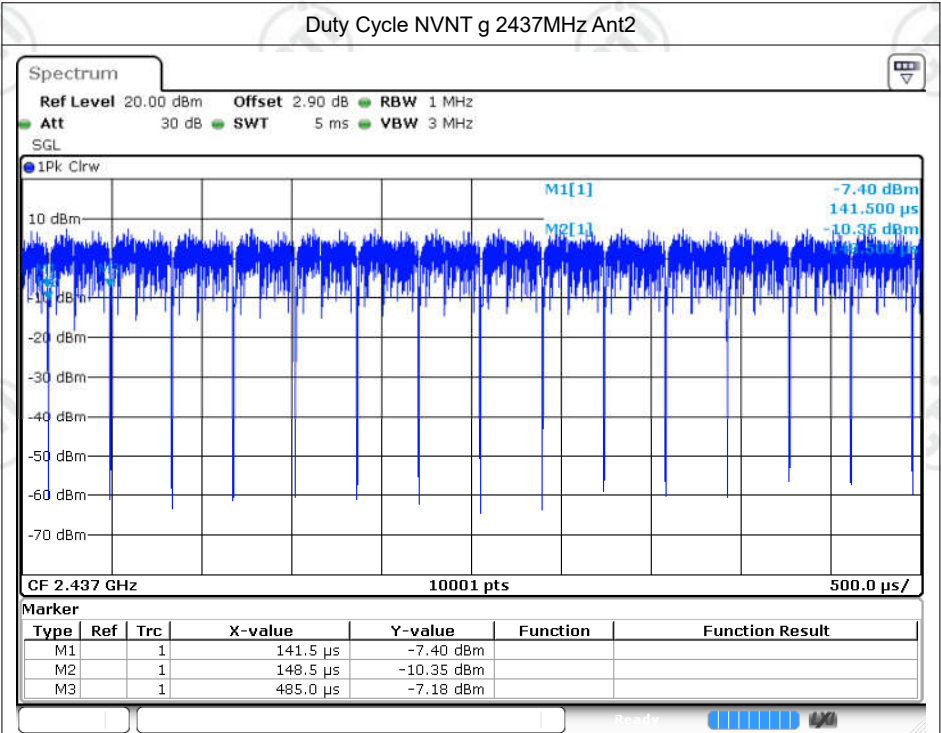


Date: 14.FEB.2025 15:31:30

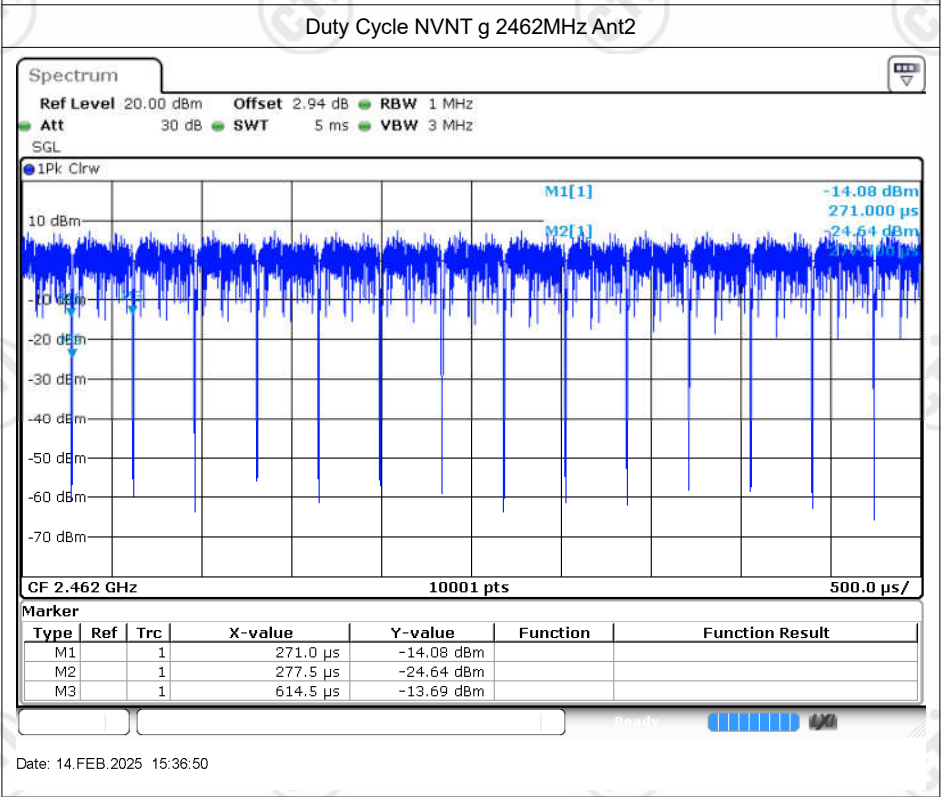


Date: 14.FEB.2025 15:36:50

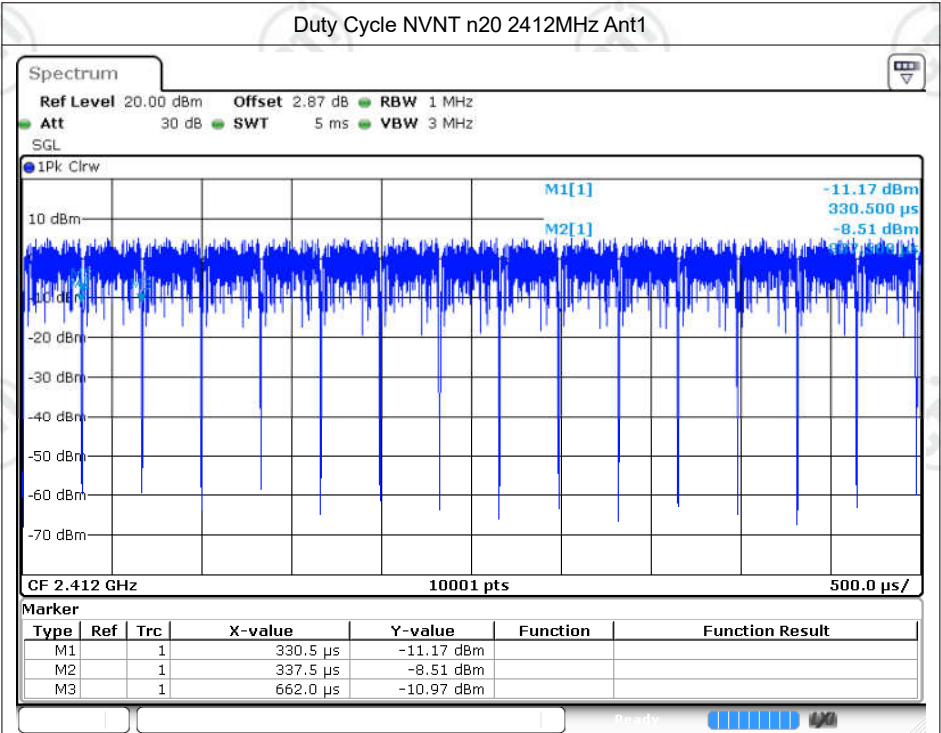


Date: 14.FEB.2025 14:37:18

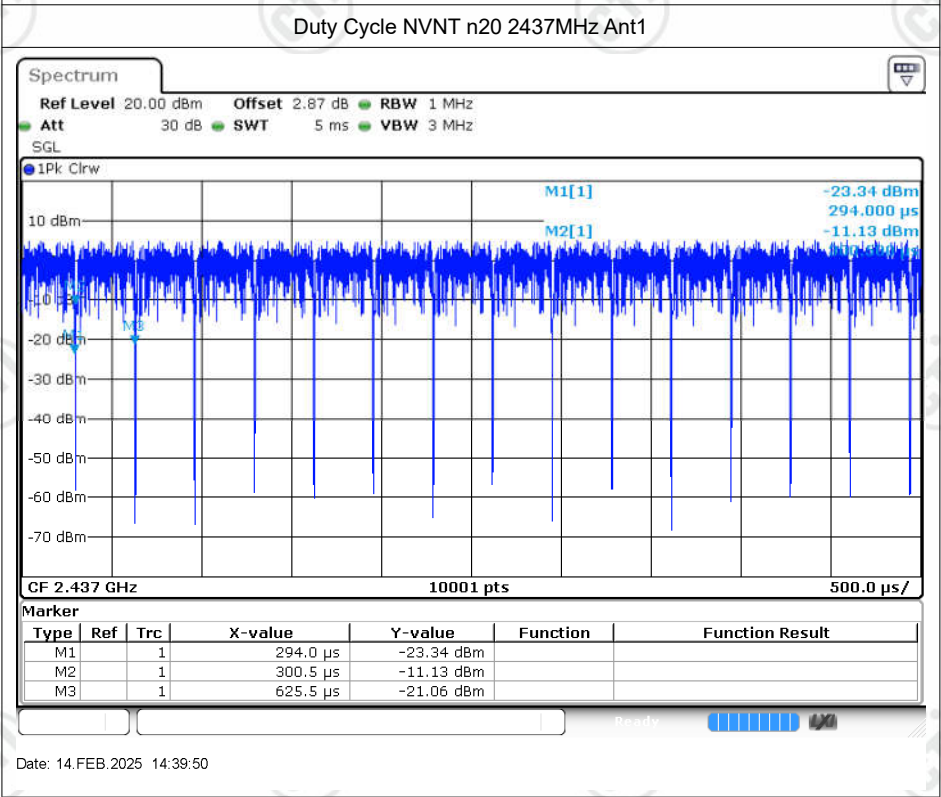


Date: 14.FEB.2025 14:39:50

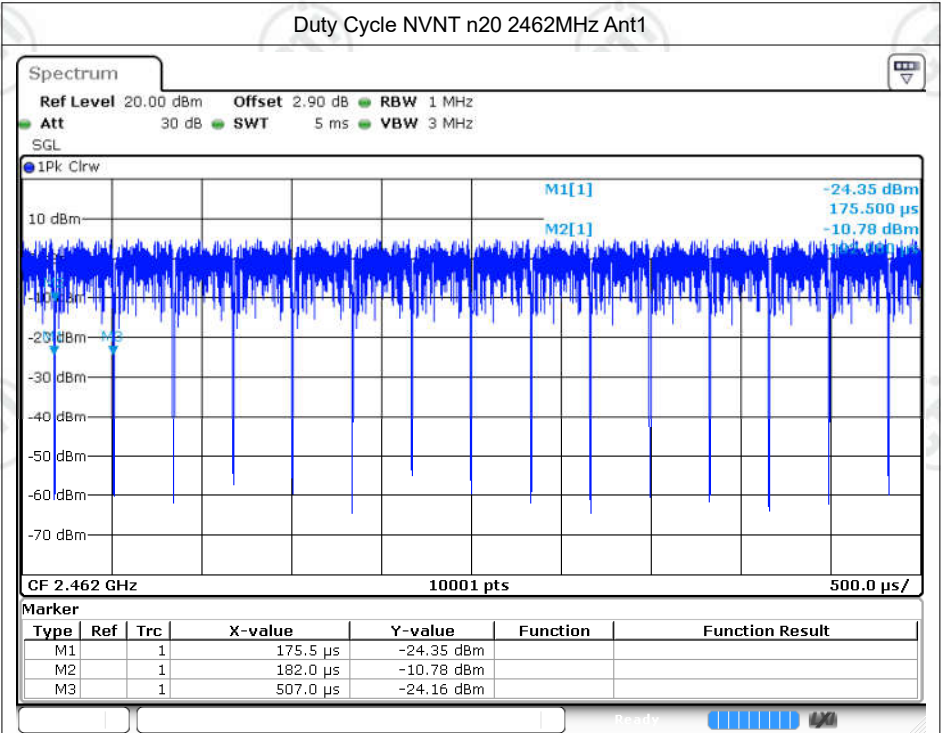


Date: 14.FEB.2025 14:42:53

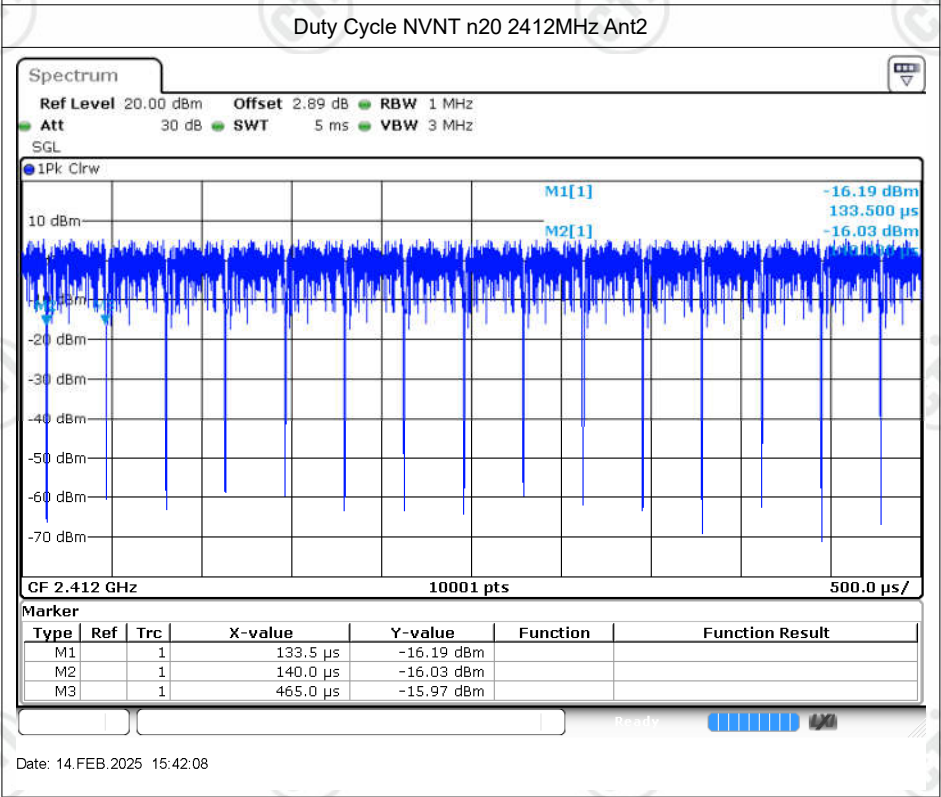


Date: 14.FEB.2025 15:42:08

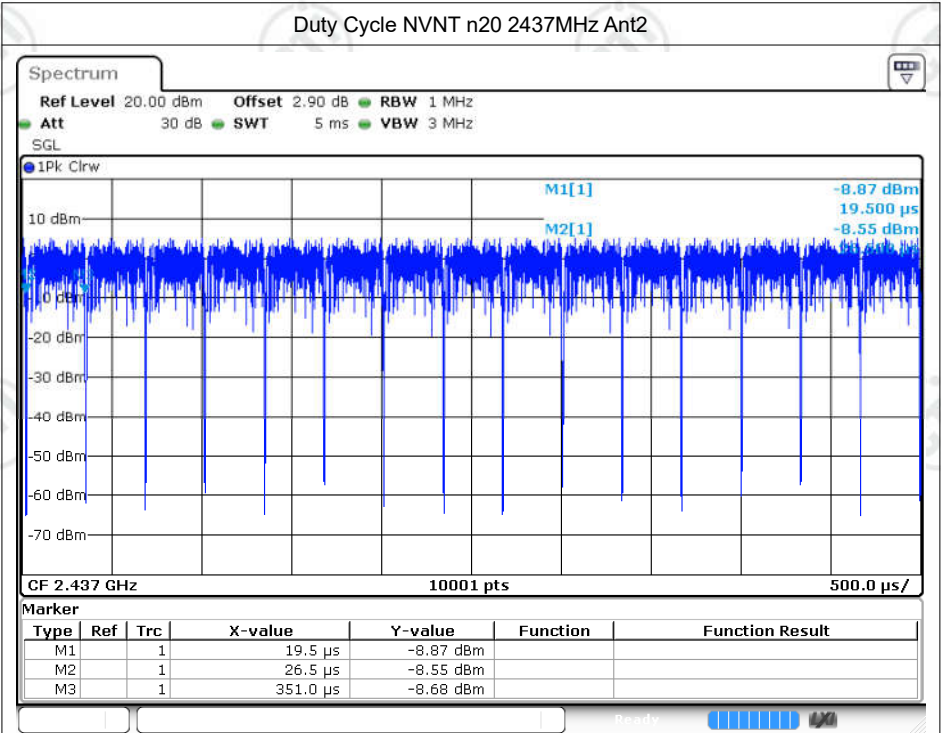


Date: 14.FEB.2025 15:44:53

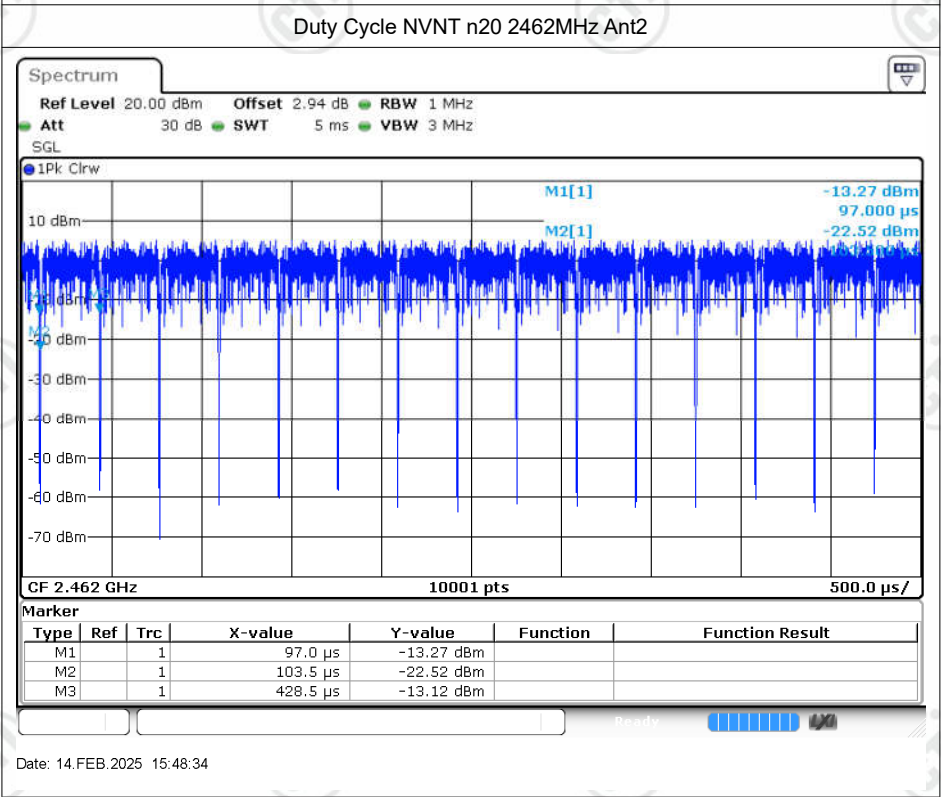


Date: 14.FEB.2025 15:48:34

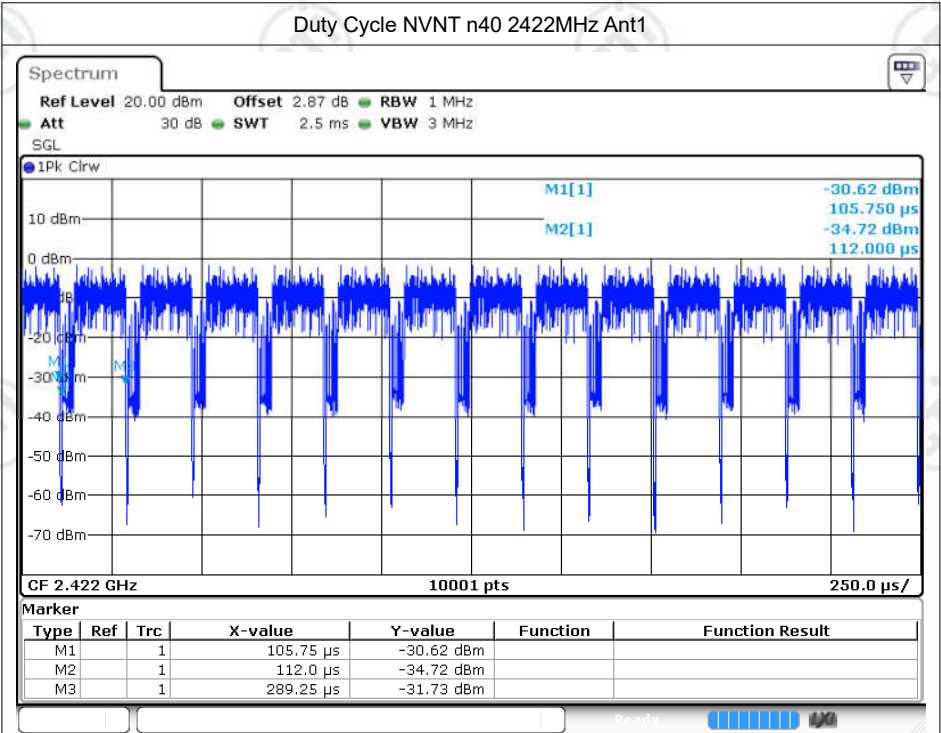


Date: 14.FEB.2025 14:48:36

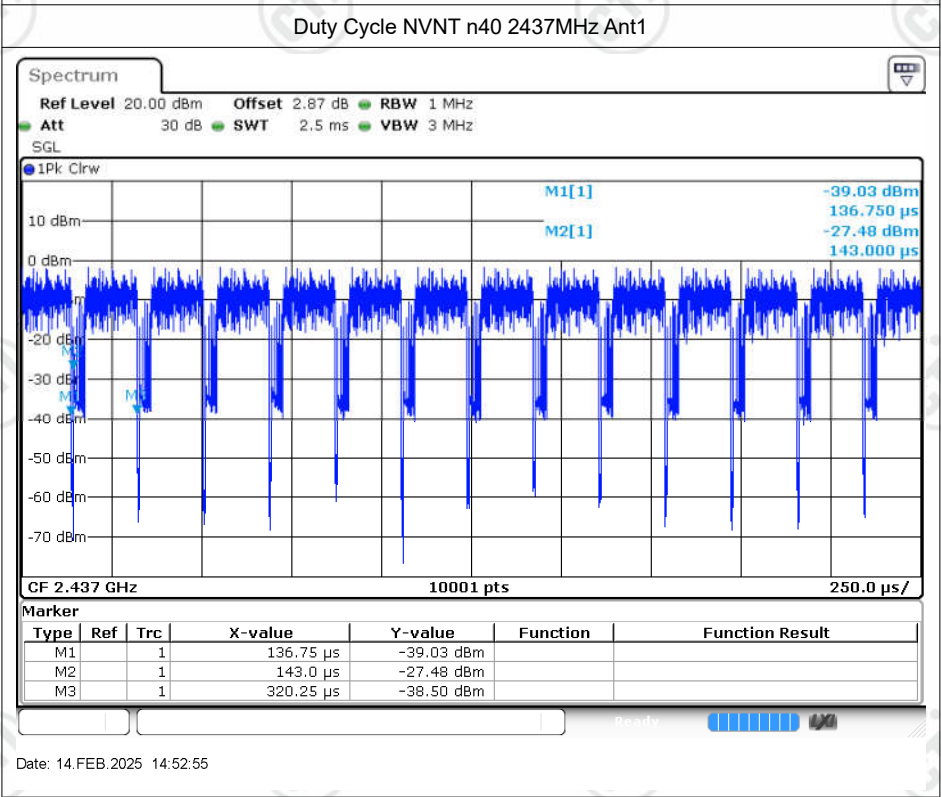


Date: 14.FEB.2025 14:52:55

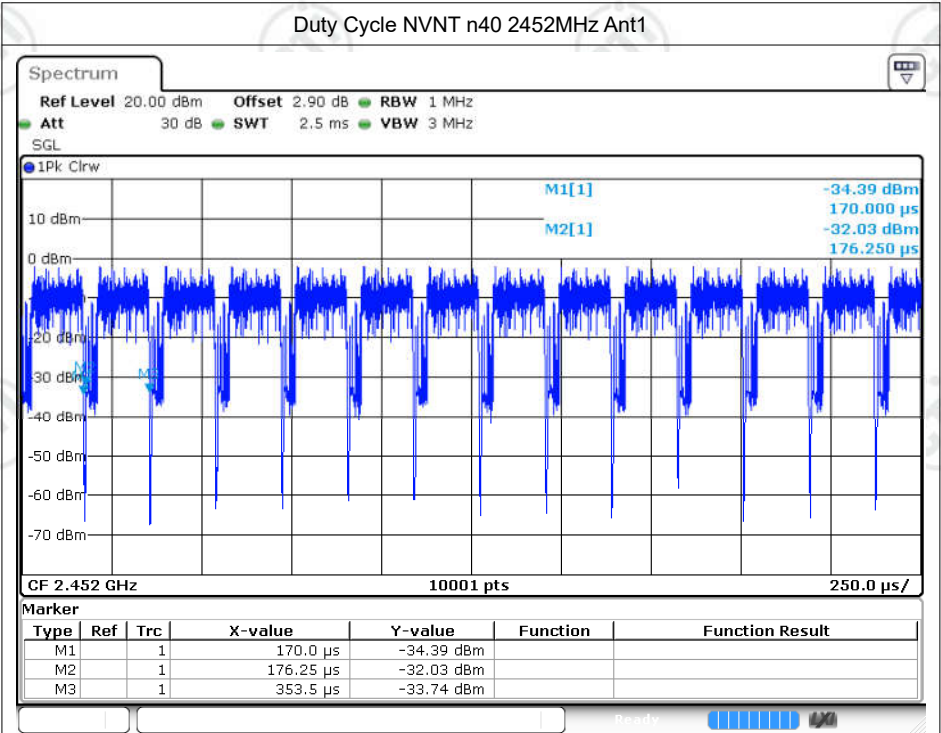


Date: 14.FEB.2025 14:56:52

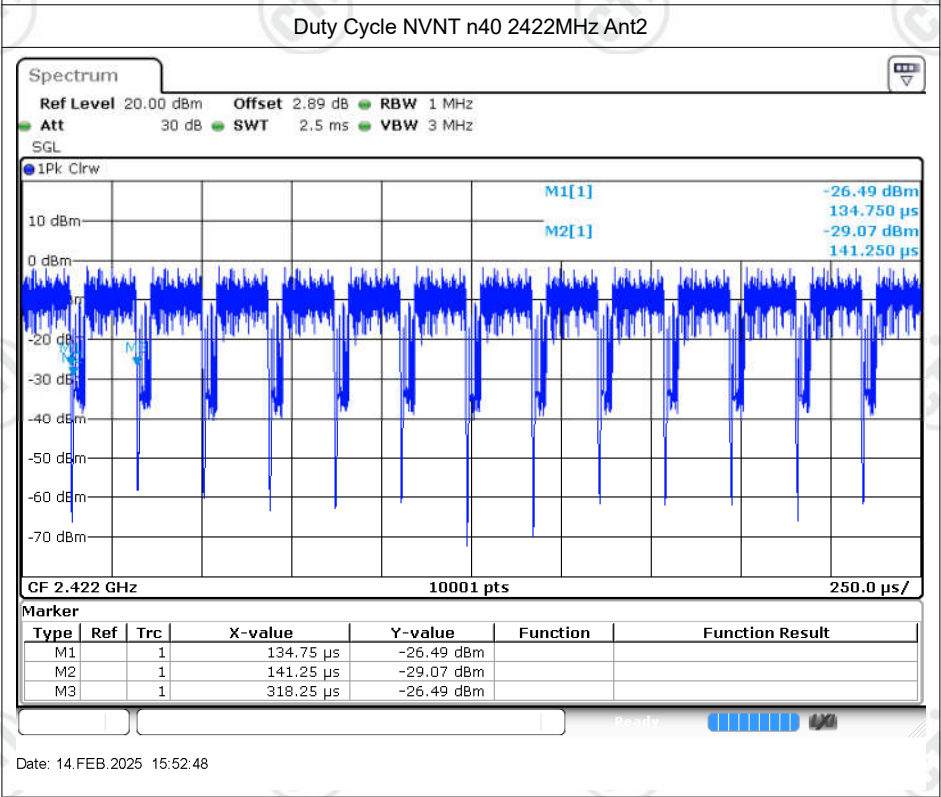


Date: 14.FEB.2025 15:52:48

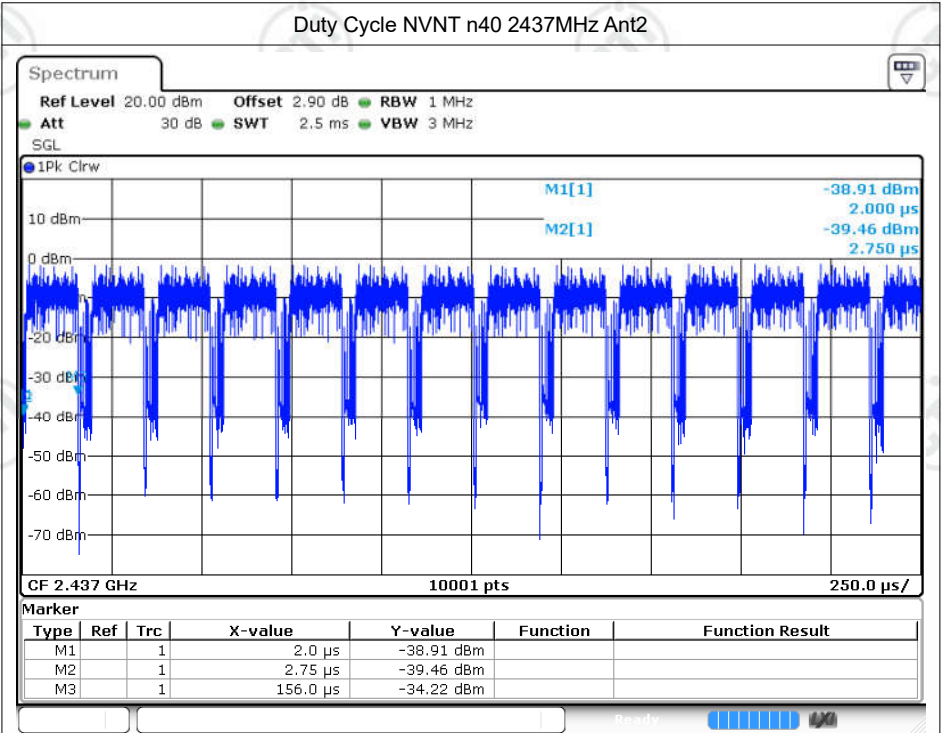


Date: 14.FEB.2025 16:04:33

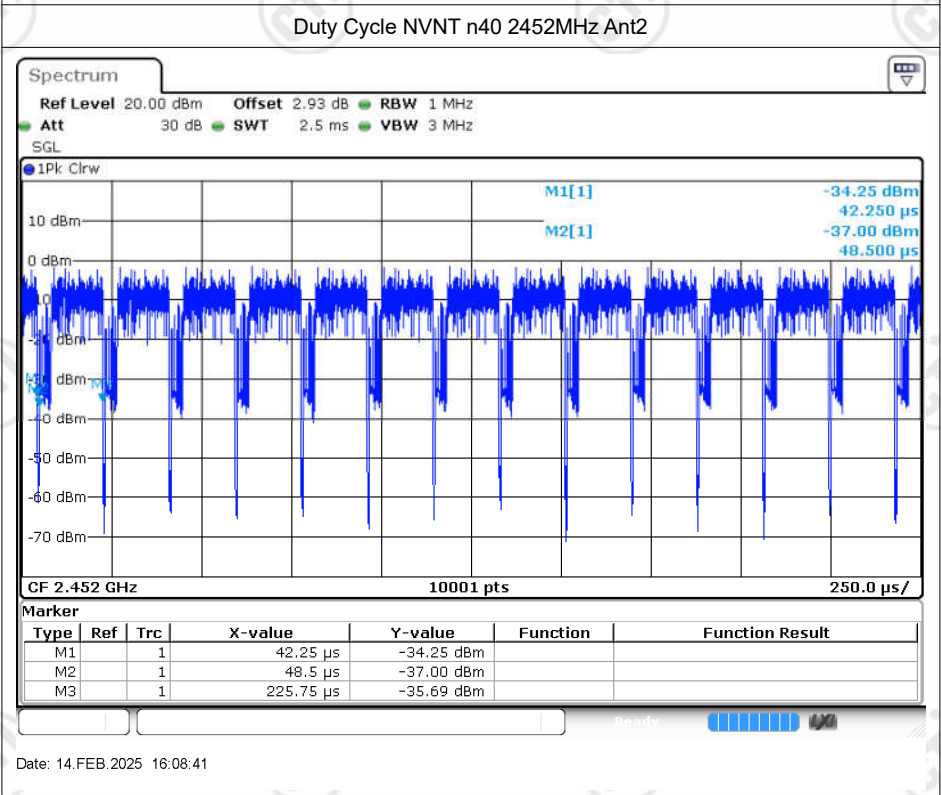


Date: 14.FEB.2025 16:08:41

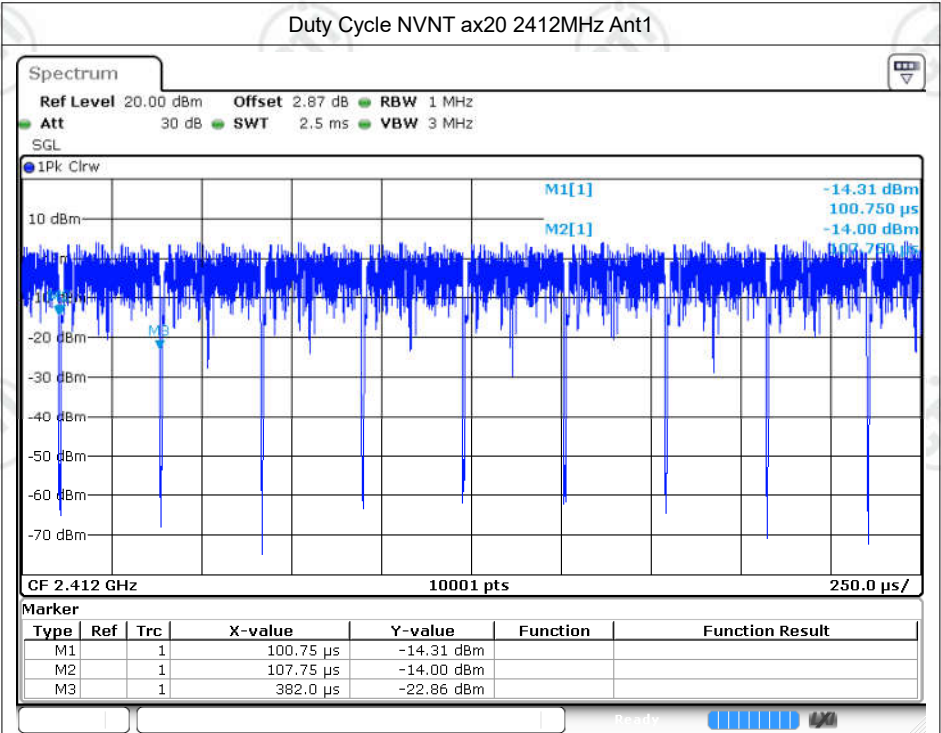


Date: 14.FEB.2025 15:00:44

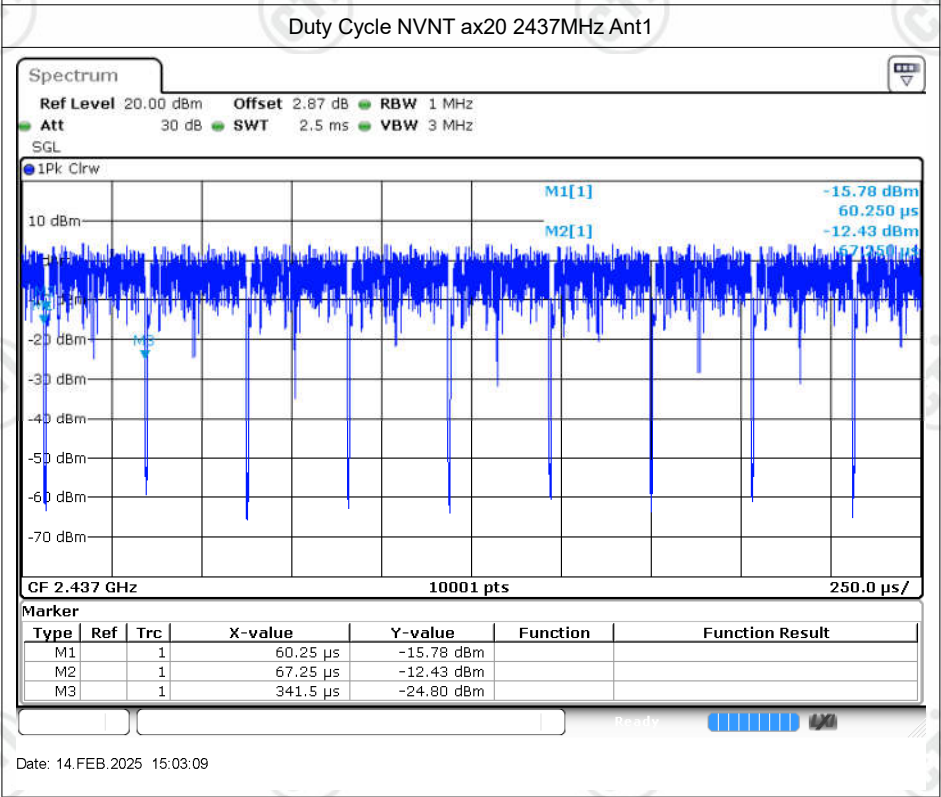


Date: 14.FEB.2025 15:03:09

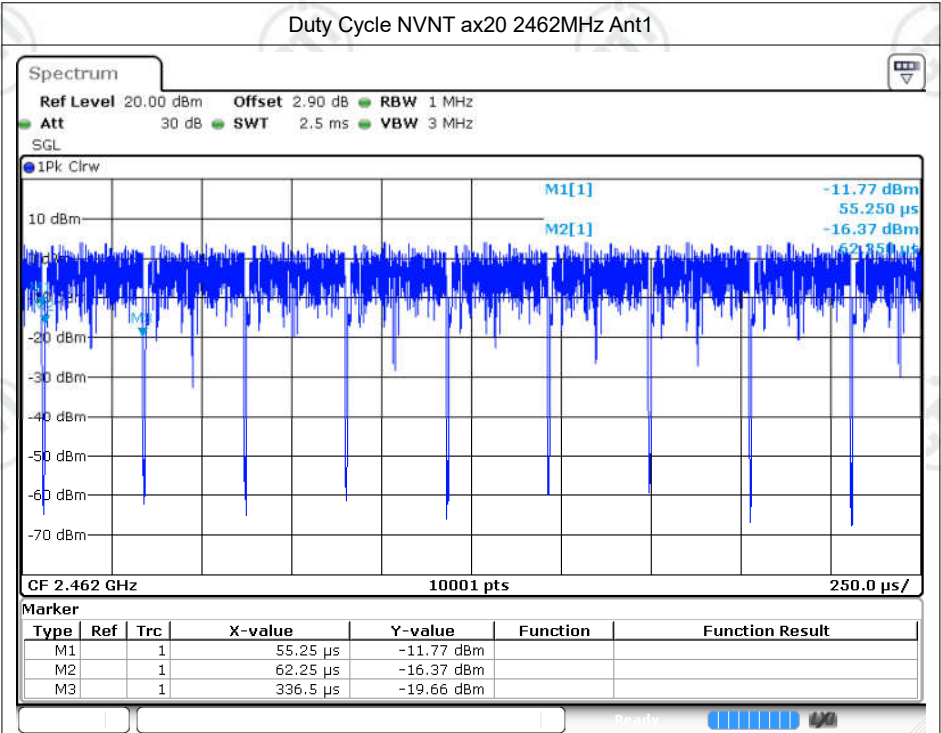


Date: 14.FEB.2025 15:05:26

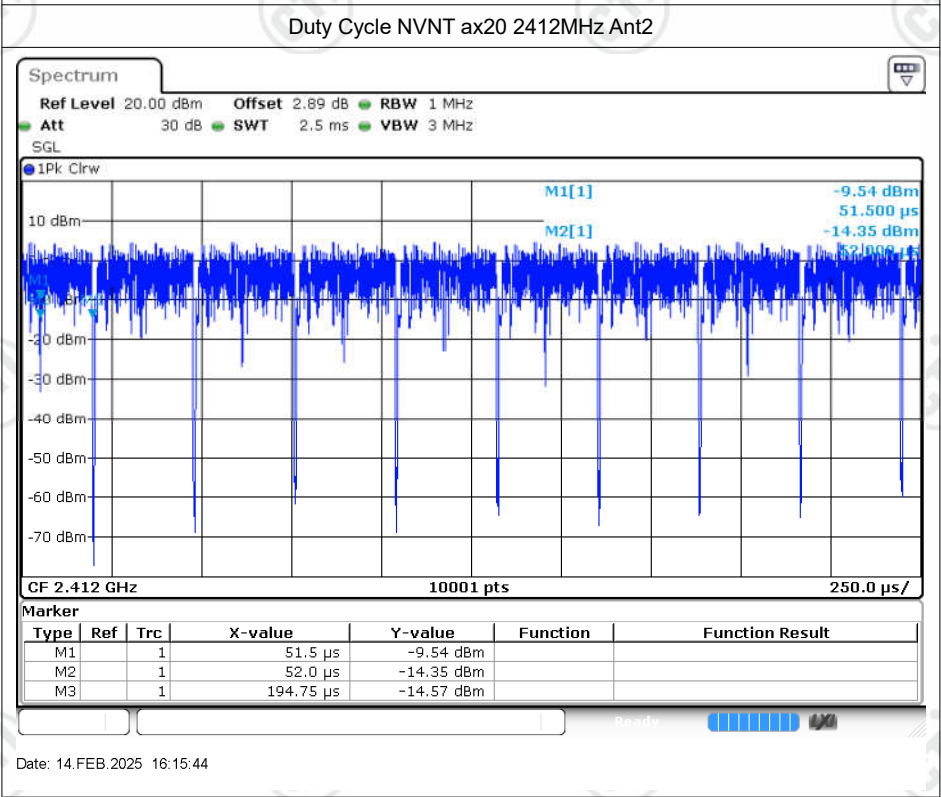


Date: 14.FEB.2025 16:15:44

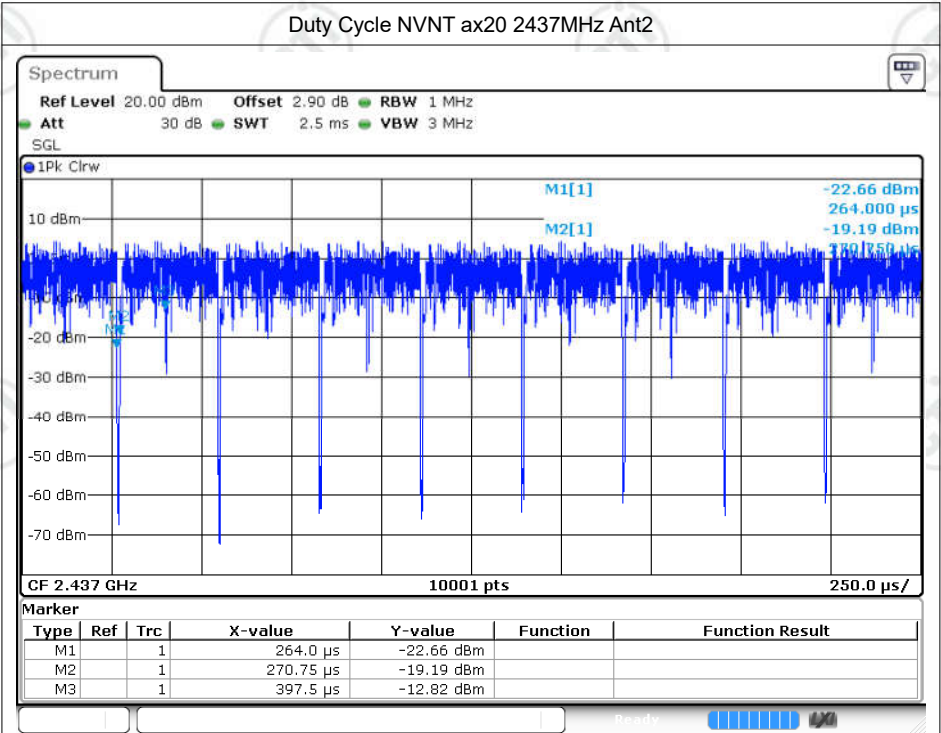


Date: 14.FEB.2025 16:18:09

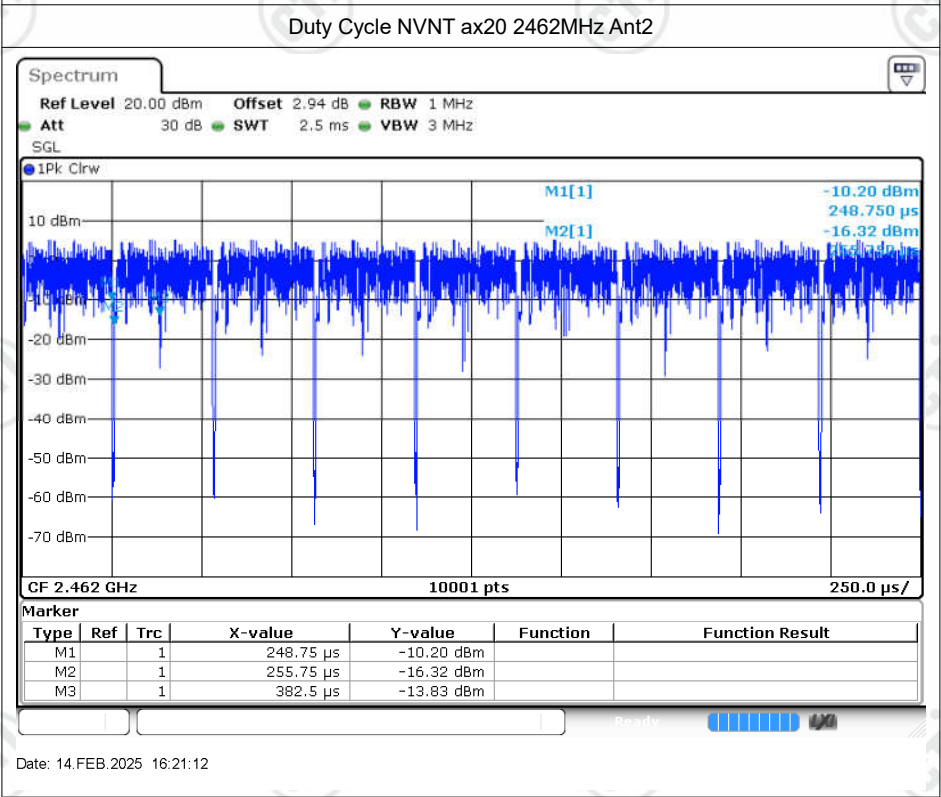


Date: 14.FEB.2025 16:21:12

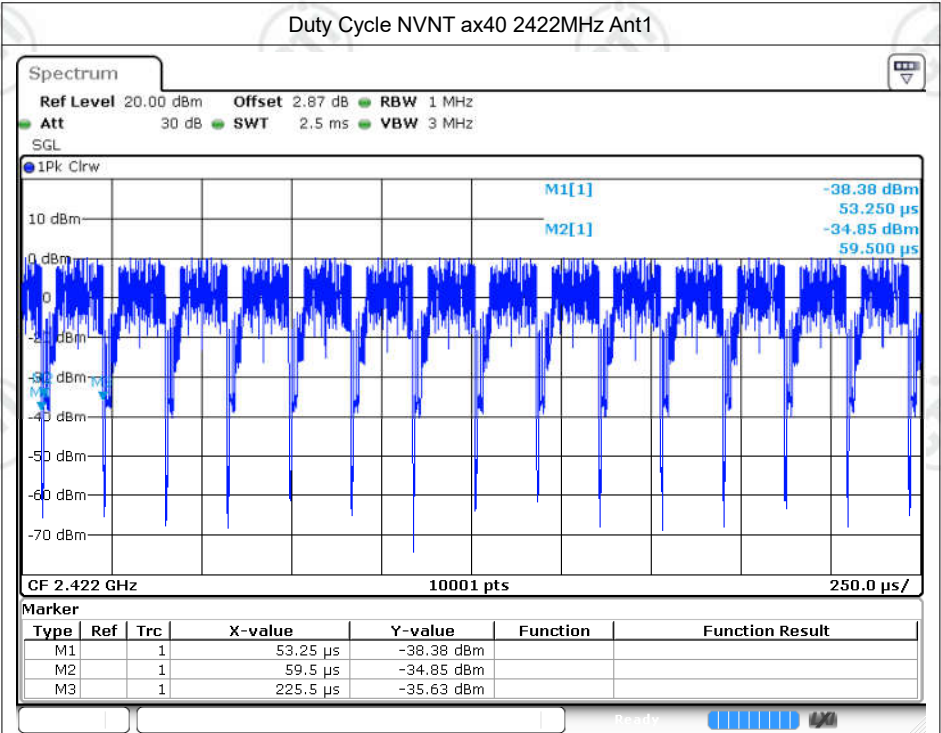


Date: 14.FEB.2025 15:08:26

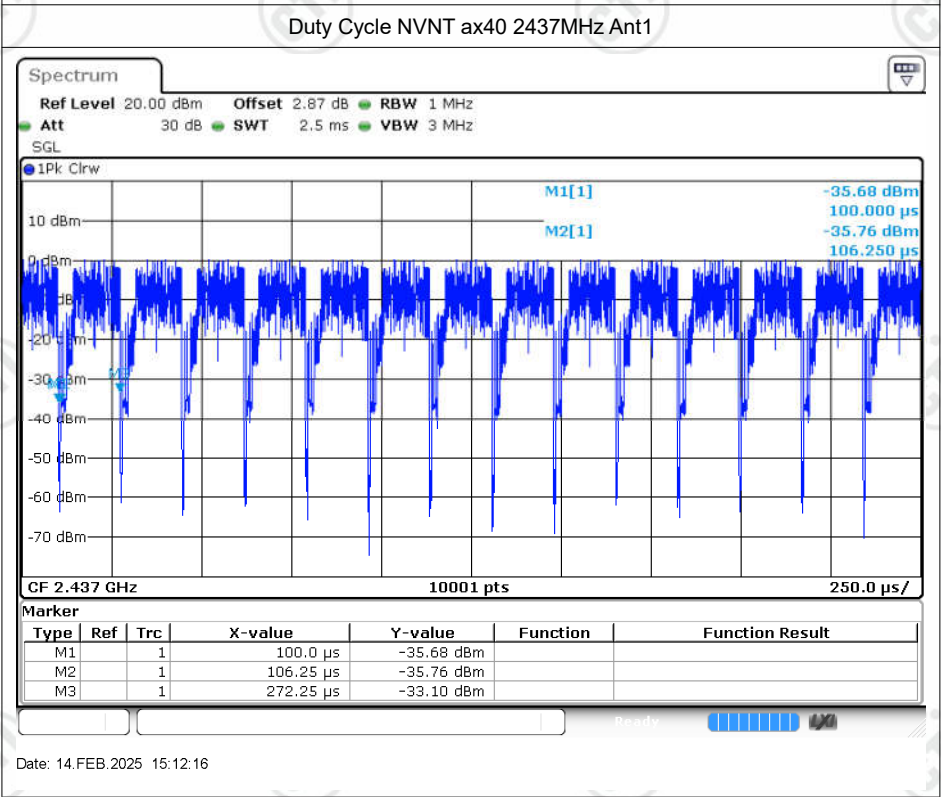


Date: 14.FEB.2025 15:12:16

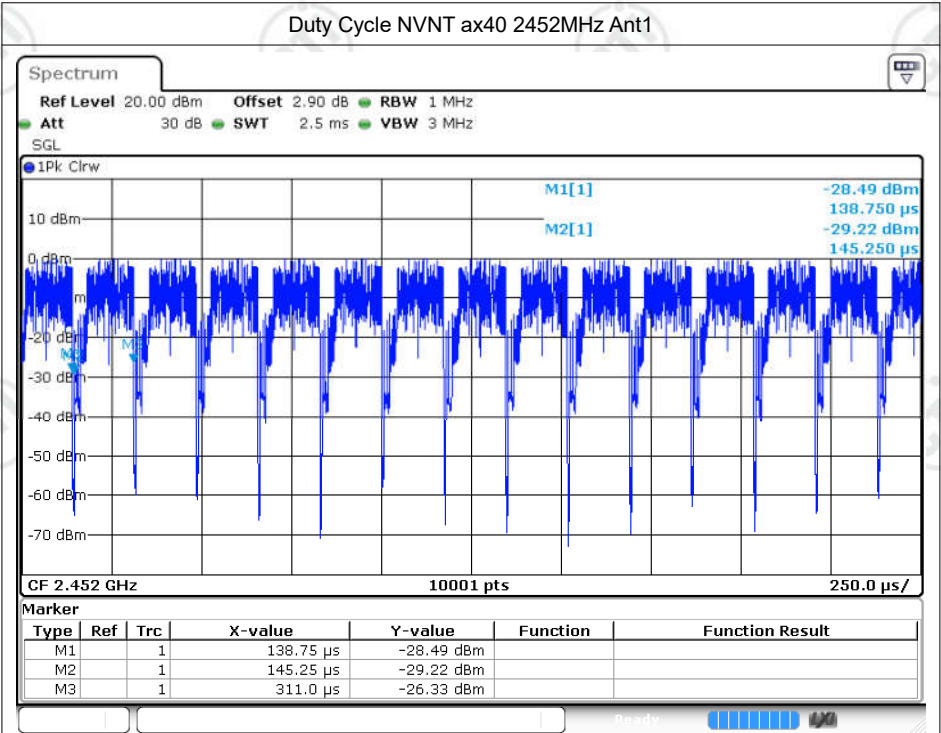


Date: 14.FEB.2025 15:16:10

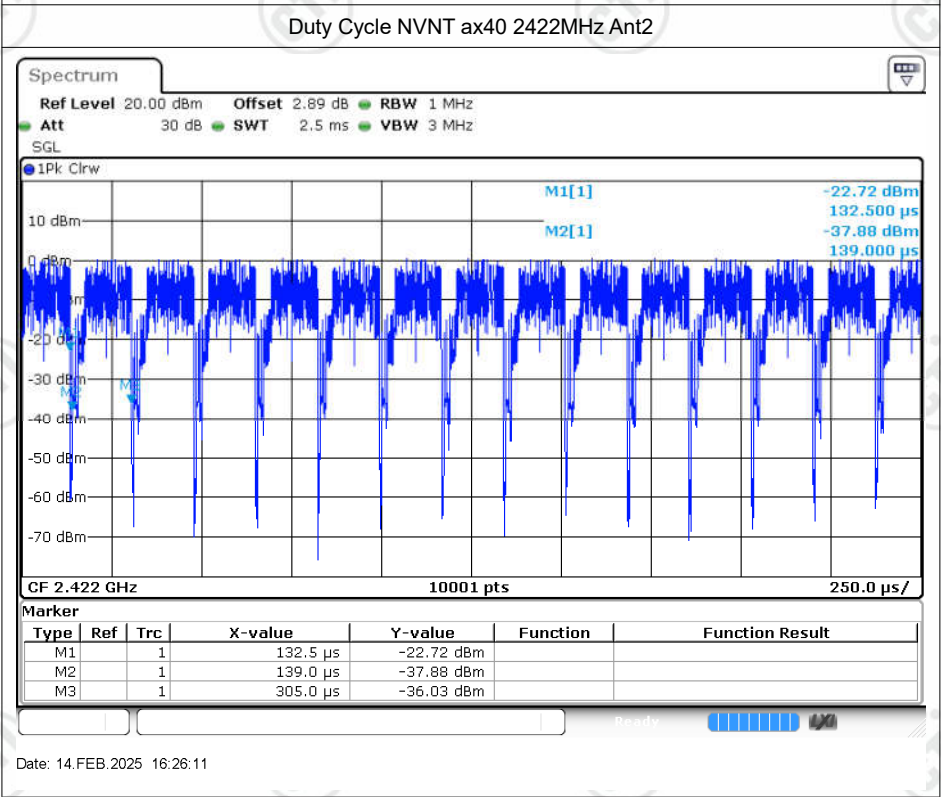

Date: 14.FEB.2025 16:26:11

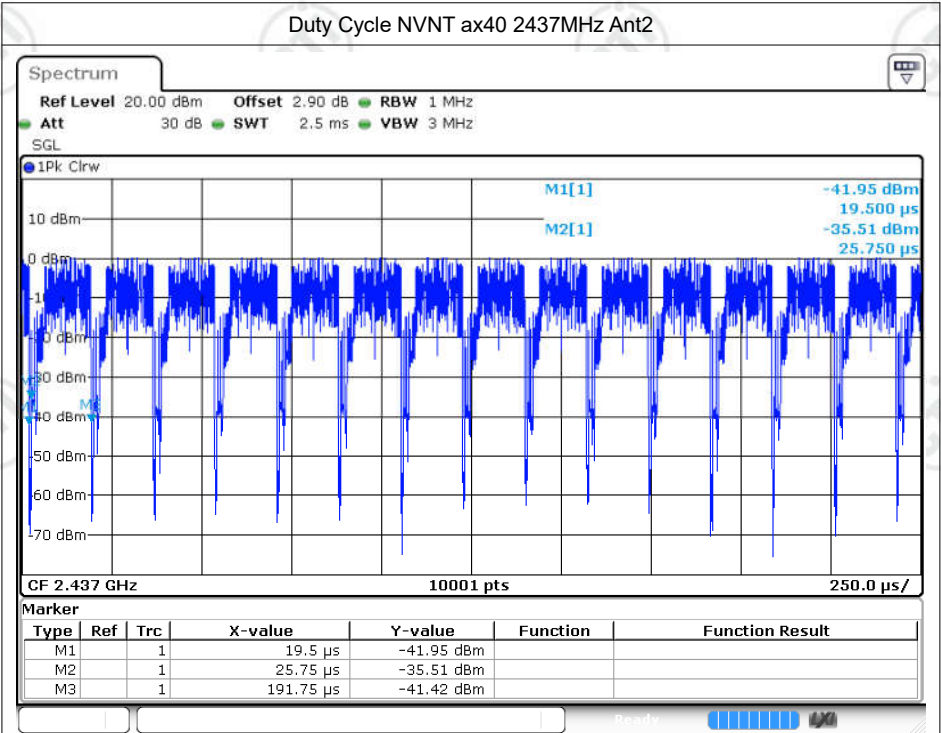

Date: 14.FEB.2025 16:32:17

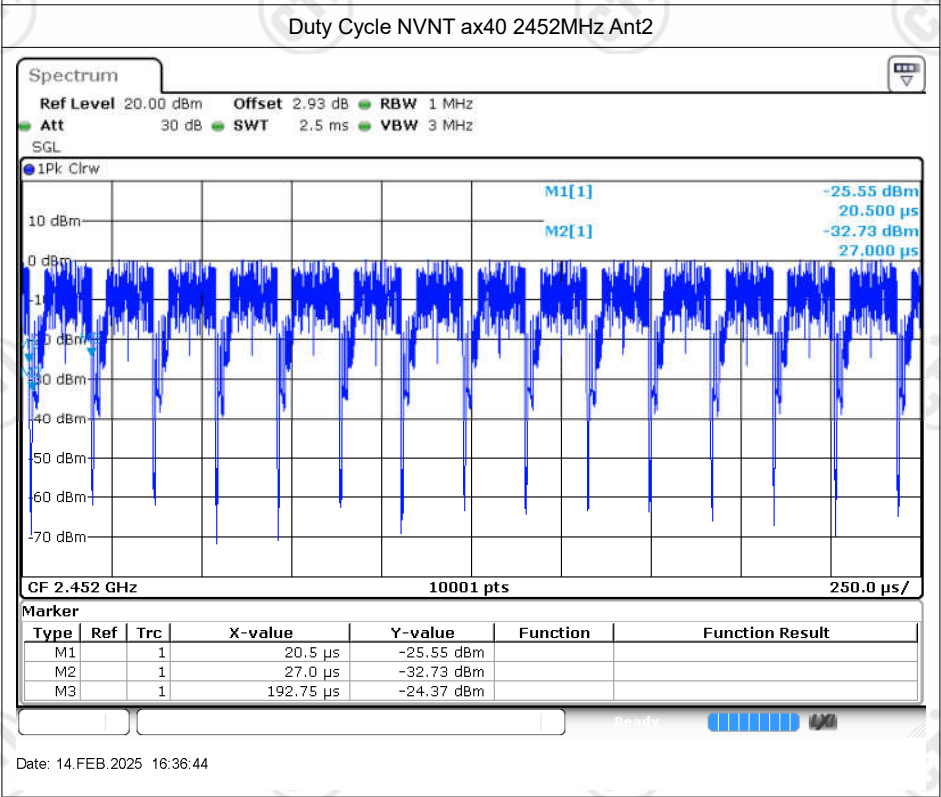

Date: 14.FEB.2025 16:36:44



Maximum Peak Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	12.8	30	Pass
NVNT	b	2437	Ant1	12.59	30	Pass
NVNT	b	2462	Ant1	12.25	30	Pass
NVNT	b	2412	Ant2	12.38	30	Pass
NVNT	b	2437	Ant2	12.66	30	Pass
NVNT	b	2462	Ant2	12.59	30	Pass
NVNT	g	2412	Ant1	11.71	30	Pass
NVNT	g	2437	Ant1	11.49	30	Pass
NVNT	g	2462	Ant1	11.15	30	Pass
NVNT	g	2412	Ant2	11.46	30	Pass
NVNT	g	2437	Ant2	11.71	30	Pass
NVNT	g	2462	Ant2	11.66	30	Pass
NVNT	n20	2412	Ant1	10.67	30	Pass
NVNT	n20	2437	Ant1	10.43	30	Pass
NVNT	n20	2462	Ant1	10.1	30	Pass
NVNT	n20	2412	Ant2	10.39	30	Pass
NVNT	n20	2437	Ant2	10.6	30	Pass
NVNT	n20	2462	Ant2	10.59	30	Pass
NVNT	n20	2412	Ant1	7.79	30	Pass
NVNT	n20	2412	Ant2	7.2	30	Pass
NVNT	n20	2412	Sum	10.52	30	Pass
NVNT	n20	2437	Ant1	7.09	30	Pass
NVNT	n20	2437	Ant2	7.46	30	Pass
NVNT	n20	2437	Sum	10.29	30	Pass
NVNT	n20	2462	Ant1	7.09	30	Pass
NVNT	n20	2462	Ant2	7.34	30	Pass
NVNT	n20	2462	Sum	10.23	30	Pass
NVNT	n40	2422	Ant1	10.46	30	Pass
NVNT	n40	2437	Ant1	10.29	30	Pass
NVNT	n40	2452	Ant1	10.01	30	Pass
NVNT	n40	2422	Ant2	10.3	30	Pass
NVNT	n40	2437	Ant2	10.37	30	Pass
NVNT	n40	2452	Ant2	10.39	30	Pass
NVNT	n40	2422	Ant1	7.48	30	Pass
NVNT	n40	2422	Ant2	7.26	30	Pass
NVNT	n40	2422	Sum	10.38	30	Pass
NVNT	n40	2437	Ant1	7.37	30	Pass

NVNT	n40	2437	Ant2	7.32	30	Pass
NVNT	n40	2437	Sum	10.36	30	Pass
NVNT	n40	2452	Ant1	7	30	Pass
NVNT	n40	2452	Ant2	7.57	30	Pass
NVNT	n40	2452	Sum	10.3	30	Pass
NVNT	ax20	2412	Ant1	9.71	30	Pass
NVNT	ax20	2437	Ant1	9.48	30	Pass
NVNT	ax20	2462	Ant1	9.13	30	Pass
NVNT	ax20	2412	Ant2	9.37	30	Pass
NVNT	ax20	2437	Ant2	9.65	30	Pass
NVNT	ax20	2462	Ant2	9.75	30	Pass
NVNT	ax20	2412	Ant1	6.73	30	Pass
NVNT	ax20	2412	Ant2	6.22	30	Pass
NVNT	ax20	2412	Sum	9.49	30	Pass
NVNT	ax20	2437	Ant1	6.1	30	Pass
NVNT	ax20	2437	Ant2	6.41	30	Pass
NVNT	ax20	2437	Sum	9.27	30	Pass
NVNT	ax20	2462	Ant1	6.04	30	Pass
NVNT	ax20	2462	Ant2	6.4	30	Pass
NVNT	ax20	2462	Sum	9.23	30	Pass
NVNT	ax40	2422	Ant1	9.51	30	Pass
NVNT	ax40	2437	Ant1	9.37	30	Pass
NVNT	ax40	2452	Ant1	9.11	30	Pass
NVNT	ax40	2422	Ant2	9.37	30	Pass
NVNT	ax40	2437	Ant2	9.48	30	Pass
NVNT	ax40	2452	Ant2	9.52	30	Pass
NVNT	ax40	2422	Ant1	6.38	30	Pass
NVNT	ax40	2422	Ant2	6.28	30	Pass
NVNT	ax40	2422	Sum	9.34	30	Pass
NVNT	ax40	2437	Ant1	6.43	30	Pass
NVNT	ax40	2437	Ant2	6.38	30	Pass
NVNT	ax40	2437	Sum	9.42	30	Pass
NVNT	ax40	2452	Ant1	6.07	30	Pass
NVNT	ax40	2452	Ant2	6.38	30	Pass
NVNT	ax40	2452	Sum	9.24	30	Pass


-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	12.027	0.5	Pass
NVNT	b	2437	Ant1	12.021	0.5	Pass
NVNT	b	2462	Ant1	12.033	0.5	Pass
NVNT	b	2412	Ant2	11.04	0.5	Pass
NVNT	b	2437	Ant2	11.058	0.5	Pass
NVNT	b	2462	Ant2	11.064	0.5	Pass
NVNT	g	2412	Ant1	16.311	0.5	Pass
NVNT	g	2437	Ant1	16.302	0.5	Pass
NVNT	g	2462	Ant1	16.305	0.5	Pass
NVNT	g	2412	Ant2	16.302	0.5	Pass
NVNT	g	2437	Ant2	16.302	0.5	Pass
NVNT	g	2462	Ant2	16.308	0.5	Pass
NVNT	n20	2412	Ant1	17.52	0.5	Pass
NVNT	n20	2437	Ant1	17.307	0.5	Pass
NVNT	n20	2462	Ant1	17.313	0.5	Pass
NVNT	n20	2412	Ant2	17.313	0.5	Pass
NVNT	n20	2437	Ant2	17.313	0.5	Pass
NVNT	n20	2462	Ant2	17.295	0.5	Pass
NVNT	n40	2422	Ant1	35.808	0.5	Pass
NVNT	n40	2437	Ant1	36.054	0.5	Pass
NVNT	n40	2452	Ant1	36.042	0.5	Pass
NVNT	n40	2422	Ant2	36.264	0.5	Pass
NVNT	n40	2437	Ant2	36.048	0.5	Pass
NVNT	n40	2452	Ant2	36.264	0.5	Pass
NVNT	ax20	2412	Ant1	18.363	0.5	Pass
NVNT	ax20	2437	Ant1	18.153	0.5	Pass
NVNT	ax20	2462	Ant1	18.321	0.5	Pass
NVNT	ax20	2412	Ant2	18.15	0.5	Pass
NVNT	ax20	2437	Ant2	18.147	0.5	Pass
NVNT	ax20	2462	Ant2	18.345	0.5	Pass
NVNT	ax40	2422	Ant1	37.674	0.5	Pass
NVNT	ax40	2437	Ant1	37.692	0.5	Pass
NVNT	ax40	2452	Ant1	37.704	0.5	Pass
NVNT	ax40	2422	Ant2	37.674	0.5	Pass
NVNT	ax40	2437	Ant2	37.662	0.5	Pass
NVNT	ax40	2452	Ant2	37.692	0.5	Pass

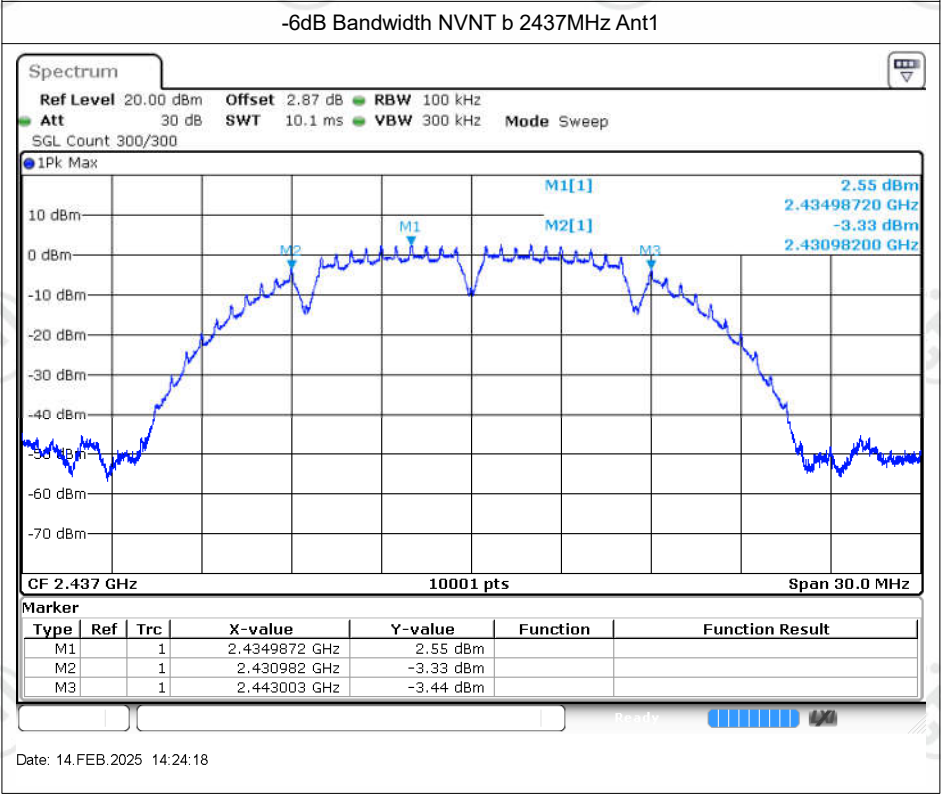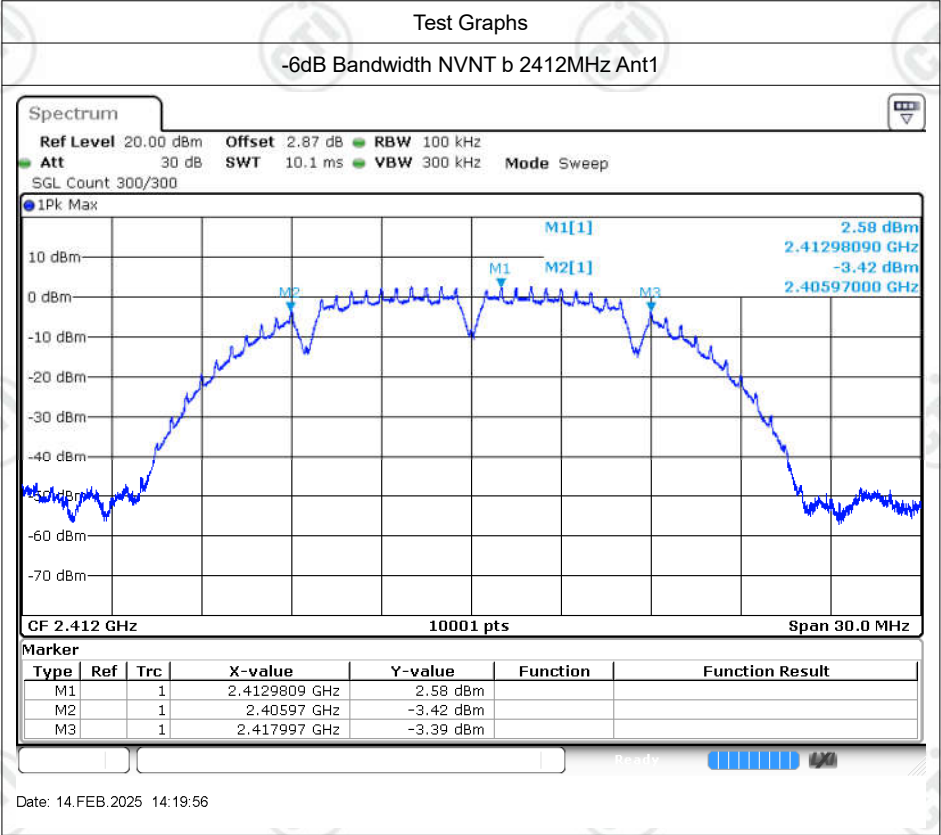


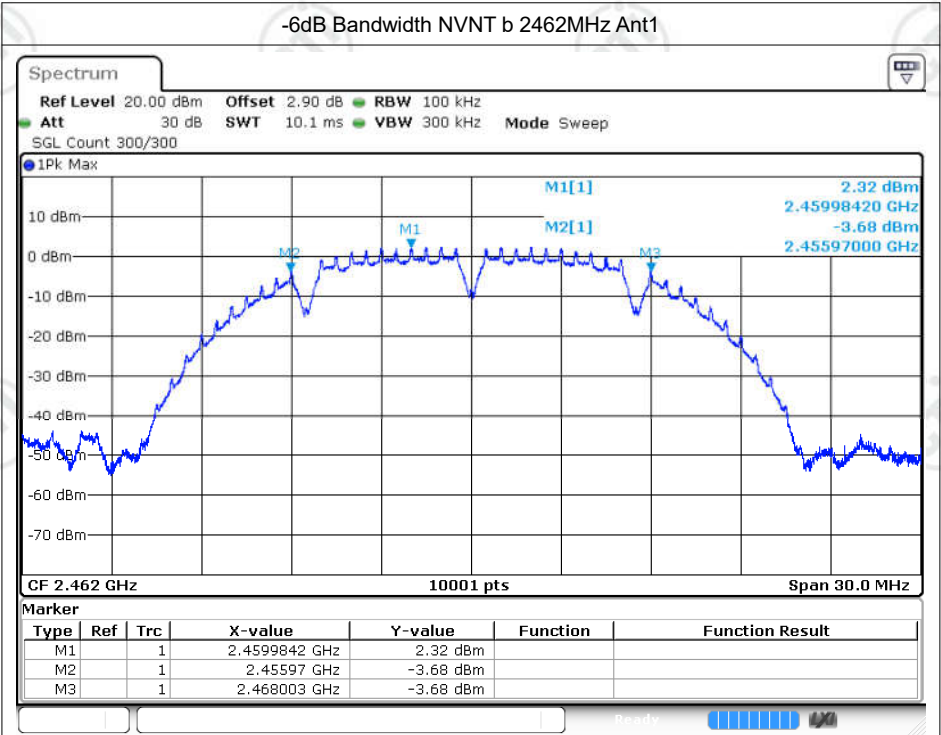


Date: 14.FEB.2025 14:27:14

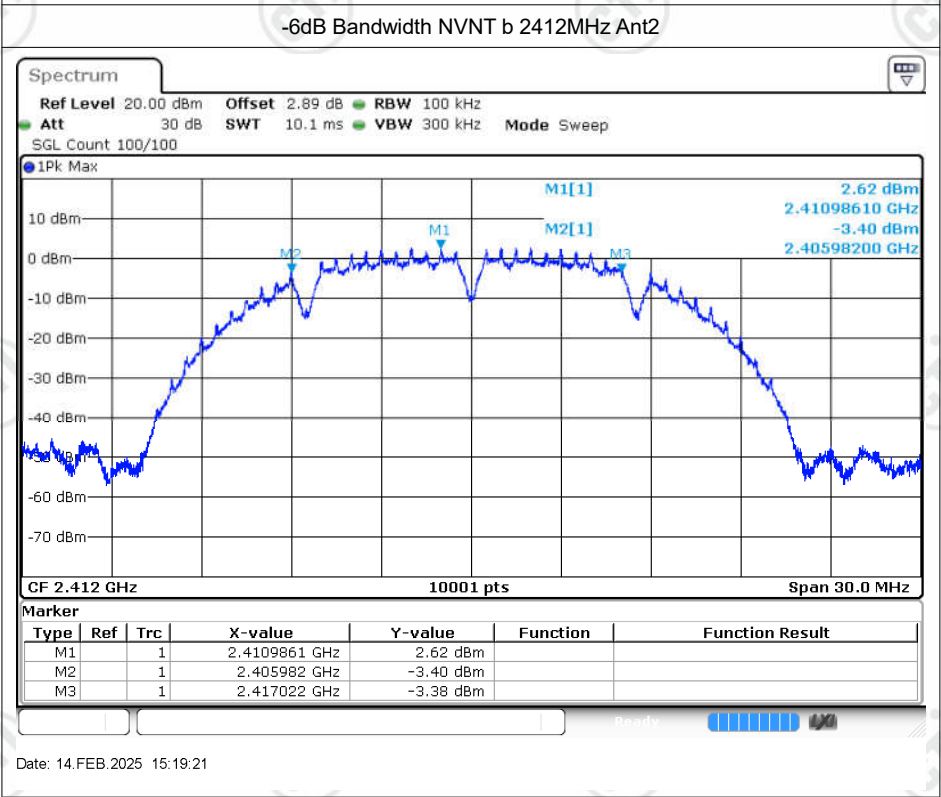


Date: 14.FEB.2025 15:19:21

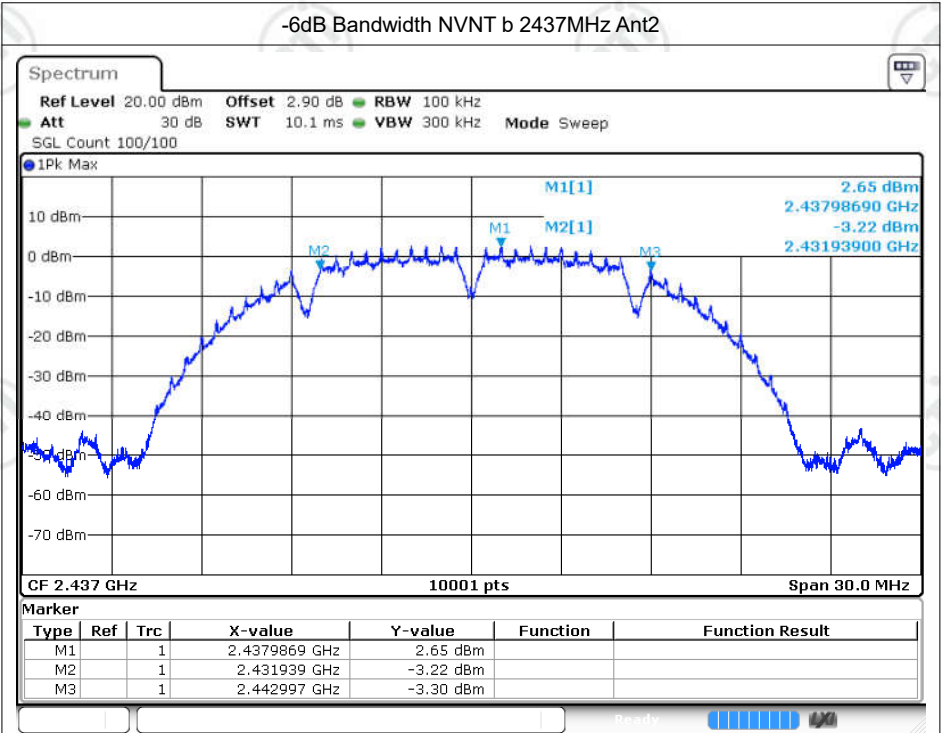


Date: 14.FEB.2025 15:21:50

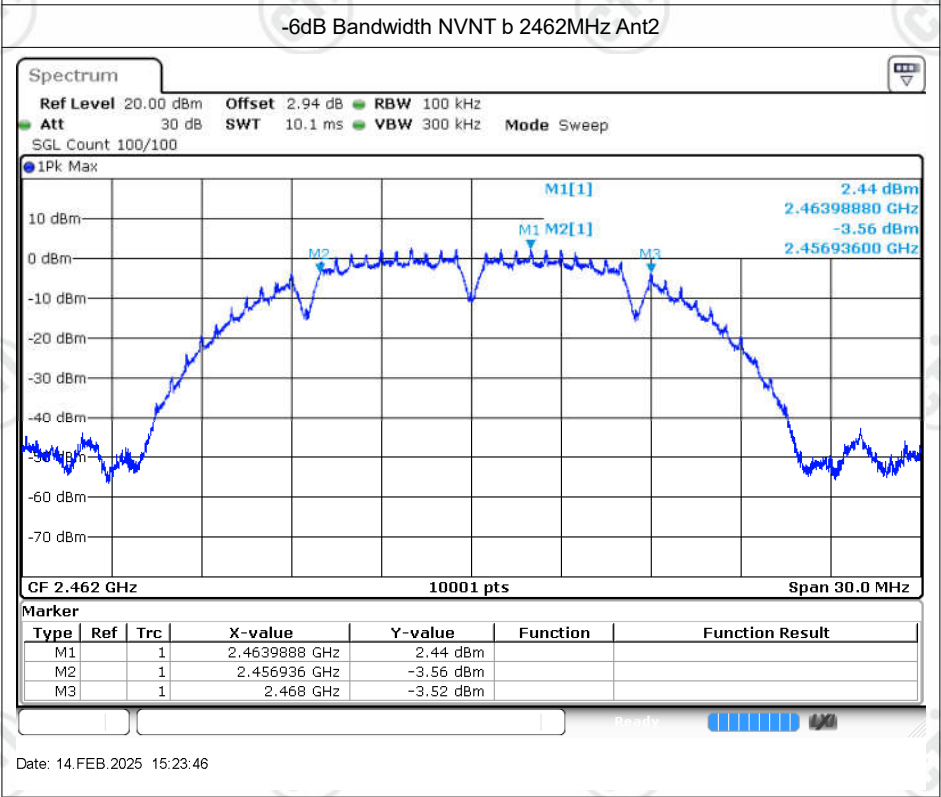


Date: 14.FEB.2025 15:23:46

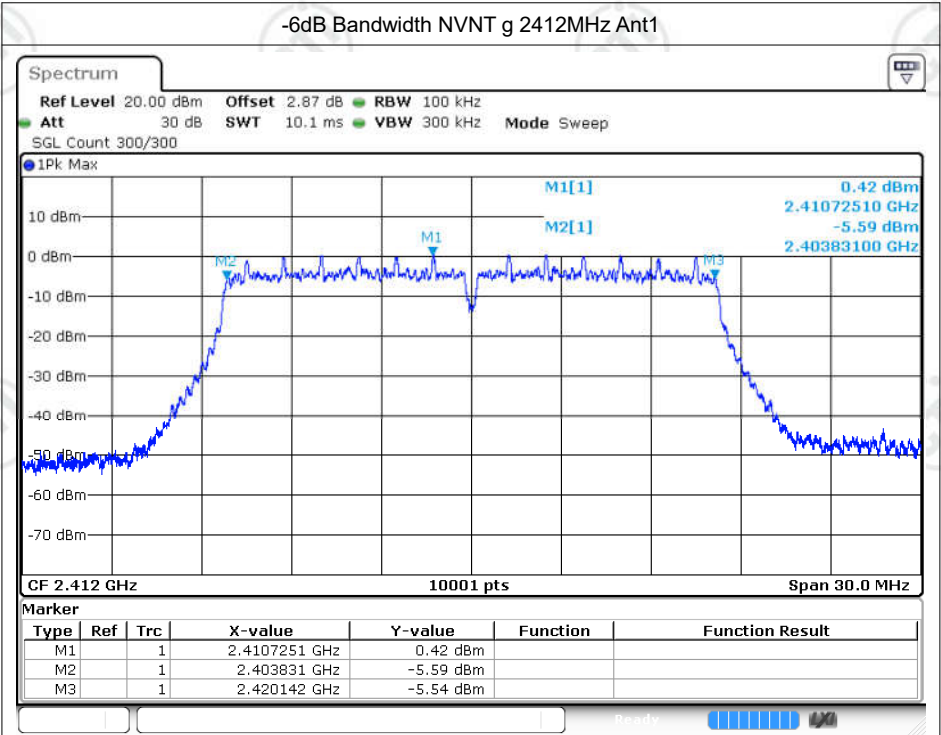


Date: 14.FEB.2025 14:30:58

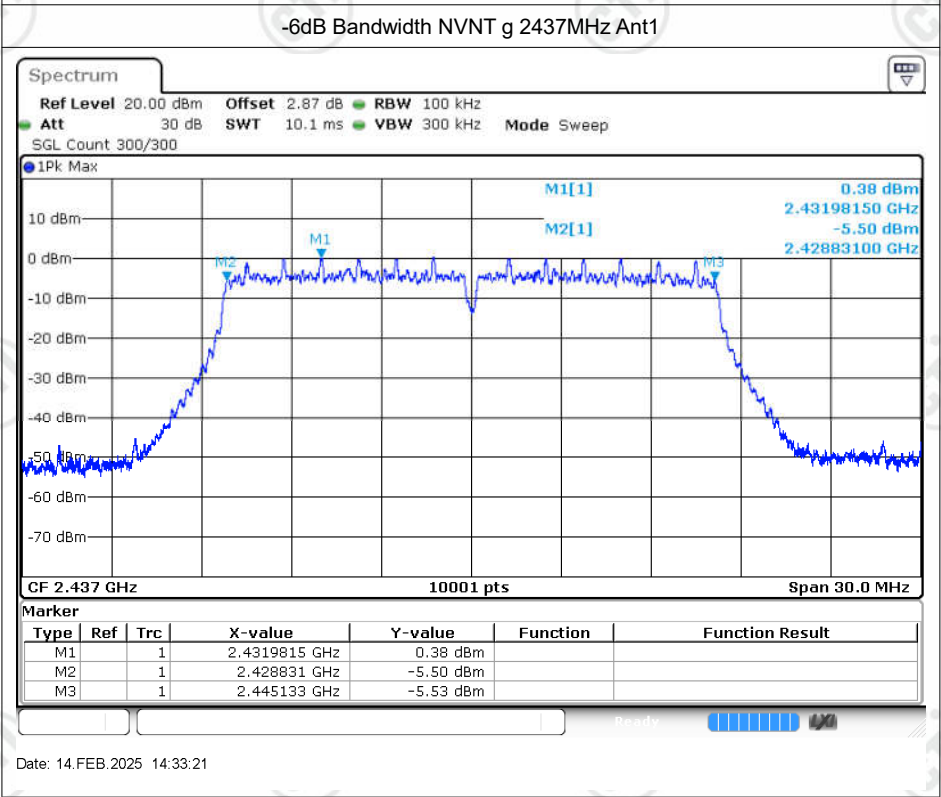


Date: 14.FEB.2025 14:33:21

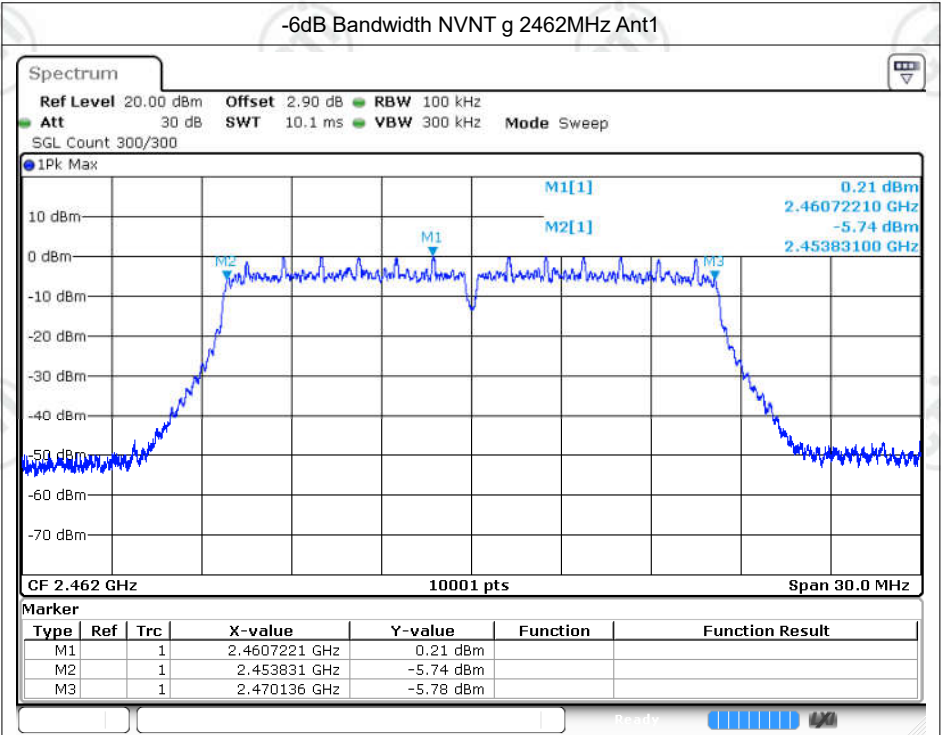


Date: 14.FEB.2025 14:35:33

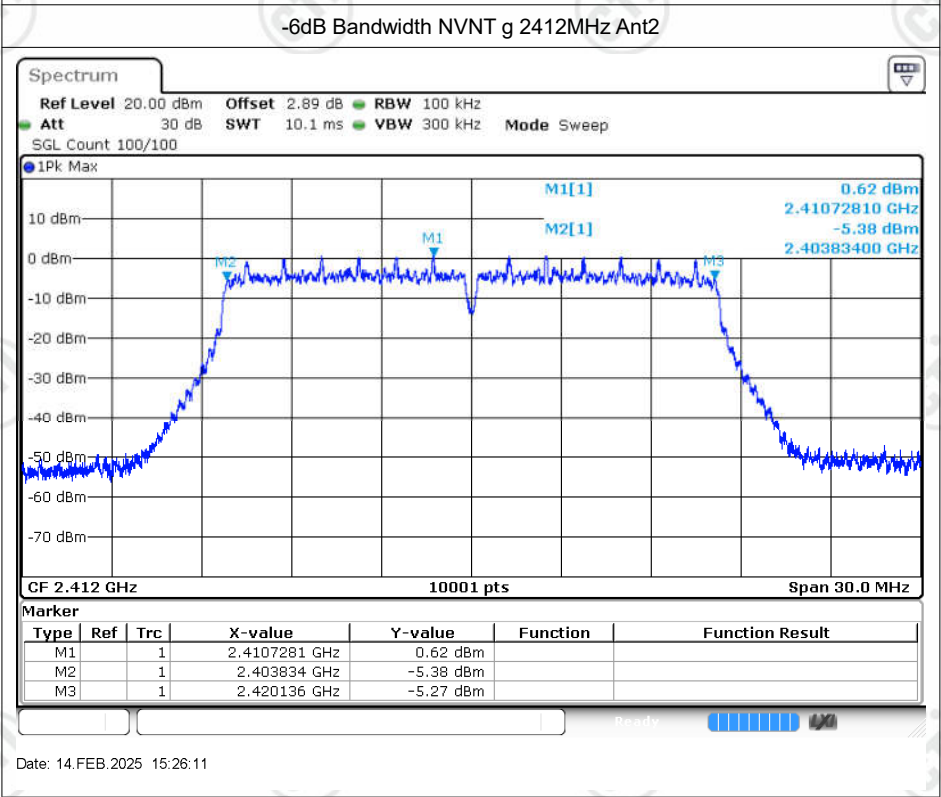


Date: 14.FEB.2025 15:26:11

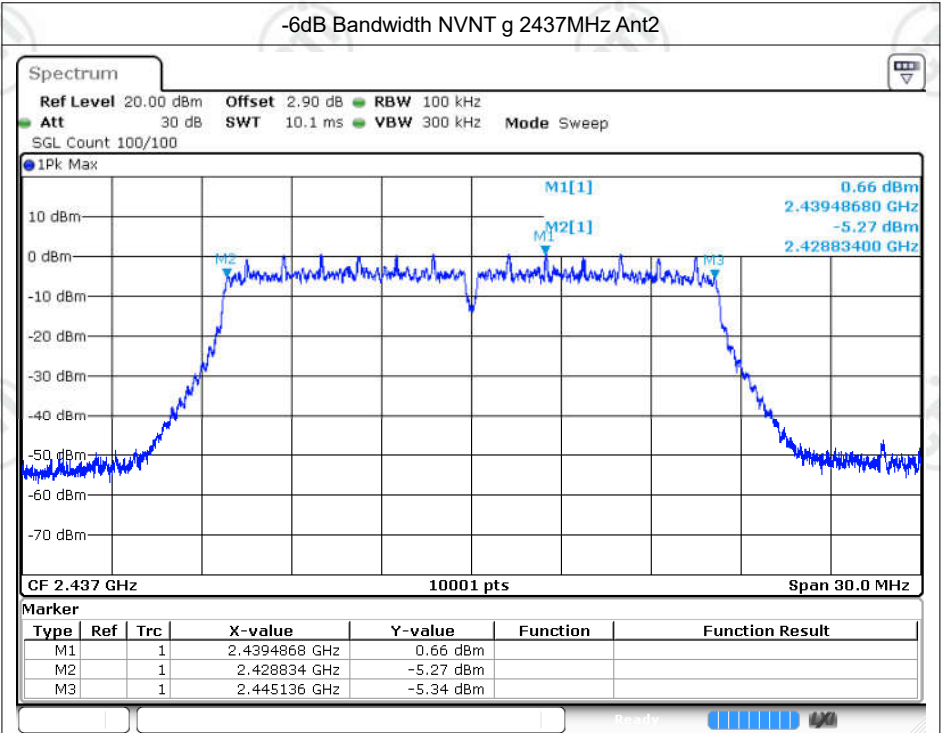


Date: 14.FEB.2025 15:32:45

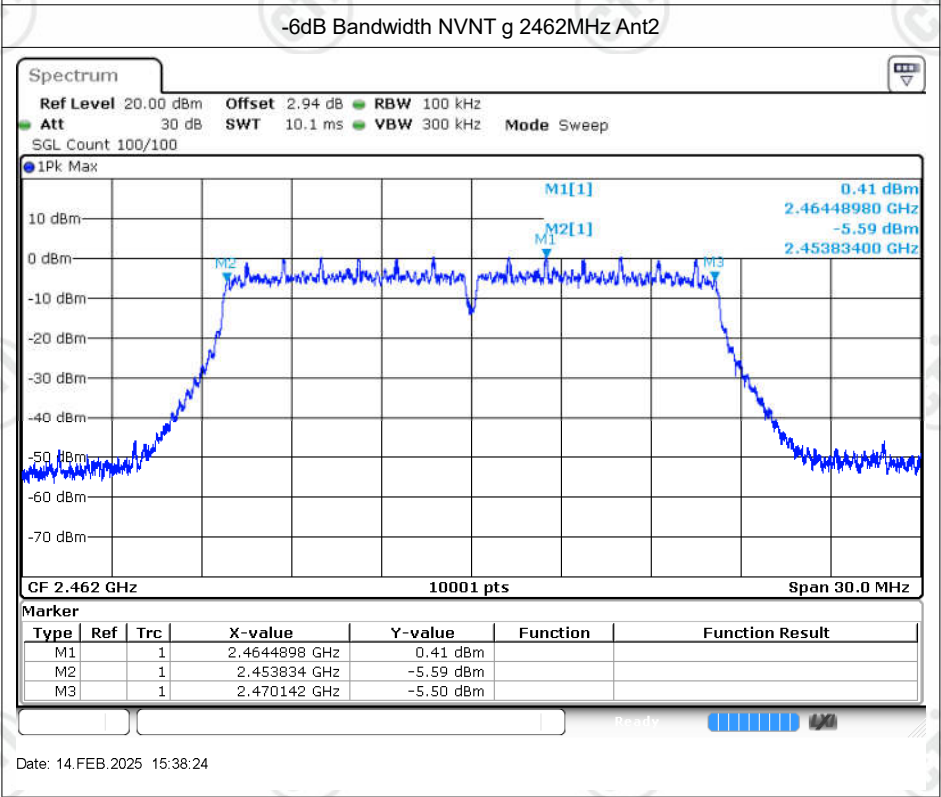


Date: 14.FEB.2025 15:38:24

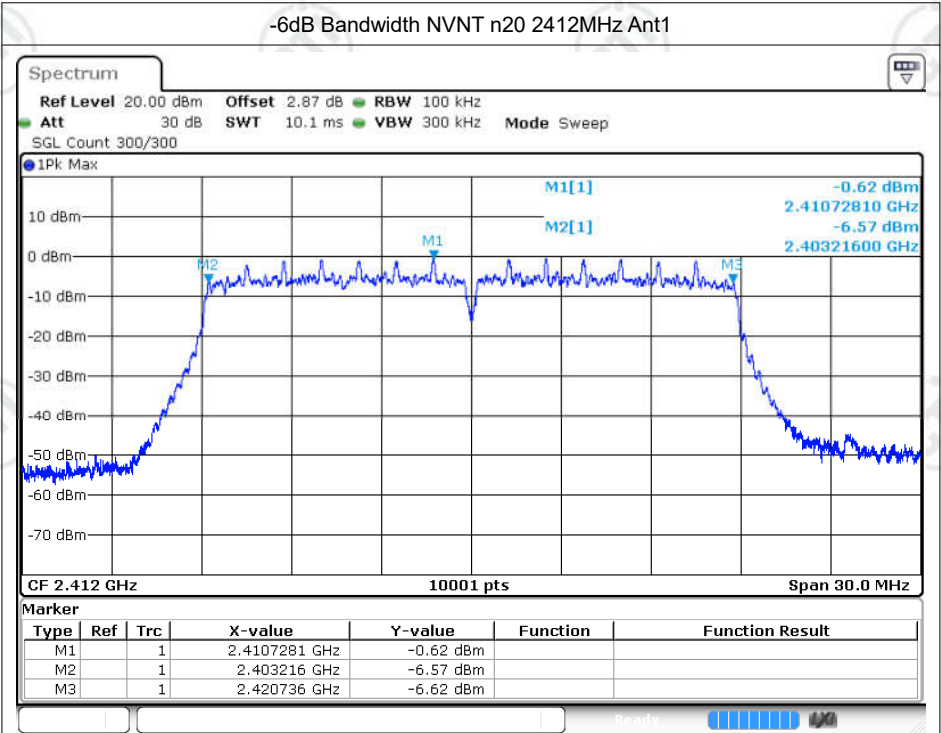


Date: 14.FEB.2025 14:37:54

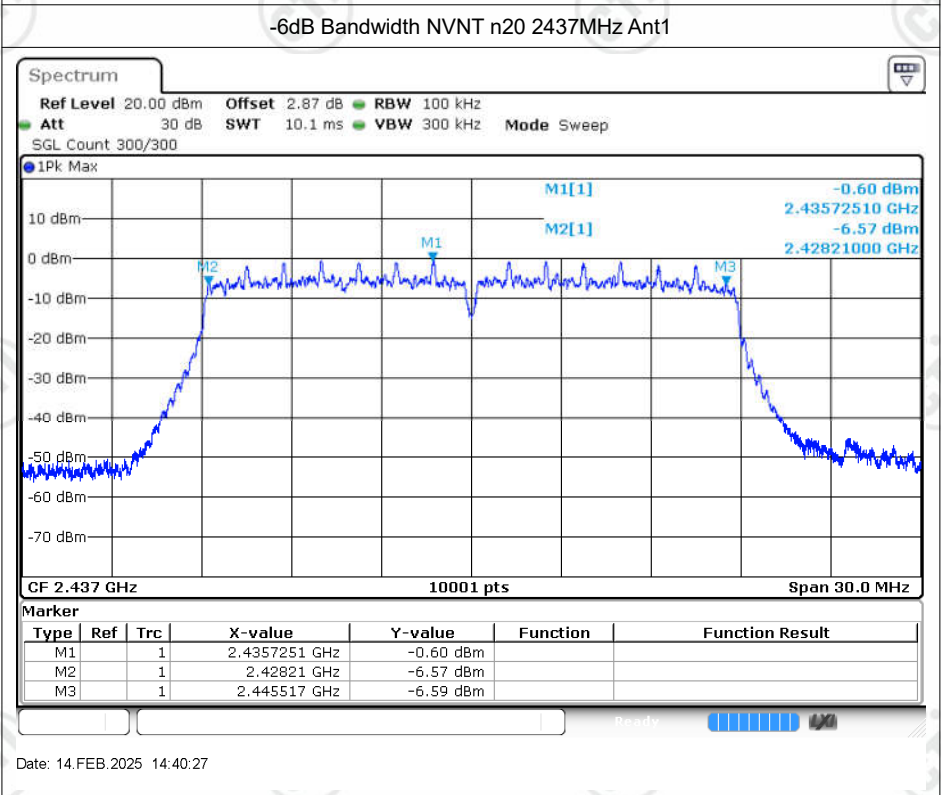


Date: 14.FEB.2025 14:40:27

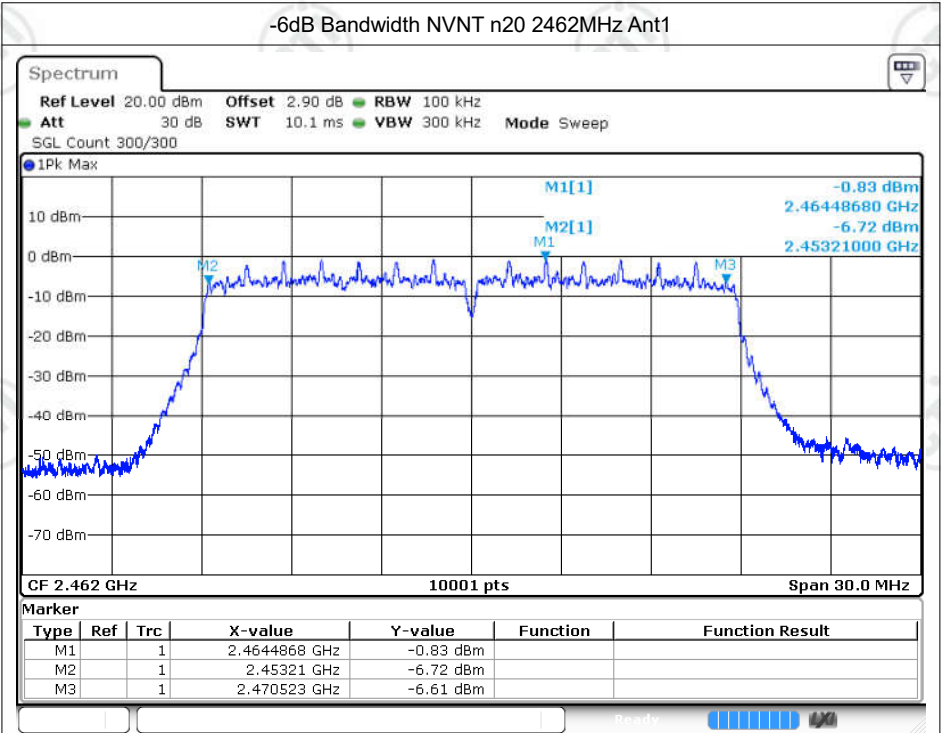


Date: 14.FEB.2025 14:43:32

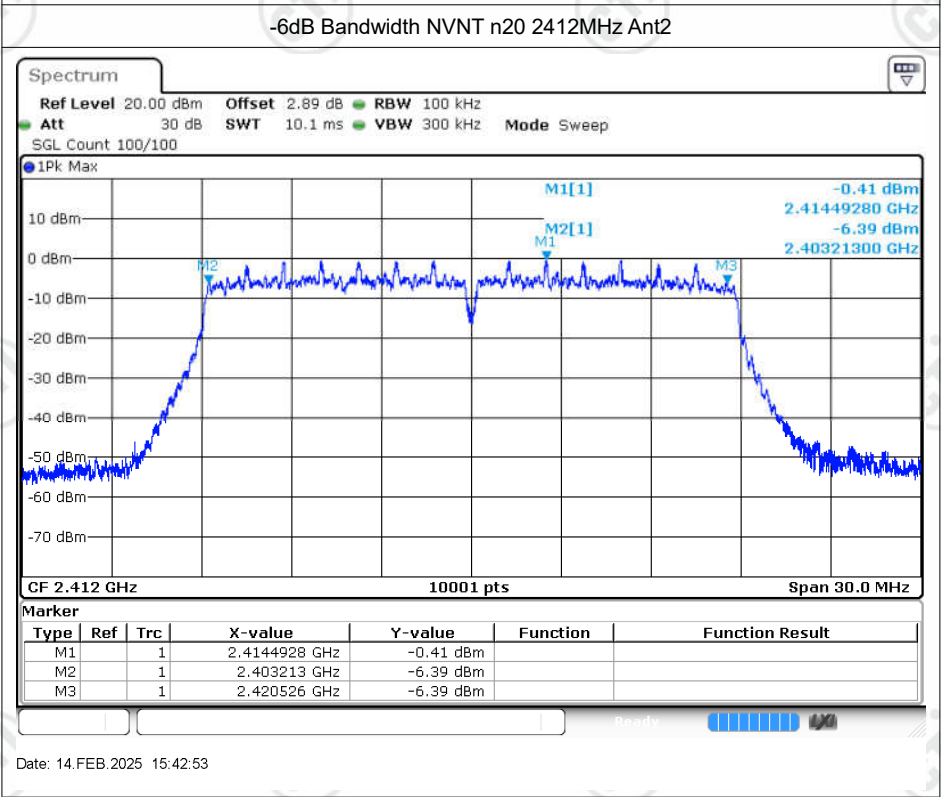


Date: 14.FEB.2025 15:42:53

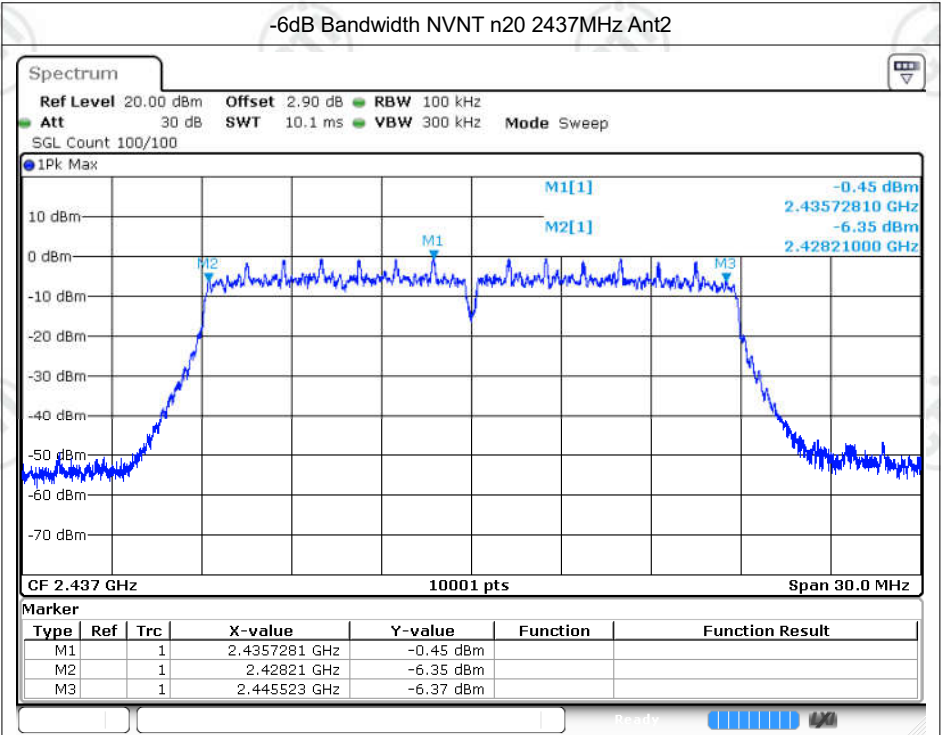


Date: 14.FEB.2025 15:46:35

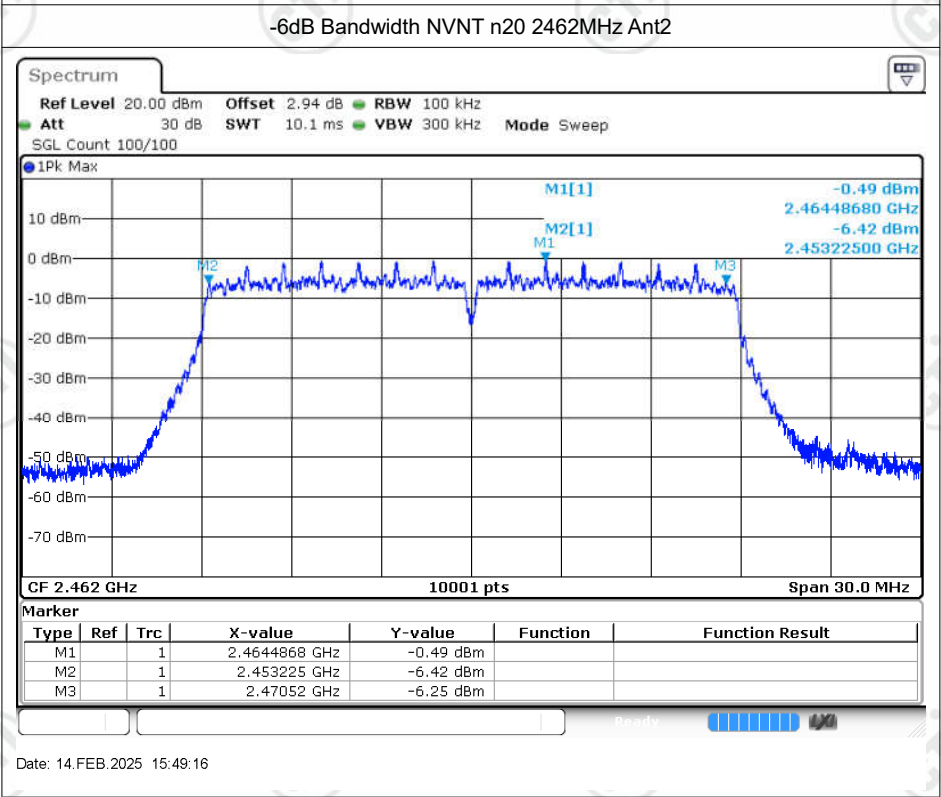


Date: 14.FEB.2025 15:49:16

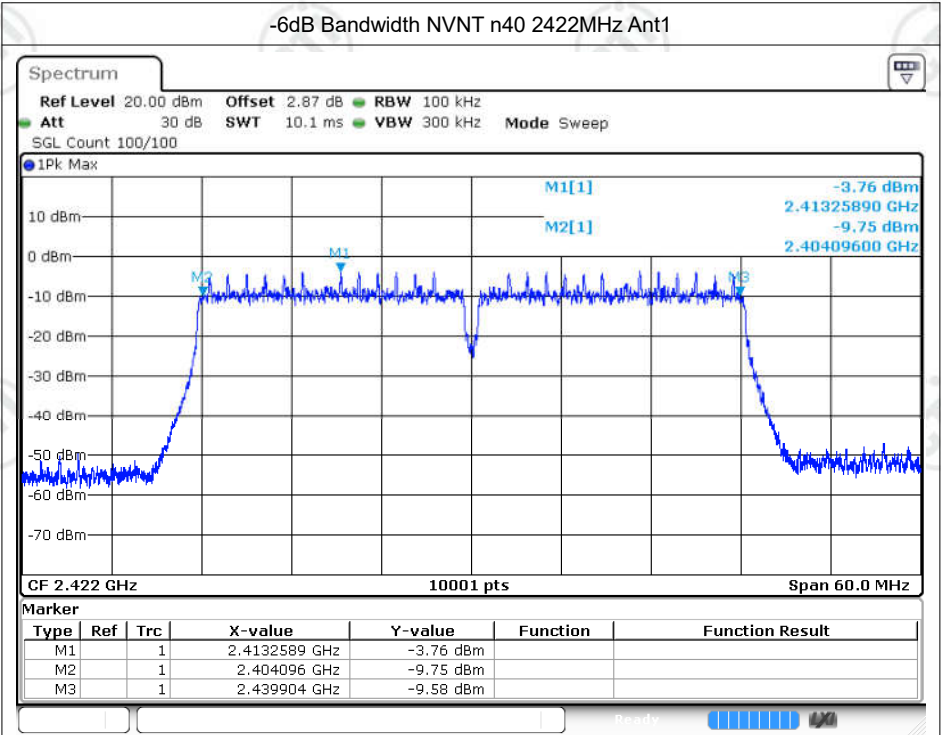


Date: 14.FEB.2025 14:49:27

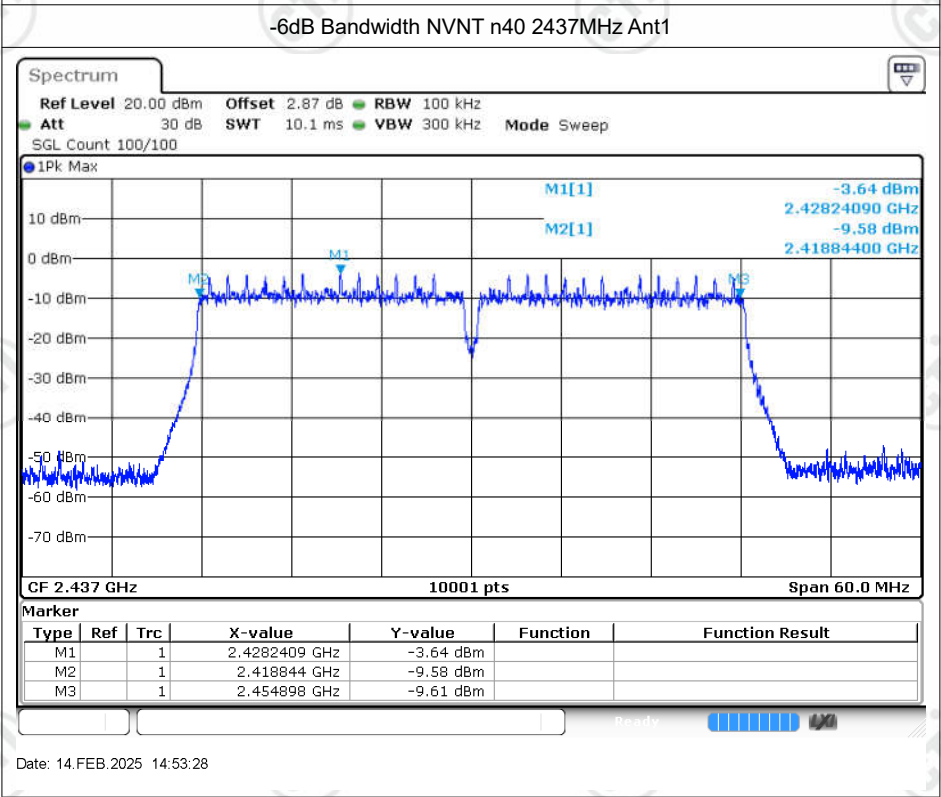


Date: 14.FEB.2025 14:53:28

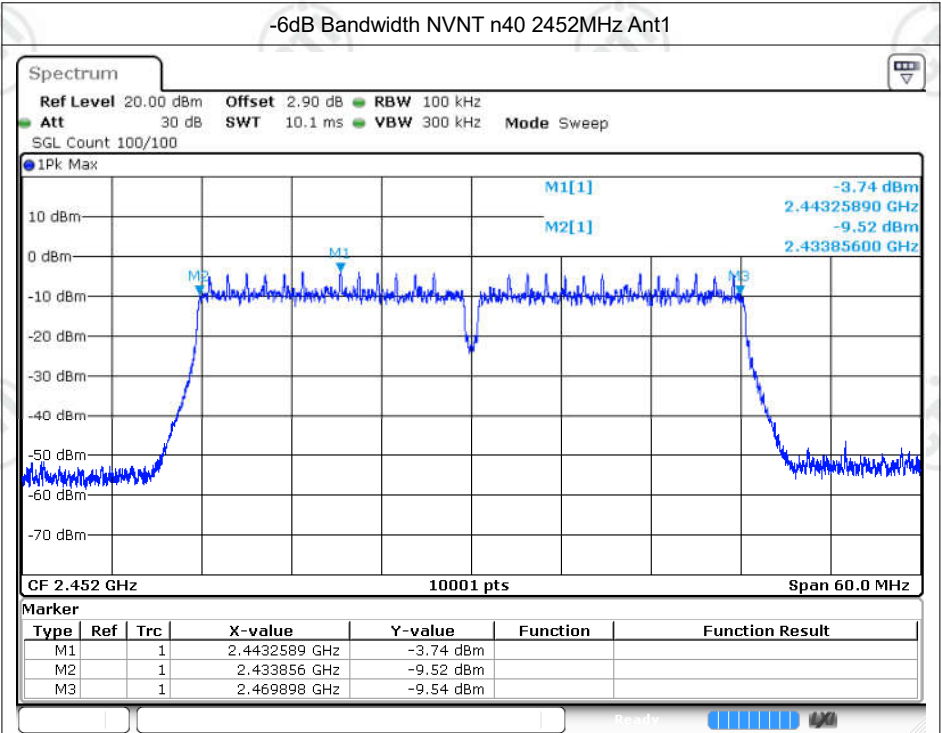


Date: 14.FEB.2025 14:57:27

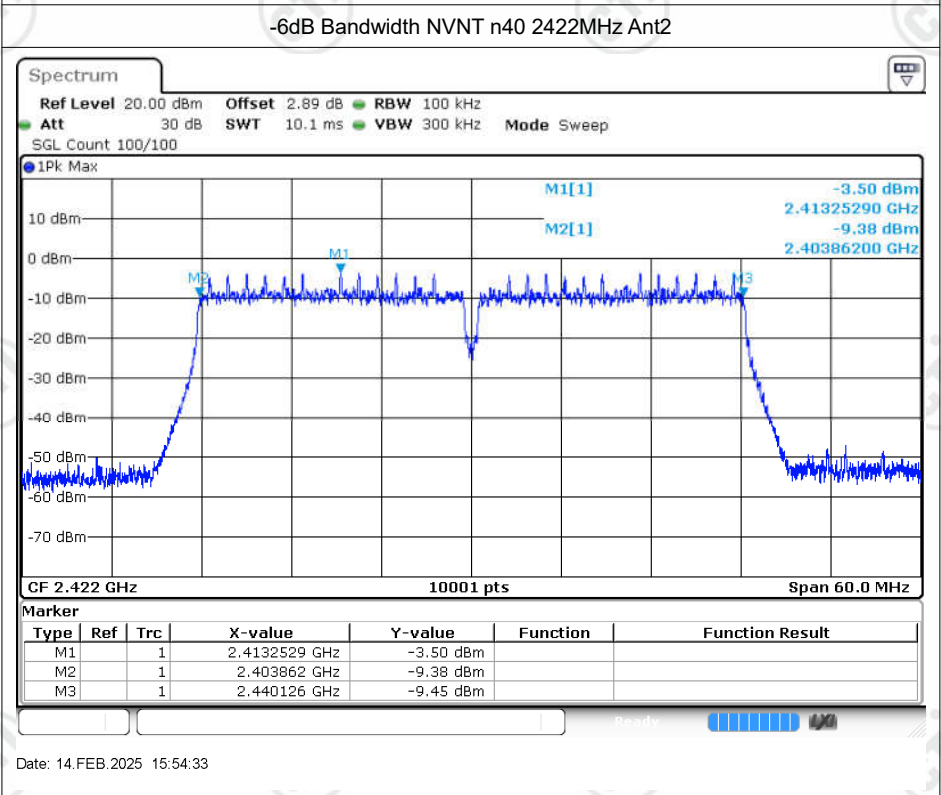


Date: 14.FEB.2025 15:54:33

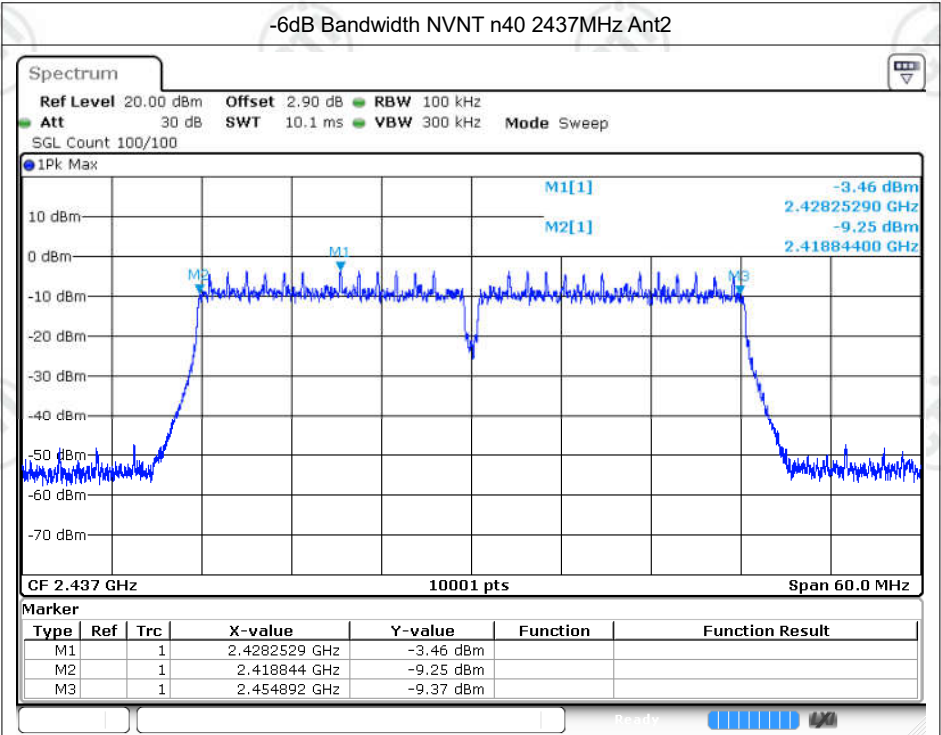


Date: 14.FEB.2025 16:05:40

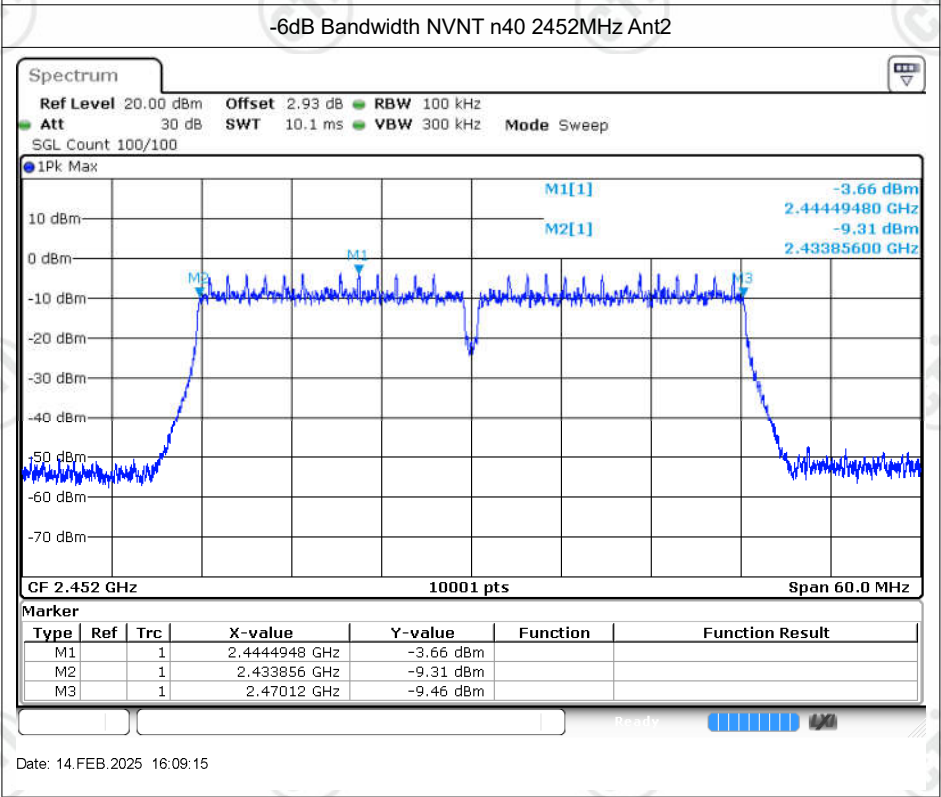


Date: 14.FEB.2025 16:09:15

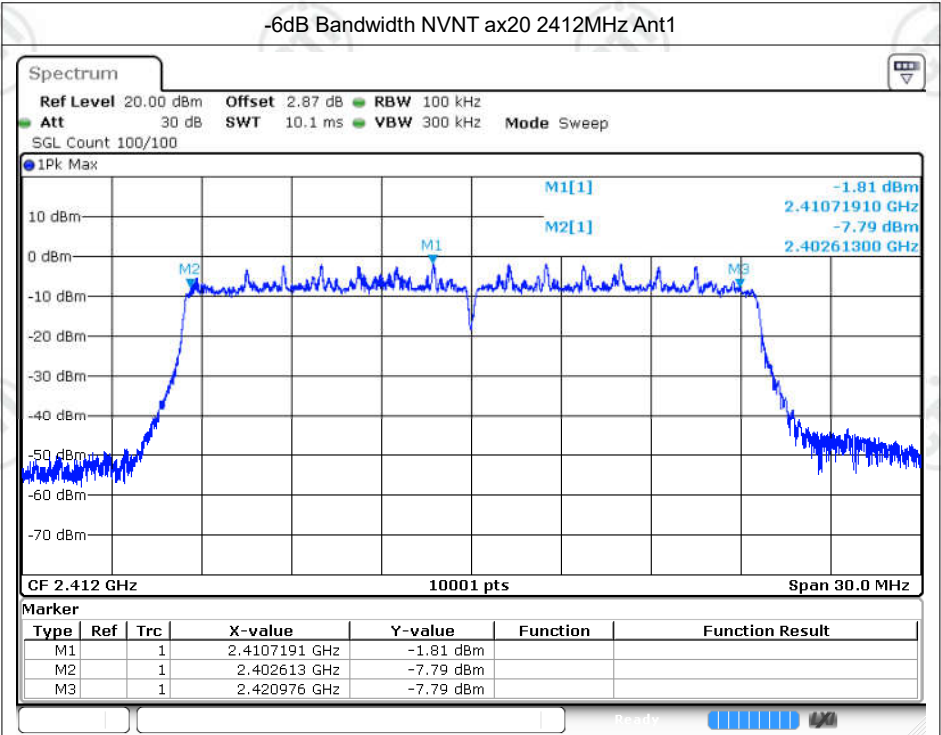


Date: 14.FEB.2025 15:01:11

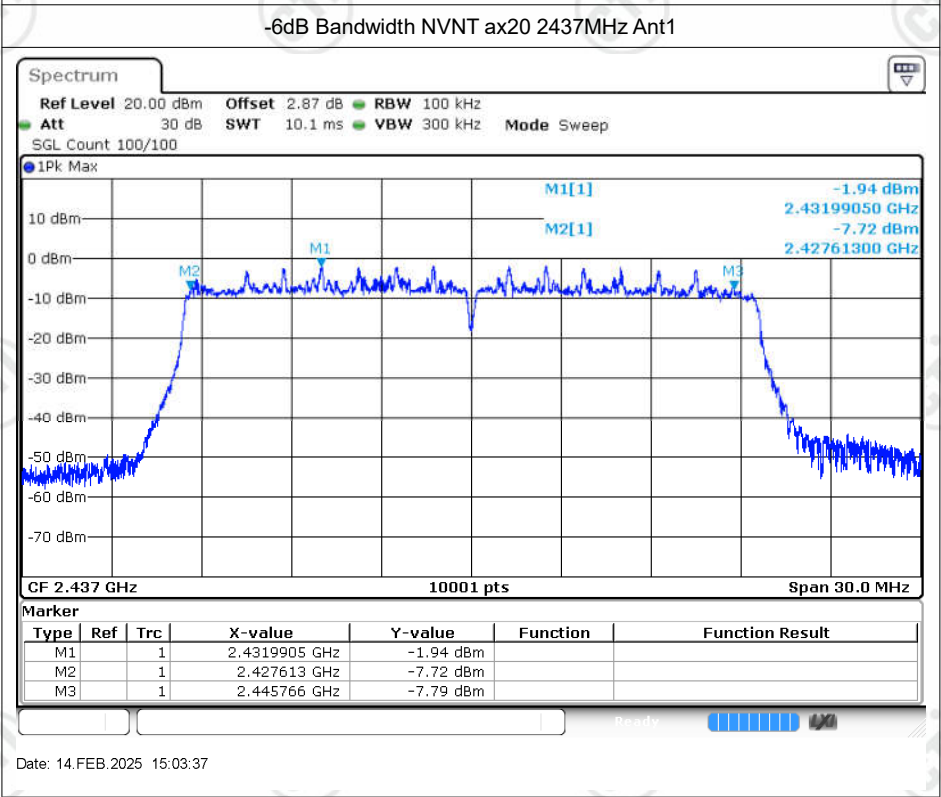


Date: 14.FEB.2025 15:03:37

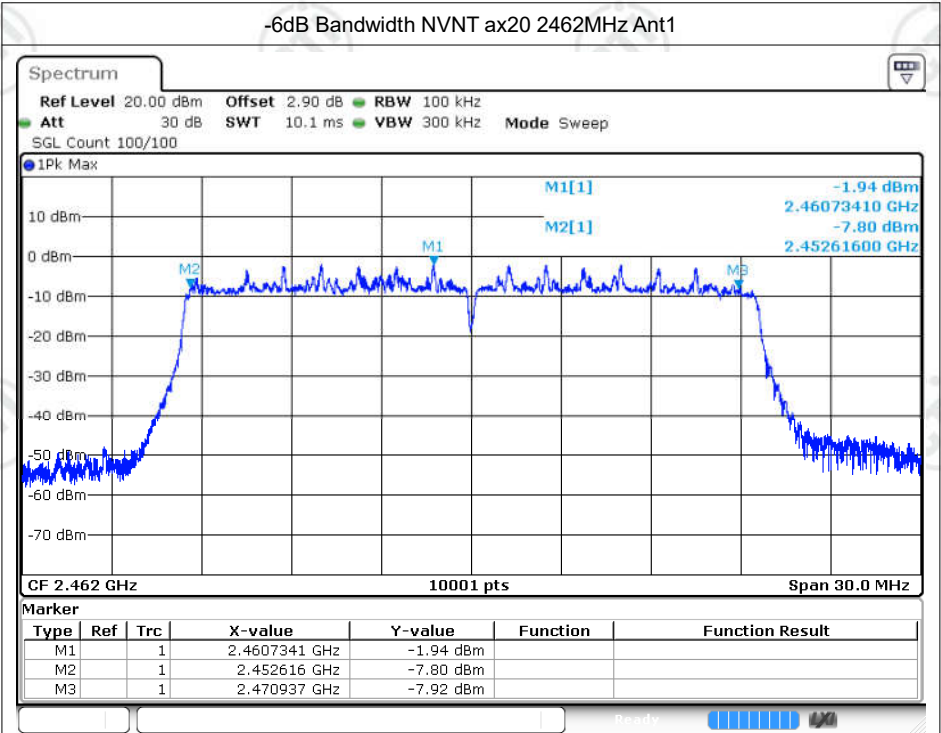


Date: 14.FEB.2025 15:05:55

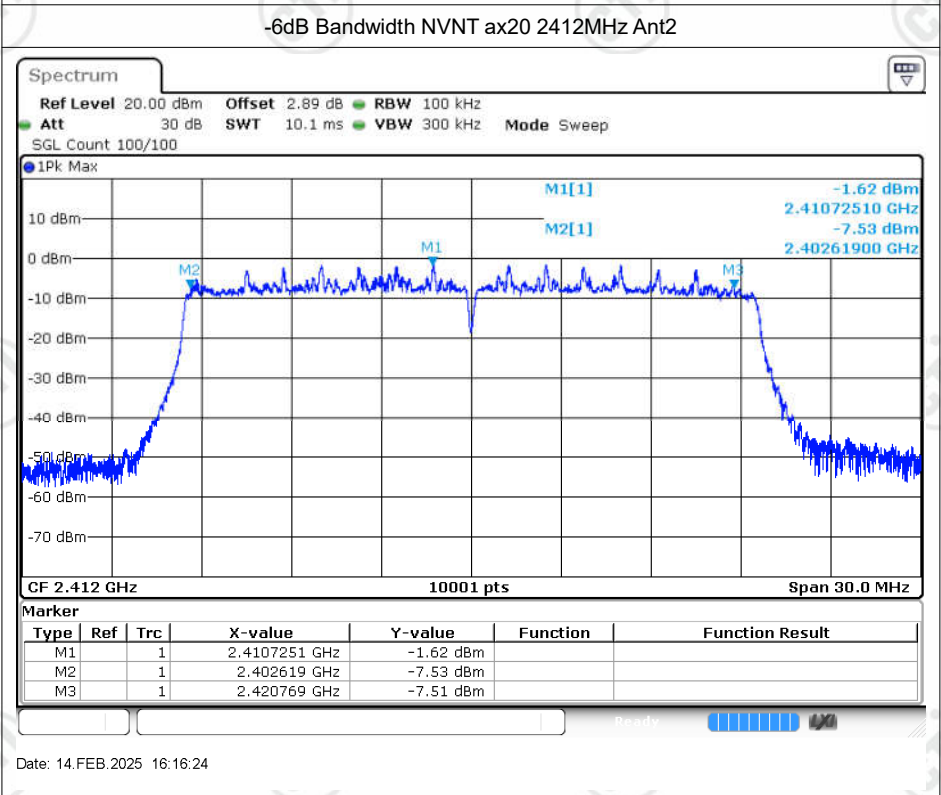


Date: 14.FEB.2025 16:16:24

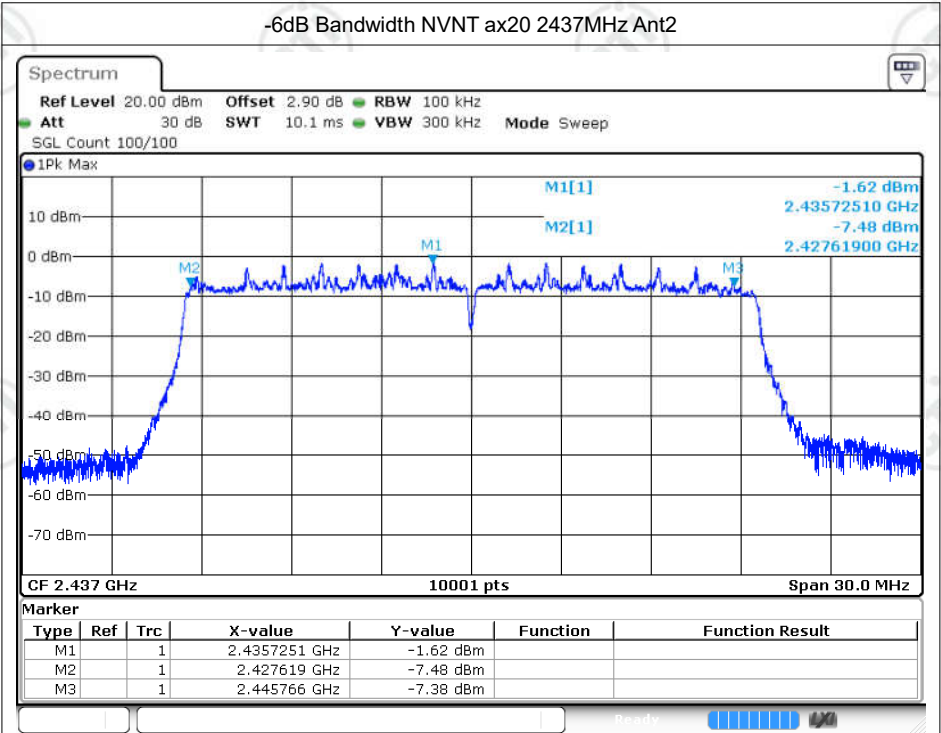


Date: 14.FEB.2025 16:18:46

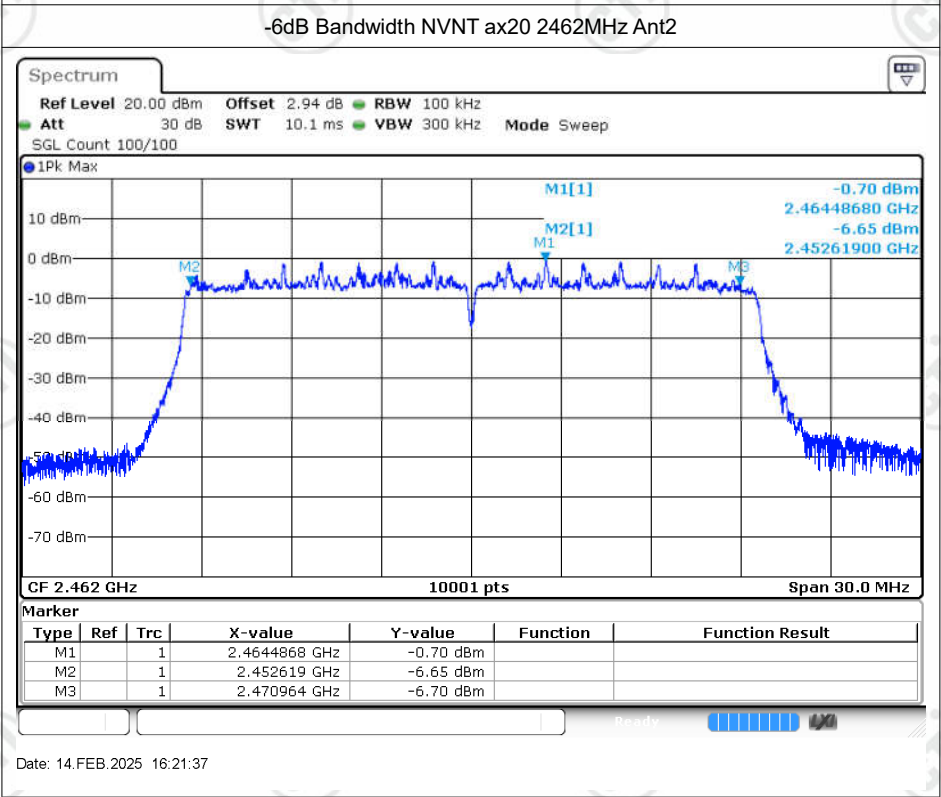


Date: 14.FEB.2025 16:21:37

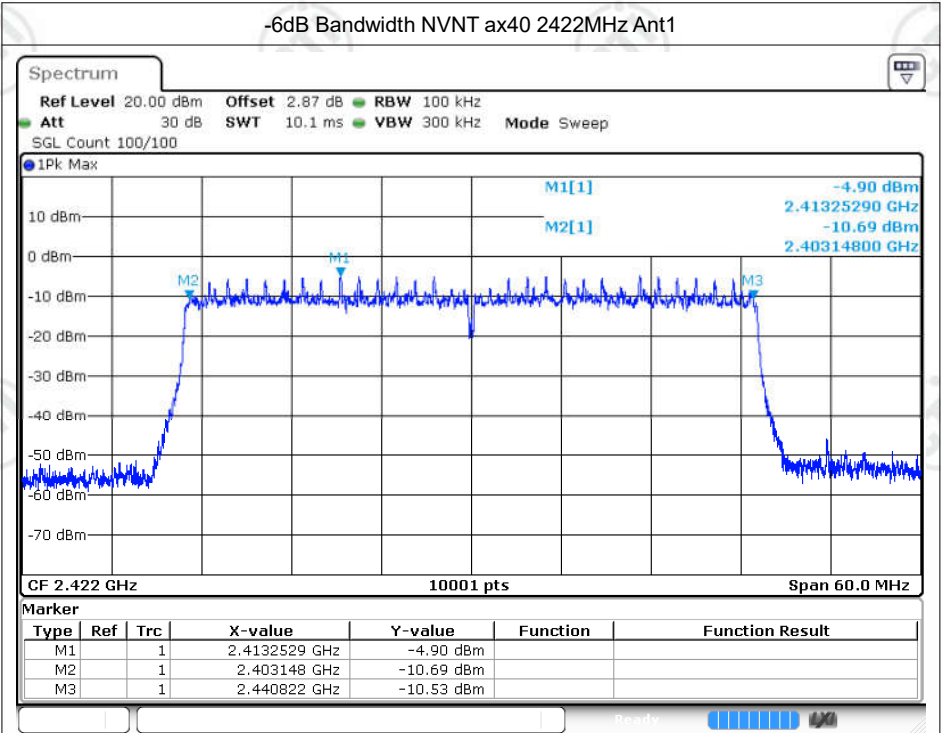


Date: 14.FEB.2025 15:08:57

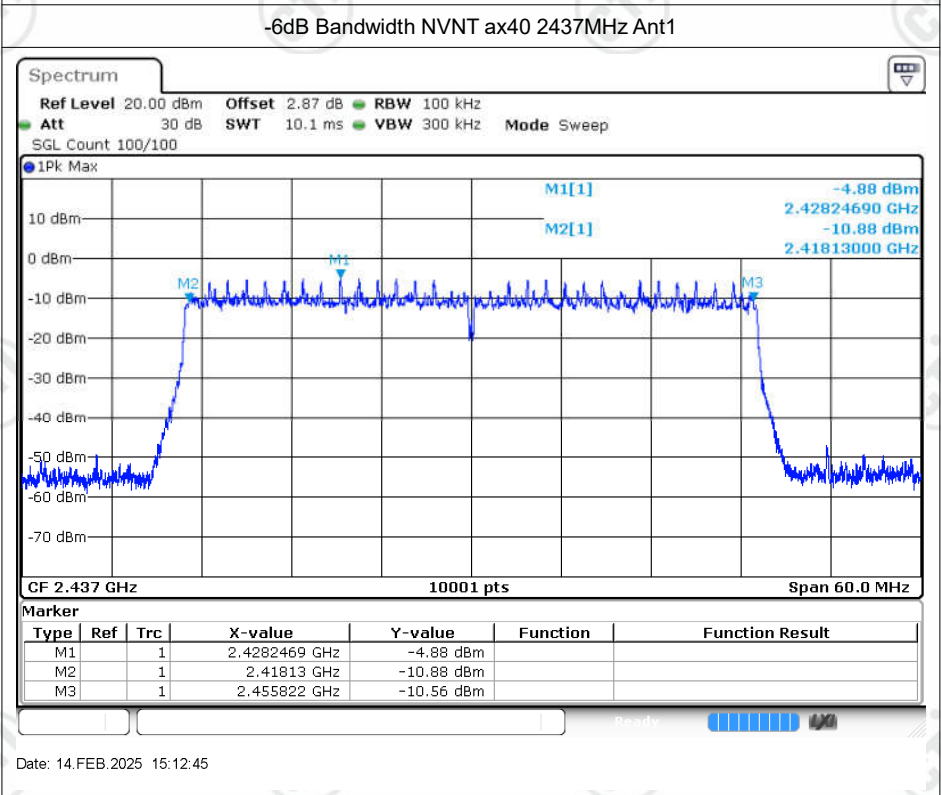


Date: 14.FEB.2025 15:12:45

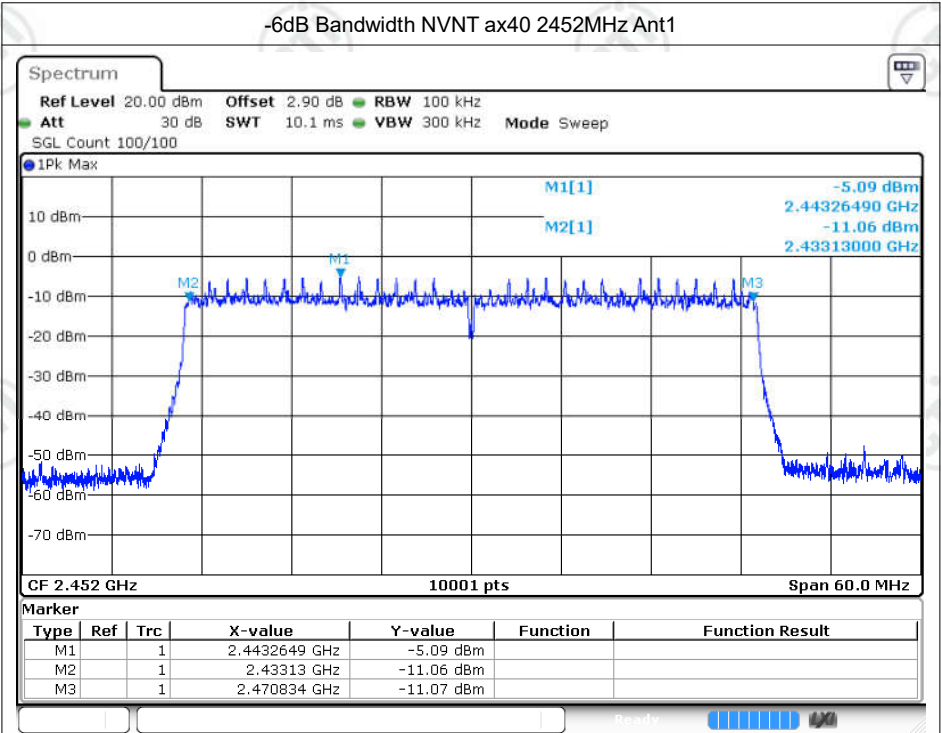


Date: 14.FEB.2025 15:16:32

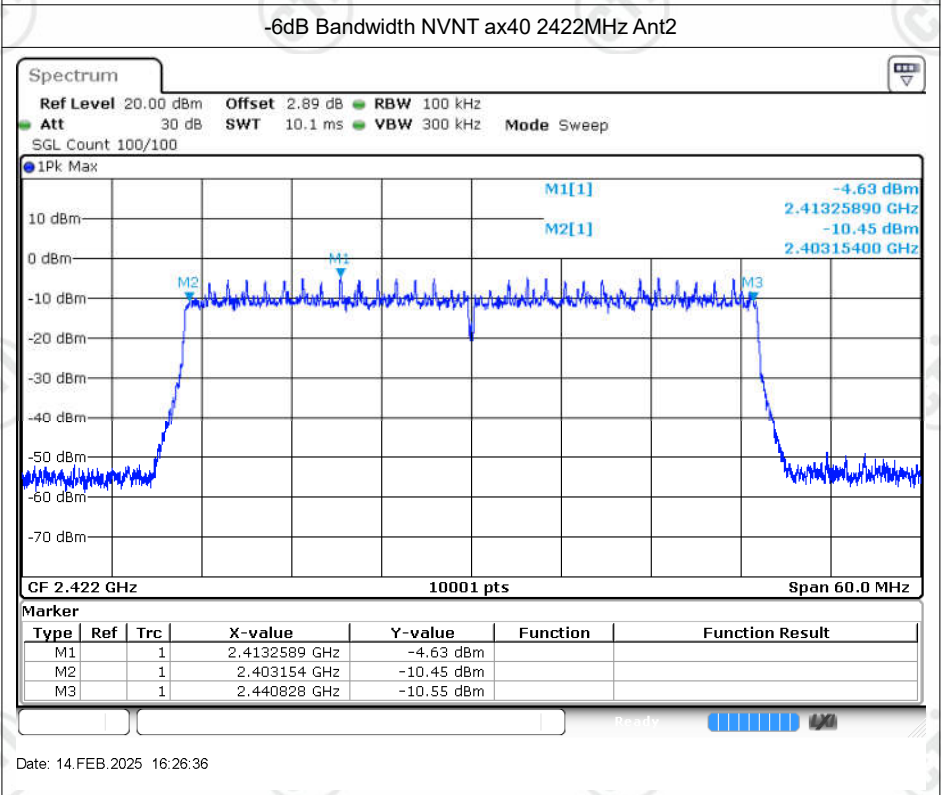

Date: 14.FEB.2025 16:26:36

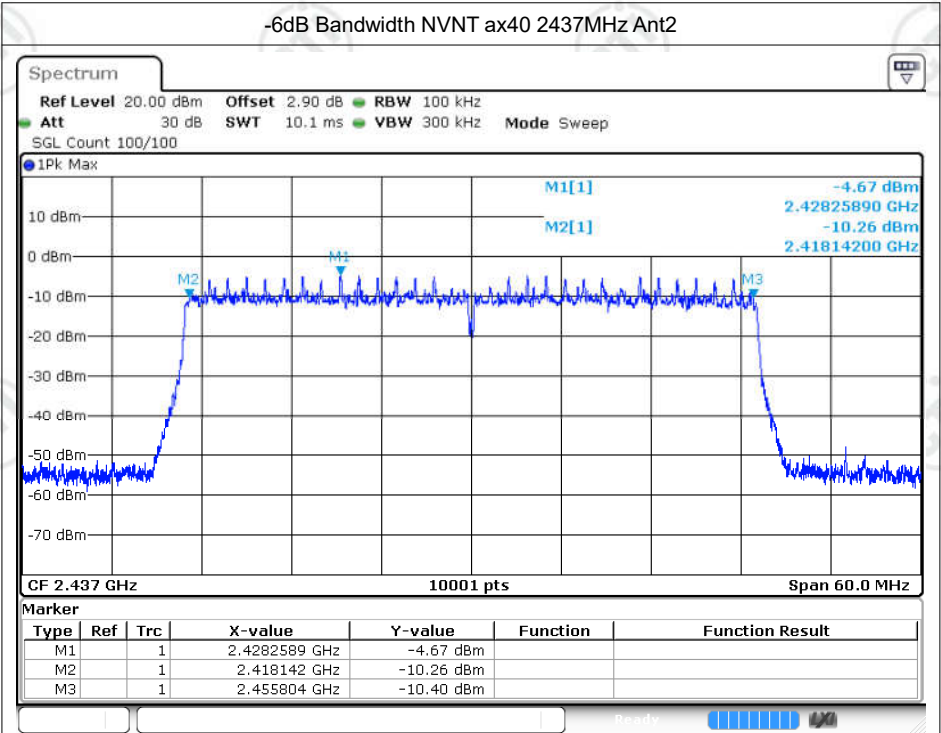


Date: 14.FEB.2025 16:33:02

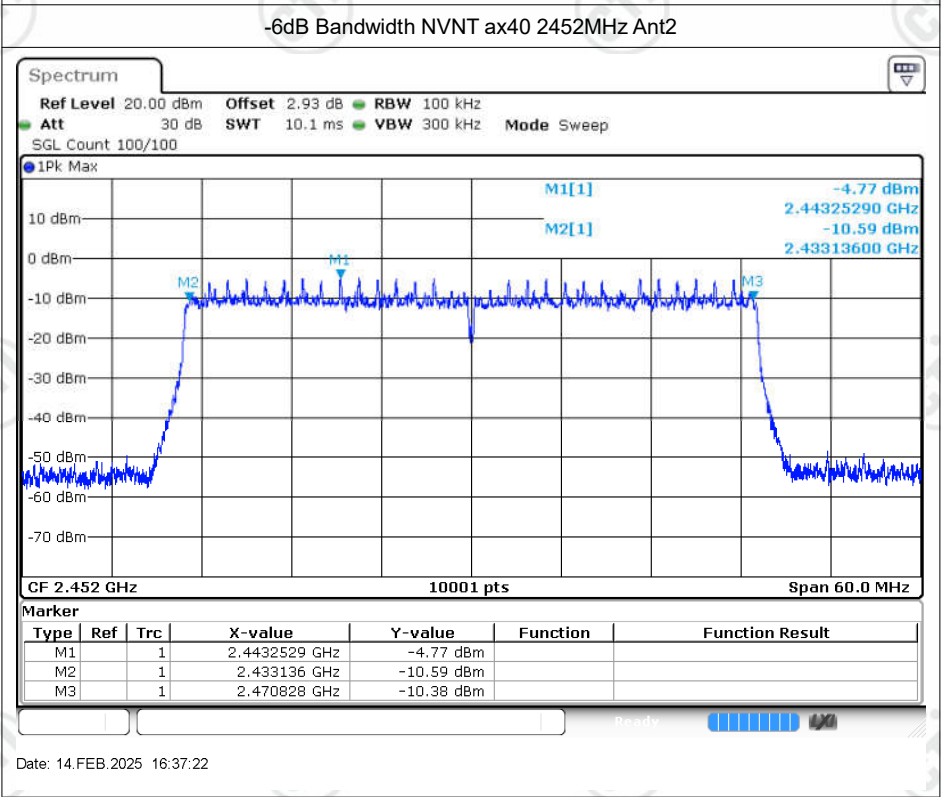


Date: 14.FEB.2025 16:37:22

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	14.927
NVNT	b	2437	Ant1	14.894
NVNT	b	2462	Ant1	14.915
NVNT	b	2412	Ant2	14.885
NVNT	b	2437	Ant2	14.891
NVNT	b	2462	Ant2	14.933
NVNT	g	2412	Ant1	16.318
NVNT	g	2437	Ant1	16.306
NVNT	g	2462	Ant1	16.309
NVNT	g	2412	Ant2	16.312
NVNT	g	2437	Ant2	16.315
NVNT	g	2462	Ant2	16.324
NVNT	n20	2412	Ant1	17.491
NVNT	n20	2437	Ant1	17.479
NVNT	n20	2462	Ant1	17.485
NVNT	n20	2412	Ant2	17.491
NVNT	n20	2437	Ant2	17.5
NVNT	n20	2462	Ant2	17.494
NVNT	n40	2422	Ant1	36.182
NVNT	n40	2437	Ant1	36.194
NVNT	n40	2452	Ant1	36.206
NVNT	n40	2422	Ant2	36.212
NVNT	n40	2437	Ant2	36.194
NVNT	n40	2452	Ant2	36.236
NVNT	ax20	2412	Ant1	18.883
NVNT	ax20	2437	Ant1	18.865
NVNT	ax20	2462	Ant1	18.877
NVNT	ax20	2412	Ant2	18.85
NVNT	ax20	2437	Ant2	18.862
NVNT	ax20	2462	Ant2	18.88
NVNT	ax40	2422	Ant1	37.706
NVNT	ax40	2437	Ant1	37.754
NVNT	ax40	2452	Ant1	37.742
NVNT	ax40	2422	Ant2	37.73
NVNT	ax40	2437	Ant2	37.724
NVNT	ax40	2452	Ant2	37.76

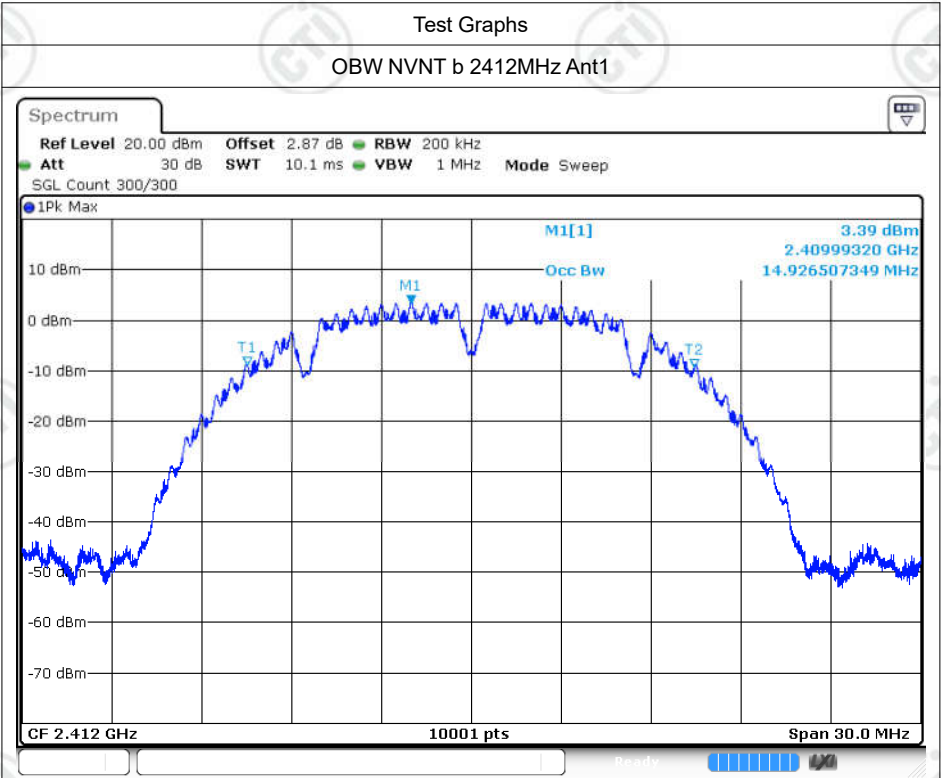


Date: 14.FEB.2025 14:19:39

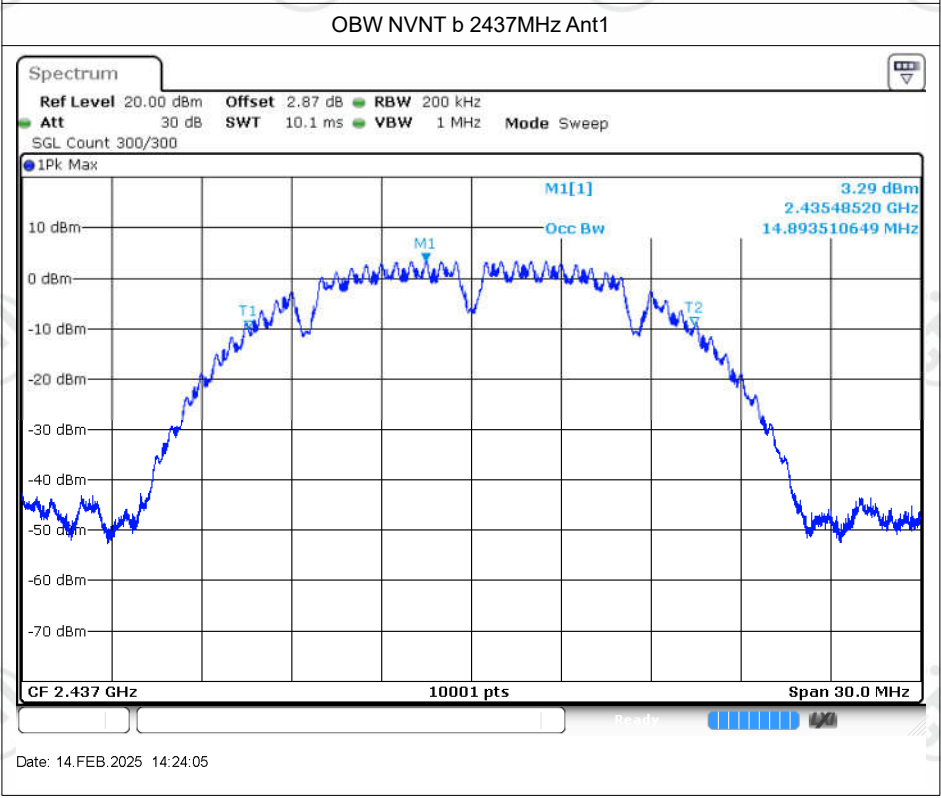


Date: 14.FEB.2025 14:24:05

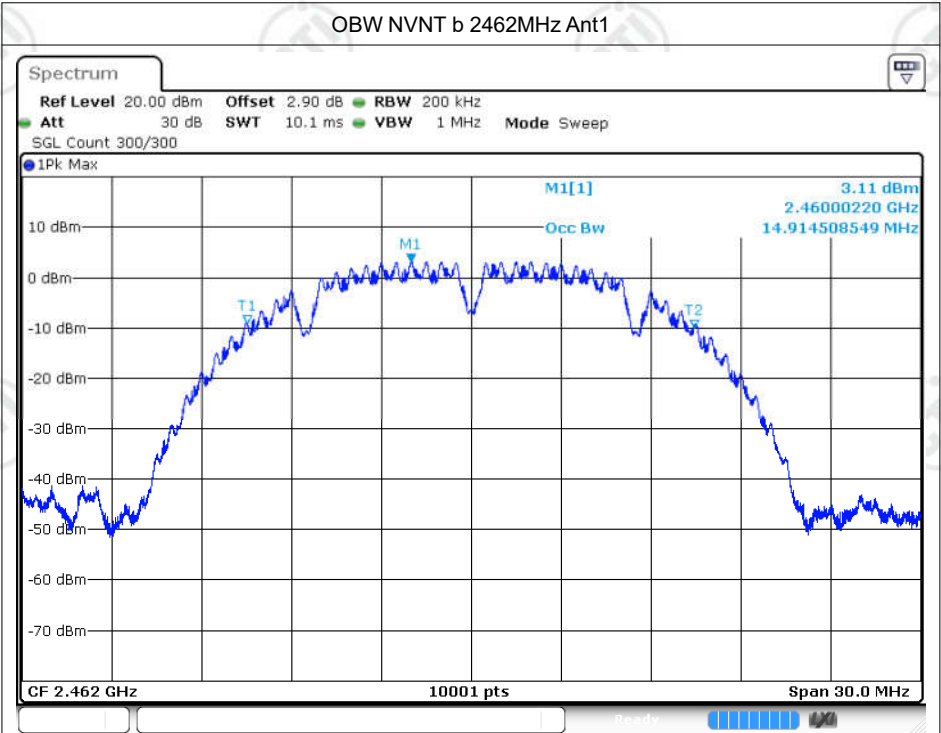


Date: 14.FEB.2025 14:27:01

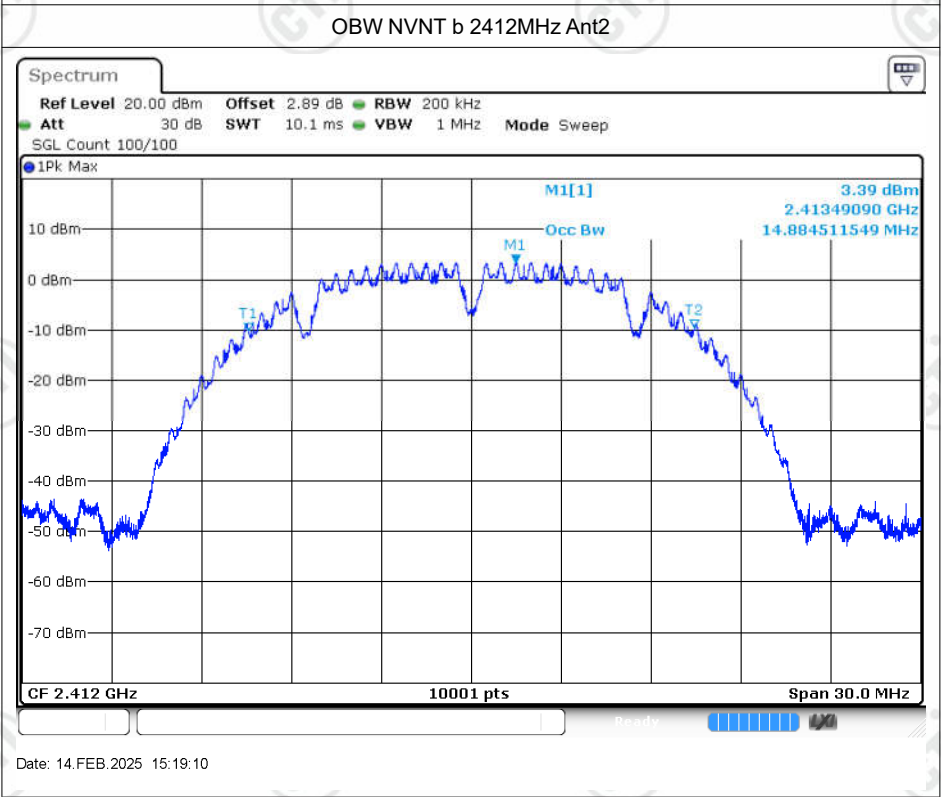


Date: 14.FEB.2025 15:19:10

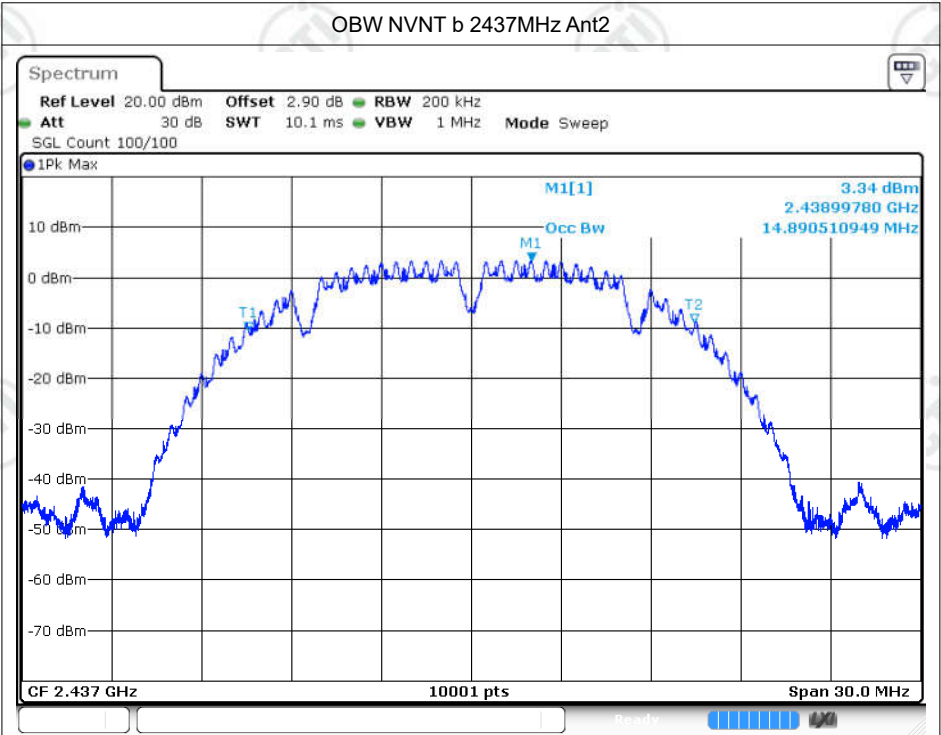


Date: 14.FEB.2025 15:21:40

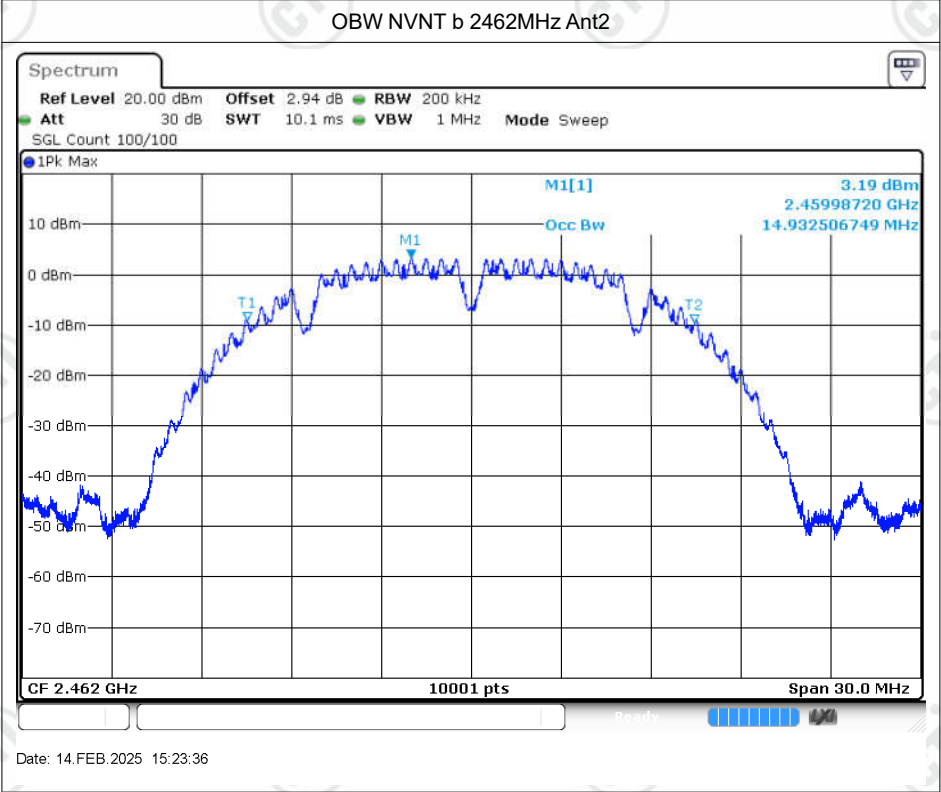


Date: 14.FEB.2025 15:23:36

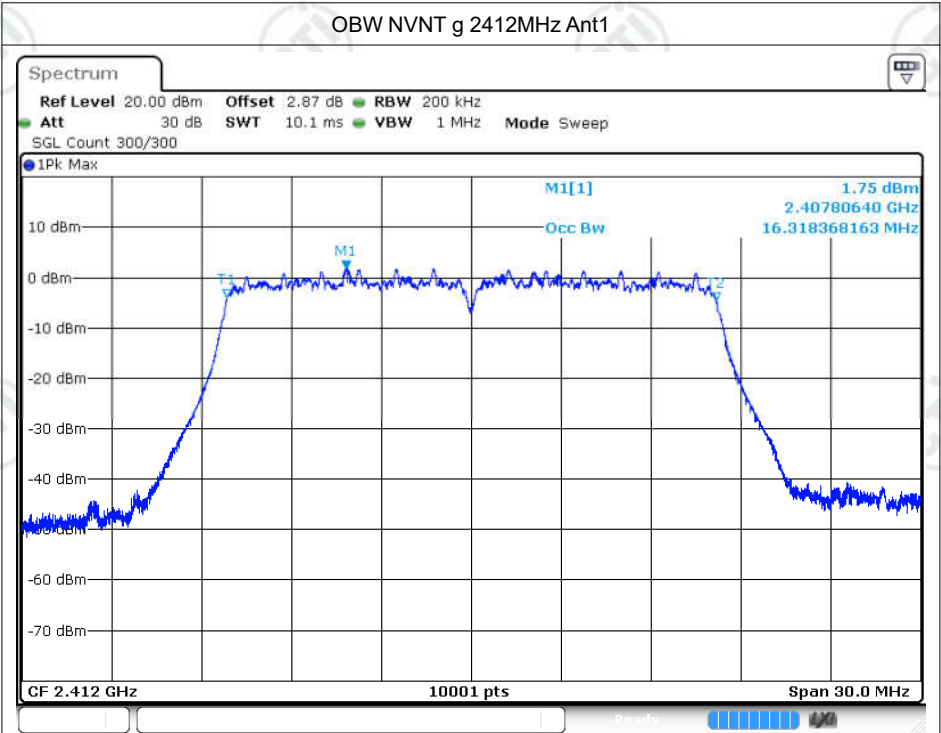


Date: 14.FEB.2025 14:30:44

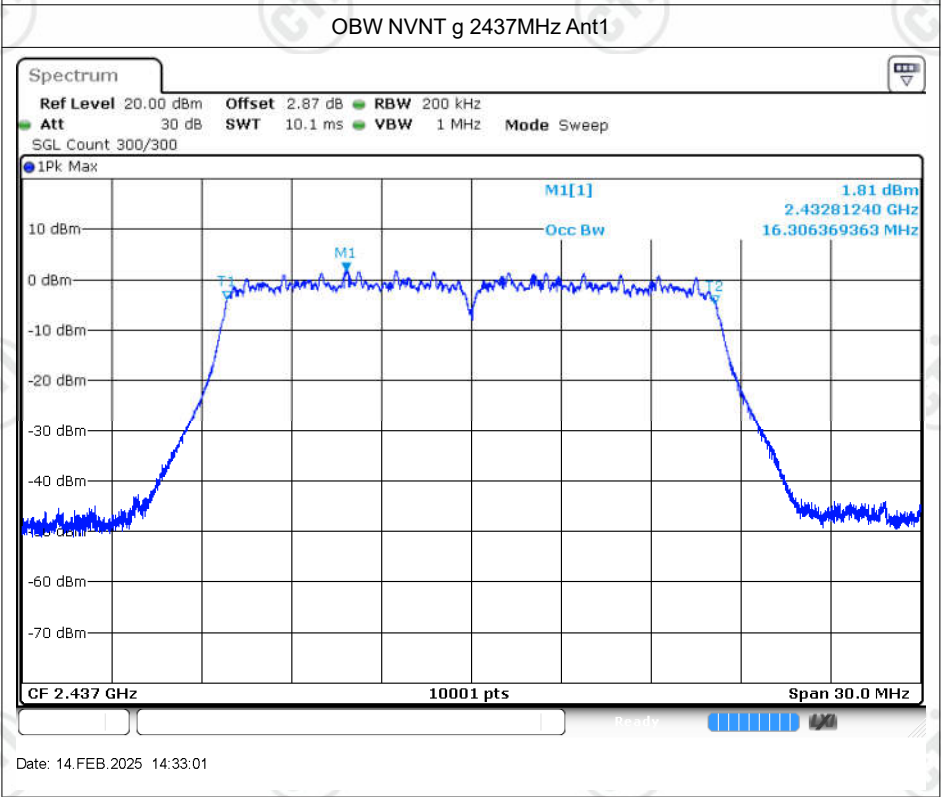



Date: 14.FEB.2025 14:33:01

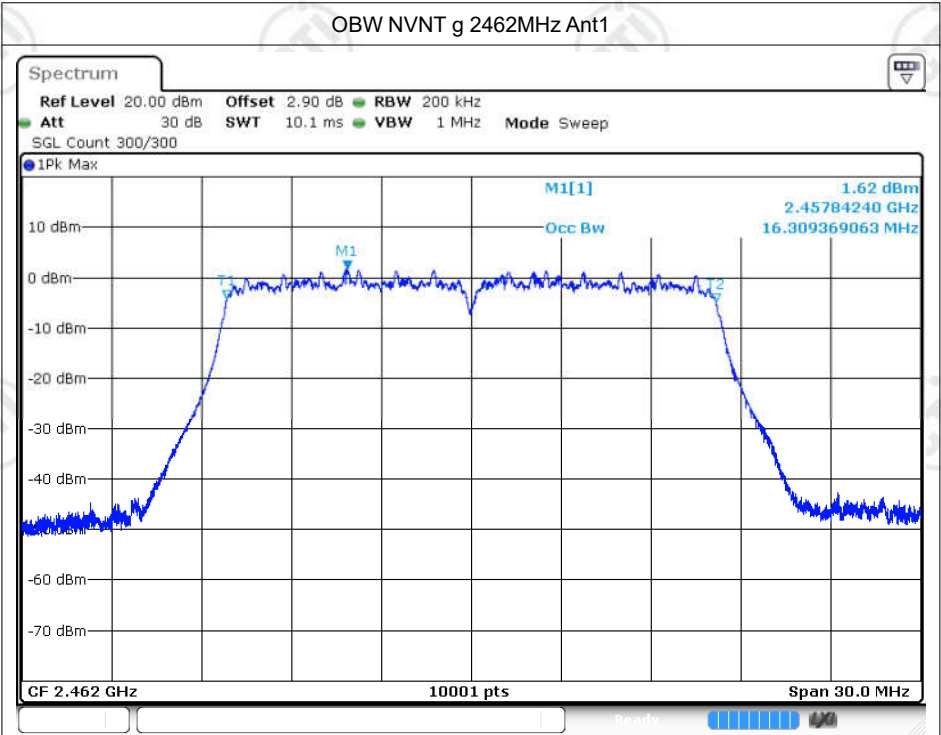


Date: 14.FEB.2025 14:35:20

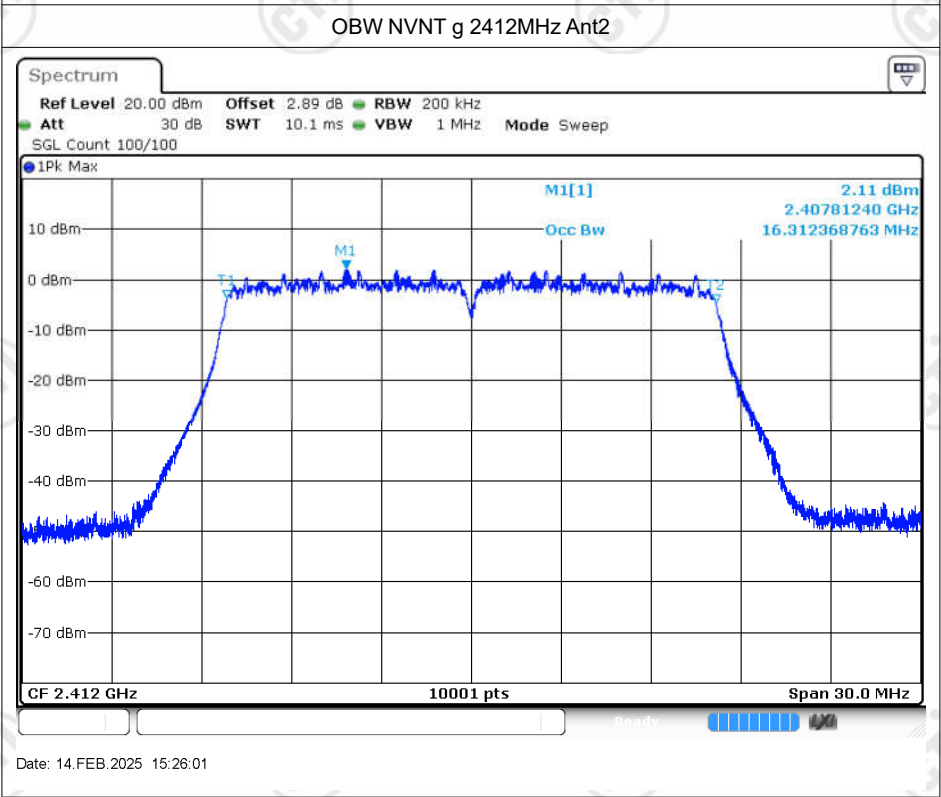


Date: 14.FEB.2025 15:26:01

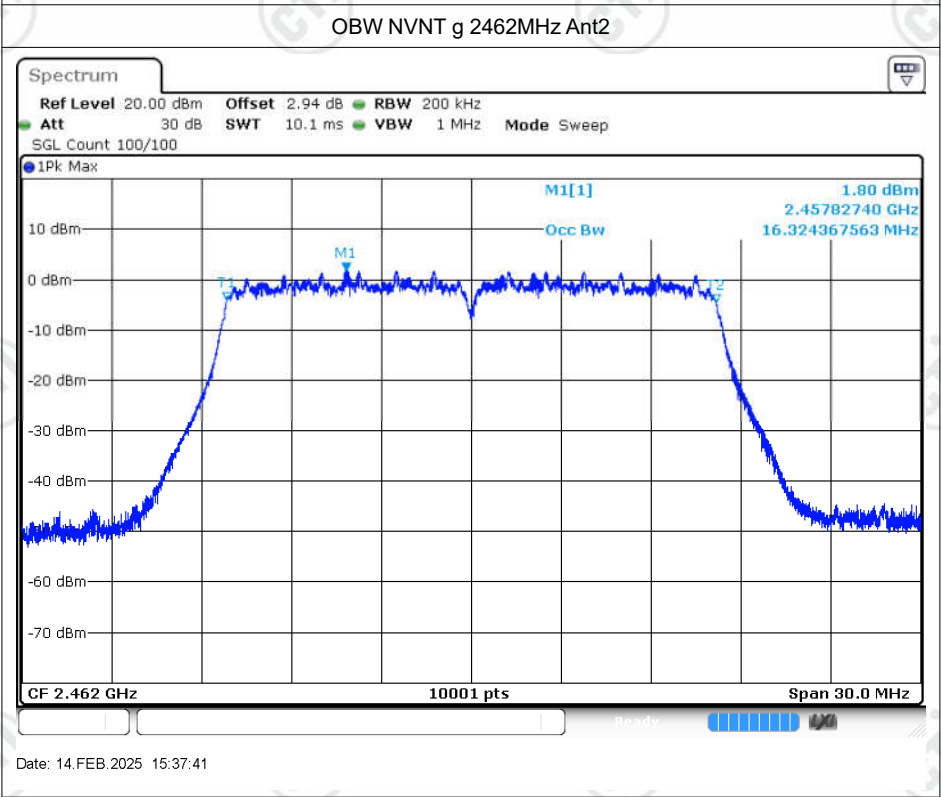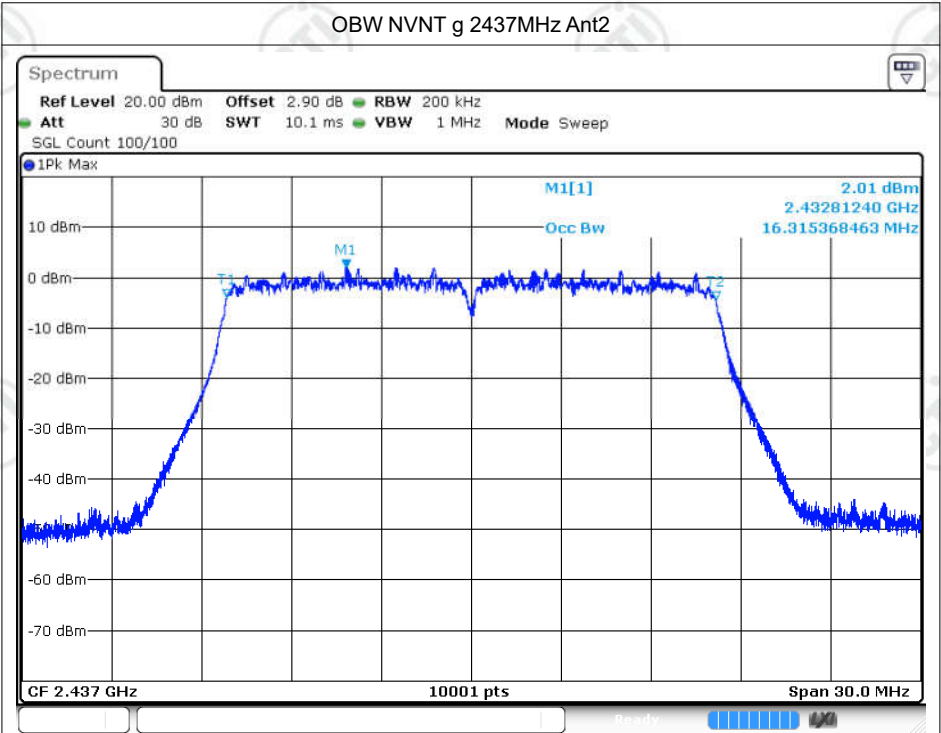


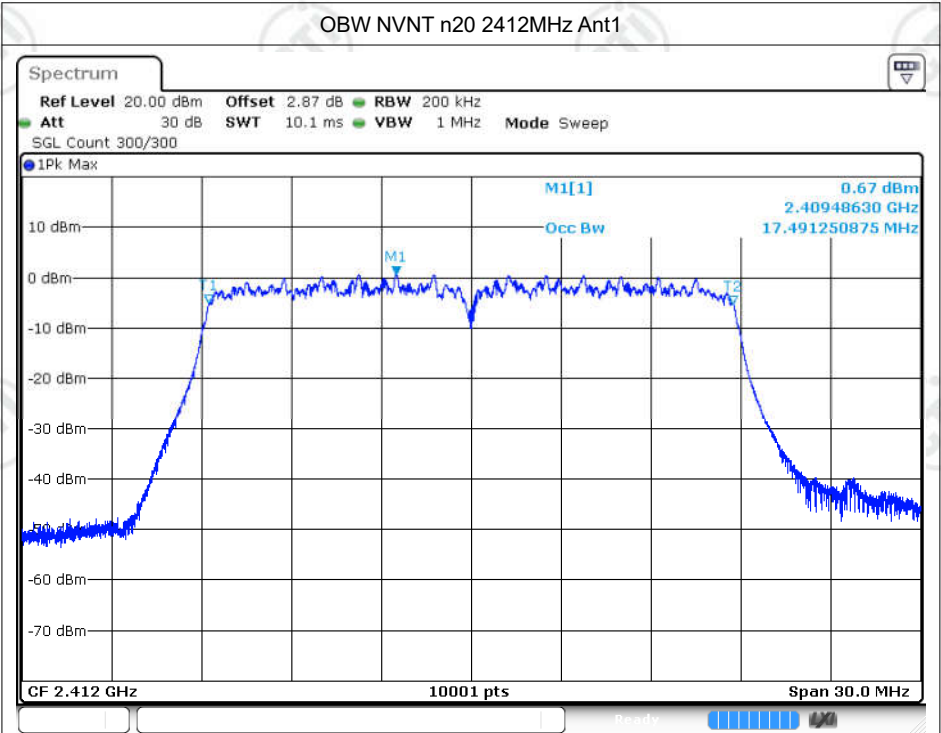


Date: 14.FEB.2025 14:37:42

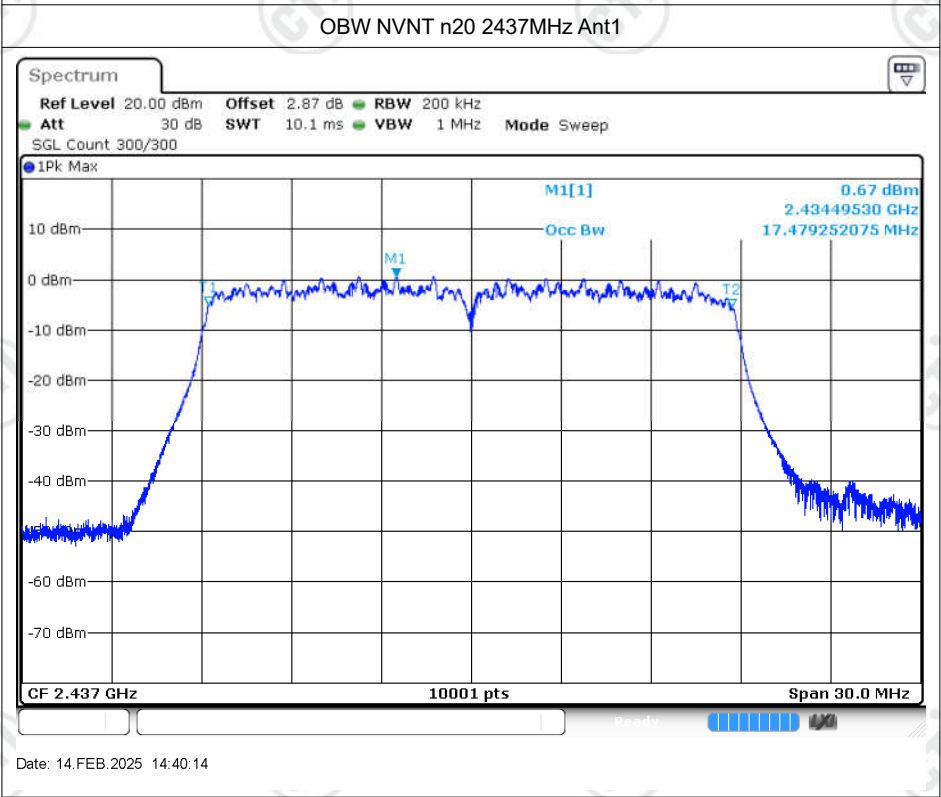



Date: 14.FEB.2025 14:40:14

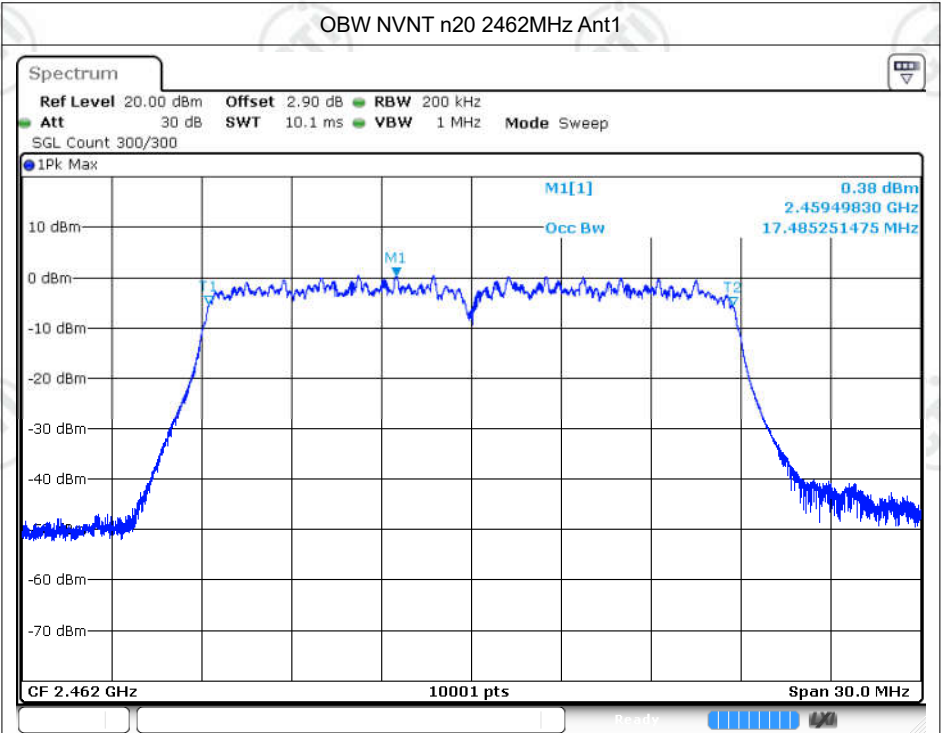


Date: 14.FEB.2025 14:43:18

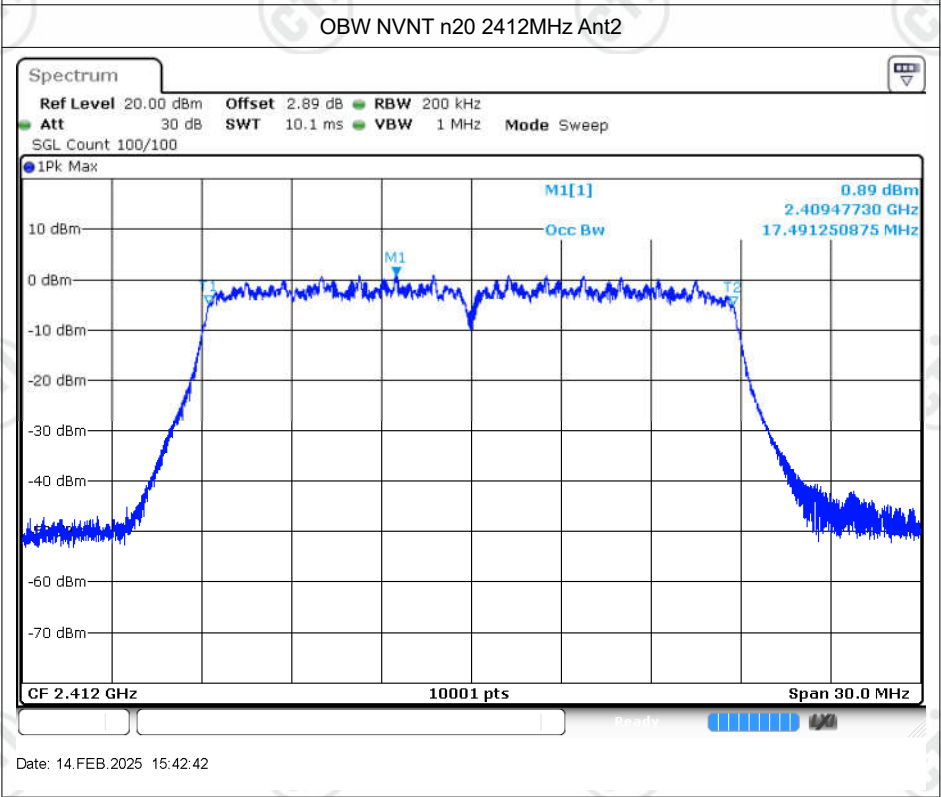


Date: 14.FEB.2025 15:42:42

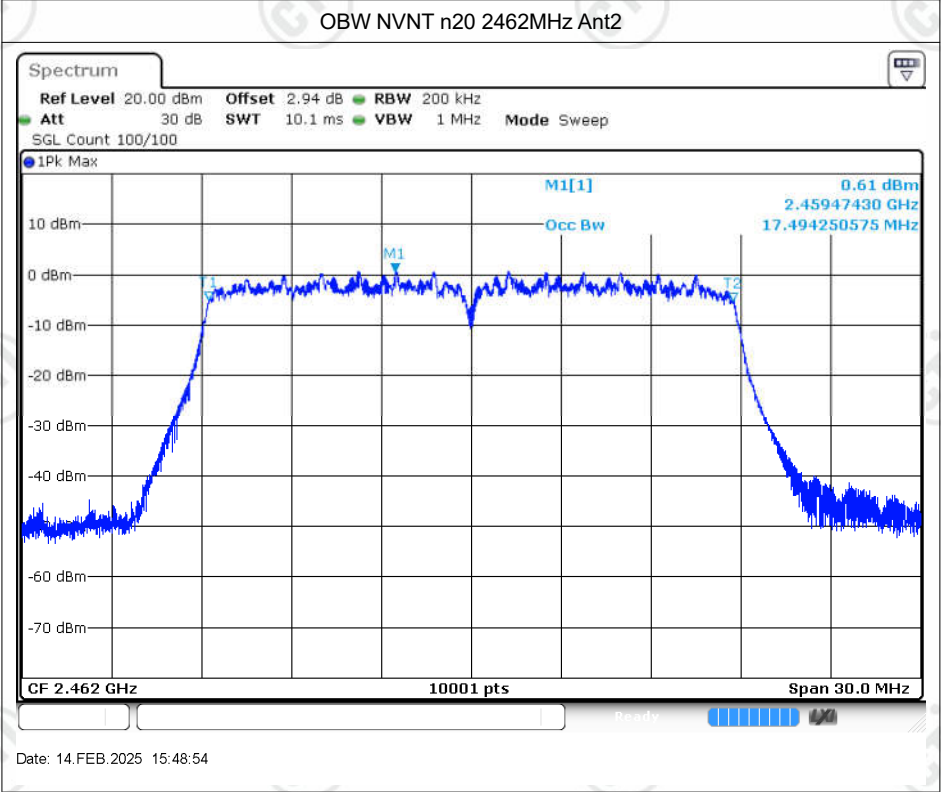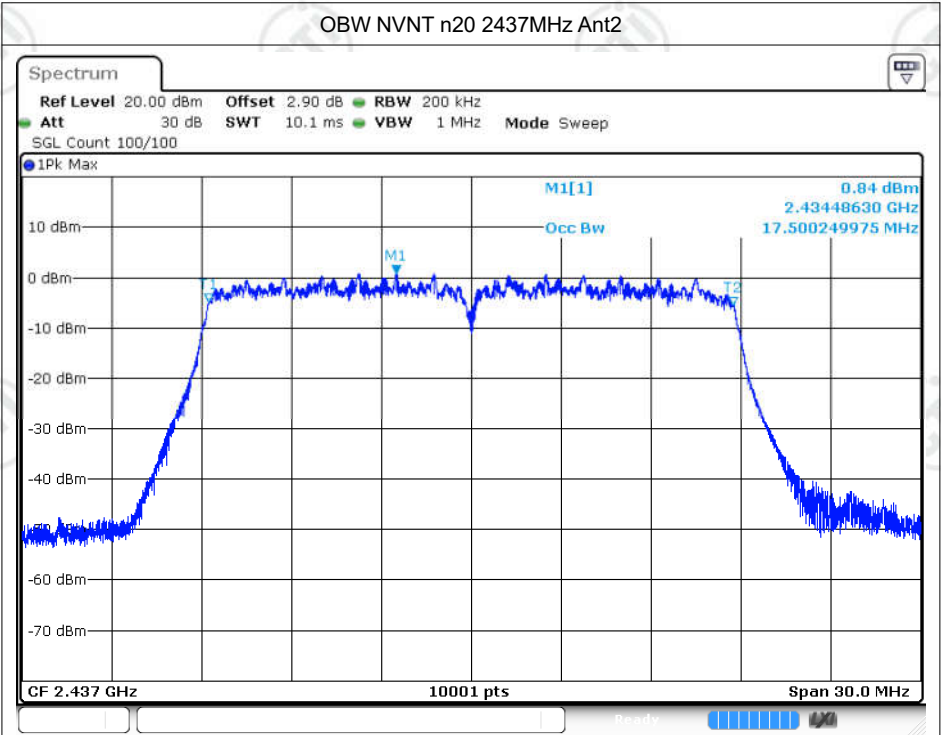


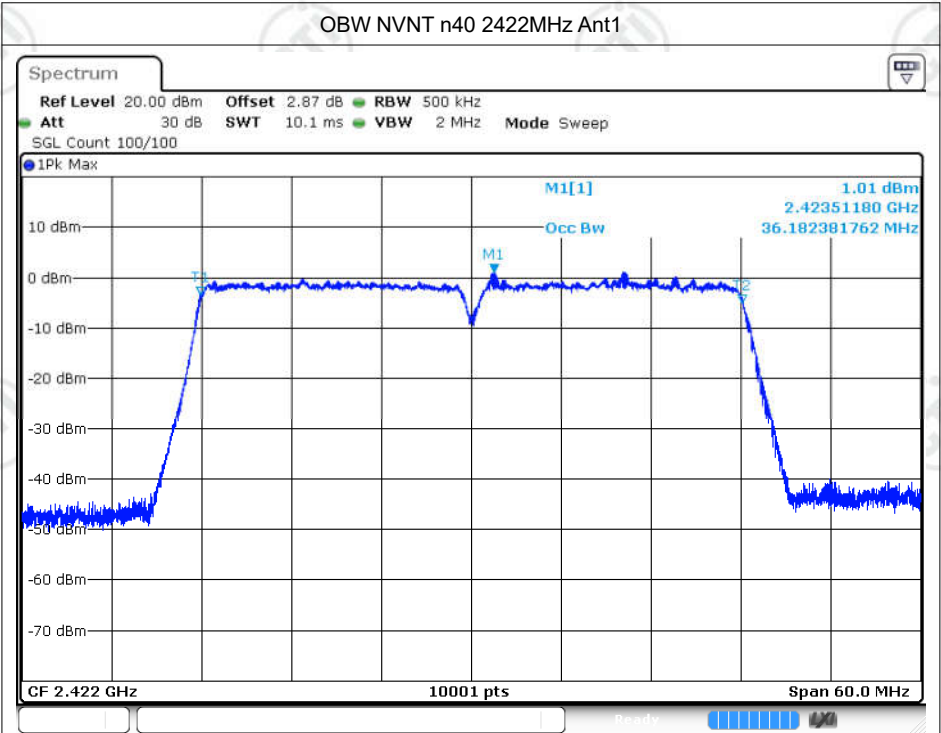


Date: 14.FEB.2025 14:49:15

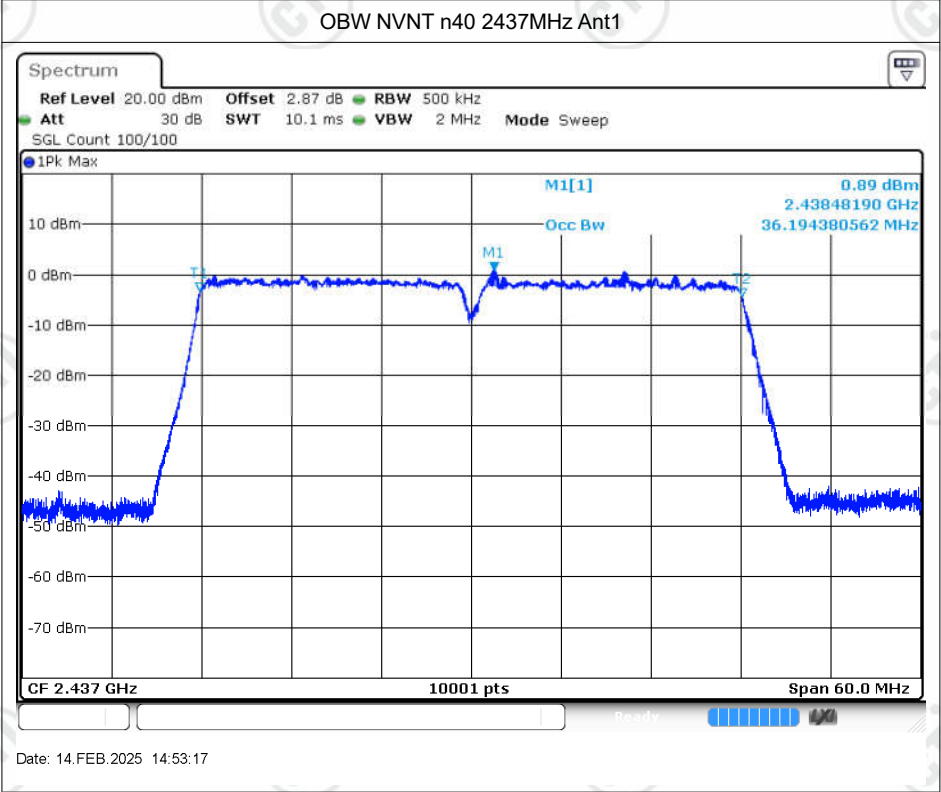


Date: 14.FEB.2025 14:53:17

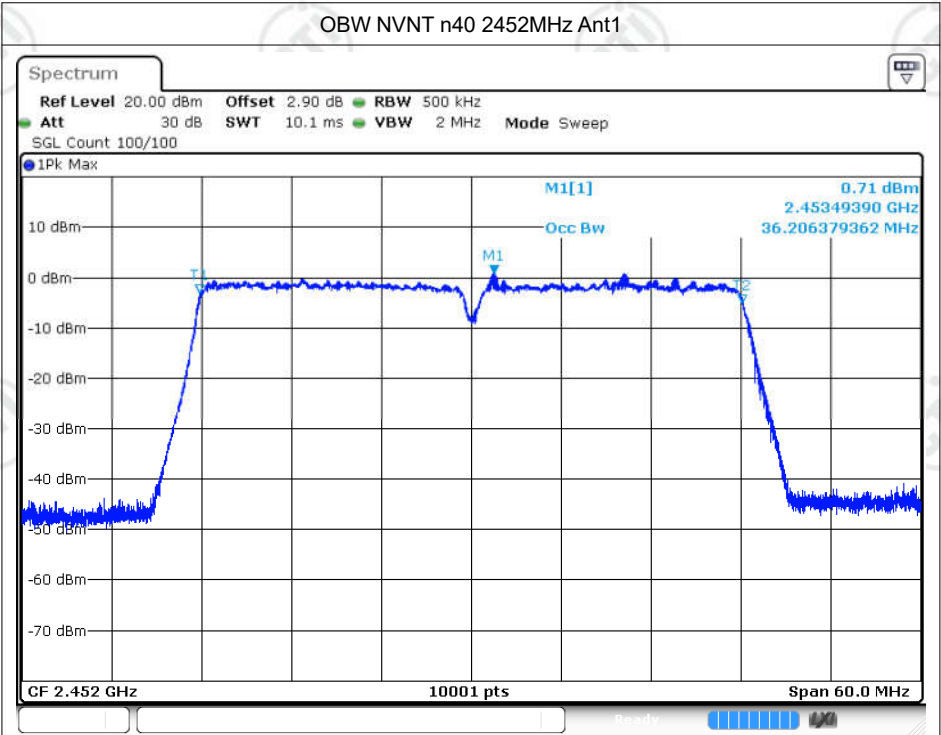


Date: 14.FEB.2025 14:57:15

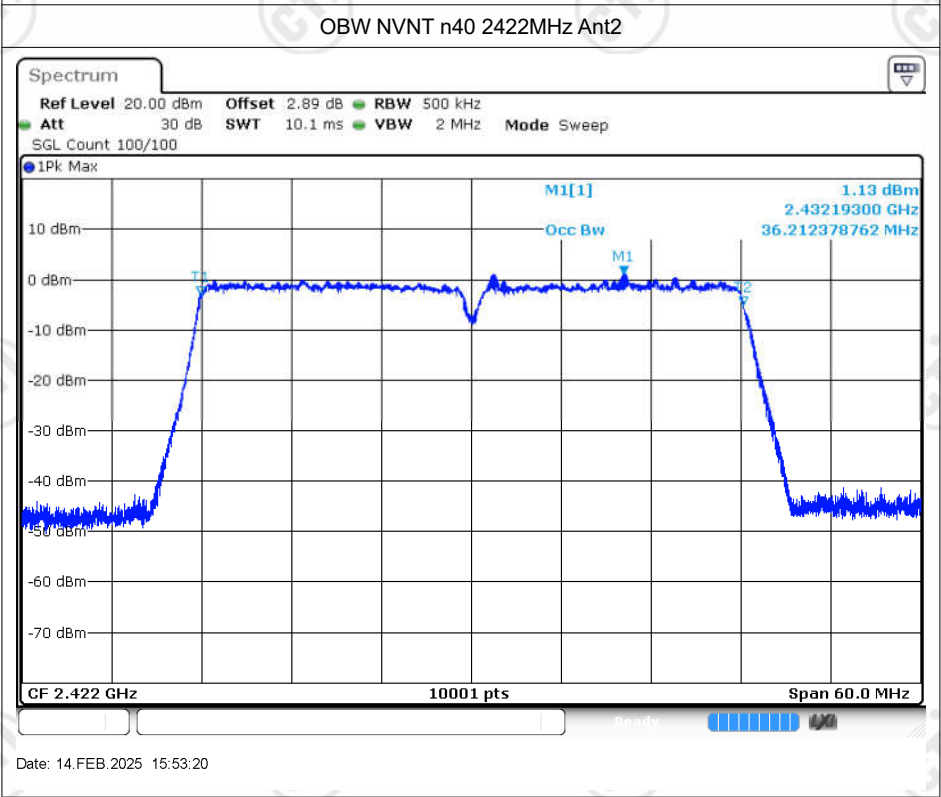


Date: 14.FEB.2025 15:53:20

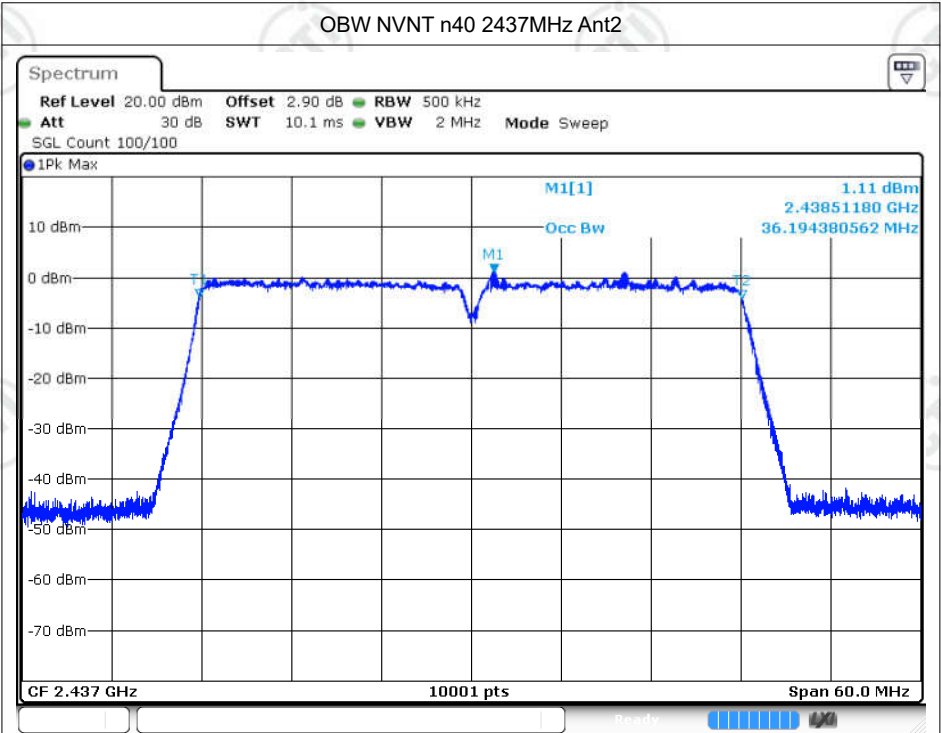


Date: 14.FEB.2025 16:04:52

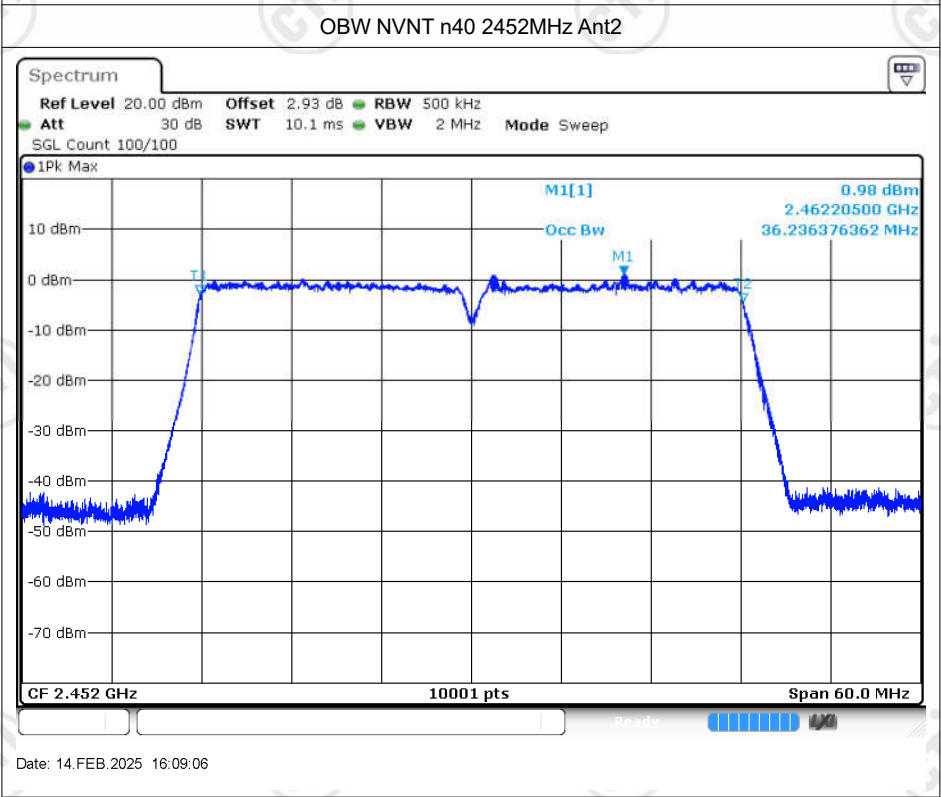


Date: 14.FEB.2025 16:09:06

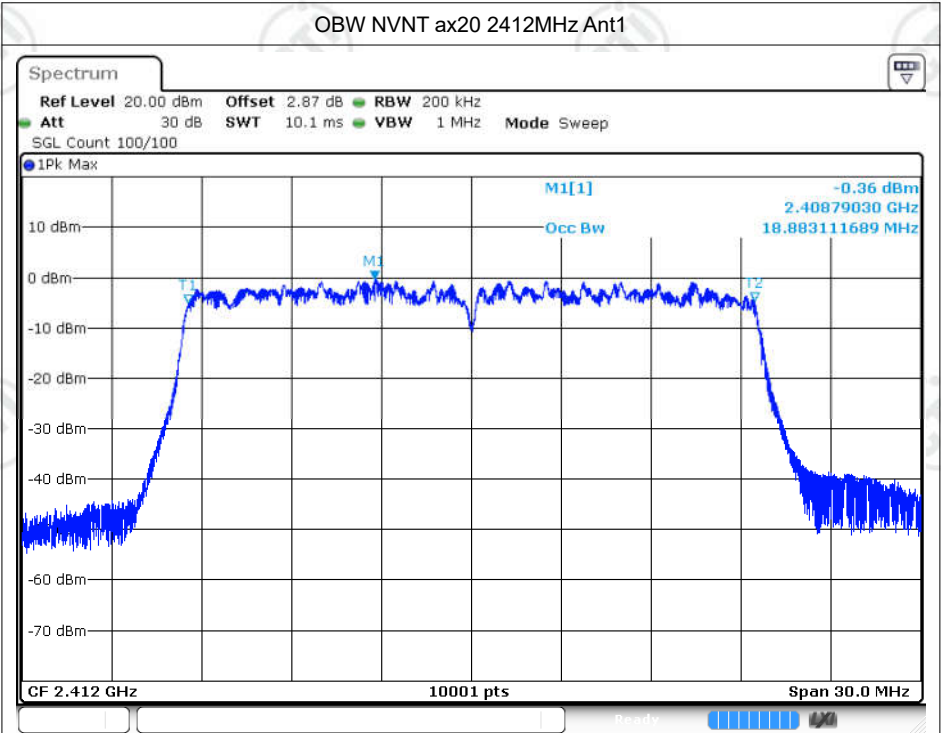


Date: 14.FEB.2025 15:01:02

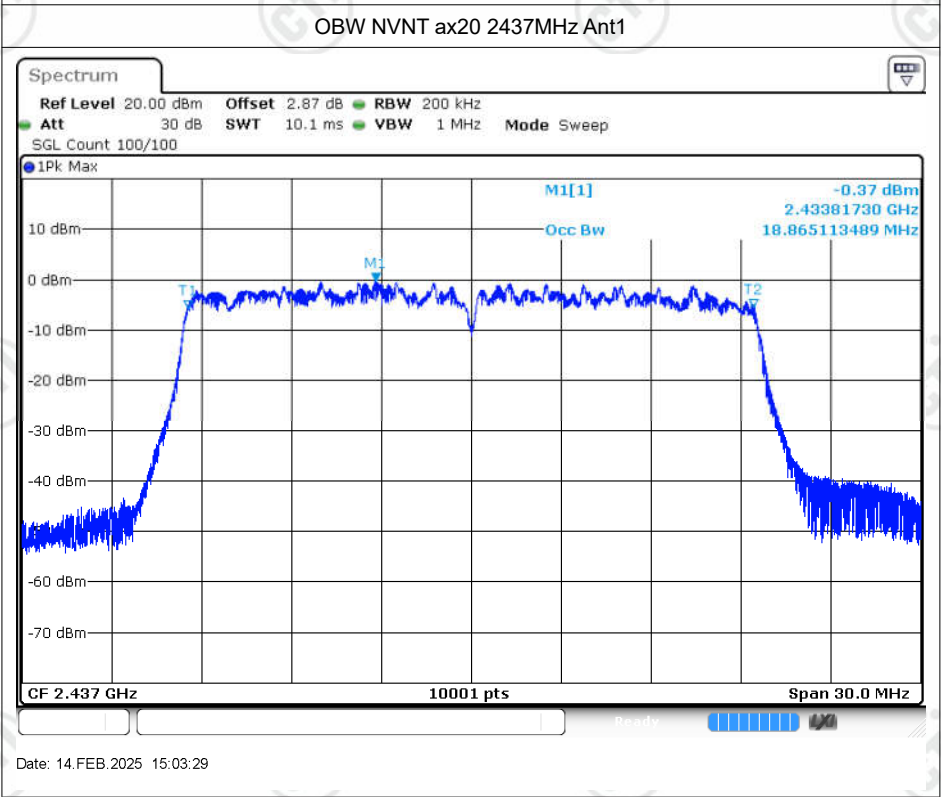


Date: 14.FEB.2025 15:03:29

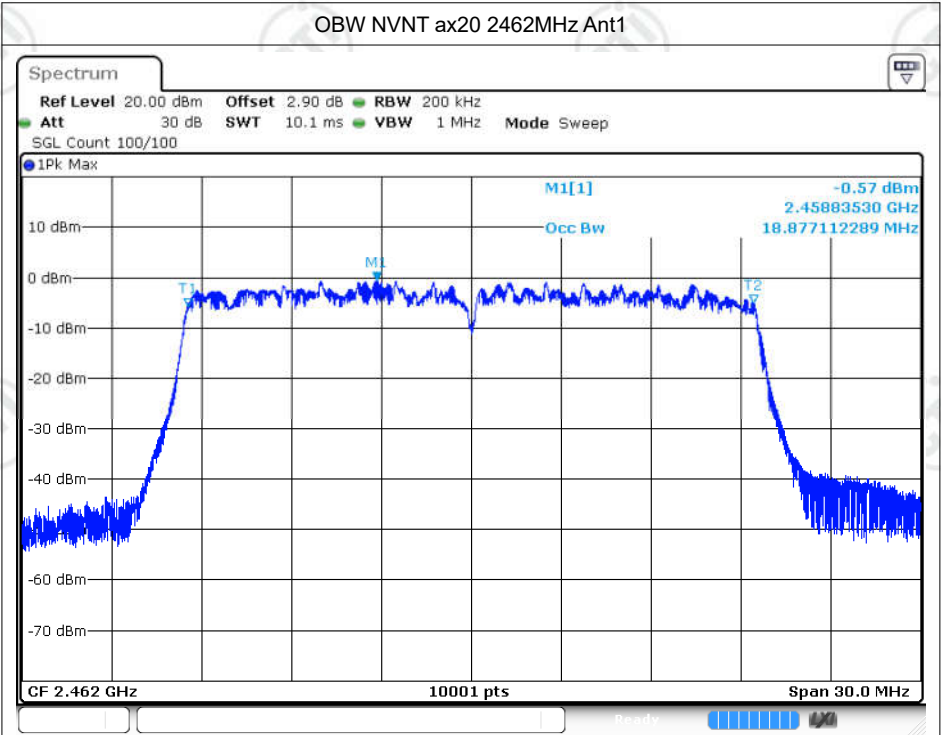


Date: 14.FEB.2025 15:05:42

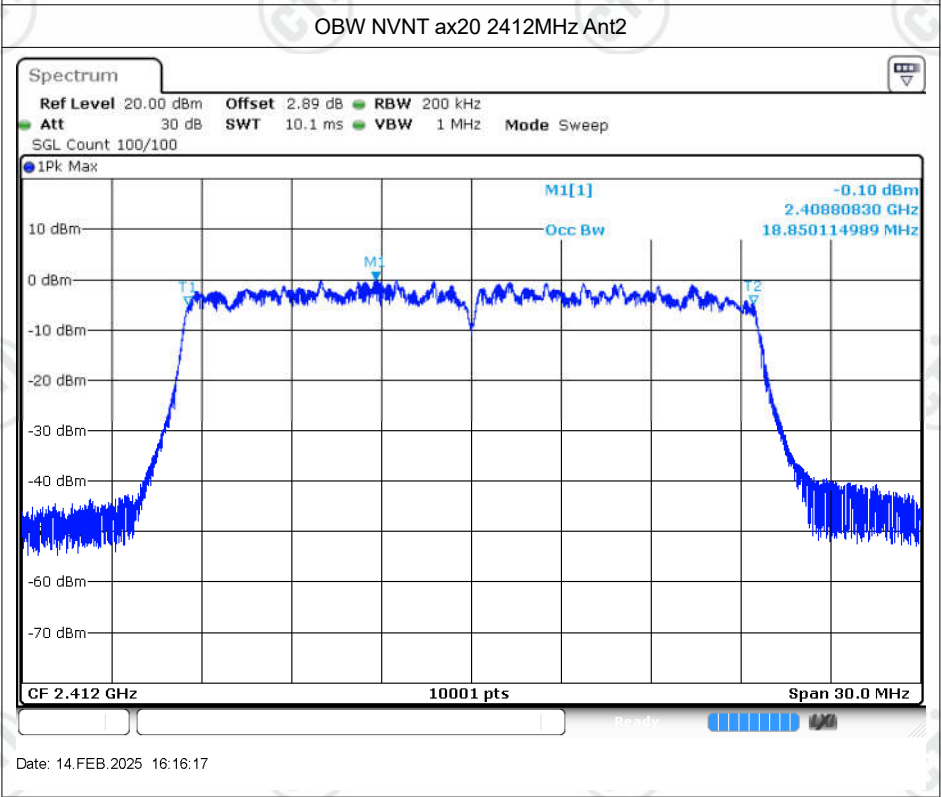


Date: 14.FEB.2025 16:16:17

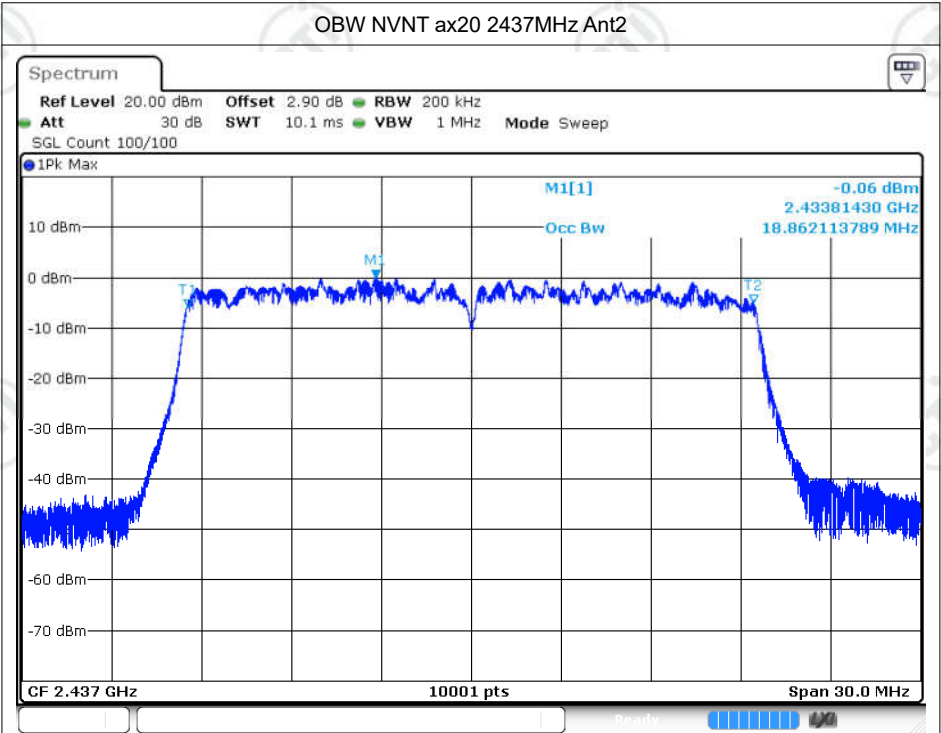


Date: 14.FEB.2025 16:18:39

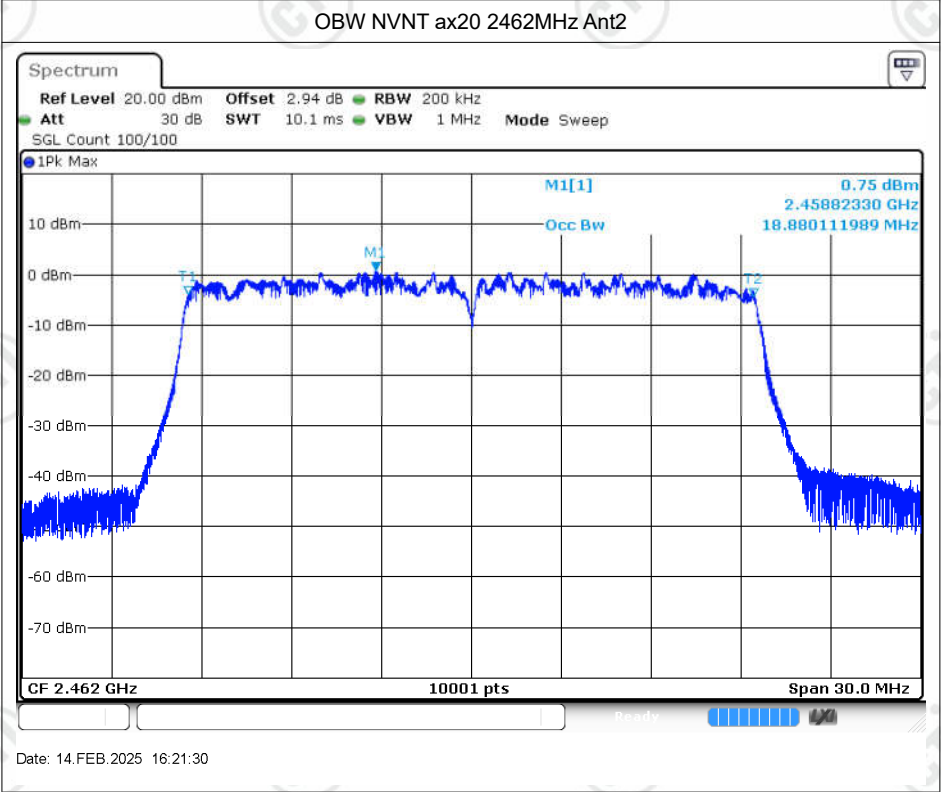


Date: 14.FEB.2025 16:21:30

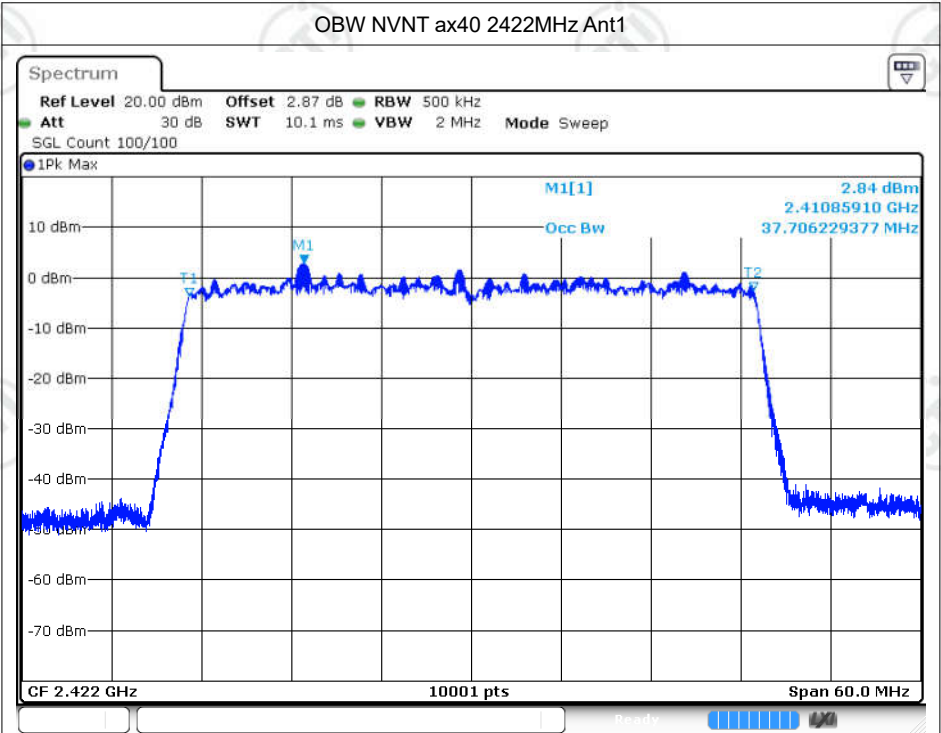


Date: 14.FEB.2025 15:08:46

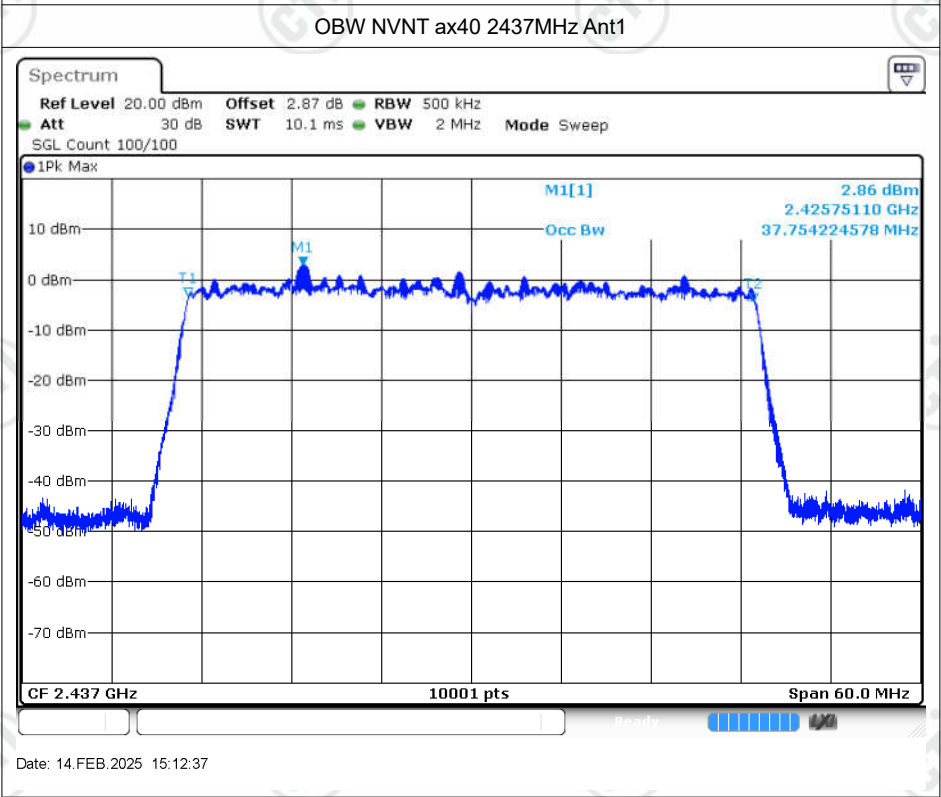


Date: 14.FEB.2025 15:12:37

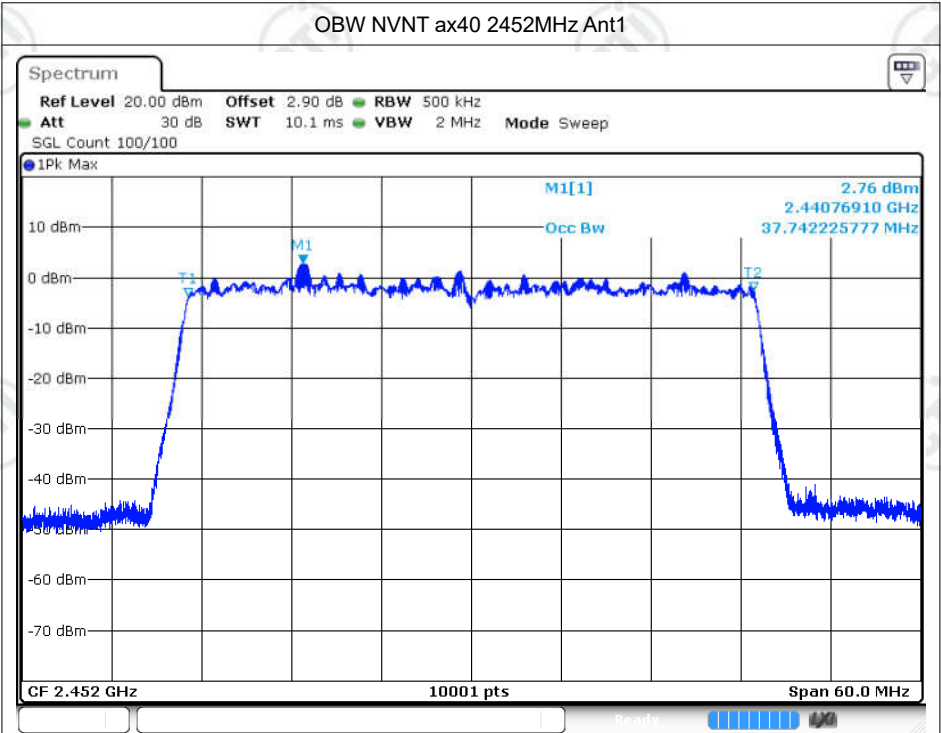


Date: 14.FEB.2025 15:16:24

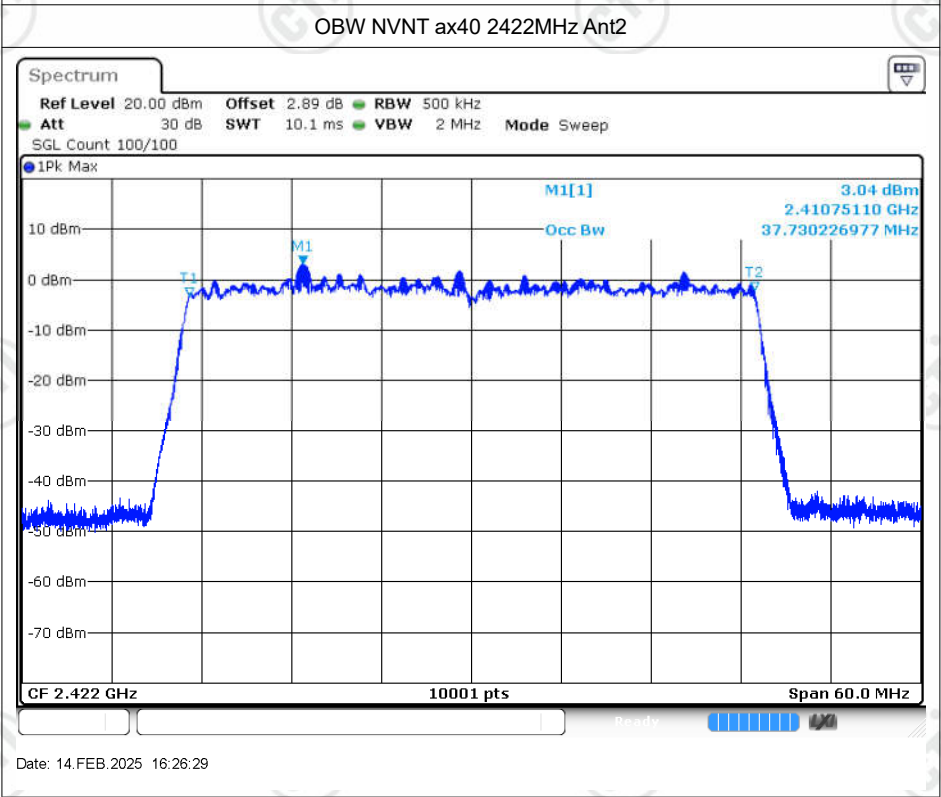

Date: 14.FEB.2025 16:26:29

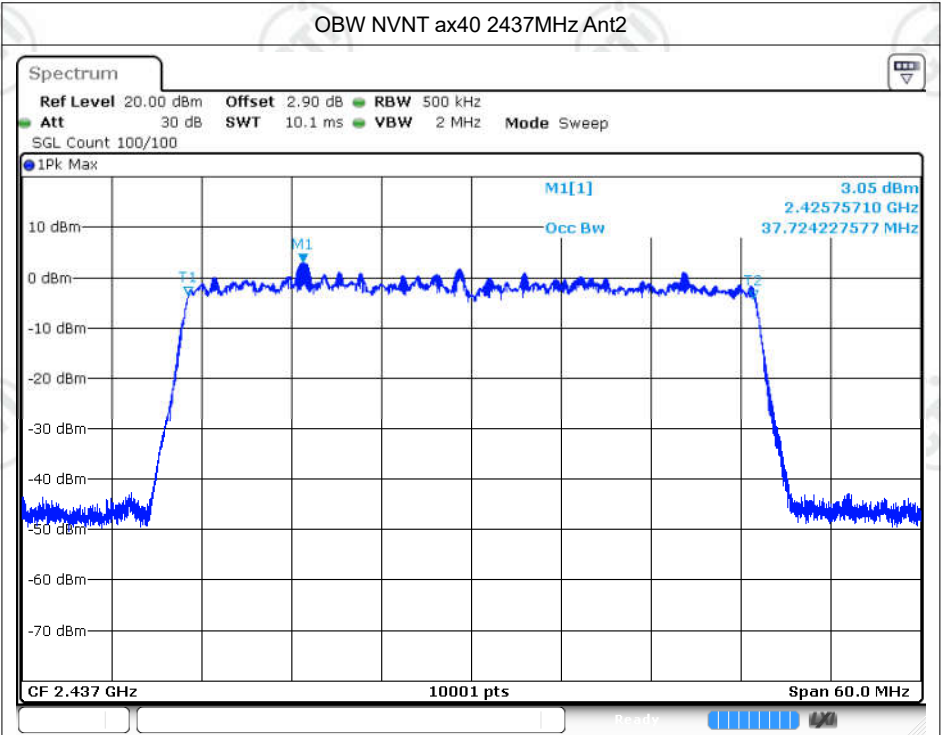

Date: 14.FEB.2025 16:32:56


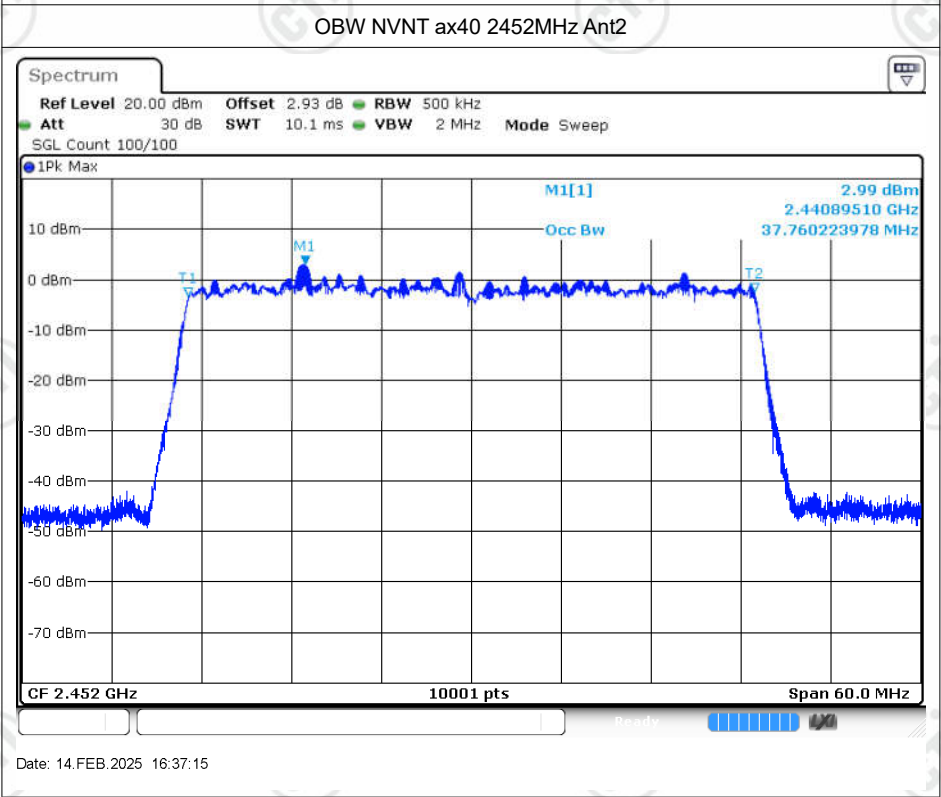



Date: 14.FEB.2025 16:37:15

Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-11.3	8	Pass
NVNT	b	2437	Ant1	-11.23	8	Pass
NVNT	b	2462	Ant1	-11.37	8	Pass
NVNT	b	2412	Ant2	-11.04	8	Pass
NVNT	b	2437	Ant2	-11.16	8	Pass
NVNT	b	2462	Ant2	-11.22	8	Pass
NVNT	g	2412	Ant1	-14.54	8	Pass
NVNT	g	2437	Ant1	-14.58	8	Pass
NVNT	g	2462	Ant1	-14.9	8	Pass
NVNT	g	2412	Ant2	-14.25	8	Pass
NVNT	g	2437	Ant2	-14.37	8	Pass
NVNT	g	2462	Ant2	-14.48	8	Pass
NVNT	n20	2412	Ant1	-14.83	8	Pass
NVNT	n20	2437	Ant1	-15.03	8	Pass
NVNT	n20	2462	Ant1	-15.14	8	Pass
NVNT	n20	2412	Ant2	-14.74	8	Pass
NVNT	n20	2437	Ant2	-14.78	8	Pass
NVNT	n20	2462	Ant2	-14.81	8	Pass
NVNT	n20	2412	Ant1	-16.86	8	Pass
NVNT	n20	2412	Ant2	-16.65	8	Pass
NVNT	n20	2412	Sum	-13.74	8	Pass
NVNT	n20	2437	Ant1	-16.88	8	Pass
NVNT	n20	2437	Ant2	-16.73	8	Pass
NVNT	n20	2437	Sum	-13.79	8	Pass
NVNT	n20	2462	Ant1	-17.81	8	Pass
NVNT	n20	2462	Ant2	-16.52	8	Pass
NVNT	n20	2462	Sum	-14.11	8	Pass
NVNT	n40	2422	Ant1	-17.04	8	Pass
NVNT	n40	2437	Ant1	-16.95	8	Pass
NVNT	n40	2452	Ant1	-17.14	8	Pass
NVNT	n40	2422	Ant2	-16.86	8	Pass
NVNT	n40	2437	Ant2	-16.78	8	Pass
NVNT	n40	2452	Ant2	-16.88	8	Pass
NVNT	n40	2422	Ant1	-19.33	8	Pass
NVNT	n40	2422	Ant2	-19.86	8	Pass
NVNT	n40	2422	Sum	-16.58	8	Pass
NVNT	n40	2437	Ant1	-17.19	8	Pass

NVNT	n40	2437	Ant2	-19.91	8	Pass
NVNT	n40	2437	Sum	-15.33	8	Pass
NVNT	n40	2452	Ant1	-20.28	8	Pass
NVNT	n40	2452	Ant2	-17.41	8	Pass
NVNT	n40	2452	Sum	-15.6	8	Pass
NVNT	ax20	2412	Ant1	-15.52	8	Pass
NVNT	ax20	2437	Ant1	-15.53	8	Pass
NVNT	ax20	2462	Ant1	-15.72	8	Pass
NVNT	ax20	2412	Ant2	-15.25	8	Pass
NVNT	ax20	2437	Ant2	-15.2	8	Pass
NVNT	ax20	2462	Ant2	-14.41	8	Pass
NVNT	ax20	2412	Ant1	-18.26	8	Pass
NVNT	ax20	2412	Ant2	-18.69	8	Pass
NVNT	ax20	2412	Sum	-15.46	8	Pass
NVNT	ax20	2437	Ant1	-17.69	8	Pass
NVNT	ax20	2437	Ant2	-18.43	8	Pass
NVNT	ax20	2437	Sum	-15.03	8	Pass
NVNT	ax20	2462	Ant1	-18.77	8	Pass
NVNT	ax20	2462	Ant2	-18.97	8	Pass
NVNT	ax20	2462	Sum	-15.86	8	Pass
NVNT	ax40	2422	Ant1	-17.13	8	Pass
NVNT	ax40	2437	Ant1	-17.07	8	Pass
NVNT	ax40	2452	Ant1	-17.32	8	Pass
NVNT	ax40	2422	Ant2	-16.9	8	Pass
NVNT	ax40	2437	Ant2	-16.86	8	Pass
NVNT	ax40	2452	Ant2	-17	8	Pass
NVNT	ax40	2422	Ant1	-19.32	8	Pass
NVNT	ax40	2422	Ant2	-19.44	8	Pass
NVNT	ax40	2422	Sum	-16.37	8	Pass
NVNT	ax40	2437	Ant1	-19.13	8	Pass
NVNT	ax40	2437	Ant2	-20.05	8	Pass
NVNT	ax40	2437	Sum	-16.56	8	Pass
NVNT	ax40	2452	Ant1	-19.96	8	Pass
NVNT	ax40	2452	Ant2	-19.69	8	Pass
NVNT	ax40	2452	Sum	-16.81	8	Pass

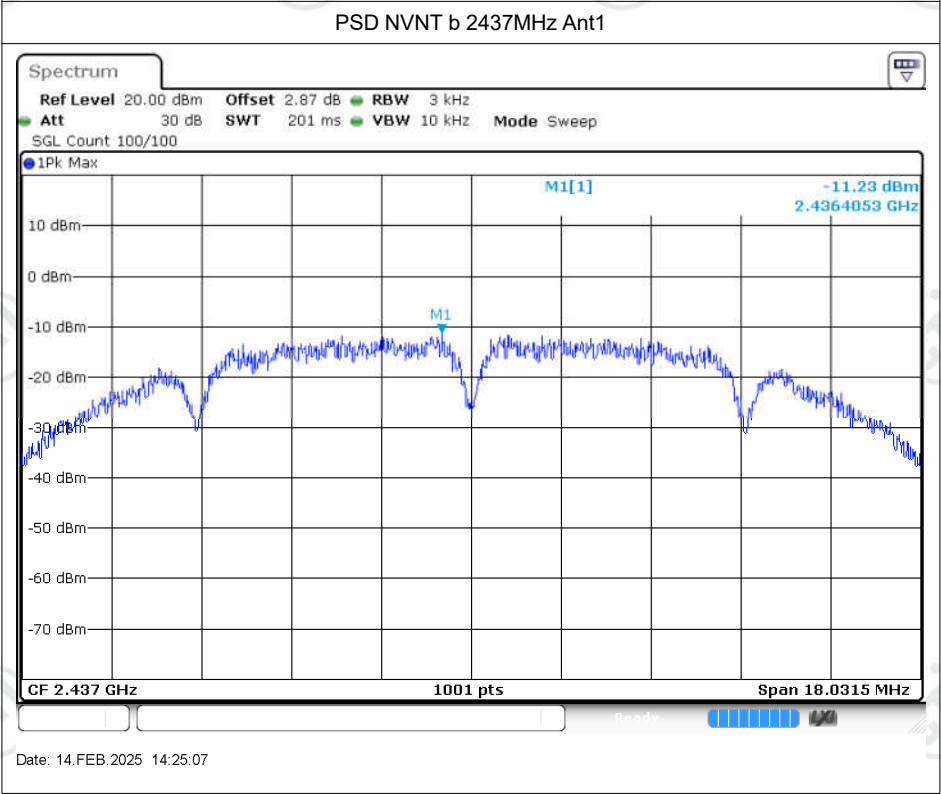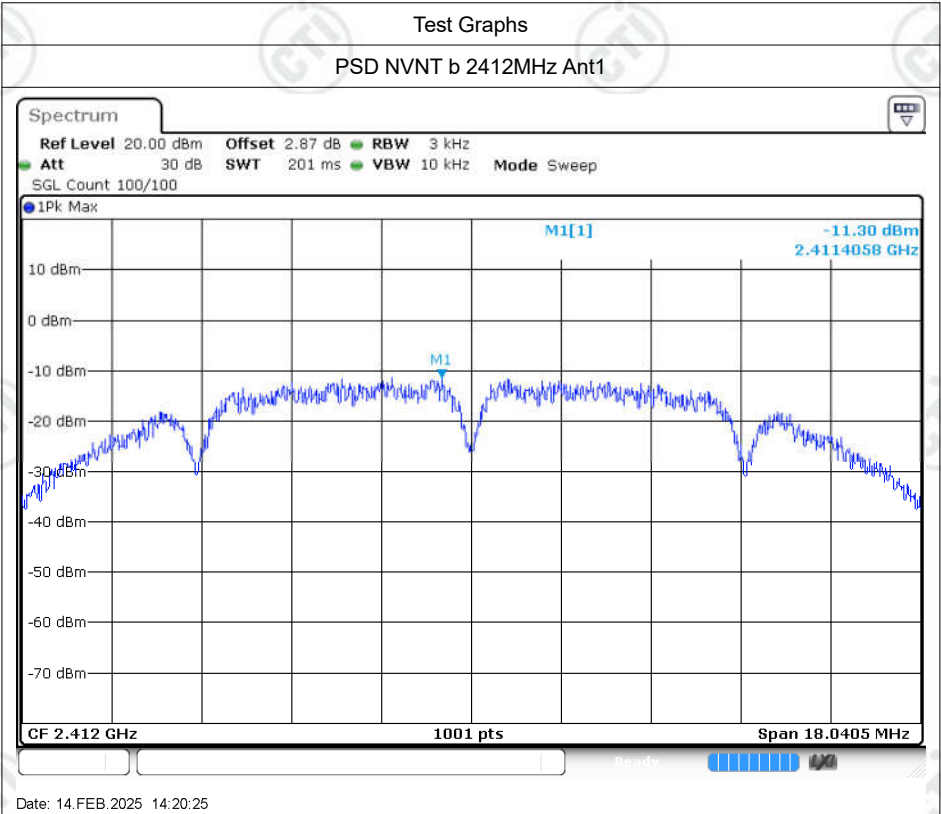


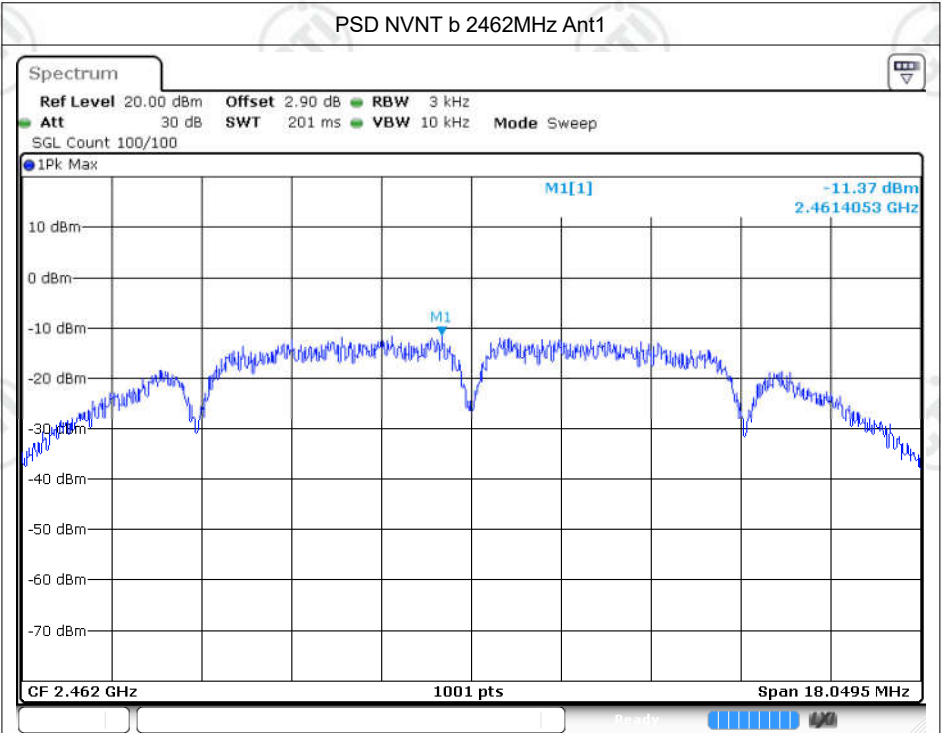


Date: 14.FEB.2025 14:27:43

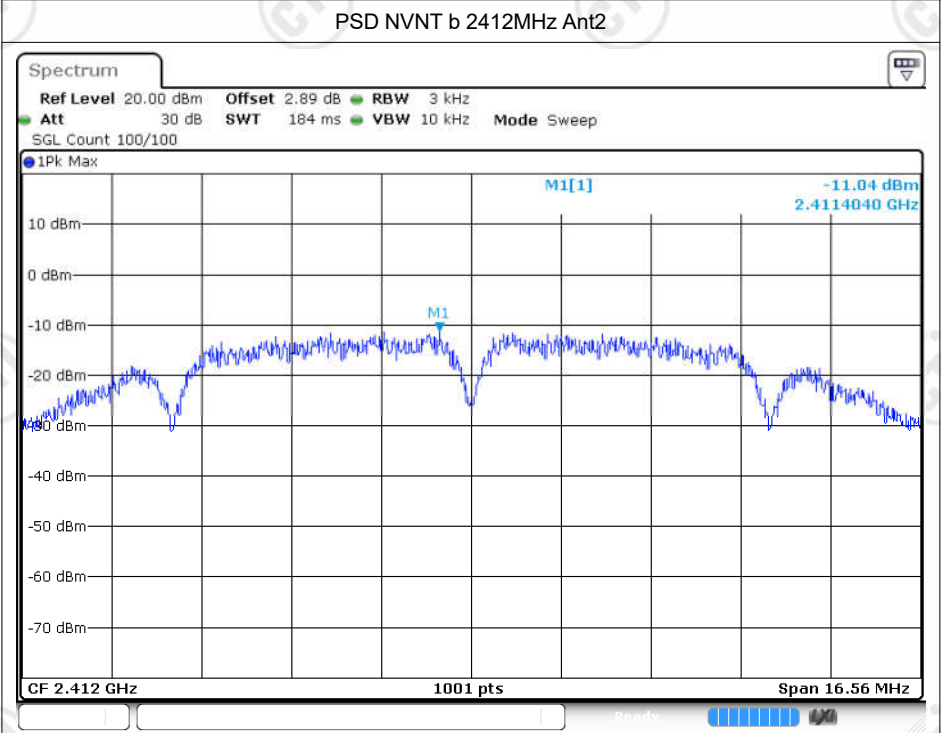

Date: 14.FEB.2025 15:19:50

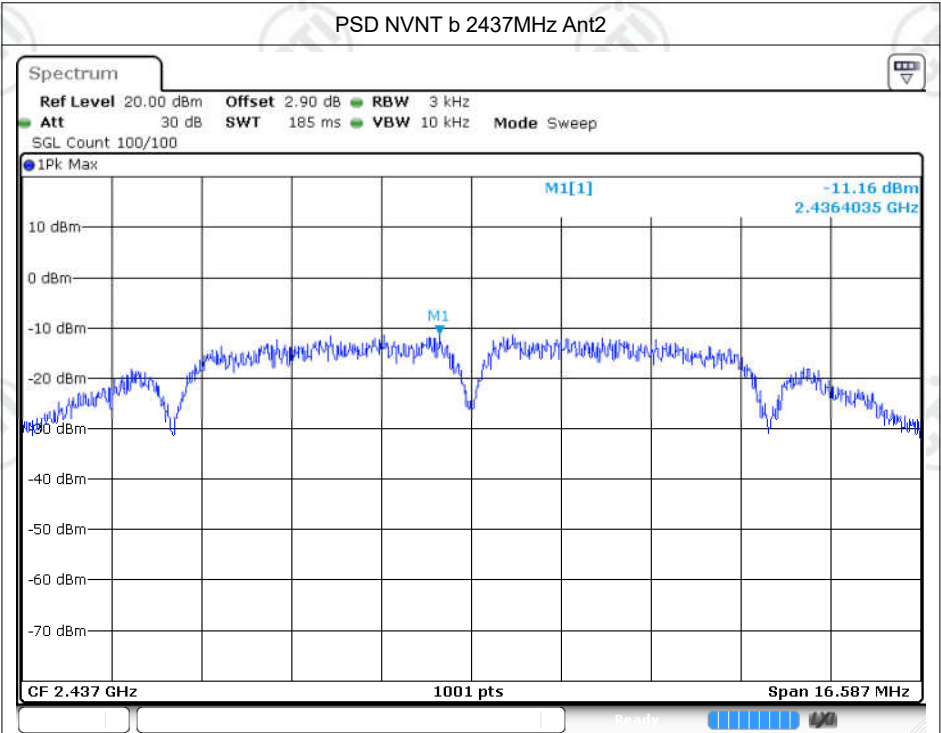

Date: 14.FEB.2025 15:22:19

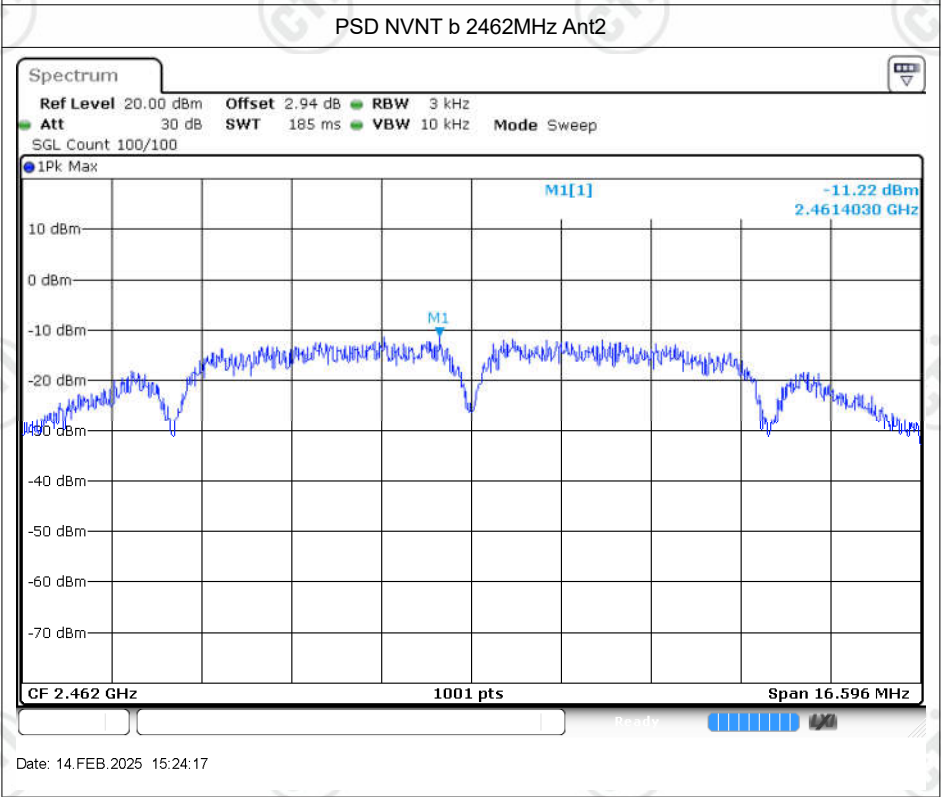

Date: 14.FEB.2025 15:24:17