



FCC TEST REPORT

FCC ID: 2AVYW-ADPROS

On Behalf of

TOPDON TECHNOLOGY Co., Ltd.

Professional Diagnostic Tool

Model No.: ArtiDiag Pro

Prepared for : TOPDON TECHNOLOGY Co., Ltd.
Address : Unit 2005 20/F, Qianhai Shima Tower, Qianhai Shenzhen-Hong
kong Cooperation Zone, Shenzhen, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2406118-C01-R08
Date of Receipt : April 9, 2024
Date of Test : April 9, 2024 – August 6, 2024
Date of Report : August 6, 2024
Version Number : V0
Test Result : Pass

TABLE OF CONTENTS

	<u>Description</u>	<u>Page</u>
1	TEST SUMMARY	5
1.1	MEASUREMENT UNCERTAINTY.....	5
2	GENERAL INFORMATION	6
2.1	GENERAL DESCRIPTION OF EUT	6
2.2	TEST MODE	7
2.3	TEST FACILITY	7
2.4	DESCRIPTION OF SUPPORT UNITS	7
2.5	DEVIATION FROM STANDARDS.....	7
2.6	ABNORMALITIES FROM STANDARD CONDITIONS.....	7
2.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
2.8	ADDITIONAL INSTRUCTIONS	7
3	TEST INSTRUMENTS LIST	8
4	TEST RESULTS AND MEASUREMENT DATA.....	9
4.1	ANTENNA REQUIREMENT:	9
4.2	CONDUCTED EMISSIONS	10
4.3	EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	13
4.4	PEAK TRANSMIT POWER	44
4.5	POWER SPECTRAL DENSITY.....	61
4.6	BAND EDGE.....	78
4.7	RADIATED EMISSION	92
4.8	FREQUENCY STABILITY	103
5	TEST SETUP PHOTO	103
5.1	PHOTOS OF RADIATED EMISSION	105
5.2	PHOTOS OF CONDUCTED EMISSION TEST.....	106

TEST REPORT DECLARATION

Applicant : TOPDON TECHNOLOGY Co., Ltd.
Address : Unit 2005 20/F, Qianhai Shima Tower, Qianhai Shenzhen-Hong kong
Cooperation Zone, Shenzhen, China
Manufacturer : TOPDON TECHNOLOGY Co., Ltd.
Address : Unit 2005 20/F, Qianhai Shima Tower, Qianhai Shenzhen-Hong kong
Cooperation Zone, Shenzhen, China
EUT Description : Professional Diagnostic Tool
(A) Model No. : ArtiDiag Pro
(B) Trademark : **TOPDON**

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart E


The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart E limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Yannis Wen
Project Engineer


.....

Approved by (name + signature).....:

Jack Xu
Project Manager


.....

Date of issue.....:

August 6, 2024

Revision History

Revision	Issue Date	Revisions	Revised By
V0	August 6, 2024	Initial released Issue	Yannis Wen

1 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	Section 15.203 Section 7.1.4 RSS-Gen Issue 5	PASS
AC Power Line Conducted Emission	Section 15.207 Section 7.2.4 RSS-GEN(8.8), ANSI C63.10	PASS
Emission Bandwidth and 99% Occupied Bandwidth	FCC Part15 E Section 15.407, RSS GEN 6.7, RSS-Gen Issue 5	PASS
Peak Transmit Power	Section 15.407(a), RSS-247 5.4(2)	PASS
Power Spectral Density	Section 15.407(a), RSS-247 5.2(2)	PASS
Undesirable Emission	Section 15.407(b), RSS-247 5.5	PASS
Radiated Emission	Section 15.407(b)&15.209 Section 5.5 RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10	PASS
Band Edge	15.205, RSS-247 Issue 3, ANSI C63.10	PASS
Frequency Stability	15.407(f), RSS-GEN(6.11)	PASS

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

1.1 Measurement Uncertainty

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V) 3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V) 3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V) 4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2 General Information

2.1 General Description of EUT

EUT Name	: Professional Diagnostic Tool
Model No.	: ArtiDiag Pro
DIFF.	: N/A
Power supply	: DC 3.7V by battery, DC 5V from adapter
Radio Technology	: 5G WIFI
Operation Frequency	: 802.11a/n(HT20)/ac(HT20): 5180~5240MHz; 5745~5825MHz 802.11n(HT40)/ac(HT40): 5190~5230MHz; 5755~5795MHz 802.11ac(HT80): 5210MHz, 5775MHz
Channel separation	: 20MHz for 802.11a/ 802.11ac20/ 802.11n(HT20) 40MHz for 802.11ac40/ 802.11n(HT40) 80MHz for 802.11ac80
Modulation technology:	: IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (64QAM, 16QAM, QPSK, BPSK) FPC antenna
Antenna Type	: For 5150~5250MHz: 5.15dBi; For 5725~5875MHz: 5.53dBi (Antenna information is provided by applicant.)
Software version	: V100
Hardware version	: V1
Intend use environment	: Residential, commercial and light industrial environment

2.2 Test mode

Transmitting mode Keep the EUT in transmitting with modulation.

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 15, 2019 Certificated by IC

Registration Number: 12135A

2.4 Description of Support Units

Accessories 1 : SWITCHING POWER SUPPLY
 Manufacturer : SHENZHEN PENGSHENGYE ELECTRONIC CO.,LTD
 Model : PSY0502000 18
 INPUT : 100-240V~50/60Hz 0.6A Max
 OUTPUT : 5.0V==2.0A
 Accessories 2 : Switching Power Supply
 Manufacturer : Dong Guan Royal Intelligent Co., Ltd.
 Model : BI12T-050200-IU
 Ratings : INPUT: 100-240V~50/60Hz, 0.5A Max.
 INPUT :5.0VDC, 2.0A, 10.0W

2.5 Deviation from Standards

None.

2.6 Abnormalities from Standard Conditions

None.

2.7 Other Information Requested by the Customer

None.

2.8 Additional instructions

Software (Used for test) from client

Channel	Power level
Lowest	Default
Middle	Default
Highest	Default

3 Test Instruments list

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.17	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2023.08.16	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2023.08.16	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-102082-Wa	2023.08.16	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2023.08.16	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	1Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	1Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	1Year
RF Cable	Resenberger	Cable 1	/	RE1	2023.08.16	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2023.08.16	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2023.08.16	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2023.08.16	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2023.08.16	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2023.08.16	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2023.08.16	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	1Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2023.08.16	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2023.08.16	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2023.08.16	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2023.07.25	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2023.08.16	1 Year
Adjustable attenuator	MWRFTest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A


Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

4 Test results and Measurement Data

4.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
The antenna is FPC antenna. The best case gain of the antenna is 5.53dBi for 5.15~5.25GHz, 5.725~5.85GHz	


4.2 Conducted Emissions

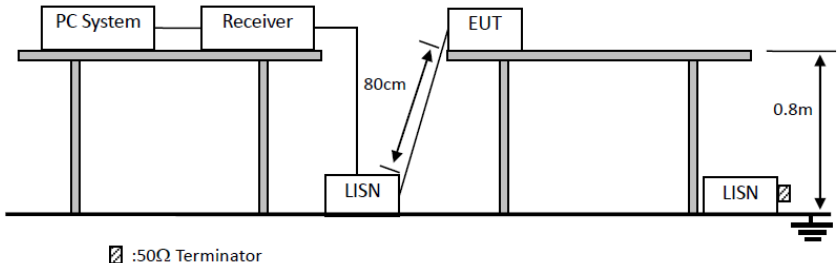Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150KHz to 30MHz		
Receiver setup:	RBW=9KHz, VBW=30KHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.		
Test setup:	 80cm 0.8m 50Ω Terminator		
Test Instruments:	Refer to section 3 for details		
Test mode:	Refer to section 2.2 for details		
Test results:	Pass		

Measurement Data

An initial pre-scan was performed on the line and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Line:

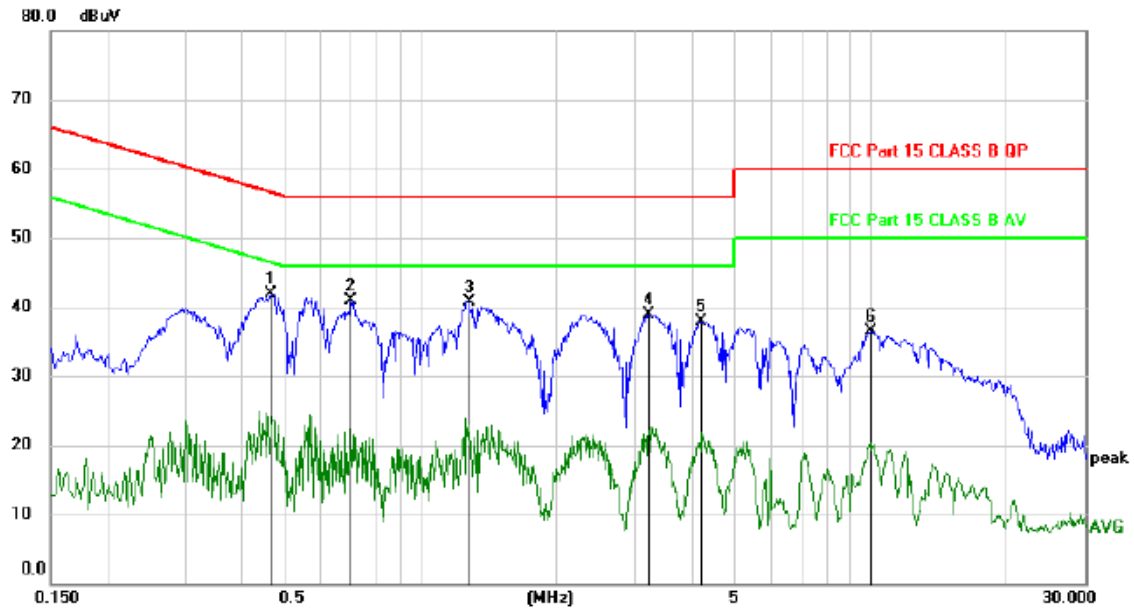


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.4620	31.93	9.95	41.88	56.66	-14.78	peak	
2		0.6985	31.05	9.93	40.98	56.00	-15.02	peak	
3		1.2803	30.88	9.89	40.77	56.00	-15.23	peak	
4		3.2100	28.96	9.96	38.92	56.00	-17.08	peak	
5		4.2118	27.89	9.98	37.87	56.00	-18.13	peak	
6		10.0106	26.28	10.21	36.49	60.00	-23.51	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

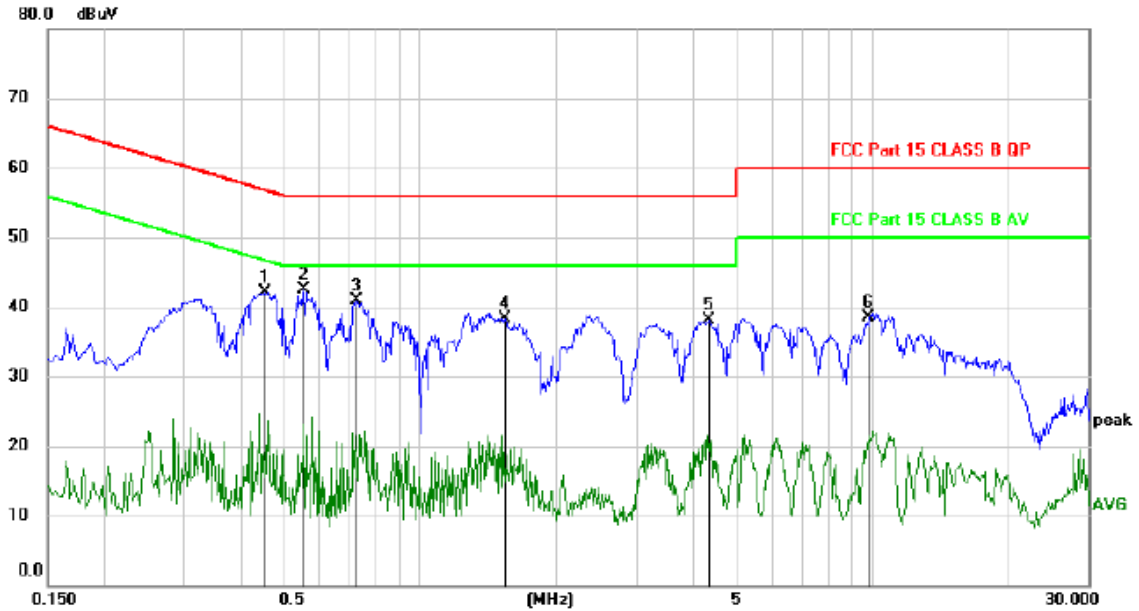Neutral:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4530	32.24	9.95	42.19	56.82	-14.63	peak	
2	*	0.5550	32.53	9.94	42.47	56.00	-13.53	peak	
3		0.7227	31.06	9.93	40.99	56.00	-15.01	peak	
4		1.5419	28.48	9.90	38.38	56.00	-17.62	peak	
5		4.3500	28.03	9.99	38.02	56.00	-17.98	peak	
6		9.8520	28.21	10.21	38.42	60.00	-21.58	peak	


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the a 5180MHz mode with the worst data is listed.


4.3 Emission Bandwidth and 99% Occupied Bandwidth

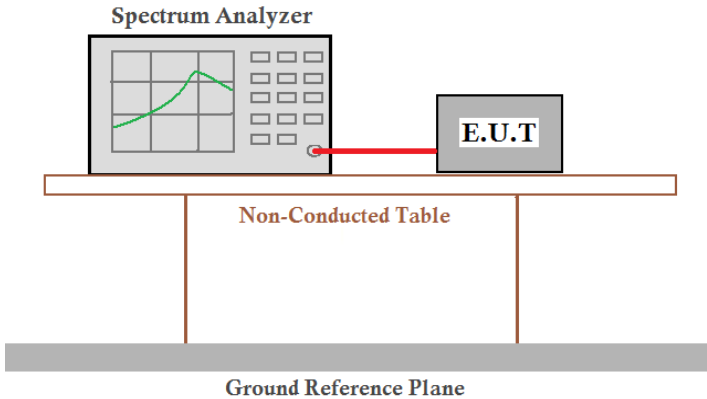Test Requirement:	FCC Part15 E Section 15.407, RSS-Gen Issue 5, RSS-247 Issue 3
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green trace, is connected to an E.U.T. (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a table labeled 'Non-Conducted Table'. This table is supported by two vertical legs. Below the table, a horizontal grey bar represents the 'Ground Reference Plane'.
Test procedure:	According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data:


**Band 1 (5150-5250 MHz):
-26dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	25.26	/	Pass
NVNT	a	5200	Ant1	23.01	/	Pass
NVNT	a	5240	Ant1	22.86	/	Pass
NVNT	ac20	5180	Ant1	21.24	/	Pass
NVNT	ac20	5200	Ant1	21.33	/	Pass
NVNT	ac20	5240	Ant1	27.93	/	Pass
NVNT	ac40	5190	Ant1	39.96	/	Pass
NVNT	ac40	5230	Ant1	48.78	/	Pass
NVNT	ac80	5210	Ant1	80.16	/	Pass
NVNT	n20	5180	Ant1	21.18	/	Pass
NVNT	n20	5200	Ant1	27.39	/	Pass
NVNT	n20	5240	Ant1	27.15	/	Pass
NVNT	n40	5190	Ant1	40.32	/	Pass
NVNT	n40	5230	Ant1	50.28	/	Pass

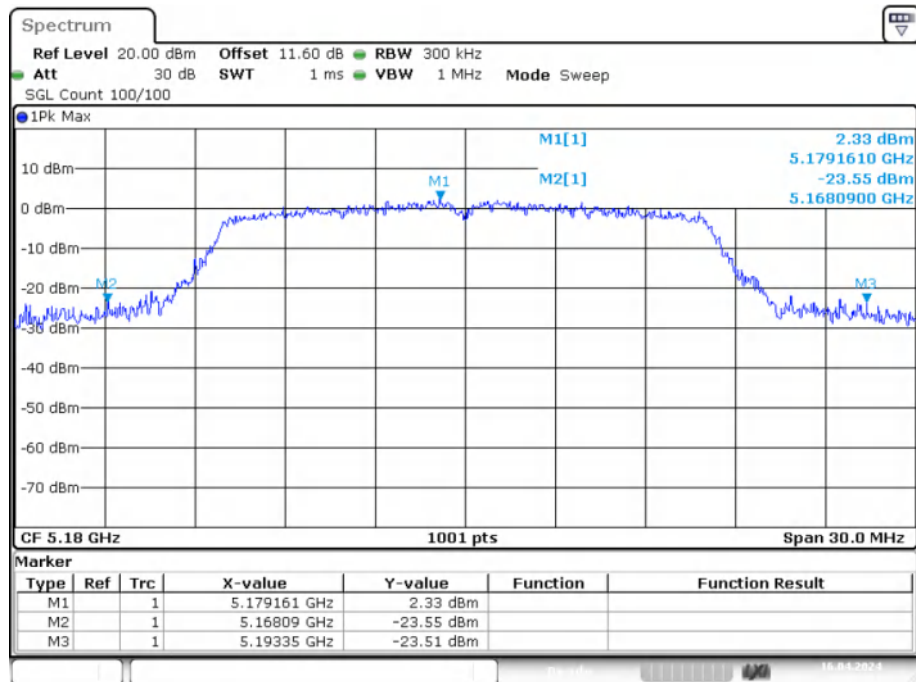-26dB Bandwidth NVNT a 5180MHz Ant1


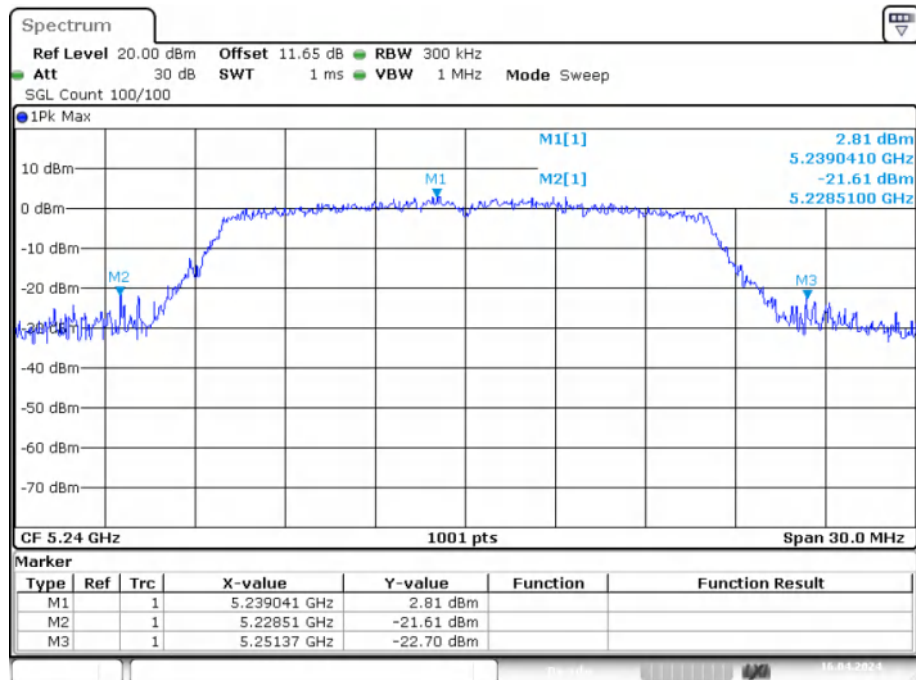
Date: 16.APR.2024 15:45:22

-26dB Bandwidth NVNT a 5200MHz Ant1

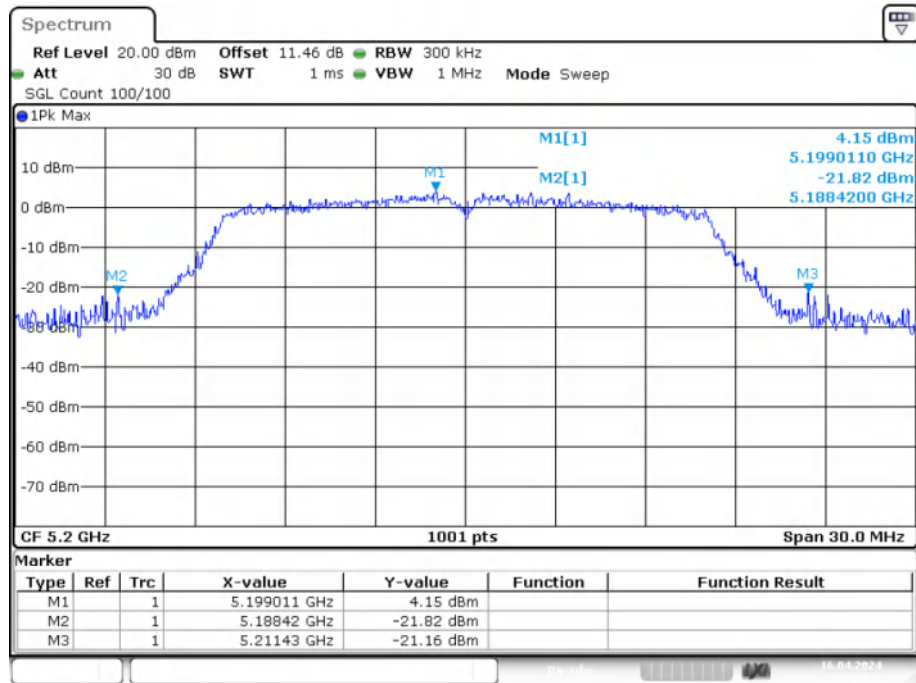


Date: 16.APR.2024 16:04:14

-26dB Bandwidth NVNT a 5240MHz Ant1




Date: 16.APR.2024 16:06:38

-26dB Bandwidth NVNT ac20 5180MHz Ant1

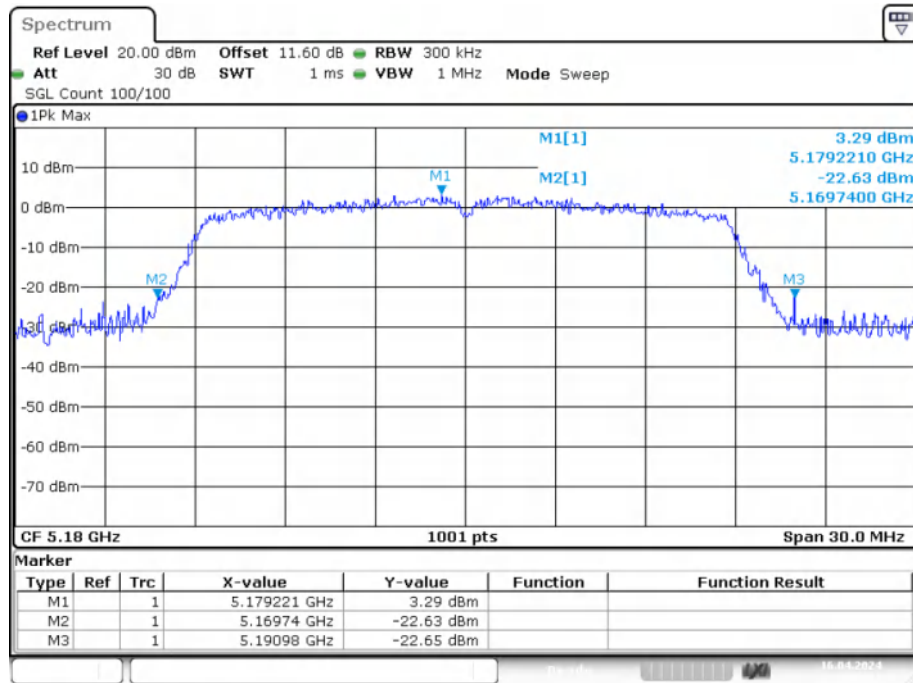


Date: 16.APR.2024 16:43:37

-26dB Bandwidth NVNT ac20 5200MHz Ant1

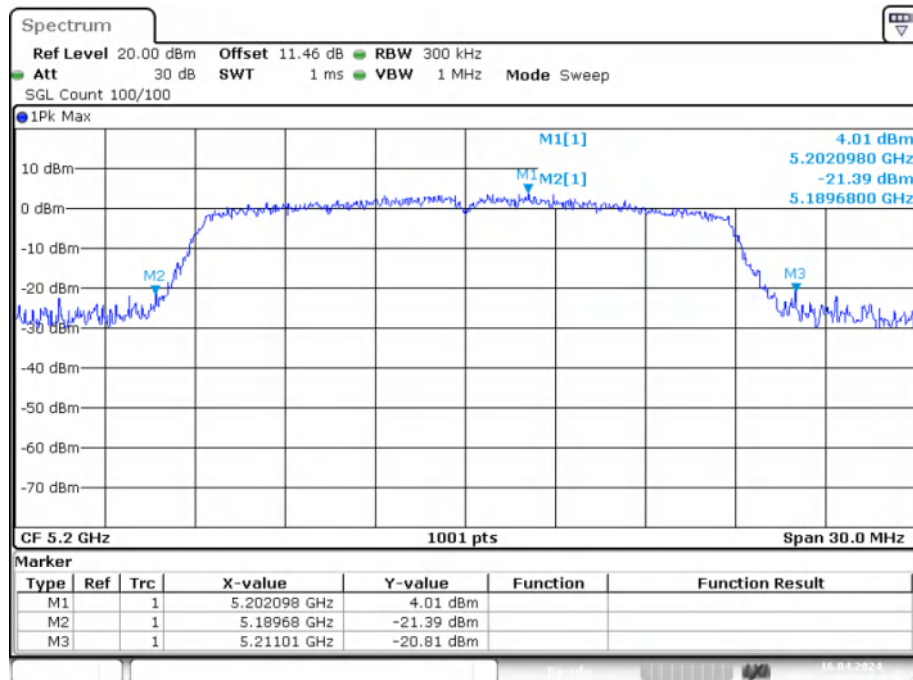


Date: 16.APR.2024 16:46:41

-26dB Bandwidth NVNT ac20 5240MHz Ant1

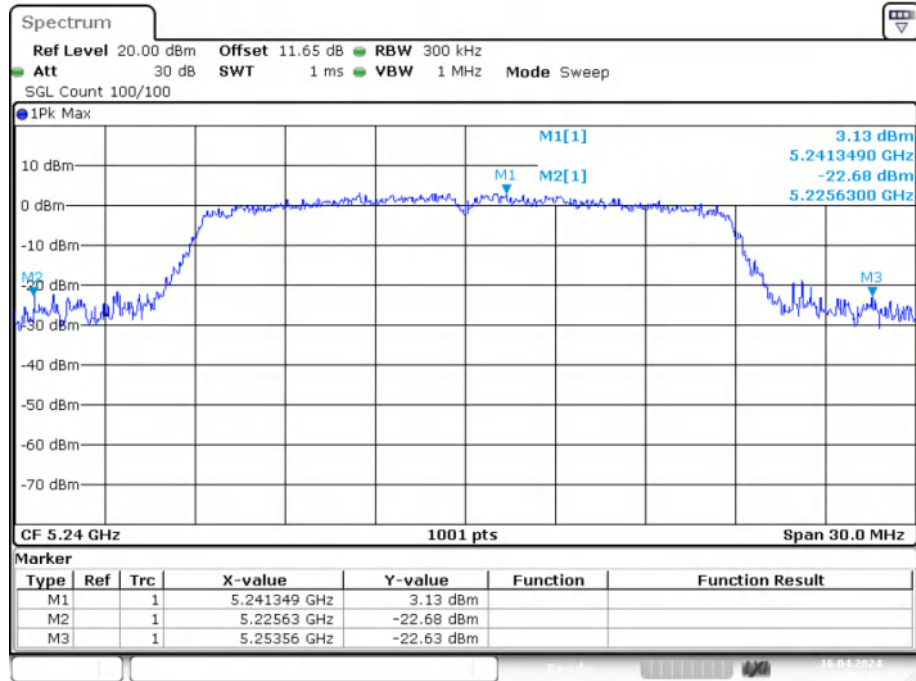


Date: 16.APR.2024 17:03:57

-26dB Bandwidth NVNT ac40 5190MHz Ant1

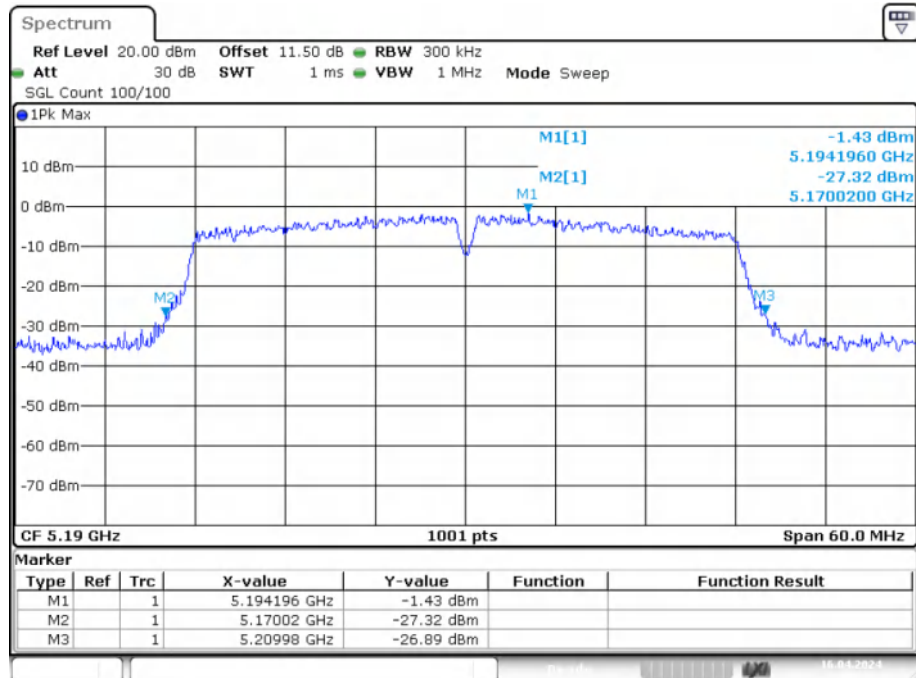


Date: 16.APR.2024 18:07:24

-26dB Bandwidth NVNT ac40 5230MHz Ant1

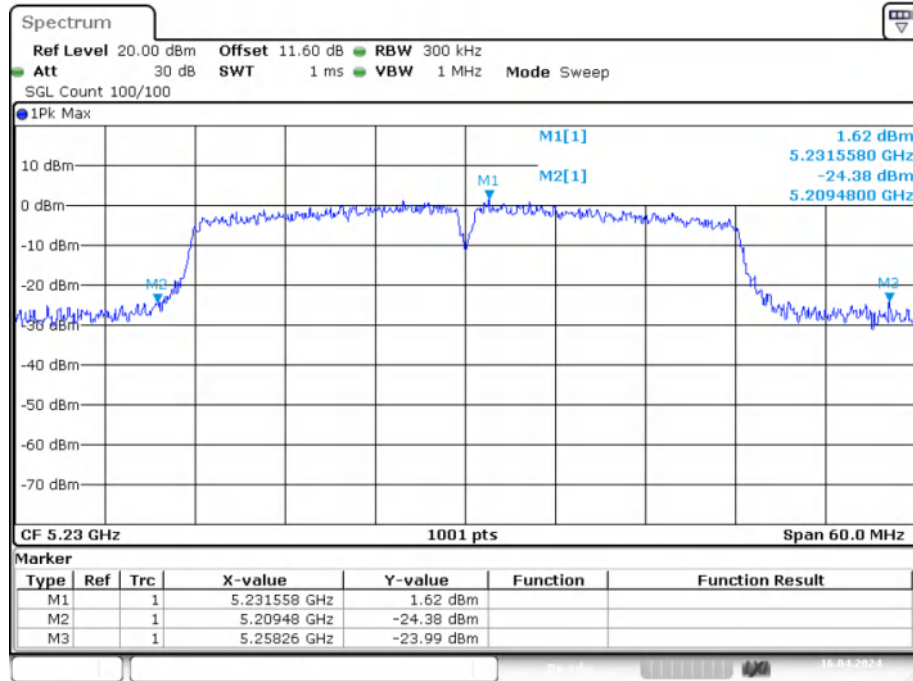


Date: 16.APR.2024 18:29:07

-26dB Bandwidth NVNT ac80 5210MHz Ant1

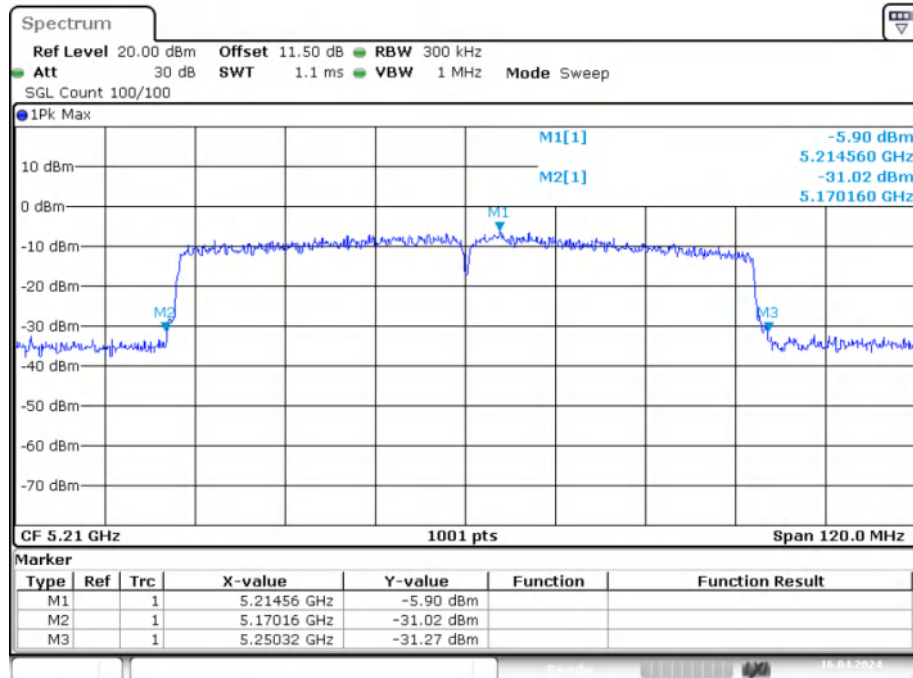


Date: 16.APR.2024 19:48:08

-26dB Bandwidth NVNT n20 5180MHz Ant1

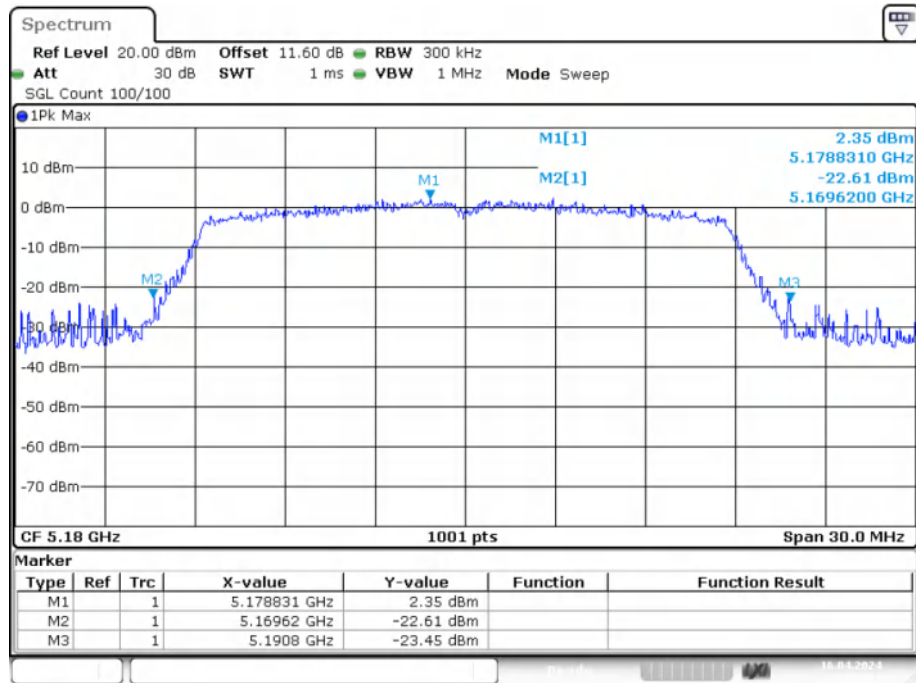


Date: 16.APR.2024 16:15:37

-26dB Bandwidth NVNT n20 5200MHz Ant1

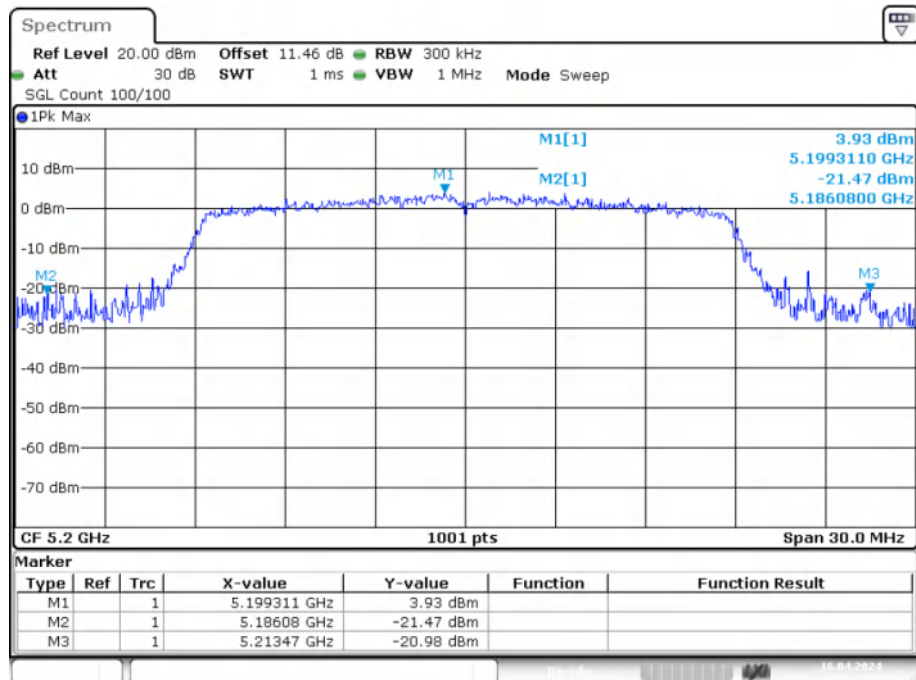


Date: 16.APR.2024 16:28:43

-26dB Bandwidth NVNT n20 5240MHz Ant1

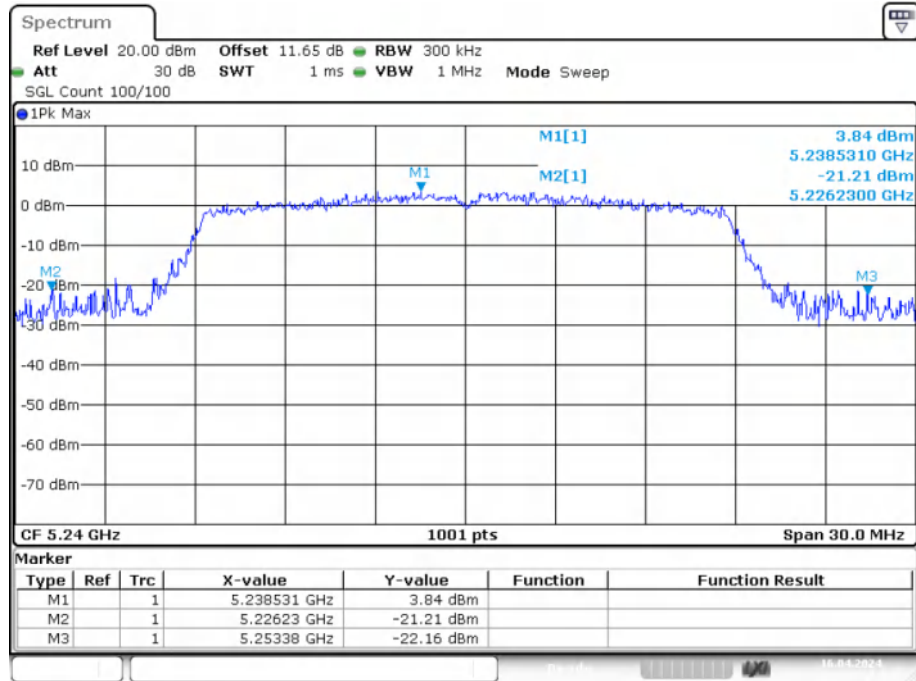


Date: 16.APR.2024 16:34:21

-26dB Bandwidth NVNT n40 5190MHz Ant1

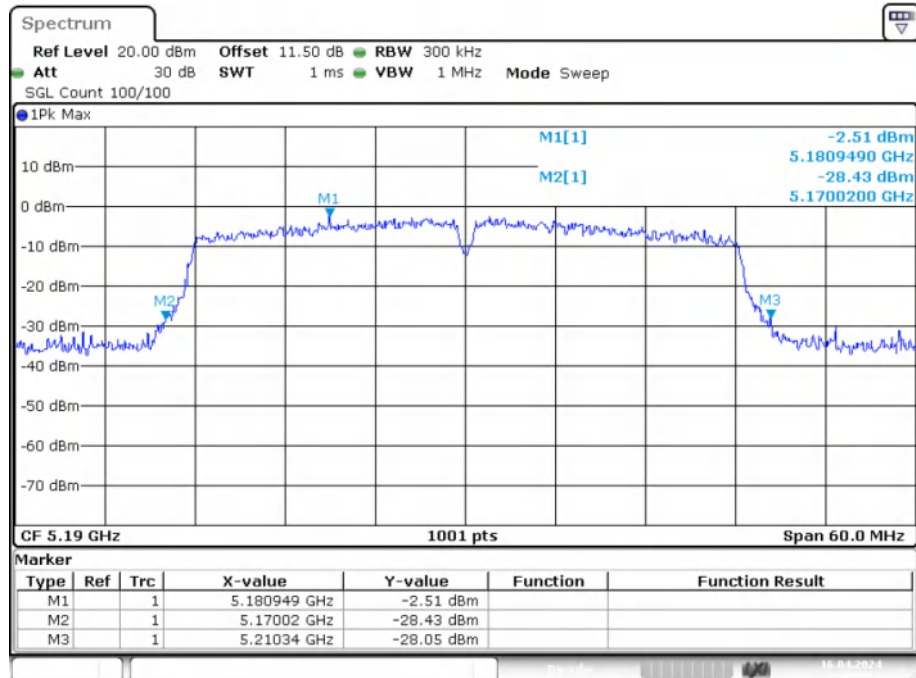

Date: 16.APR.2024 17:17:52

-26dB Bandwidth NVNT n40 5230MHz Ant1

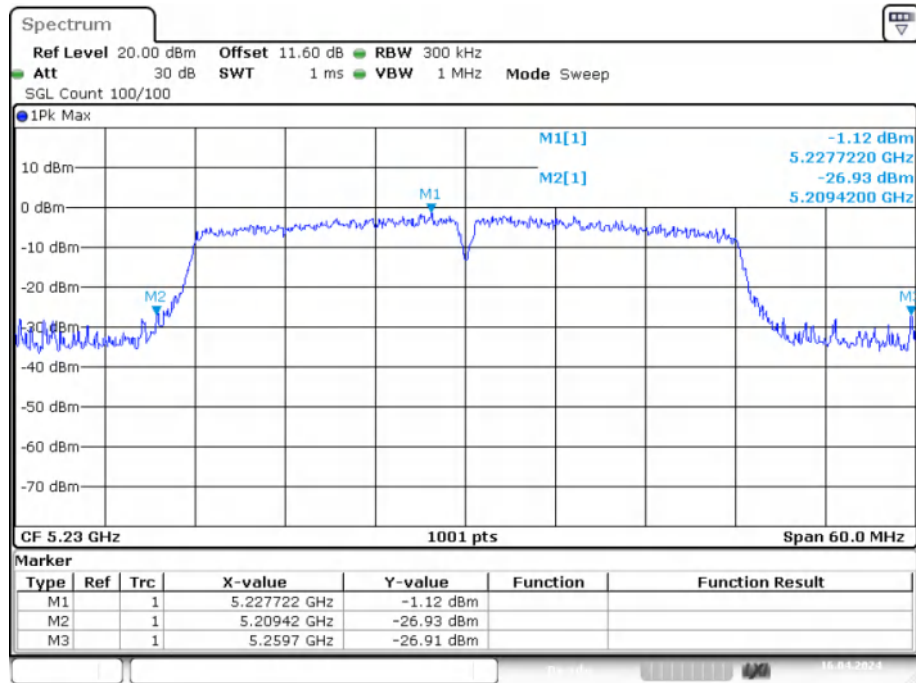


Date: 16.APR.2024 17:22:07

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.513
NVNT	a	5200	Ant1	16.454
NVNT	a	5240	Ant1	16.424
NVNT	ac20	5180	Ant1	17.562
NVNT	ac20	5200	Ant1	17.622
NVNT	ac20	5240	Ant1	17.652
NVNT	ac40	5190	Ant1	36.144
NVNT	ac40	5230	Ant1	36.264
NVNT	ac80	5210	Ant1	75.405
NVNT	n20	5180	Ant1	17.562
NVNT	n20	5200	Ant1	17.622
NVNT	n20	5240	Ant1	17.622
NVNT	n40	5190	Ant1	36.084
NVNT	n40	5230	Ant1	36.144

OBW NVNT a 5180MHz Ant1

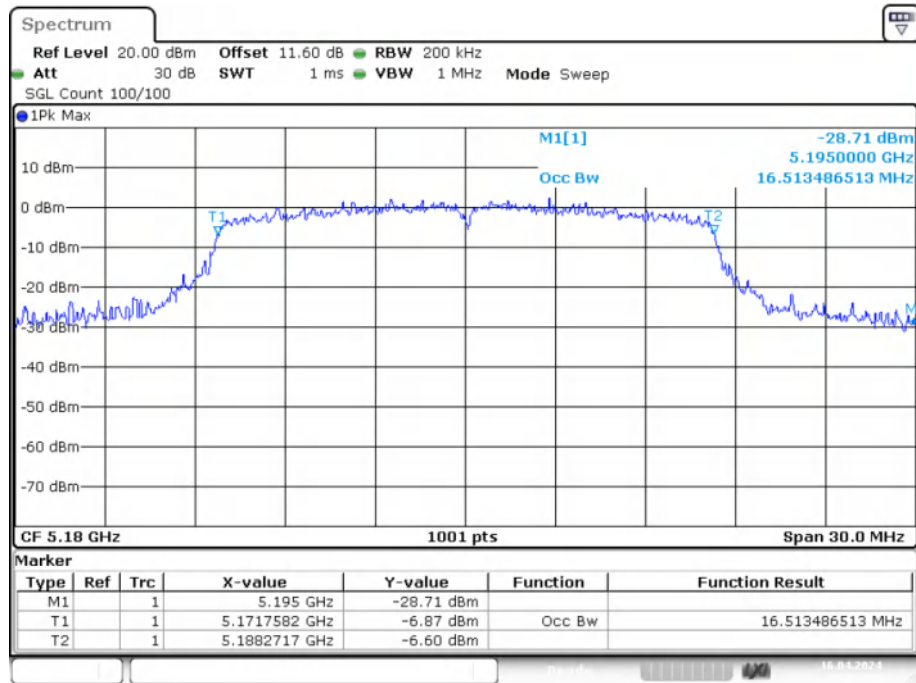


Date: 16.APR.2024 15:45:14

OBW NVNT a 5200MHz Ant1

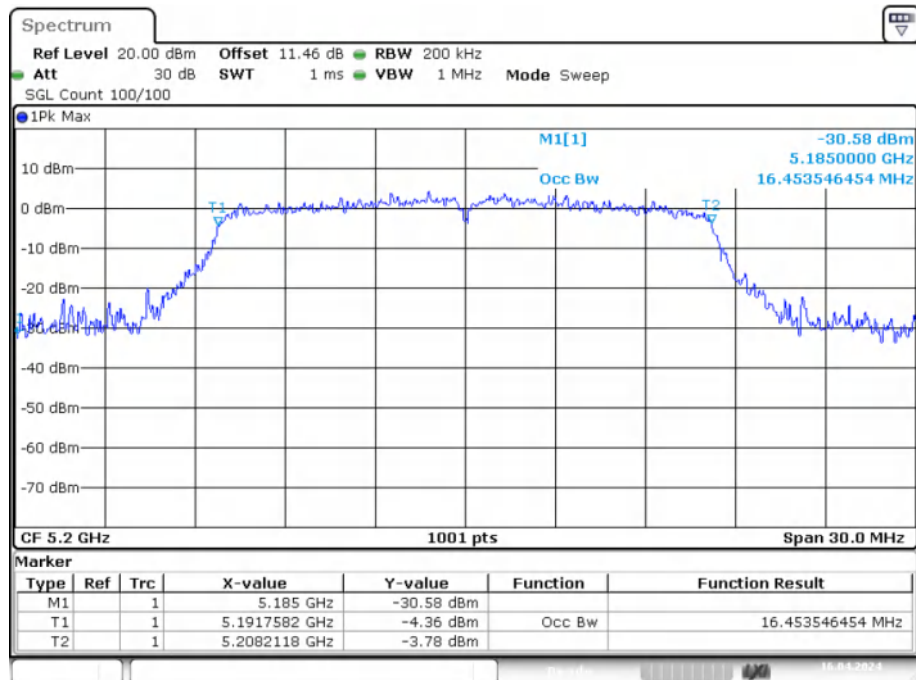


Date: 16.APR.2024 16:04:07

OBW NVNT a 5240MHz Ant1

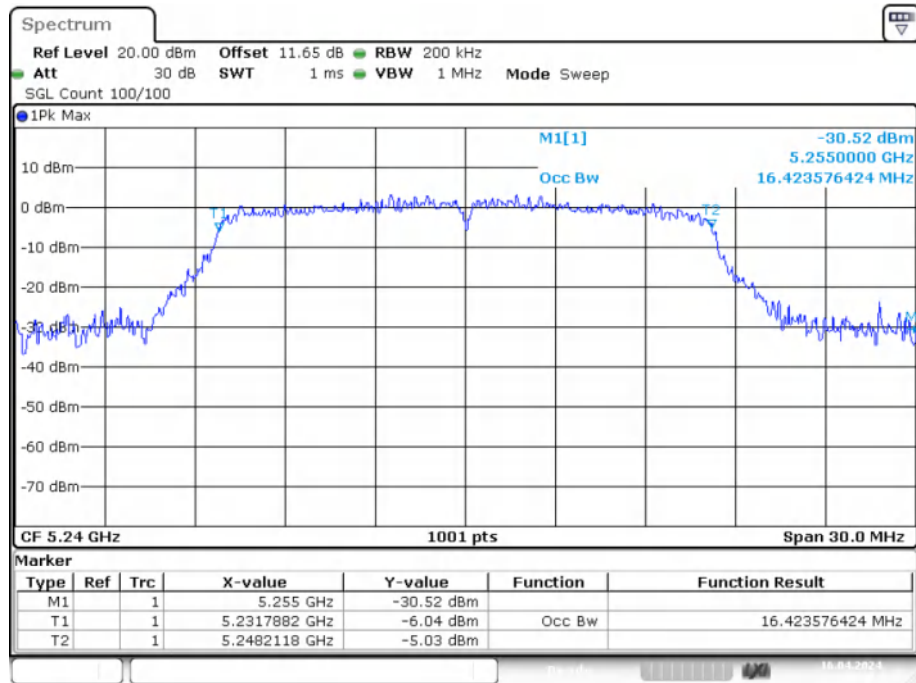


Date: 16.APR.2024 16:06:31

OBW NVNT ac20 5180MHz Ant1

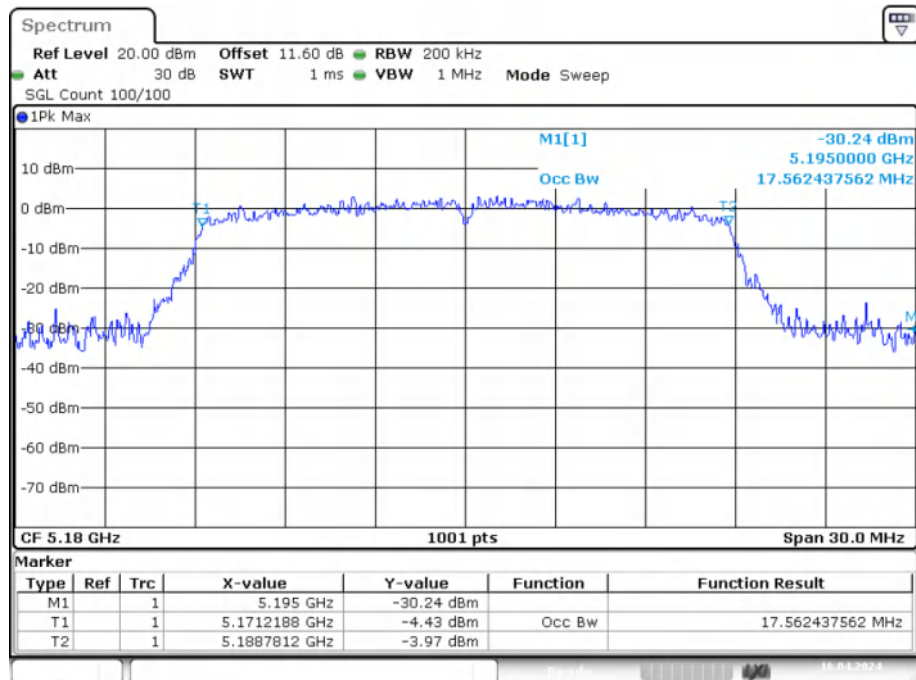


Date: 16.APR.2024 16:43:28

OBW NVNT ac20 5200MHz Ant1

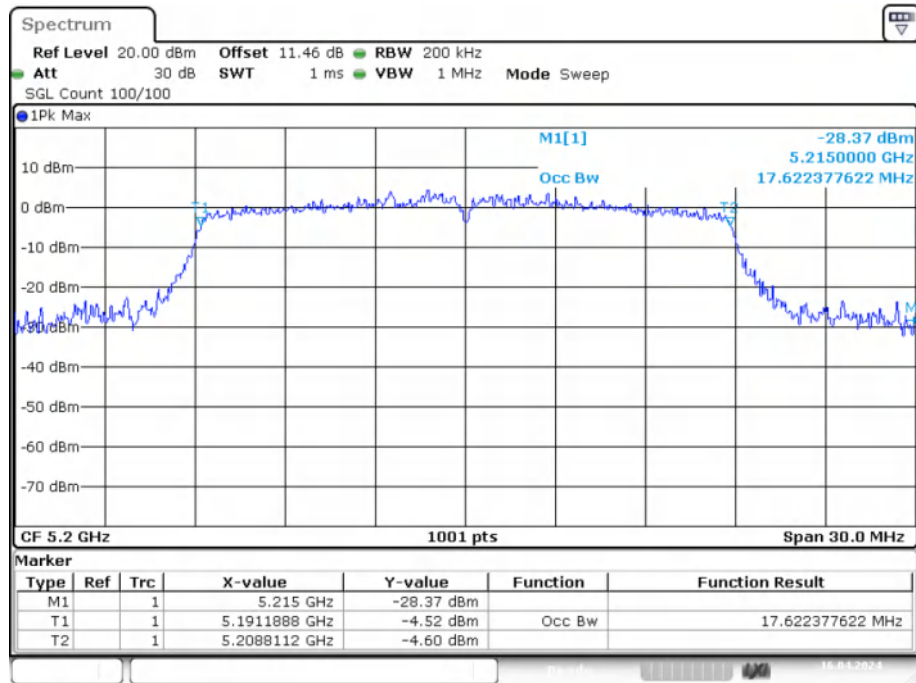


Date: 16.APR.2024 16:46:34

OBW NVNT ac20 5240MHz Ant1

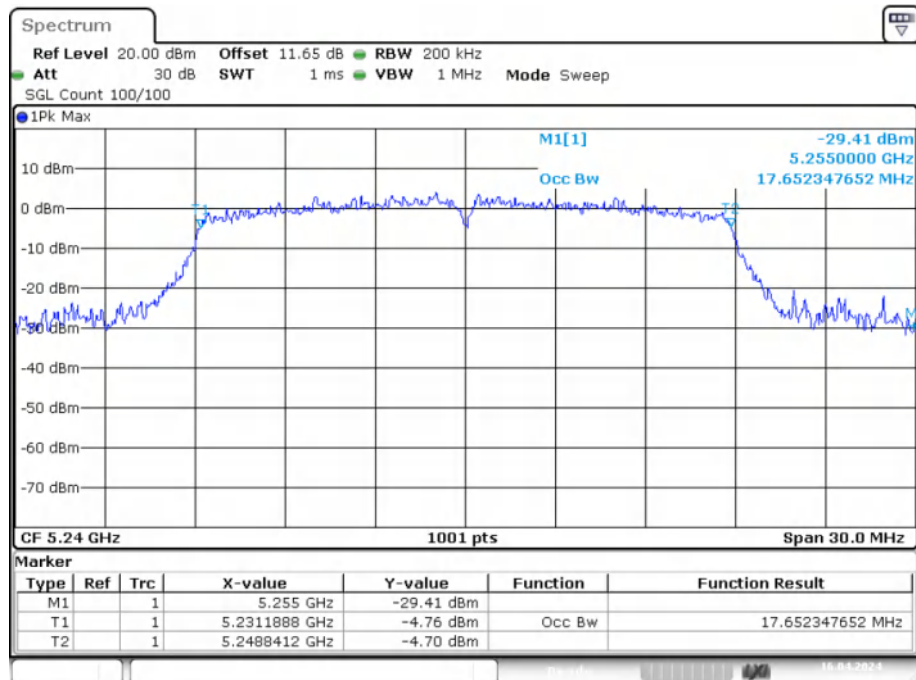


Date: 16.APR.2024 17:03:49

OBW NVNT ac40 5190MHz Ant1

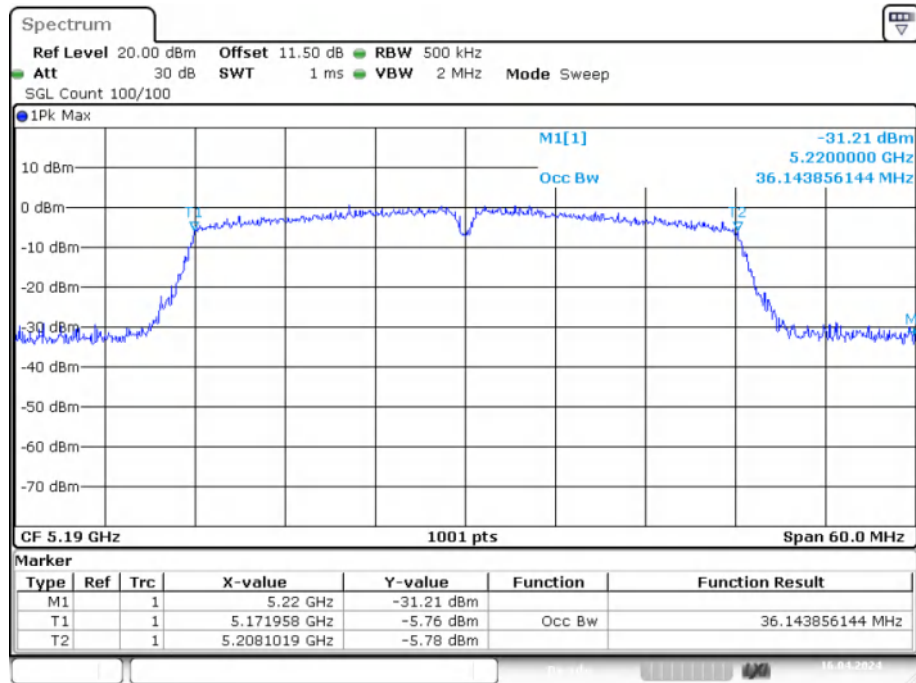


Date: 16.APR.2024 18:07:15

OBW NVNT ac40 5230MHz Ant1

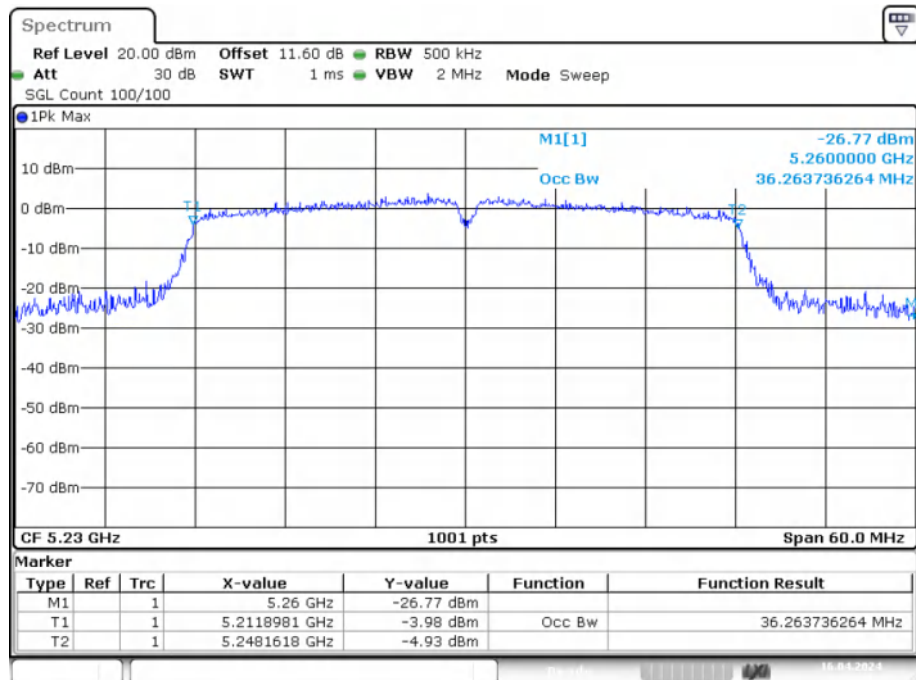


Date: 16.APR.2024 18:29:00

OBW NVNT ac80 5210MHz Ant1

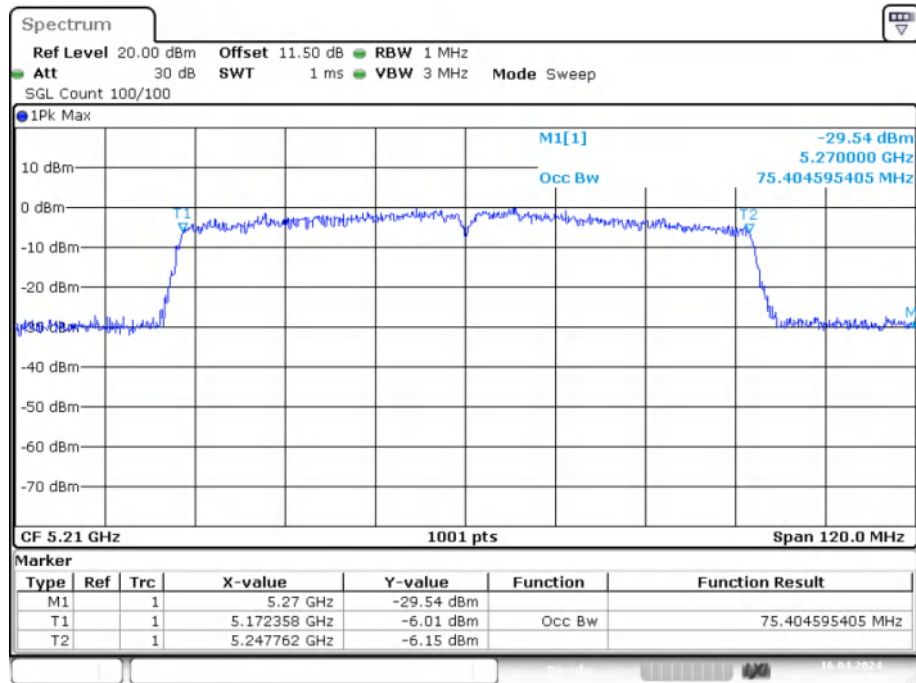


Date: 16.APR.2024 19:47:59

OBW NVNT n20 5180MHz Ant1

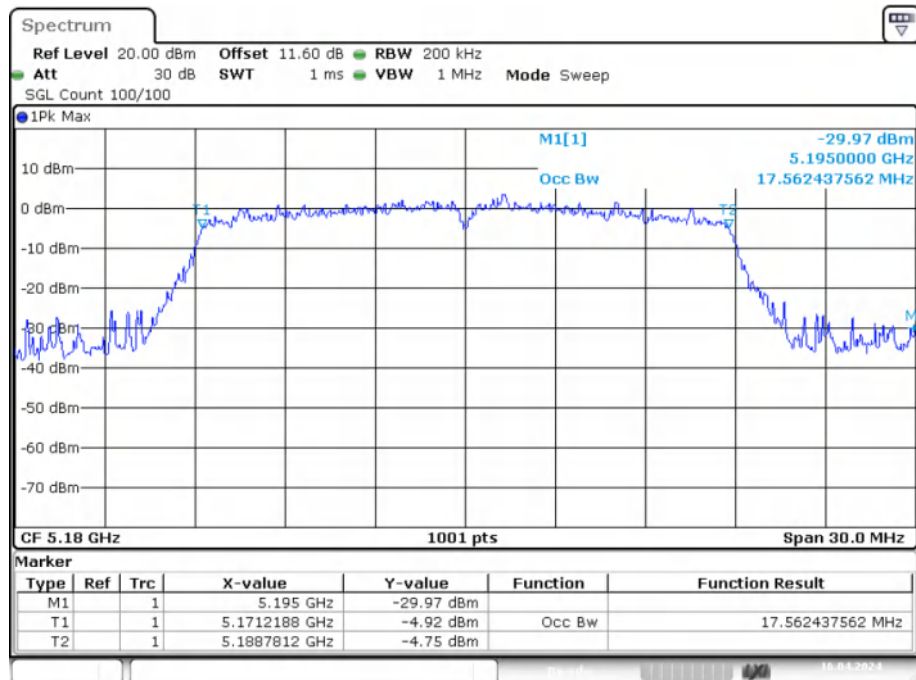


Date: 16.APR.2024 16:15:29


OBW NVNT n20 5200MHz Ant1

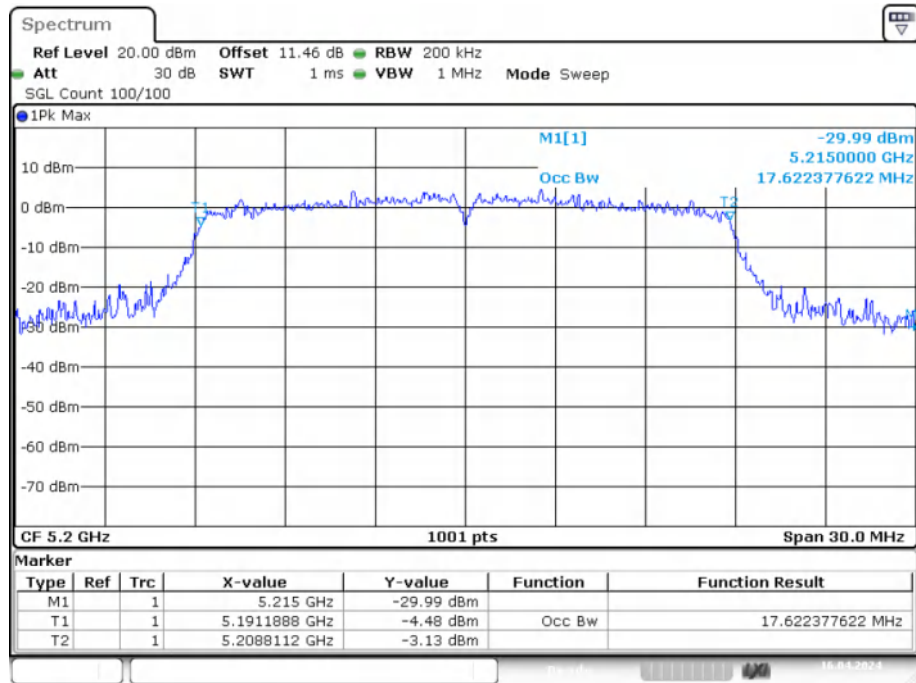

OBW NVNT n20 5240MHz Ant1

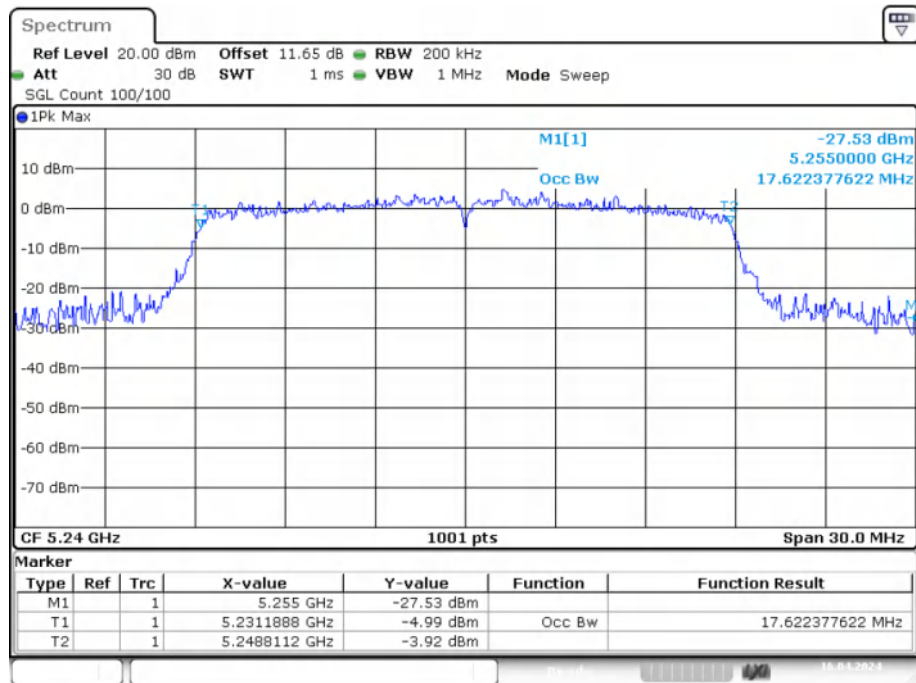


OBW NVNT n40 5190MHz Ant1

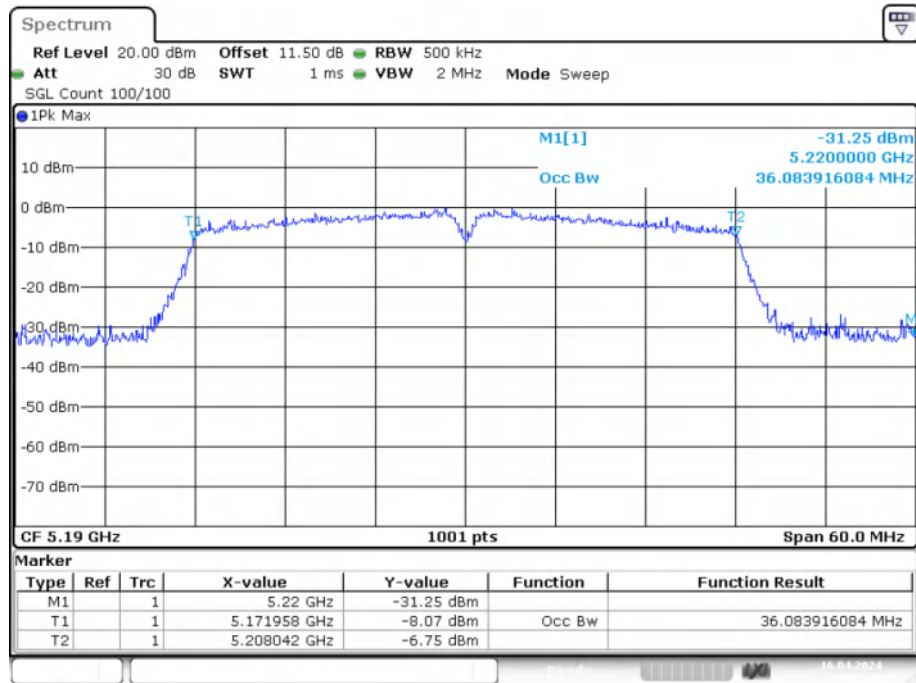

Date: 16.APR.2024 17:17:43

OBW NVNT n40 5230MHz Ant1

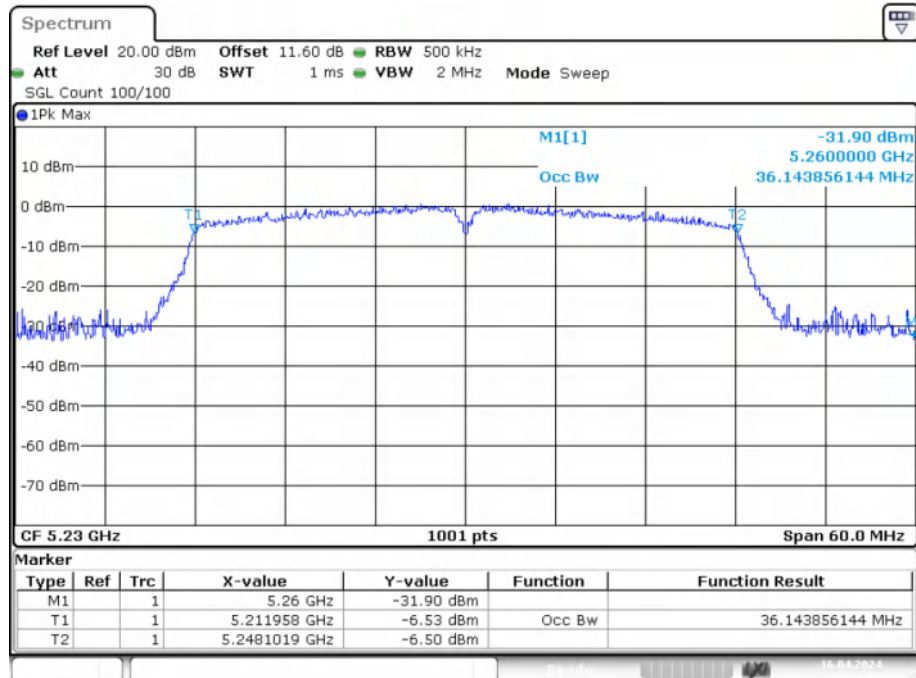


Date: 16.APR.2024 17:21:59

**Band 4 (5725-5850 MHz):
-6dB Bandwidth**


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	15.42	0.5	Pass
NVNT	a	5785	Ant1	15	0.5	Pass
NVNT	a	5825	Ant1	13.89	0.5	Pass
NVNT	ac20	5745	Ant1	14.37	0.5	Pass
NVNT	ac20	5785	Ant1	14.46	0.5	Pass
NVNT	ac20	5825	Ant1	12.63	0.5	Pass
NVNT	ac40	5755	Ant1	31.38	0.5	Pass
NVNT	ac40	5795	Ant1	33.78	0.5	Pass
NVNT	ac80	5775	Ant1	75.12	0.5	Pass
NVNT	n20	5745	Ant1	15.93	0.5	Pass
NVNT	n20	5785	Ant1	15.06	0.5	Pass
NVNT	n20	5825	Ant1	15.06	0.5	Pass
NVNT	n40	5755	Ant1	33.9	0.5	Pass
NVNT	n40	5795	Ant1	32.64	0.5	Pass

-6dB Bandwidth NVNT a 5745MHz Ant1

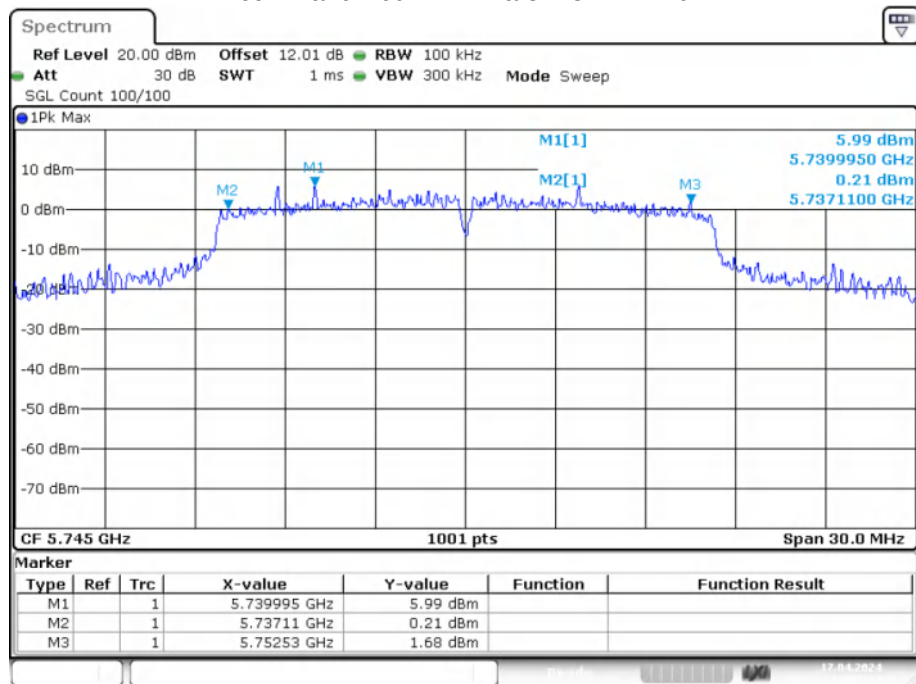


Date: 17.APR.2024 10:34:33

-6dB Bandwidth NVNT a 5785MHz Ant1

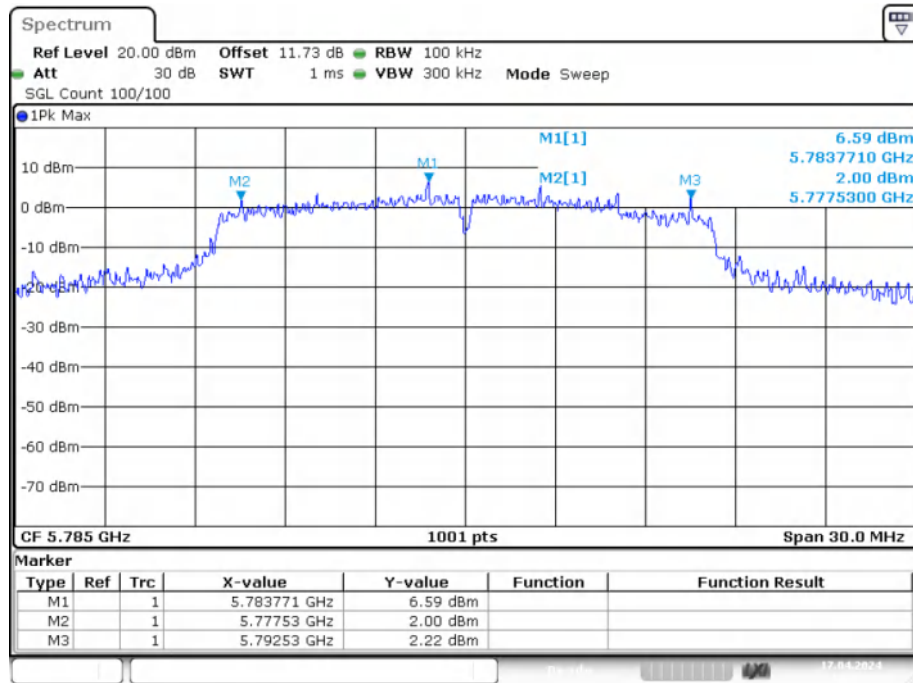


Date: 17.APR.2024 10:42:39

-6dB Bandwidth NVNT a 5825MHz Ant1

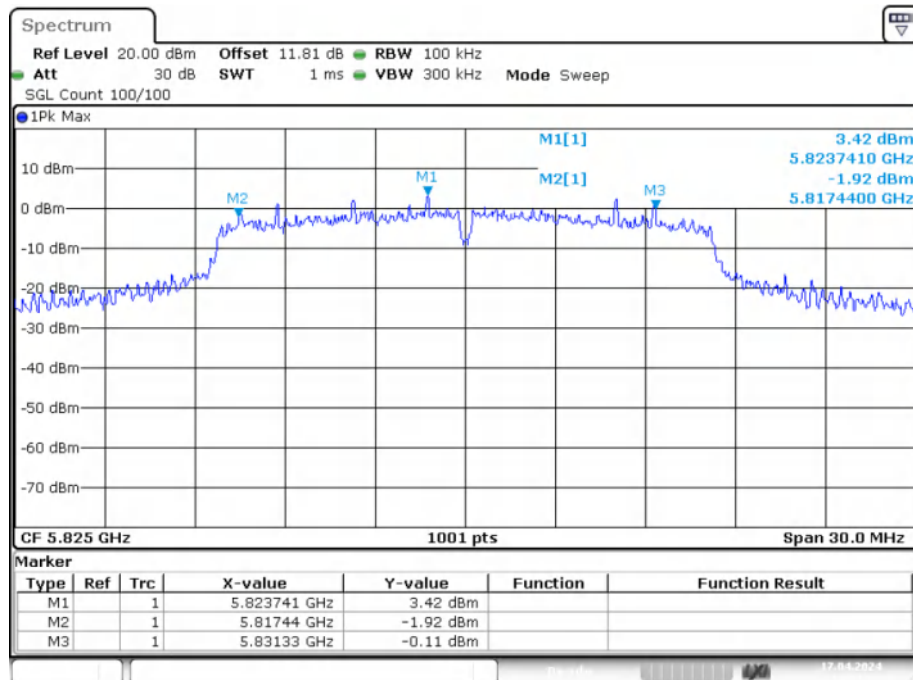


Date: 17.APR.2024 10:51:03

-6dB Bandwidth NVNT ac20 5745MHz Ant1

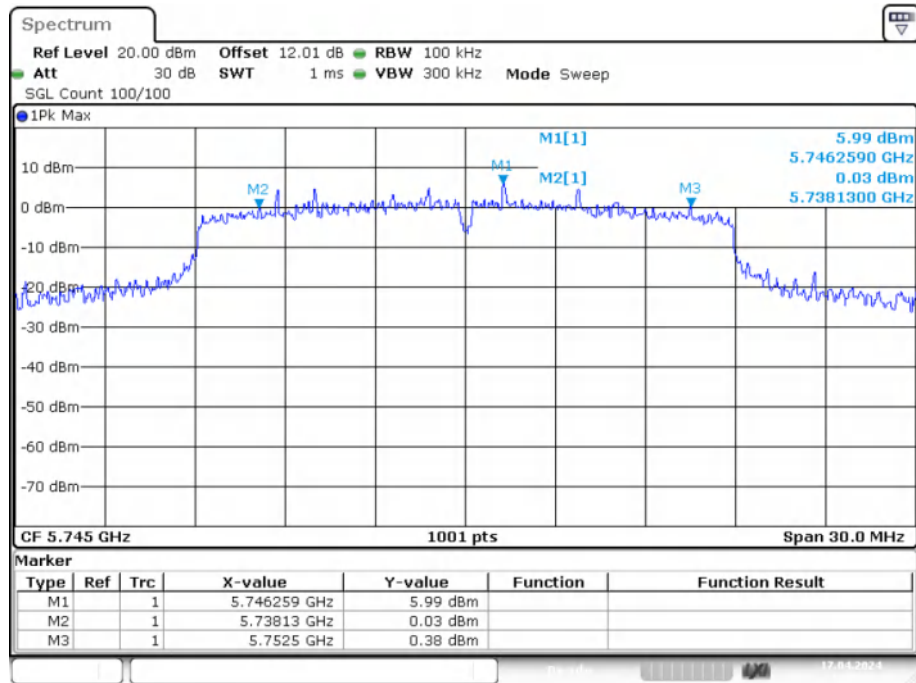


Date: 17.APR.2024 11:09:19

-6dB Bandwidth NVNT ac20 5785MHz Ant1

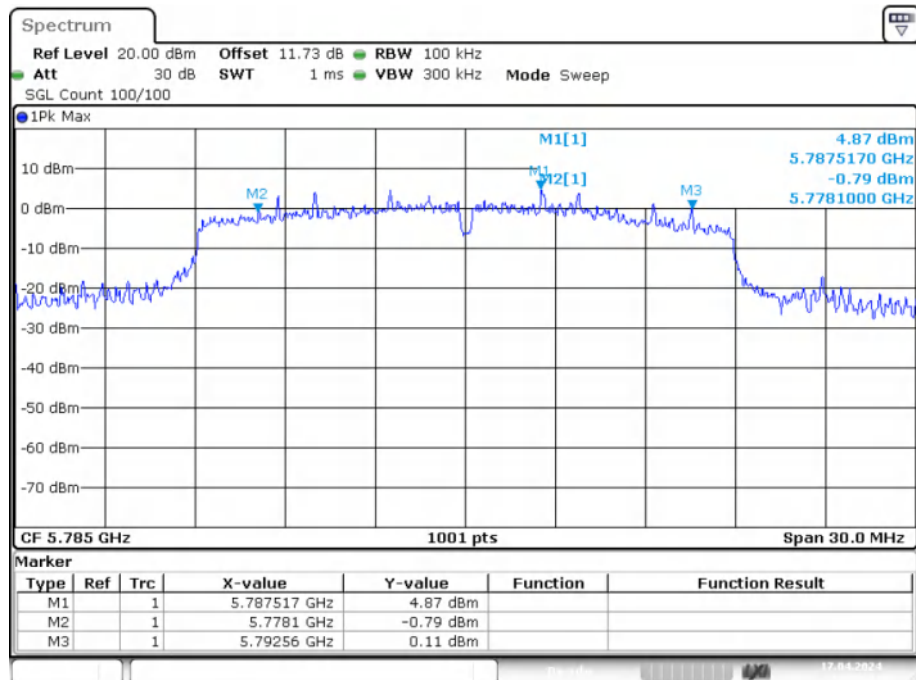


Date: 17.APR.2024 11:14:41

-6dB Bandwidth NVNT ac20 5825MHz Ant1

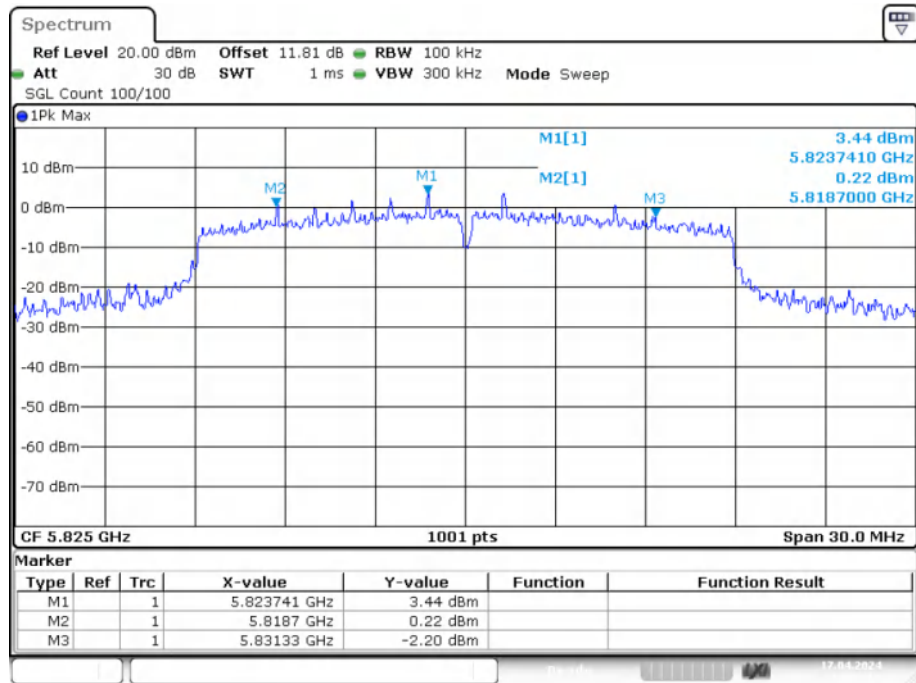


Date: 17.APR.2024 11:19:49

-6dB Bandwidth NVNT ac40 5755MHz Ant1

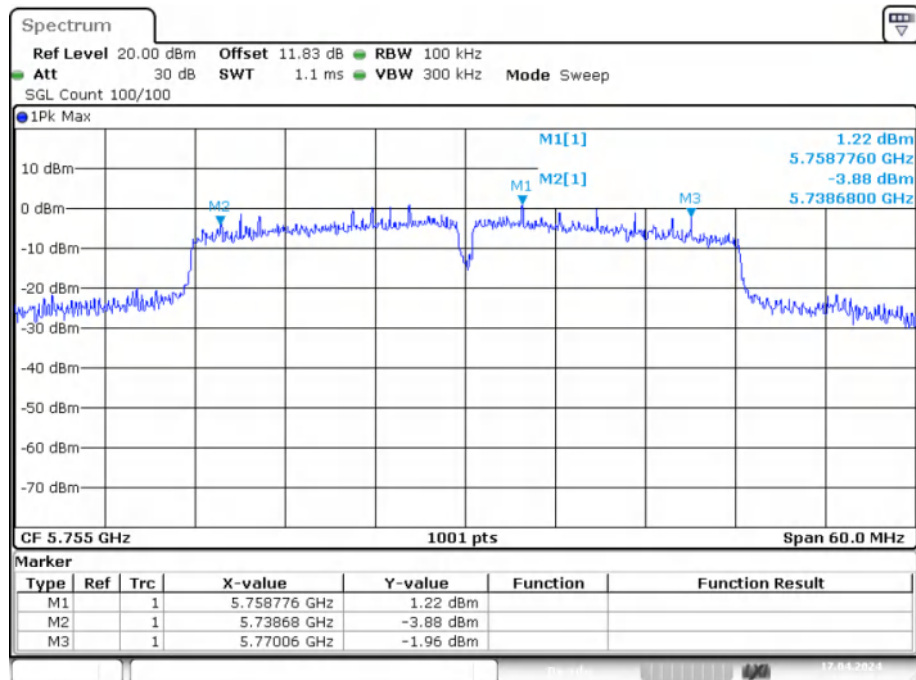


Date: 17.APR.2024 11:38:21

-6dB Bandwidth NVNT ac40 5795MHz Ant1

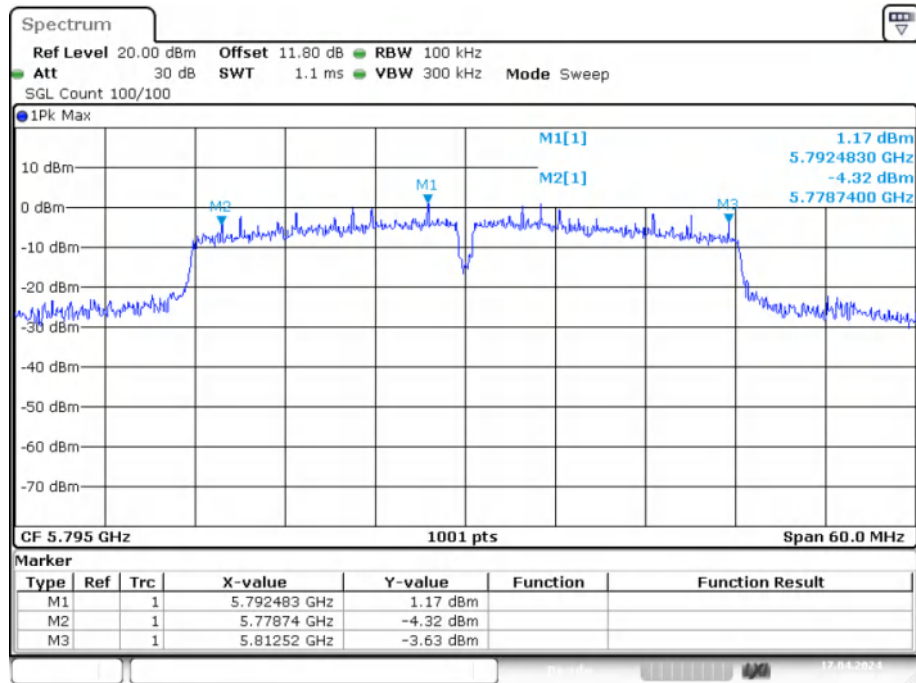


Date: 17.APR.2024 11:43:40

-6dB Bandwidth NVNT ac80 5775MHz Ant1

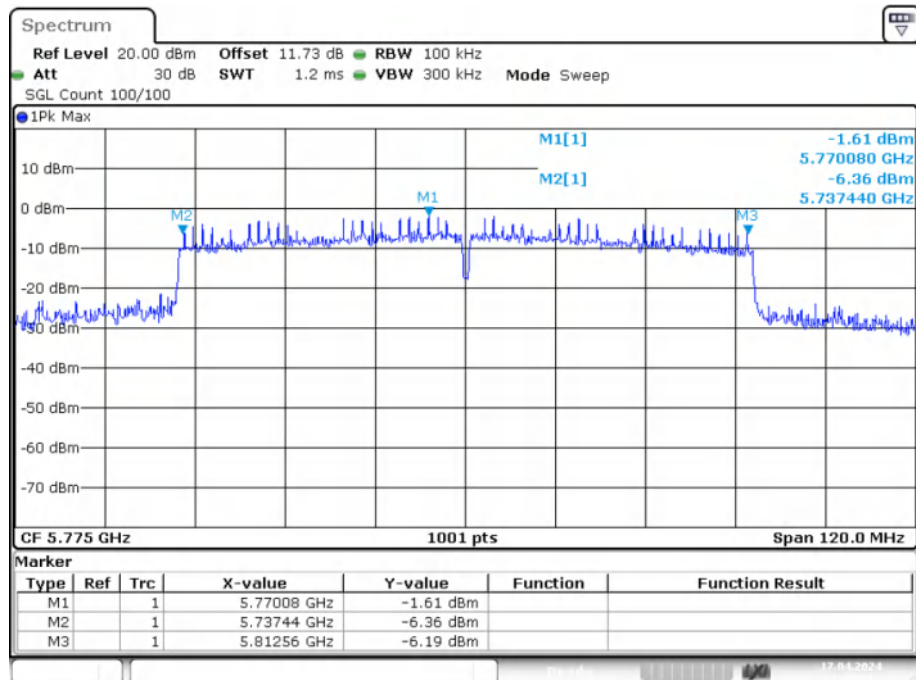


Date: 17.APR.2024 12:00:52

-6dB Bandwidth NVNT n20 5745MHz Ant1

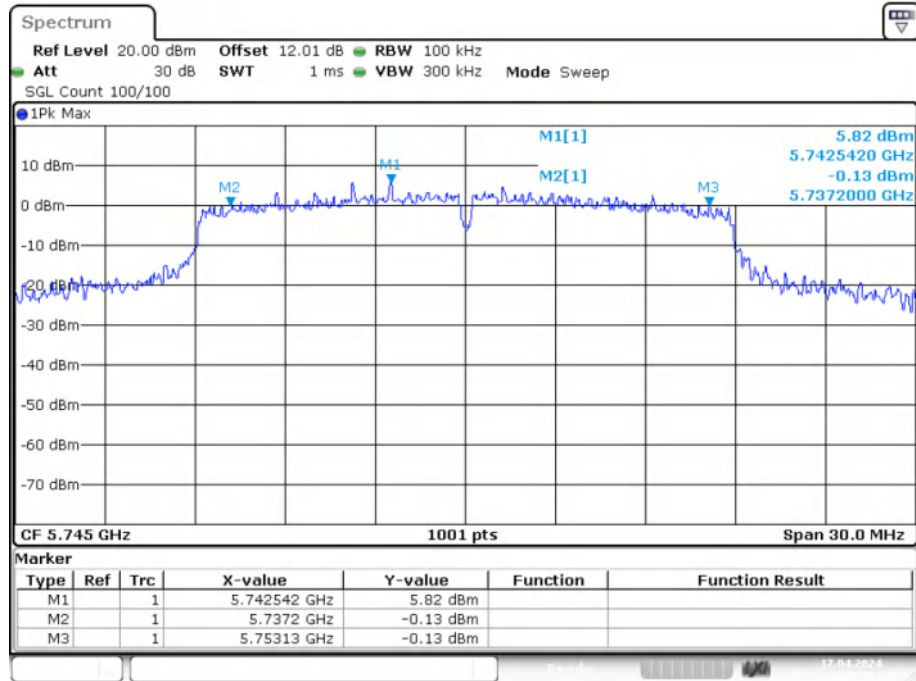


Date: 17.APR.2024 10:55:01

-6dB Bandwidth NVNT n20 5785MHz Ant1

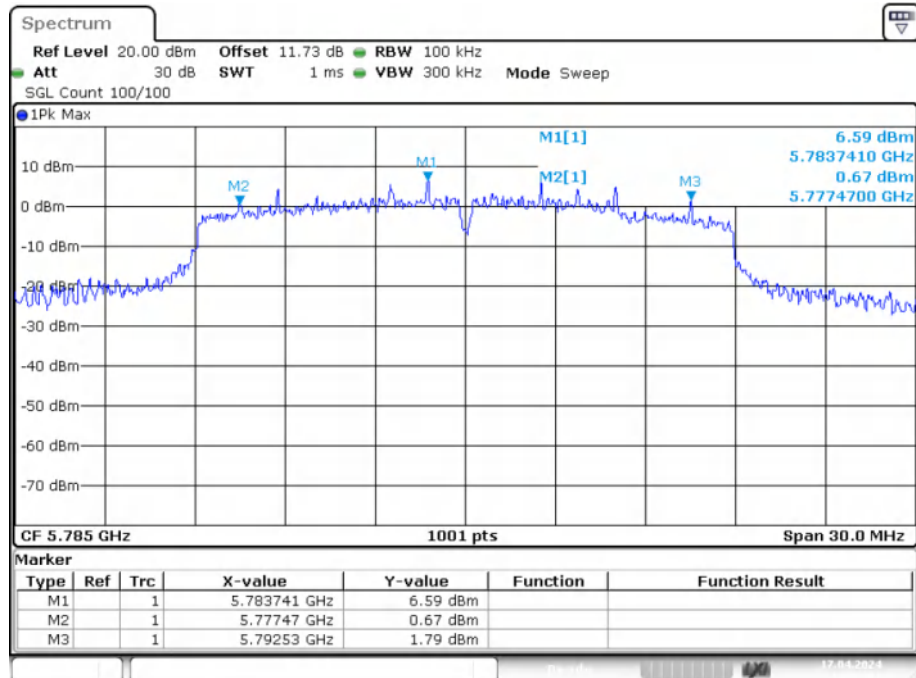


Date: 17.APR.2024 10:58:02

-6dB Bandwidth NVNT n20 5825MHz Ant1

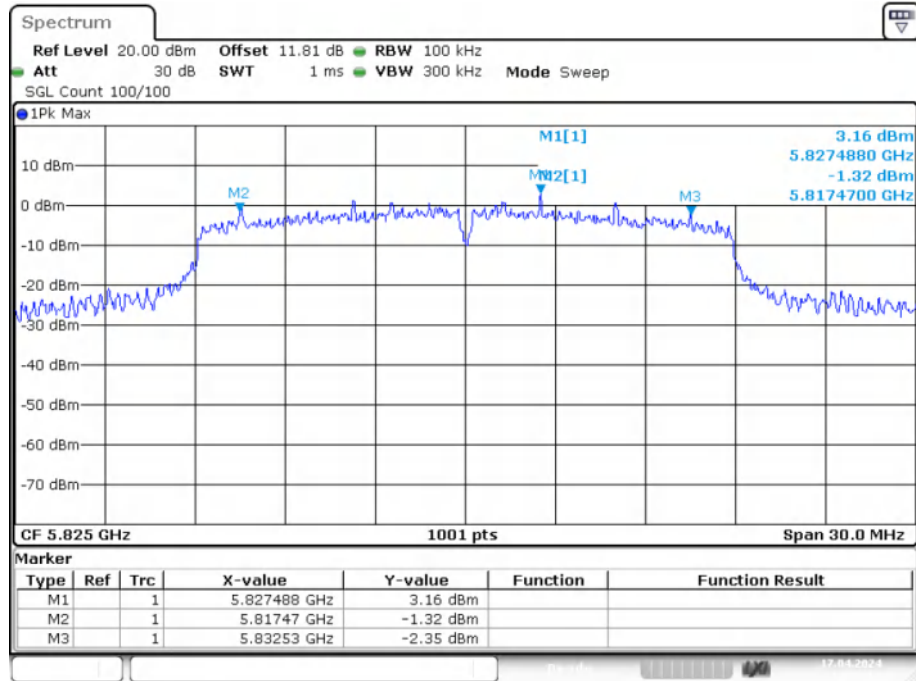


Date: 17.APR.2024 10:59:52

-6dB Bandwidth NVNT n40 5755MHz Ant1

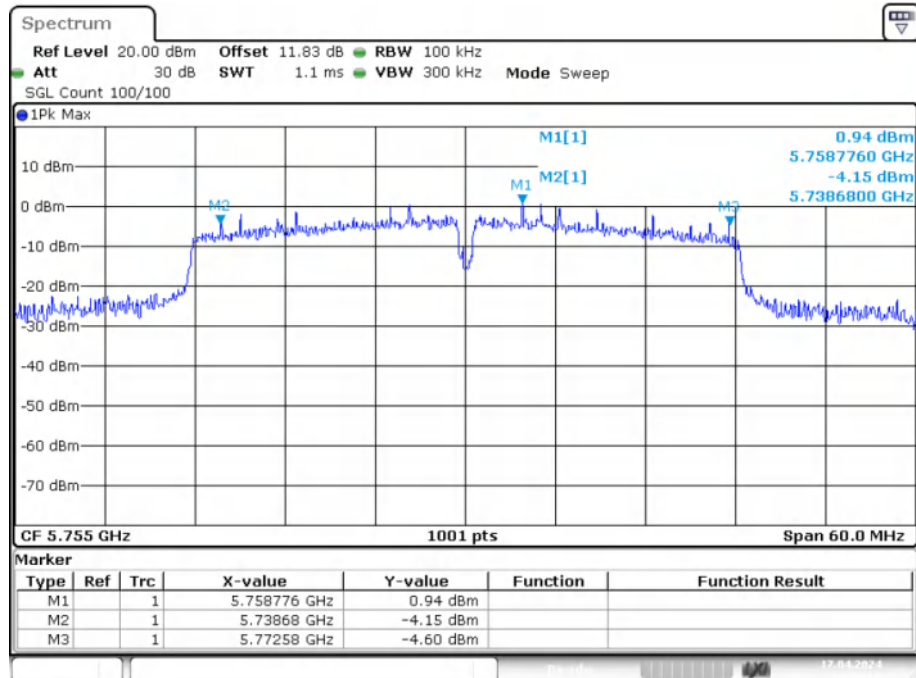

Date: 17.APR.2024 11:28:55

-6dB Bandwidth NVNT n40 5795MHz Ant1

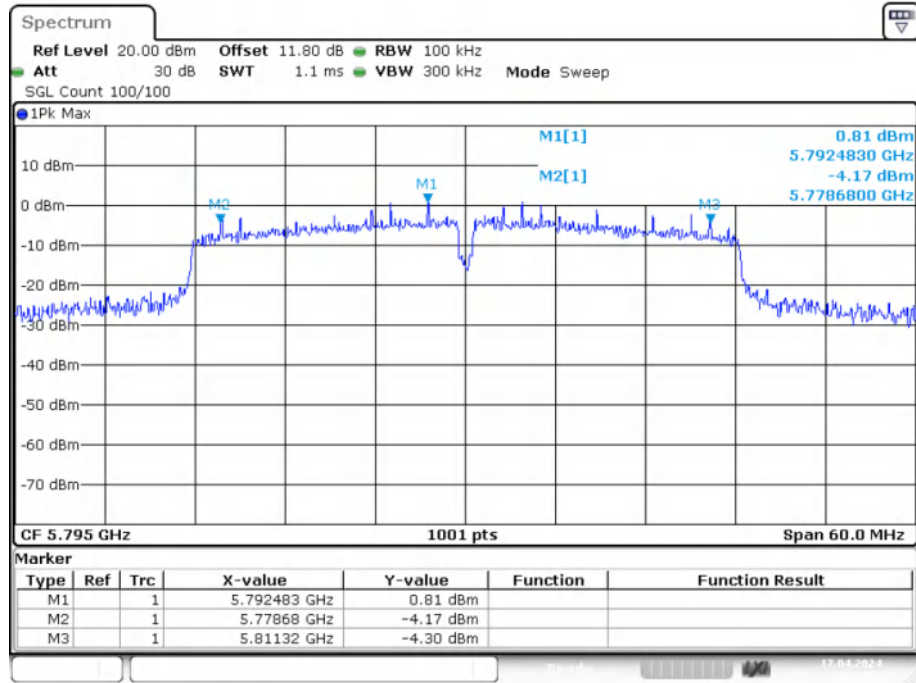


Date: 17.APR.2024 11:32:38

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	18.072
NVNT	a	5785	Ant1	18.252
NVNT	a	5825	Ant1	18.551
NVNT	ac20	5745	Ant1	17.862
NVNT	ac20	5785	Ant1	17.772
NVNT	ac20	5825	Ant1	17.982
NVNT	ac40	5755	Ant1	36.863
NVNT	ac40	5795	Ant1	36.743
NVNT	ac80	5775	Ant1	76.484
NVNT	n20	5745	Ant1	17.832
NVNT	n20	5785	Ant1	17.832
NVNT	n20	5825	Ant1	17.862
NVNT	n40	5755	Ant1	36.863
NVNT	n40	5795	Ant1	36.983

OBW NVNT a 5745MHz Ant1

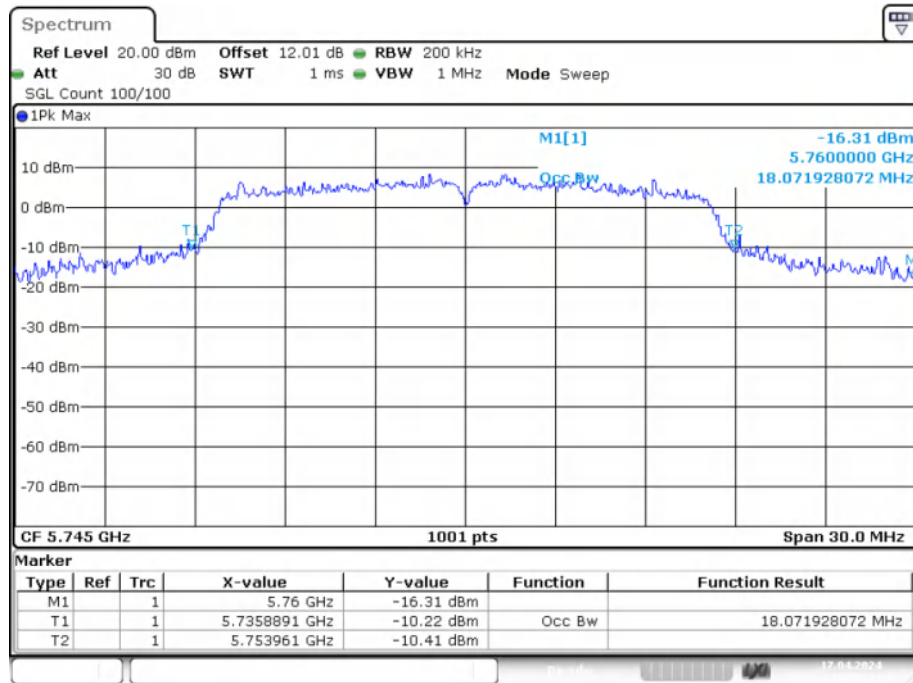


Date: 17.APR.2024 10:34:22

OBW NVNT a 5785MHz Ant1

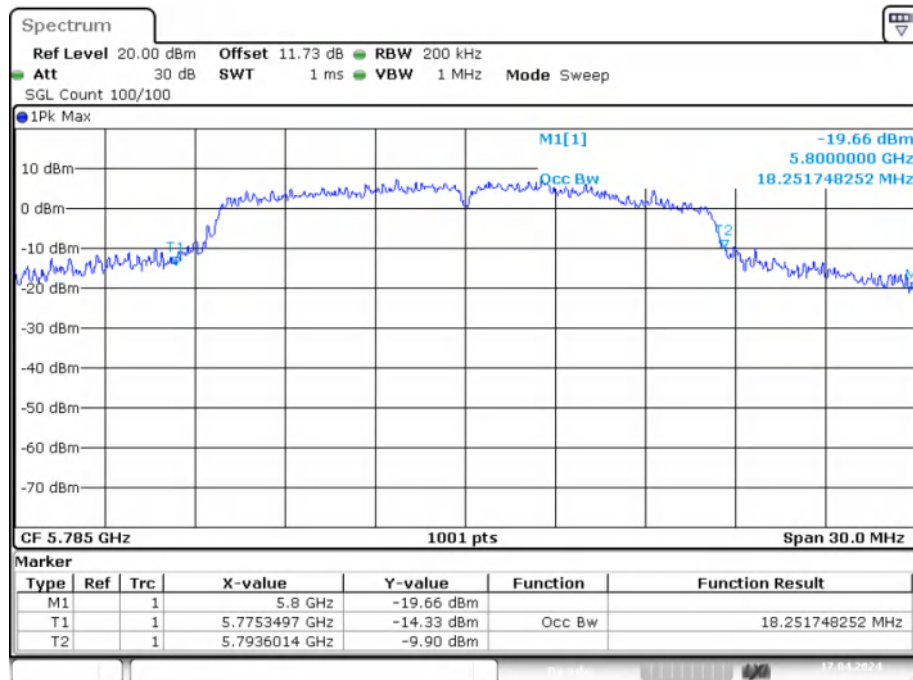


Date: 17.APR.2024 10:42:28

OBW NVNT a 5825MHz Ant1

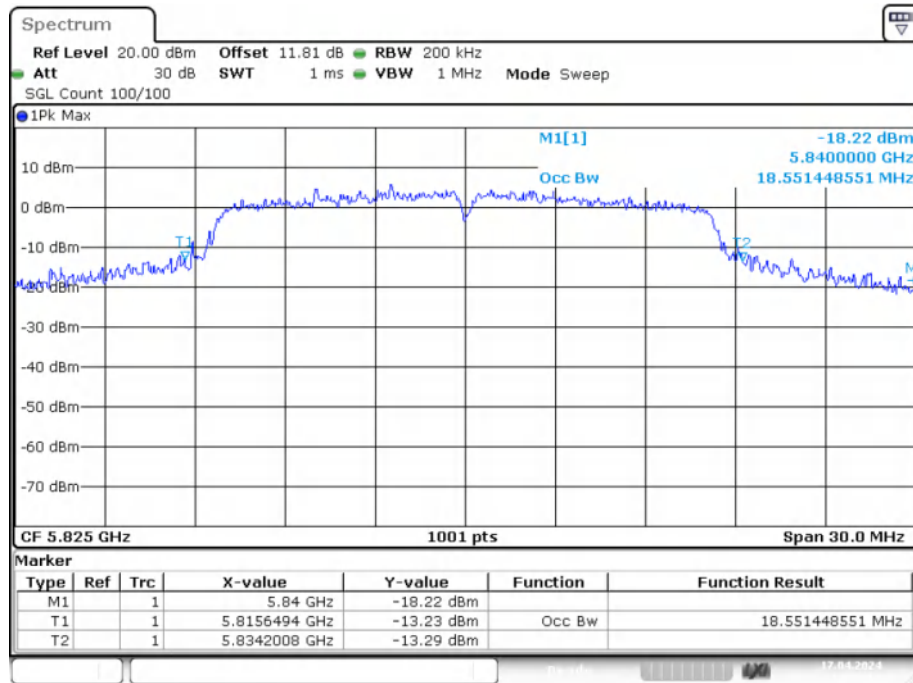


Date: 17.APR.2024 10:50:54

OBW NVNT ac20 5745MHz Ant1

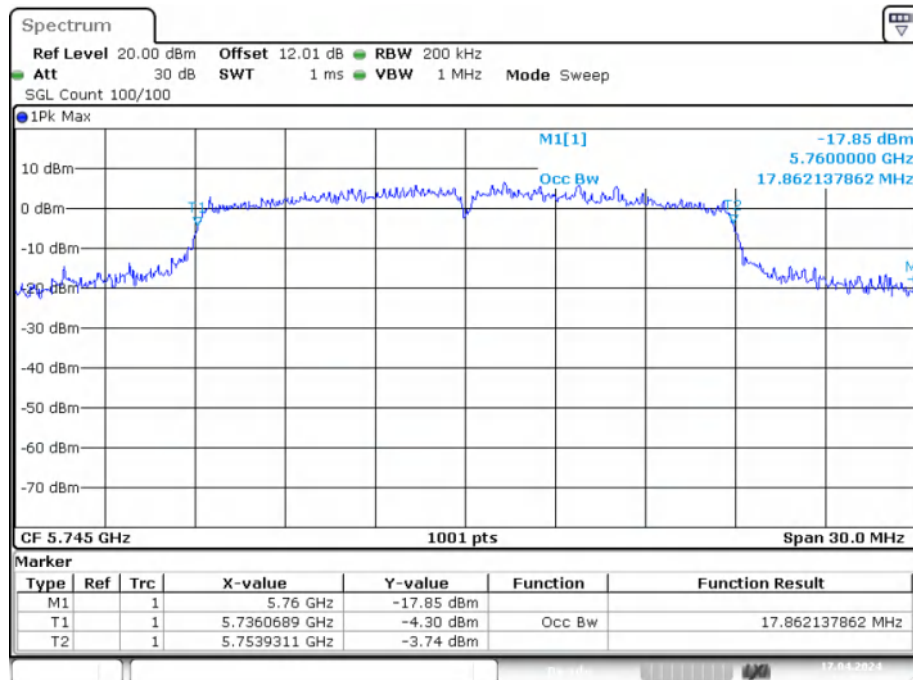


Date: 17.APR.2024 11:09:09

OBW NVNT ac20 5785MHz Ant1

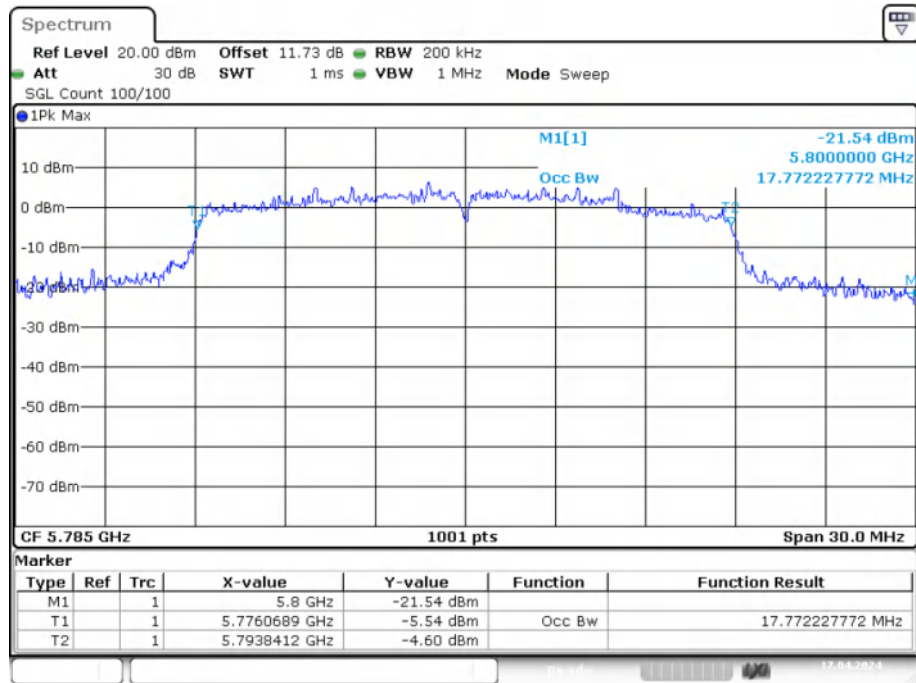


Date: 17.APR.2024 11:14:31

OBW NVNT ac20 5825MHz Ant1

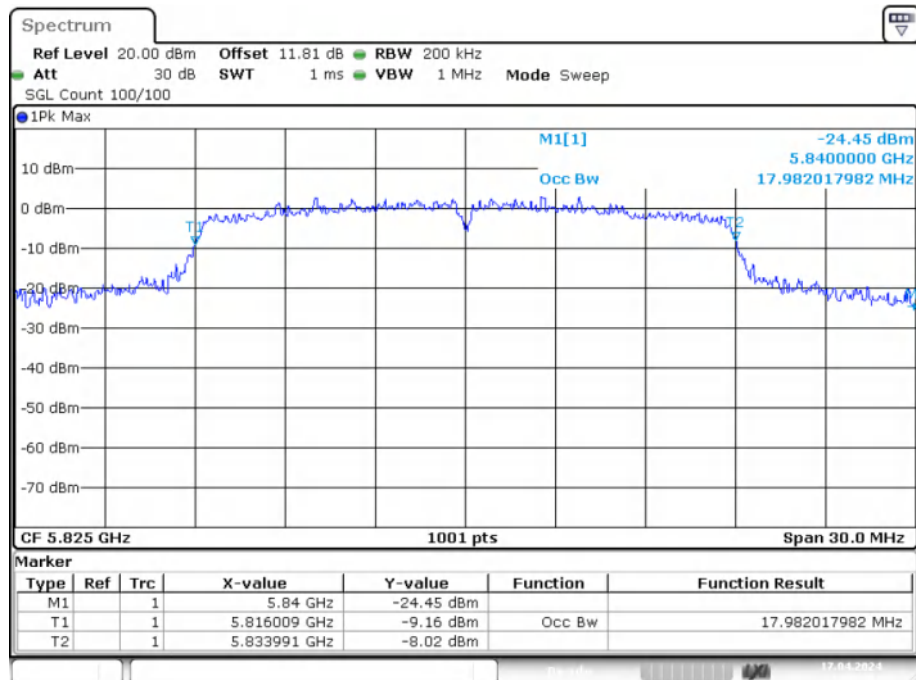


Date: 17.APR.2024 11:19:41


OBW NVNT ac40 5755MHz Ant1

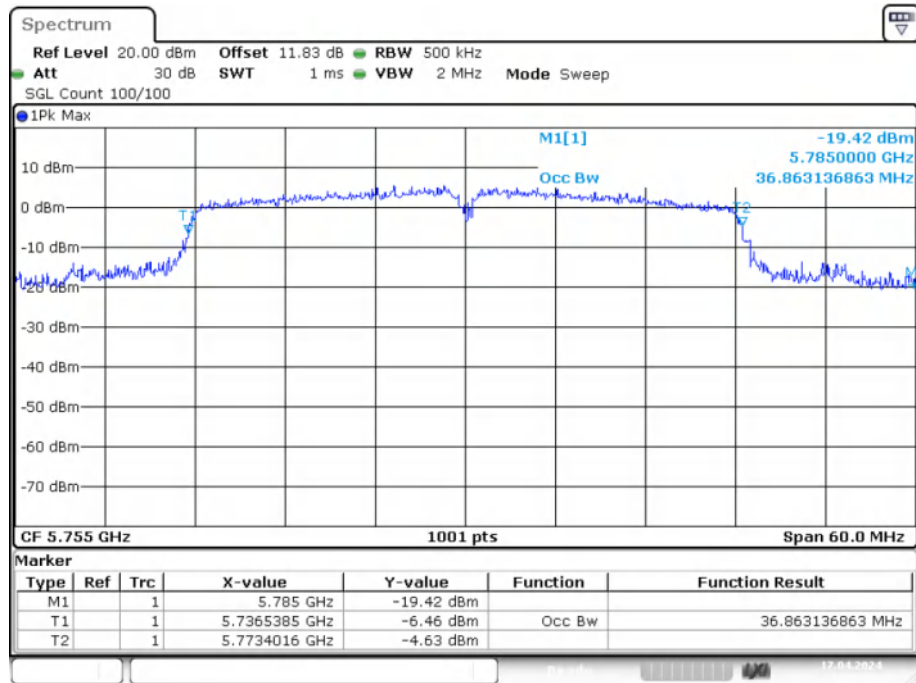


OBW NVNT ac40 5795MHz Ant1

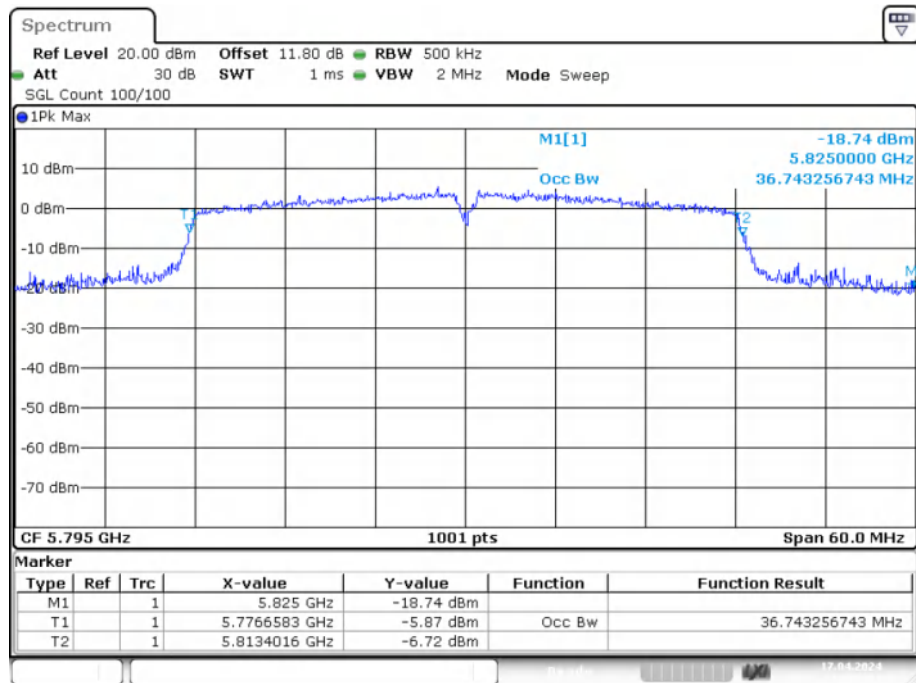


OBW NVNT ac80 5775MHz Ant1

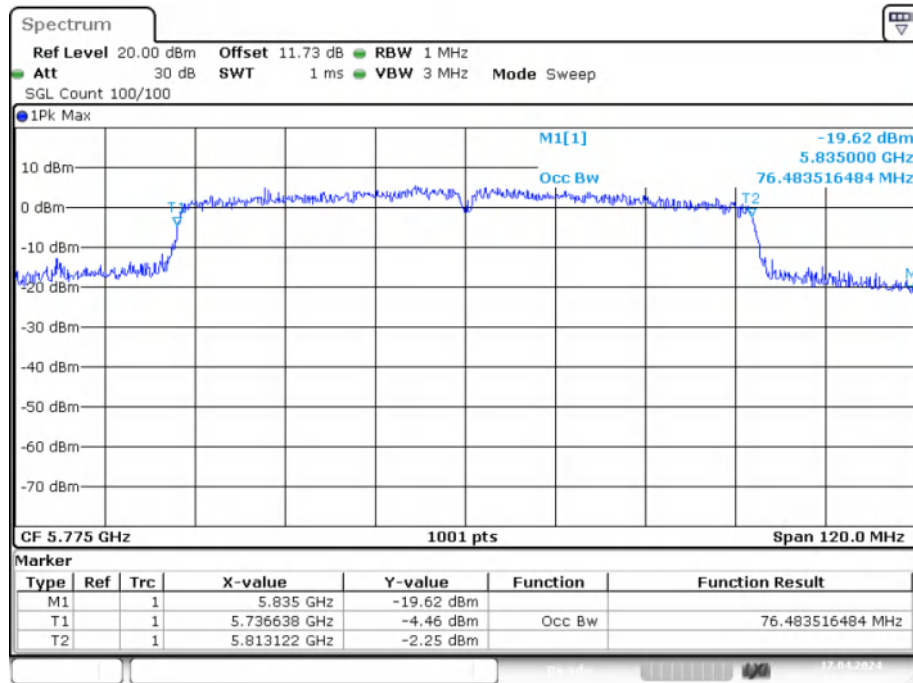

OBW NVNT n20 5745MHz Ant1

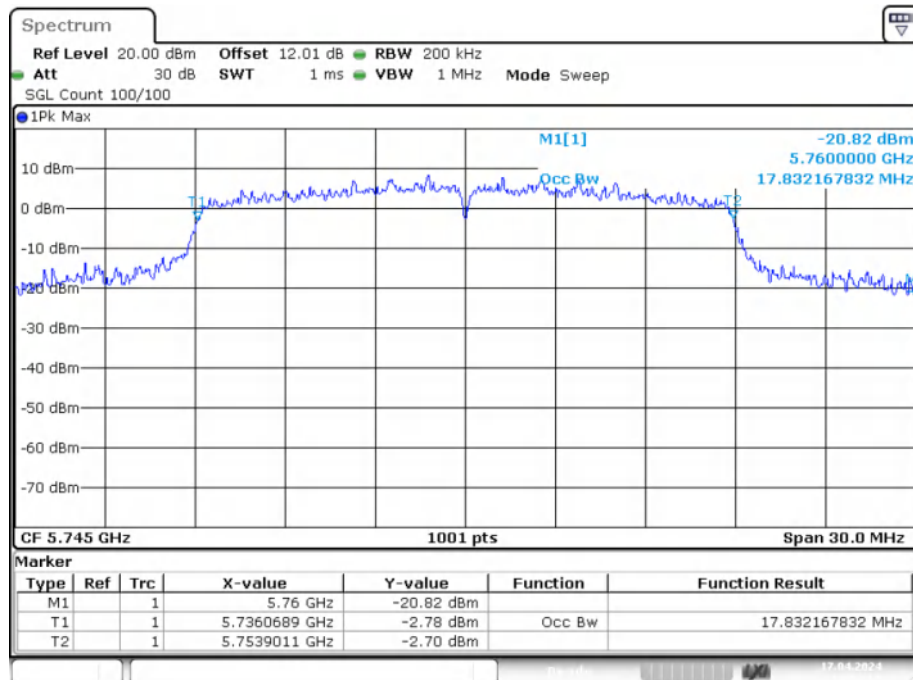


OBW NVNT n20 5785MHz Ant1

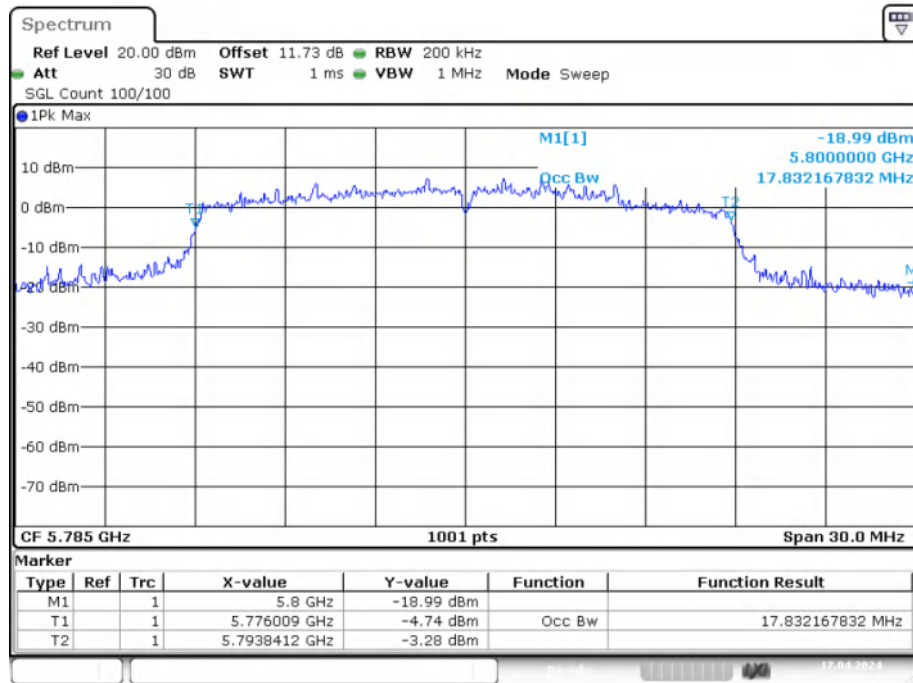


Date: 17.APR.2024 10:57:52

OBW NVNT n20 5825MHz Ant1

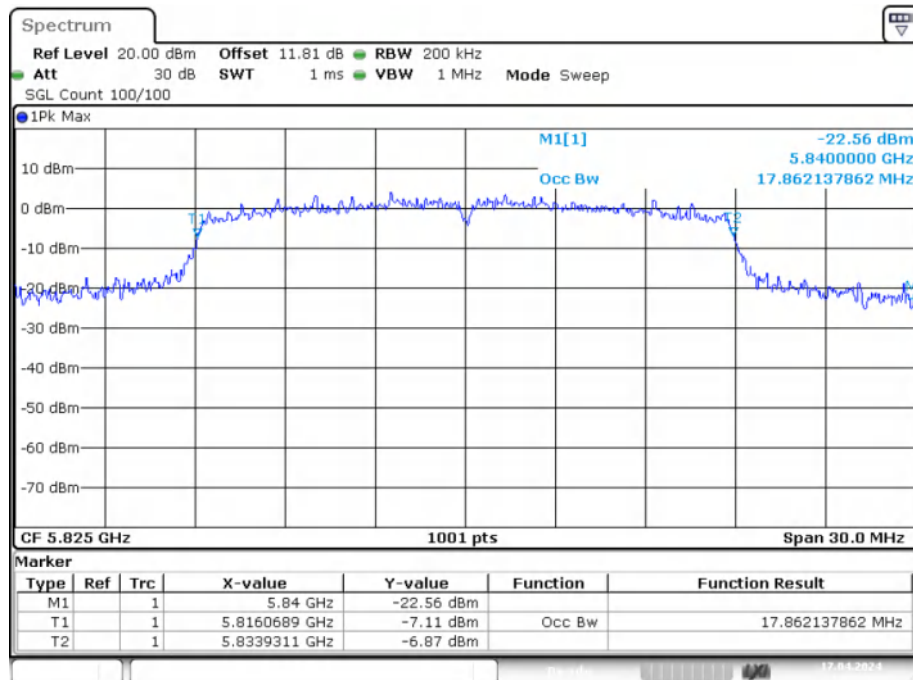


Date: 17.APR.2024 10:59:43

OBW NVNT n40 5755MHz Ant1

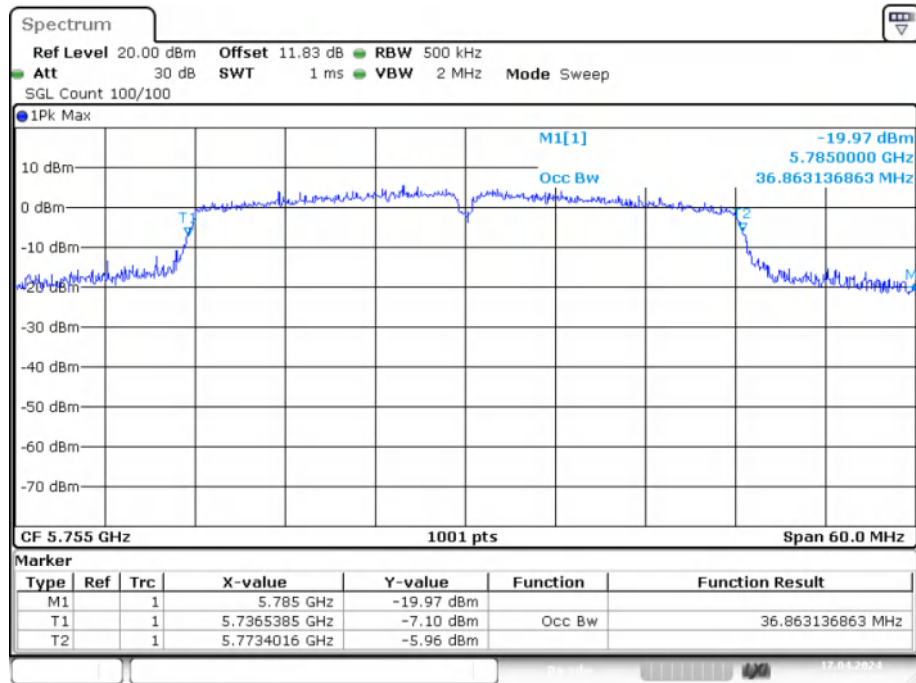


Date: 17.APR.2024 11:28:46

OBW NVNT n40 5795MHz Ant1

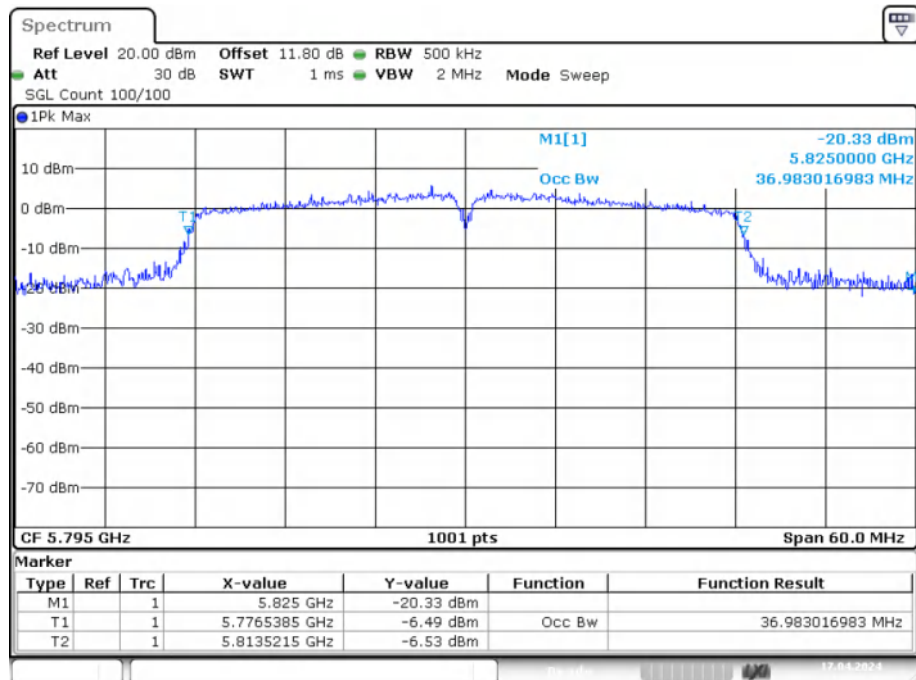

Date: 17.APR.2024 11:32:30

4.4 Peak Transmit Power

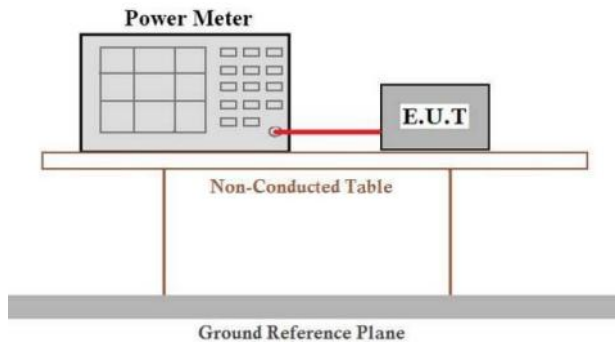Test Requirement:	FCC Part15 E Section 15.407, RSS-247 Issue 3
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	FCC Part15 E Section 15.407: For the band 5.15-5.25GHz, 5.25-5.35GHz, 5.47-5.725GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 250mW. For the band 5.725-5.85GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 1W. RSS-247 Issue 3: Frequency band 5150-5250 MHz: For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band. Frequency band 5725-5850 MHz The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipointFootnote3 systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.
Test setup:	 The diagram illustrates the test setup. A 'Power Meter' is connected via a red cable to an 'E.U.T.' (Equipment Under Test). Both are placed on a 'Non-Conducted Table'. This table is supported by two vertical legs and sits above a 'Ground Reference Plane', which is represented by a thick grey horizontal bar at the bottom.
Test procedure:	Measurement using an RF average power meter (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).

Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data**Band 1 (5150-5250 MHz)**


Condition	Mode	Frequency (MHz)	Antenna	Max Conducted Power (dBm)	Duty Factor (dB)	Total Conducted power (dBm)	EIRP (dBm)	FCC Limit (dBm)	IC Limit (dBm)	Verdict
NVNT	a	5180	Ant1	14.595	0.11	14.705	19.855	24	23	Pass
NVNT	a	5200	Ant1	15.091	0.11	15.201	20.351	24	23	Pass
NVNT	a	5240	Ant1	14.584	0.11	14.694	19.844	24	23	Pass
NVNT	ac20	5180	Ant1	14.897	0.11	15.007	20.157	24	23	Pass
NVNT	ac20	5200	Ant1	15.409	0.11	15.519	20.669	24	23	Pass
NVNT	ac20	5240	Ant1	15.086	0.11	15.196	20.346	24	23	Pass
NVNT	ac40	5190	Ant1	13.066	0.23	13.296	18.446	24	23	Pass
NVNT	ac40	5230	Ant1	15.691	0.23	15.921	21.071	24	23	Pass
NVNT	ac80	5210	Ant1	11.236	0.46	11.696	16.846	24	23	Pass
NVNT	n20	5180	Ant1	14.155	0.12	14.275	19.425	24	23	Pass
NVNT	n20	5200	Ant1	15.672	0.12	15.792	20.942	24	23	Pass
NVNT	n20	5240	Ant1	15.628	0.12	15.748	20.898	24	23	Pass
NVNT	n40	5190	Ant1	12.262	0.23	12.492	17.642	24	23	Pass
NVNT	n40	5230	Ant1	13.431	0.23	13.661	18.811	24	23	Pass

Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5180	Ant1	97.56	0.11
NVNT	a	5200	Ant1	97.55	0.11
NVNT	a	5240	Ant1	97.56	0.11
NVNT	ac20	5180	Ant1	97.41	0.11
NVNT	ac20	5200	Ant1	97.4	0.11
NVNT	ac20	5240	Ant1	97.42	0.11
NVNT	ac40	5190	Ant1	94.9	0.23
NVNT	ac40	5230	Ant1	94.89	0.23
NVNT	ac80	5210	Ant1	90.01	0.46
NVNT	n20	5180	Ant1	97.34	0.12
NVNT	n20	5200	Ant1	97.38	0.12
NVNT	n20	5240	Ant1	97.37	0.12
NVNT	n40	5190	Ant1	94.87	0.23
NVNT	n40	5230	Ant1	94.89	0.23


EIRP= Max Conducted Power (dBm)+ Duty Factor (dB)+ANT Gain(dBi)

Duty Cycle NVNT a 5180MHz Ant1

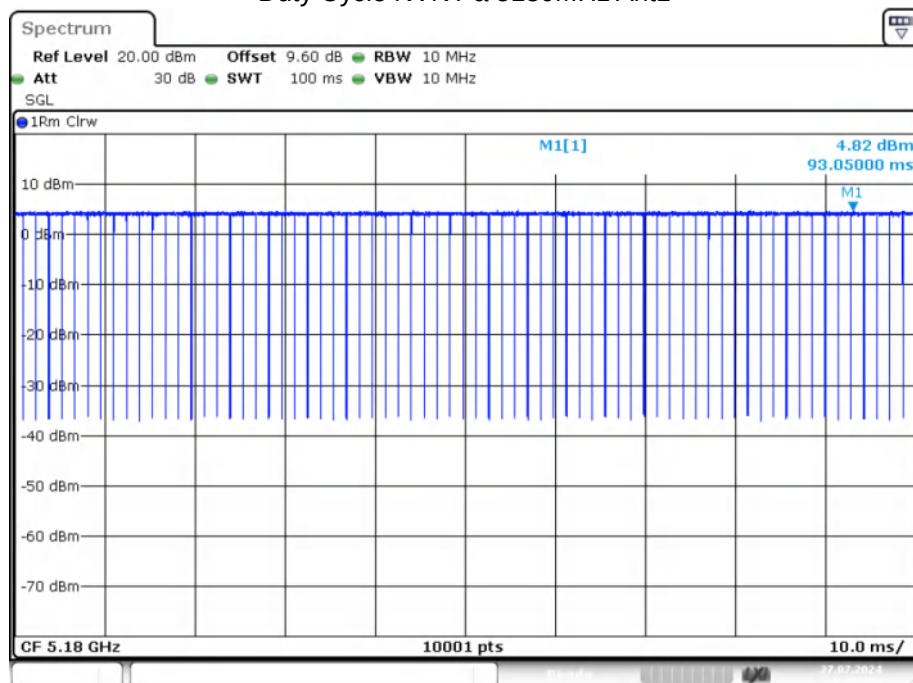


Date: 27.JUL.2024 15:09:47

Duty Cycle NVNT a 5200MHz Ant1

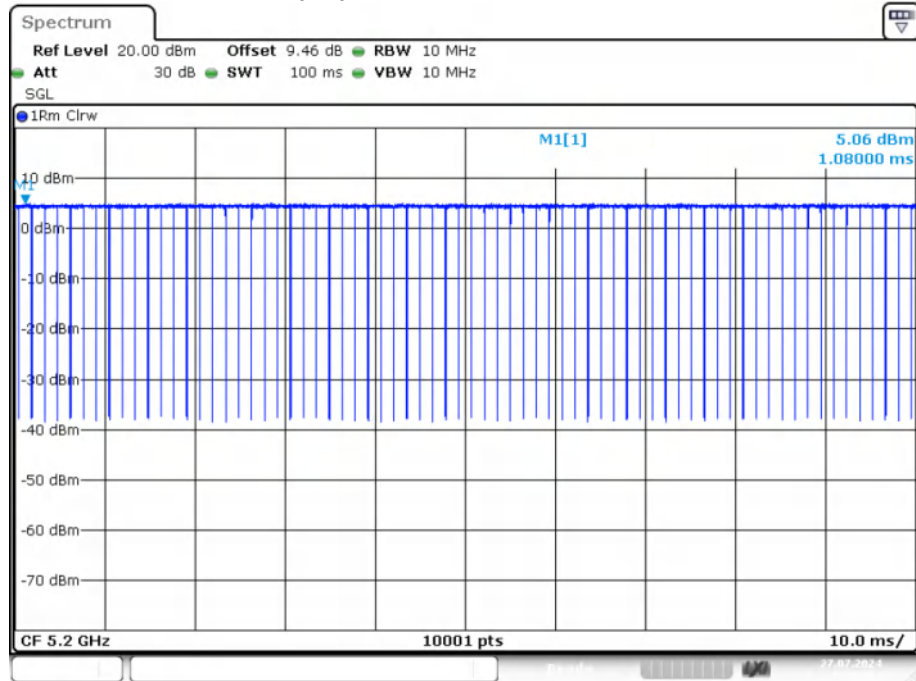


Date: 27.JUL.2024 15:27:01

Duty Cycle NVNT a 5240MHz Ant1

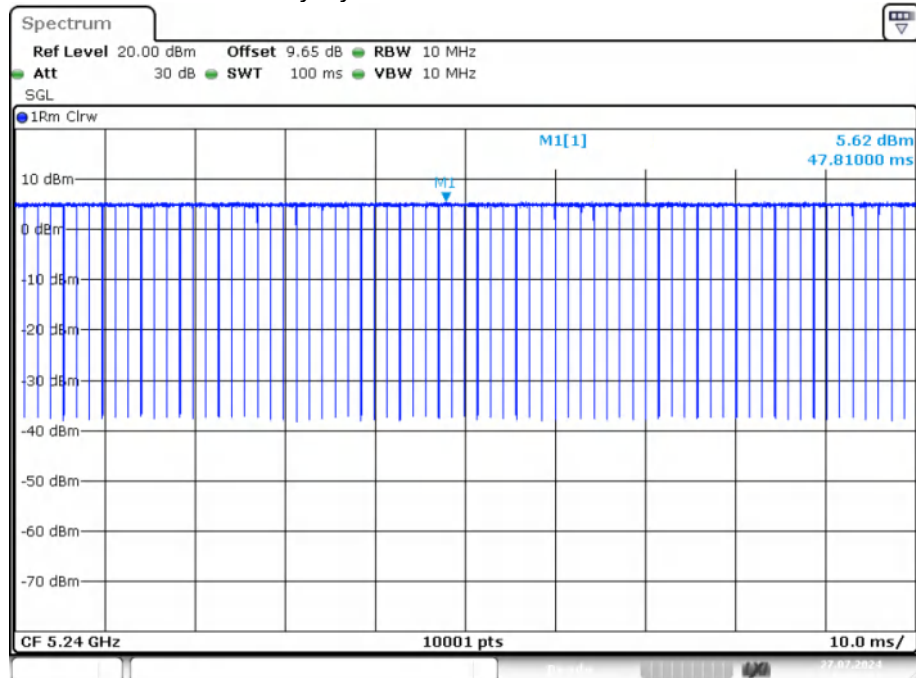


Date: 27.JUL.2024 15:35:37

Duty Cycle NVNT ac20 5180MHz Ant1

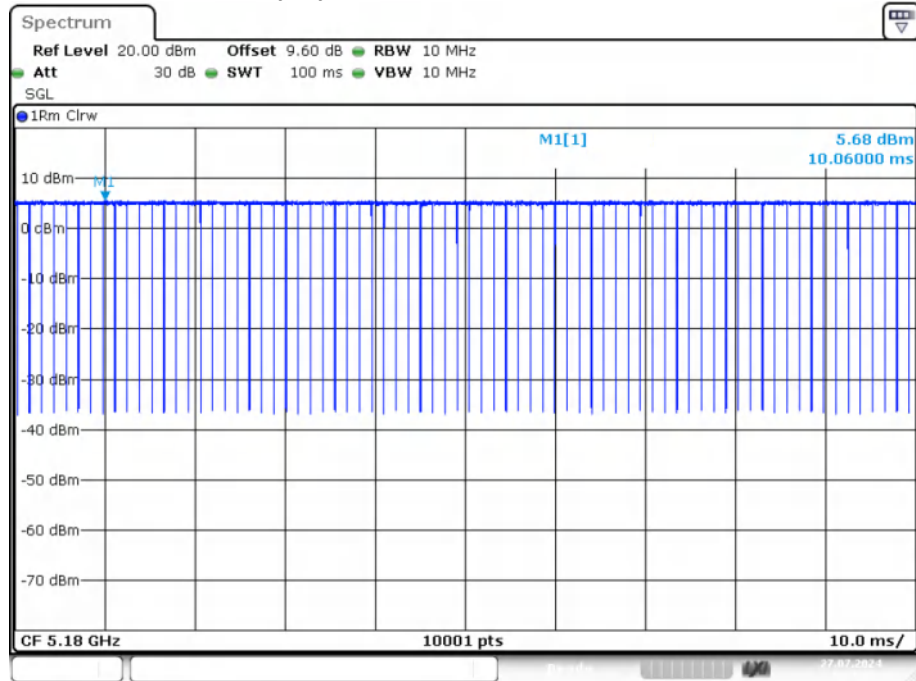


Date: 27.JUL.2024 16:44:04

Duty Cycle NVNT ac20 5200MHz Ant1

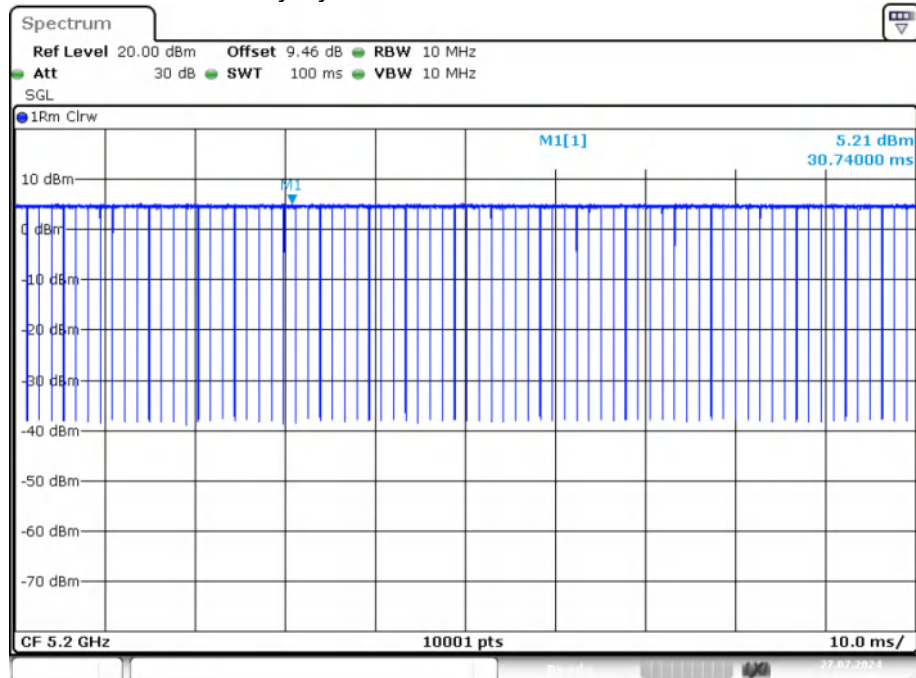


Date: 27.JUL.2024 16:53:49

Duty Cycle NVNT ac20 5240MHz Ant1

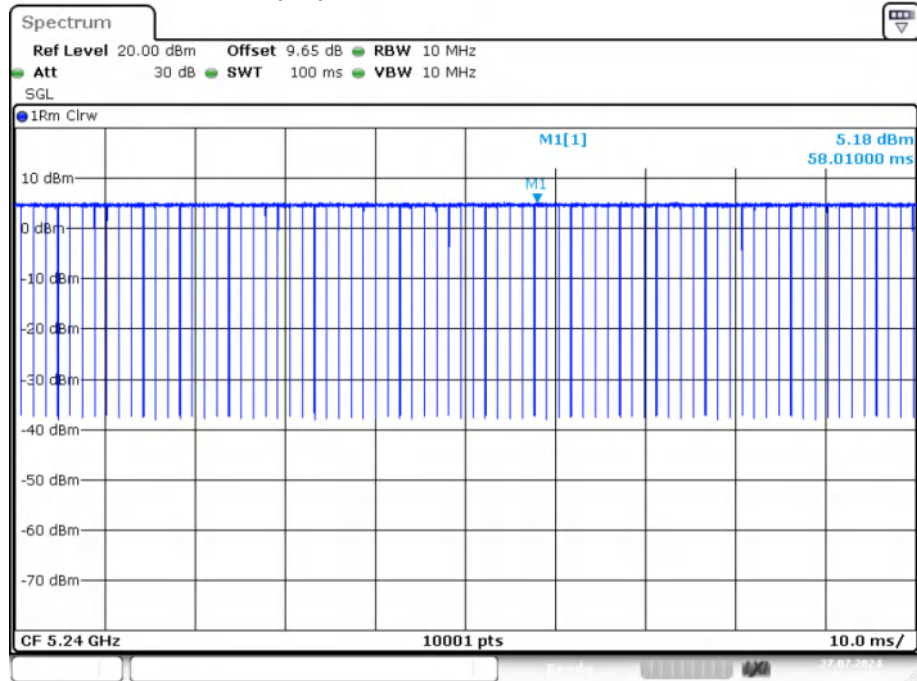


Date: 27.JUL.2024 17:02:35

Duty Cycle NVNT ac40 5190MHz Ant1

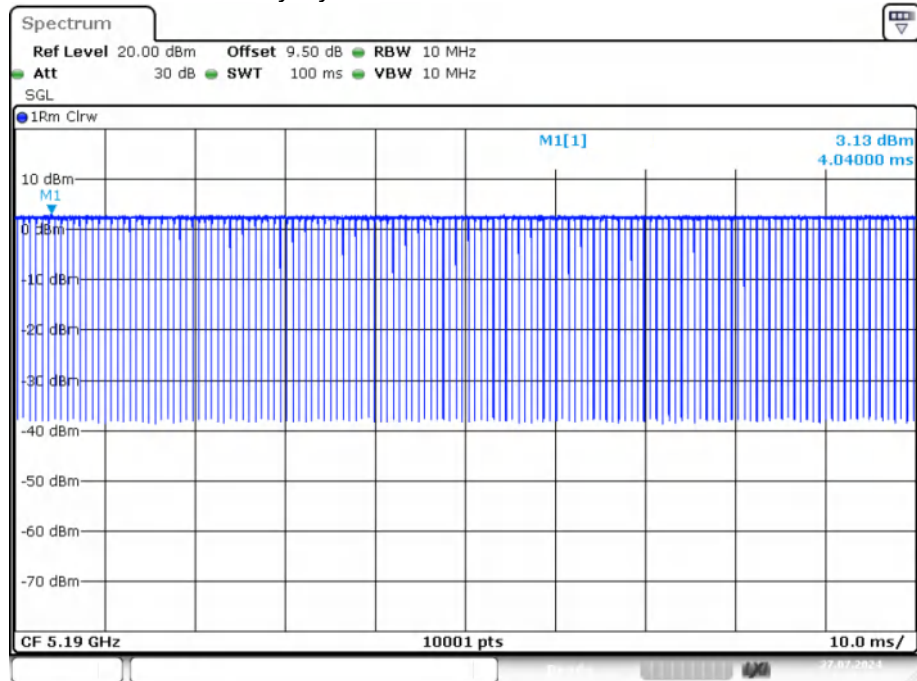


Date: 27.JUL.2024 17:43:03

Duty Cycle NVNT ac40 5230MHz Ant1

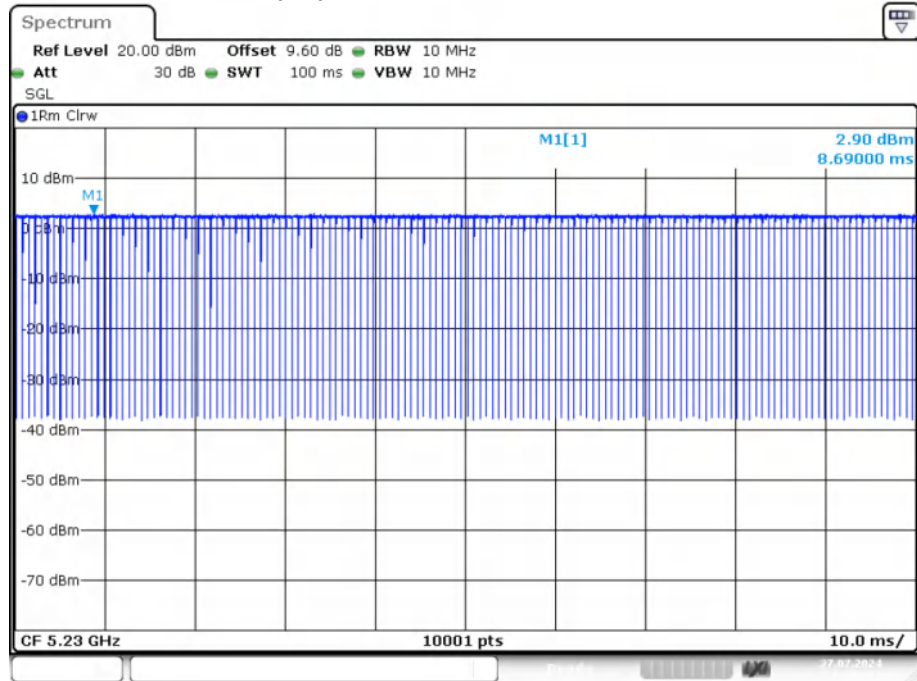


Date: 27.JUL.2024 17:46:32

Duty Cycle NVNT ac80 5210MHz Ant1

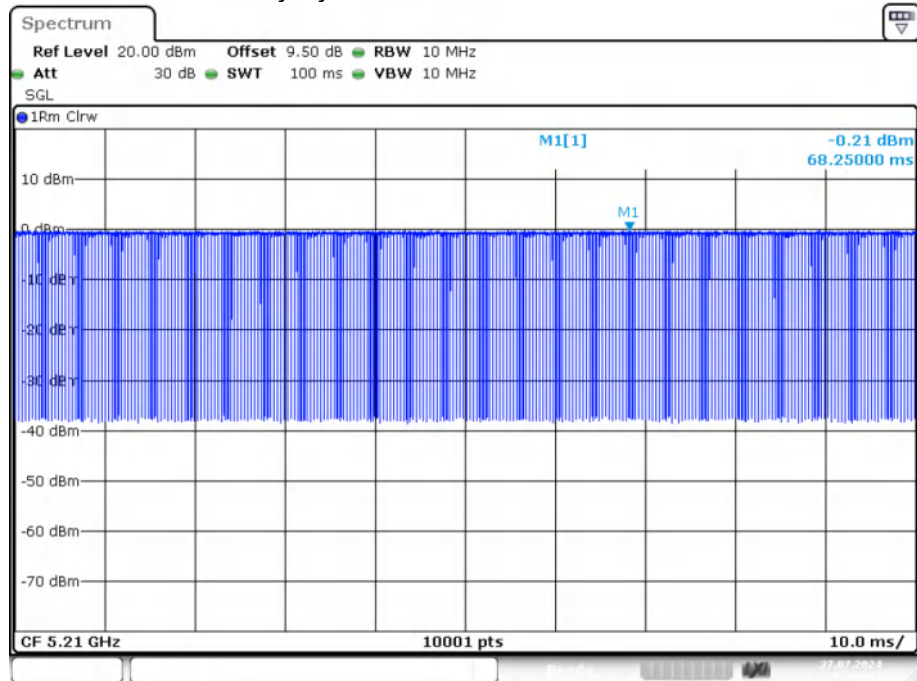


Date: 27.JUL.2024 17:55:40

Duty Cycle NVNT n20 5180MHz Ant1

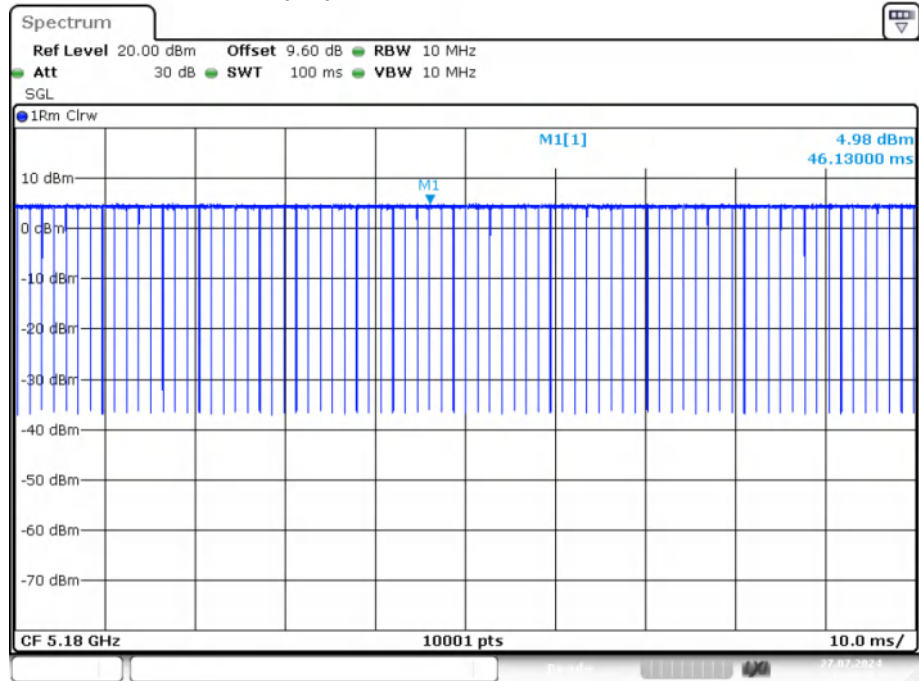


Date: 27.JUL.2024 15:52:01

Duty Cycle NVNT n20 5200MHz Ant1

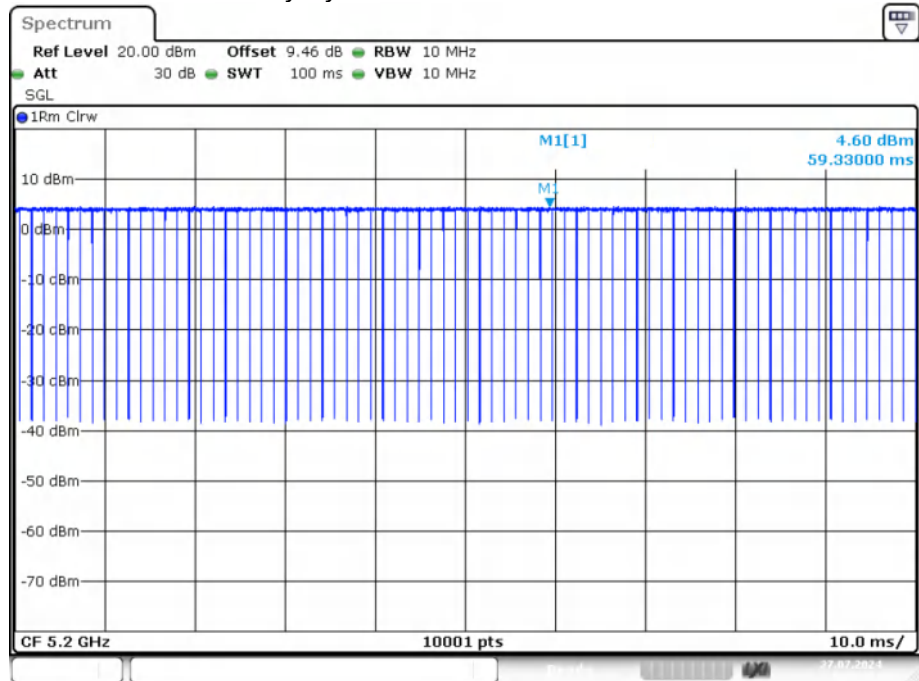


Date: 27.JUL.2024 16:00:11


Duty Cycle NVNT n20 5240MHz Ant1

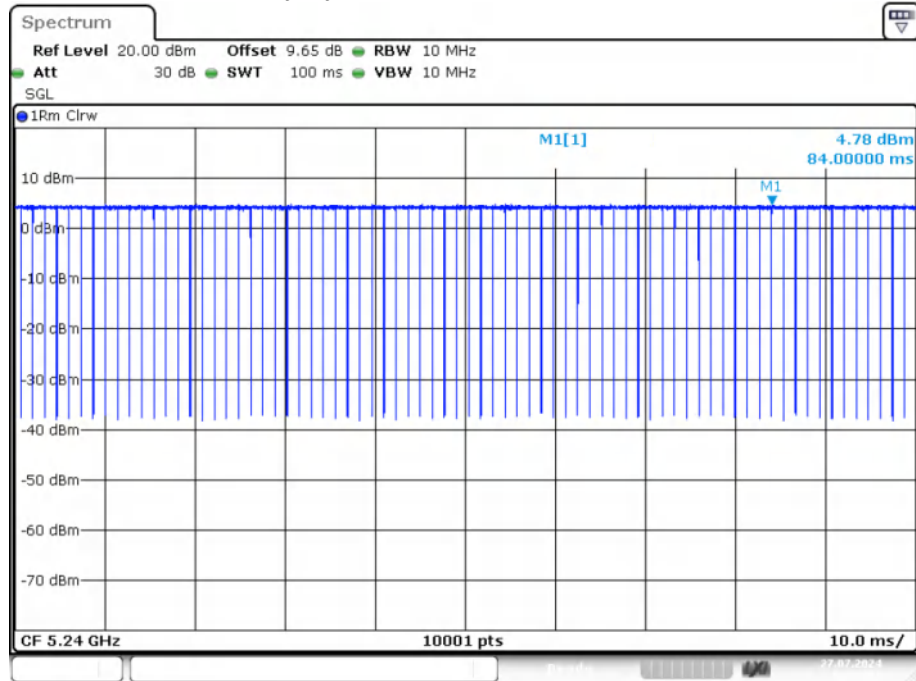

Duty Cycle NVNT n40 5190MHz Ant1

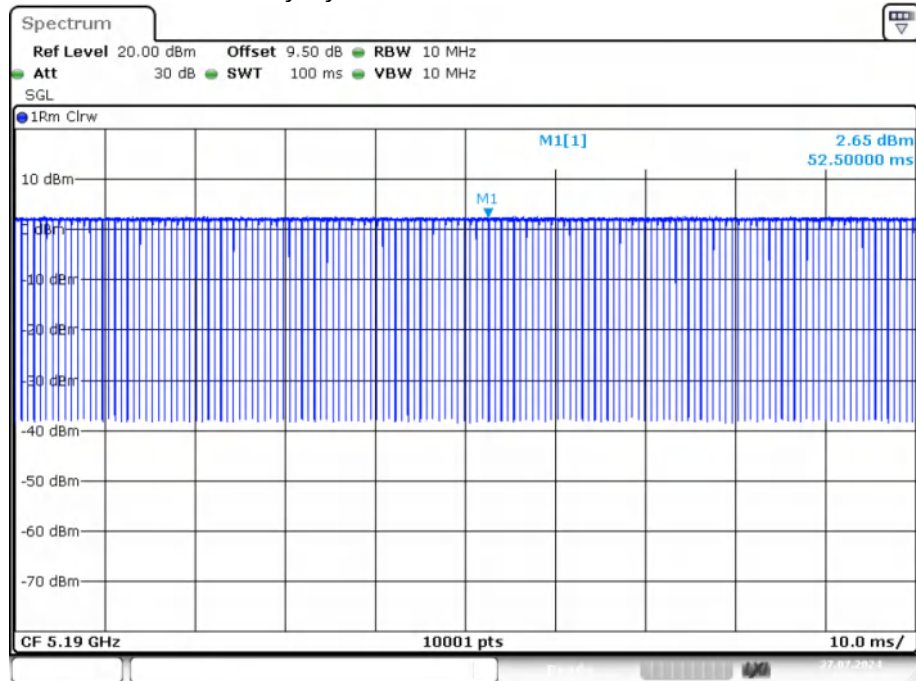

Duty Cycle NVNT n40 5230MHz Ant1

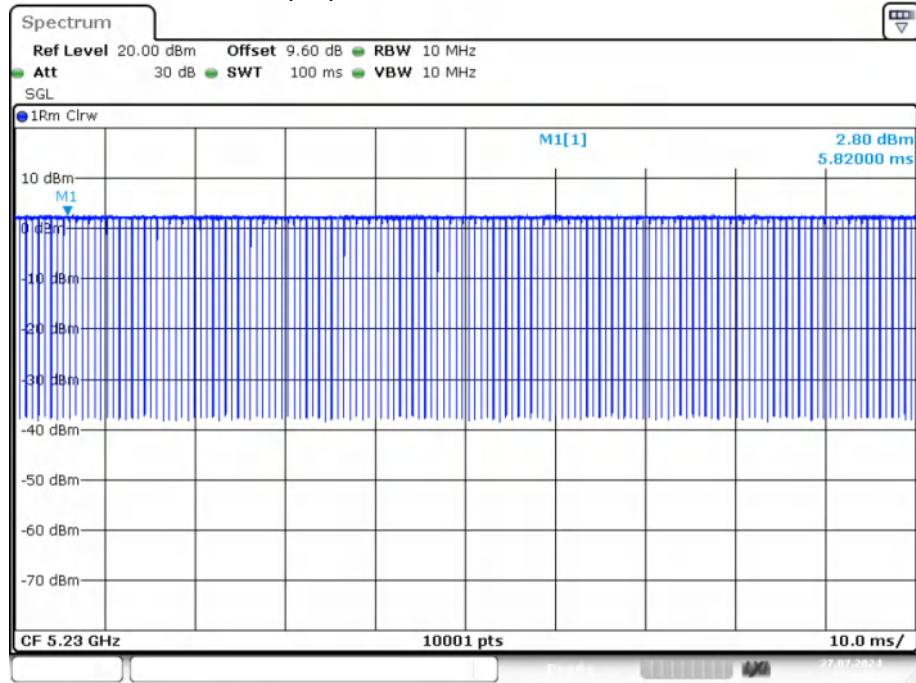

Date: 27.JUL.2024 17:27:04

Band 4 (5725 – 5850 MHz)


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted power (dBm)	FCC Limit (dBm)	IC Limit (dBm)	Verdict
NVNT	a	5745	Ant1	17.948	0.11	18.058	30	30	Pass
NVNT	a	5785	Ant1	14.711	0.11	14.821	30	30	Pass
NVNT	a	5825	Ant1	14.204	0.11	14.314	30	30	Pass
NVNT	ac20	5745	Ant1	14.517	0.11	14.627	30	30	Pass
NVNT	ac20	5785	Ant1	15.029	0.12	15.149	30	30	Pass
NVNT	ac20	5825	Ant1	14.706	0.12	14.826	30	30	Pass
NVNT	ac40	5755	Ant1	12.686	0.23	12.916	30	30	Pass
NVNT	ac40	5795	Ant1	15.311	0.23	15.541	30	30	Pass
NVNT	ac80	5775	Ant1	10.856	0.47	11.326	30	30	Pass
NVNT	n20	5745	Ant1	13.775	0.11	13.885	30	30	Pass
NVNT	n20	5785	Ant1	15.292	0.12	15.412	30	30	Pass
NVNT	n20	5825	Ant1	15.248	0.12	15.368	30	30	Pass
NVNT	n40	5755	Ant1	11.882	0.23	12.112	30	30	Pass
NVNT	n40	5795	Ant1	13.051	0.23	13.281	30	30	Pass

Total Conducted power(dBm)= Conducted Power (dBm)+ Duty Factor (dB)

Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5745	Ant1	97.53	0.11
NVNT	a	5785	Ant1	97.56	0.11
NVNT	a	5825	Ant1	97.52	0.11
NVNT	ac20	5745	Ant1	97.4	0.11
NVNT	ac20	5785	Ant1	97.38	0.12
NVNT	ac20	5825	Ant1	97.38	0.12
NVNT	ac40	5755	Ant1	94.91	0.23
NVNT	ac40	5795	Ant1	94.88	0.23
NVNT	ac80	5775	Ant1	89.76	0.47
NVNT	n20	5745	Ant1	97.41	0.11
NVNT	n20	5785	Ant1	97.37	0.12
NVNT	n20	5825	Ant1	97.37	0.12
NVNT	n40	5755	Ant1	94.85	0.23
NVNT	n40	5795	Ant1	94.9	0.23

Duty Cycle NVNT a 5745MHz Ant1

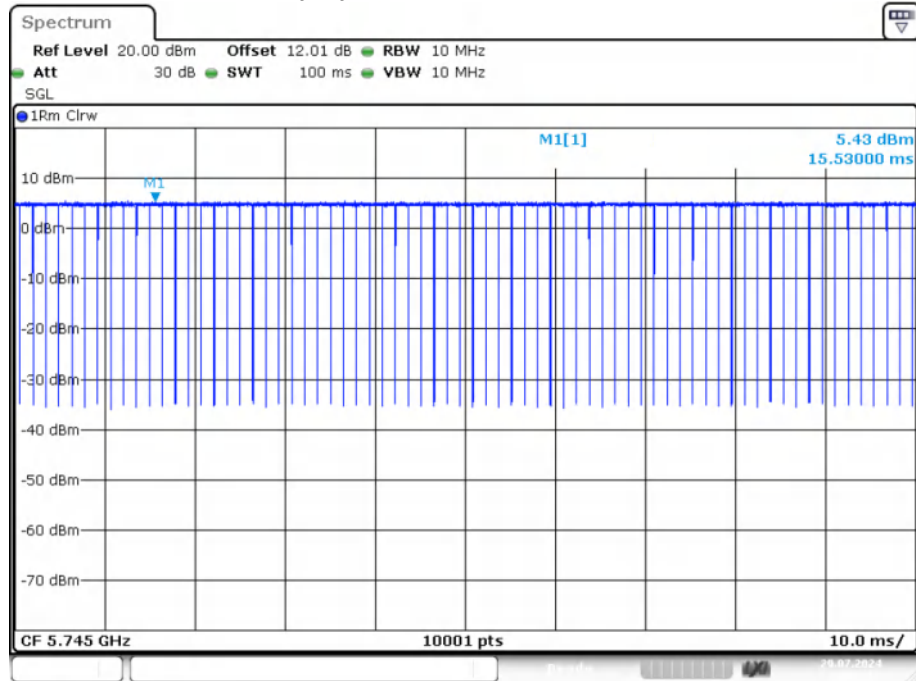


Date: 29.JUL.2024 11:22:53

Duty Cycle NVNT a 5785MHz Ant1

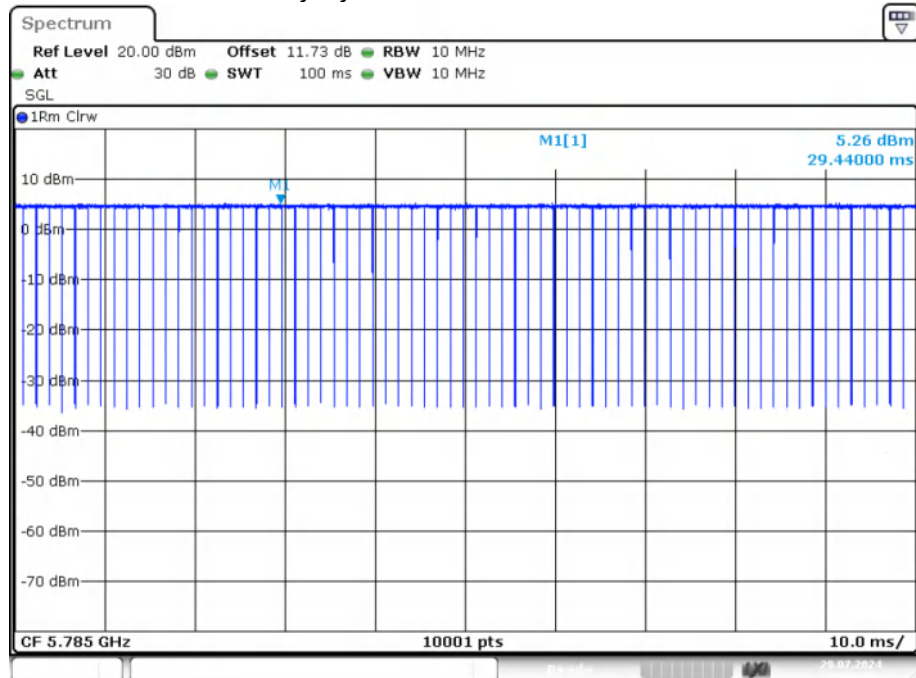


Date: 29.JUL.2024 11:26:48

Duty Cycle NVNT a 5825MHz Ant1

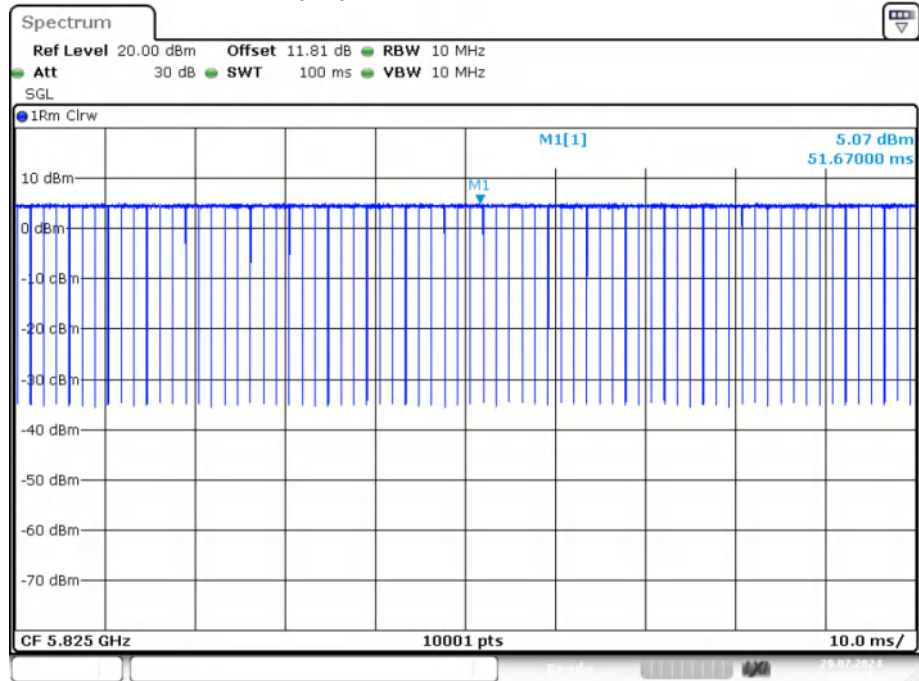

Date: 29.JUL.2024 11:28:59

Duty Cycle NVNT ac20 5745MHz Ant1

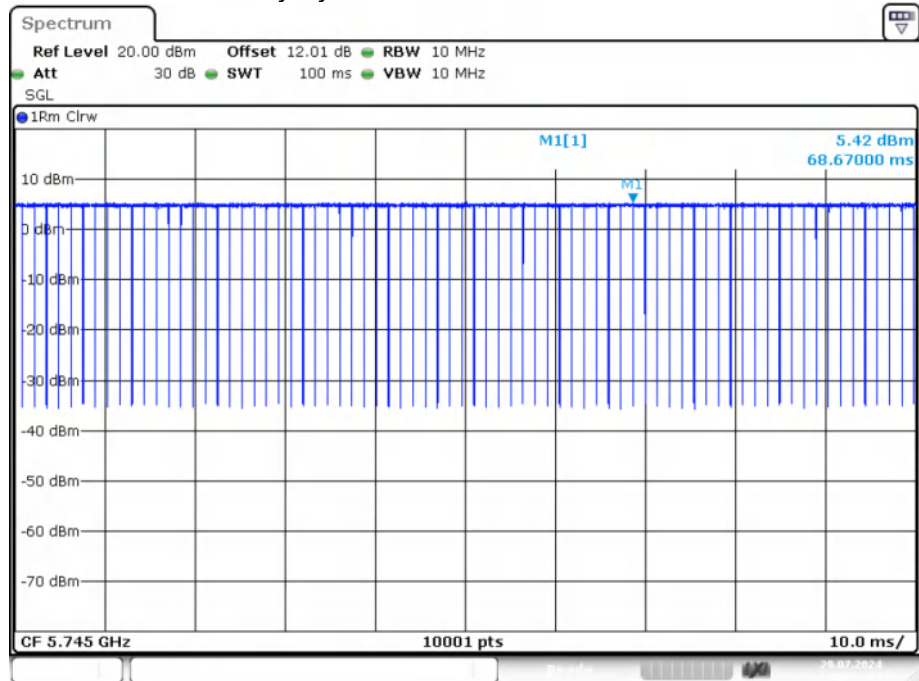

Date: 29.JUL.2024 11:40:12