

BT Ant Passive Test Report

Record for version modification

Date	Revision	Modify Content	Author
2023-3-21	V1.0	1 st Version	

Shenzhen SDMC Technology Co.,LTD

深圳市华曦达科技股份有限公司

Address: 19/F, Changhong Science & Technology Mansion, No.18, Keji South
12th Road, High-tech Industrial Park, Nanshan District, Shenzhen, China

Mobile: 0755-86018266

Website: www.sdmctech.com

Table of Contents

1 Test Summary 3

2 Test Information 3

3 Testing Environment 4

4 Matching Circuit Description 6

5 Antenna Technical Parameter 7

6 Assembly Description..... 8

7 Passive Parameter Test 9

8 Drawing 14

1 Test Summary


No.	Sample Name	Test item	Conclusion
1	DVXXXX	VSWR	Pass
2		Isolation	Pass
3		Efficiency & Gain	Pass
4		2D & 3D Radiation Pattern	Pass

2 Test Information

Model No.	DVXXXX
HW Version	MB.XXX.X
SW Version	BaseLine-v11.1.1.1
CPU	Amlogic XXXX
DDR	XXXXXXXXXX
Wi-Fi Module	XXXX/Manufacturer
Tester	XXX
Reviewer	XXX
Approver	XXX
Date	2023.XX.XX

3 Testing Environment

Chamber	XH Chamber
Wireless Communication Tester	R&S CMW500
Vector Network Analyzer	KEYSIGHT E5071C
Temperature	25±2°C
Humidity	50±20%Rh

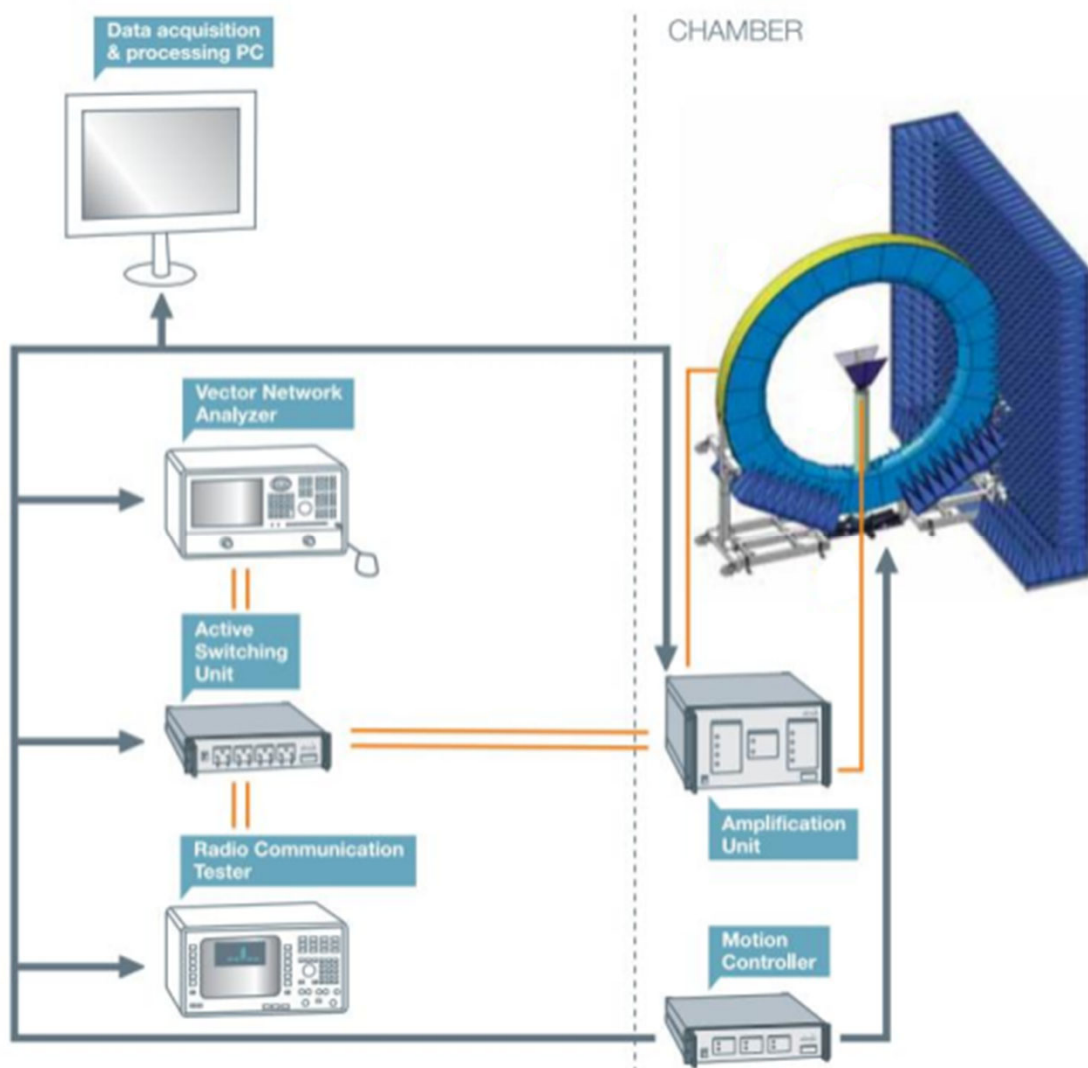




R&S CMW500

Wireless Communication Tester


- GSM/3G/4G
- Wi-Fi/ BT
- NB-IoT

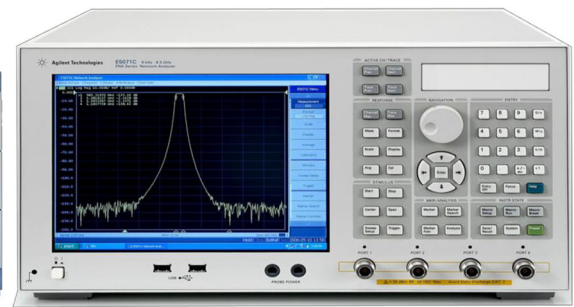


KEYSIGHT E5071C

Vector Network Analyzer


- Frequency: 100 kHz~8.5GHz

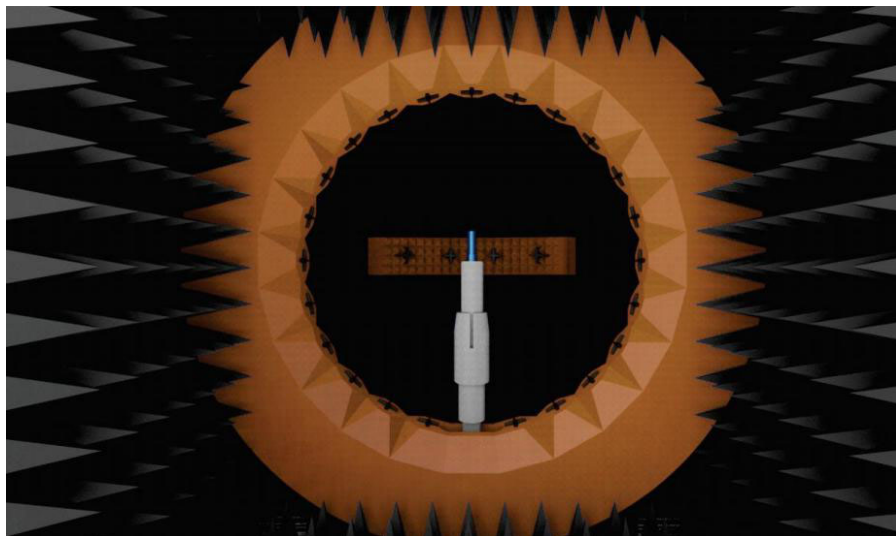


Coordinate system – Cylindrical geometry

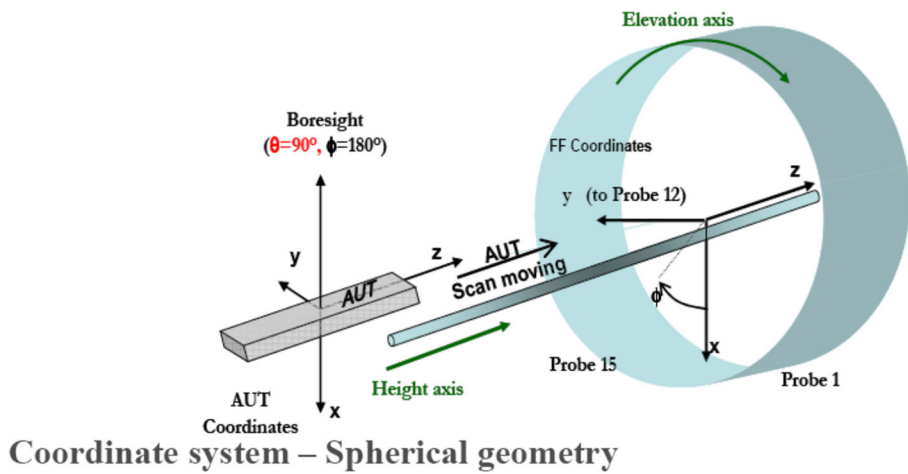

Coordinate system – Spherical geometry

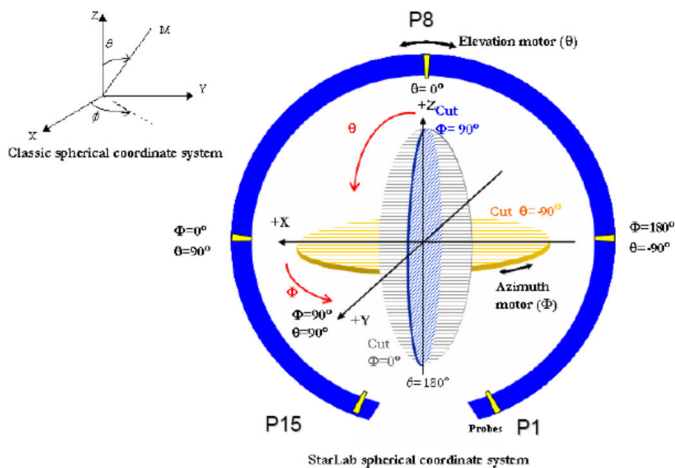

4 Matching Circuit Description

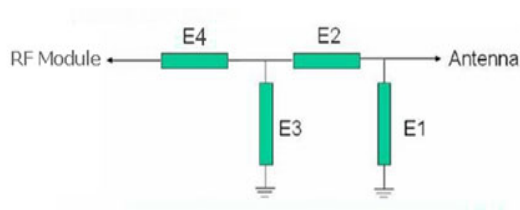


Element	Value
E1	N/A
E2	N/A
E3	N/A
E4	N/A

5 Antenna Technical Parameter

Electrical Technical Parameter				
Electrical Spec				
Frequency Range	2400 ~2500/5150~5850MHz			
VSWR	≤2.0			
	Remark: VSWR of ceramic & on-board layout Antenna≤3.0			
Input Impedance	50 Ω			
Direction	Omnidirectional			
Efficiency	≥50%			
	Remark: Efficiency of ceramic & on-board layout Antenna≥30%			
Gain	Wi-Fi≥0dBi			
	BT≥-1dBi			
Isolation	≤-15			
	Remark: Isolation of Dongle & Sticker similar products≤-10			
Mechanical Specifications				
Material Type	Metal ☐	FPC ☐	PCB ☐	Layout ☐
Working Temperature	-20℃~+70℃			
Working Humidity	20%~80%			


6 Assembly Description

Antenna Attachment Position

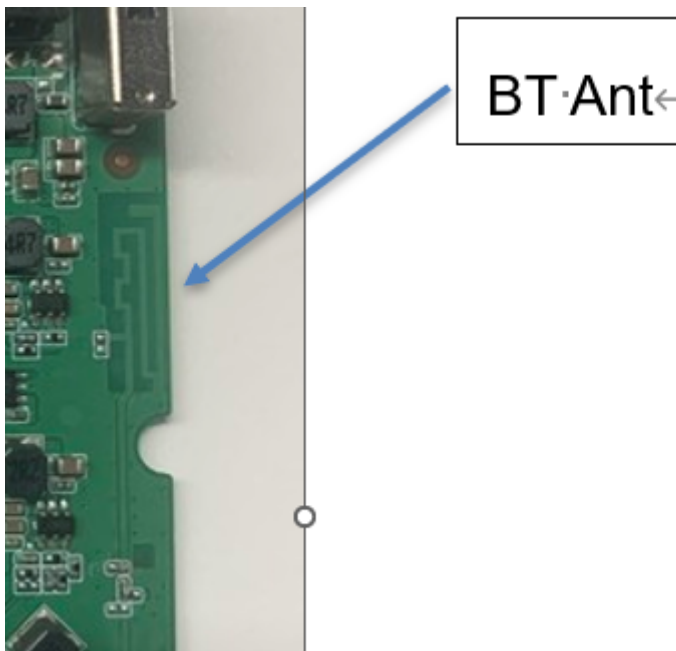

7 Passive Parameter Test

7.1 BT Ant

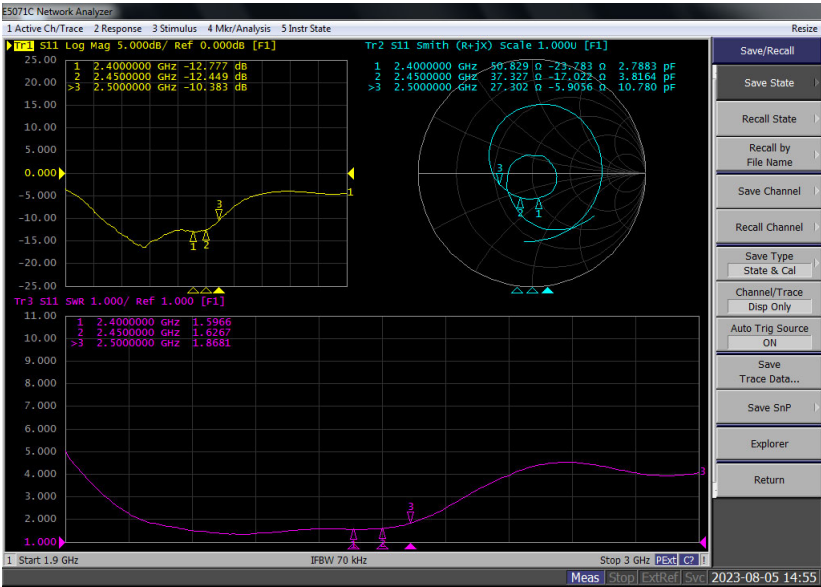


Freq/GHz	2.4	2.45	2.5
VSWR	1.5	1.6	1.8

7.2 Efficiency & Gain

Efficiency & Gain of BT Ant		
Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400	-0.16	36.64
2410	-0.07	36.22
2420	-0.09	35.65
2430	-0.6	34.43
2440	-0.03	34.51
2450	-0.51	33.88
2460	-0.41	33.04
2470	-0.75	31.92
2480	-0.21	31.41
2490	-0.64	30.2
2500	-1.24	30.11


7.3 Reference Coordinate System

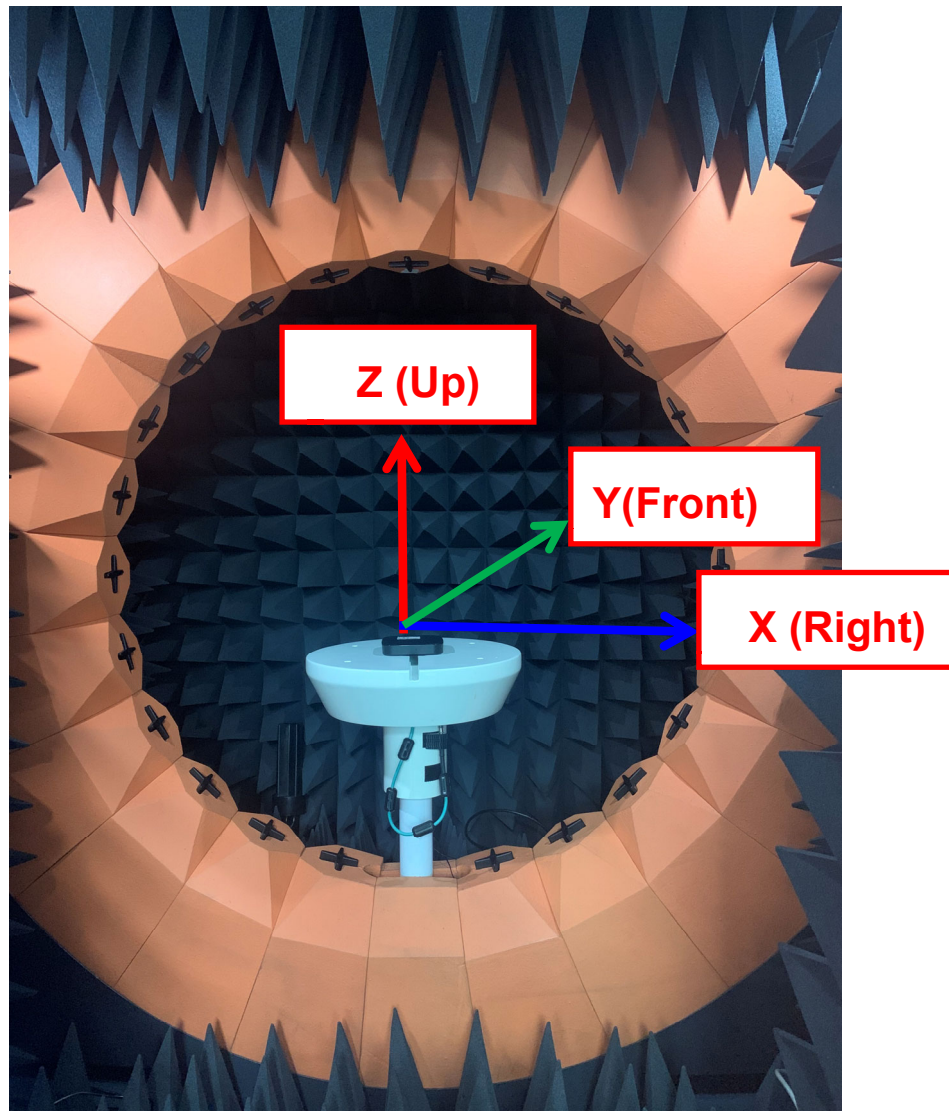

	XY	XZ	YZ
0°	Right	Up	Up
90°	Front	Right	Front
180°	Left	Down	Down
270°	Back	Left	Back

7.4 2D & 3D Radiation Pattern


7.4.1 BT Ant

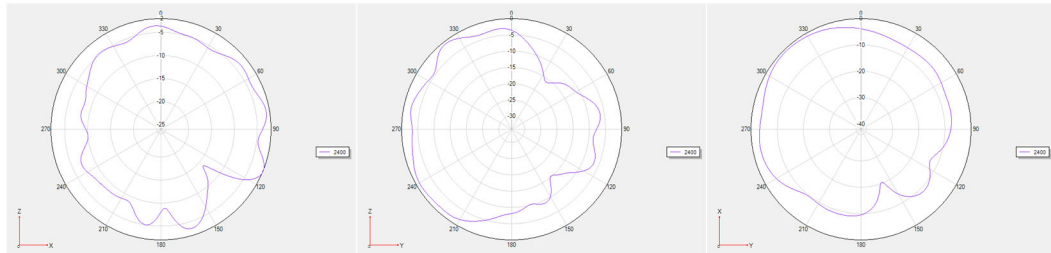

Phi =0 freq=2400MHz

Phi =90 freq=2400MHz


Theta =90 freq=2400MHz

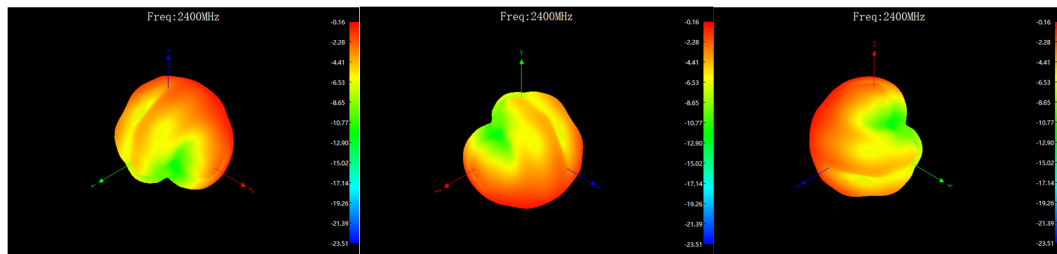

ZXY face @2400MHz

XYZ face @2400MHz


YZX face @2400MHz

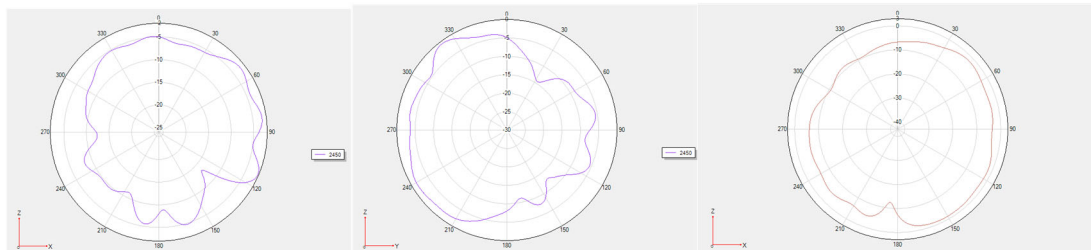

Phi =0 freq=2450MHz

Phi =90 freq=2450MHz


Theta =90 freq=2450MHz

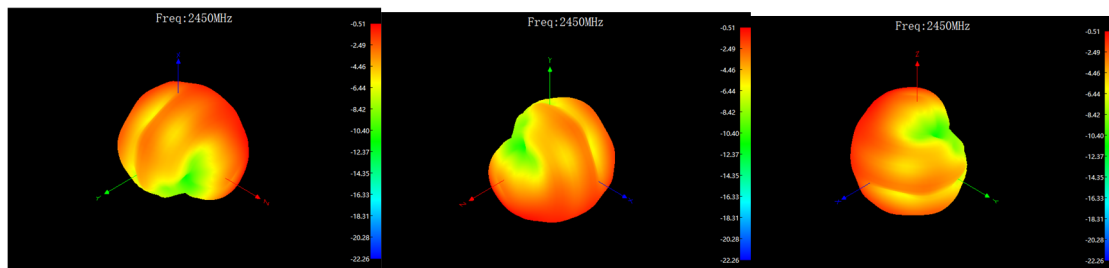


ZXY face @2450MHz

XYZ face @2450MHz


YZX face @2450MHz

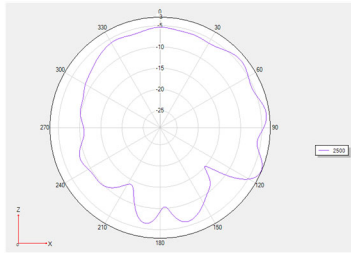


Phi =0 freq=2500MHz

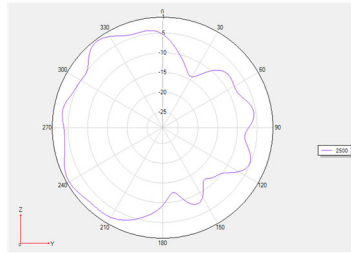


Phi =90 freq=2500MHz

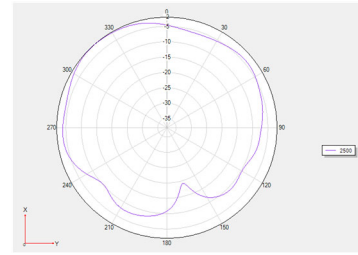


Theta =90 freq=2500MHz

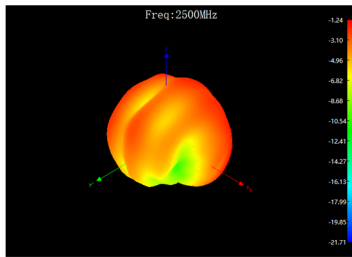

ZXY face @2500MHz

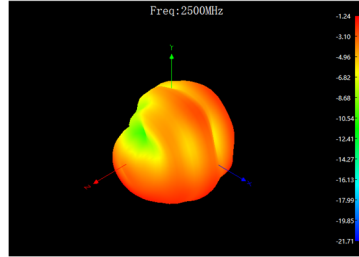

XYZ face @2500MHz

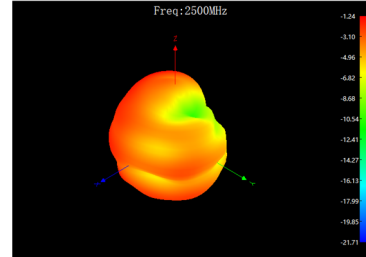

YZX face @2500MHz

8 Drawing

