



## FCC PART 24TEST REPORT Part 22H Subpart E

Report Reference No.....: HK2008072128-3E

FCC ID.....: 2AW7H-LS-BC4G

Compiled by

( position+printedname+signature) ... : File administrators Gary Qian

Supervised by

(position+printedname+signature) ... : Technique principal Eden Hu

Approved by

(position+printedname+signature) ... : Manager Jason Zhou

Date of issue .....: Aug. 20, 2020

Testing Laboratory Name .....: Shenzhen HUAK Testing Technology Co., Ltd.

Address.....: 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name .....: SHENZHEN LS VISION TECHNOLOGY LTD

Address.....: 6 Floor, Blg 7, LongBi Industrial Park, BanTian Street, LongGang District, Shenzhen, 518055, P.R. China

Test specification .....

Standard .....: FCC CFR Title 47 Part 2, Part 22H

TRF Originator.....: Shenzhen HUAK Testing Technology Co., Ltd.

**Shenzhen HUAK Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description .....: 4G body Camera

Trade Mark.....: LS VISION

Model/Type reference .....: LS-BC4G416

Listed Models .....: LS-BC4G2XX, LS-BC4G4XX, LS-BC4G5XX, LS-BC4G6XX

Ratings.....: DC 3.7V From Battery

Modulation .....: QPSK, 16QAM

GPRS .....: Supported

Hardware version.....: BC007\_S3Lm\_OV4689\_11

Software version .....: V1.3.24

Result .....: **PASS**



## TEST REPORT

<b>Test Report No. :</b>	HK2008072128-3E	Aug. 20, 2020 Date of issue
--------------------------	-----------------	--------------------------------

Equipment under Test : 4G body Camera

Model /Type : LS-BC4G416

Listed Models : LS-BC4G2XX, LS-BC4G4XX, LS-BC4G5XX, LS-BC4G6XX

**Applicant** : SHENZHEN LS VISION TECHNOLOGY LTD

Address : 6 Floor, Blg 7, LongBi Industrial Park, BanTian Street, LongGang District, Shenzhen, 518055, P.R. China

**Manufacturer** : SHENZHEN LS VISION TECHNOLOGY LTD

Address : 6 Floor, Blg 7, LongBi Industrial Park, BanTian Street, LongGang District, Shenzhen, 518055, P.R. China

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



## Revision History

Revision	Issue Date	Revisions	Revised By
V1.0	Aug. 20, 2020	Initial Issue	James Zhou



## Contents

<u>1</u>	<u>TEST STANDARDS</u>	<u>5</u>
<u>2</u>	<u>SUMMARY</u>	<u>6</u>
2.1	General Remarks	6
2.2	Product Description	6
2.3	Equipment under Test	6
2.4	Normal Accessory setting	6
2.5	EUT configuration	6
2.6	Related Submittal(s) / Grant (s)	7
2.7	Modifications	7
2.8	General Test Conditions/Configurations	7
<u>3</u>	<u>TEST ENVIRONMENT</u>	<u>8</u>
3.1	Address of the test laboratory	8
3.2	Environmental conditions	8
3.3	Test Description	8
3.4	Equipments Used during the Test	9
<u>4</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
4.1	Output Power	10
4.2	Peak-to-Average Ratio (PAR)	15
4.3	Occupied Bandwidth and Emission Bandwidth	20
4.4	Band Edge compliance	25
4.5	Spurious Emission on Antenna Port	30
4.6	Radiated Spurious Emission	43
4.7	Frequency Stability	49
<u>5</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>52</u>
<u>6</u>	<u>PHOTOS OF THE EUT</u>	<u>54</u>



## 1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[FCC Part 22 Subpart H](#): PRIVATE LAND MOBILE RADIO SERVICES.

[ANSI/TIA-603-E-2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015](#): IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[KDB971168 D01](#): v02r02 MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS



## 2 SUMMARY

### 2.1 General Remarks

Date of receipt of test sample	:	Jul. 29, 2020
Testing commenced on	:	Aug. 20, 2020
Testing concluded on	:	Aug. 20, 2020

### 2.2 Product Description

Product Name:	4G body Camera
Model/Type reference:	LS-BC4G416
Power supply:	DC 3.7V From Battery or DC 5V from Adapter
Adapter Information:	MODEL:XS12-050200U INPUT: 100-240VAC 50/60Hz 0.5A OUTPUT: 5V 2A
Modulation Type	QPSK,16QAM
Antenna Type:	Internal Antenna
Operation Frequency Band	LTE BAND 5
Operation frequency	LTE BAND 5:824~849 MHz
LTE Release	R8
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	3.4VDC to 4.2VDC (nominal: 3.70VDC)

### 2.3 Equipment under Test

#### Power supply system utilised

Power supply voltage	:	<input type="radio"/>	120V/ 60 Hz	<input type="radio"/>	115V/60Hz
		<input type="radio"/>	12 V DC	<input type="radio"/>	24 V DC
		<input checked="" type="radio"/>	Other (specified in blank below)		

DC 3.7V From Battery

### 2.4 Normal Accessory setting

Fully charged battery was used during the test.

### 2.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

<input type="radio"/>	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
<input type="radio"/>	Multimeter	Manufacturer :	/
		Model No. :	/



## 2.6 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AW7H-LS-BC4G** filing to comply with FCC Part 22H, Rules.

## 2.7 Modifications

No modifications were implemented to meet testing criteria.

## 2.8 General Test Conditions/Configurations

### Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.4V
	VN	3.7V
	VH	4.2V

NOTE: VL=lower extreme test voltage VN=nominal voltage

VH=upper extreme test voltage TN=normal temperature



### 3 TEST ENVIRONMENT

#### 3.1 Address of the test laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Address: 1F, B2 Building, Junfeng Zhongcheng Zhi Zhao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, China

#### 3.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 °C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

#### 3.3 Test Description

##### Band 5 (824~849 MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §2.913(a)(2)	EIRP ≤ 2W	Pass
Peak-Average Ratio	N/A	FCC: Limit ≤ 13dB	Pass
Modulation Characteristics	§2.1047	Digital modulation	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §2.917(b)	≤ -13dBm/1%*EBW, In 1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §2.917(b)	≤ -13dBm/1MHz, from 9kHz to 10th harmonics but outside authorized Operating frequency ranges.	Pass
Field Strength of Spurious Radiation	Clause 7 of KDB971168 D01 v02r02	≤ -13dBm/1MHz.	Pass
Frequency Stability	§2.1055, §22.355,	FCC: within authorized frequency block.	Pass

NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

Remark:

1. The measurement uncertainty is not included in the test result.



### 3.4 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	HKE-059	2019/12/26	2020/12/25
LISN	R&S	ENV216	HKE-002	2019/12/26	2020/12/25
Receiver	R&S	ESCI 7	HKE-010	2019/12/26	2020/12/25
Spectrum analyzer	R&S	FSP40	HKE-025	2019/12/26	2020/12/25
Spectrum analyzer	Agilent	N9020A	HKE-048	2019/12/26	2020/12/25
RF automatic control unit	Tonscend	JS0806-1	HKE-060	2019/12/26	2020/12/25
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	2019/12/26	2020/12/25
Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	2019/12/26	2020/12/25
Horn antenna	Schwarzbeck	9120D	HKE-013	2019/12/26	2020/12/25
High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	2019/12/26	2020/12/25
Preamplifier	EMCI	EMC051845SE	HKE-015	2019/12/26	2020/12/25
Preamplifier	Agilent	83051A	HKE-016	2019/12/26	2020/12/25
Preamplifier	Schwarzbeck	BBV 9743	HKE-006	2019/12/26	2020/12/25
Temperature and humidity meter	Boyang	HTC-1	HKE-075	2019/12/26	2020/12/25
High-low temperature chamber	Guangke	HT-80L	HKE-118	2019/12/26	2020/12/25
High pass filter unit	Tonscend	JS0806-F	HKE-055	2019/12/26	2020/12/25
RF Cable(below1GHz)	Times	9kHz-1GHz	HKE-117	2019/12/26	2020/12/25
RF Cable(above 1GHz)	Times	1-40G	HKE-034	2019/12/26	2020/12/25
Power meter	Agilent	E4419B	HKE-085	2019/12/26	2020/12/25
Power Sensor	Agilent	E9300A	HKE-086	2019/12/26	2020/12/25
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A	N/A
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A	N/A
RF test software	Tonscend	JS1120-B Version 2.6	HKE-083	N/A	N/A
RF test software	Tonscend	JS1120-4	HKE-113	N/A	N/A
RF test software	Tonscend	JS1120-3	HKE-114	N/A	N/A
RF test software	Tonscend	JS1120-1	HKE-115	N/A	N/A
Wireless Communication Test Set	R&S	CMW500	HKE-026	2019/12/26	2020/12/25
Wireless Communication Test Set	R&S	CMU200	HKE-029	2019/12/26	2020/12/25

## 4 TEST CONDITIONS AND RESULTS


### 4.1 Output Power

#### 4.1.1 Conducted Output Power

##### TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

##### TEST CONFIGURATION

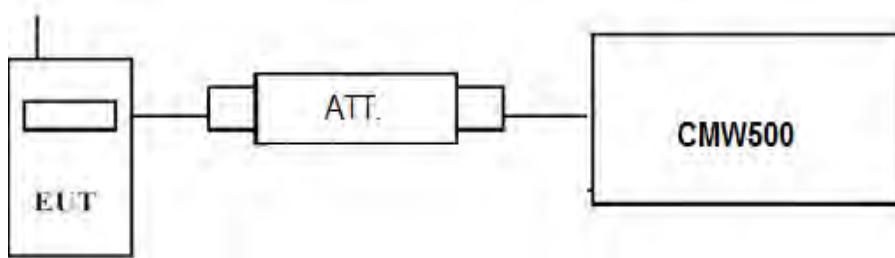

##### TEST PROCEDURE

###### **Conducted Power Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

##### TEST RESULTS

###### *Remark:*

We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; LTE FDD Band 5

TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Burst Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	824.7	1	23.14	22.28
		1	23.20	22.38
		1	23.03	22.21
		3	23.13	22.21
		3	23.18	22.17
		3	23.11	22.13
		6	22.20	21.14
	836.5	1	21.60	20.97
		1	21.72	21.10
		1	21.58	20.91
		3	21.64	20.59
		3	21.63	20.61
		3	21.60	20.58
		6	20.65	19.59
3 MHz	848.3	1	22.34	21.54
		1	22.65	21.72
		1	22.46	21.69
		3	22.41	21.43
		3	22.51	21.50
		3	22.51	21.52
	825.5	6	21.51	20.58
		1	23.14	22.39
		1	23.14	22.39
		1	23.14	22.39



5 MHz		836.5	1	23.25	22.45
			1	22.84	22.08
			8	22.13	21.16
			8	22.06	21.12
			8	21.94	21.01
			15	21.98	20.96
		847.5	1	21.68	20.94
			1	21.80	21.15
			1	21.58	20.81
			8	20.68	19.71
			8	20.65	19.75
10 MHz		826.5	8	20.62	19.65
			15	20.60	19.57
			1	22.20	21.48
			1	22.60	21.91
			1	22.53	21.87
			8	21.34	20.30
		836.5	8	21.46	20.40
			8	21.43	20.40
			15	21.32	20.28
			1	23.06	22.36
		846.5	1	23.06	22.41
			1	22.47	21.71
			12	22.00	21.08
			12	21.94	21.04
			12	21.76	20.84
			25	21.83	20.86
		829.0	1	21.70	21.04
			1	21.90	21.19
			1	21.46	20.79
			12	20.72	19.81
			12	20.67	19.78
		836.5	12	20.64	19.67
			25	20.69	19.71
			1	21.91	20.87
			1	22.54	21.60
			1	22.44	21.45
		844.0	12	21.11	20.04
			12	21.24	20.23
			12	21.32	20.30
			25	21.18	20.19
			1	23.11	22.37


#### 4.1.2. Radiated Output Power

##### LIMIT

This is the test for the maximum radiated power from the EUT.

Rule Part 22H.232(b) specifies, "Mobile/portable stations are limited to 7 watts e.i.r.p.

##### TEST CONFIGURATION

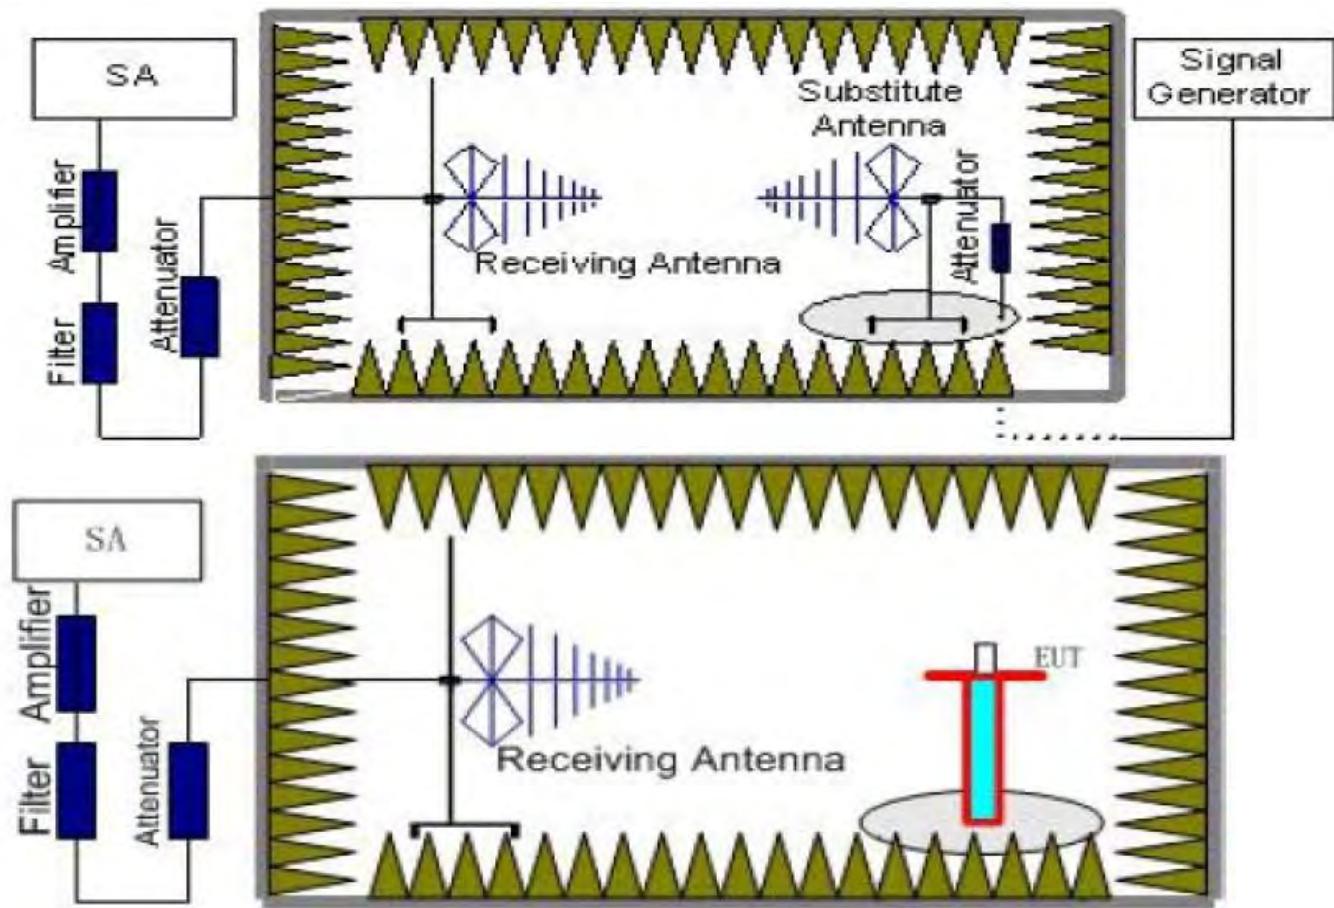

##### TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as ( $P_r$ ).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver



reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:  $Power(EIRP)=P_{Mea} - P_{Ag} - P_{cl} + G_a$

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:

$Power(EIRP)=P_{Mea} - P_{cl} + G_a$

6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

7. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

## TEST RESULTS

### Radiated Measurement:

#### Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.
2.  $EIRP = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
3. We measured both Horizontal and Vertical direction, recorded worst case direction.

#### LTE FDD Band 5\_Channel Bandwidth 1.4MHz\_QPSK

Frequency (MHz)	$P_{Mea}$ (dBm)	$P_{cl}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{Ag}$ (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-23.74	3.41	10.24	33.6	16.69	33.01	16.32	V
836.5	-21.91	3.49	10.24	33.6	18.44	33.01	14.57	V
848.3	-25.05	3.55	10.23	33.6	15.23	33.01	17.78	V

#### LTE FDD Band 5\_Channel Bandwidth 3MHz\_QPSK

Frequency (MHz)	$P_{Mea}$ (dBm)	$P_{cl}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{Ag}$ (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-20.78	3.41	10.24	33.6	19.65	33.01	13.36	V
836.5	-18.67	3.49	10.24	33.6	21.68	33.01	11.33	V
847.5	-22.41	3.55	10.23	33.6	17.87	33.01	15.14	V

#### LTE FDD Band 5\_Channel Bandwidth 5MHz\_QPSK

Frequency (MHz)	$P_{Mea}$ (dBm)	$P_{cl}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{Ag}$ (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-21.73	3.41	10.24	33.6	18.70	33.01	14.31	V
836.5	-23.40	3.49	10.24	33.6	16.95	33.01	16.06	V
846.5	-23.07	3.55	10.23	33.6	17.21	33.01	15.80	V

#### LTE FDD Band 5\_Channel Bandwidth 10MHz\_QPSK

Frequency (MHz)	$P_{Mea}$ (dBm)	$P_{cl}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{Ag}$ (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.0	-20.94	3.41	10.24	33.6	19.49	33.01	13.52	V
836.5	-25.38	3.49	10.24	33.6	14.97	33.01	18.04	V
844.0	-24.56	3.55	10.23	33.6	15.72	33.01	17.29	V

*LTE FDD Band 5\_Channel Bandwidth 1.4MHz\_16QAM*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Aq</sub> (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-19.59	3.41	10.24	33.6	20.84	33.01	12.17	V
836.5	-18.69	3.49	10.24	33.6	21.66	33.01	11.35	V
848.3	-22.86	3.55	10.23	33.6	17.42	33.01	15.59	V

*LTE FDD Band 5\_Channel Bandwidth 3MHz\_16QAM*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Aq</sub> (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-20.87	3.41	10.24	33.6	19.56	33.01	13.45	V
836.5	-23.46	3.49	10.24	33.6	16.89	33.01	16.12	V
847.5	-21.19	3.55	10.23	33.6	19.09	33.01	13.92	V

*LTE FDD Band 5\_Channel Bandwidth 5MHz\_16QAM*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Aq</sub> (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-19.50	3.41	10.24	33.6	20.93	33.01	12.08	V
836.5	-20.58	3.49	10.24	33.6	19.77	33.01	13.24	V
846.5	-24.83	3.55	10.23	33.6	15.45	33.01	17.56	V

*LTE FDD Band 5\_Channel Bandwidth 10MHz\_16QAM*


Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Aq</sub> (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.0	-18.98	3.41	10.24	33.6	21.45	33.01	11.56	V
836.5	-20.48	3.49	10.24	33.6	19.87	33.01	13.14	V
844.0	-22.52	3.55	10.23	33.6	17.76	33.01	15.25	V

## 4.2 Peak-to-Average Ratio (PAR)

### LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

### TEST CONFIGURATION

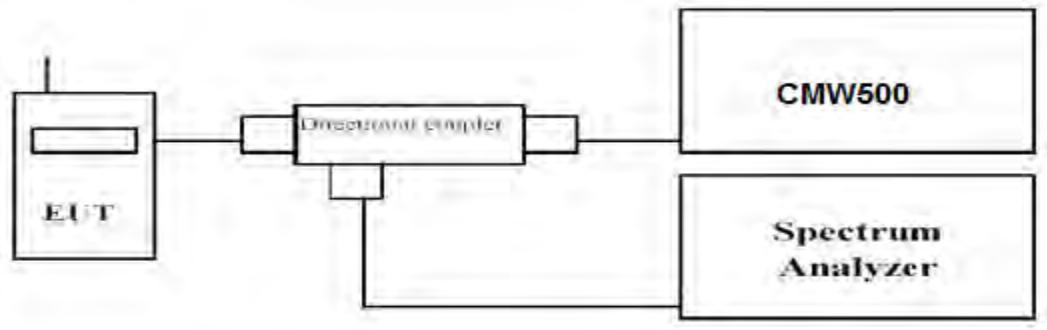

### TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms,
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

### TEST RESULTS





#### *Remark:*

1. *We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.*


LTE FDD Band 5				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	0.1%PAPR(dB)	
			QPSK	16QAM
1.4 MHz	824.7	1RB#0	4.11	4.09
	836.5		2.56	2.52
	848.3		2.61	2.62
3 MHz	825.5	1RB#0	3.42	2.95
	836.5		2.70	2.75
	847.5		2.70	2.74
5 MHz	826.5	1RB#0	2.95	2.88
	836.5		2.96	3.10
	846.5		2.93	2.91
10 MHz	829.0	1RB#0	3.34	3.49
	836.5		3.39	3.38
	844.0		3.48	3.49



LTE FDD Band 5– 1.4 MHz Channel BandwidthPAPR

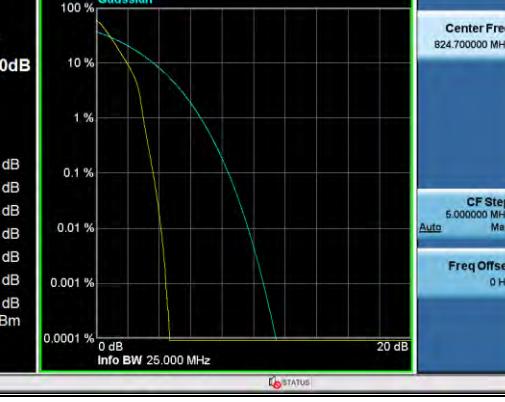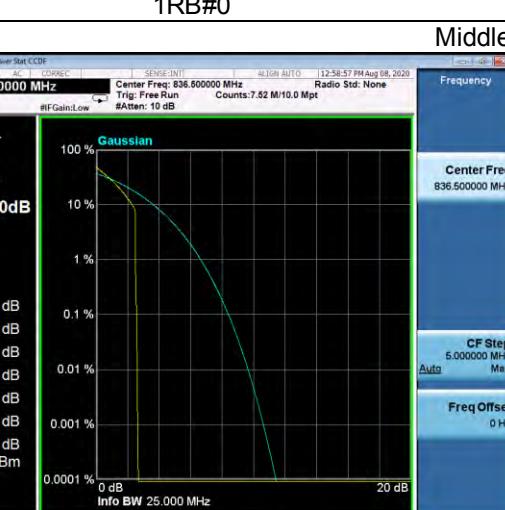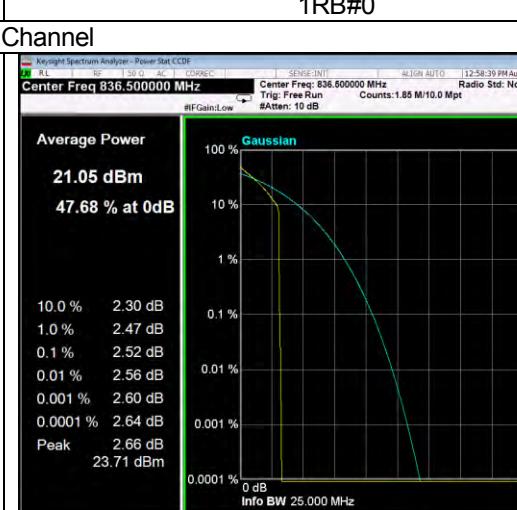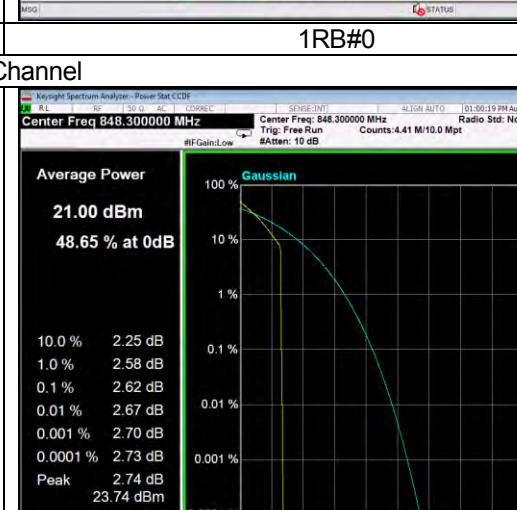QPSK	16QAM																																
Low Channel																																	
 <p>Center Freq 824.700000 MHz</p> <p>Average Power 21.68 dBm 59.16 % at 0dB</p> <table border="1" style="margin-left: 20px; border-collapse: collapse;"> <tr><td>10.0 %</td><td>1.95 dB</td></tr> <tr><td>1.0 %</td><td>3.00 dB</td></tr> <tr><td>0.1 %</td><td>3.61 dB</td></tr> <tr><td>0.01 %</td><td>4.11 dB</td></tr> <tr><td>0.001 %</td><td>4.43 dB</td></tr> <tr><td>0.0001 %</td><td>4.67 dB</td></tr> <tr><td>Peak</td><td>4.73 dB</td></tr> <tr><td></td><td>26.41 dBm</td></tr> </table>	10.0 %	1.95 dB	1.0 %	3.00 dB	0.1 %	3.61 dB	0.01 %	4.11 dB	0.001 %	4.43 dB	0.0001 %	4.67 dB	Peak	4.73 dB		26.41 dBm	 <p>Center Freq 824.700000 MHz</p> <p>Average Power 21.61 dBm 59.50 % at 0dB</p> <table border="1" style="margin-left: 20px; border-collapse: collapse;"> <tr><td>10.0 %</td><td>1.95 dB</td></tr> <tr><td>1.0 %</td><td>3.03 dB</td></tr> <tr><td>0.1 %</td><td>3.61 dB</td></tr> <tr><td>0.01 %</td><td>4.09 dB</td></tr> <tr><td>0.001 %</td><td>4.39 dB</td></tr> <tr><td>0.0001 %</td><td>4.61 dB</td></tr> <tr><td>Peak</td><td>4.71 dB</td></tr> <tr><td></td><td>26.32 dBm</td></tr> </table>	10.0 %	1.95 dB	1.0 %	3.03 dB	0.1 %	3.61 dB	0.01 %	4.09 dB	0.001 %	4.39 dB	0.0001 %	4.61 dB	Peak	4.71 dB		26.32 dBm
10.0 %	1.95 dB																																
1.0 %	3.00 dB																																
0.1 %	3.61 dB																																
0.01 %	4.11 dB																																
0.001 %	4.43 dB																																
0.0001 %	4.67 dB																																
Peak	4.73 dB																																
	26.41 dBm																																
10.0 %	1.95 dB																																
1.0 %	3.03 dB																																
0.1 %	3.61 dB																																
0.01 %	4.09 dB																																
0.001 %	4.39 dB																																
0.0001 %	4.61 dB																																
Peak	4.71 dB																																
	26.32 dBm																																
1RB#0	1RB#0																																
Middle Channel																																	
 <p>Center Freq 836.500000 MHz</p> <p>Average Power 21.01 dBm 48.06 % at 0dB</p> <table border="1" style="margin-left: 20px; border-collapse: collapse;"> <tr><td>10.0 %</td><td>2.28 dB</td></tr> <tr><td>1.0 %</td><td>2.51 dB</td></tr> <tr><td>0.1 %</td><td>2.56 dB</td></tr> <tr><td>0.01 %</td><td>2.60 dB</td></tr> <tr><td>0.001 %</td><td>2.63 dB</td></tr> <tr><td>0.0001 %</td><td>2.67 dB</td></tr> <tr><td>Peak</td><td>2.72 dB</td></tr> <tr><td></td><td>23.73 dBm</td></tr> </table>	10.0 %	2.28 dB	1.0 %	2.51 dB	0.1 %	2.56 dB	0.01 %	2.60 dB	0.001 %	2.63 dB	0.0001 %	2.67 dB	Peak	2.72 dB		23.73 dBm	 <p>Center Freq 836.500000 MHz</p> <p>Average Power 21.05 dBm 47.68 % at 0dB</p> <table border="1" style="margin-left: 20px; border-collapse: collapse;"> <tr><td>10.0 %</td><td>2.30 dB</td></tr> <tr><td>1.0 %</td><td>2.47 dB</td></tr> <tr><td>0.1 %</td><td>2.52 dB</td></tr> <tr><td>0.01 %</td><td>2.56 dB</td></tr> <tr><td>0.001 %</td><td>2.60 dB</td></tr> <tr><td>0.0001 %</td><td>2.64 dB</td></tr> <tr><td>Peak</td><td>2.66 dB</td></tr> <tr><td></td><td>23.71 dBm</td></tr> </table>	10.0 %	2.30 dB	1.0 %	2.47 dB	0.1 %	2.52 dB	0.01 %	2.56 dB	0.001 %	2.60 dB	0.0001 %	2.64 dB	Peak	2.66 dB		23.71 dBm
10.0 %	2.28 dB																																
1.0 %	2.51 dB																																
0.1 %	2.56 dB																																
0.01 %	2.60 dB																																
0.001 %	2.63 dB																																
0.0001 %	2.67 dB																																
Peak	2.72 dB																																
	23.73 dBm																																
10.0 %	2.30 dB																																
1.0 %	2.47 dB																																
0.1 %	2.52 dB																																
0.01 %	2.56 dB																																
0.001 %	2.60 dB																																
0.0001 %	2.64 dB																																
Peak	2.66 dB																																
	23.71 dBm																																
1RB#0	1RB#0																																
High Channel																																	
 <p>Center Freq 848.300000 MHz</p> <p>Average Power 21.01 dBm 48.54 % at 0dB</p> <table border="1" style="margin-left: 20px; border-collapse: collapse;"> <tr><td>10.0 %</td><td>2.25 dB</td></tr> <tr><td>1.0 %</td><td>2.57 dB</td></tr> <tr><td>0.1 %</td><td>2.61 dB</td></tr> <tr><td>0.01 %</td><td>2.66 dB</td></tr> <tr><td>0.001 %</td><td>2.69 dB</td></tr> <tr><td>0.0001 %</td><td>2.72 dB</td></tr> <tr><td>Peak</td><td>2.75 dB</td></tr> <tr><td></td><td>23.76 dBm</td></tr> </table>	10.0 %	2.25 dB	1.0 %	2.57 dB	0.1 %	2.61 dB	0.01 %	2.66 dB	0.001 %	2.69 dB	0.0001 %	2.72 dB	Peak	2.75 dB		23.76 dBm	 <p>Center Freq 848.300000 MHz</p> <p>Average Power 21.00 dBm 48.65 % at 0dB</p> <table border="1" style="margin-left: 20px; border-collapse: collapse;"> <tr><td>10.0 %</td><td>2.25 dB</td></tr> <tr><td>1.0 %</td><td>2.58 dB</td></tr> <tr><td>0.1 %</td><td>2.62 dB</td></tr> <tr><td>0.01 %</td><td>2.67 dB</td></tr> <tr><td>0.001 %</td><td>2.70 dB</td></tr> <tr><td>0.0001 %</td><td>2.73 dB</td></tr> <tr><td>Peak</td><td>2.74 dB</td></tr> <tr><td></td><td>23.74 dBm</td></tr> </table>	10.0 %	2.25 dB	1.0 %	2.58 dB	0.1 %	2.62 dB	0.01 %	2.67 dB	0.001 %	2.70 dB	0.0001 %	2.73 dB	Peak	2.74 dB		23.74 dBm
10.0 %	2.25 dB																																
1.0 %	2.57 dB																																
0.1 %	2.61 dB																																
0.01 %	2.66 dB																																
0.001 %	2.69 dB																																
0.0001 %	2.72 dB																																
Peak	2.75 dB																																
	23.76 dBm																																
10.0 %	2.25 dB																																
1.0 %	2.58 dB																																
0.1 %	2.62 dB																																
0.01 %	2.67 dB																																
0.001 %	2.70 dB																																
0.0001 %	2.73 dB																																
Peak	2.74 dB																																
	23.74 dBm																																
1RB#0	1RB#0																																



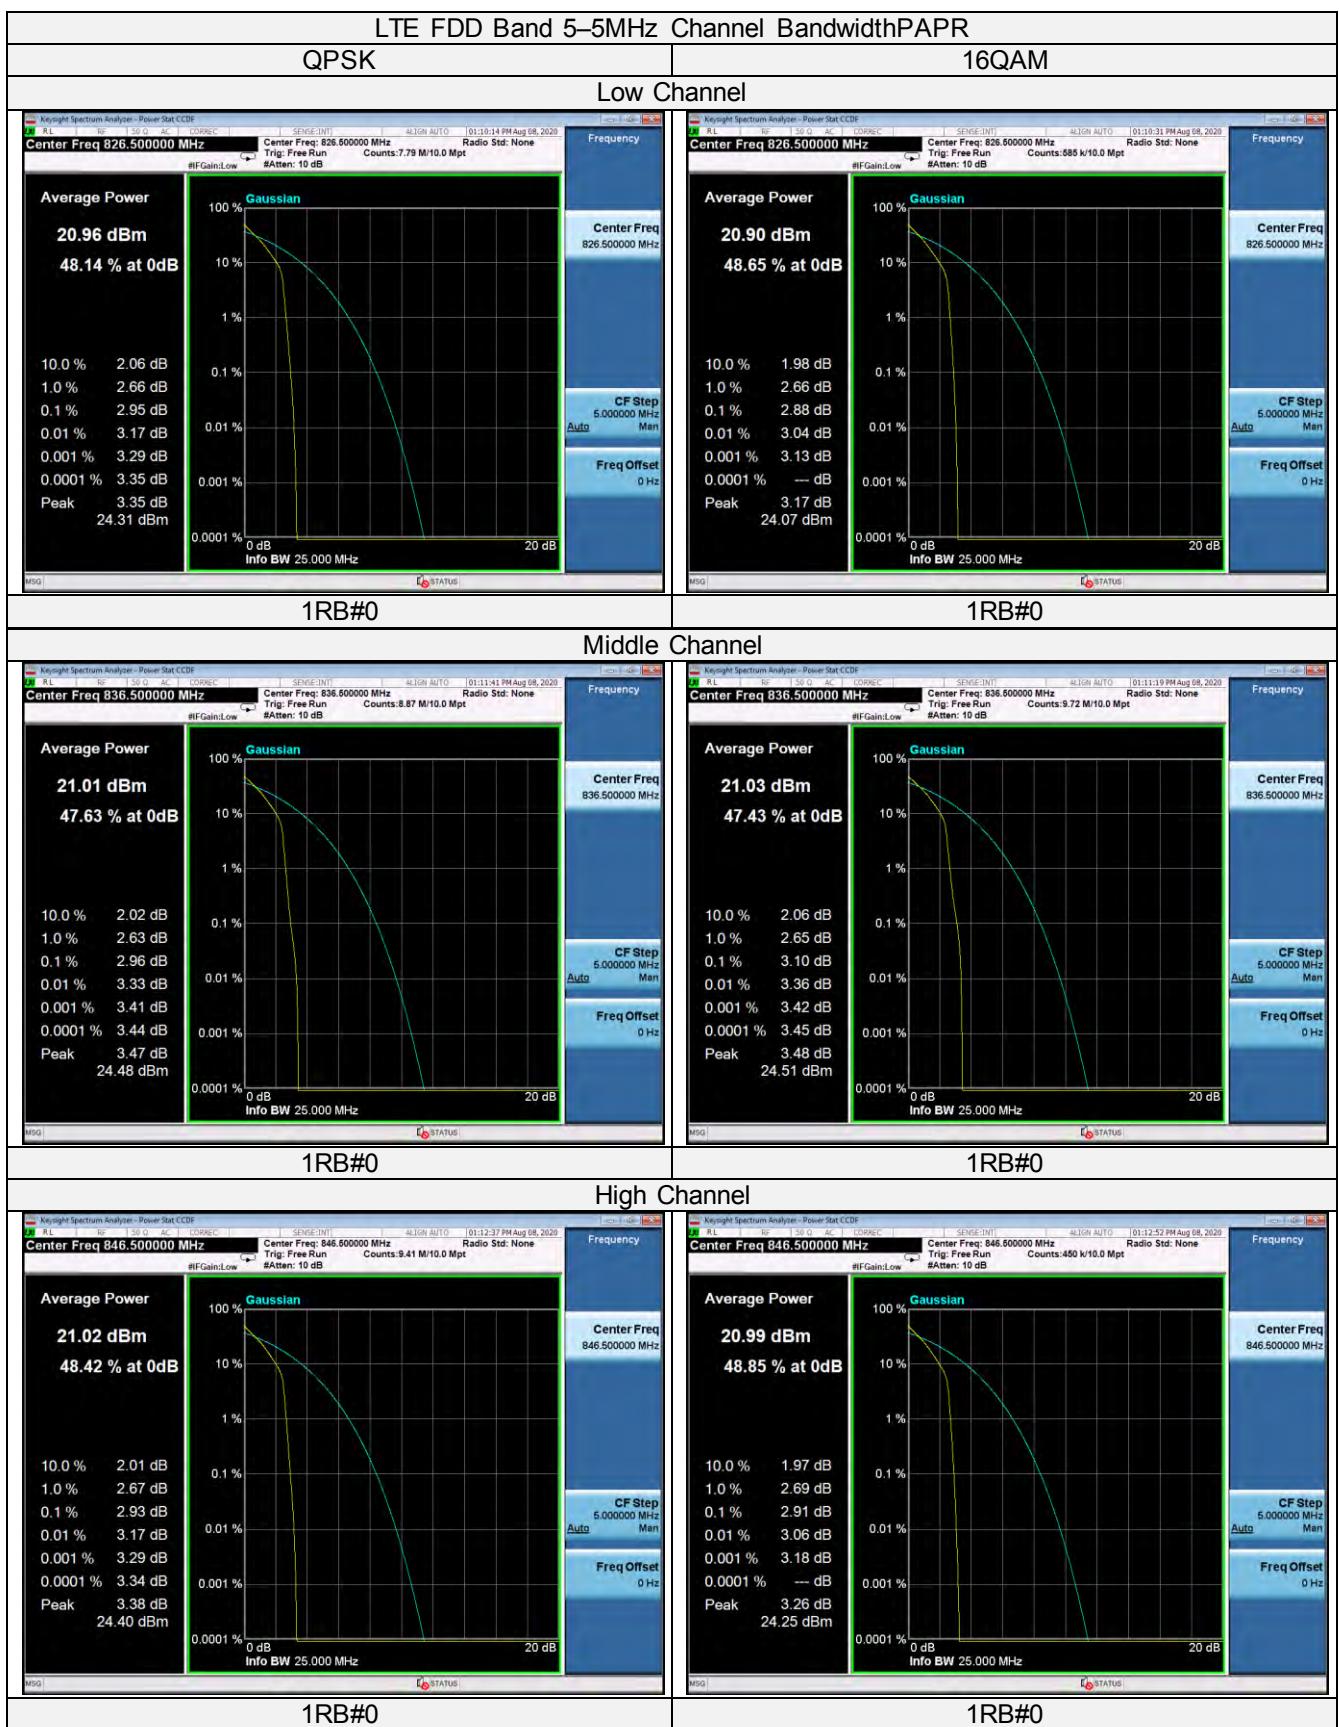




### 4.3 Occupied Bandwidth and Emission Bandwidth

#### LIMIT

N/A

#### TEST CONFIGURATION

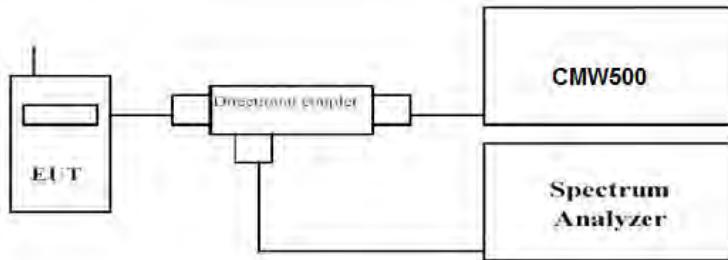

#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW,  $VBW \geq 3$  times RBW.


-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

#### TEST RESULTS

##### *Remark:*

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.

LTE FDD Band 5						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
1.4 MHz	6RB#0	824.7	1.256	1.272	1.0829	1.0820
		836.5	1.290	1.253	1.0833	1.0816
		848.3	1.257	1.244	1.0827	1.0805
3 MHz	15RB#0	825.5	2.938	2.929	2.6839	2.6802
		836.5	2.952	2.930	2.6969	2.6910
		847.5	2.952	2.940	2.6916	2.6881
5 MHz	25RB#0	826.5	4.950	4.967	4.4973	4.4983
		836.5	4.957	4.957	4.4904	4.4947
		846.5	4.955	4.966	4.4953	4.5031
10 MHz	50RB#0	829.0	9.790	9.795	8.9615	8.9642
		836.5	9.666	9.649	8.9290	8.9343
		844.0	9.768	9.774	8.9494	8.9559

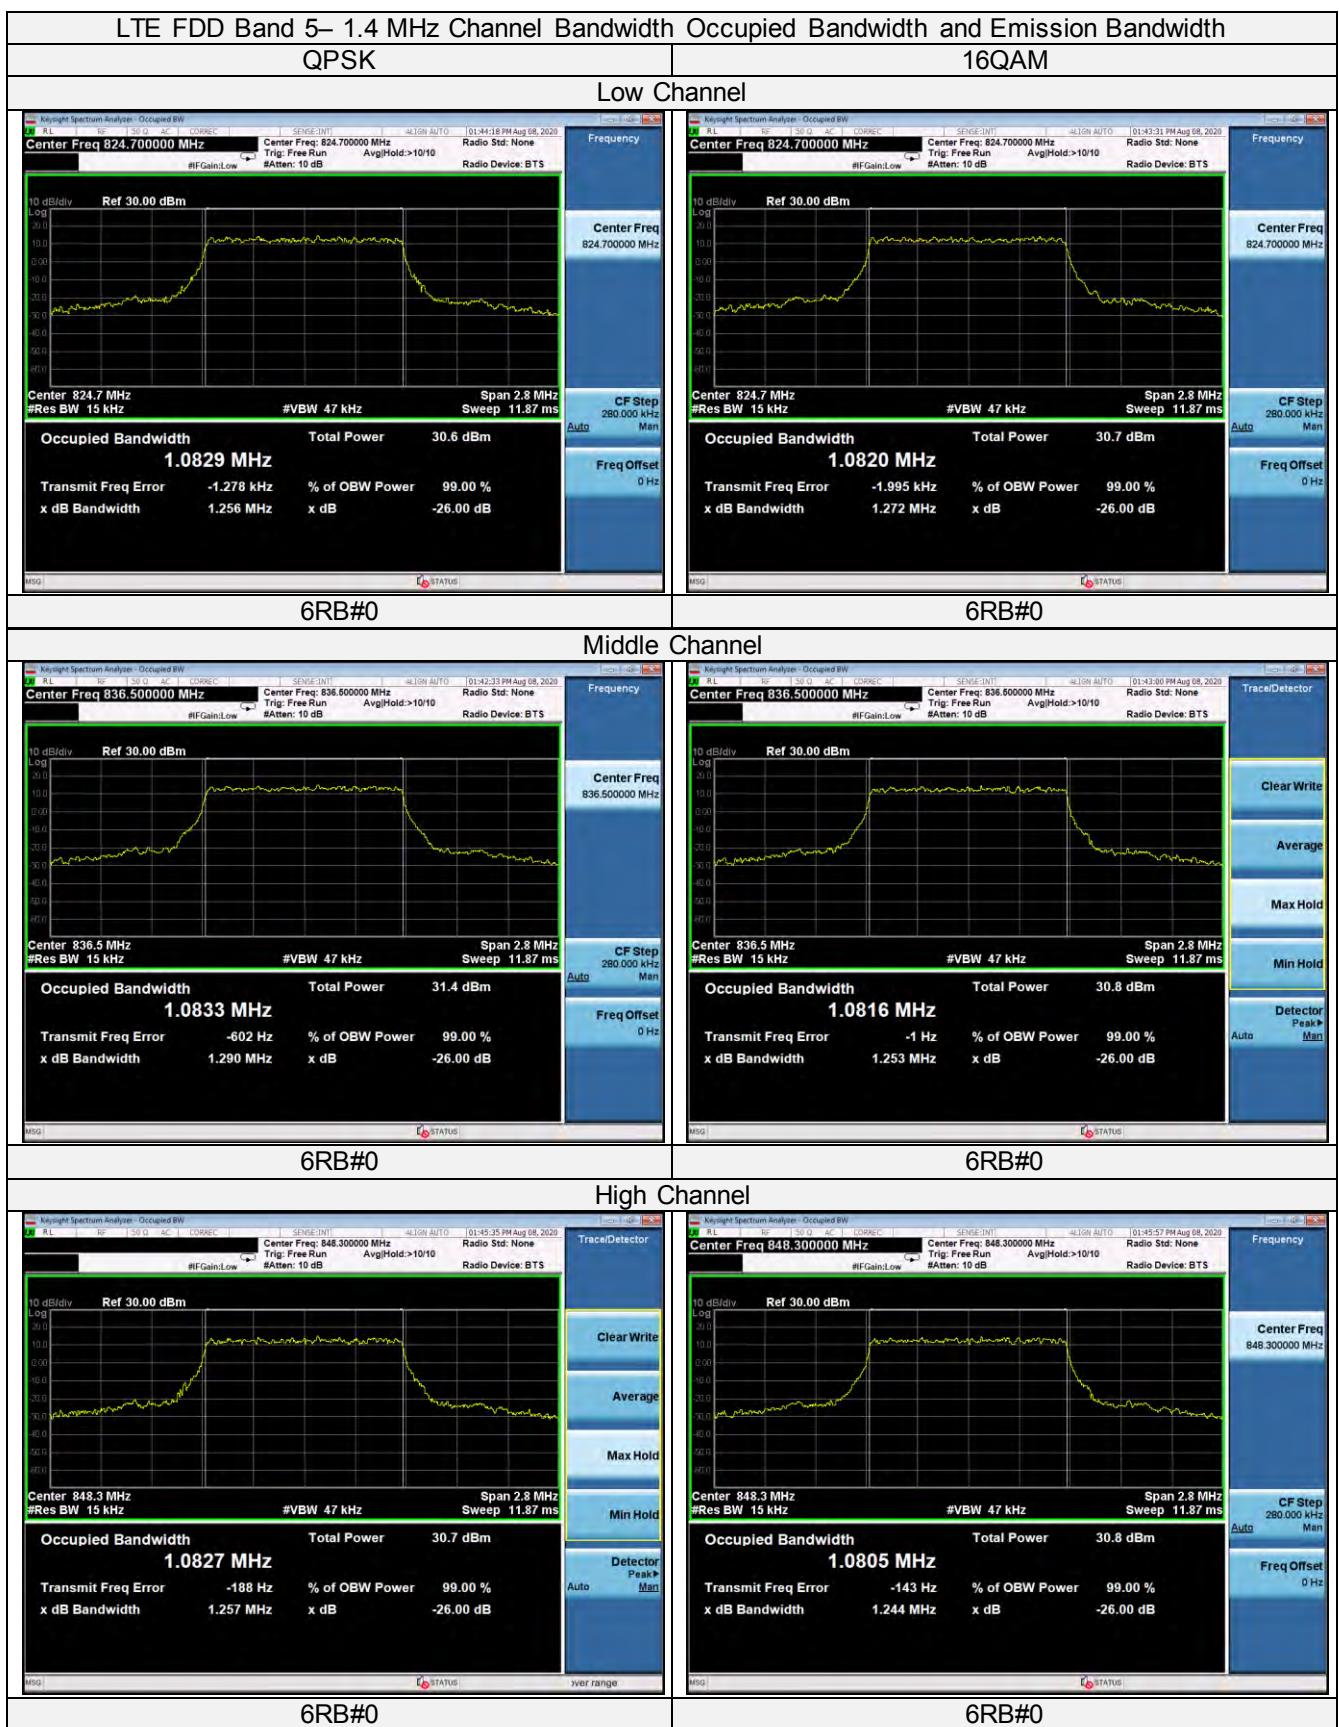



**Low Channel**


Plot	Center Freq	Occupied Bandwidth	Total Power	Transmit Freq Error	x dB Bandwidth	% of OBW Power
15RB#0	825.500000 MHz	2.6839 MHz	31.0 dBm	-3.517 kHz	2.938 MHz	99.00 %
15RB#1	825.500000 MHz	2.6802 MHz	31.2 dBm	-1.735 kHz	2.929 MHz	99.00 %


**Middle Channel**

Plot	Center Freq	Occupied Bandwidth	Total Power	Transmit Freq Error	x dB Bandwidth	% of OBW Power
15RB#0	836.500000 MHz	2.6969 MHz	31.8 dBm	3.343 kHz	2.952 MHz	99.00 %
15RB#1	836.500000 MHz	2.6910 MHz	31.6 dBm	5.609 kHz	2.930 MHz	99.00 %

**High Channel**

Plot	Center Freq	Occupied Bandwidth	Total Power	Transmit Freq Error	x dB Bandwidth	% of OBW Power
15RB#0	847.500000 MHz	2.6916 MHz	32.0 dBm	-77 Hz	2.952 MHz	99.00 %
15RB#1	847.500000 MHz	2.6881 MHz	31.7 dBm	-884 Hz	2.940 MHz	99.00 %

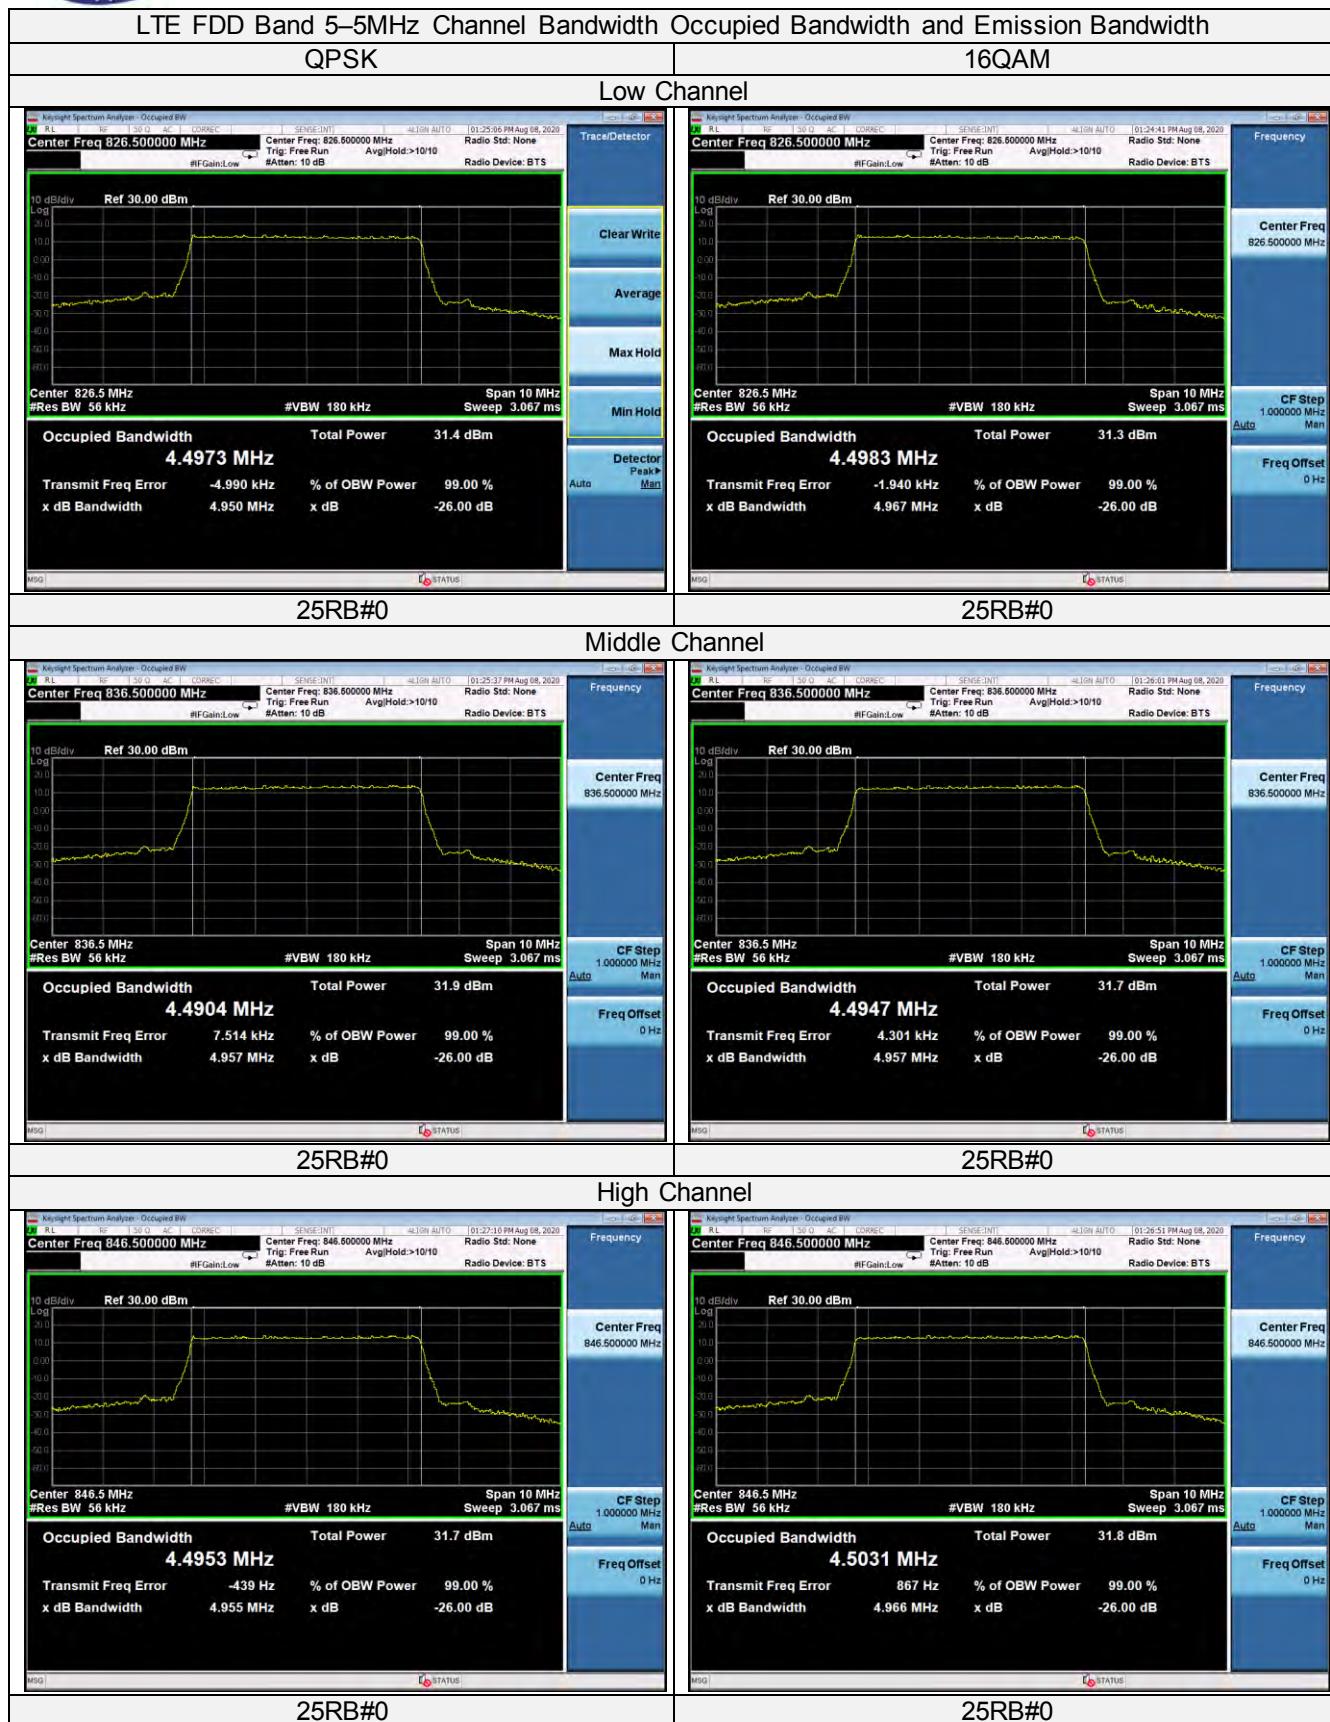

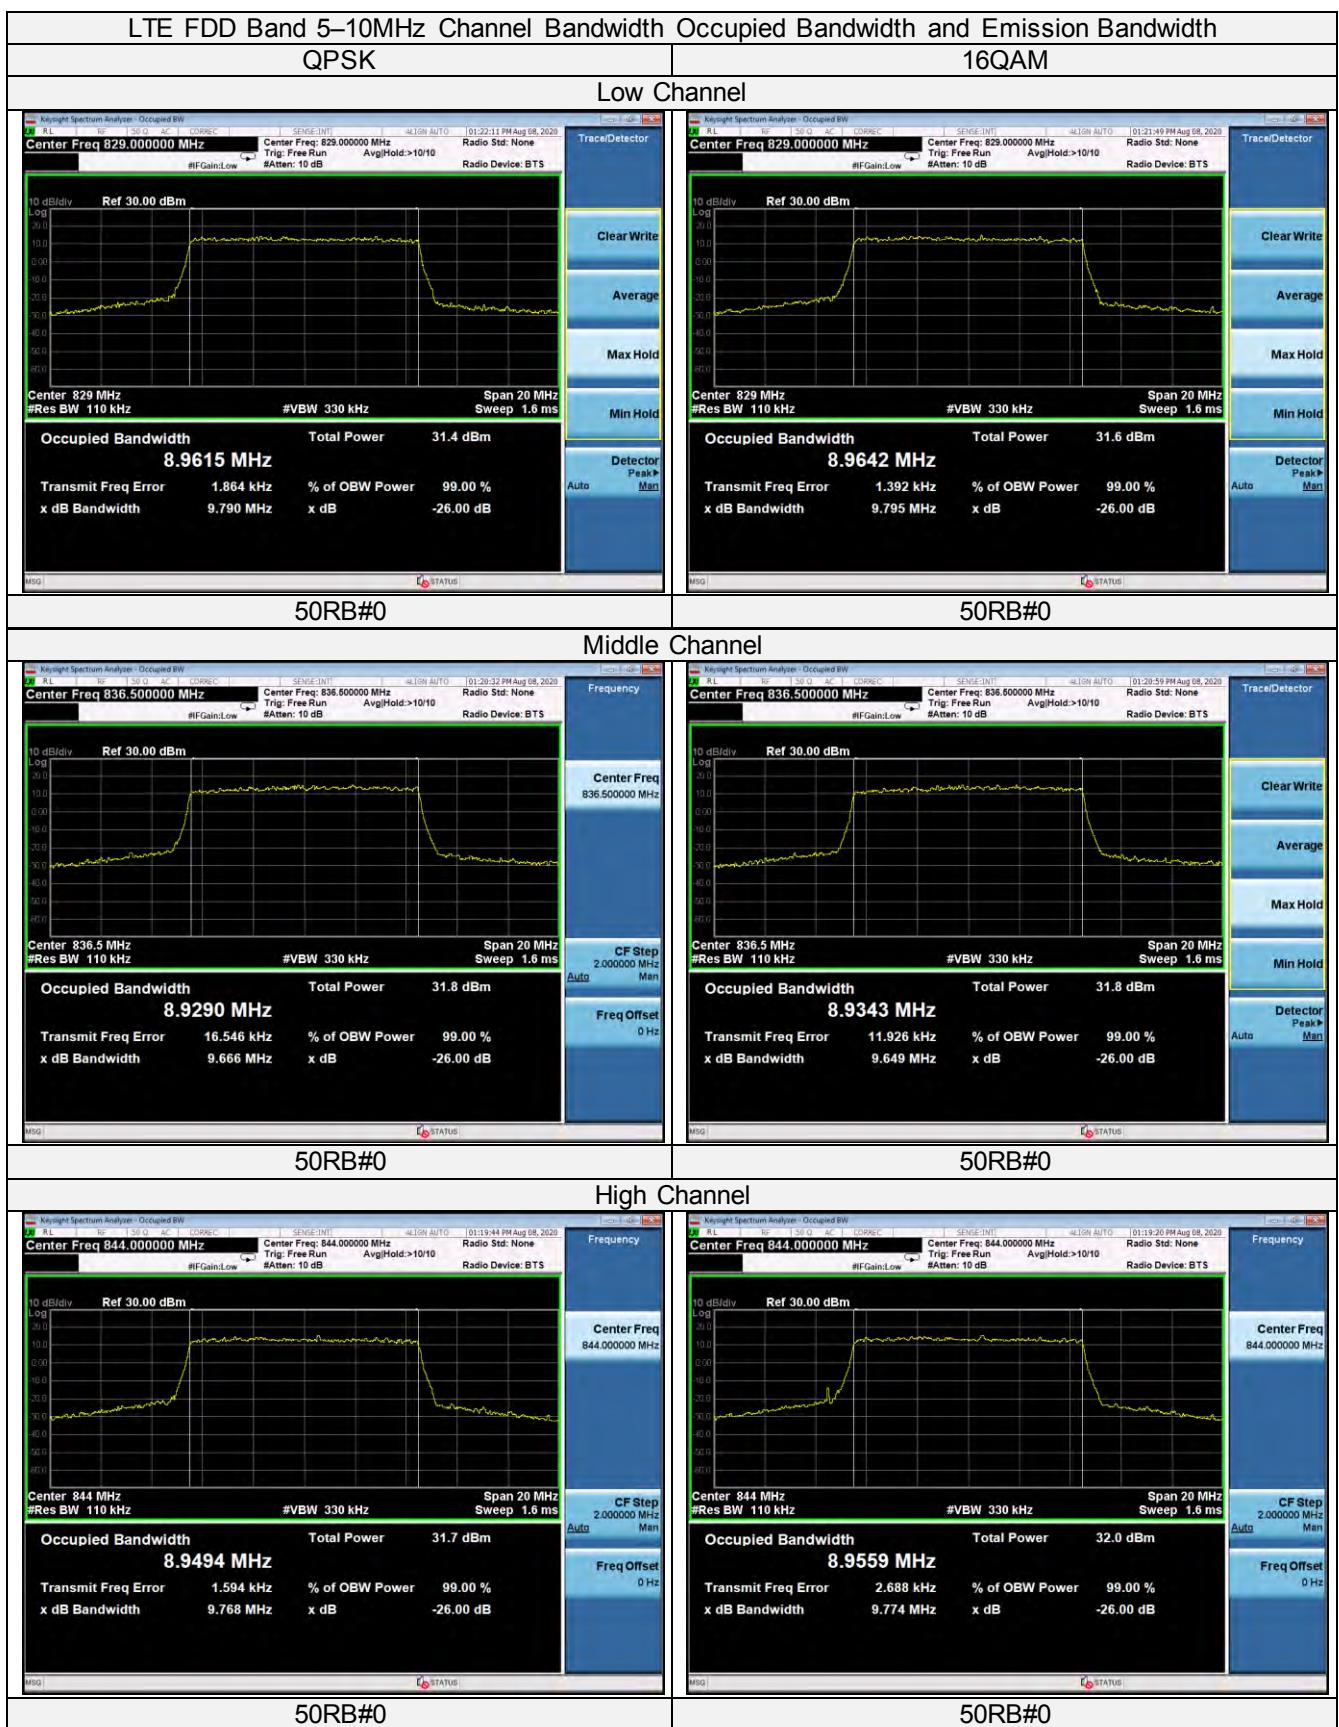


## 4.4 Band Edge compliance

### LIMIT

Per FCC §24.238 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

### TEST CONFIGURATION

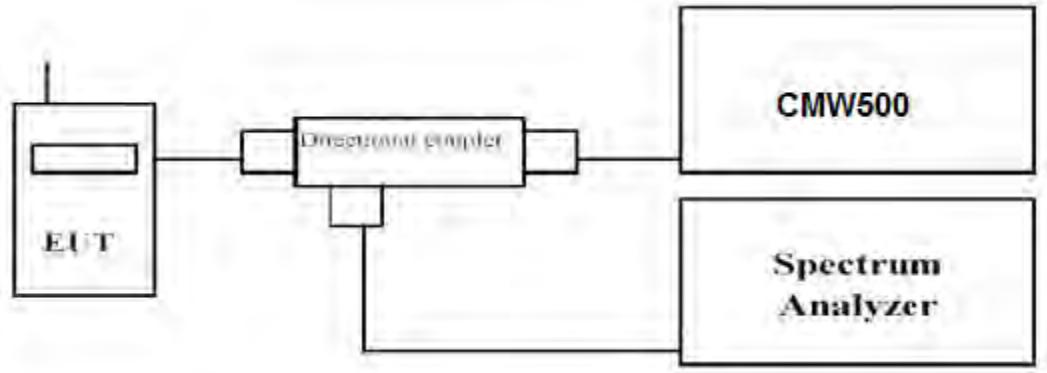


### TEST PROCEDURE


1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

### TEST RESULTS


#### *Remark:*

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.

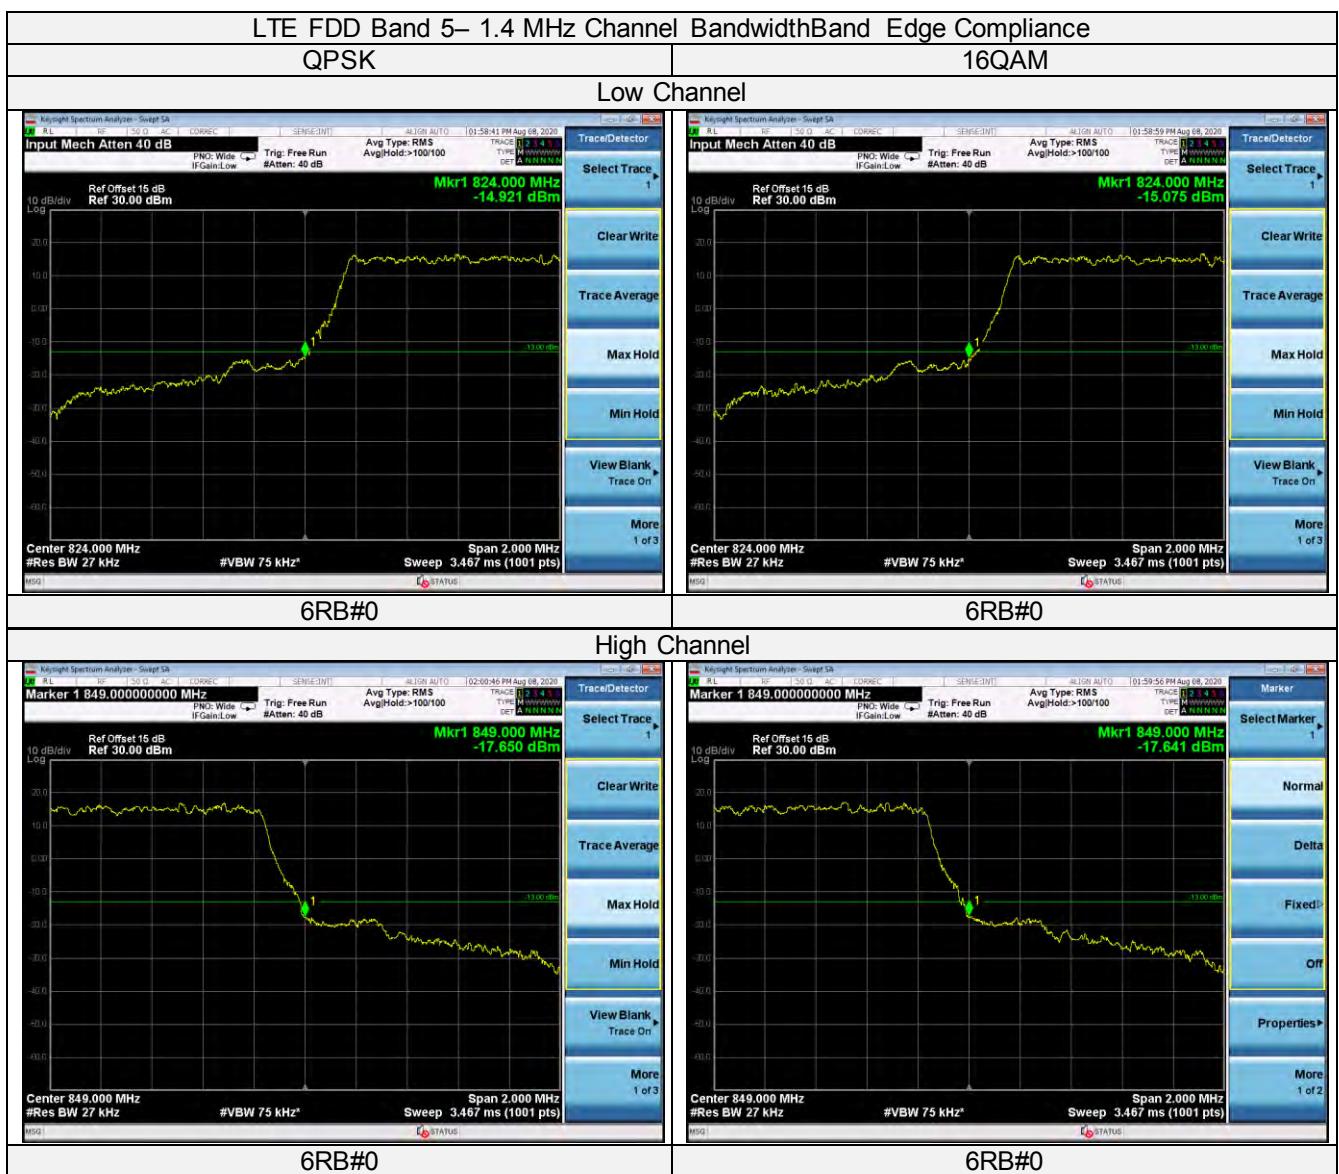

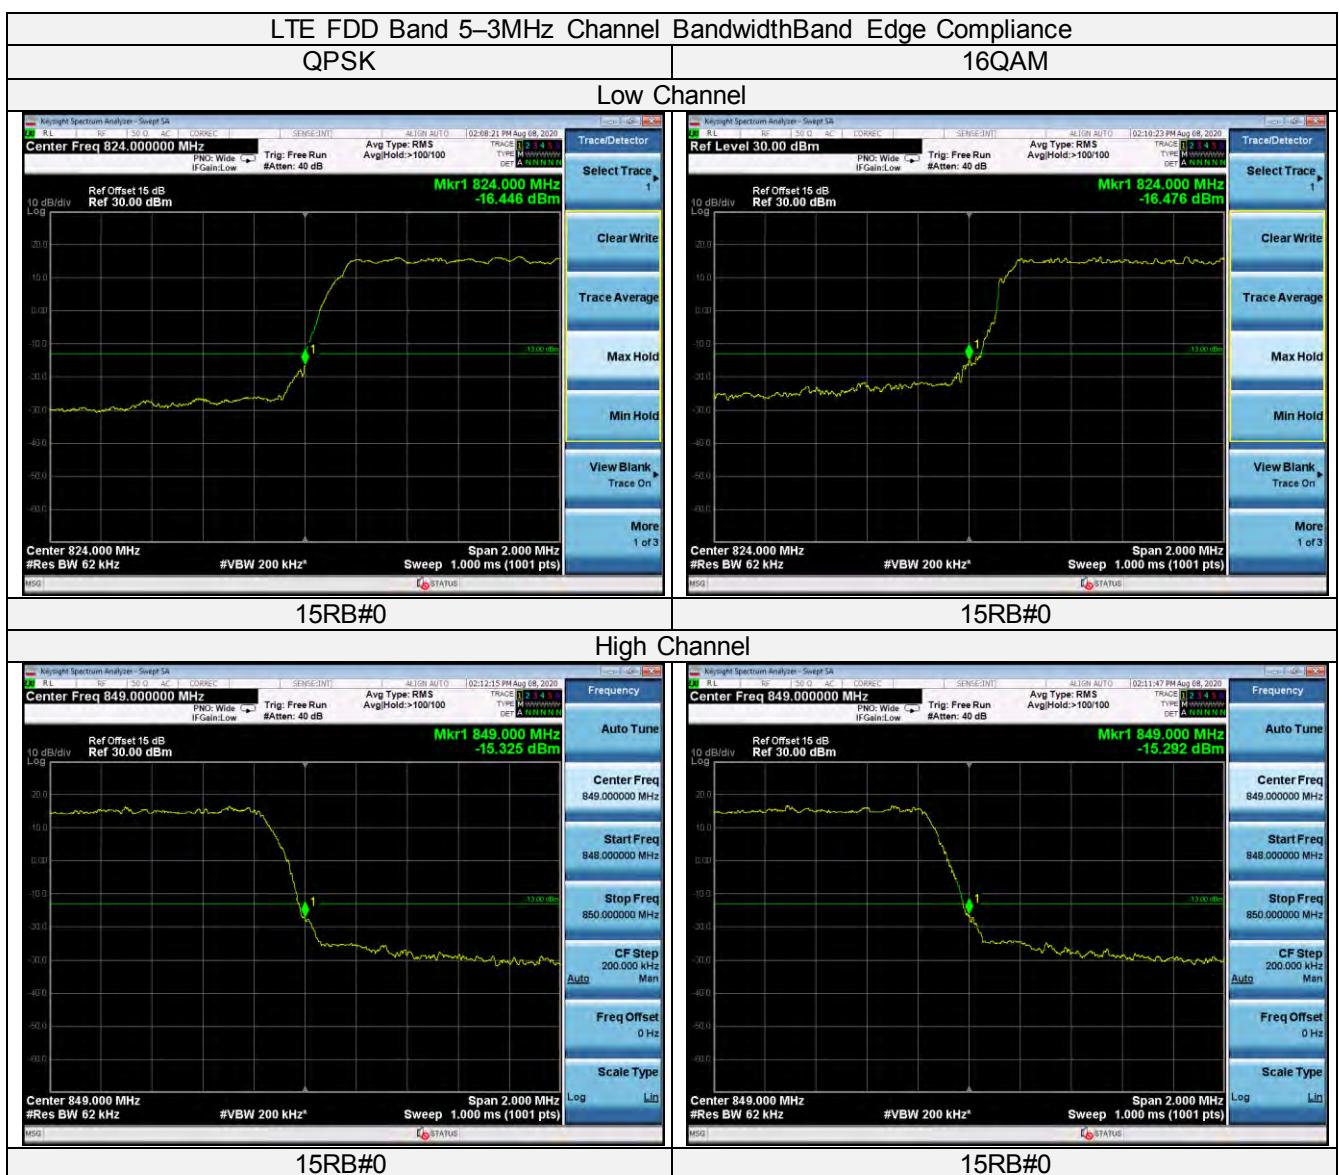



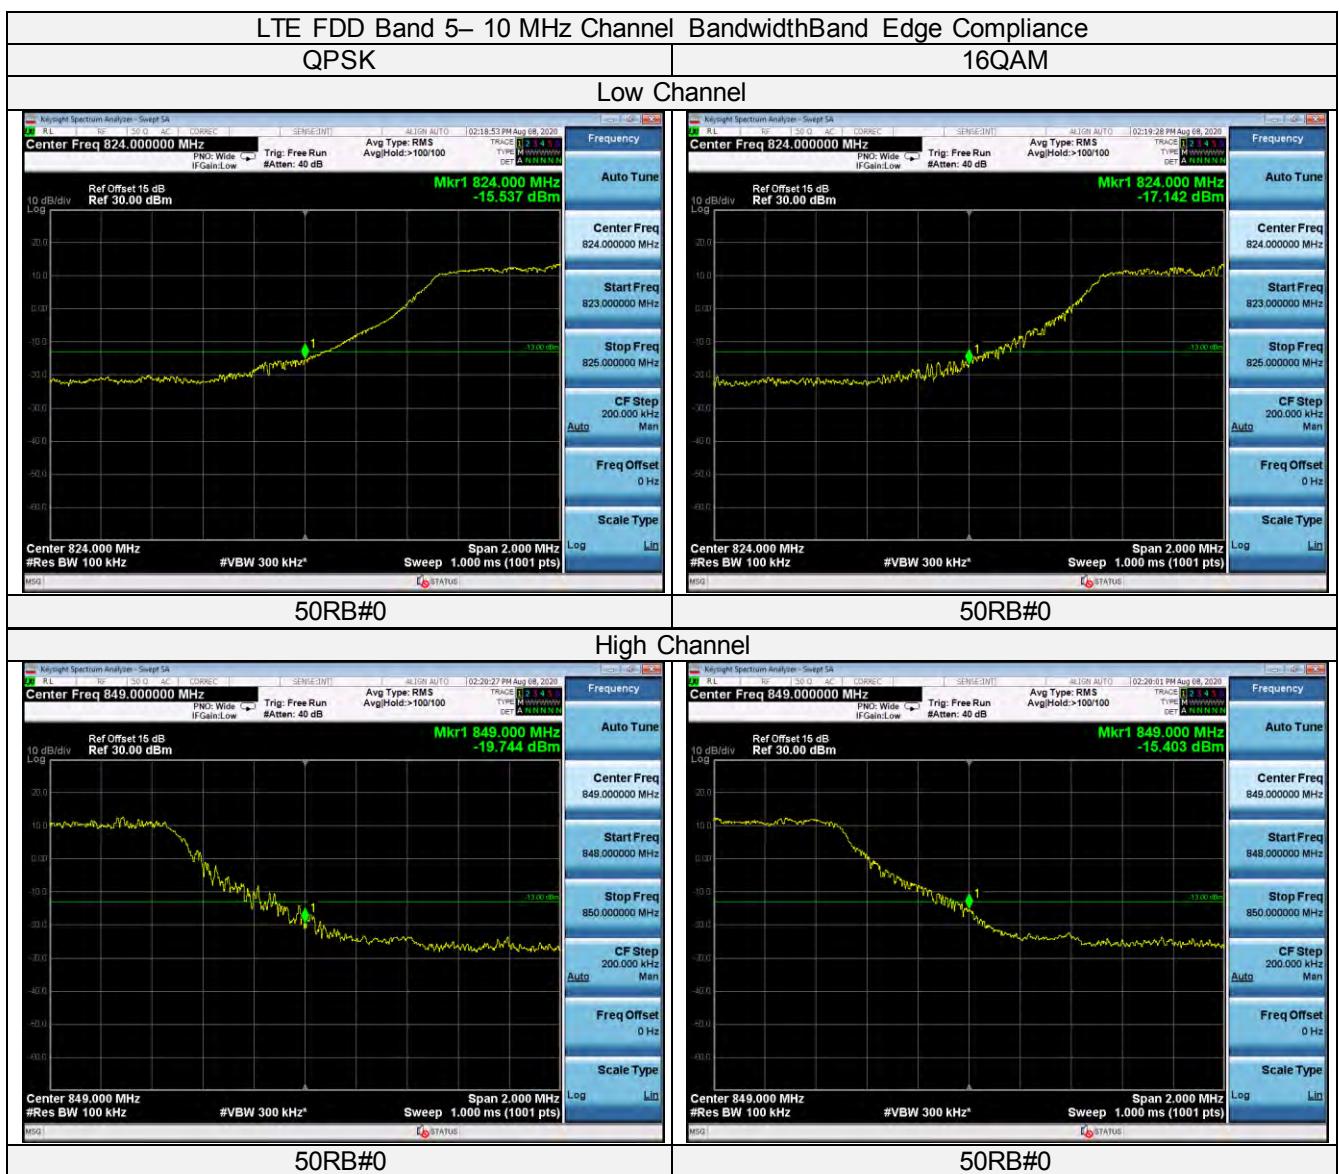


## 4.5 Spurious Emission on Antenna Port

### LIMIT

Per FCC §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

### TEST CONFIGURATION

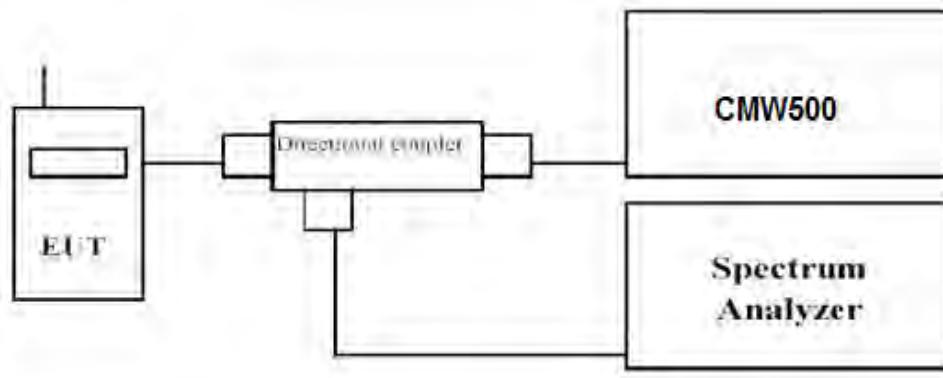

### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D


- a. Place the EUT on a bench and set it in transmitting mode.
- b. Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- c. EUT Communicate with CMW500, then select a channel for testing.
- d. Add a correction factor to the display of spectrum, and then test.
- e. The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10<sup>th</sup> harmonic.
- f. Please refer to following tables for test antenna conducted emissions.


Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 5	0.01~20	1 MHz	3 MHz	Auto


### TEST RESULTS


#### *Remark:*


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case at the QPSK Mode for each Channel Bandwidth of LTE FDD Band 5

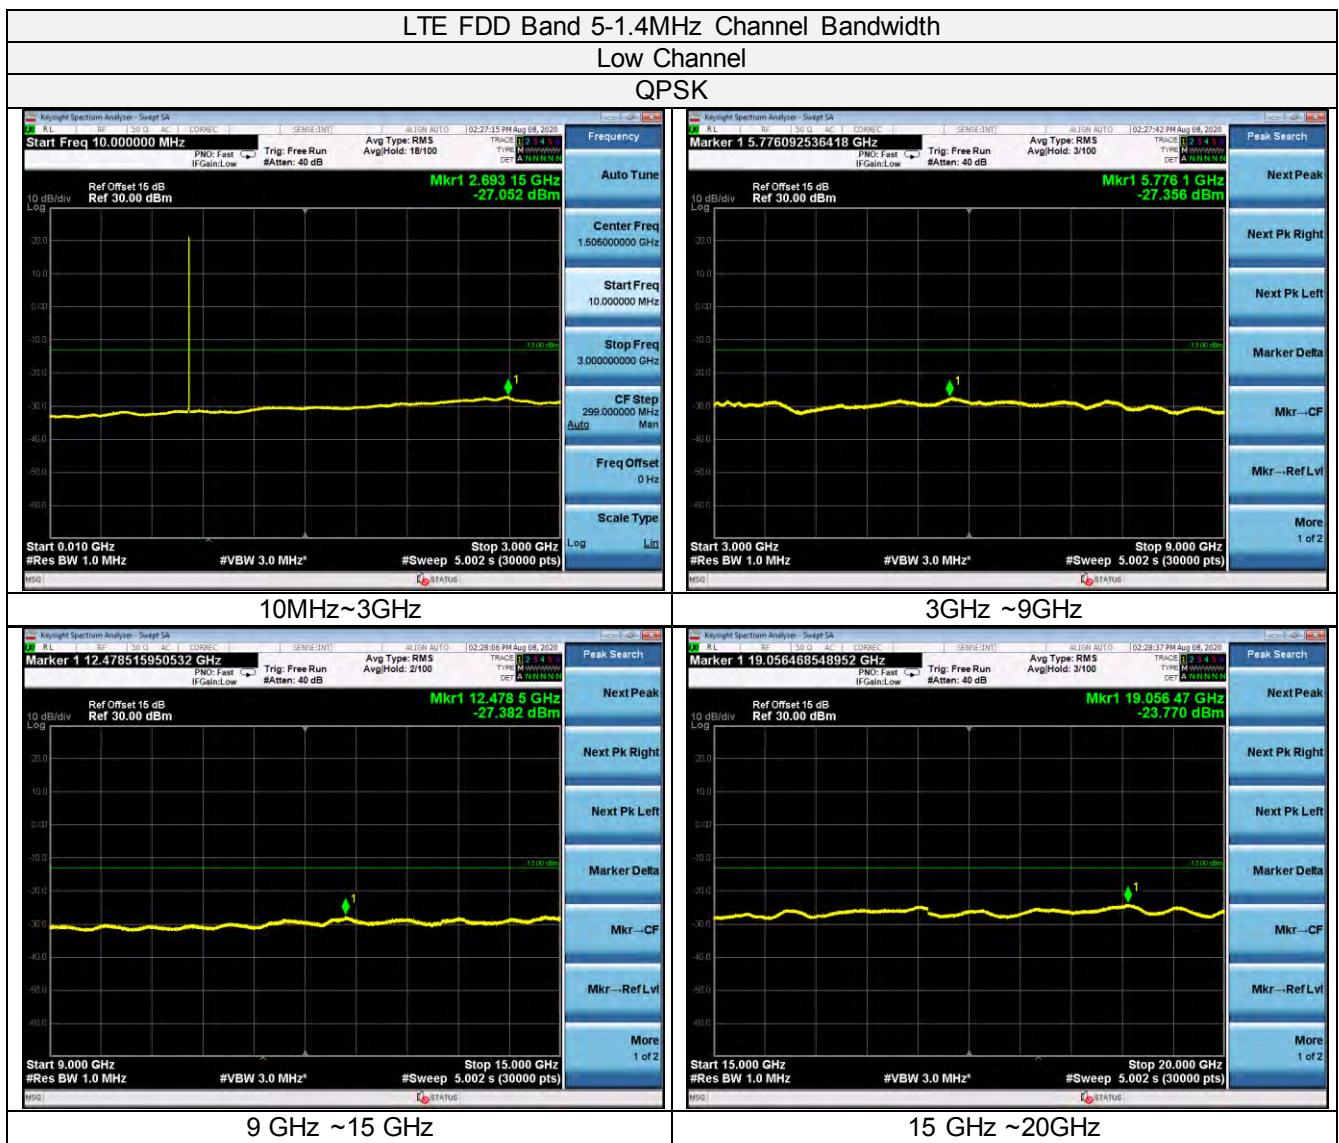


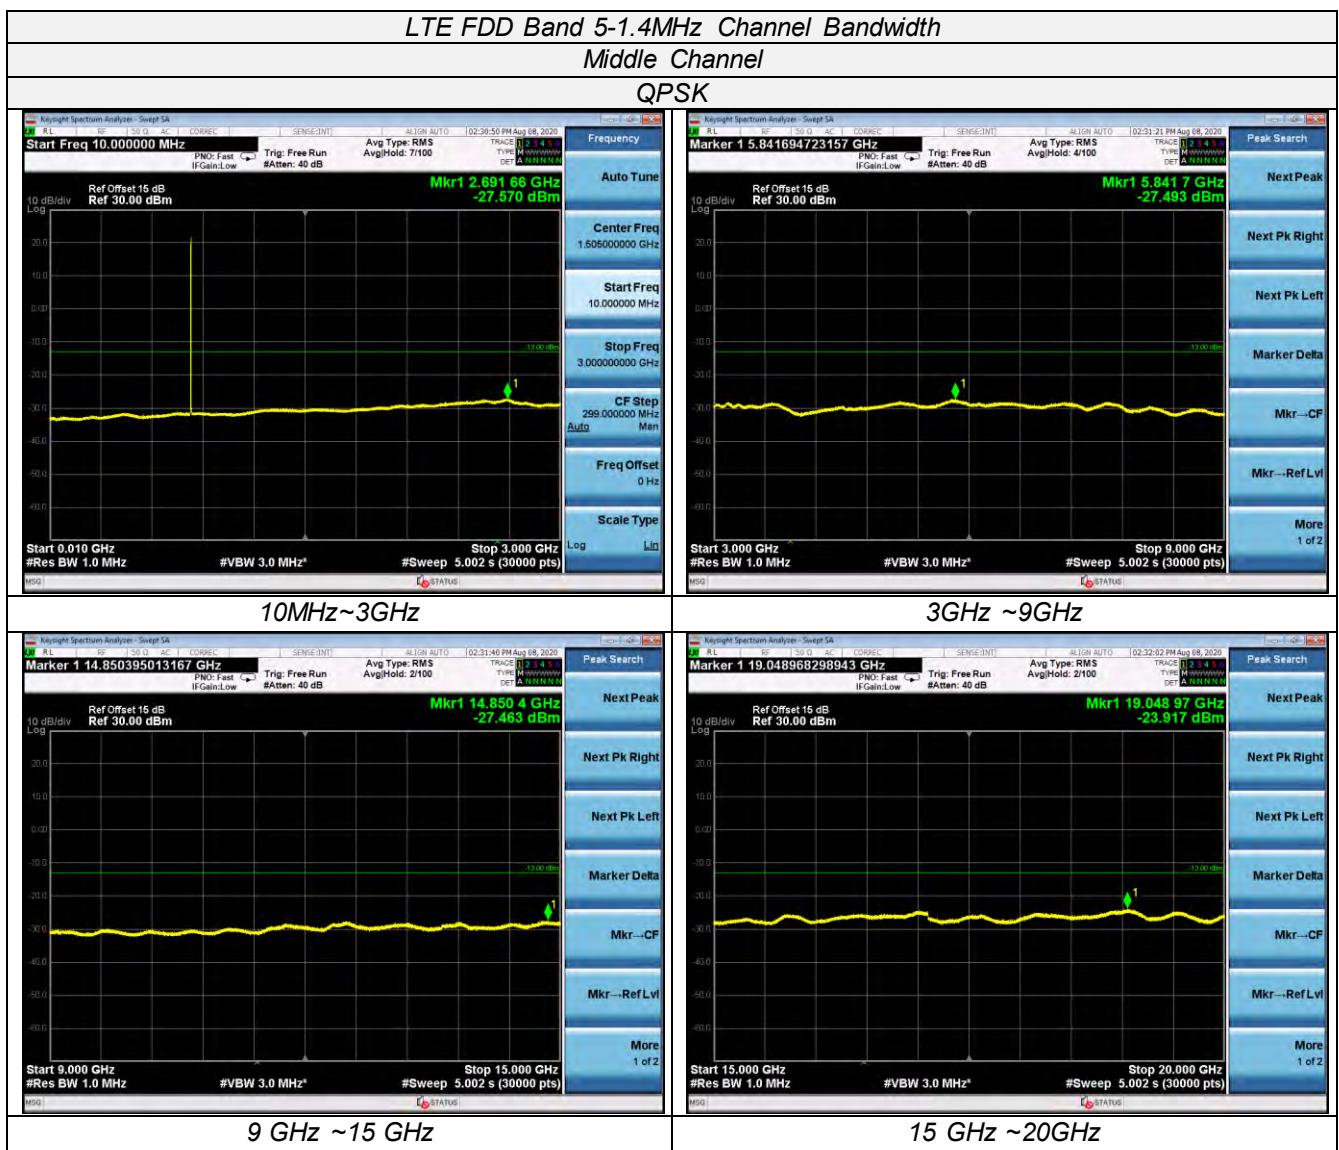


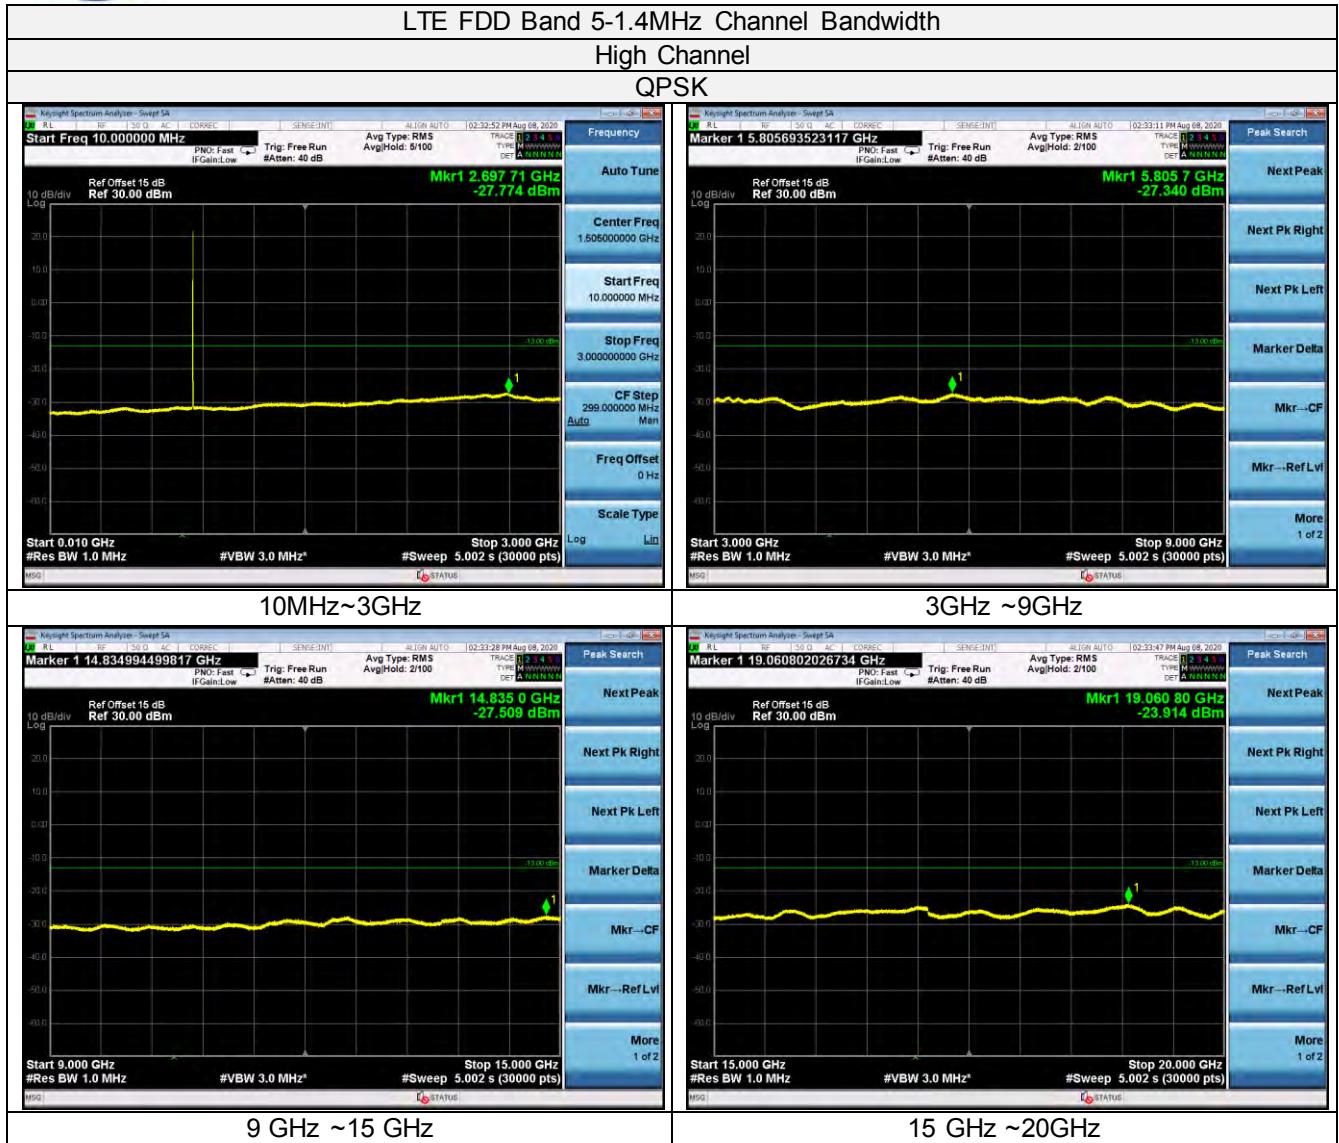


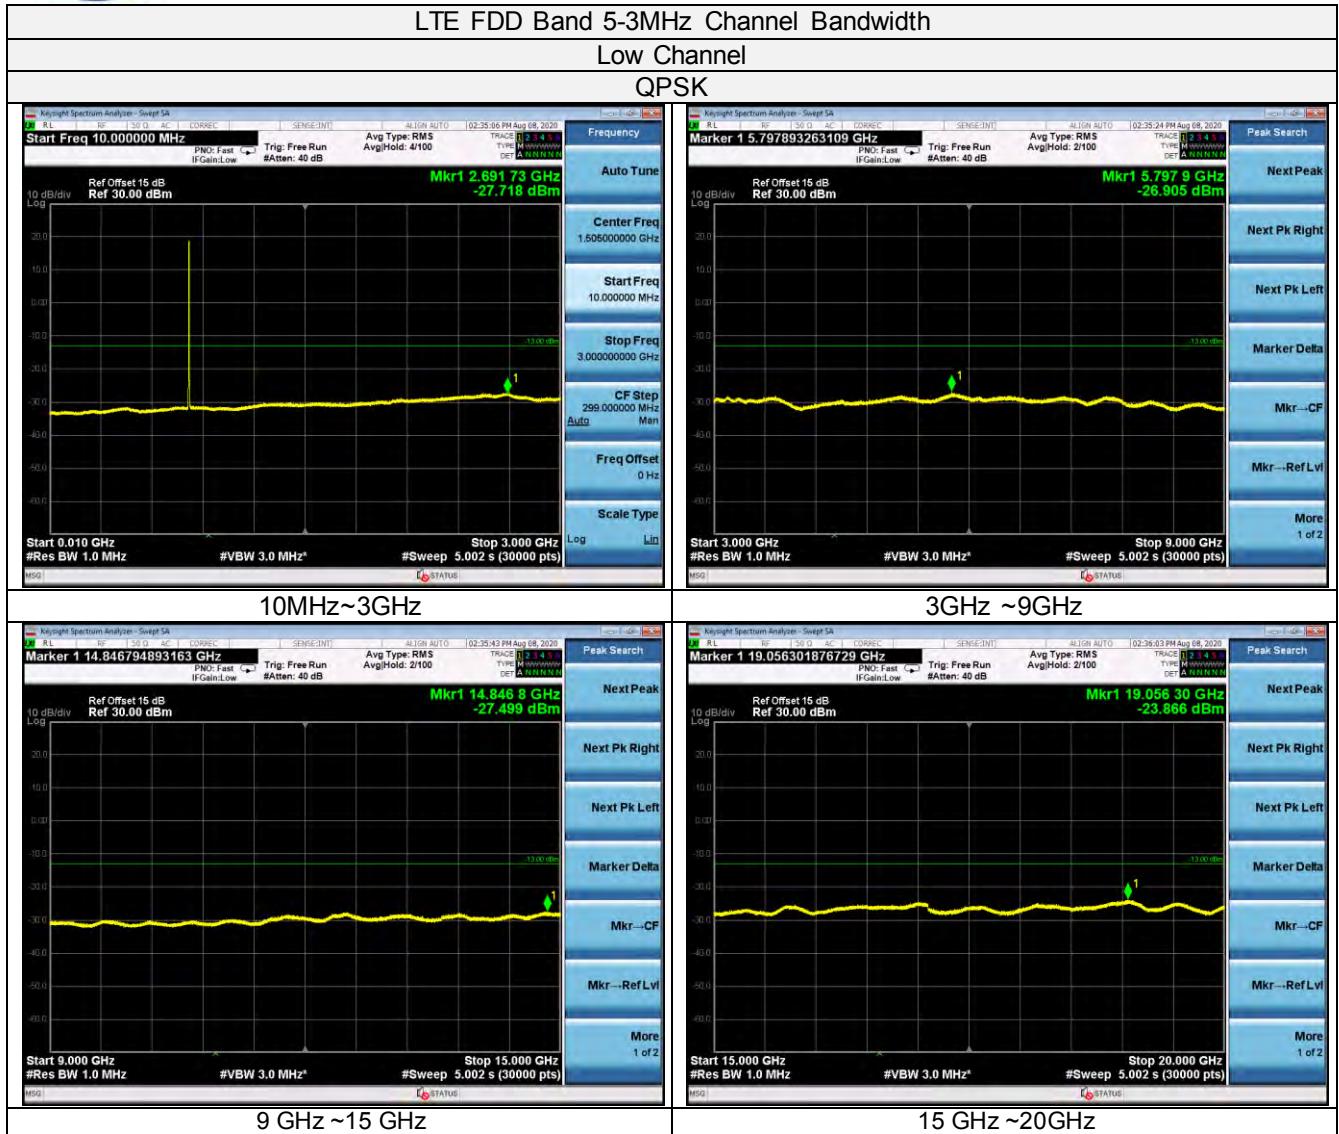


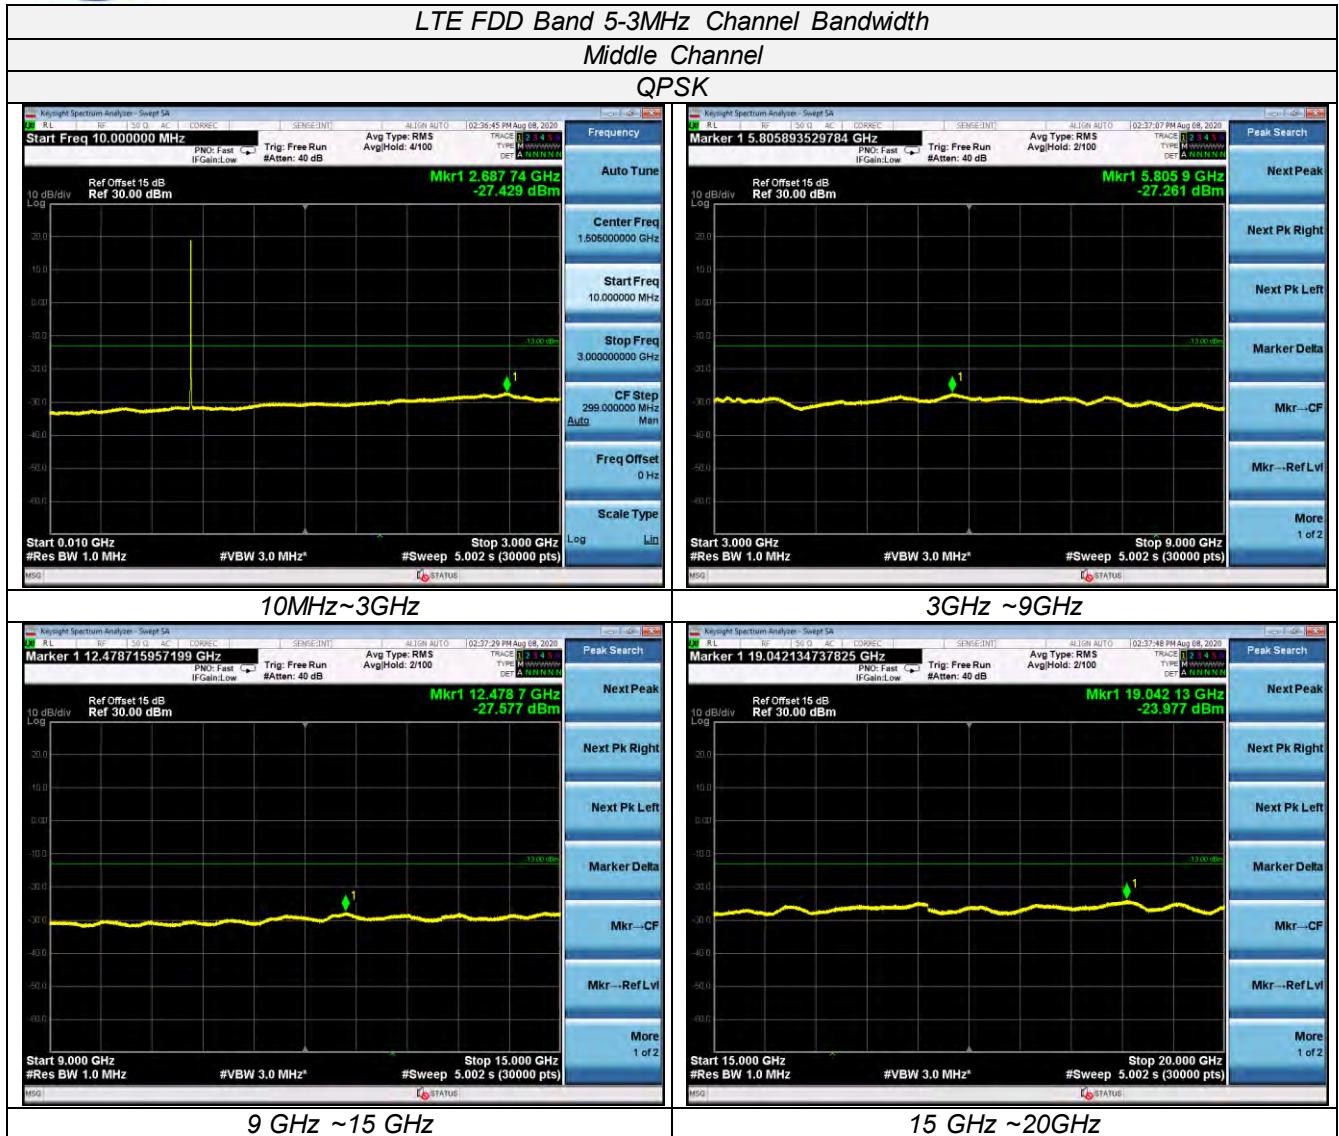


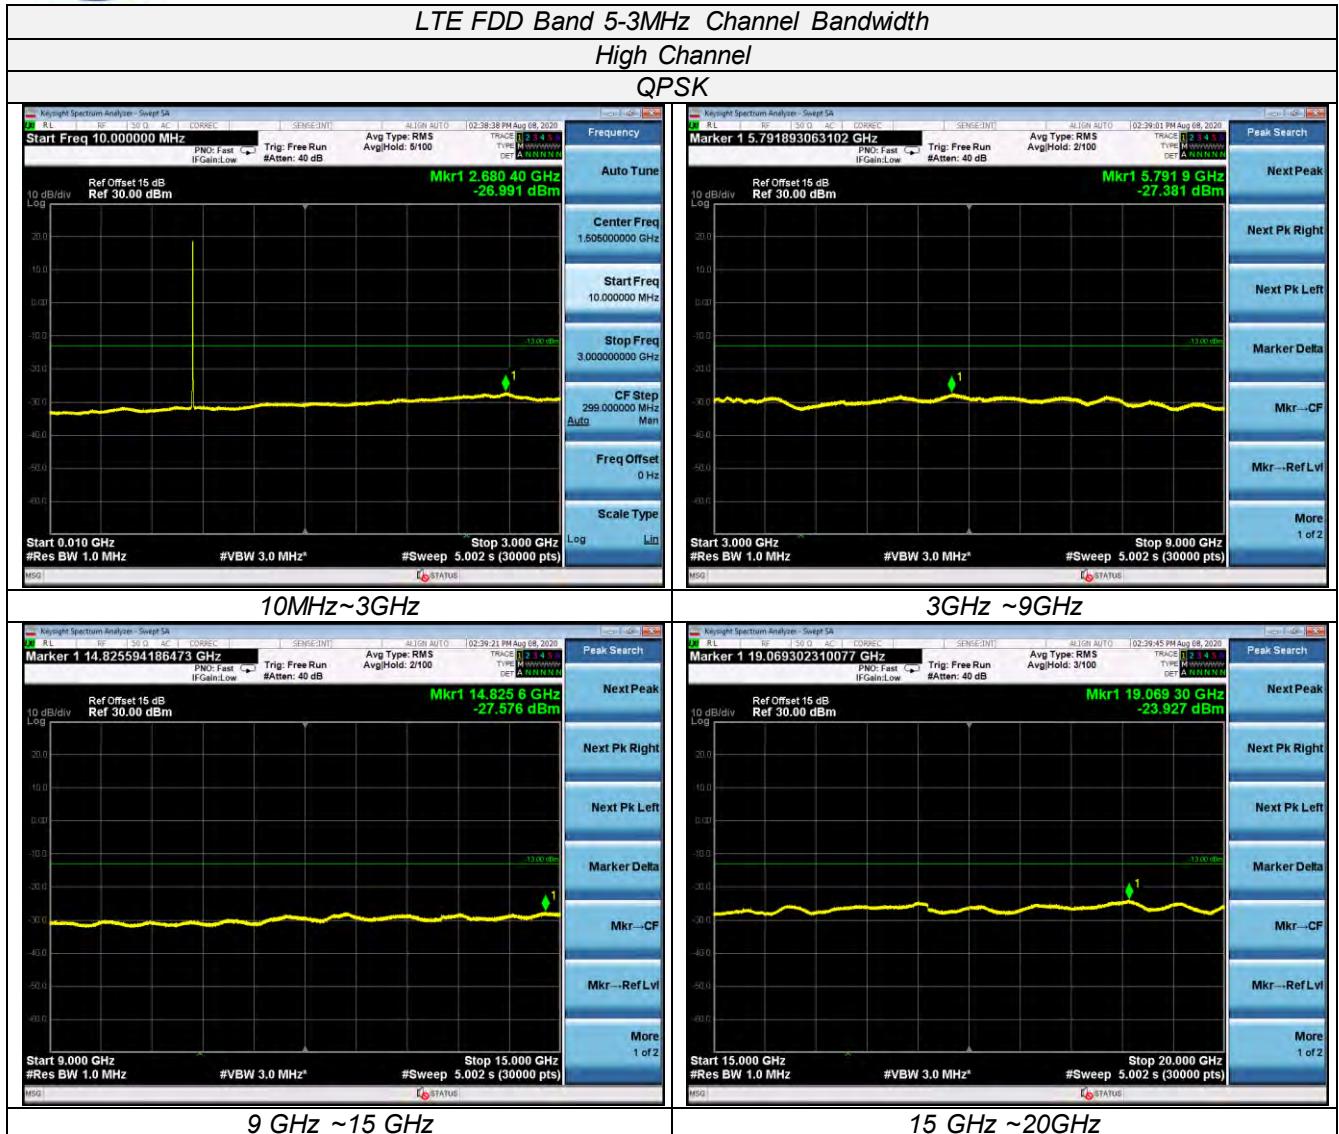


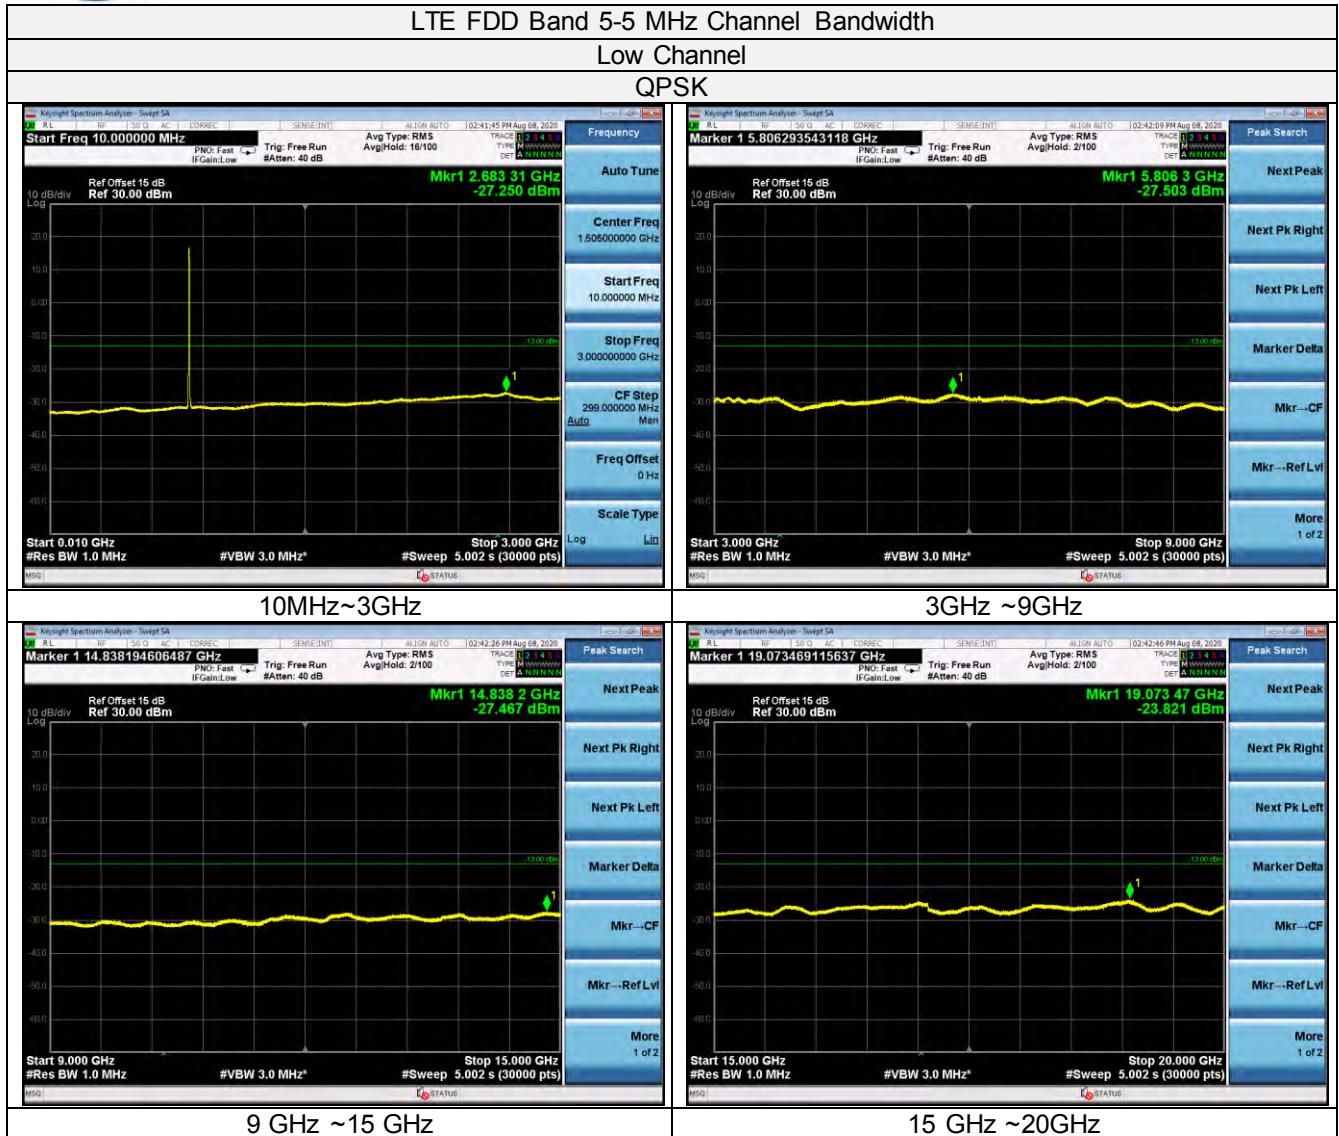


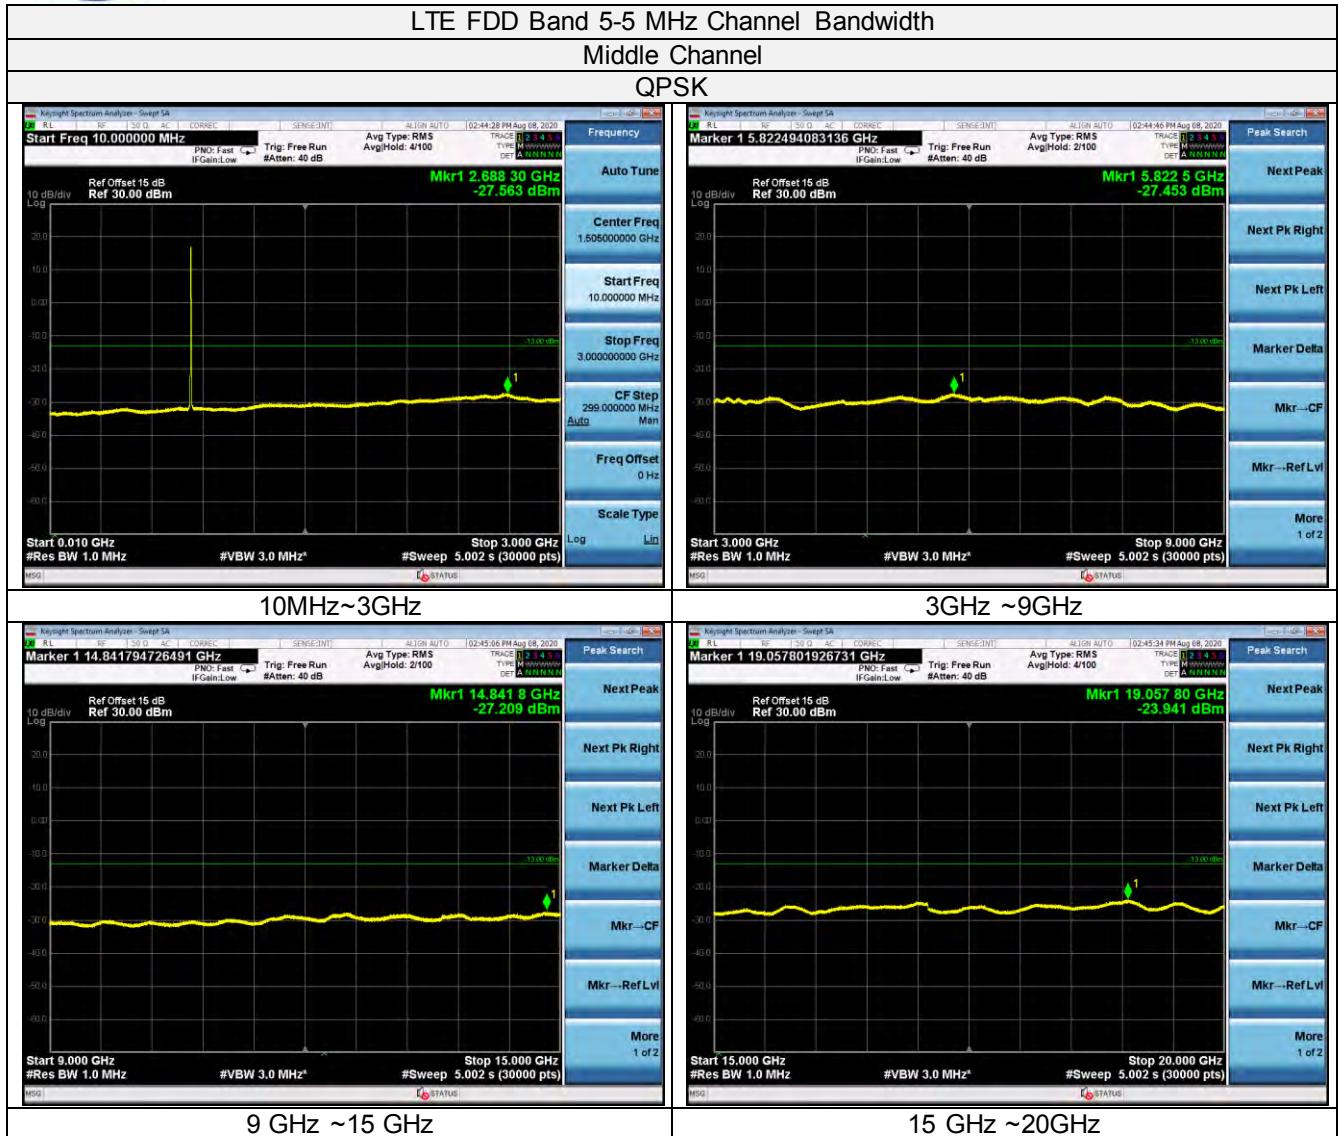

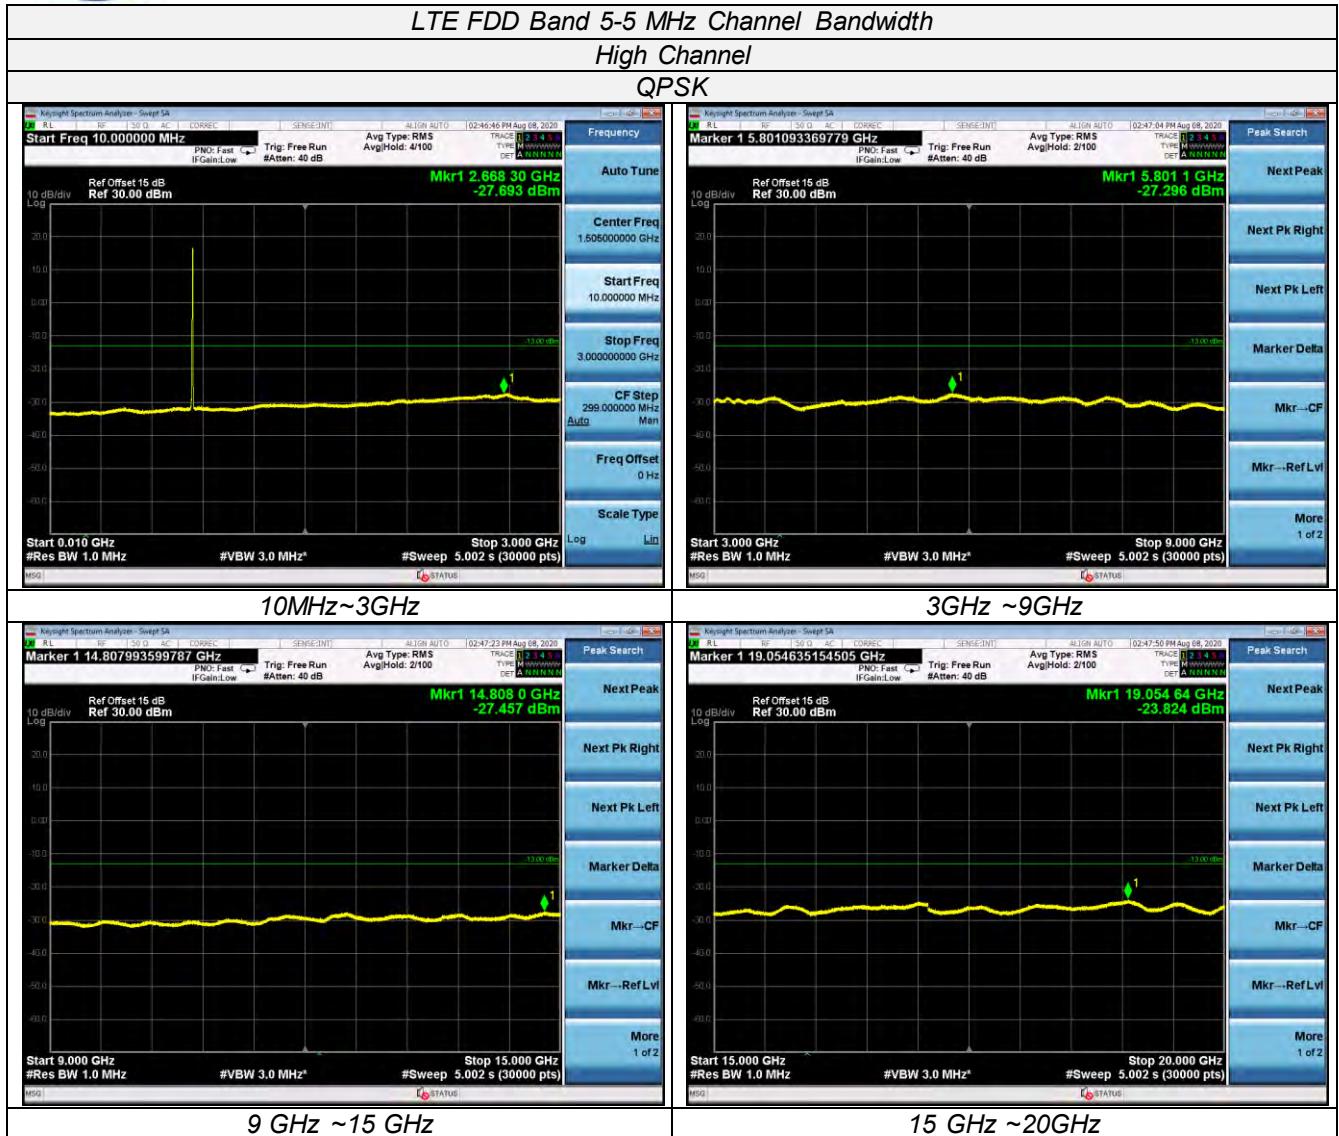

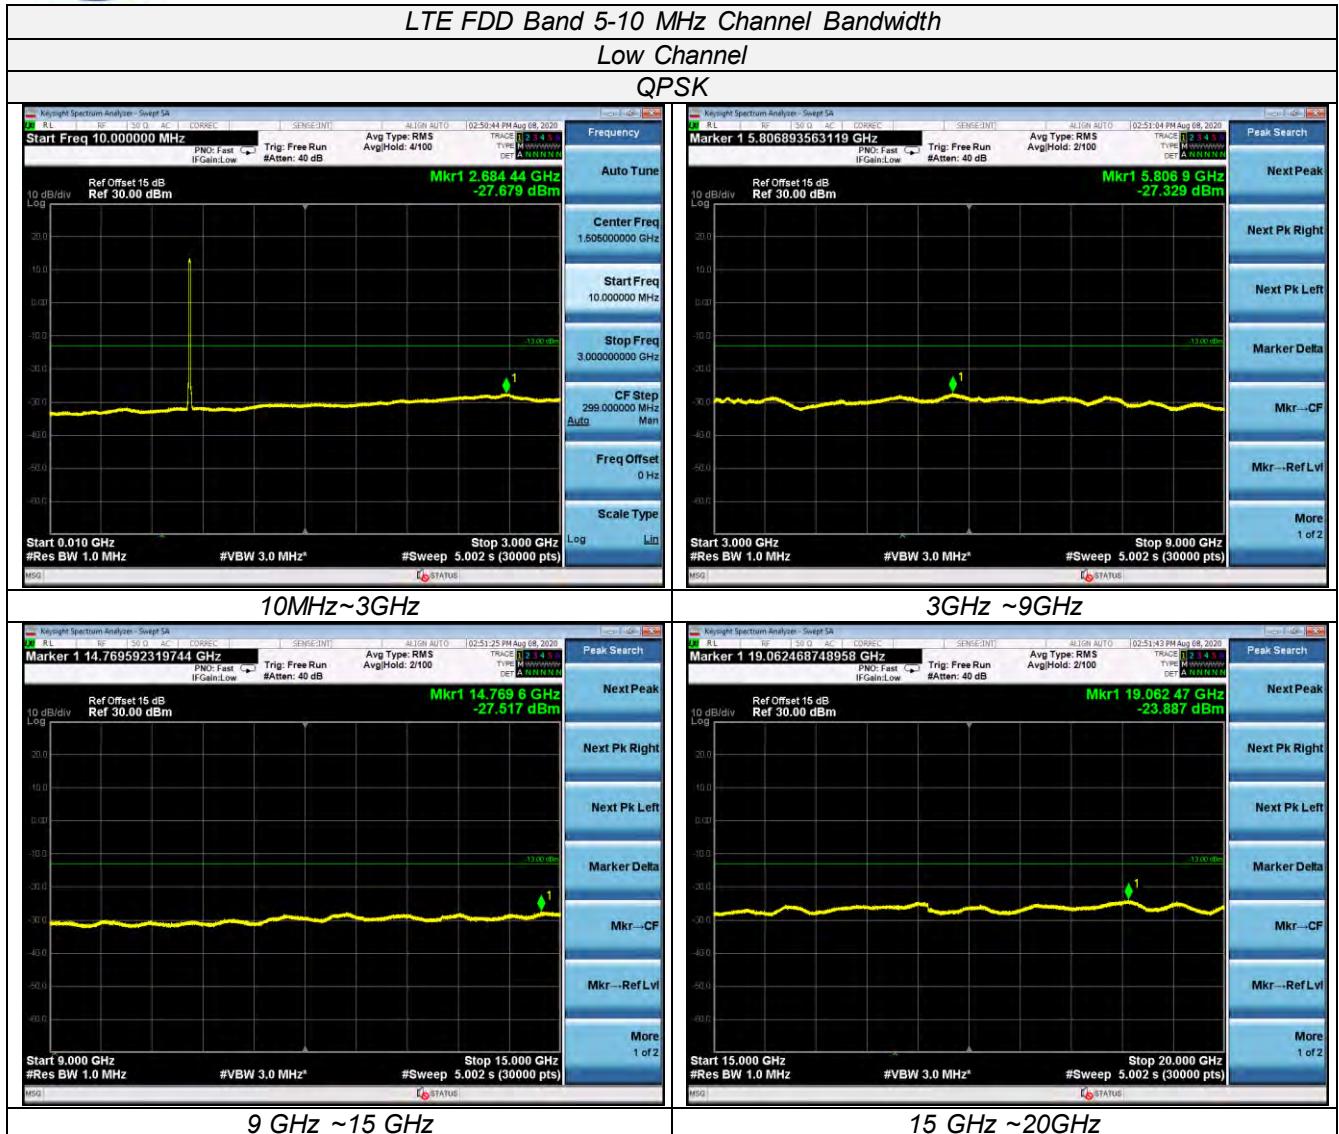

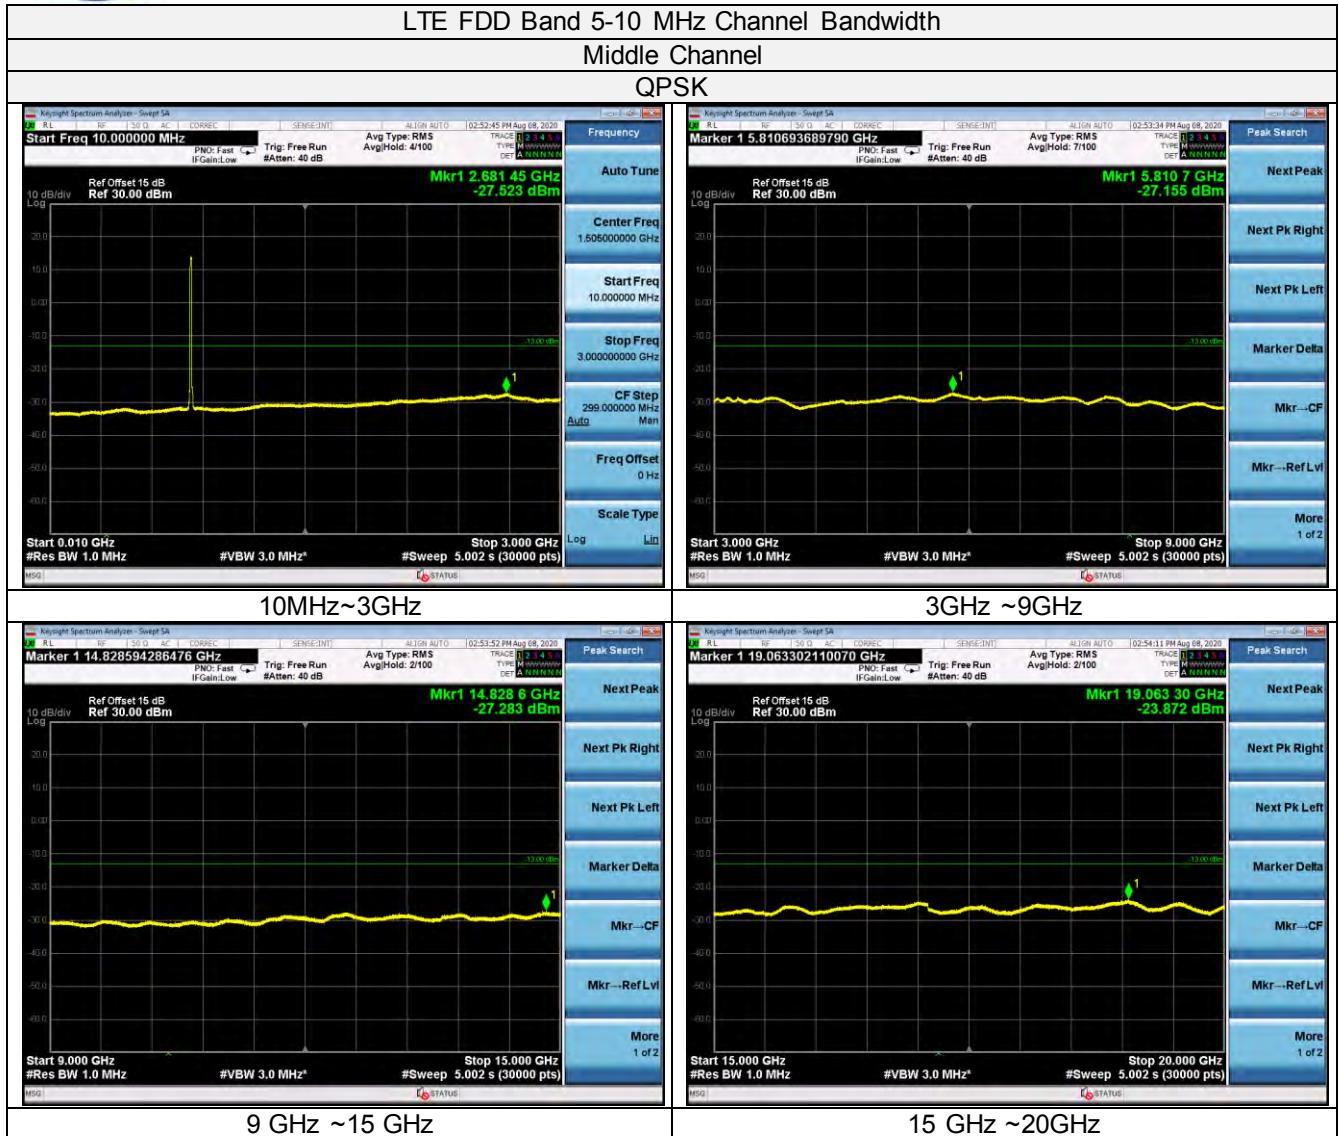

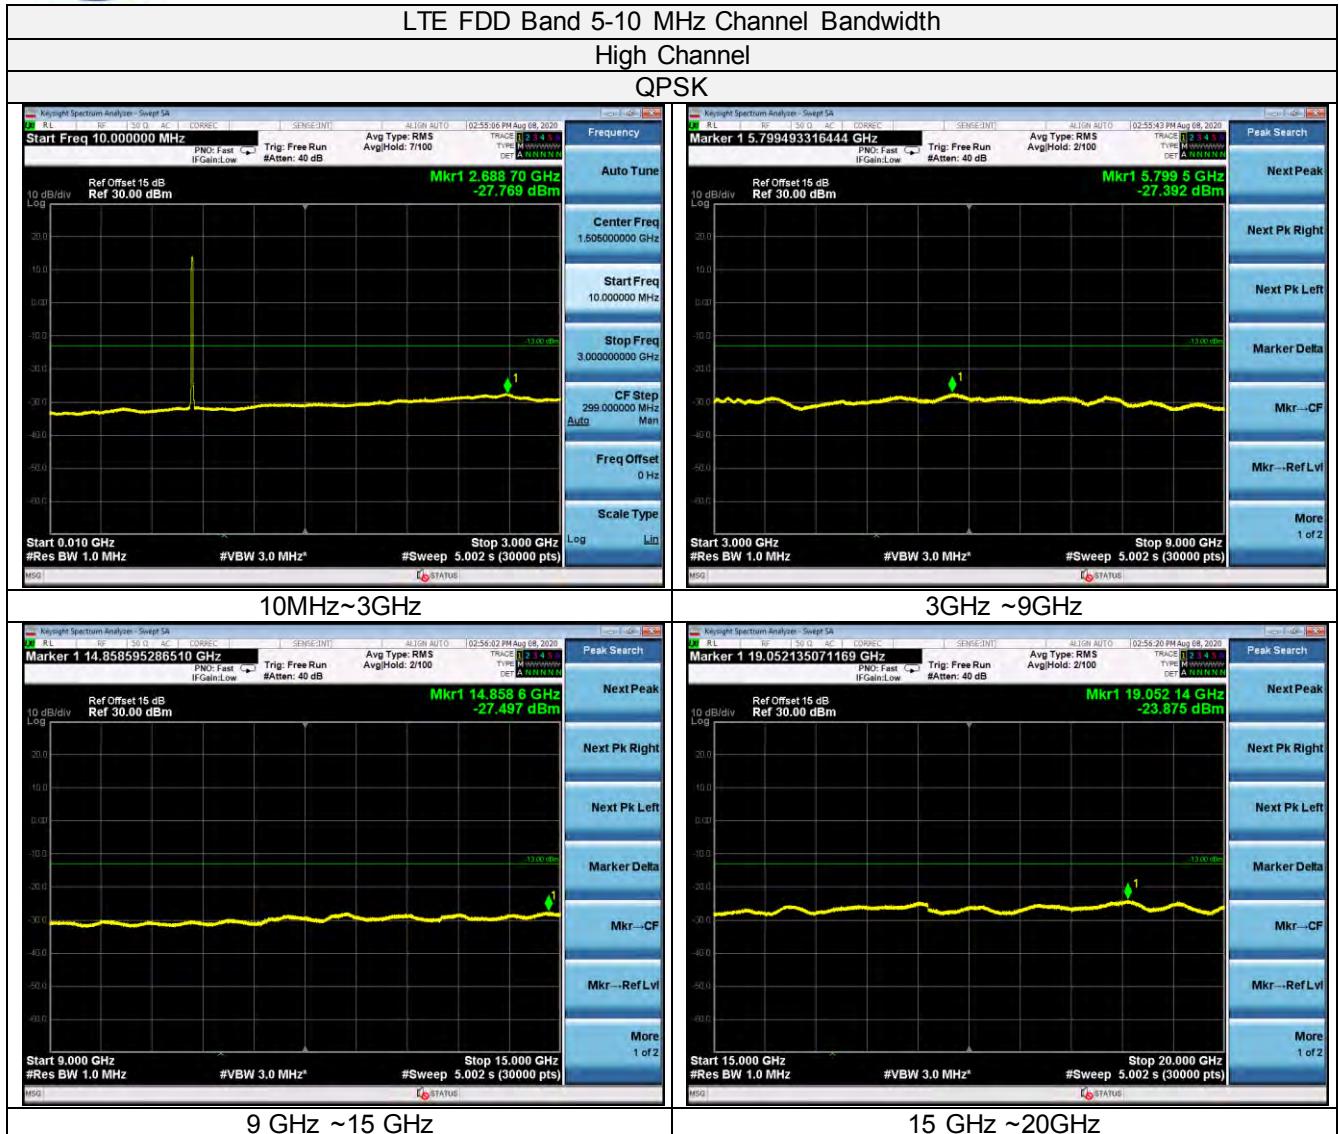


## 4.6 Radiated Spurious Emission

### TEST APPLICABLE

Per FCC §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

### TEST CONFIGURATION

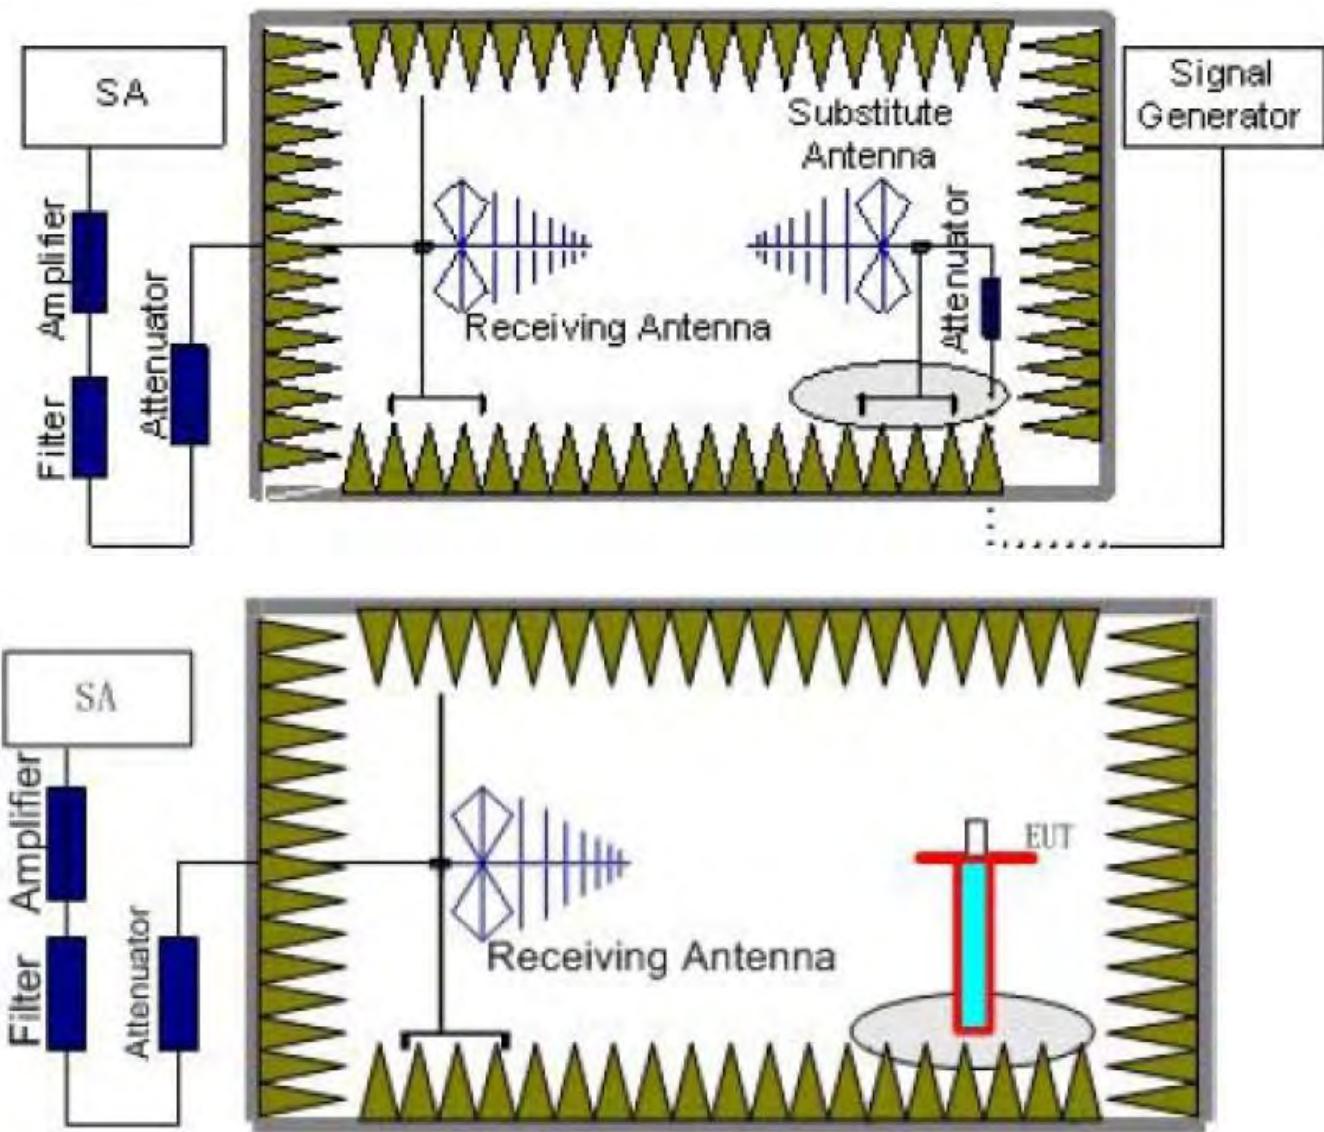

### TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.



3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz, And the maximum value of the receiver should be recorded as ( $P_r$ ).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.  
The measurement results are obtained as described below:  
$$\text{Power(EIRP)} = P_{Mea} - P_{cl} + G_a$$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$ .
8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
LTE BAND 5	0.03~1	100KHz	300KHz	10
	1~20	1 MHz	3 MHz	2

### TEST LIMITS

According to 24.238 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
LTE BAND 5	Low	30MHz -20GHz	PASS
	Middle	30MHz -20GHz	PASS
	High	30MHz -20GHz	PASS

### **Radiated Measurement:**

#### *Remark:*

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE BAND 5; recorded worst case for each Channel Bandwidth of LTE BAND 5.
2.  $\text{EIRP} = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + G_a(\text{dBi})$
3. Not recorded other points as values lower than limits.
4. Margin = Limit - EIRP

#### *Remark:*

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.
2.  $\text{EIRP} = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + G_a(\text{dBi})$
3. Not recorded other points as values lower than limits.
4. Margin = Limit - EIRP

*LTE FDD Band 5\_Channel Bandwidth 1.4MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1649.4	-34.52	3	3	9.58	-27.94	-13	14.94	H
2474.1	-36.18	3.03	3	10.72	-28.49	-13	15.49	H
1649.4	-34.15	3	3	9.68	-27.47	-13	14.47	V
2474.1	-36.41	3.03	3	10.72	-28.72	-13	15.72	V

*LTE FDD Band 5\_Channel Bandwidth 1.4MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-34.02	3	3	9.58	-27.44	-13	14.44	H
2509.5	-36.81	3.03	3	10.72	-29.12	-13	16.12	H
1673.0	-34.02	3	3	9.68	-27.34	-13	14.34	V
2509.5	-36.23	3.03	3	10.72	-28.54	-13	15.54	V

*LTE FDD Band 5\_Channel Bandwidth 1.4MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1696.6	-34.35	3	3	9.58	-27.77	-13	14.77	H
2544.9	-36.04	3.03	3	10.72	-28.35	-13	15.35	H
1696.6	-34.06	3	3	9.68	-27.38	-13	14.38	V
2544.9	-36.55	3.03	3	10.72	-28.86	-13	15.86	V

*LTE FDD Band 5\_Channel Bandwidth 3MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1651.0	-33.99	3	3	9.58	-27.41	-13	14.41	H
2476.5	-36.33	3.03	3	10.72	-28.64	-13	15.64	H
1651.0	-34.17	3	3	9.68	-27.49	-13	14.49	V
2476.5	-36.18	3.03	3	10.72	-28.49	-13	15.49	V

*LTE FDD Band 5\_Channel Bandwidth 3MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-34.04	3	3	9.58	-27.46	-13	14.46	H
2509.5	-36.66	3.03	3	10.72	-28.97	-13	15.97	H
1673.0	-34.06	3	3	9.68	-27.38	-13	14.38	V
2509.5	-36.73	3.03	3	10.72	-29.04	-13	16.04	V

*LTE FDD Band 5\_Channel Bandwidth 3MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1695.0	-34.29	3	3	9.58	-27.71	-13	14.71	H
2542.5	-36.40	3.03	3	10.72	-28.71	-13	15.71	H
1695.0	-34.25	3	3	9.68	-27.57	-13	14.57	V
2542.5	-36.08	3.03	3	10.72	-28.39	-13	15.39	V

*LTE FDD Band 5\_Channel Bandwidth 5MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1653.0	-34.29	3	3	9.58	-27.71	-13	14.71	H
2479.5	-36.40	3.03	3	10.72	-28.71	-13	15.71	H
1653.0	-34.25	3	3	9.68	-27.57	-13	14.57	V
2479.5	-36.08	3.03	3	10.72	-28.39	-13	15.39	V

*LTE FDD Band 5\_Channel Bandwidth 5MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-34.46	3	3	9.58	-27.88	-13	14.88	H
2509.5	-36.07	3.03	3	10.72	-28.38	-13	15.38	H
1673.0	-34.16	3	3	9.68	-27.48	-13	14.48	V
2509.5	-36.26	3.03	3	10.72	-28.57	-13	15.57	V

*LTE FDD Band 5\_Channel Bandwidth 5MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1693.0	-34.30	3	3	9.58	-27.72	-13	14.72	H
2539.5	-35.99	3.03	3	10.72	-28.30	-13	15.30	H
1693.0	-34.18	3	3	9.68	-27.50	-13	14.50	V
2539.5	-36.21	3.03	3	10.72	-28.52	-13	15.52	V

*LTE FDD Band 5\_Channel Bandwidth 10MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1658.0	-34.13	3	3	9.58	-27.55	-13	14.55	H
2487.0	-36.03	3.03	3	10.72	-28.34	-13	15.34	H
1658.0	-33.99	3	3	9.68	-27.31	-13	14.31	V
2487.0	-36.25	3.03	3	10.72	-28.56	-13	15.56	V

*LTE FDD Band 5\_Channel Bandwidth 10MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-34.05	3	3	9.58	-27.47	-13	14.47	H
2509.5	-36.51	3.03	3	10.72	-28.82	-13	15.82	H
1673.0	-34.07	3	3	9.68	-27.39	-13	14.39	V
2509.5	-36.05	3.03	3	10.72	-28.36	-13	15.36	V

*LTE FDD Band 5\_Channel Bandwidth 10MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1688.0	-34.17	3	3	9.58	-27.59	-13	14.59	H
2532.0	-36.13	3.03	3	10.72	-28.44	-13	15.44	H
1688.0	-34.20	3	3	9.68	-27.52	-13	14.52	V
2532.0	-36.74	3.03	3	10.72	-29.05	-13	16.05	V

*LTE FDD Band 5\_Channel Bandwidth 1.4MHz\_16QAM\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1649.4	-34.06	3	3	9.58	-27.48	-13	14.48	H
2474.1	-36.67	3.03	3	10.72	-28.98	-13	15.98	H
1649.4	-34.15	3	3	9.68	-27.47	-13	14.47	V
2474.1	-36.30	3.03	3	10.72	-28.61	-13	15.61	V

*LTE FDD Band 5\_Channel Bandwidth 1.4MHz\_16QAM\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-34.25	3	3	9.58	-27.67	-13	14.67	H
2509.5	-36.40	3.03	3	10.72	-28.71	-13	15.71	H
1673.0	-34.18	3	3	9.68	-27.50	-13	14.50	V
2509.5	-36.16	3.03	3	10.72	-28.47	-13	15.47	V



## LTE FDD Band 5\_Channel Bandwidth 1.4MHz\_16QAM\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1696.6	-34.23	3	3	9.58	-27.65	-13	14.65	H
2544.9	-36.77	3.03	3	10.72	-29.08	-13	16.08	H
1696.6	-34.49	3	3	9.68	-27.81	-13	14.81	V
2544.9	-36.18	3.03	3	10.72	-28.49	-13	15.49	V

## LTE FDD Band 5\_Channel Bandwidth 3MHz\_16QAM\_Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1651.0	-34.52	3	3	9.58	-27.94	-13	14.94	H
2476.5	-36.35	3.03	3	10.72	-28.66	-13	15.66	H
1651.0	-34.80	3	3	9.68	-28.12	-13	15.12	V
2476.5	-36.47	3.03	3	10.72	-28.78	-13	15.78	V

## LTE FDD Band 5\_Channel Bandwidth 3MHz\_16QAM\_Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-34.88	3	3	9.58	-28.30	-13	15.30	H
2509.5	-36.63	3.03	3	10.72	-28.94	-13	15.94	H
1673.0	-34.40	3	3	9.68	-27.72	-13	14.72	V
2509.5	-36.49	3.03	3	10.72	-28.80	-13	15.80	V

## LTE FDD Band 5\_Channel Bandwidth 3MHz\_16QAM\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1695.0	-34.11	3	3	9.58	-27.53	-13	14.53	H
2542.5	-36.60	3.03	3	10.72	-28.91	-13	15.91	H
1695.0	-34.11	3	3	9.68	-27.43	-13	14.43	V
2542.5	-36.16	3.03	3	10.72	-28.47	-13	15.47	V

## LTE FDD Band 5\_Channel Bandwidth 5MHz\_16QAM\_Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1653.0	-34.07	3	3	9.58	-27.49	-13	14.49	H
2479.5	-36.82	3.03	3	10.72	-29.13	-13	16.13	H
1653.0	-34.43	3	3	9.68	-27.75	-13	14.75	V
2479.5	-36.49	3.03	3	10.72	-28.80	-13	15.80	V

## LTE FDD Band 5\_Channel Bandwidth 5MHz\_16QAM\_Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-34.65	3	3	9.58	-28.07	-13	15.07	H
2509.5	-36.16	3.03	3	10.72	-28.47	-13	15.47	H
1673.0	-34.57	3	3	9.68	-27.89	-13	14.89	V
2509.5	-36.66	3.03	3	10.72	-28.97	-13	15.97	V

## LTE FDD Band 5\_Channel Bandwidth 5MHz\_16QAM\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1693.0	-34.62	3	3	9.58	-28.04	-13	15.04	H
2539.5	-36.42	3.03	3	10.72	-28.73	-13	15.73	H
1693.0	-34.46	3	3	9.68	-27.78	-13	14.78	V
2539.5	-36.56	3.03	3	10.72	-28.87	-13	15.87	V

*LTE FDD Band 5\_Channel Bandwidth 10MHz\_16QAM \_ Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1658.0	-34.64	3	3	9.58	-28.06	-13	15.06	H
2487.0	-36.22	3.03	3	10.72	-28.53	-13	15.53	H
1658.0	-33.99	3	3	9.68	-27.31	-13	14.31	V
2487.0	-36.08	3.03	3	10.72	-28.39	-13	15.39	V

*LTE FDD Band 5\_Channel Bandwidth 10MHz\_16QAM \_ Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-34.18	3	3	9.58	-27.60	-13	14.60	H
2509.5	-36.43	3.03	3	10.72	-28.74	-13	15.74	H
1673.0	-34.04	3	3	9.68	-27.36	-13	14.36	V
2509.5	-36.17	3.03	3	10.72	-28.48	-13	15.48	V

*LTE FDD Band 5\_Channel Bandwidth 10MHz\_16QAM \_ High Channel*


Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1688.0	-34.64	3	3	9.58	-28.06	-13	15.06	H
2532.0	-36.64	3.03	3	10.72	-28.95	-13	15.95	H
1688.0	-34.39	3	3	9.68	-27.71	-13	14.71	V
2532.0	-36.08	3.03	3	10.72	-28.39	-13	15.39	V

## 4.7 Frequency Stability

### LIMIT

According to §2.1055 & §22.355 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

### TEST CONFIGURATION

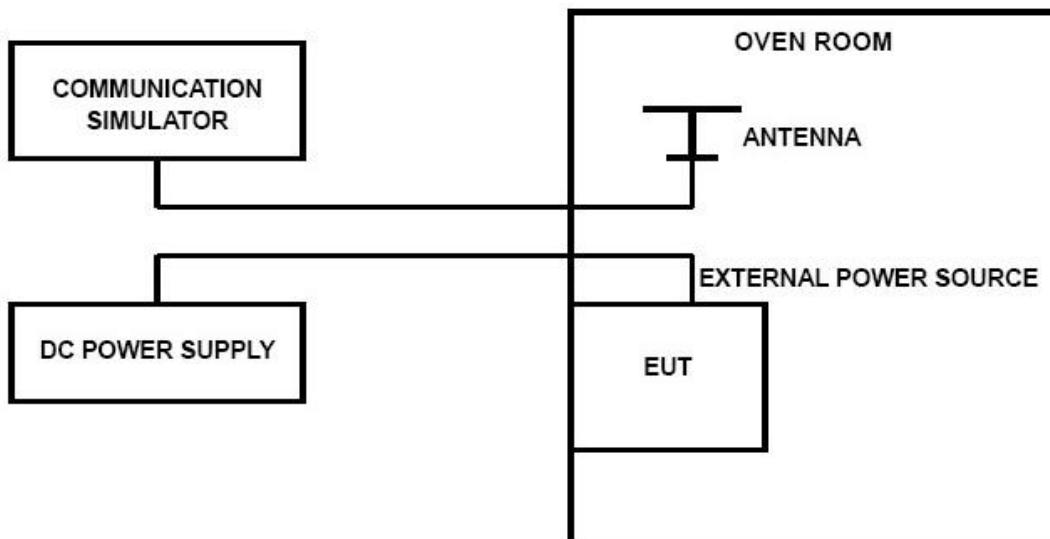

### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

#### **Frequency Stability Under Temperature Variations:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE Band 5, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

#### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

### TEST RESULTS

*Remark:*



1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case.

LTE Band 5, 1.4MHz bandwidth, QPSK (worst case of all bandwidths)-low channel

<b>LTE FDD Band 5</b>					
<b>DC Power</b>	<b>Temperature (°C)</b>	<b>Frequency error(Hz)</b>	<b>Frequency error(ppm)</b>	<b>Limit (ppm)</b>	<b>Verdict</b>
3.40	20	9.80	0.011887	2.50	PASS
3.70	20	-9.78	-0.011854	2.50	PASS
4.20	20	-5.08	-0.006159	2.50	PASS
3.70	-30	12.74	0.015446	2.50	PASS
3.70	-20	10.07	0.012205	2.50	PASS
3.70	-10	5.45	0.006609	2.50	PASS
3.70	0	-5.39	-0.006535	2.50	PASS
3.70	10	-1.95	-0.002367	2.50	PASS
3.70	20	-10.10	-0.012245	2.50	PASS
3.70	30	-13.62	-0.016520	2.50	PASS
3.70	40	4.34	0.005258	2.50	PASS
3.70	50	9.30	0.011282	2.50	PASS




LTE Band 5, 1.4MHz bandwidth , 16QAM (worst case of all bandwidths)


<b>LTE FDD Band 5</b>					
<b>DC Power</b>	<b>Temperature (°C)</b>	<b>Frequency error(Hz)</b>	<b>Frequency error(ppm)</b>	<b>Limit (ppm)</b>	<b>Verdict</b>
3.42V	20	5.41	0.002877	2.50	PASS
3.80V	20	-11.07	-0.005886	2.50	PASS
4.18V	20	-3.22	-0.001712	2.50	PASS
3.80V	-30	1.49	0.000792	2.50	PASS
3.80V	-20	11.71	0.006227	2.50	PASS
3.80V	-10	1.20	0.000640	2.50	PASS
3.80V	0	-9.19	-0.004889	2.50	PASS
3.80V	10	6.99	0.003719	2.50	PASS
3.80V	20	-7.95	-0.004229	2.50	PASS
3.80V	30	-7.95	-0.004230	2.50	PASS
3.80V	40	4.33	0.002302	2.50	PASS
3.80V	50	15.43	0.008208	2.50	PASS

## 5 Test Setup Photos of the EUT

30MHz-1000MHz

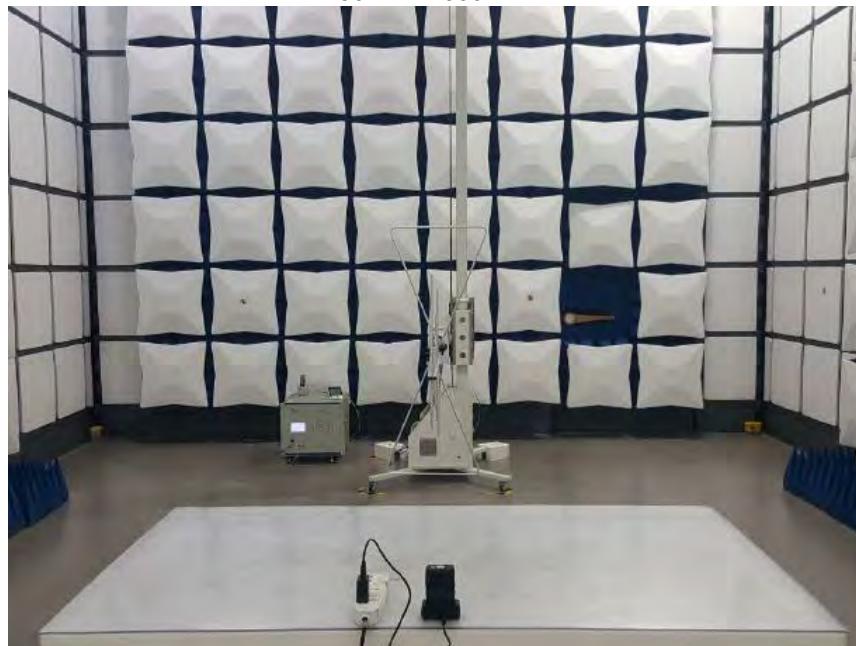

Above 1000MHz

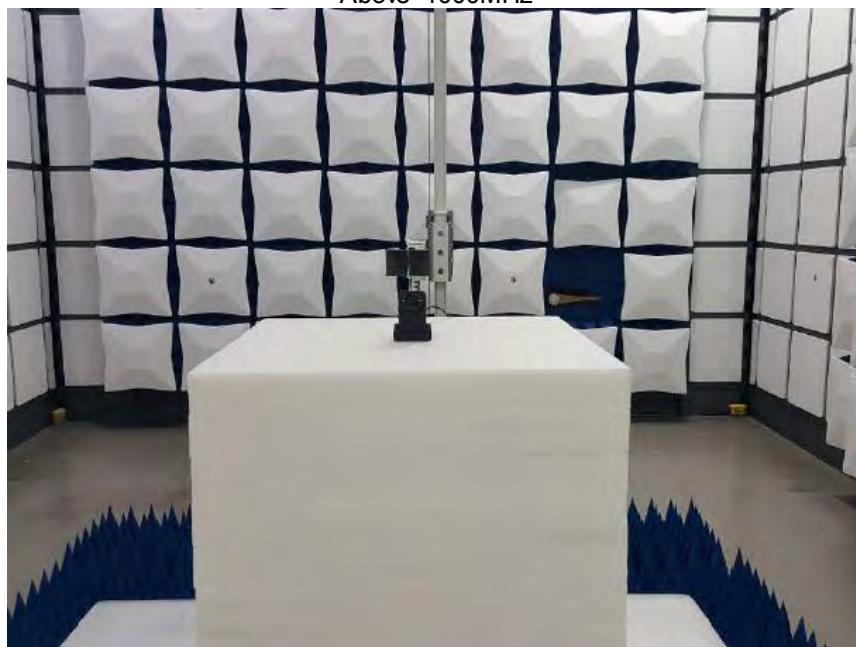



Conducted Emission





## **6 Photos of the EUT**

Please refer to the report No.: HK2008072128-1E

\*\*\*\*\*End of Report\*\*\*\*\*