



## Appendix C

### RF Test Data for 2.4GWIFI(Conducted Measurement)

Product Name: All in one

Test Model: D10

#### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 23.8°C     |
| Relative Humidity: | 52.1%      |
| ATM Pressure:      | 100.0 kPa  |
| Test Engineer:     | Paddi Chen |
| Supervised by:     | Nick Peng  |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## C.1 -6dB Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | b    | 2412            | Ant1    | 7.925                 | $\geq 0.5$                  | Pass    |
| NVNT      | b    | 2437            | Ant1    | 7.656                 | $\geq 0.5$                  | Pass    |
| NVNT      | b    | 2462            | Ant1    | 7.43                  | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2412            | Ant1    | 16.32                 | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2437            | Ant1    | 16.122                | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2462            | Ant1    | 16.347                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 16.286                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2437            | Ant1    | 17.591                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 16.831                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 2422            | Ant1    | 33.798                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 2437            | Ant1    | 36.2                  | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 2452            | Ant1    | 35.395                | $\geq 0.5$                  | Pass    |
| NVNT      | ax20 | 2412            | Ant1    | 17.235                | $\geq 0.5$                  | Pass    |
| NVNT      | ax20 | 2437            | Ant1    | 16.842                | $\geq 0.5$                  | Pass    |
| NVNT      | ax20 | 2462            | Ant1    | 17.117                | $\geq 0.5$                  | Pass    |
| NVNT      | ax40 | 2422            | Ant1    | 35.65                 | $\geq 0.5$                  | Pass    |
| NVNT      | ax40 | 2437            | Ant1    | 35.774                | $\geq 0.5$                  | Pass    |
| NVNT      | ax40 | 2452            | Ant1    | 35.529                | $\geq 0.5$                  | Pass    |





## Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1



-6dB Bandwidth NVNT b 2437MHz Ant1



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT b 2462MHz Ant1



## -6dB Bandwidth NVNT g 2412MHz Ant1

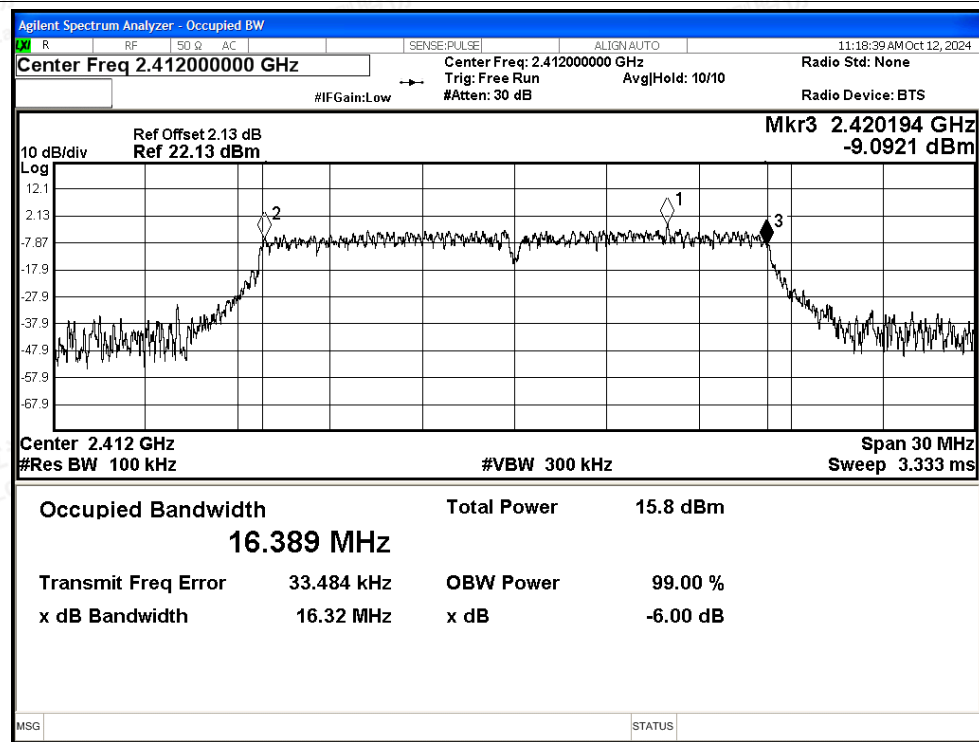

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT g 2437MHz Ant1

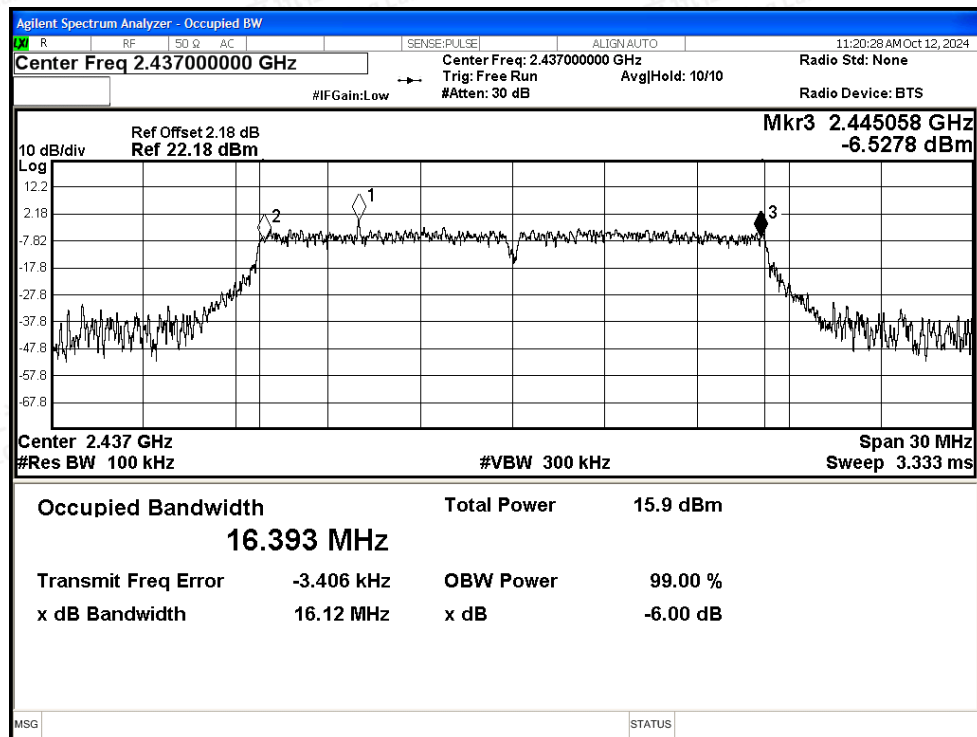

-6dB Bandwidth NVNT g 2462MHz Ant1

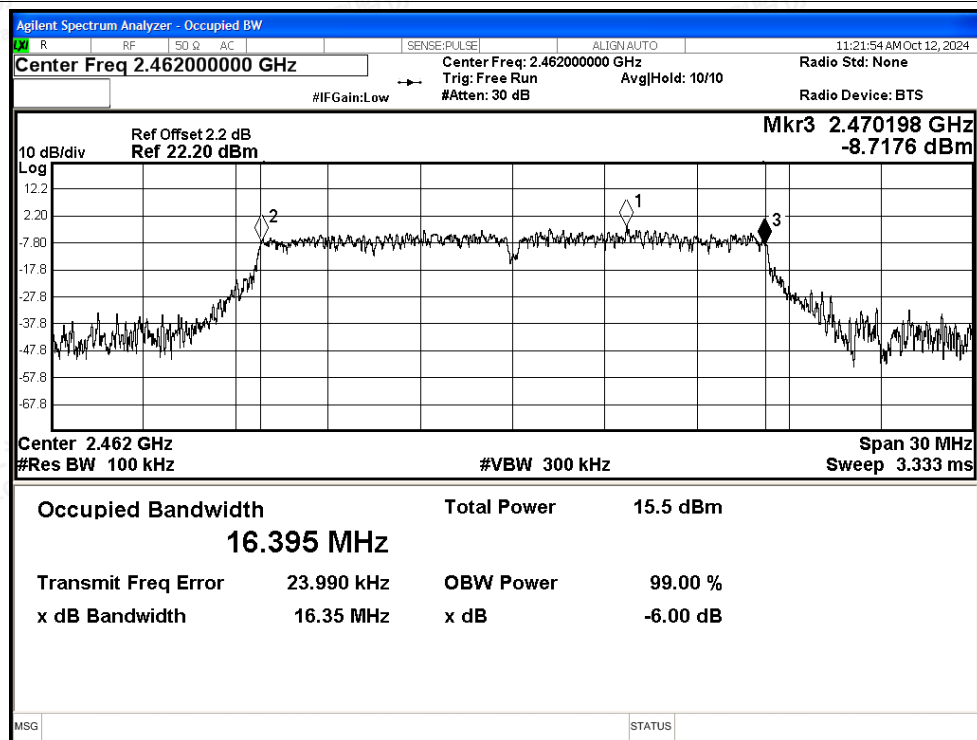

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT n20 2412MHz Ant1

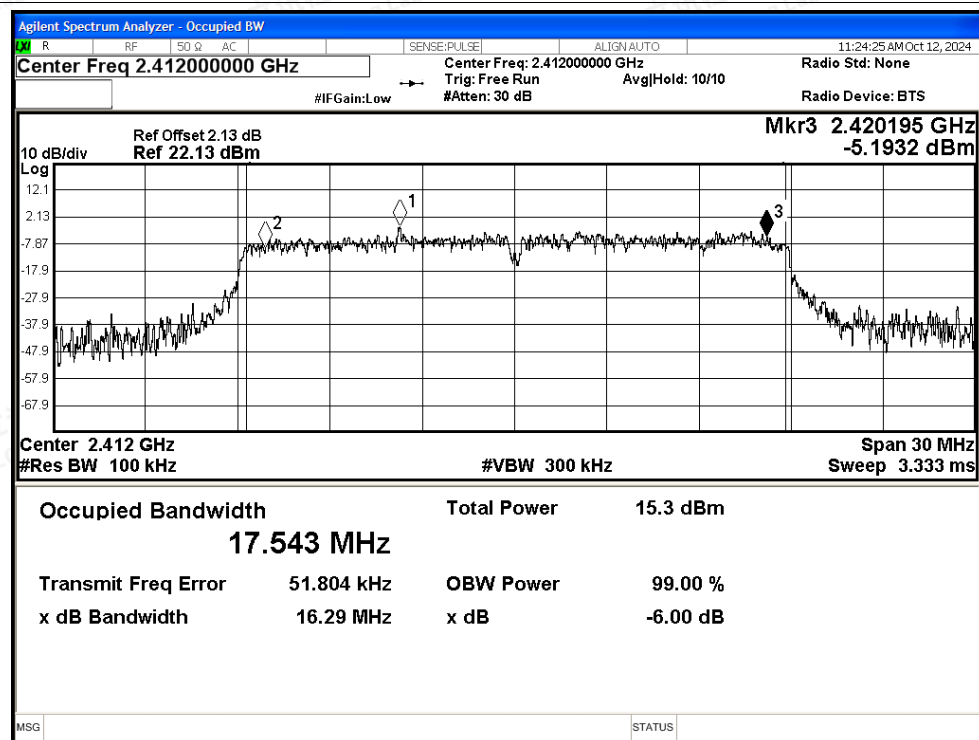

## -6dB Bandwidth NVNT n20 2437MHz Ant1

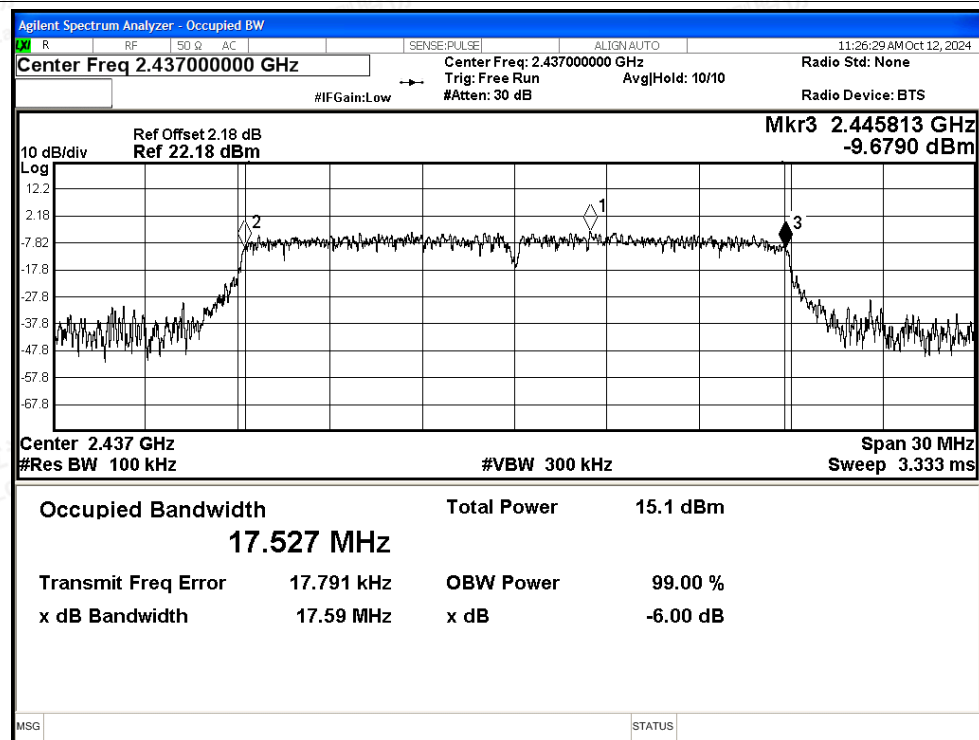

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT n20 2462MHz Ant1

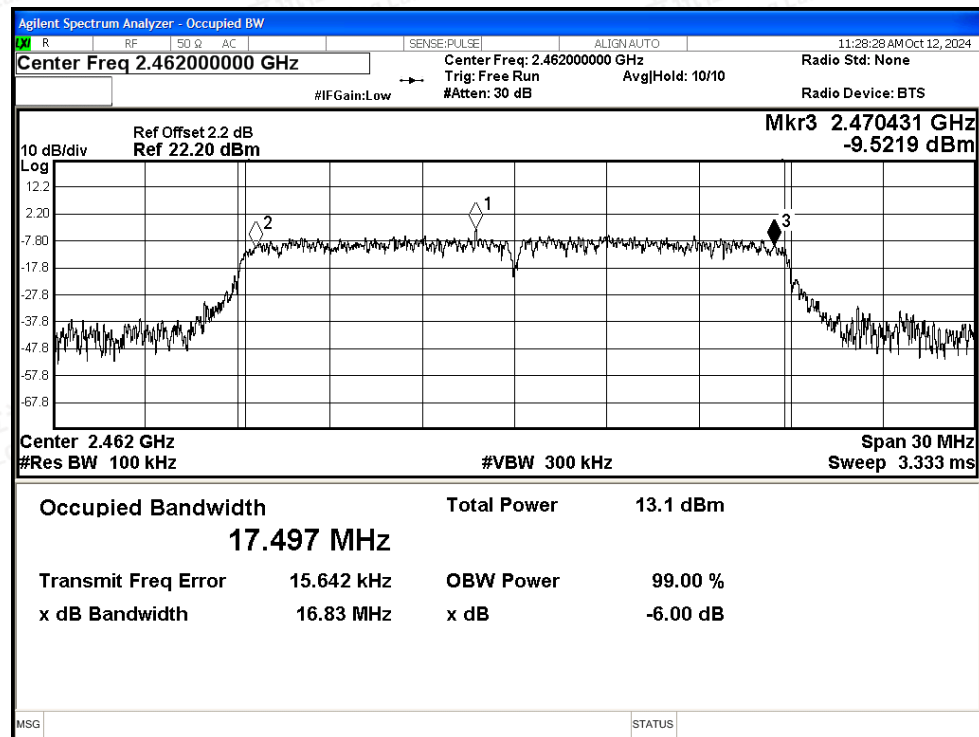

## -6dB Bandwidth NVNT n40 2422MHz Ant1

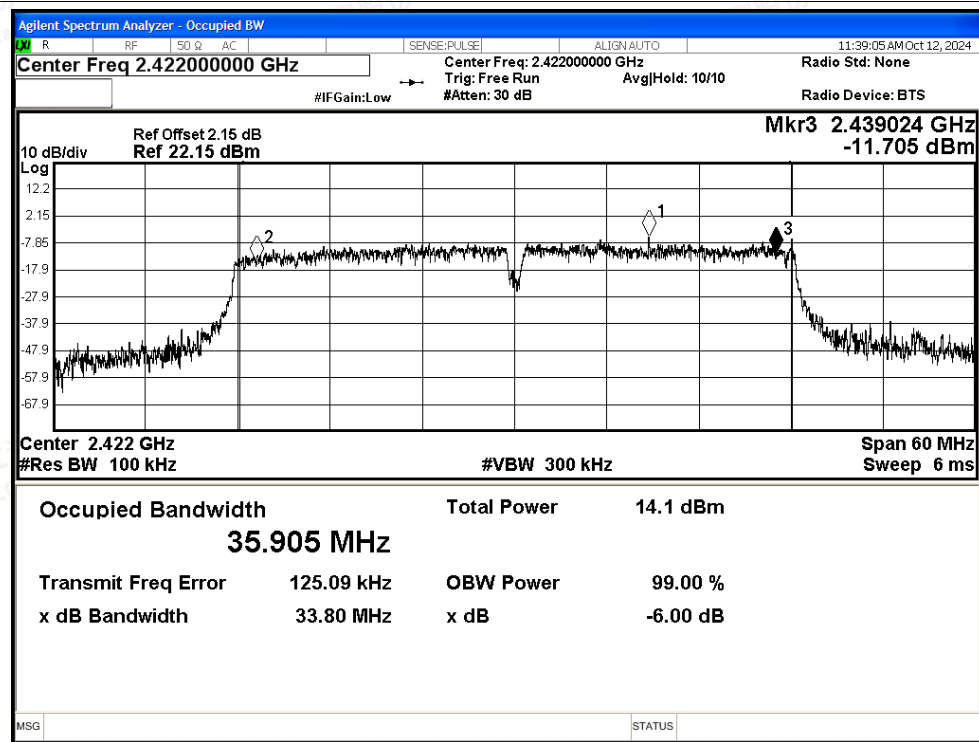

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT n40 2437MHz Ant1

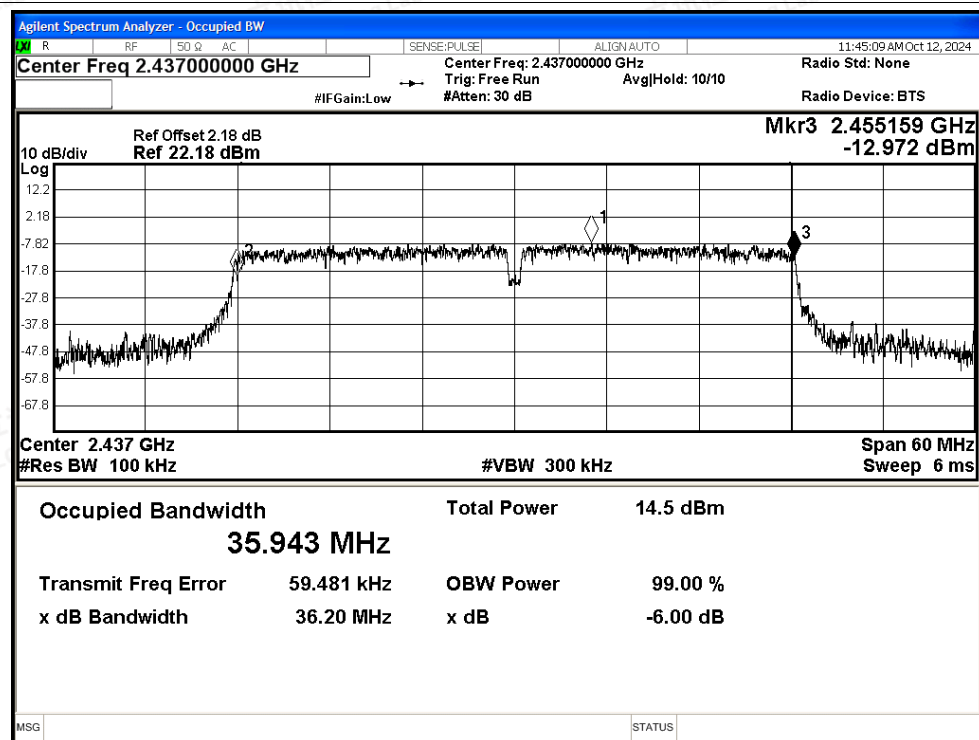

## -6dB Bandwidth NVNT n40 2452MHz Ant1

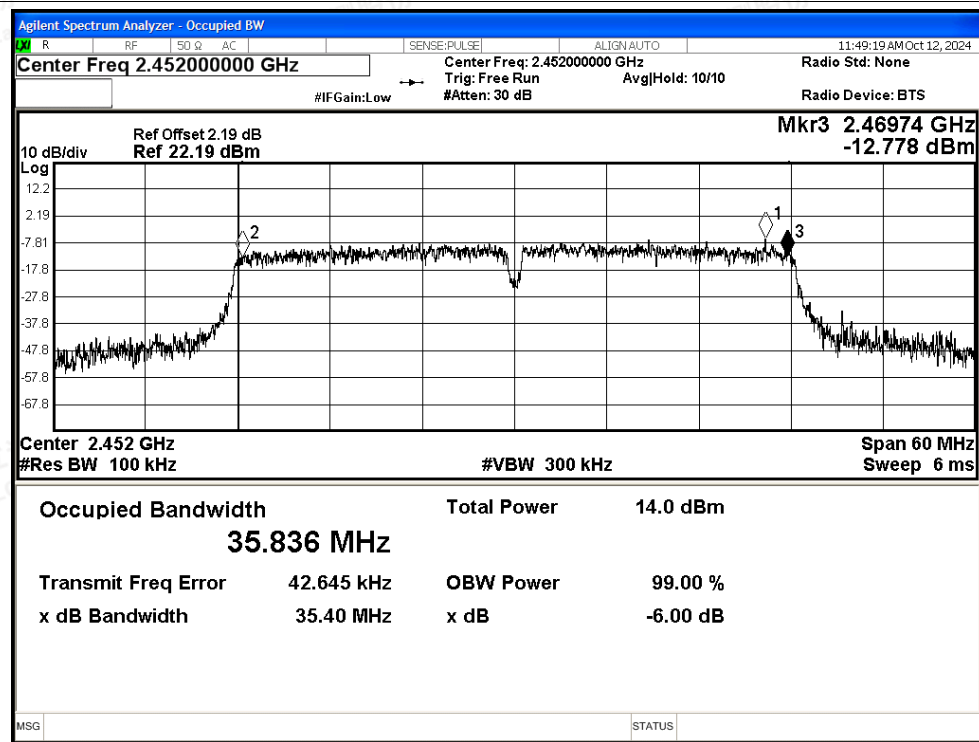

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT ax20 2412MHz Ant1

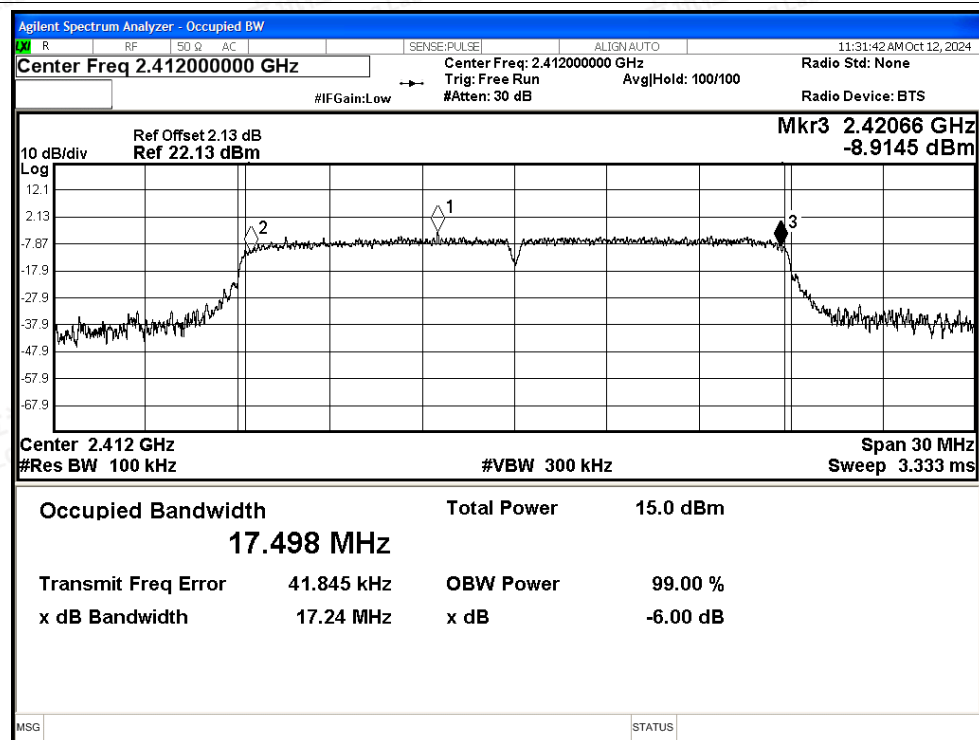

## -6dB Bandwidth NVNT ax20 2437MHz Ant1

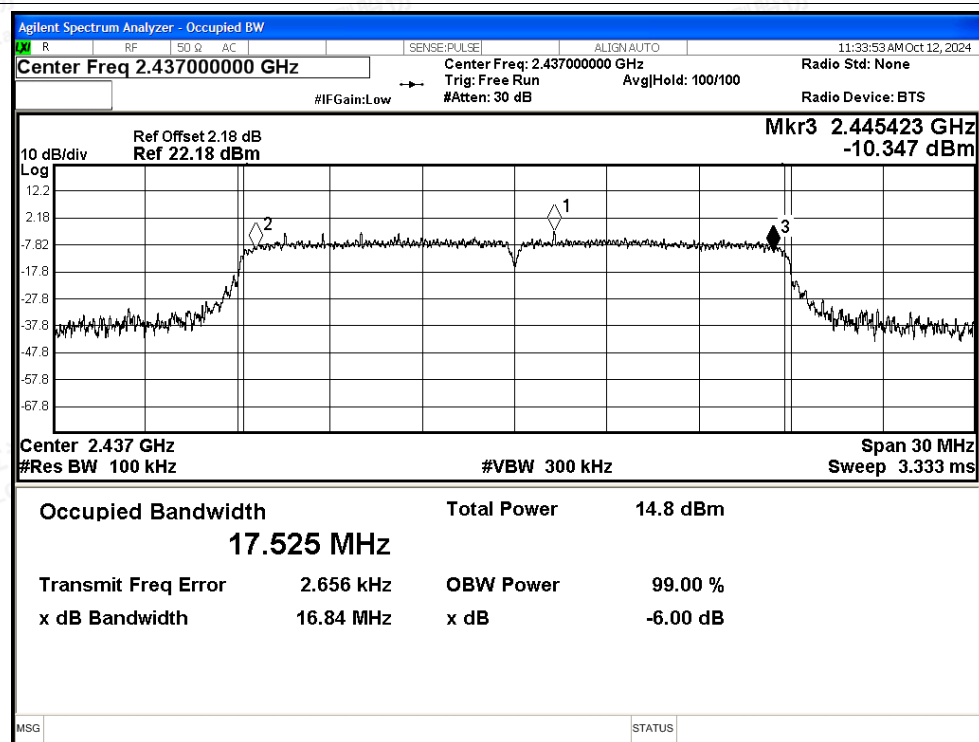

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT ax20 2462MHz Ant1

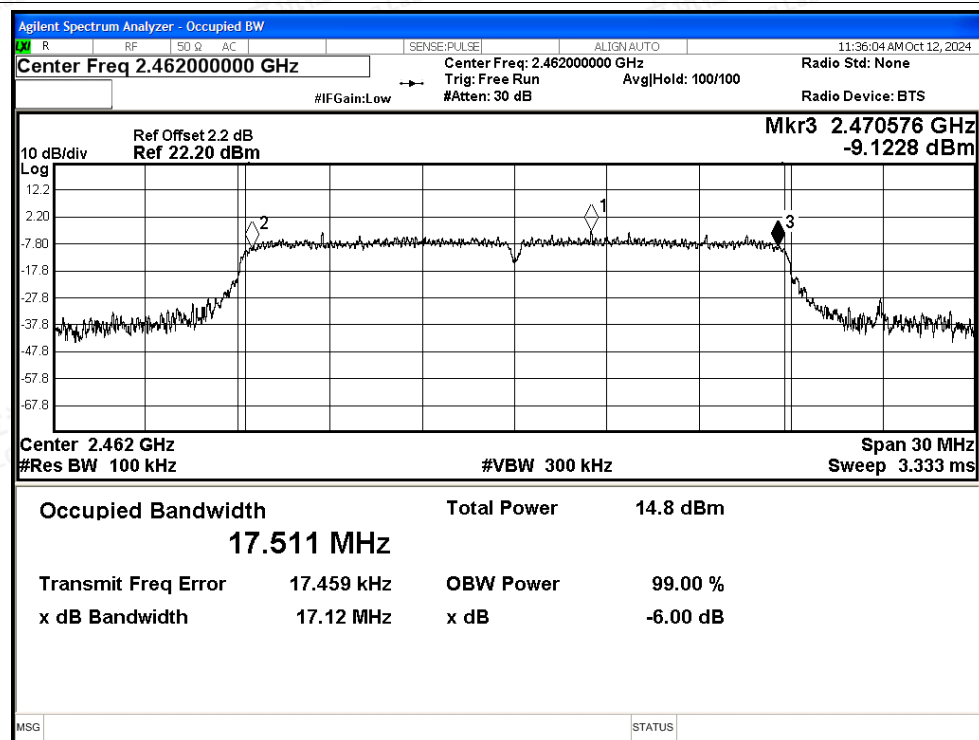

## -6dB Bandwidth NVNT ax40 2422MHz Ant1

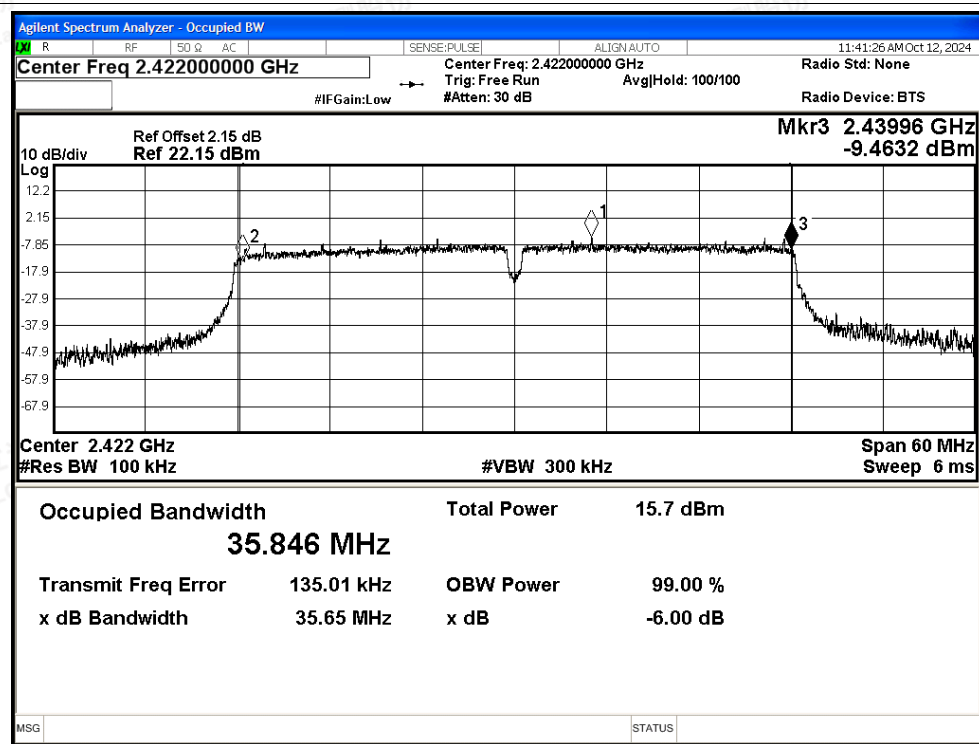

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT ax40 2437MHz Ant1

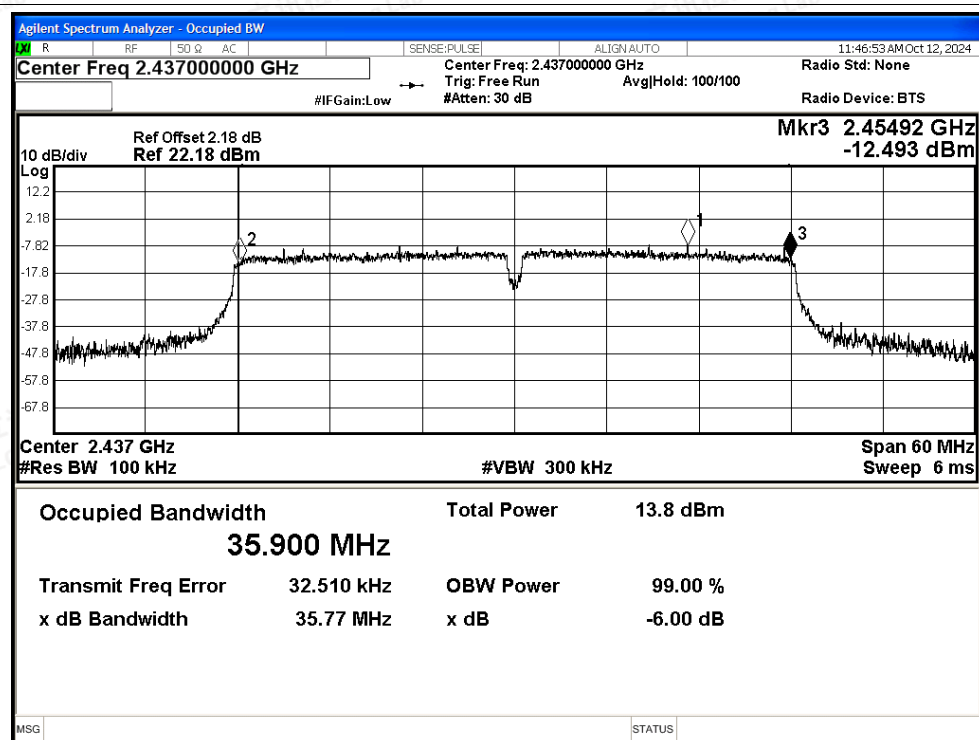

## -6dB Bandwidth NVNT ax40 2452MHz Ant1

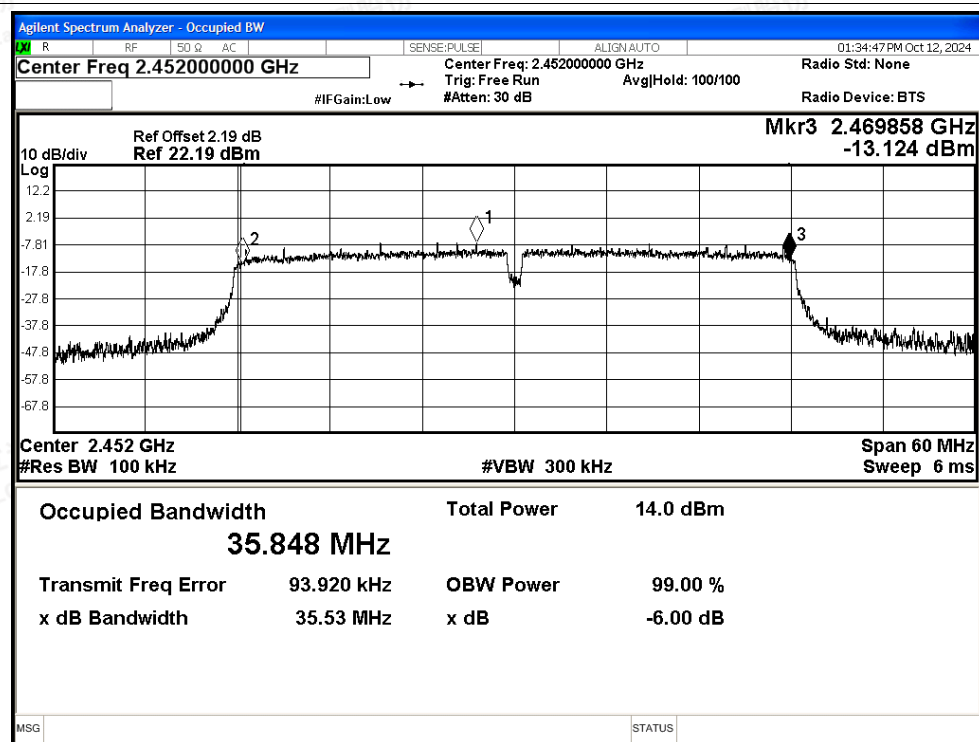

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## C.2 Maximum Peak Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | 15.39                 | 30          | Pass    |
| NVNT      | b    | 2437            | Ant1    | 15.46                 | 30          | Pass    |
| NVNT      | b    | 2462            | Ant1    | 15.16                 | 30          | Pass    |
| NVNT      | g    | 2412            | Ant1    | 14.64                 | 30          | Pass    |
| NVNT      | g    | 2437            | Ant1    | 14.46                 | 30          | Pass    |
| NVNT      | g    | 2462            | Ant1    | 14.42                 | 30          | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 13.83                 | 30          | Pass    |
| NVNT      | n20  | 2437            | Ant1    | 13.85                 | 30          | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 13.48                 | 30          | Pass    |
| NVNT      | n40  | 2422            | Ant1    | 12.53                 | 30          | Pass    |
| NVNT      | n40  | 2437            | Ant1    | 12.87                 | 30          | Pass    |
| NVNT      | n40  | 2452            | Ant1    | 12.25                 | 30          | Pass    |
| NVNT      | ax20 | 2412            | Ant1    | 13.73                 | 30          | Pass    |
| NVNT      | ax20 | 2437            | Ant1    | 13.46                 | 30          | Pass    |
| NVNT      | ax20 | 2462            | Ant1    | 13.47                 | 30          | Pass    |
| NVNT      | ax40 | 2422            | Ant1    | 12.1                  | 30          | Pass    |
| NVNT      | ax40 | 2437            | Ant1    | 12.32                 | 30          | Pass    |
| NVNT      | ax40 | 2452            | Ant1    | 12.48                 | 30          | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



### C.3 Maximum Power Spectral Density Level


| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|-----------|------|-----------------|---------|--------------------------|------------------|---------|
| NVNT      | b    | 2412            | Ant1    | -5.1                     | 8                | Pass    |
| NVNT      | b    | 2437            | Ant1    | -8.72                    | 8                | Pass    |
| NVNT      | b    | 2462            | Ant1    | -8.98                    | 8                | Pass    |
| NVNT      | g    | 2412            | Ant1    | -14.15                   | 8                | Pass    |
| NVNT      | g    | 2437            | Ant1    | -14.75                   | 8                | Pass    |
| NVNT      | g    | 2462            | Ant1    | -13.74                   | 8                | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -14.76                   | 8                | Pass    |
| NVNT      | n20  | 2437            | Ant1    | -13.48                   | 8                | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -16.65                   | 8                | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -19.38                   | 8                | Pass    |
| NVNT      | n40  | 2437            | Ant1    | -18.73                   | 8                | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -19.13                   | 8                | Pass    |
| NVNT      | ax20 | 2412            | Ant1    | -16.3                    | 8                | Pass    |
| NVNT      | ax20 | 2437            | Ant1    | -16.65                   | 8                | Pass    |
| NVNT      | ax20 | 2462            | Ant1    | -16.48                   | 8                | Pass    |
| NVNT      | ax40 | 2422            | Ant1    | -19.36                   | 8                | Pass    |
| NVNT      | ax40 | 2437            | Ant1    | -21.28                   | 8                | Pass    |
| NVNT      | ax40 | 2452            | Ant1    | -21.1                    | 8                | Pass    |






## Test Graphs

PSD NVNT b 2412MHz Ant1

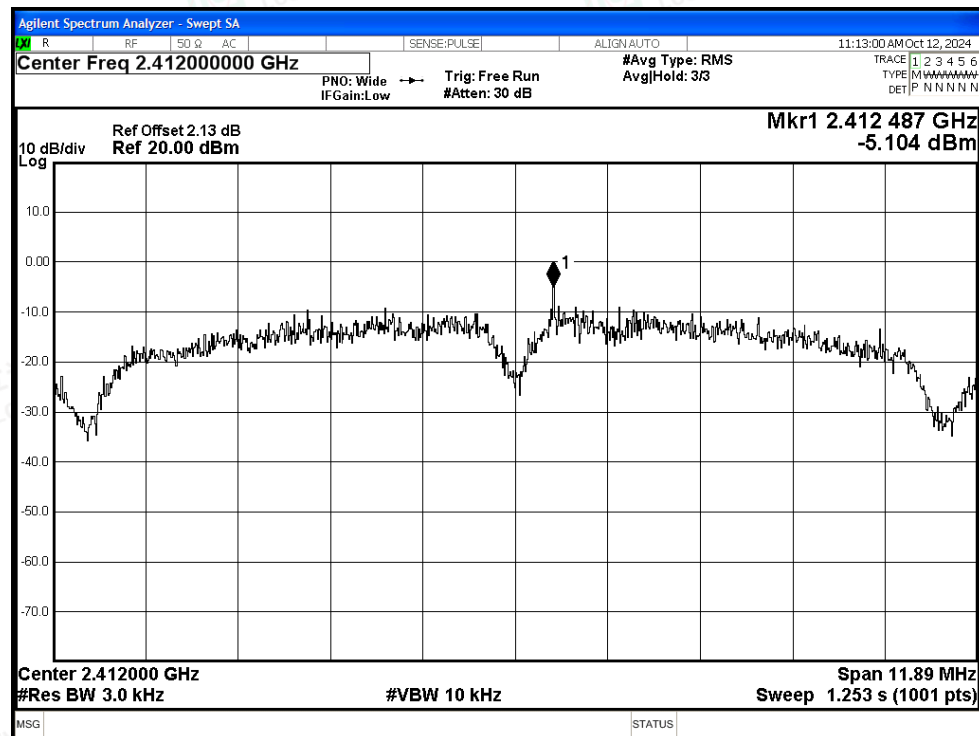

PSD NVNT b 2437MHz Ant1

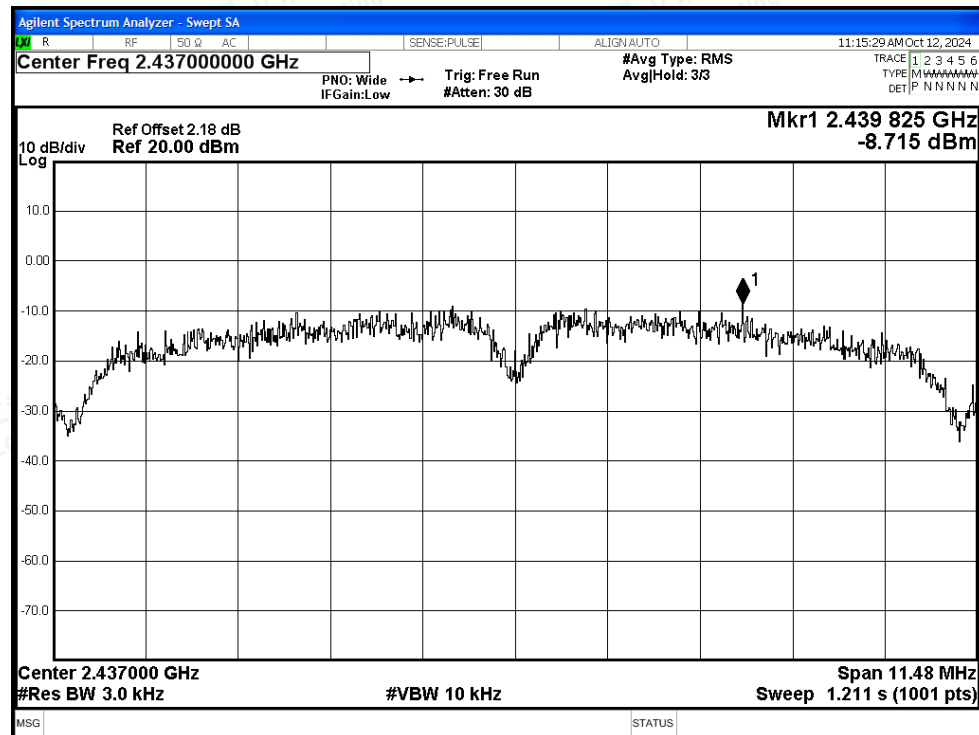

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## PSD NVNT b 2462MHz Ant1

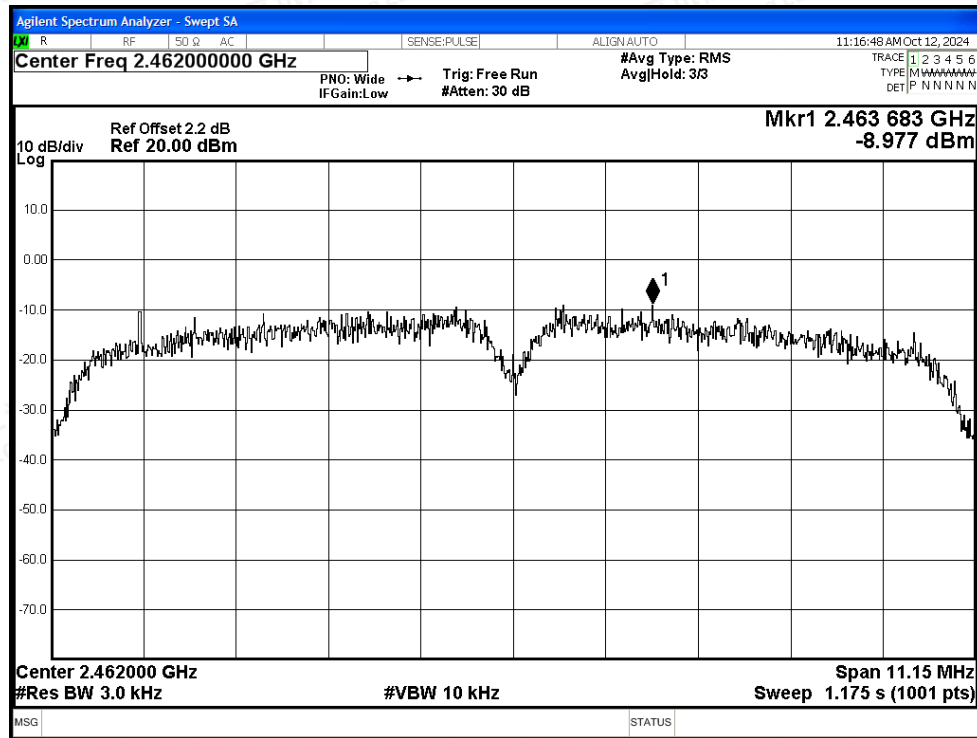


## PSD NVNT g 2412MHz Ant1

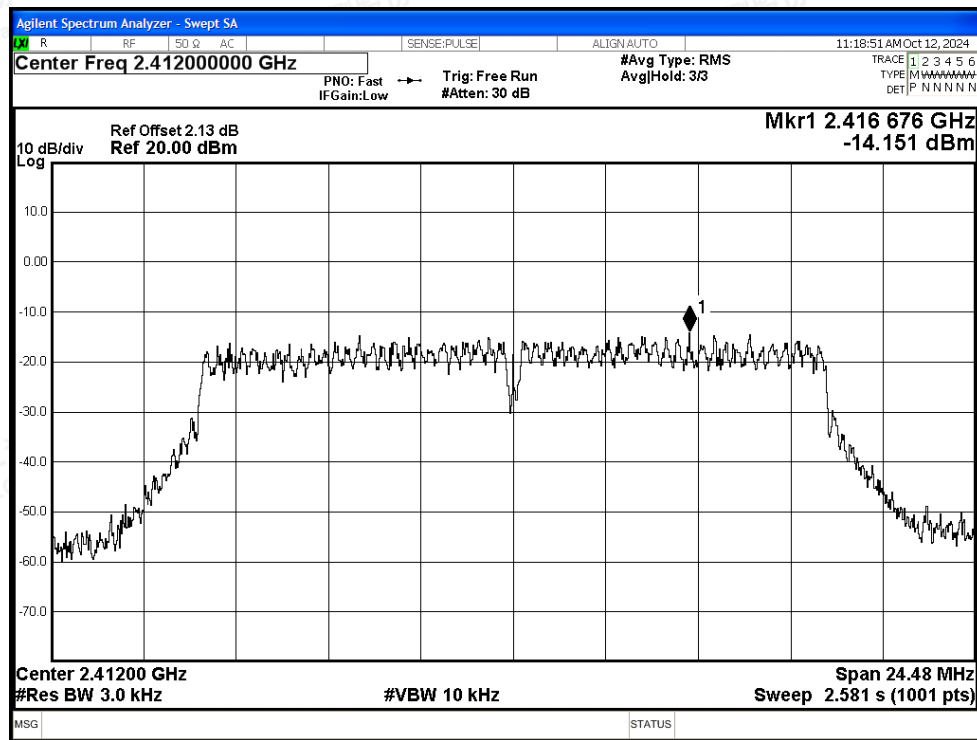








## PSD NVNT g 2437MHz Ant1


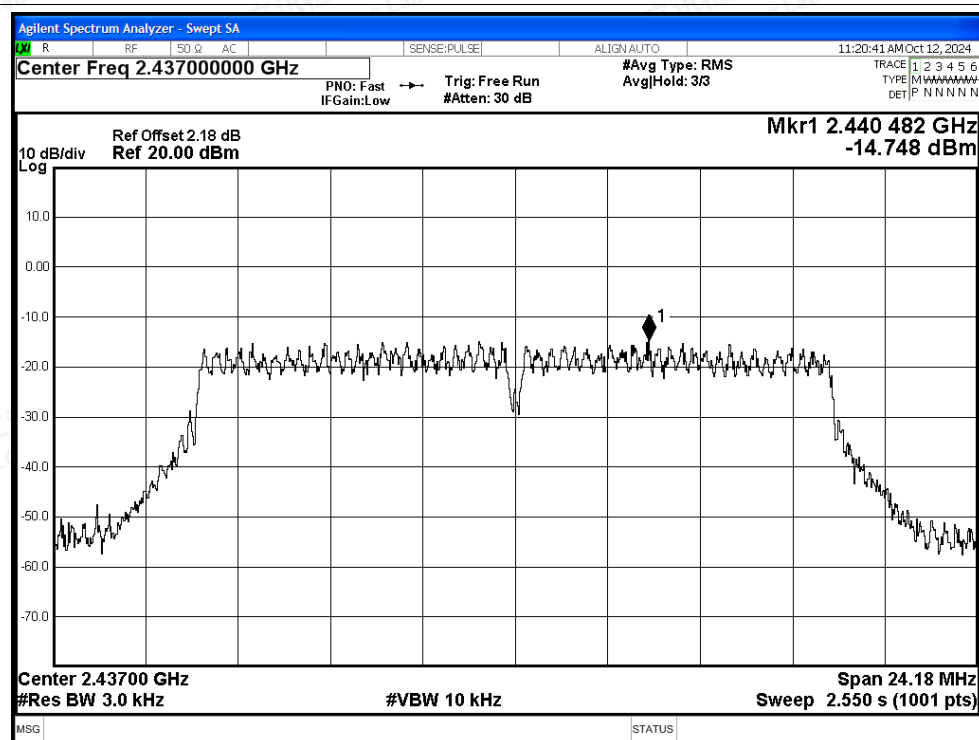




## PSD NVNT g 2462MHz Ant1


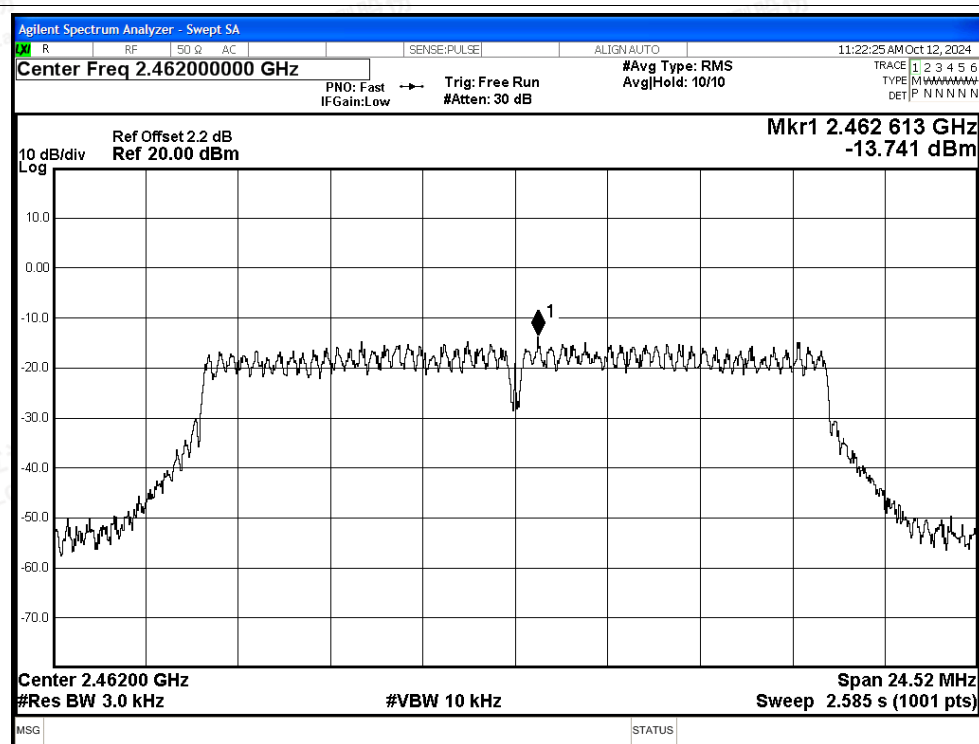


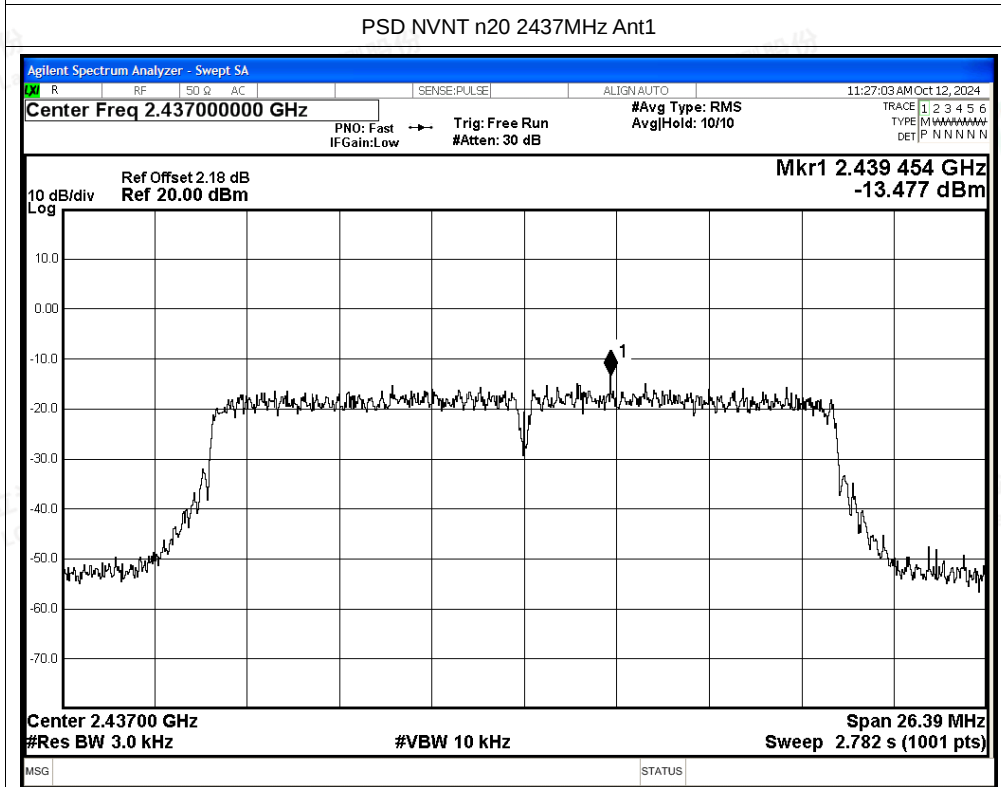
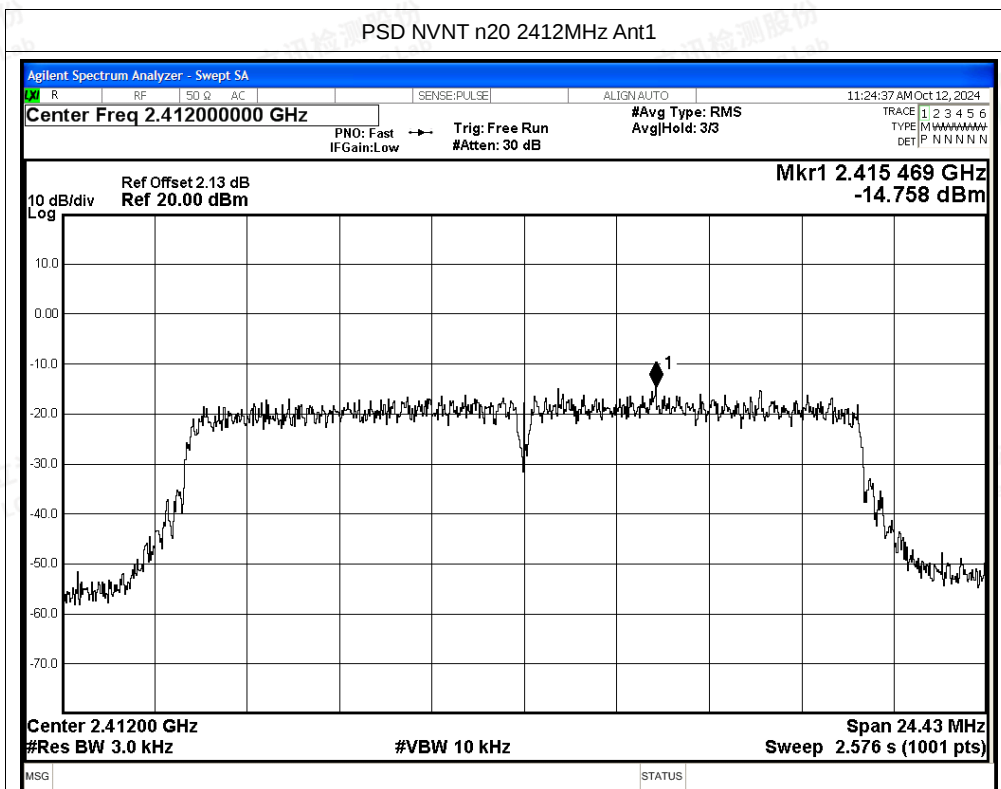


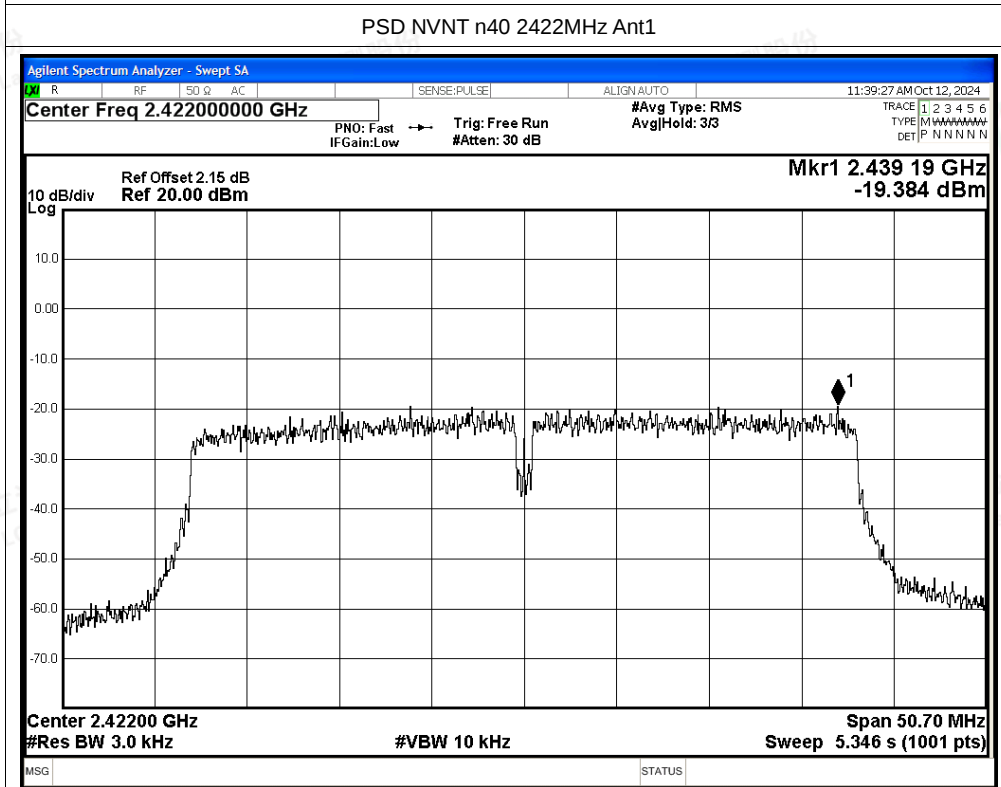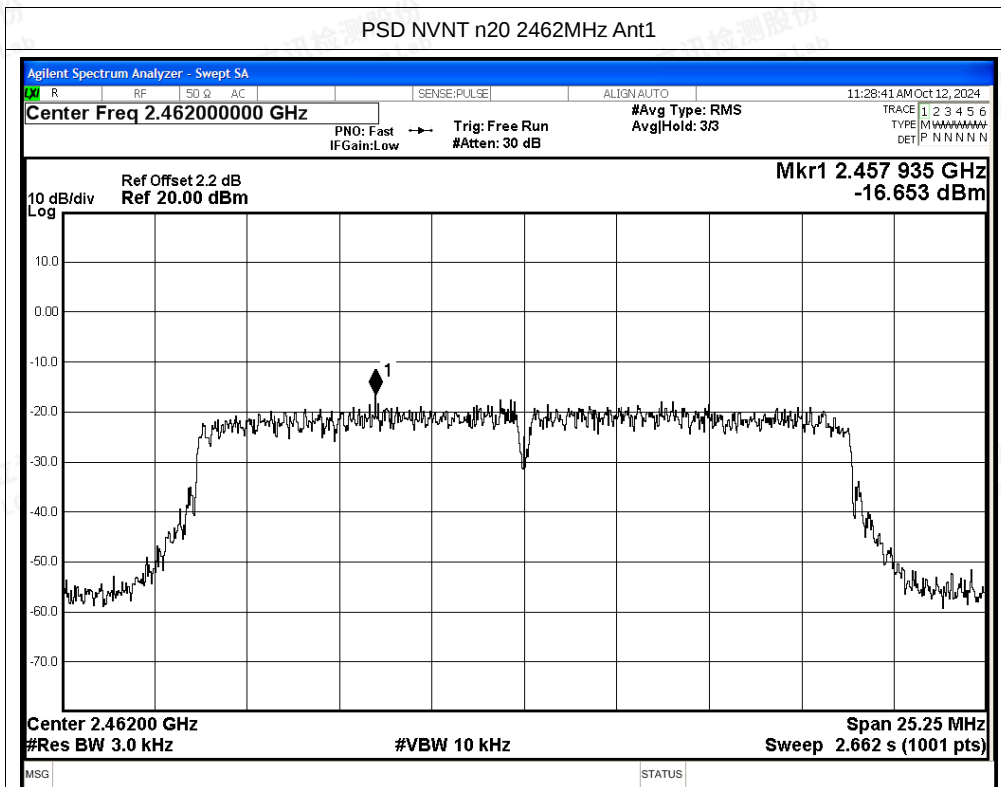

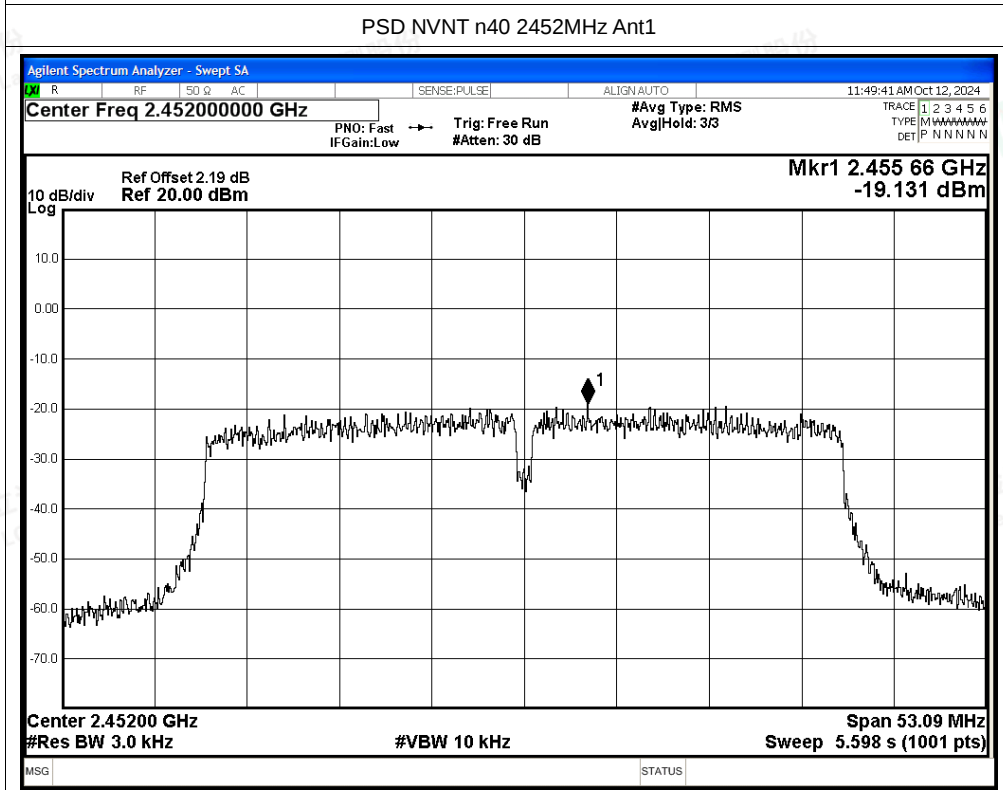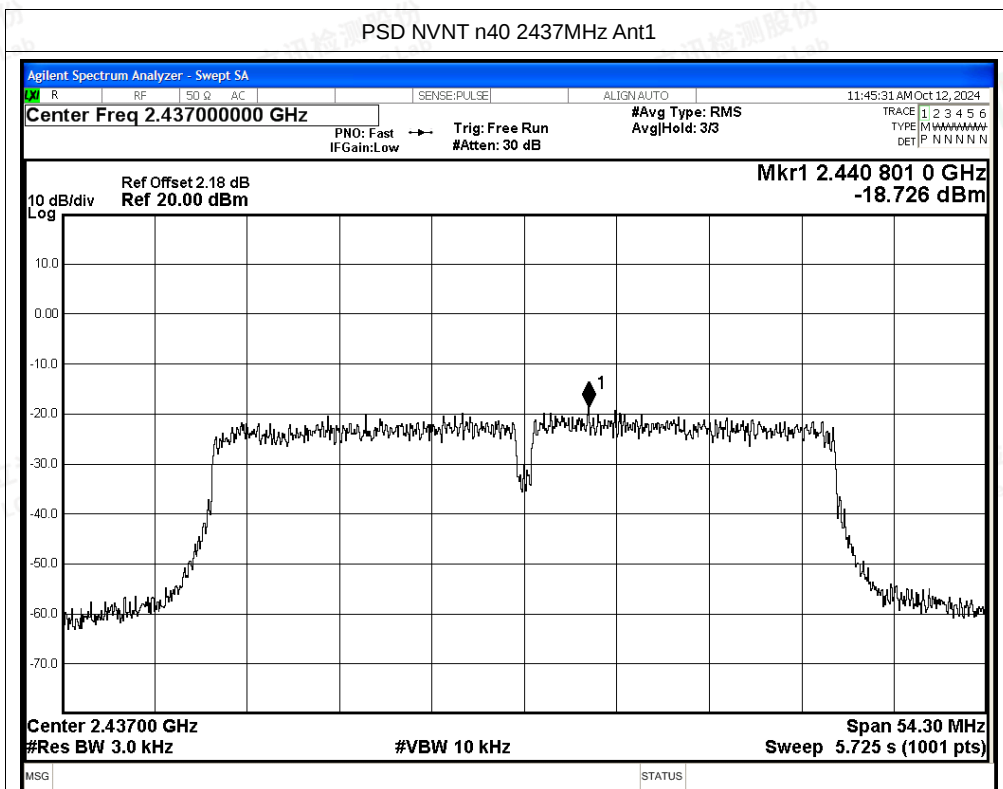

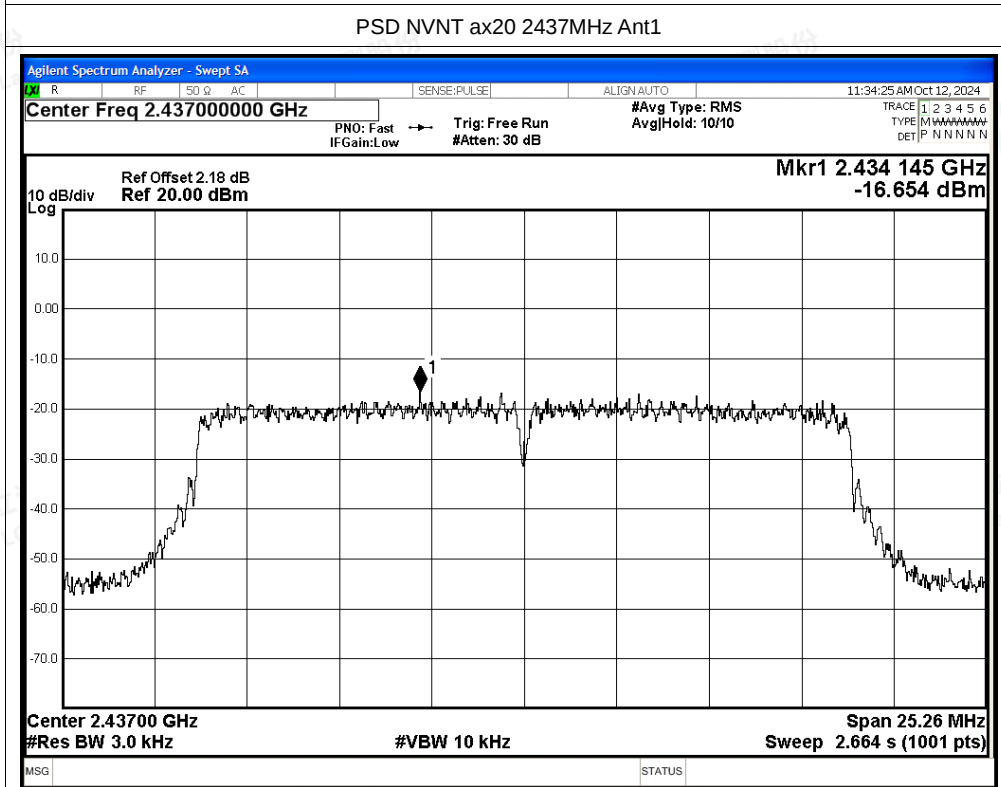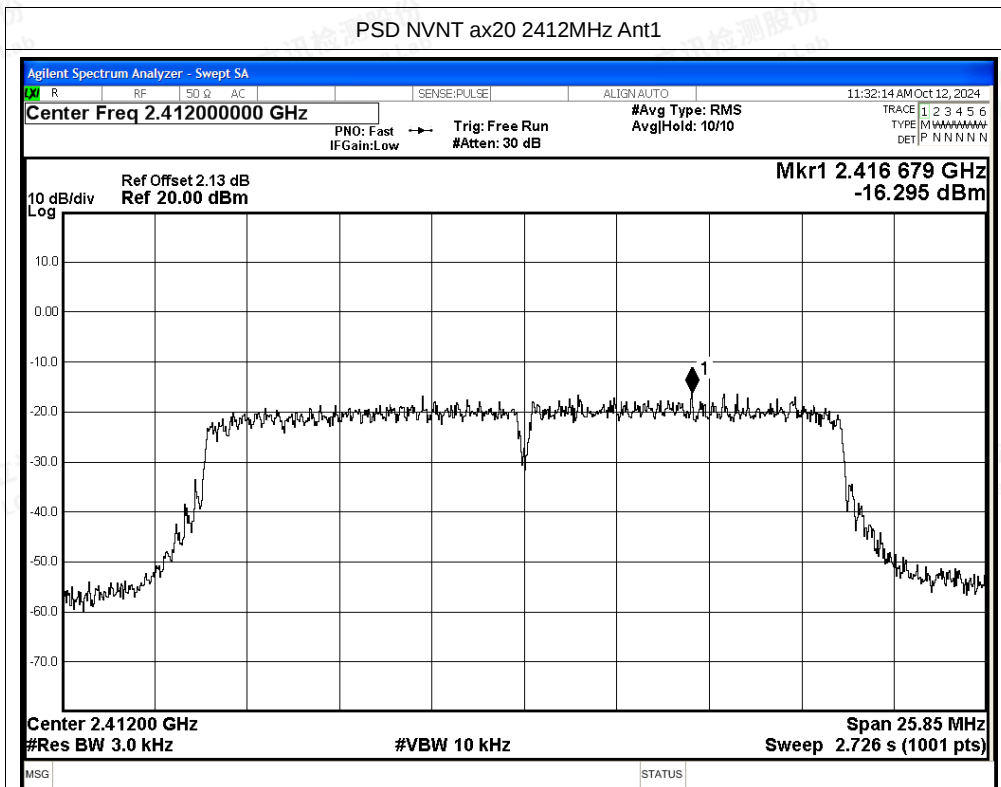

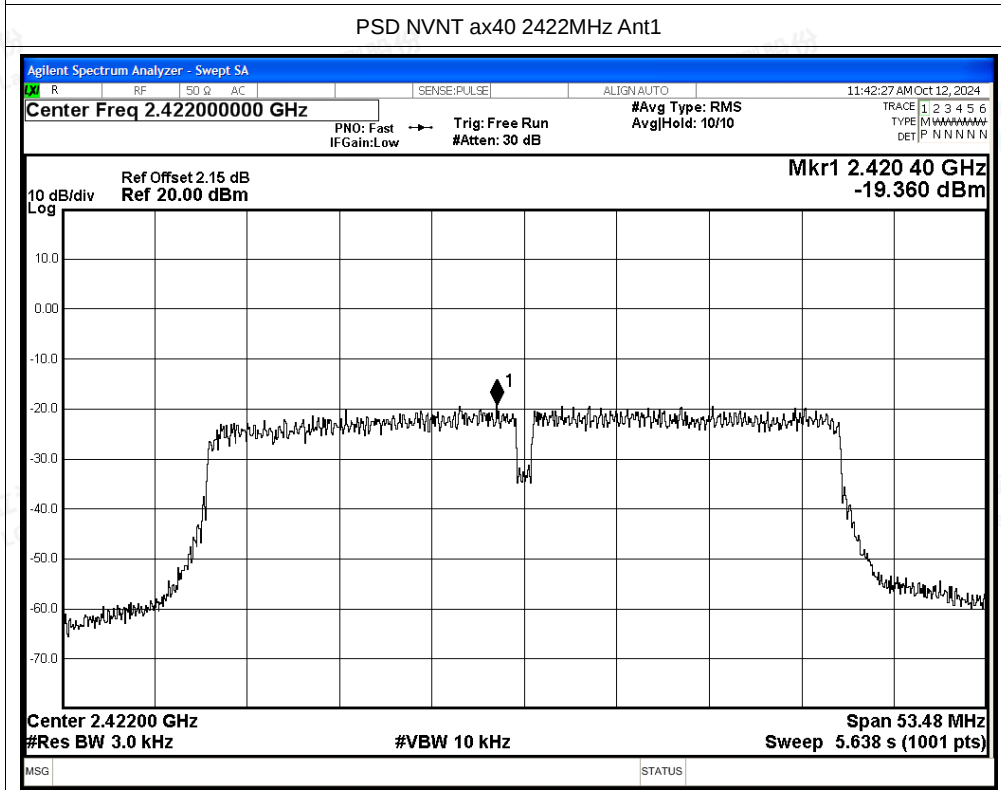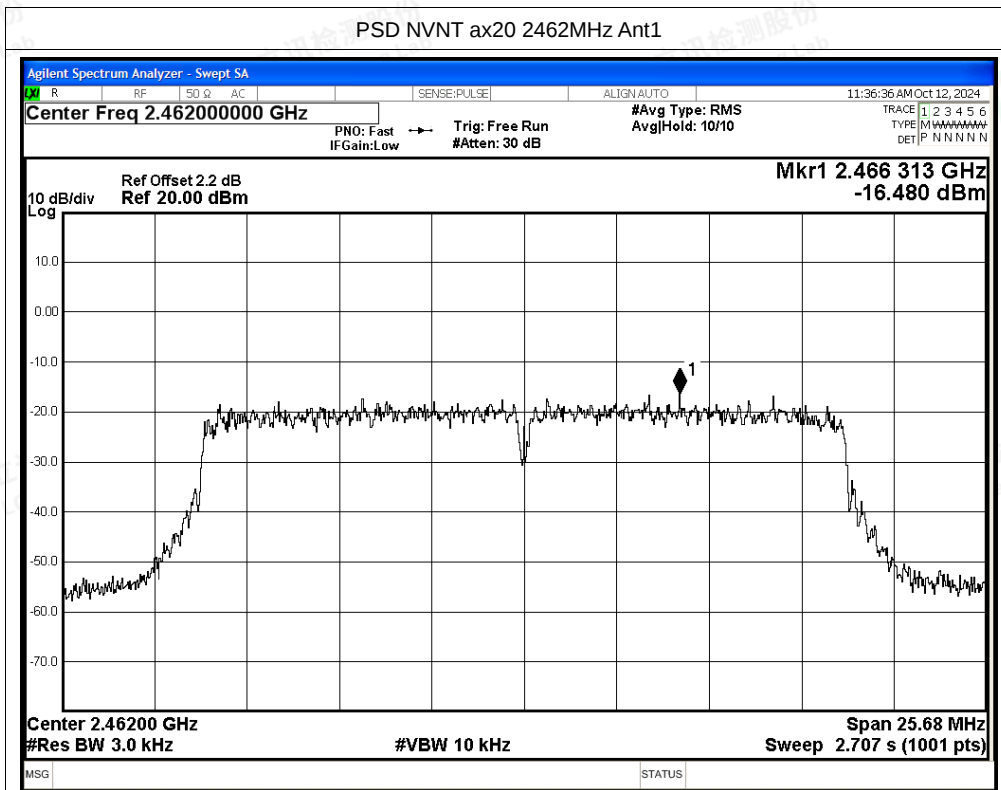

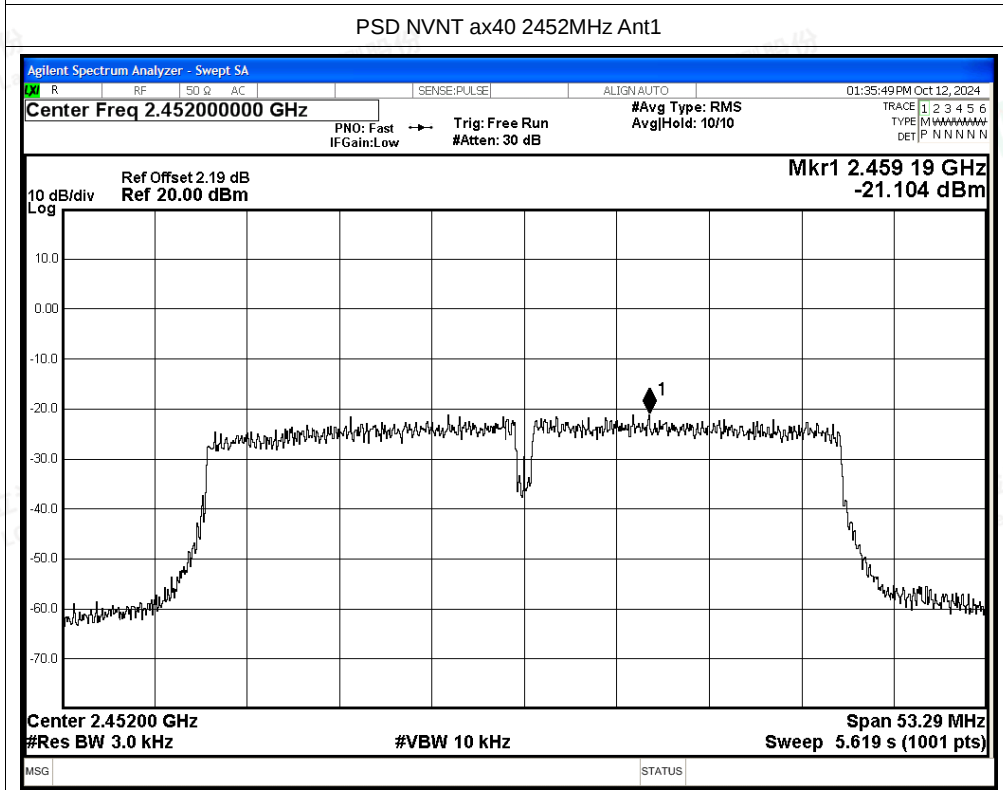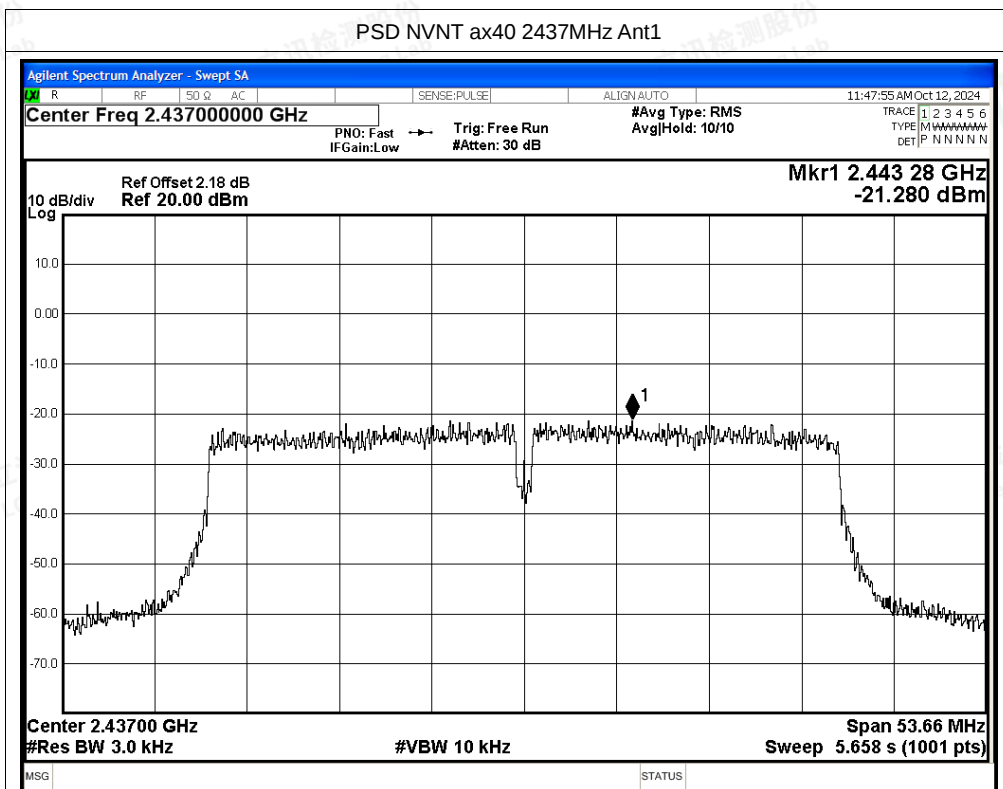



## C.4 Band Edge

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | -48.87          | -20         | Pass    |
| NVNT      | b    | 2462            | Ant1    | -60.01          | -20         | Pass    |
| NVNT      | g    | 2412            | Ant1    | -35.77          | -20         | Pass    |
| NVNT      | g    | 2462            | Ant1    | -47.04          | -20         | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -32.98          | -20         | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -41.32          | -20         | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -35.07          | -20         | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -39.85          | -20         | Pass    |
| NVNT      | ax20 | 2412            | Ant1    | -30.44          | -20         | Pass    |
| NVNT      | ax20 | 2462            | Ant1    | -39.89          | -20         | Pass    |
| NVNT      | ax40 | 2422            | Ant1    | -35.68          | -20         | Pass    |
| NVNT      | ax40 | 2452            | Ant1    | -37.52          | -20         | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

## Band Edge NVNT b 2412MHz Ant1 Ref

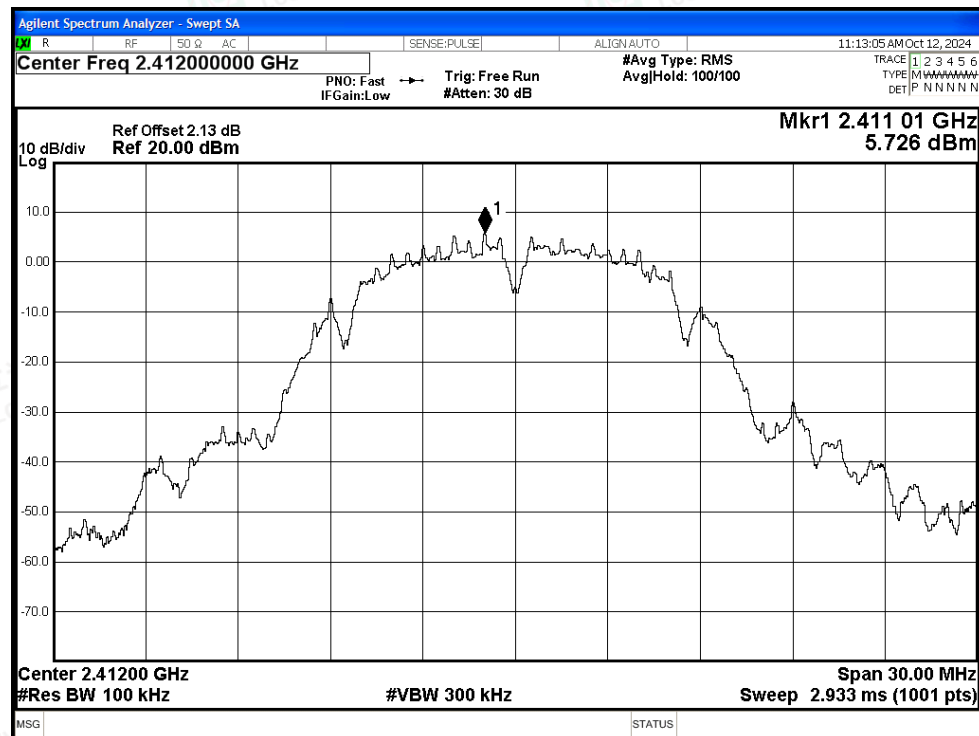

## Band Edge NVNT b 2412MHz Ant1 Emission

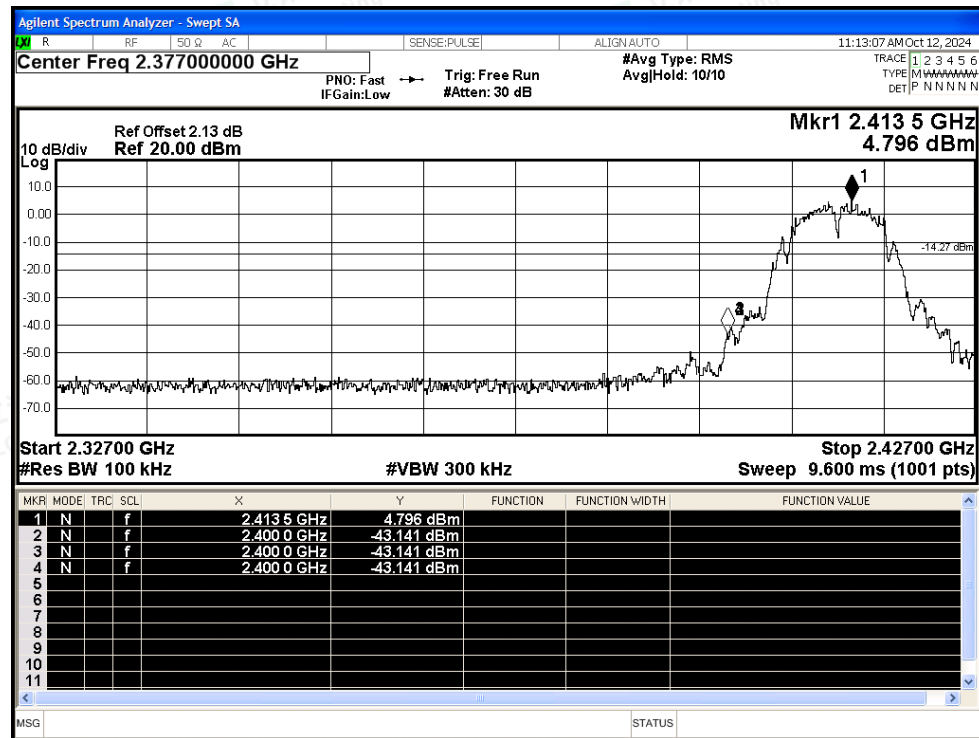

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Band Edge NVNT b 2462MHz Ant1 Ref

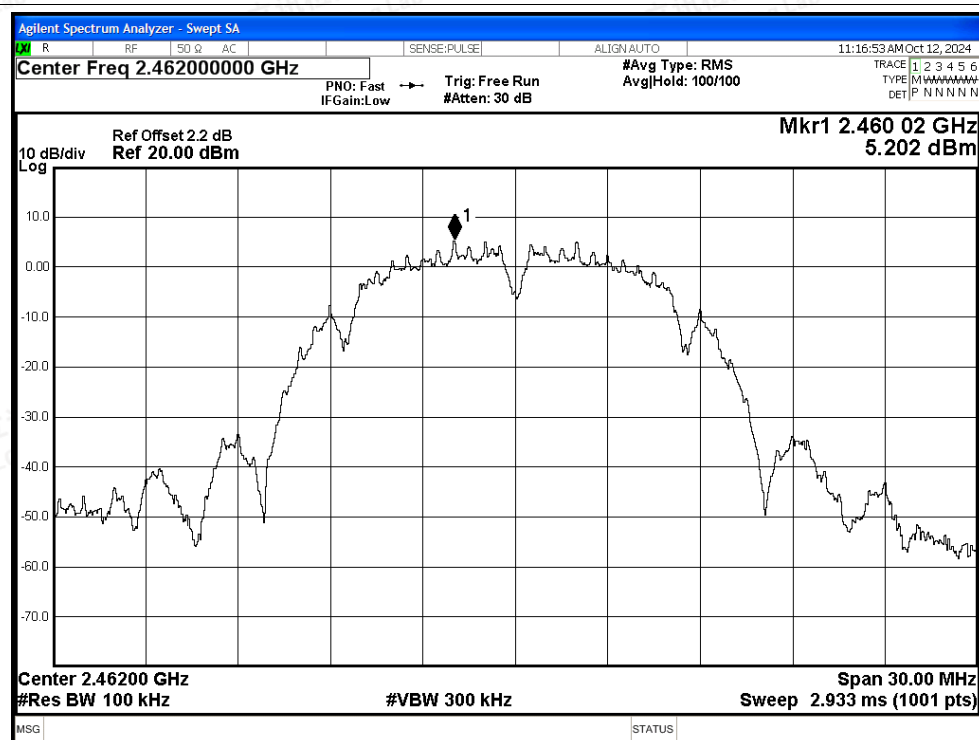


## Band Edge NVNT b 2462MHz Ant1 Emission

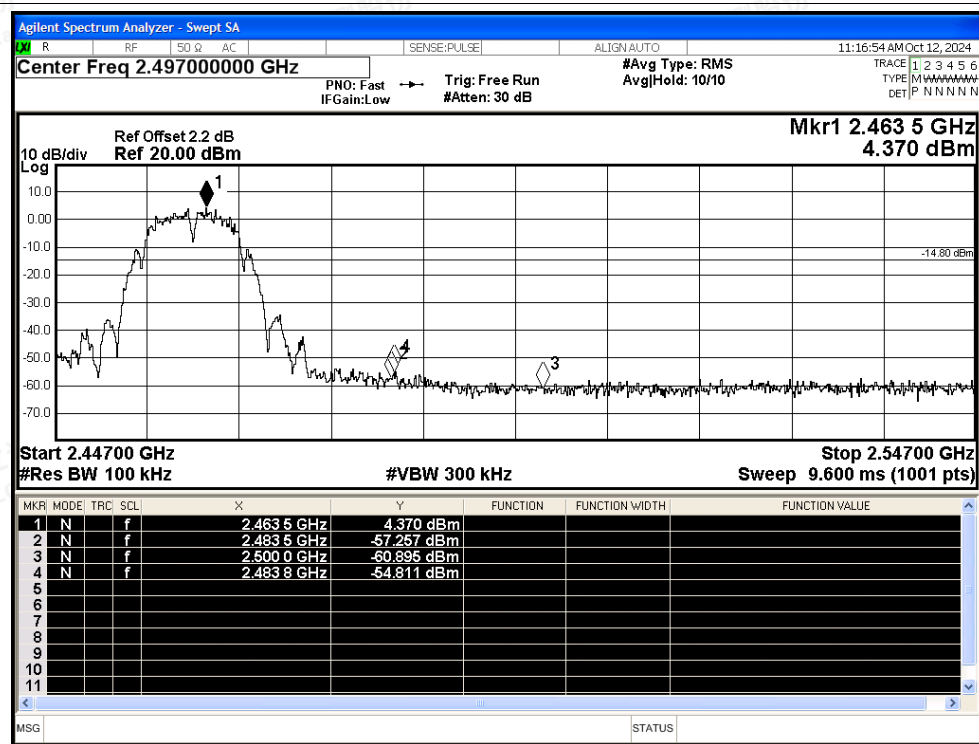




## Band Edge NVNT g 2412MHz Ant1 Ref

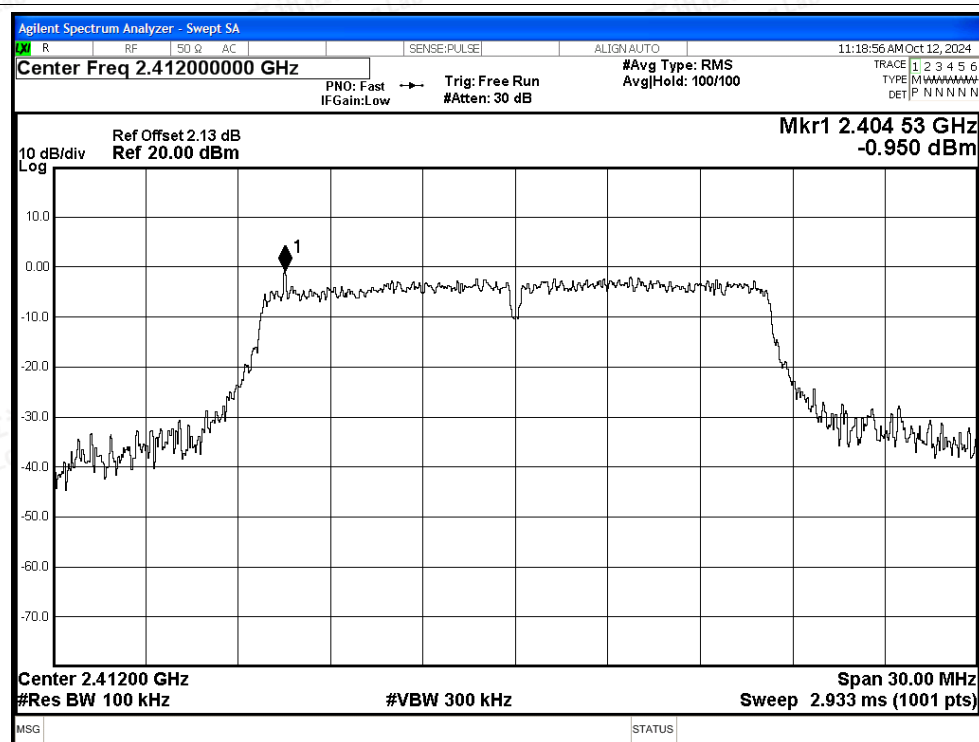


## Band Edge NVNT g 2412MHz Ant1 Emission

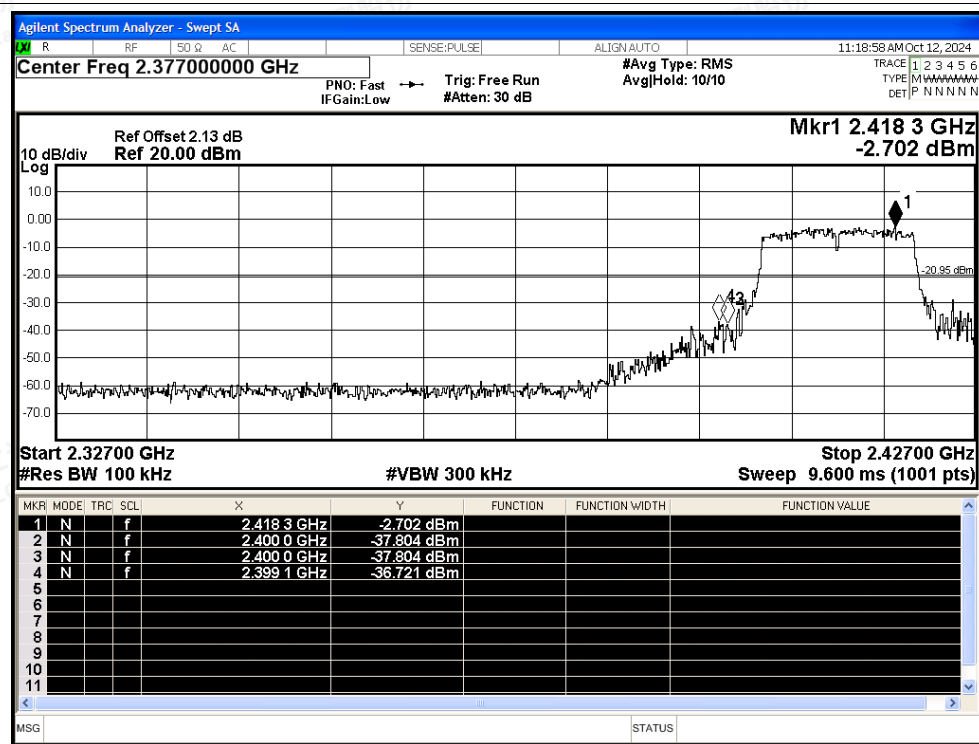




## Band Edge NVNT g 2462MHz Ant1 Ref

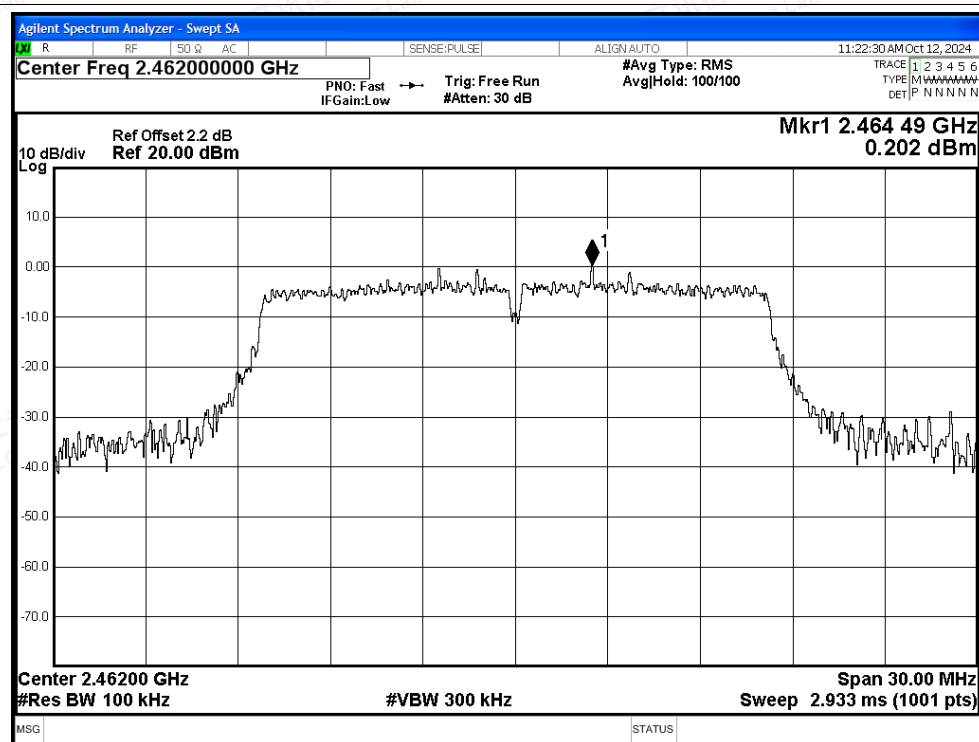


## Band Edge NVNT g 2462MHz Ant1 Emission

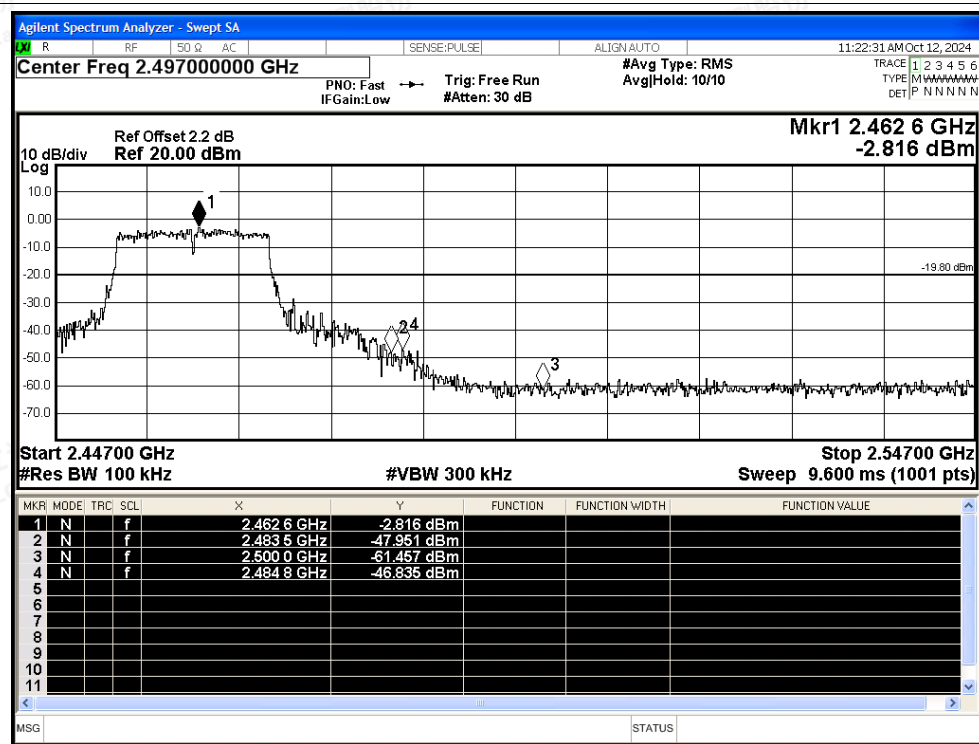




## Band Edge NVNT n20 2412MHz Ant1 Ref

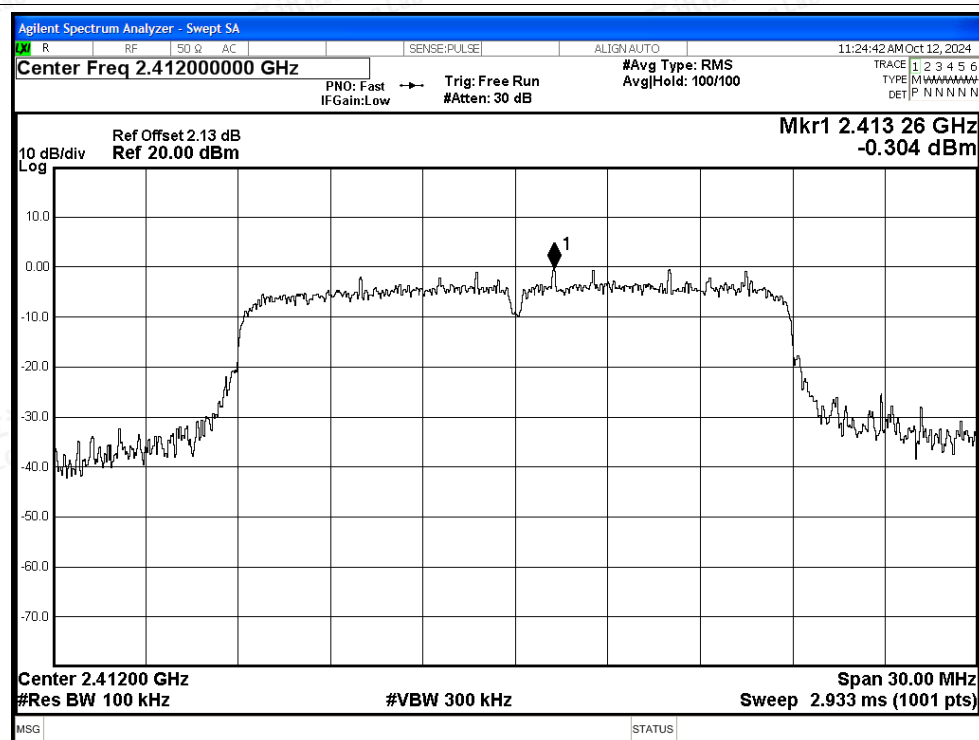


## Band Edge NVNT n20 2412MHz Ant1 Emission

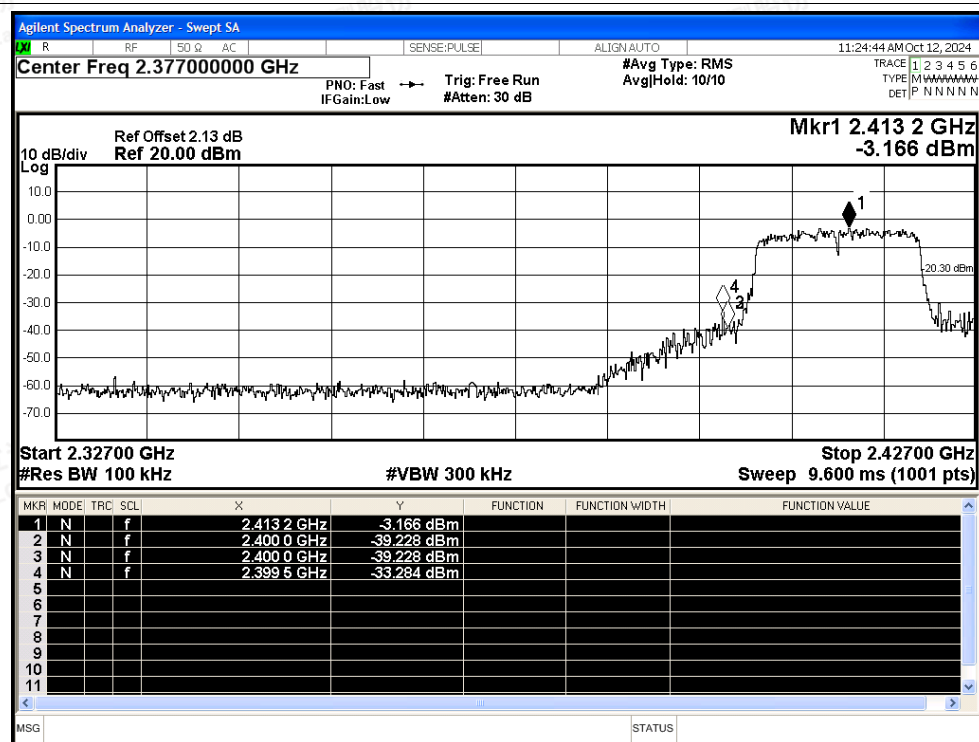




## Band Edge NVNT n20 2462MHz Ant1 Ref

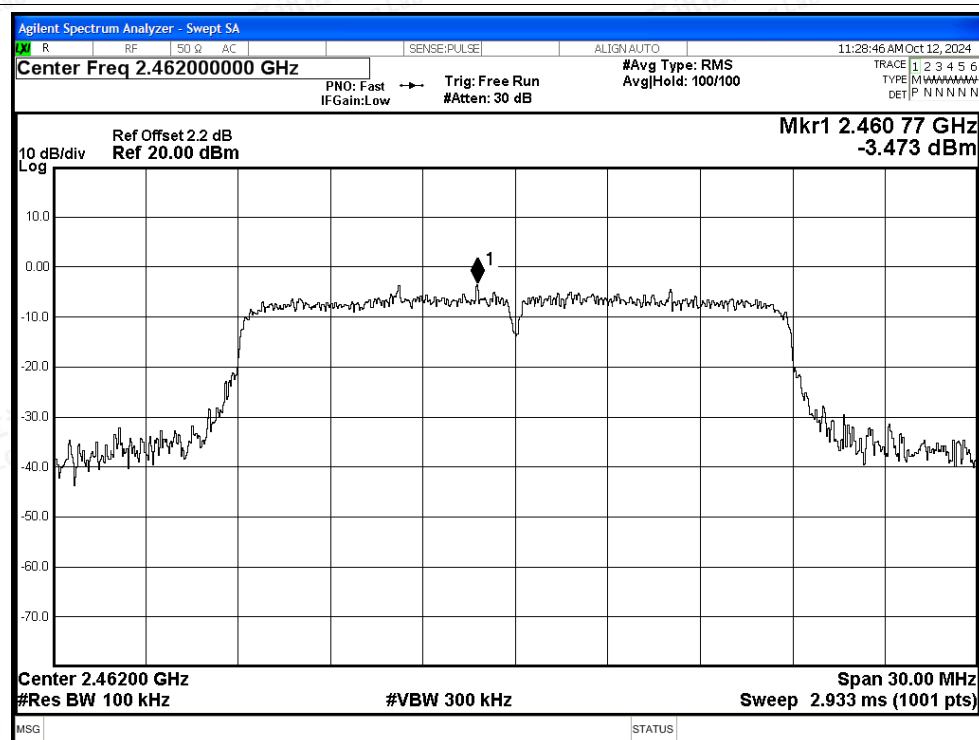


## Band Edge NVNT n20 2462MHz Ant1 Emission

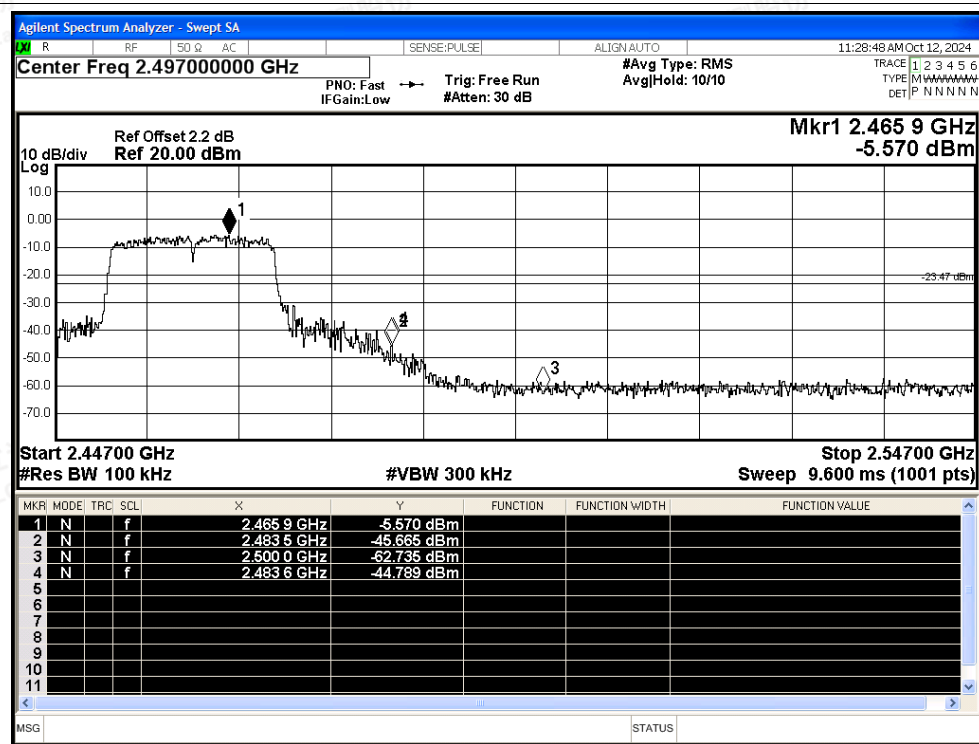




## Band Edge NVNT n40 2422MHz Ant1 Ref

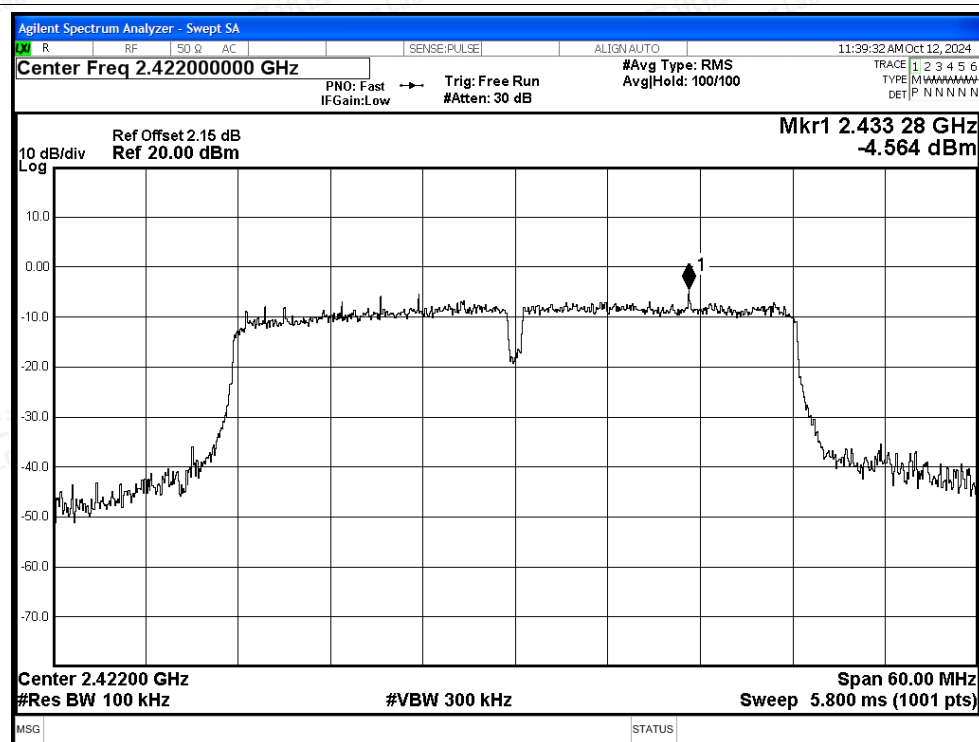


## Band Edge NVNT n40 2422MHz Ant1 Emission

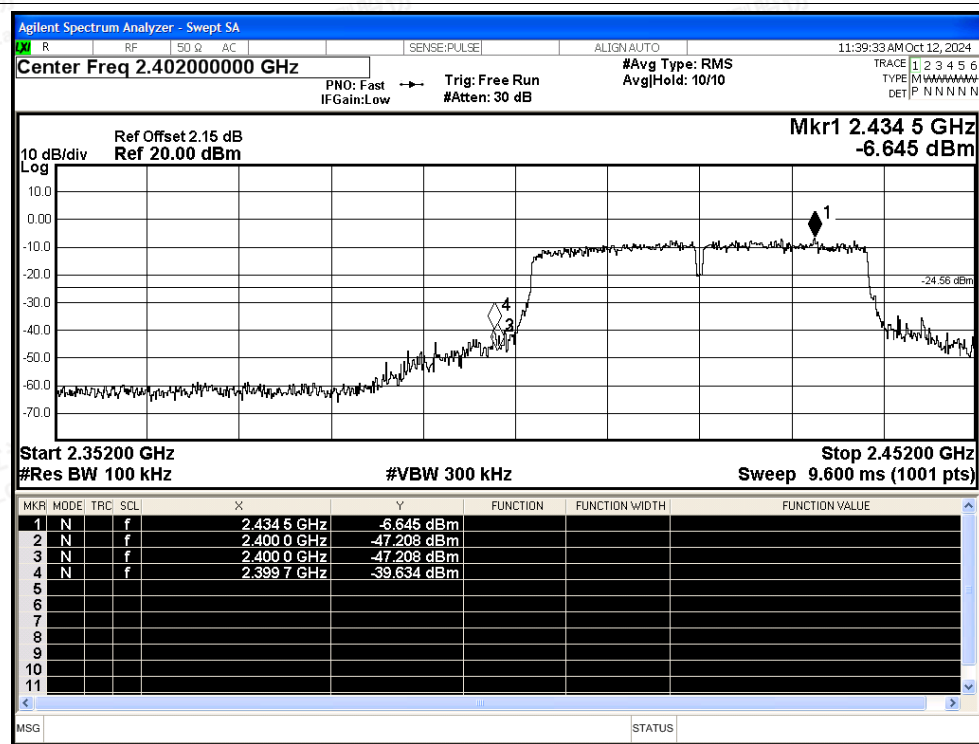




## Band Edge NVNT n40 2452MHz Ant1 Ref

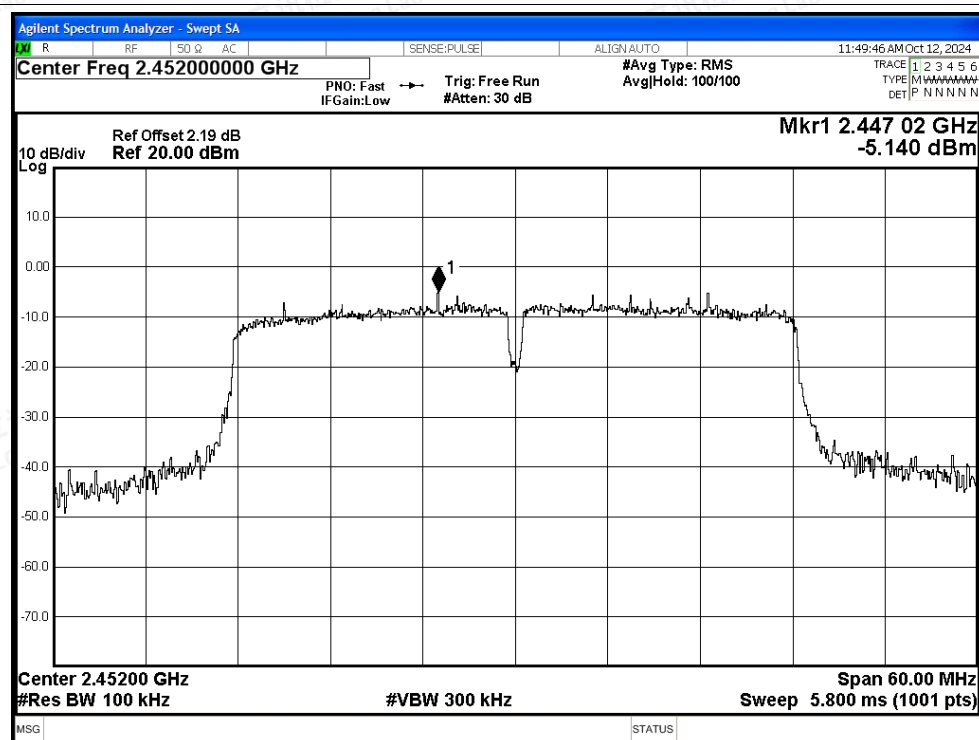


## Band Edge NVNT n40 2452MHz Ant1 Emission

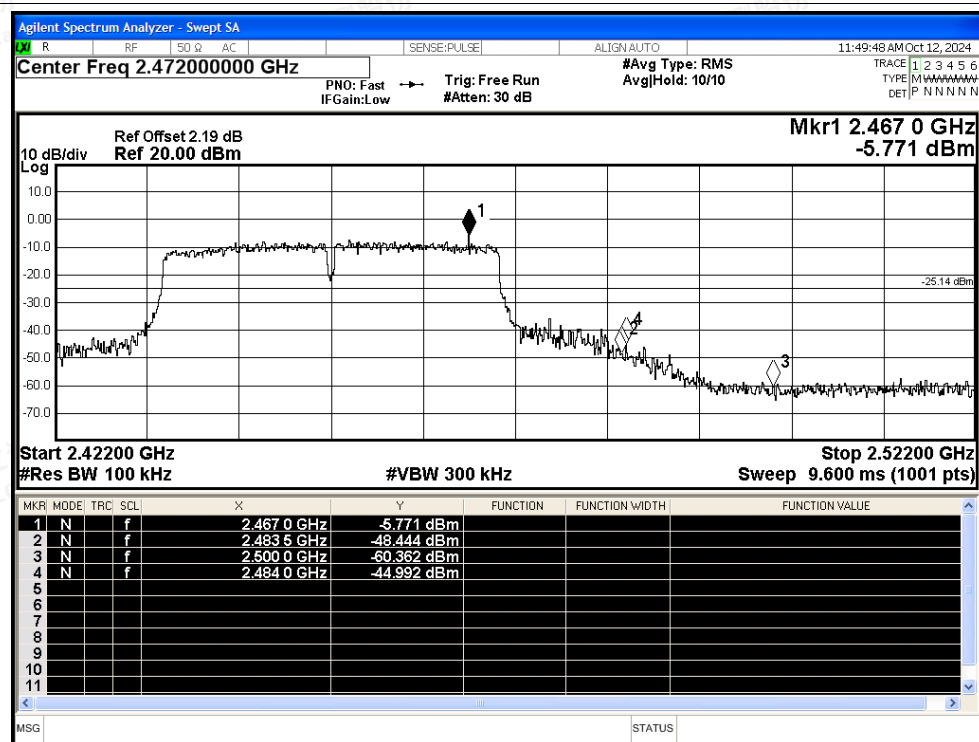




## Band Edge NVNT ax20 2412MHz Ant1 Ref

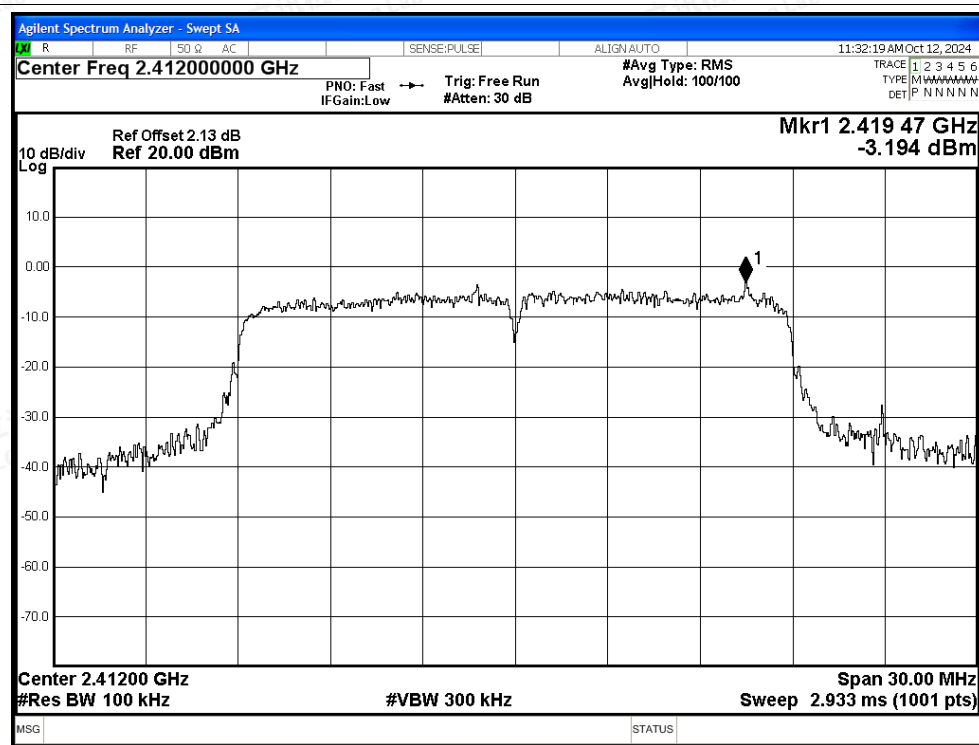


## Band Edge NVNT ax20 2412MHz Ant1 Emission

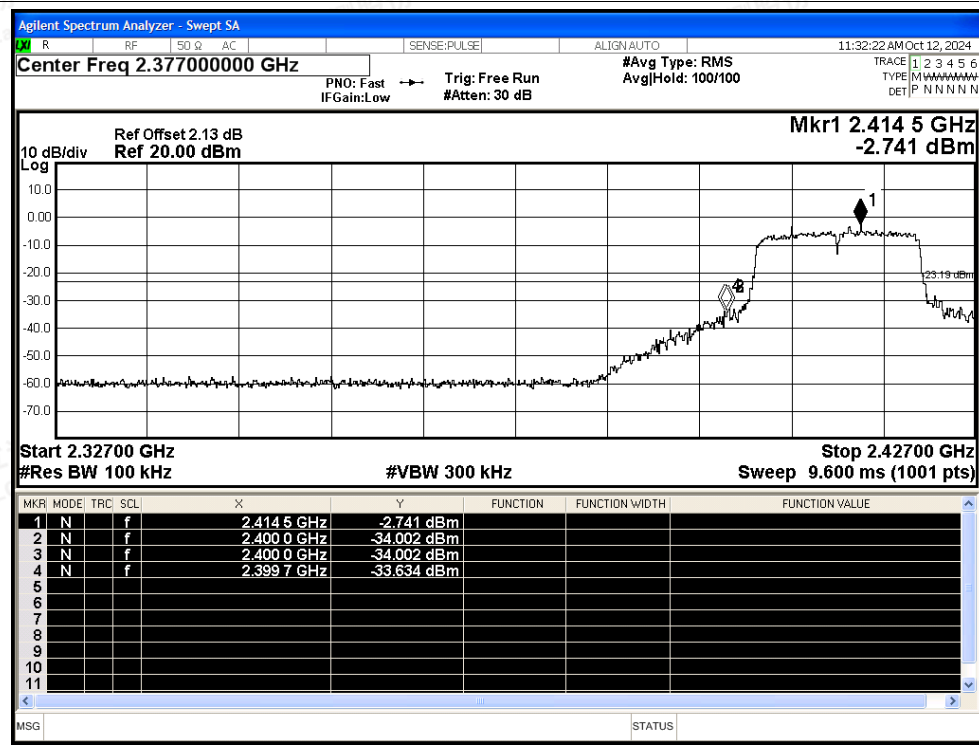




## Band Edge NVNT ax20 2462MHz Ant1 Ref

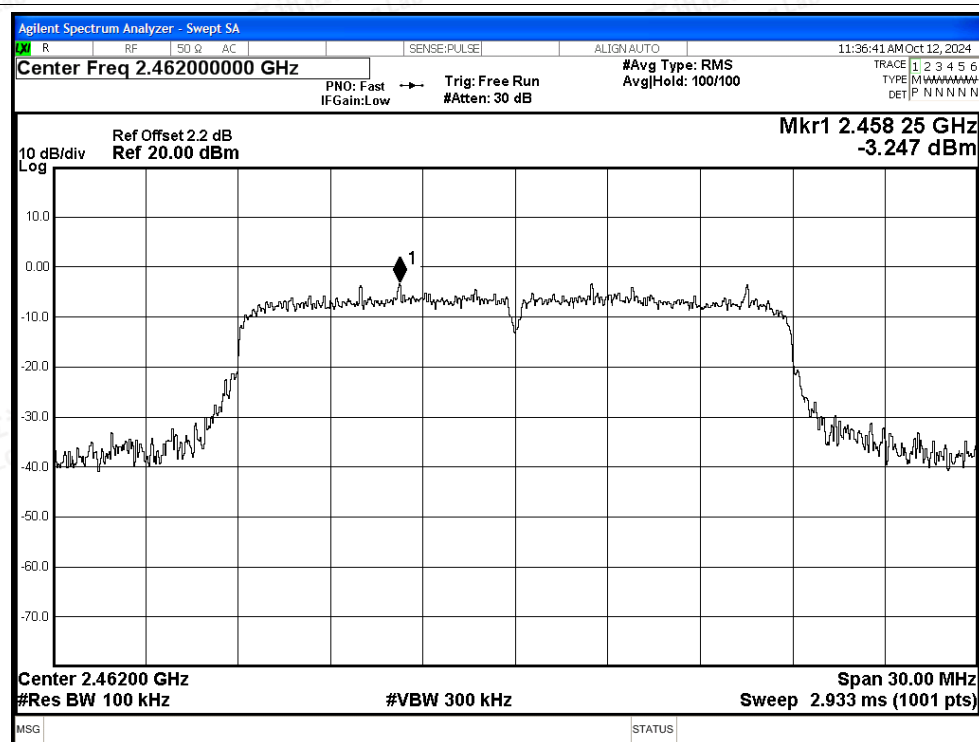


## Band Edge NVNT ax20 2462MHz Ant1 Emission

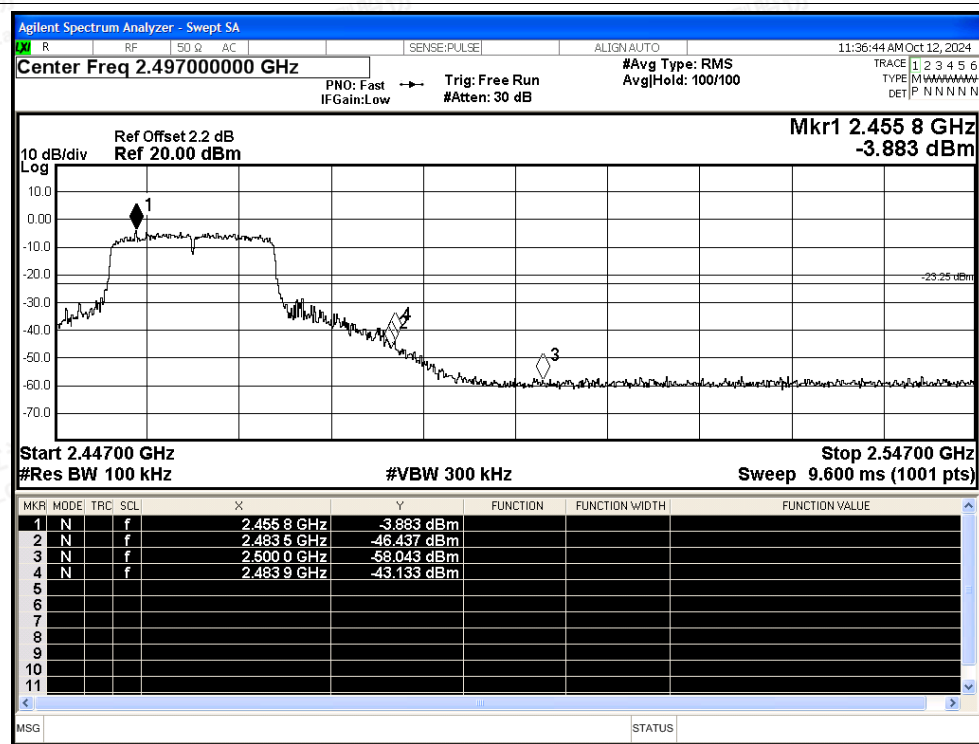




## Band Edge NVNT ax40 2422MHz Ant1 Ref

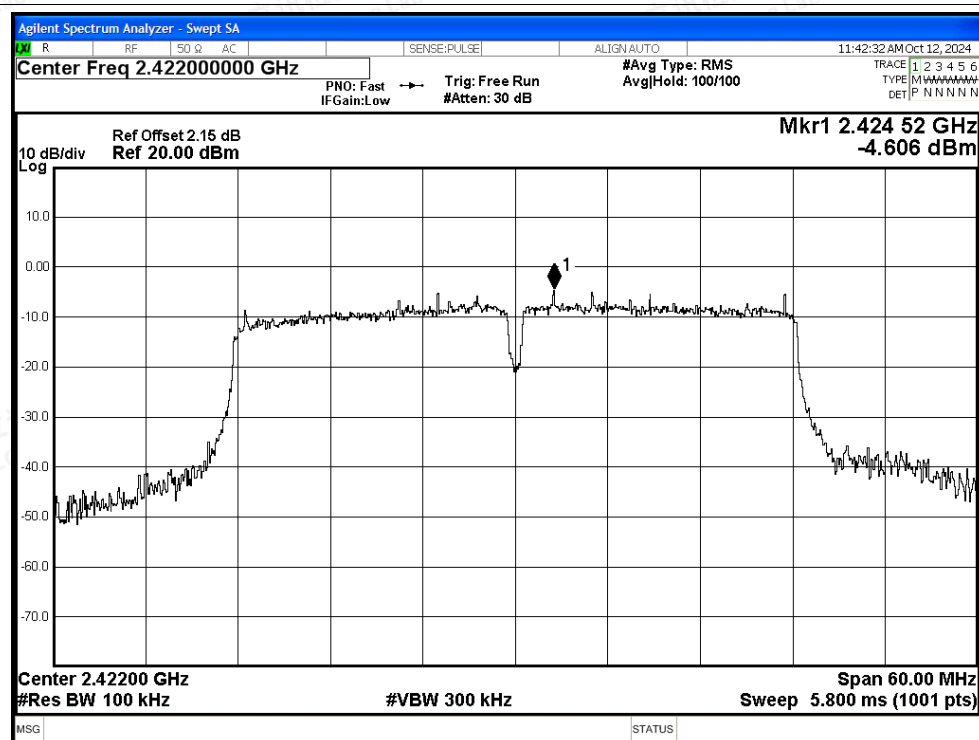


## Band Edge NVNT ax40 2422MHz Ant1 Emission

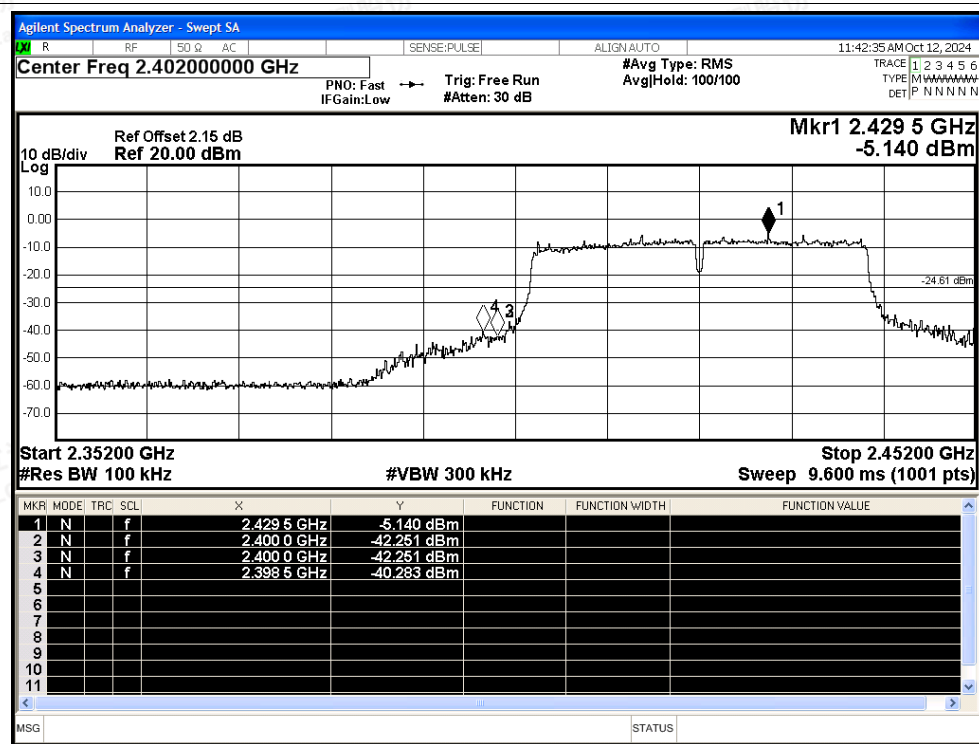




## Band Edge NVNT ax40 2452MHz Ant1 Ref

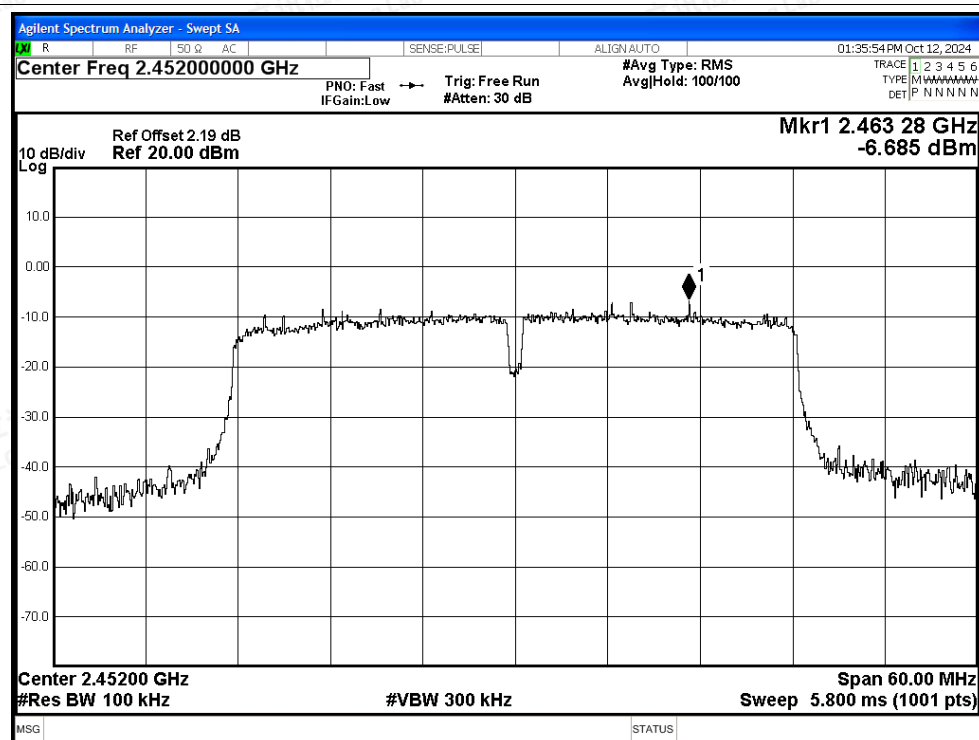

## Band Edge NVNT ax40 2452MHz Ant1 Emission

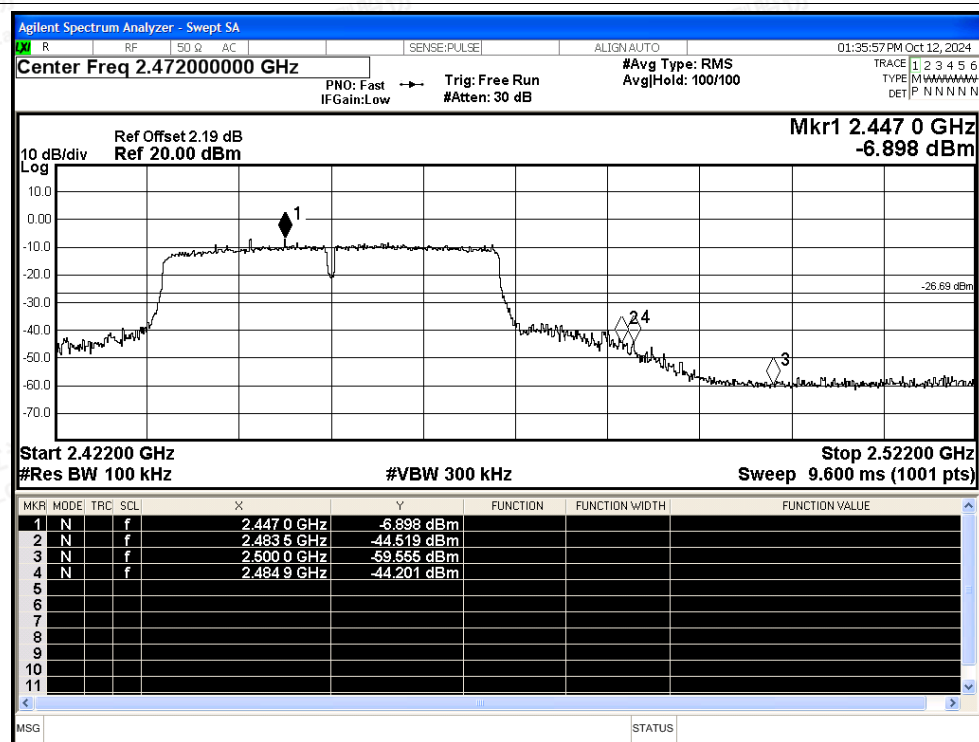



## C.5 Conducted RF Spurious Emission

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | -51.07          | -20         | Pass    |
| NVNT      | b    | 2437            | Ant1    | -49.82          | -20         | Pass    |
| NVNT      | b    | 2462            | Ant1    | -50.85          | -20         | Pass    |
| NVNT      | g    | 2412            | Ant1    | -45.79          | -20         | Pass    |
| NVNT      | g    | 2437            | Ant1    | -45.57          | -20         | Pass    |
| NVNT      | g    | 2462            | Ant1    | -44.28          | -20         | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -44.92          | -20         | Pass    |
| NVNT      | n20  | 2437            | Ant1    | -43.93          | -20         | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -42.4           | -20         | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -40.5           | -20         | Pass    |
| NVNT      | n40  | 2437            | Ant1    | -41.73          | -20         | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -40.11          | -20         | Pass    |
| NVNT      | ax20 | 2412            | Ant1    | -42.17          | -20         | Pass    |
| NVNT      | ax20 | 2437            | Ant1    | -42.35          | -20         | Pass    |
| NVNT      | ax20 | 2462            | Ant1    | -42.58          | -20         | Pass    |
| NVNT      | ax40 | 2422            | Ant1    | -40.49          | -20         | Pass    |
| NVNT      | ax40 | 2437            | Ant1    | -37.91          | -20         | Pass    |
| NVNT      | ax40 | 2452            | Ant1    | -39.09          | -20         | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

## Tx. Spurious NVNT b 2412MHz Ant1 Ref



## Tx. Spurious NVNT b 2412MHz Ant1 Emission

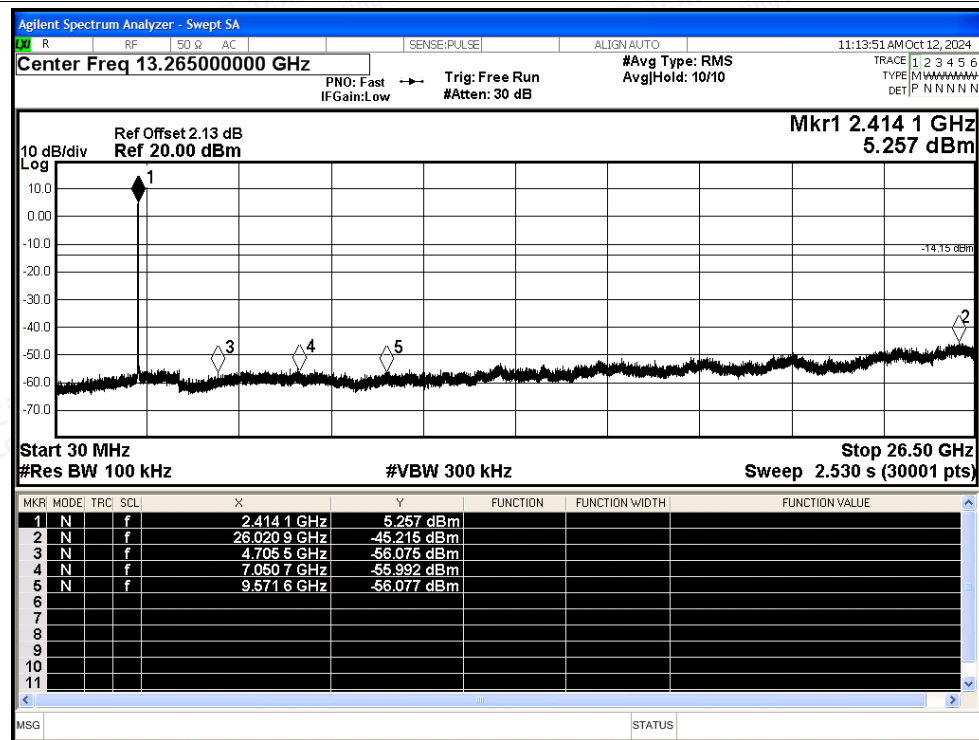

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Tx. Spurious NVNT b 2437MHz Ant1 Ref

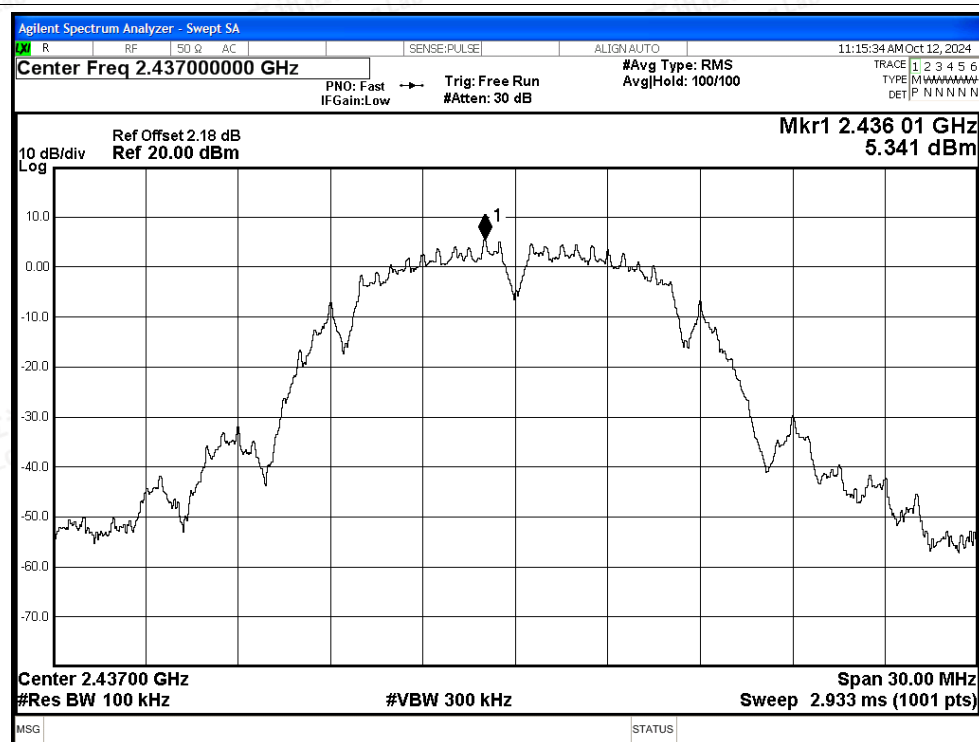


## Tx. Spurious NVNT b 2437MHz Ant1 Emission

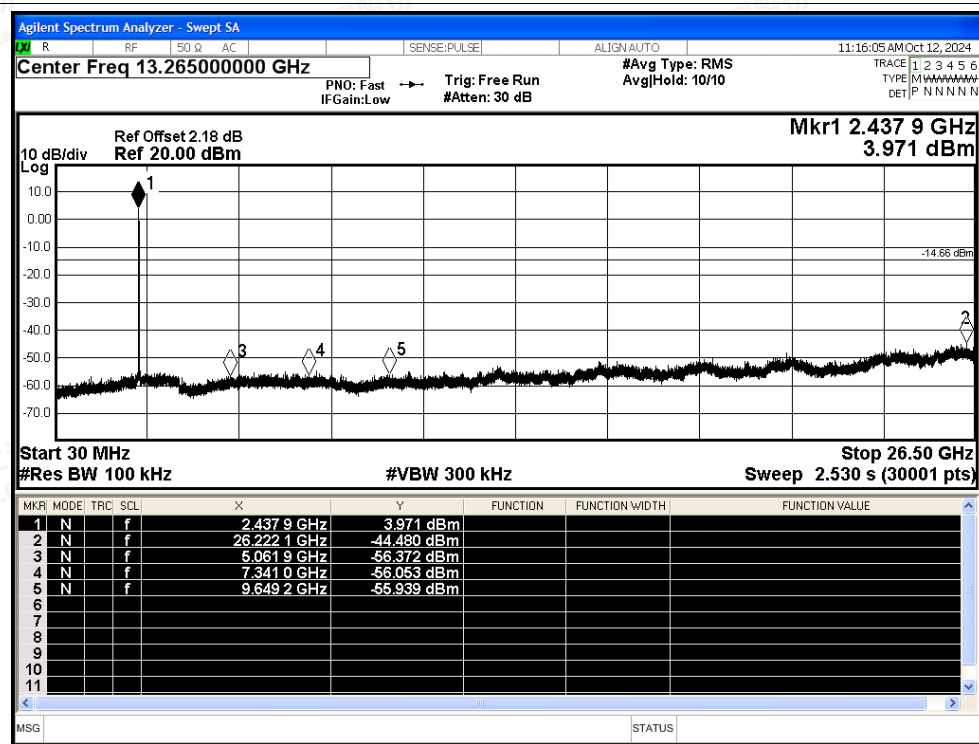




## Tx. Spurious NVNT b 2462MHz Ant1 Ref

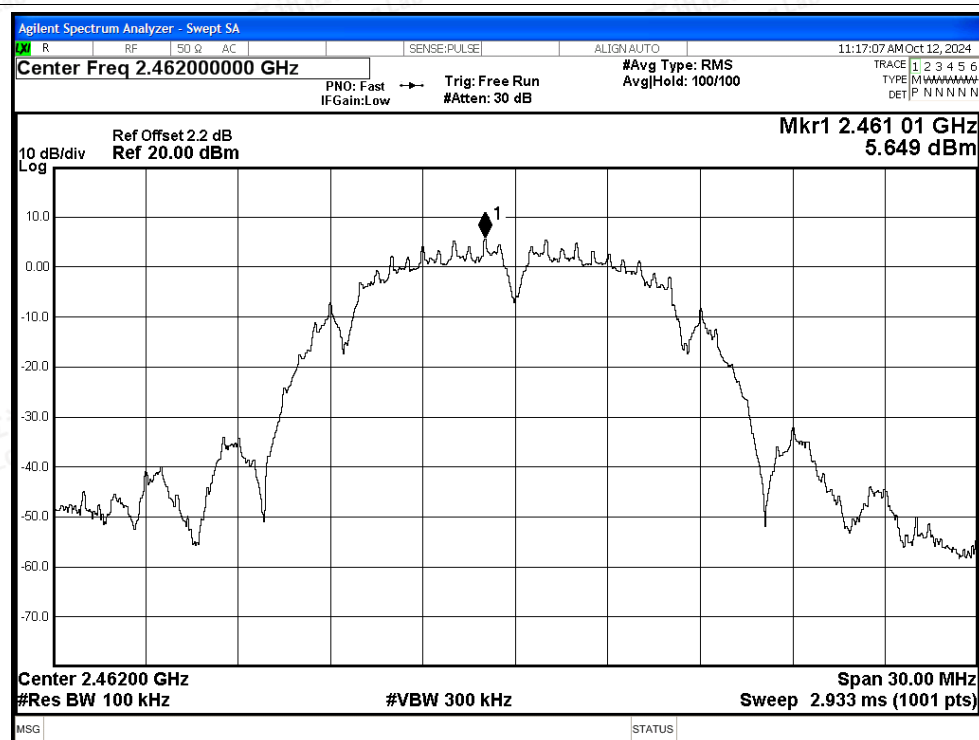


## Tx. Spurious NVNT b 2462MHz Ant1 Emission

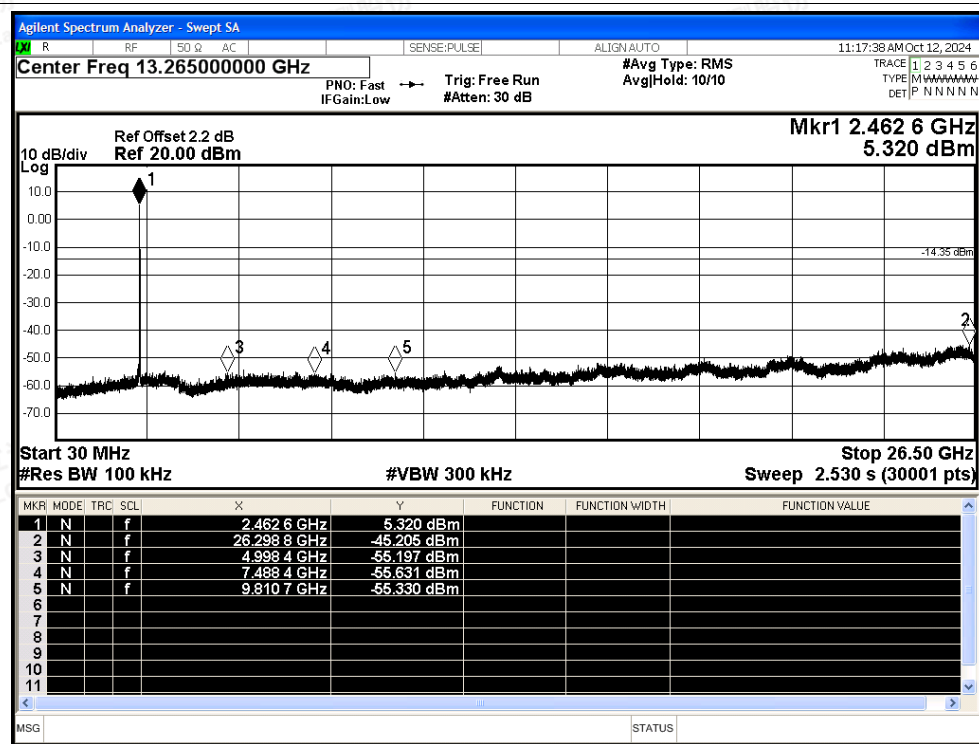




## Tx. Spurious NVNT g 2412MHz Ant1 Ref

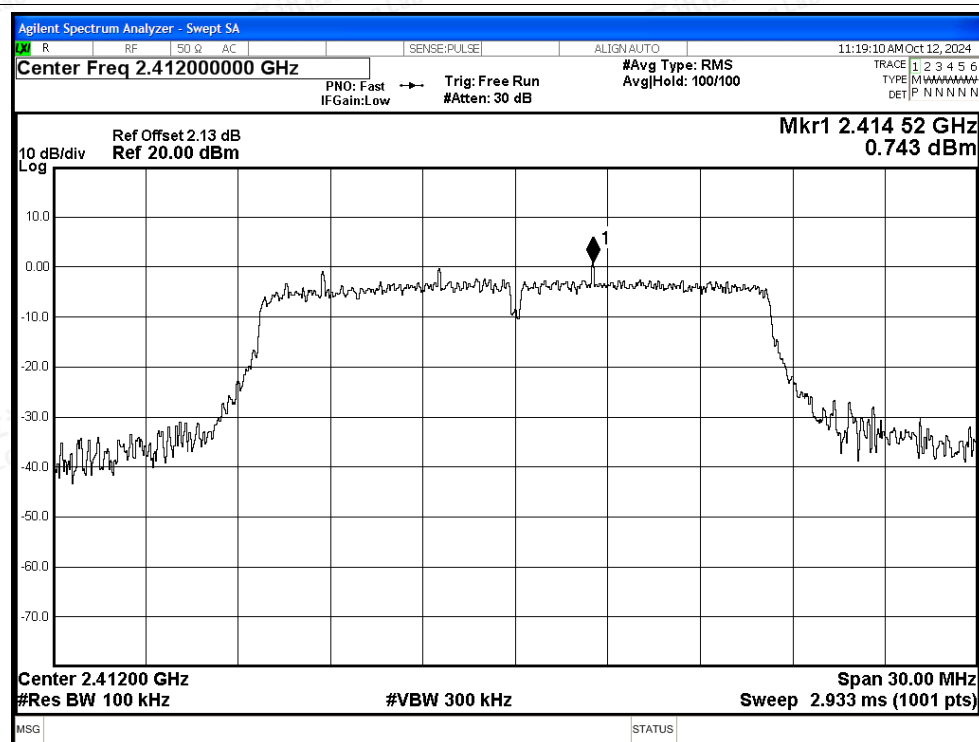


## Tx. Spurious NVNT g 2412MHz Ant1 Emission

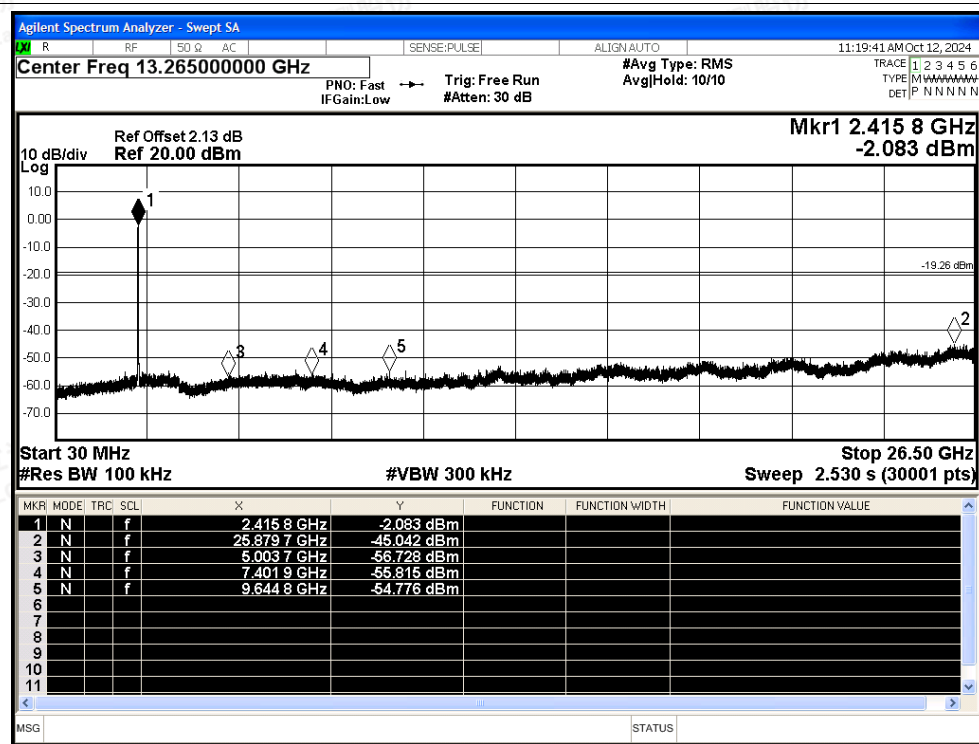




## Tx. Spurious NVNT g 2437MHz Ant1 Ref

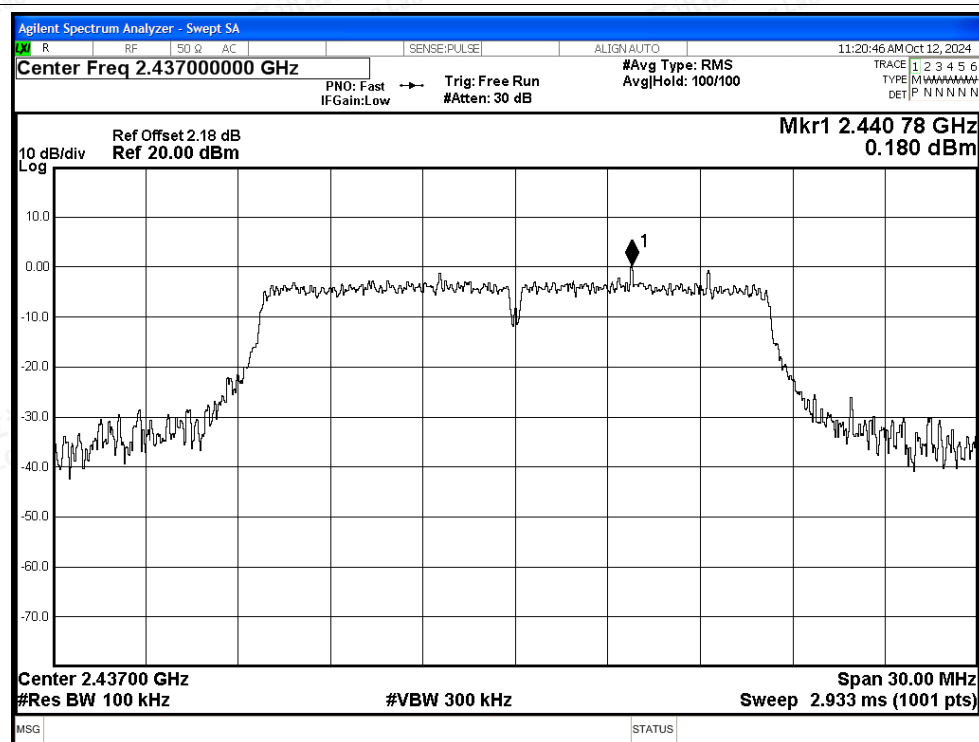


## Tx. Spurious NVNT g 2437MHz Ant1 Emission

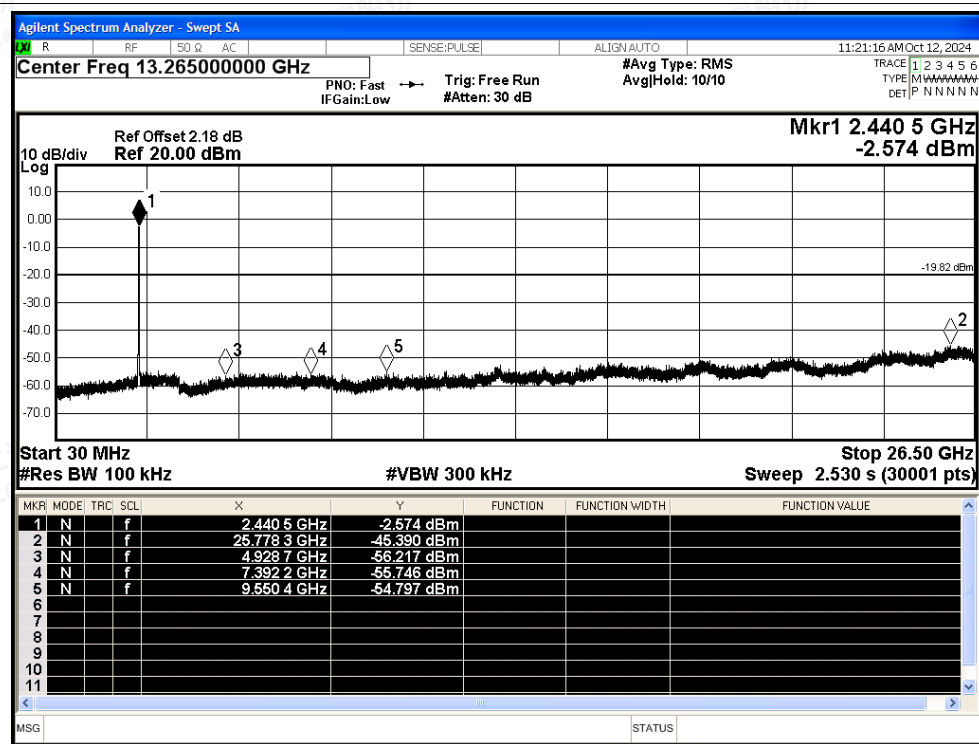




## Tx. Spurious NVNT g 2462MHz Ant1 Ref

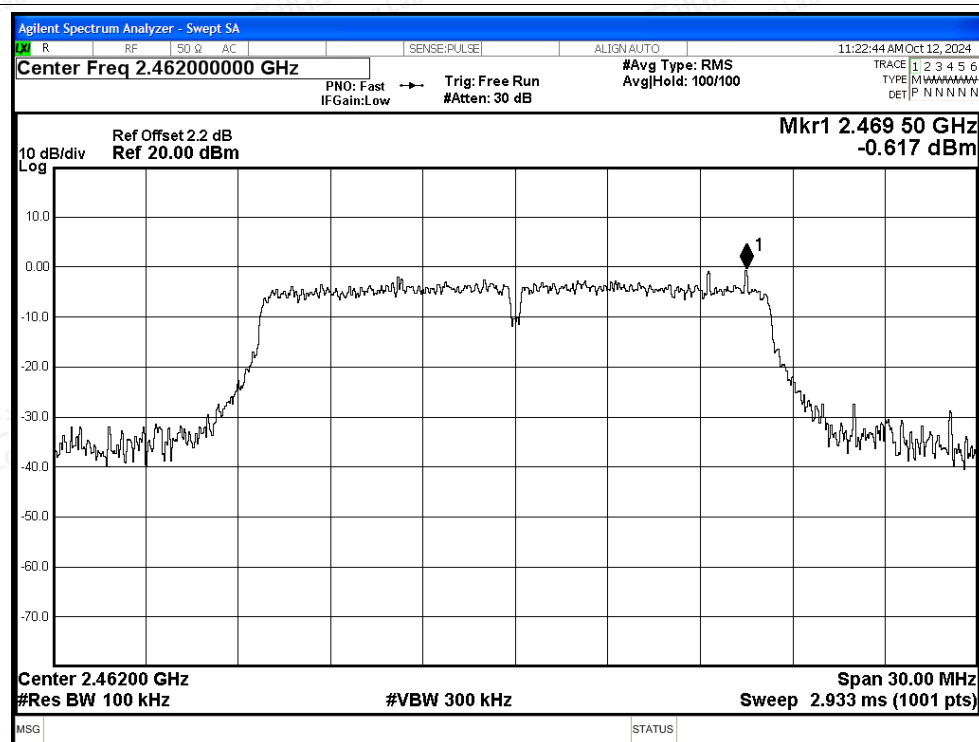


## Tx. Spurious NVNT g 2462MHz Ant1 Emission

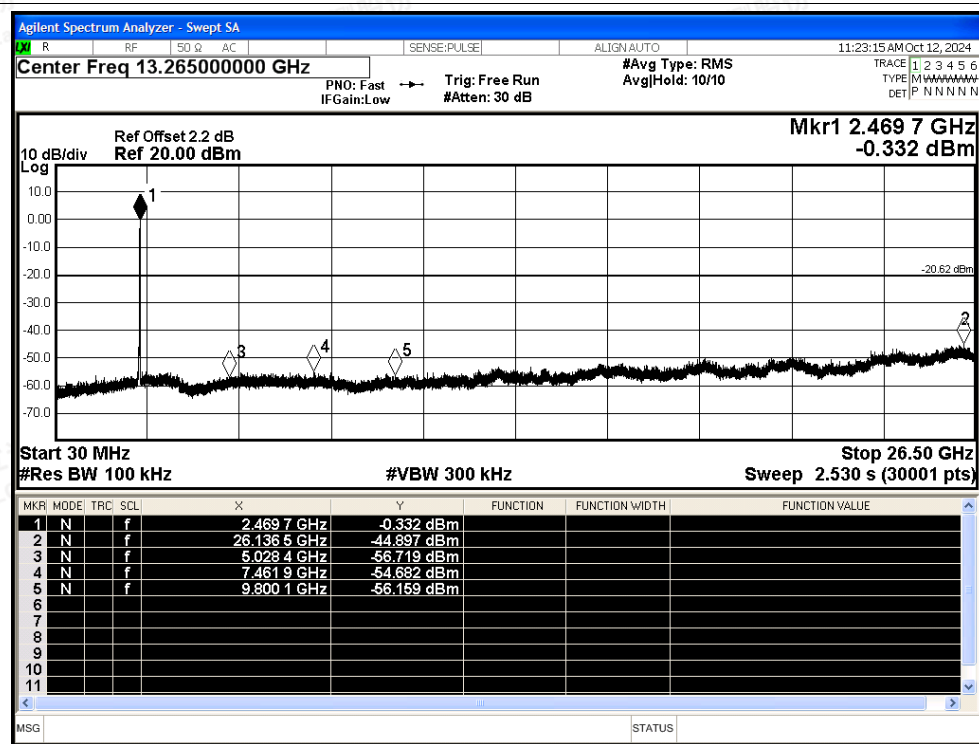




## Tx. Spurious NVNT n20 2412MHz Ant1 Ref

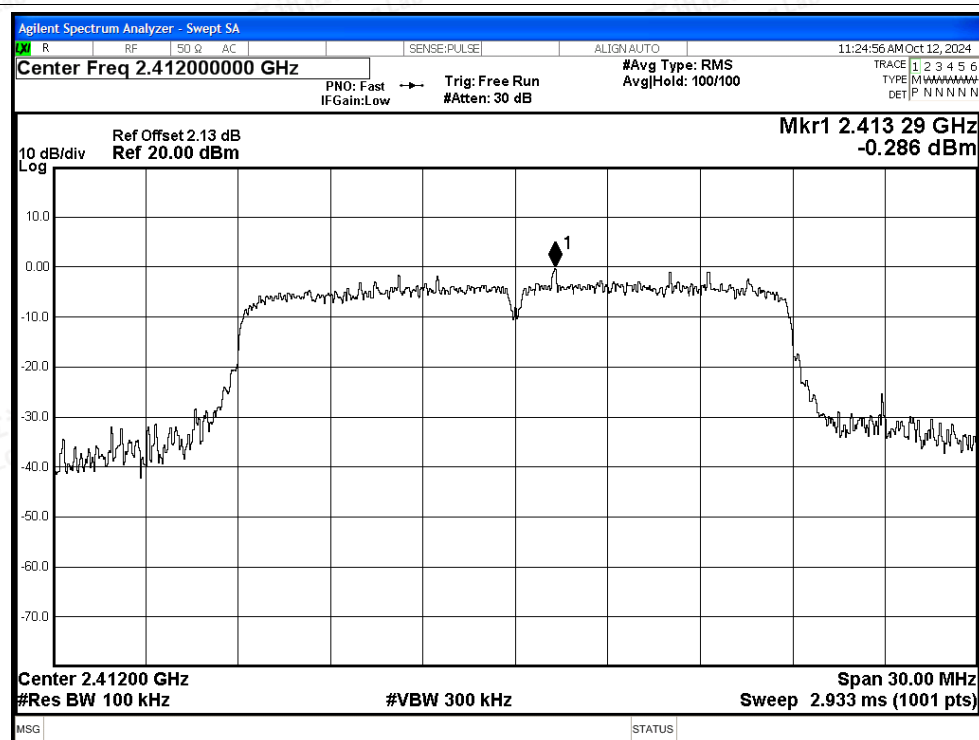


## Tx. Spurious NVNT n20 2412MHz Ant1 Emission

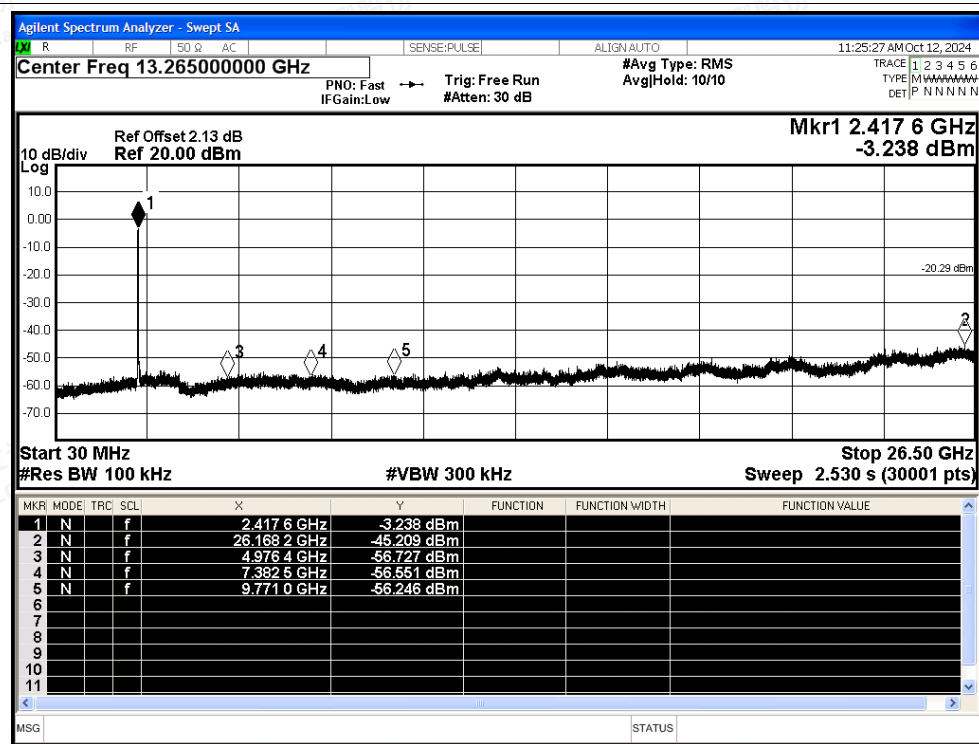




## Tx. Spurious NVNT n20 2437MHz Ant1 Ref

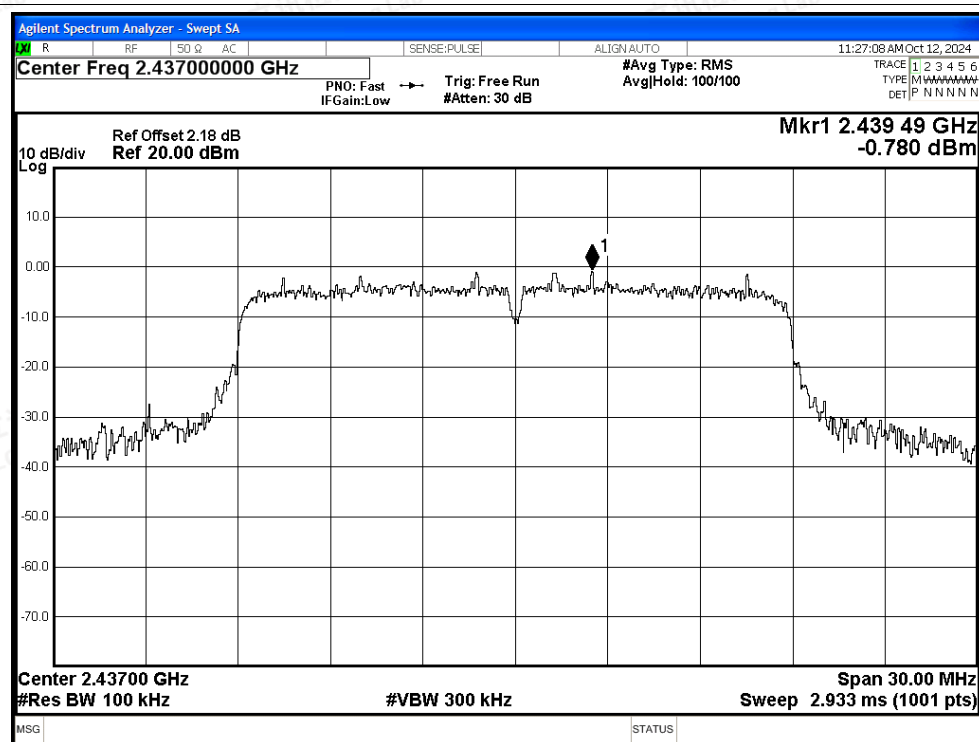


## Tx. Spurious NVNT n20 2437MHz Ant1 Emission

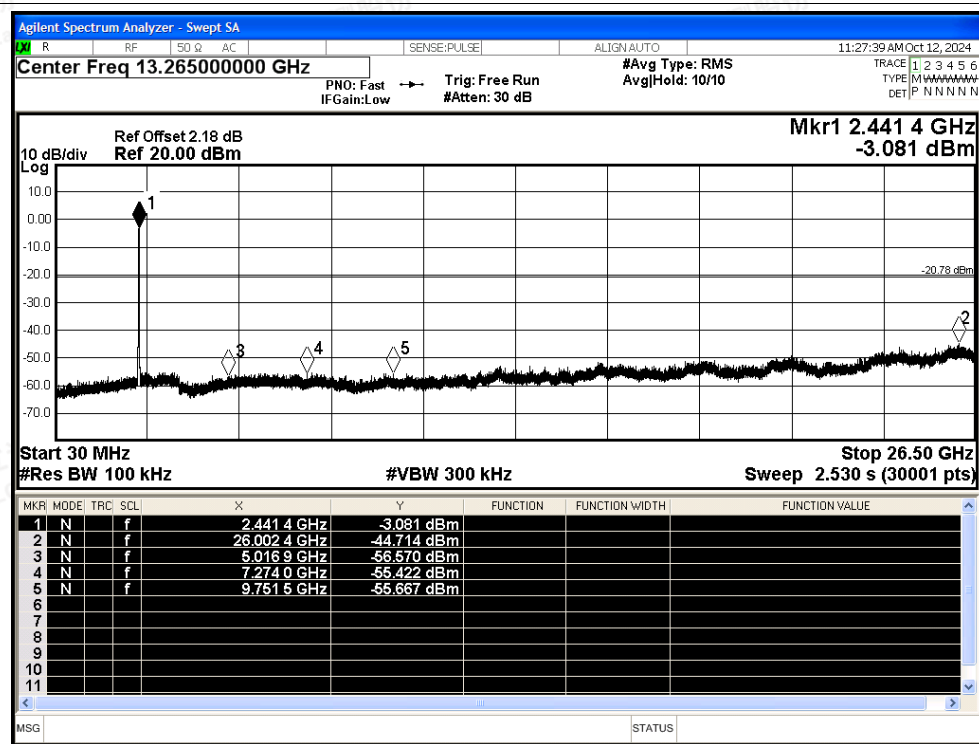




## Tx. Spurious NVNT n20 2462MHz Ant1 Ref

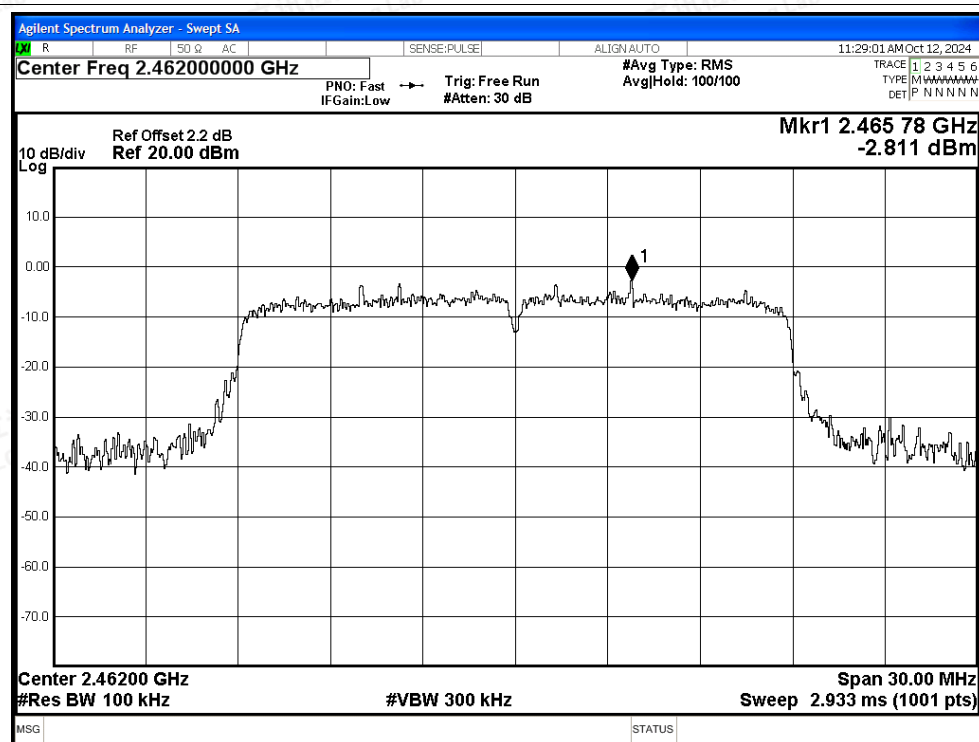


## Tx. Spurious NVNT n20 2462MHz Ant1 Emission

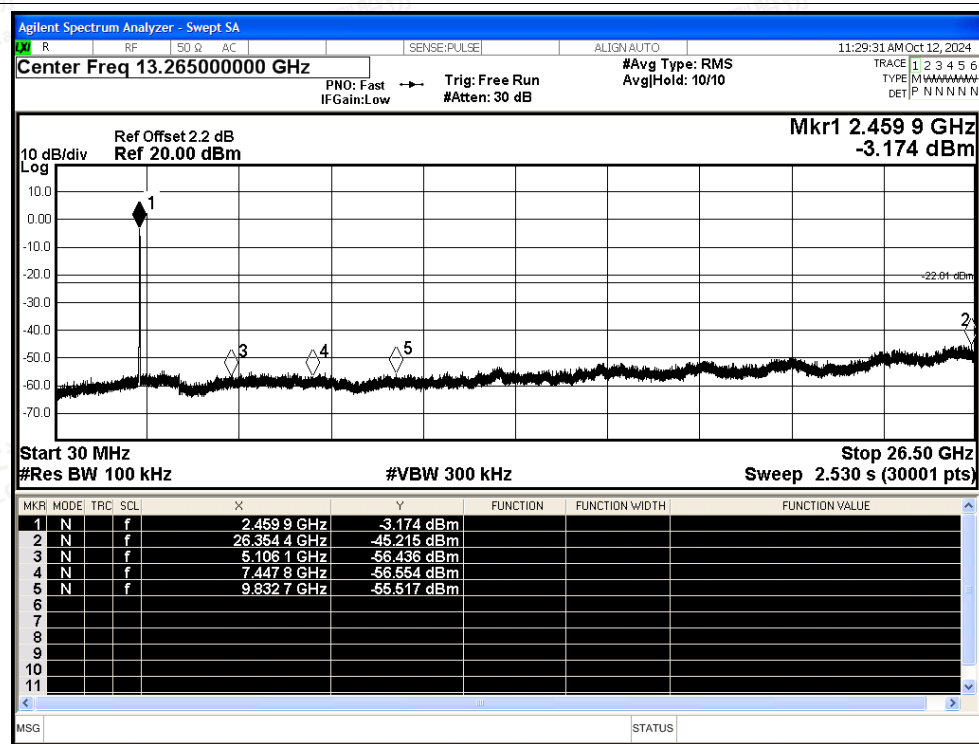




## Tx. Spurious NVNT n40 2422MHz Ant1 Ref

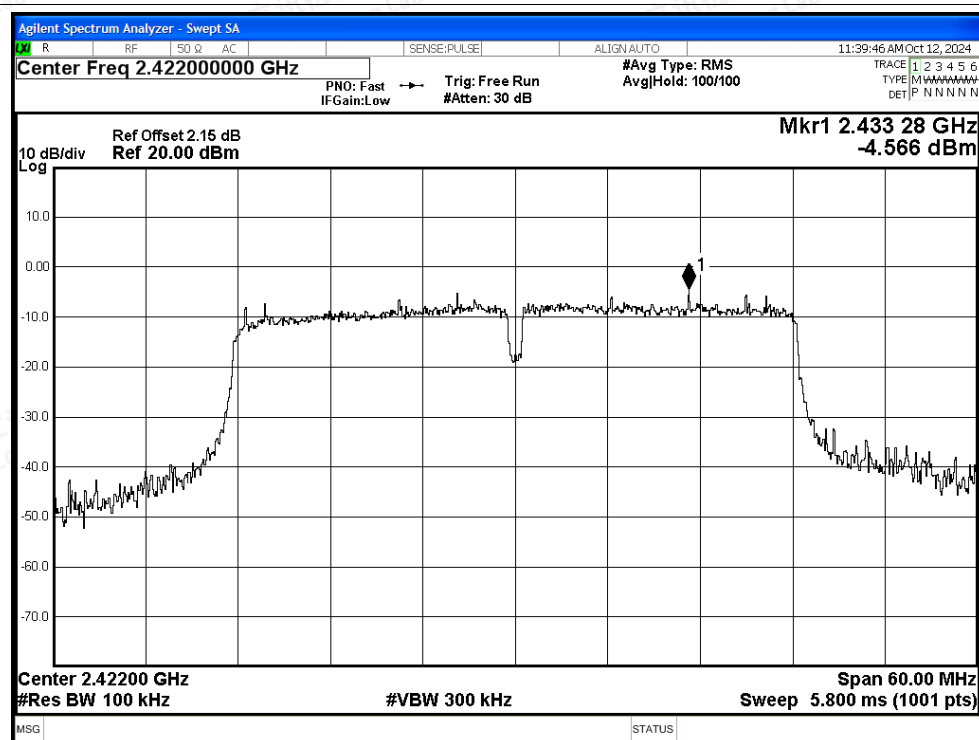


## Tx. Spurious NVNT n40 2422MHz Ant1 Emission

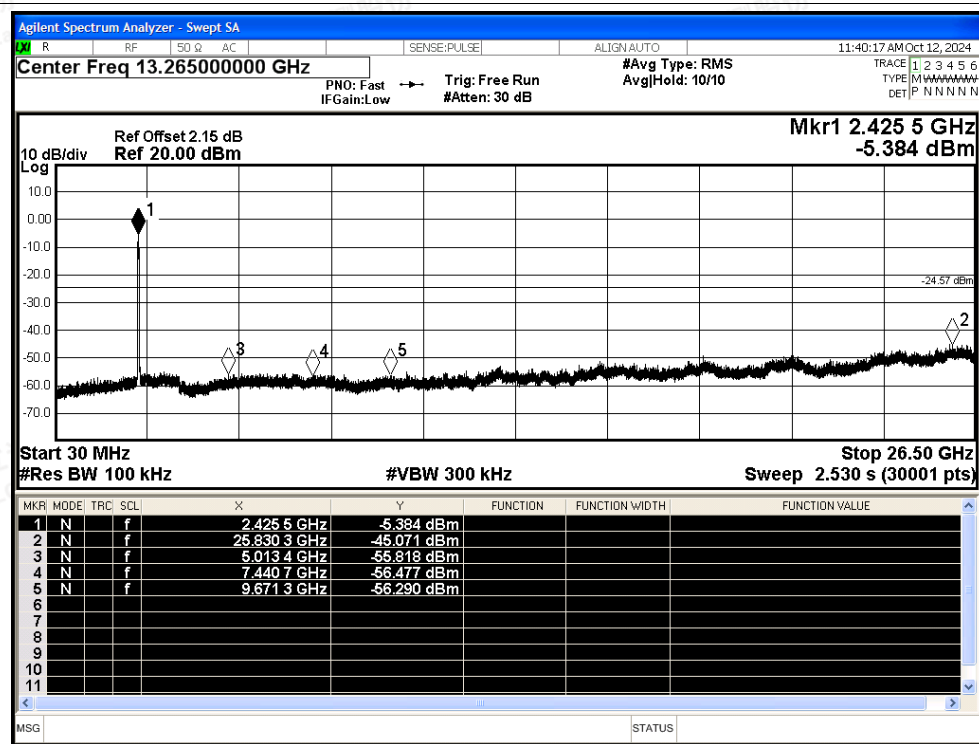




## Tx. Spurious NVNT n40 2437MHz Ant1 Ref

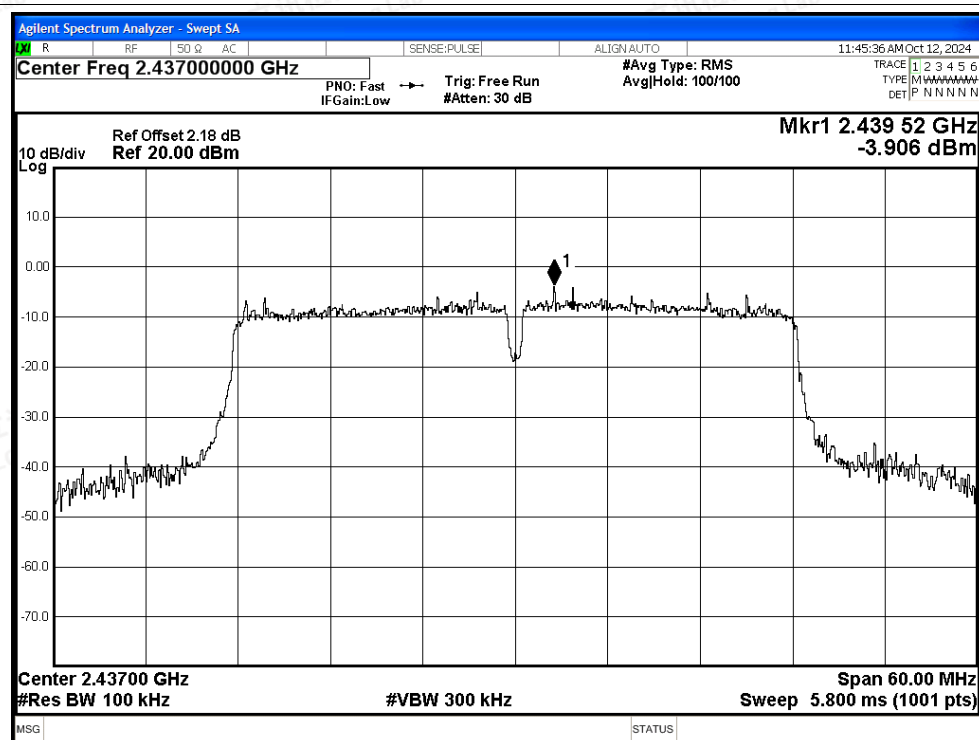

## Tx. Spurious NVNT n40 2437MHz Ant1 Emission

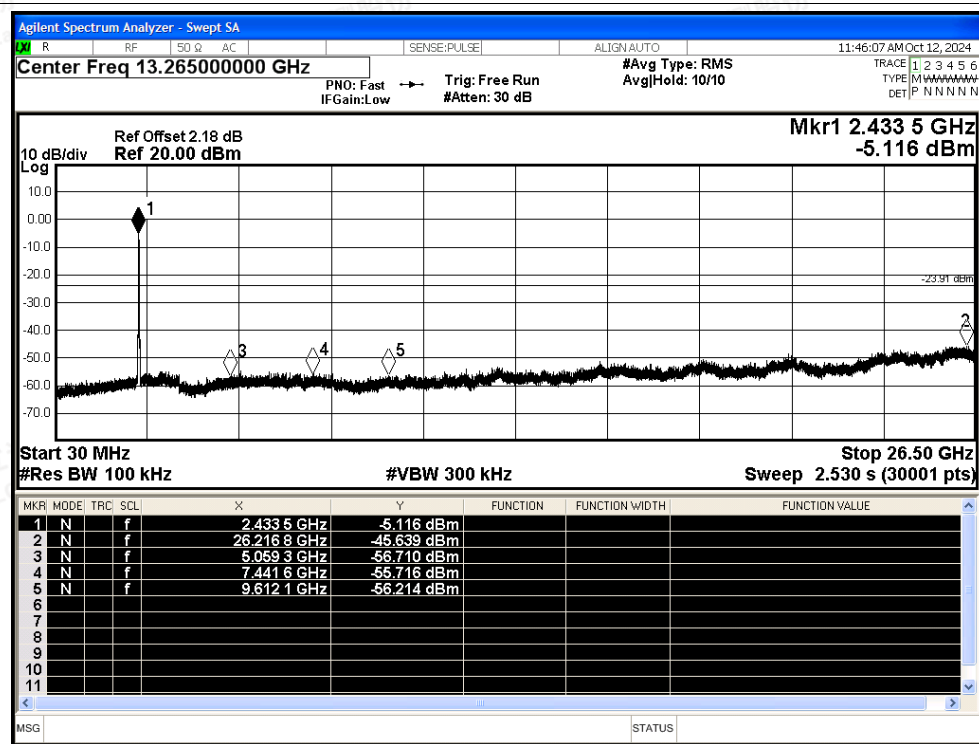

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Tx. Spurious NVNT n40 2452MHz Ant1 Ref

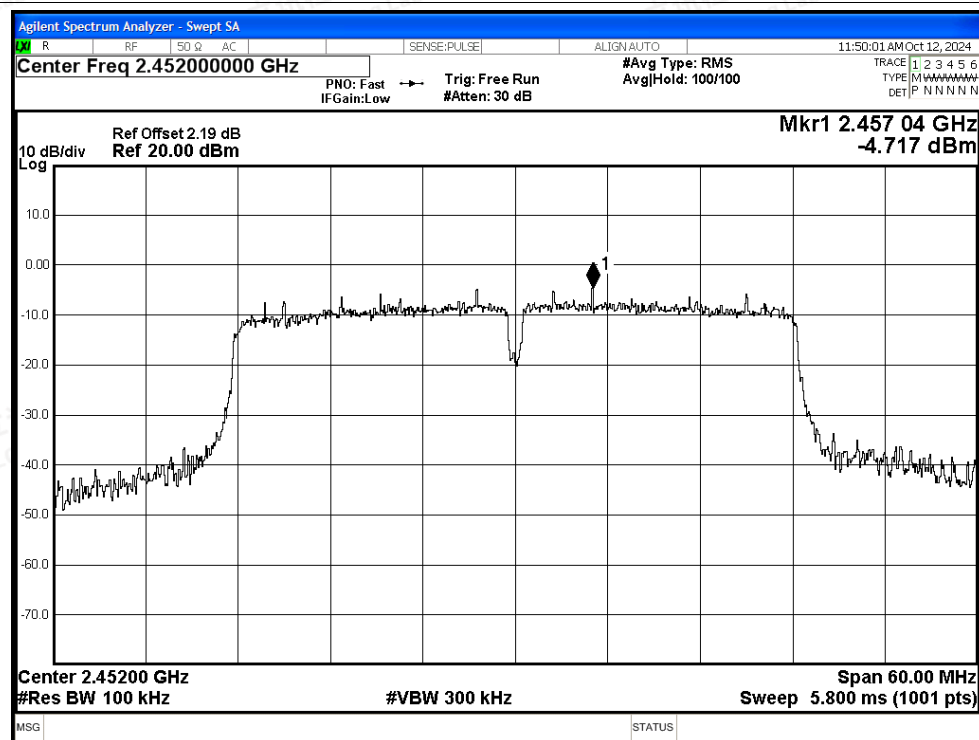


## Tx. Spurious NVNT n40 2452MHz Ant1 Emission

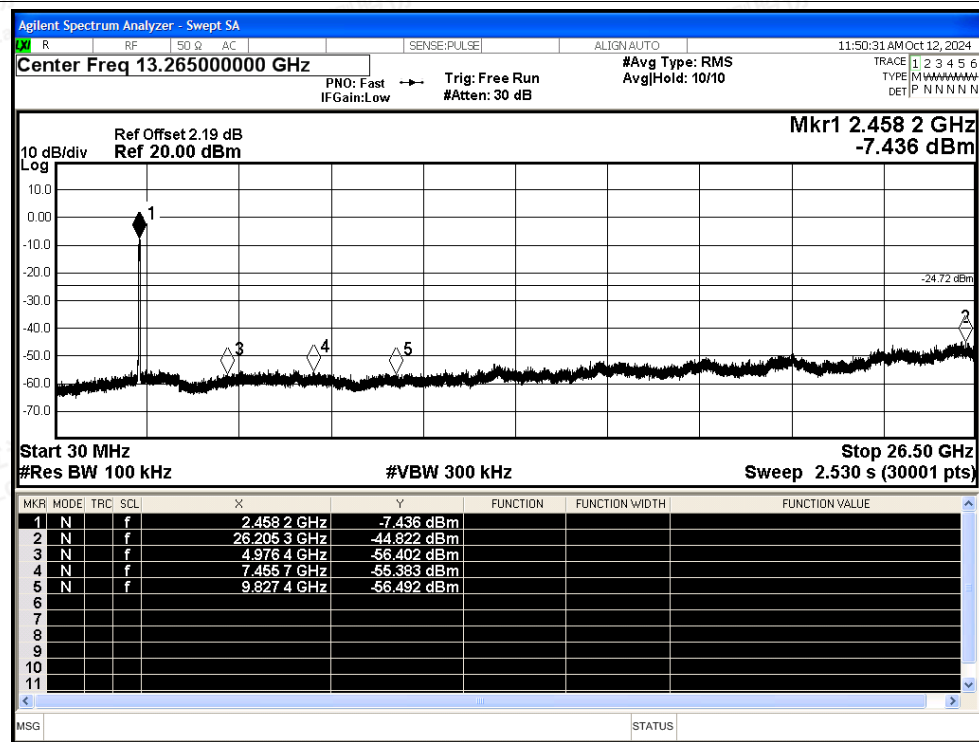




## Tx. Spurious NVNT ax20 2412MHz Ant1 Ref

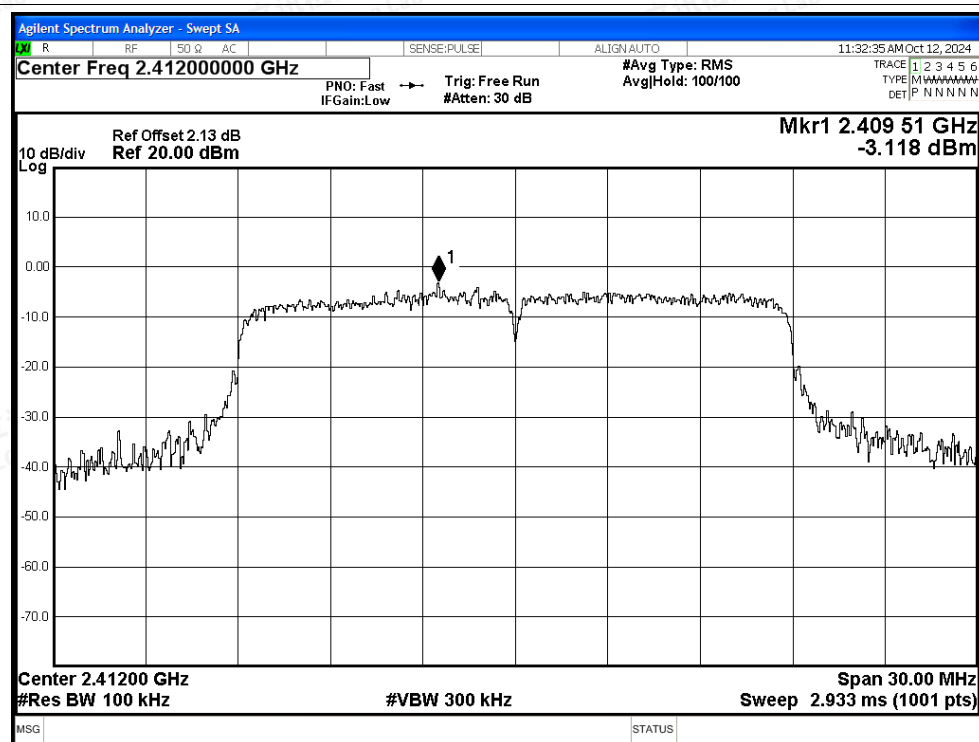

## Tx. Spurious NVNT ax20 2412MHz Ant1 Emission

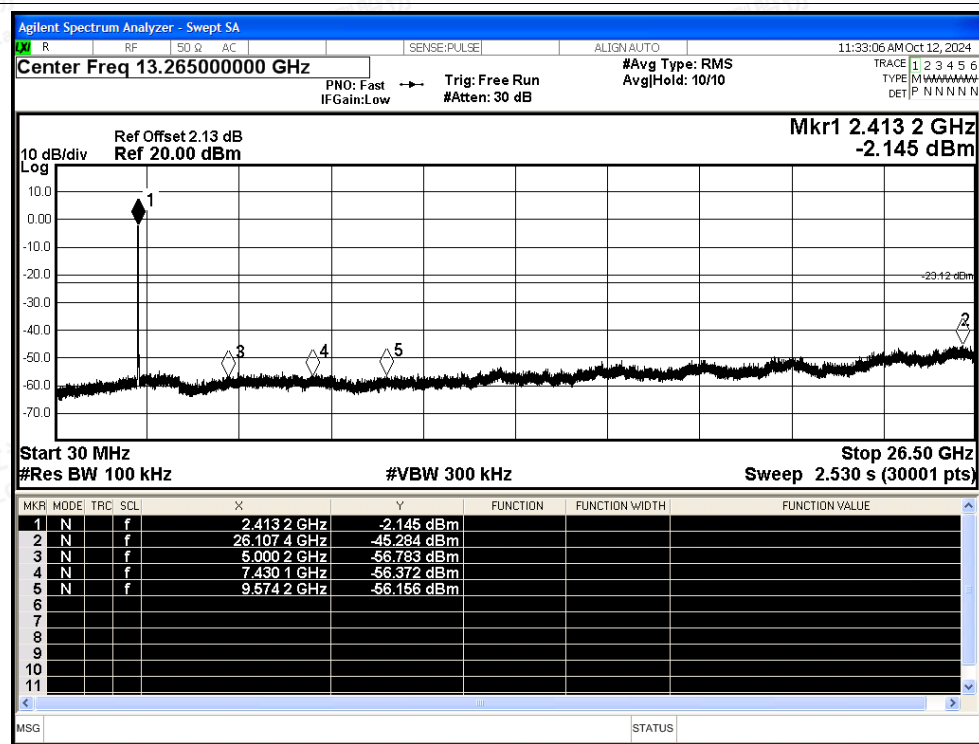

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## Tx. Spurious NVNT ax20 2437MHz Ant1 Ref

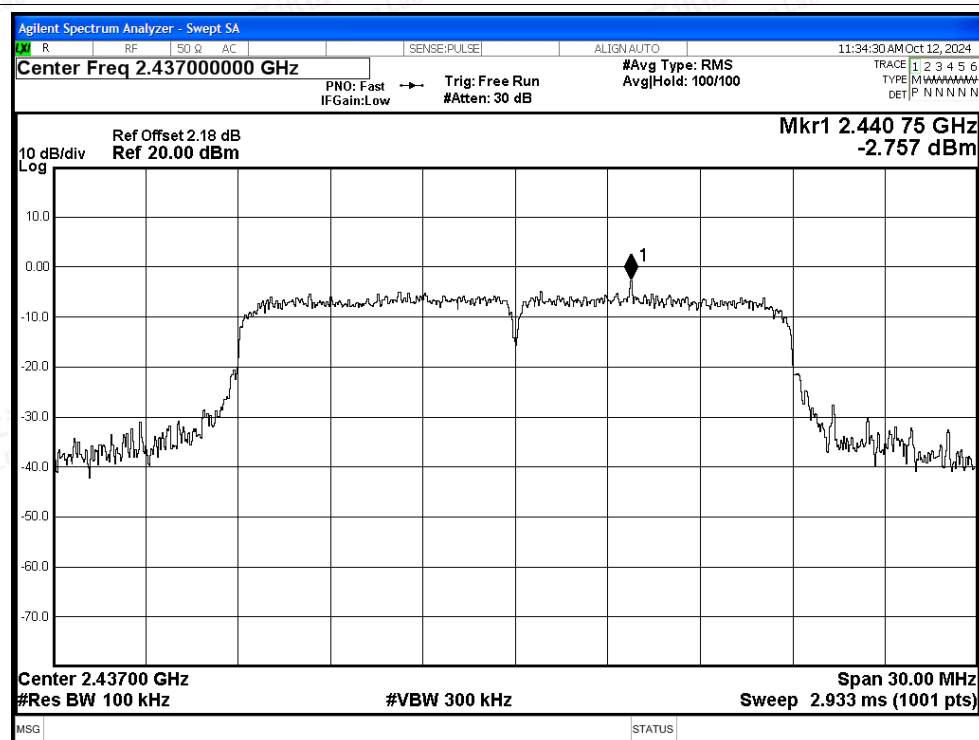

## Tx. Spurious NVNT ax20 2437MHz Ant1 Emission

