



11N20MIMO_Ant1_2442




11N20MIMO_Ant2_2442

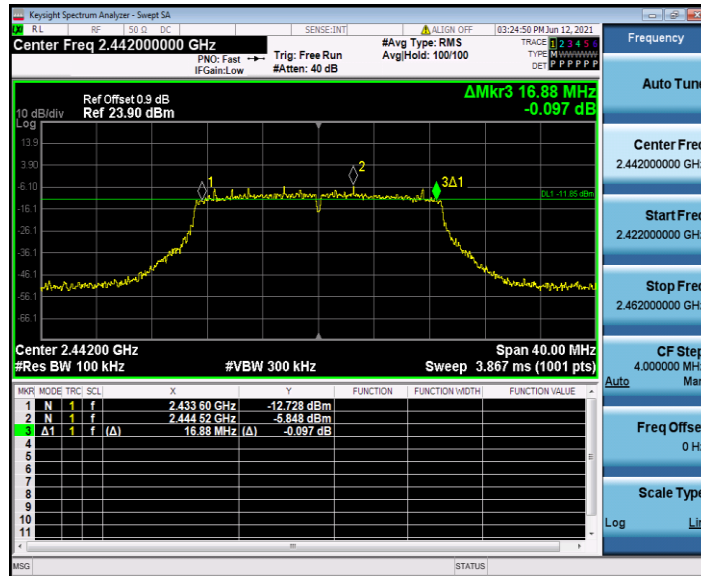


11N20MIMO_Ant1_2462

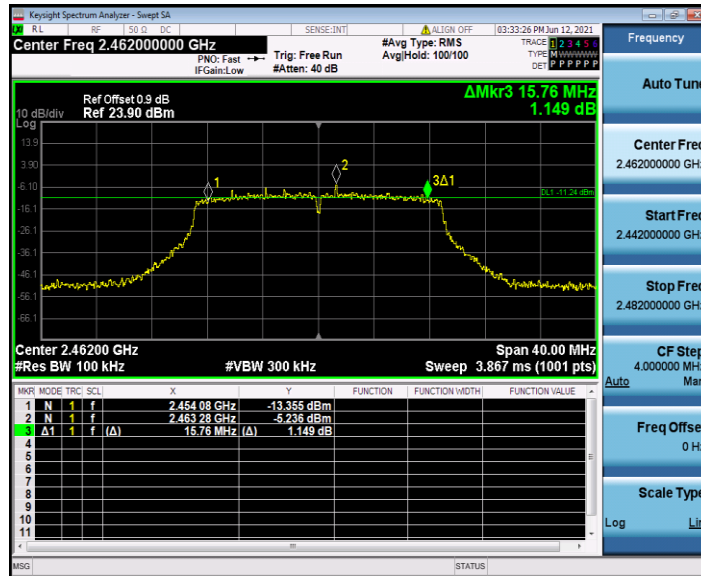


11N20MIMO_Ant2_2462

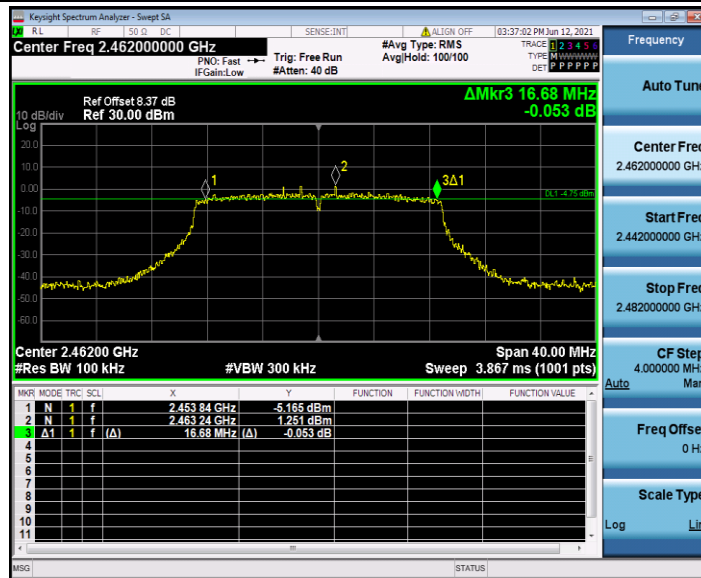


11N40MIMO_Ant1_2422

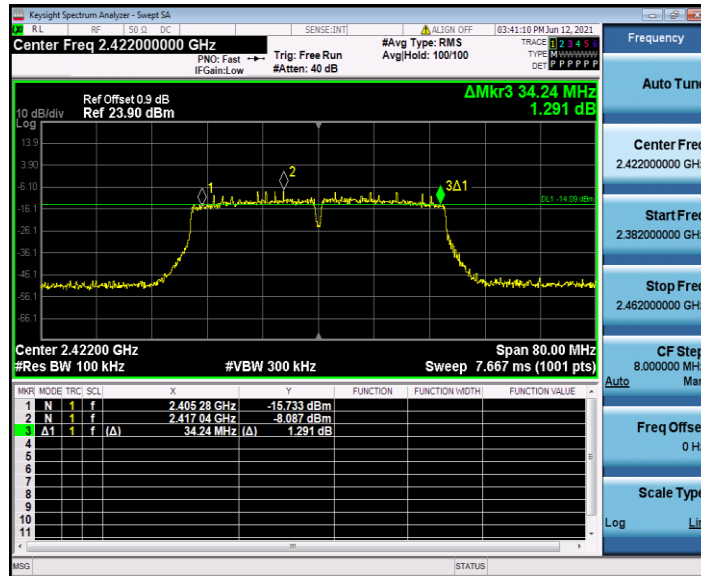


11N40MIMO_Ant2_2422

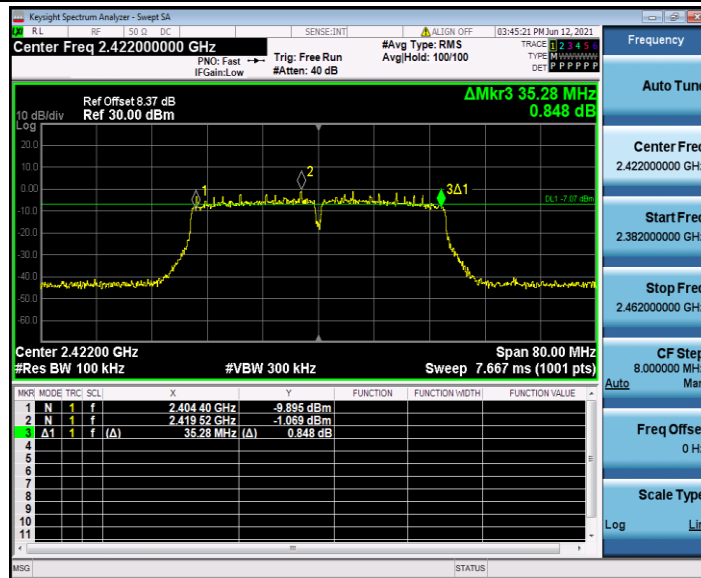


11N40MIMO_Ant1_2442

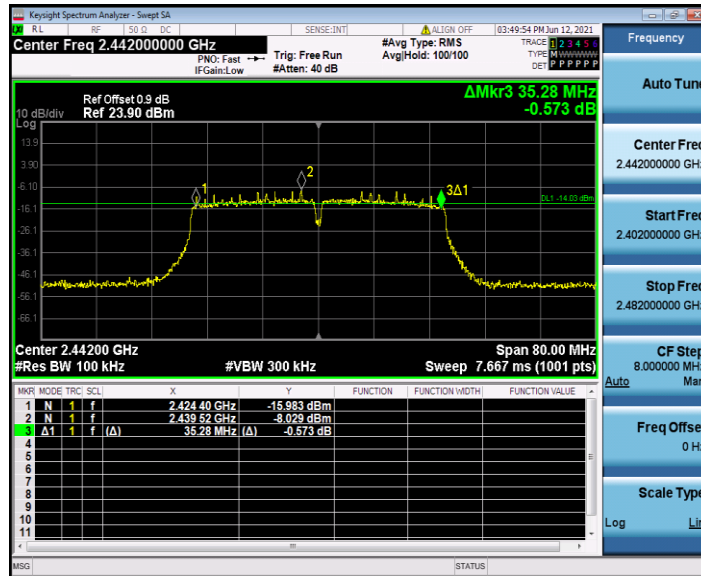


11N40MIMO_Ant2_2442

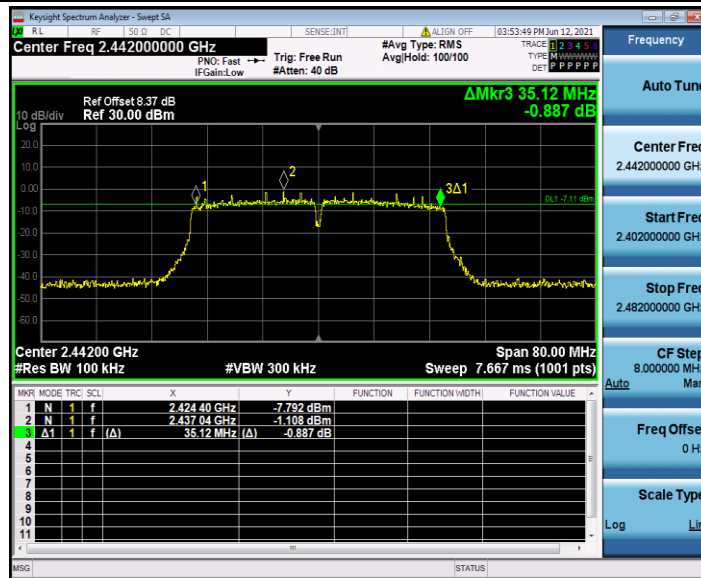

11N40MIMO_Ant1_2452

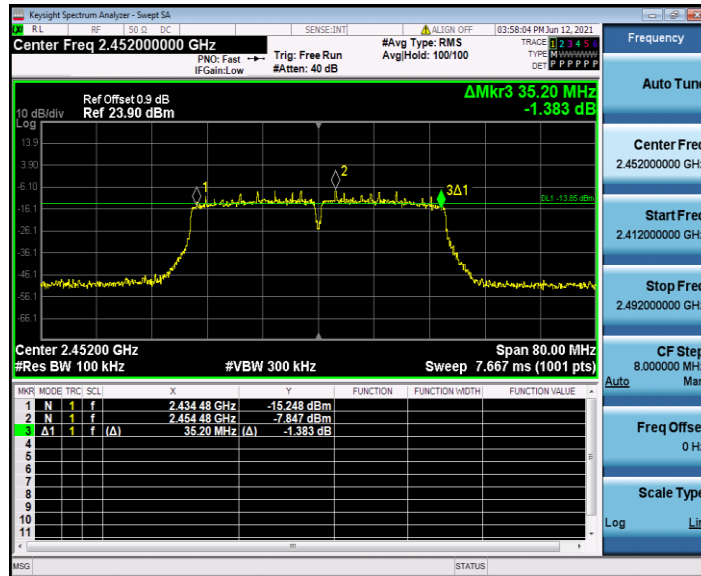

11N40MIMO_Ant2_2452

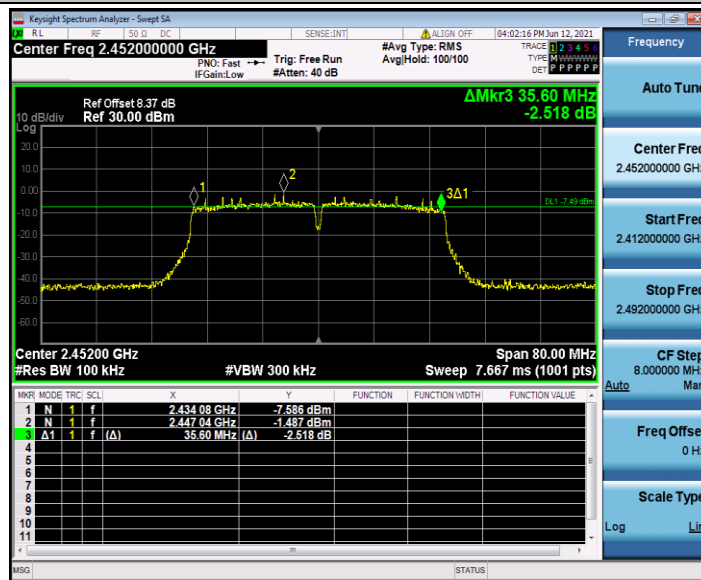

8.2 Appendix B: Maximum conducted output power**8.2.1 Test Result**

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	6.85	<=30	PASS
	Ant2	2412	14.37	<=30	PASS
	Ant1	2442	7.36	<=30	PASS
	Ant2	2442	14.26	<=30	PASS
	Ant1	2462	7.46	<=30	PASS
	Ant2	2462	14.23	<=30	PASS
11G	Ant1	2412	6.08	<=30	PASS
	Ant2	2412	13.57	<=30	PASS
	Ant1	2442	6.31	<=30	PASS
	Ant2	2442	13.59	<=30	PASS
	Ant1	2462	6.10	<=30	PASS
	Ant2	2462	12.94	<=30	PASS
11N20SISO	Ant1	2412	7.02	<=30	PASS
	Ant2	2412	13.55	<=30	PASS
	Ant1	2442	6.78	<=30	PASS
	Ant2	2442	14.49	<=30	PASS
	Ant1	2462	6.92	<=30	PASS
	Ant2	2462	13.95	<=30	PASS
11N40SISO	Ant1	2422	6.36	<=30	PASS
	Ant2	2422	13.79	<=30	PASS
	Ant1	2442	5.80	<=30	PASS
	Ant2	2442	13.68	<=30	PASS
	Ant1	2452	7.21	<=30	PASS
	Ant2	2452	13.58	<=30	PASS
11N20MIMO	Ant1+2	2412	14.42	<=30	PASS
	Ant1+2	2442	15.17	<=30	PASS
	Ant1+2	2462	14.74	<=30	PASS
11N40MIMO	Ant1+2	2422	14.51	<=30	PASS
	Ant1+2	2442	14.34	<=30	PASS
	Ant1+2	2452	14.48	<=30	PASS

Ant1 power: Ant 1 conducted power + duty cycle factor.

Ant2 power: Ant 2 conducted power + duty cycle factor.

Ant1+2 power: Ant 1 conducted power + duty cycle factor + Ant 2 conducted power + duty cycle factor.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

8.3 Appendix C: Maximum power spectral density**8.3.1 Test Result**

TestMode	Antenna	Channel	Result [dBm/3-100kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-19.96	<=8	PASS
	Ant2	2412	-12.16	<=8	PASS
	Ant1	2442	-19.22	<=8	PASS
	Ant2	2442	-12.61	<=8	PASS
	Ant1	2462	-19.54	<=8	PASS
	Ant2	2462	-12.78	<=8	PASS
11G	Ant1	2412	-21.61	<=8	PASS
	Ant2	2412	-13.66	<=8	PASS
	Ant1	2442	-20.99	<=8	PASS
	Ant2	2442	-13.29	<=8	PASS
	Ant1	2462	-21.94	<=8	PASS
	Ant2	2462	-15	<=8	PASS
11N20SISO	Ant1	2412	-20.34	<=8	PASS
	Ant2	2412	-13.43	<=8	PASS
	Ant1	2442	-20.56	<=8	PASS
	Ant2	2442	-12.84	<=8	PASS
	Ant1	2462	-20.75	<=8	PASS
	Ant2	2462	-13.1	<=8	PASS
11N40SISO	Ant1	2422	-22.23	<=8	PASS
	Ant2	2422	-15.42	<=8	PASS
	Ant1	2442	-21.65	<=8	PASS
	Ant2	2442	-15.44	<=8	PASS
	Ant1	2452	-22.7	<=8	PASS
	Ant2	2452	-15.29	<=8	PASS
11N20MIMO	Ant1+2	2412	-12.62	<=8	PASS
	Ant1+2	2442	-12.16	<=8	PASS
	Ant1+2	2462	-12.41	<=8	PASS
11N40MIMO	Ant1+2	2422	-14.60	<=8	PASS
	Ant1+2	2442	-14.51	<=8	PASS
	Ant1+2	2452	-14.57	<=8	PASS

Ant1 power spectral density: Ant 1 conducted power spectral density + duty cycle factor

Ant2 power spectral density: Ant 2 conducted power spectral density + duty cycle factor

Ant1+2 power spectral density: Ant 1 conducted power spectral density + duty cycle factor + Ant 2 conducted power spectral density + duty cycle factor.


The Duty Cycle Factor is compensated in the conducted power spectral density test graph.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

8.3.2 Test Graphs

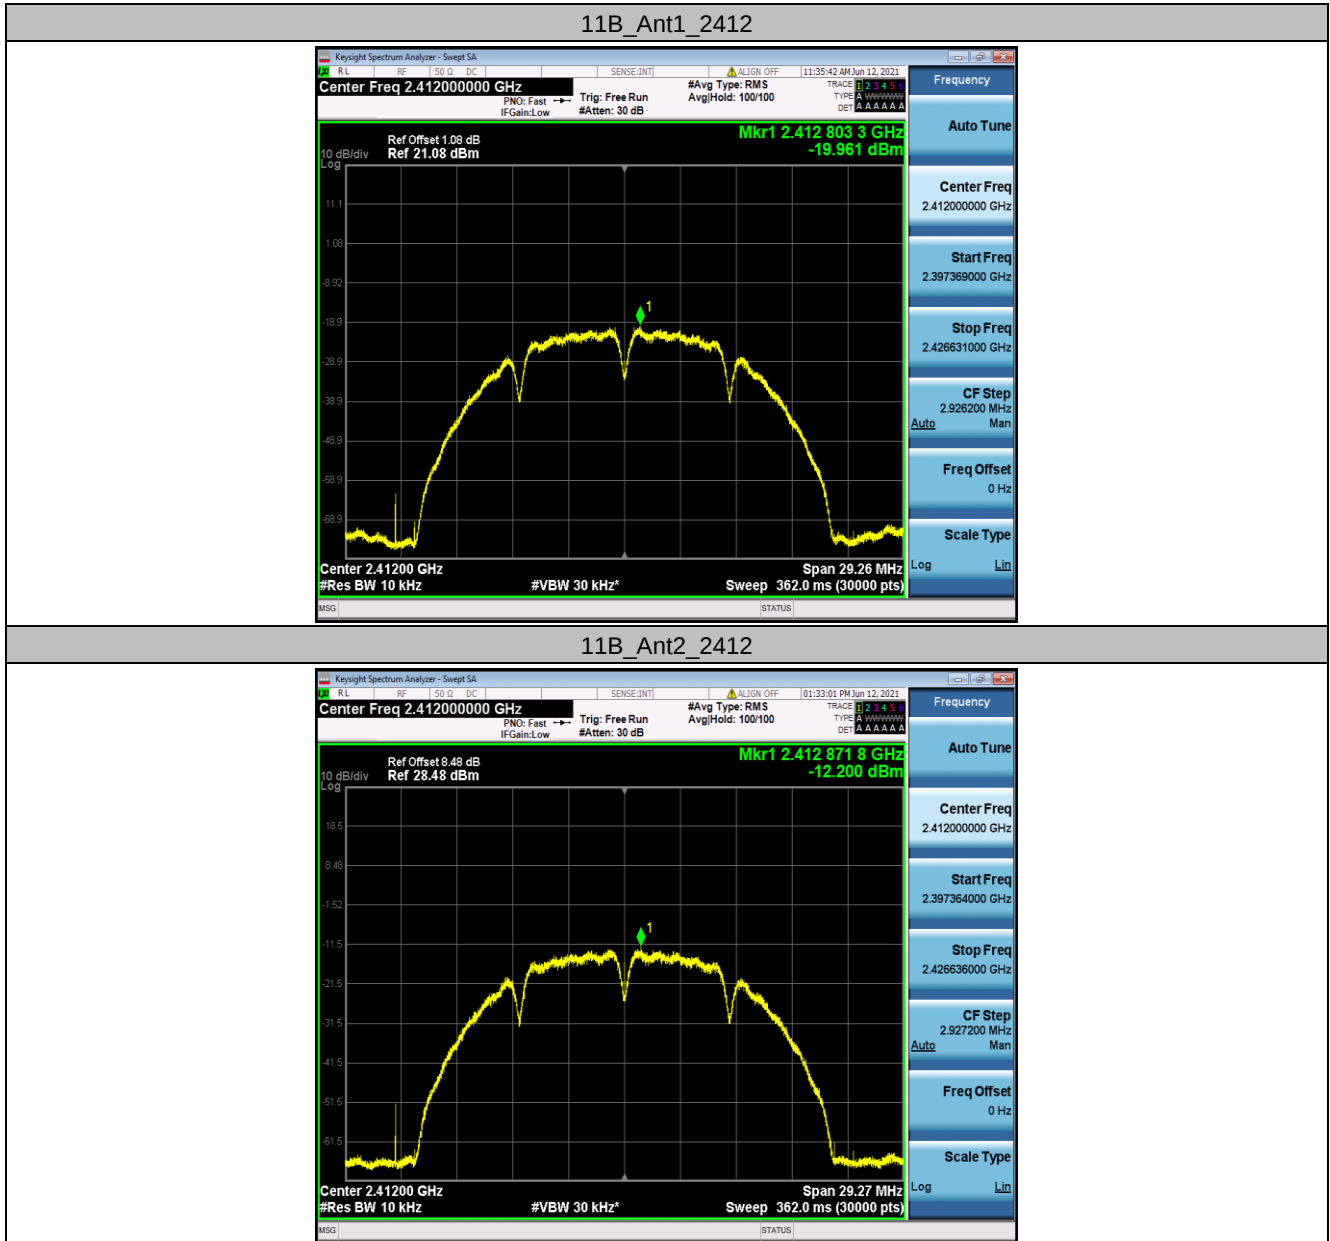

11B_Ant1_2442



11B_Ant2_2442




11B_Ant1_2462




11B_Ant2_2462




11G_Ant1_2412

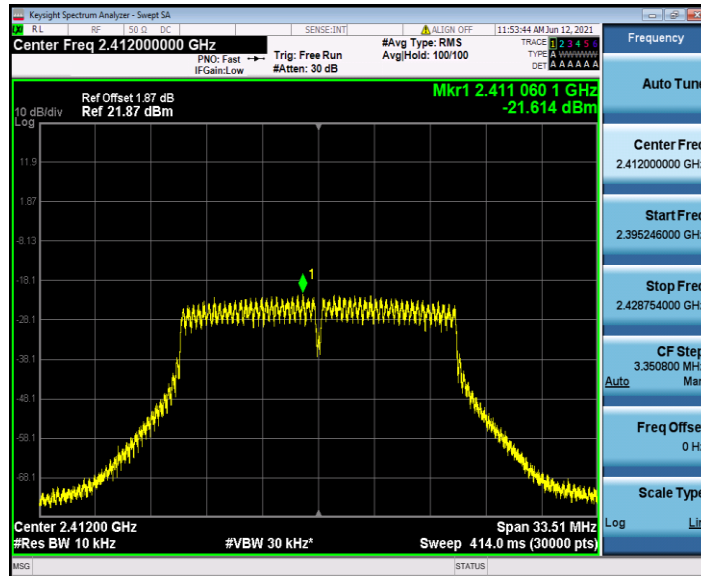


11G_Ant2_2412

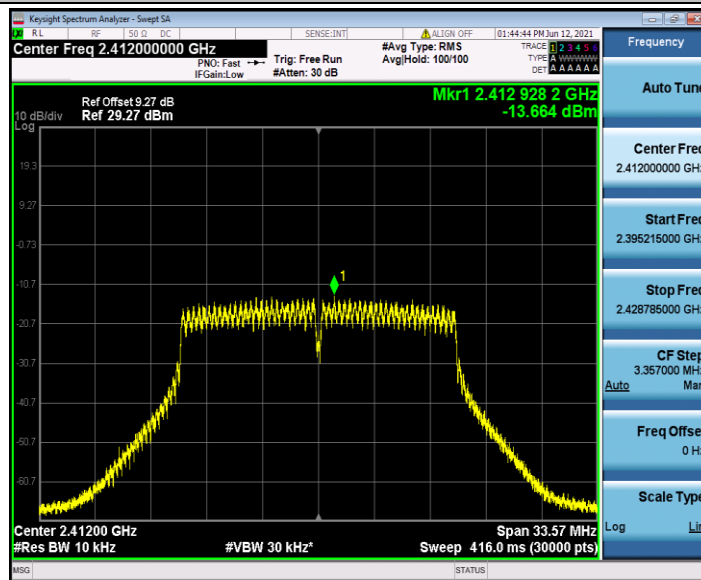


11G_Ant1_2442

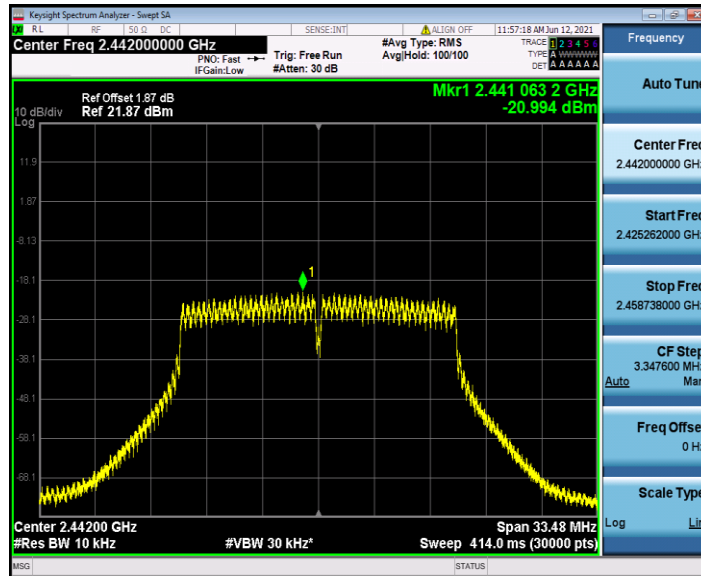


11G_Ant2_2442

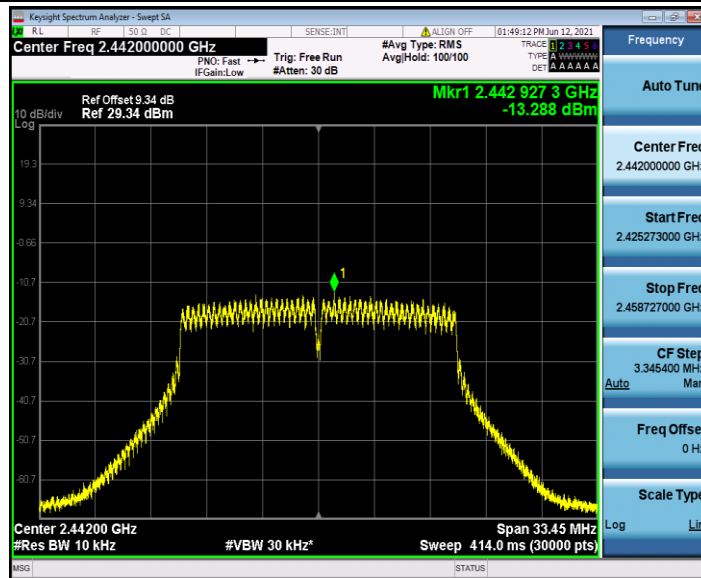


11G_Ant1_2462

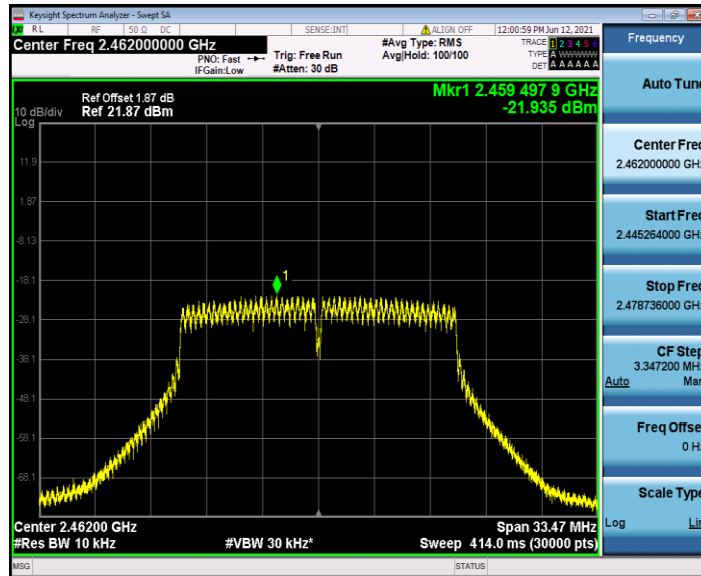


11G_Ant2_2462

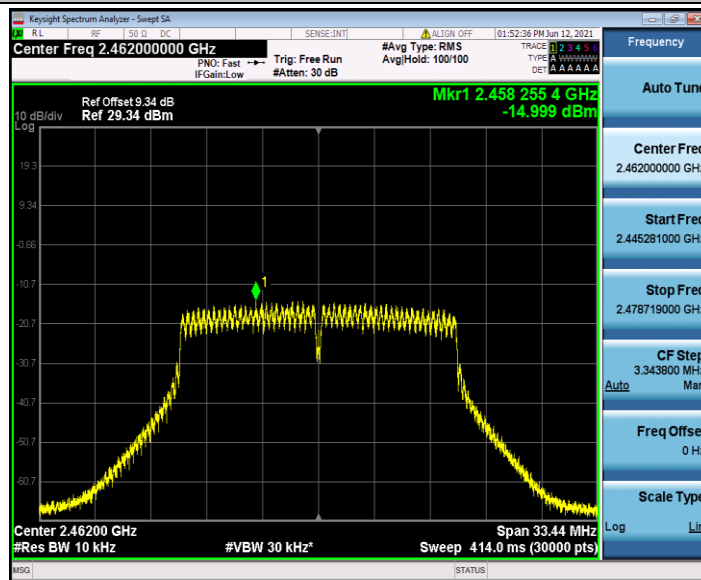


11N20SISO_Ant1_2412

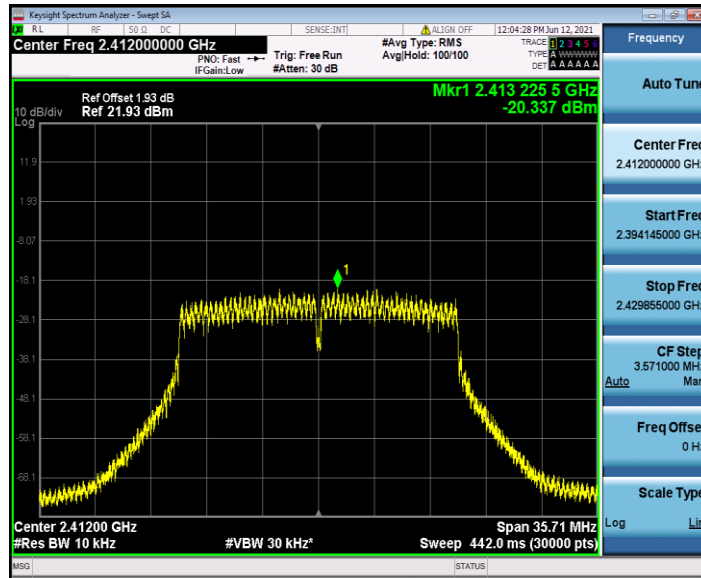


11N20SISO_Ant2_2412

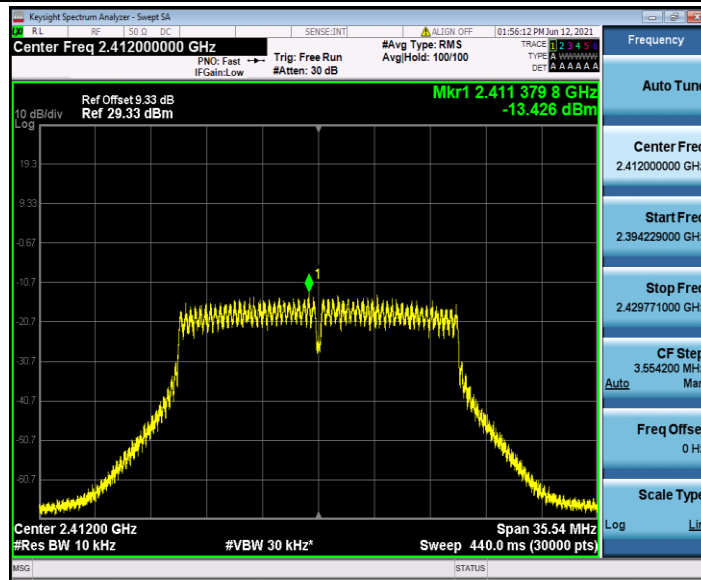


11N20SISO_Ant1_2442

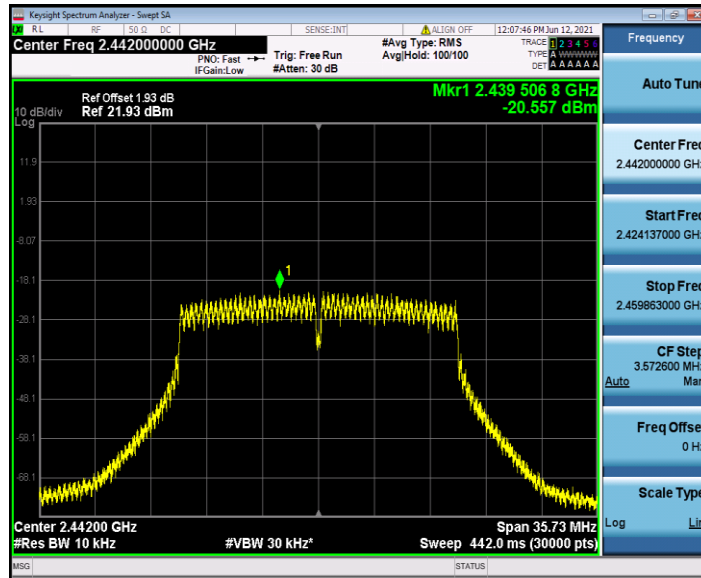


11N20SISO_Ant2_2442

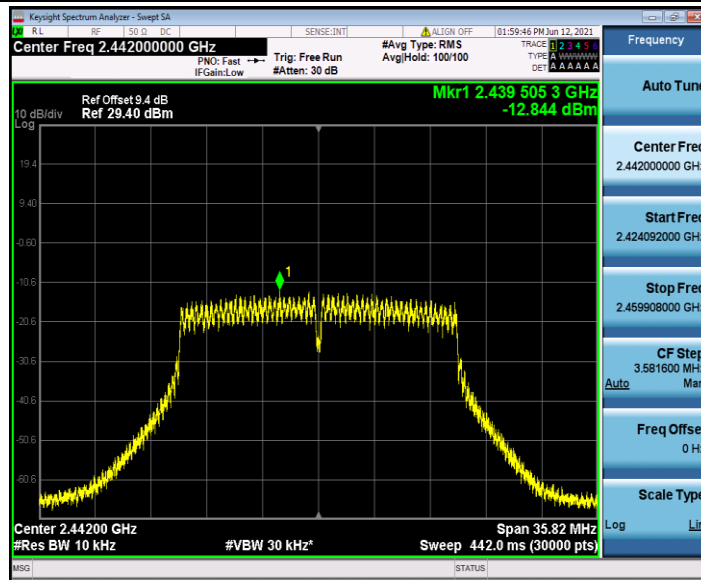


11N20SISO_Ant1_2462

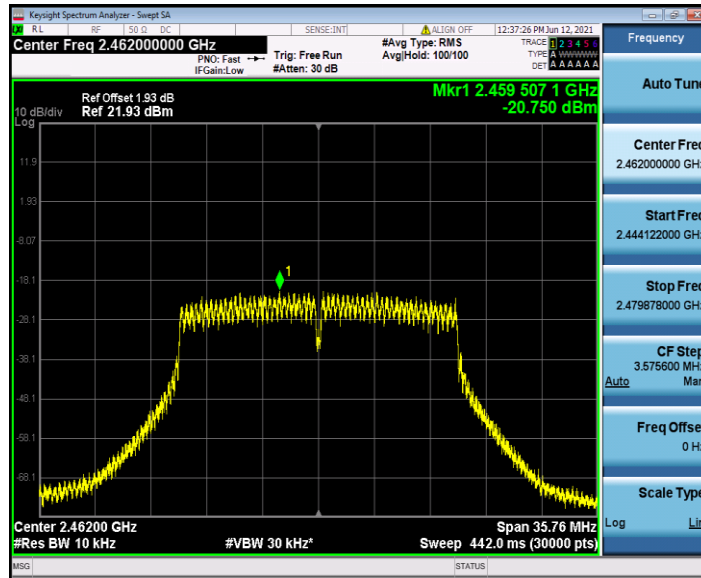


11N20SISO_Ant2_2462

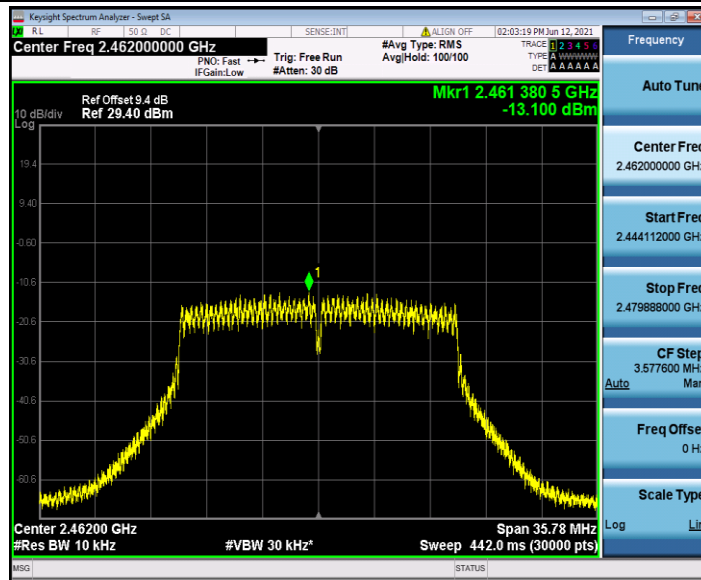


11N40SISO_Ant1_2422

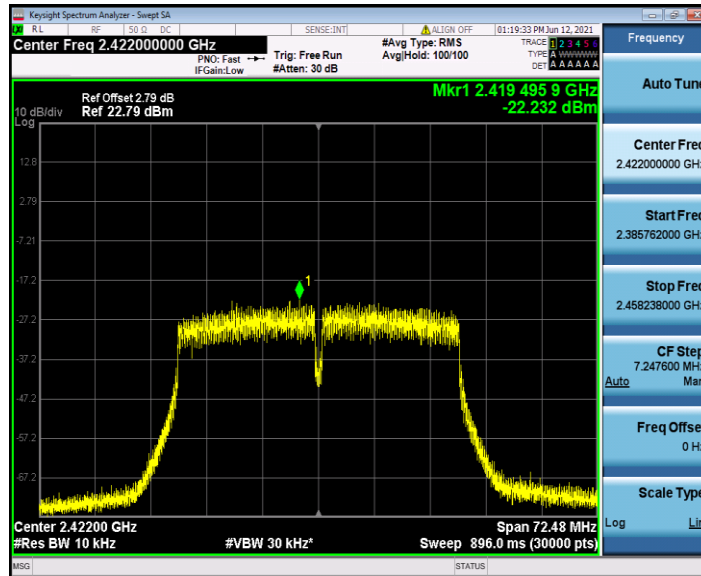


11N40SISO_Ant2_2422

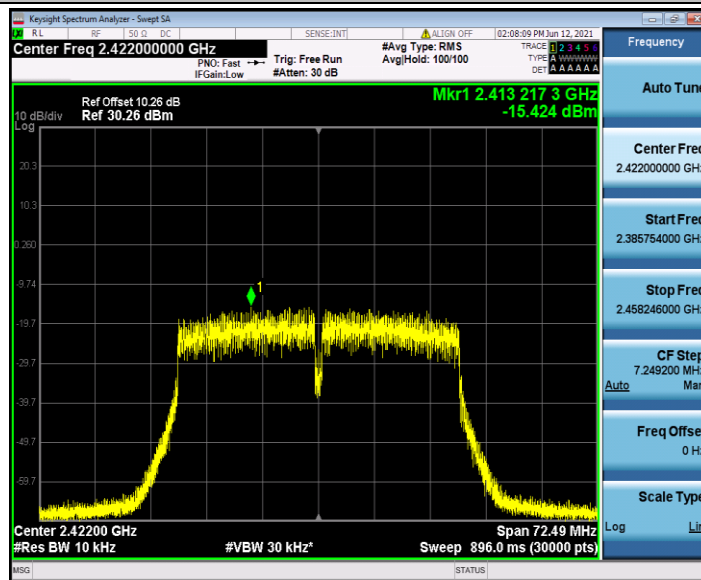


11N40SISO_Ant1_2442

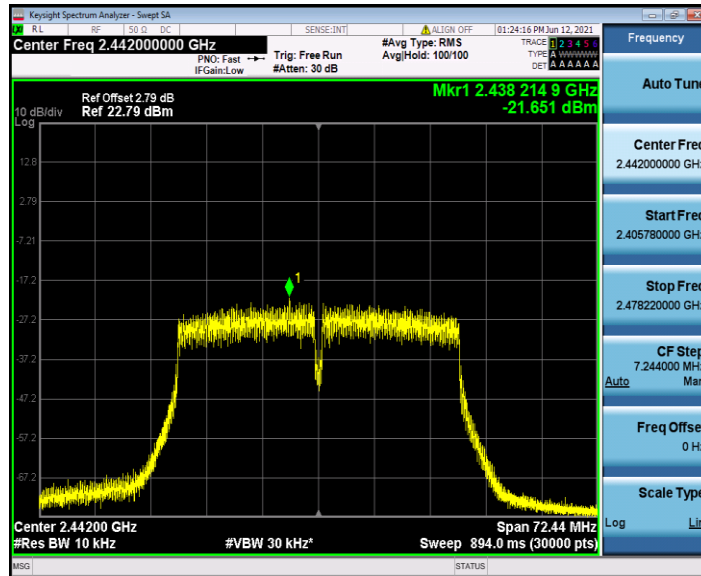


11N40SISO_Ant2_2442

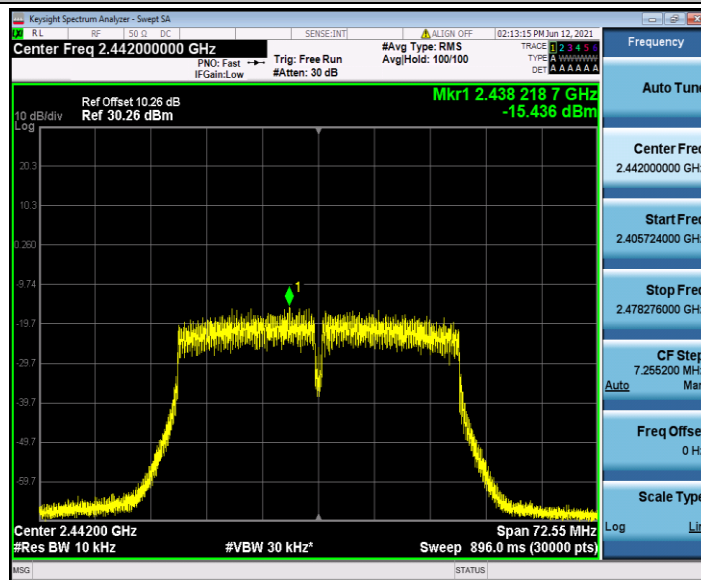

11N40SISO_Ant1_2452

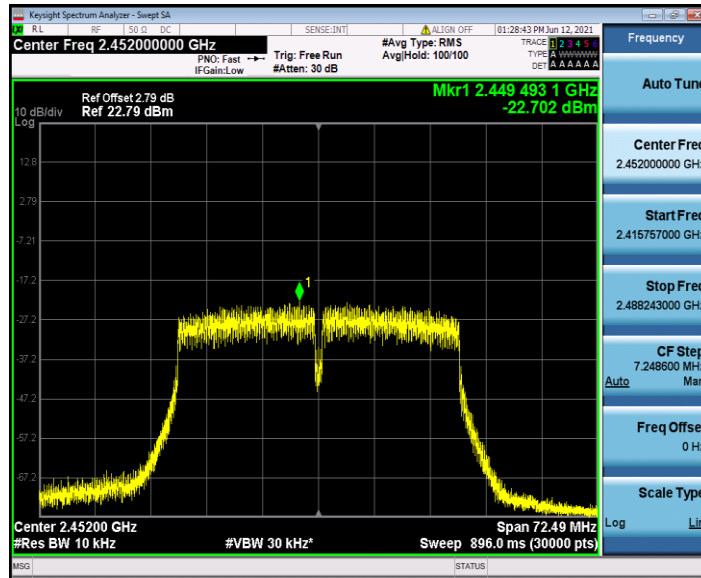

11N40SISO_Ant2_2452

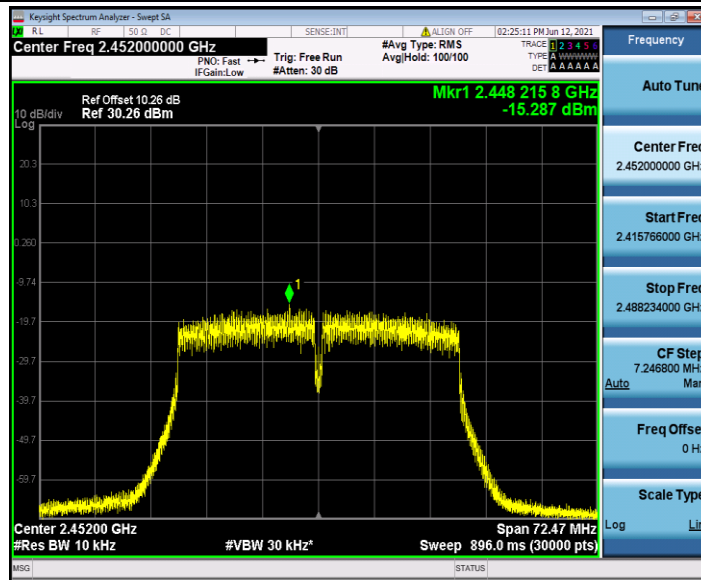


8.4 Appendix D: Band edge measurements**8.4.1 Test Result**

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	-2.50	-49.6	<=-32.5	PASS
	Ant2	Low	2412	5.00	-42.62	<=-25	PASS
	Ant1	High	2462	-1.88	-56.33	<=-31.88	PASS
	Ant2	High	2462	4.79	-47.6	<=-25.21	PASS
11G	Ant1	Low	2412	-4.83	-43.58	<=-34.83	PASS
	Ant2	Low	2412	2.51	-37.31	<=-27.49	PASS
	Ant1	High	2462	-5.05	-56.57	<=-35.05	PASS
	Ant2	High	2462	2.18	-49.69	<=-27.82	PASS
11N20SISO	Ant1	Low	2412	-3.80	-40.37	<=-33.8	PASS
	Ant2	Low	2412	2.59	-33.79	<=-27.41	PASS
	Ant1	High	2462	-3.98	-56.64	<=-33.98	PASS
	Ant2	High	2462	3.08	-47.22	<=-26.92	PASS
11N40SISO	Ant1	Low	2422	-6.33	-46.22	<=-36.33	PASS
	Ant2	Low	2422	0.31	-40.43	<=-29.69	PASS
	Ant1	High	2452	-6.58	-53.91	<=-36.58	PASS
	Ant2	High	2452	-0.04	-44.29	<=-30.04	PASS


8.4.2 Test Graphs



11B_Ant1_High_2462

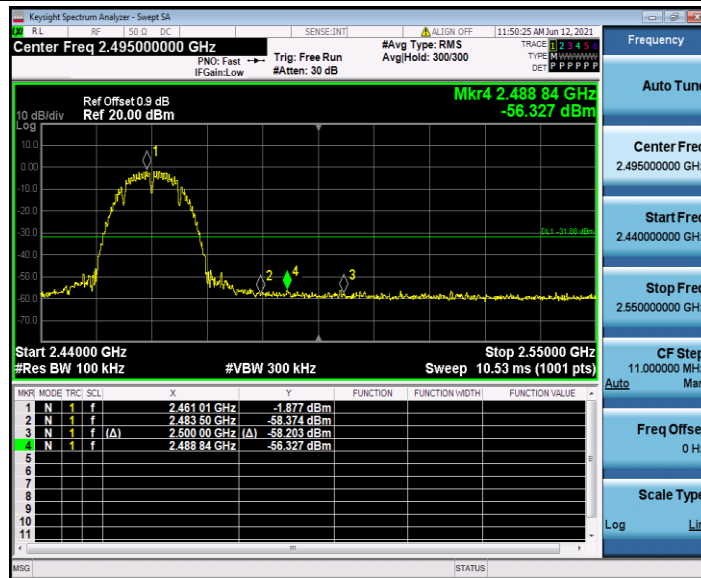


11B_Ant2_High_2462

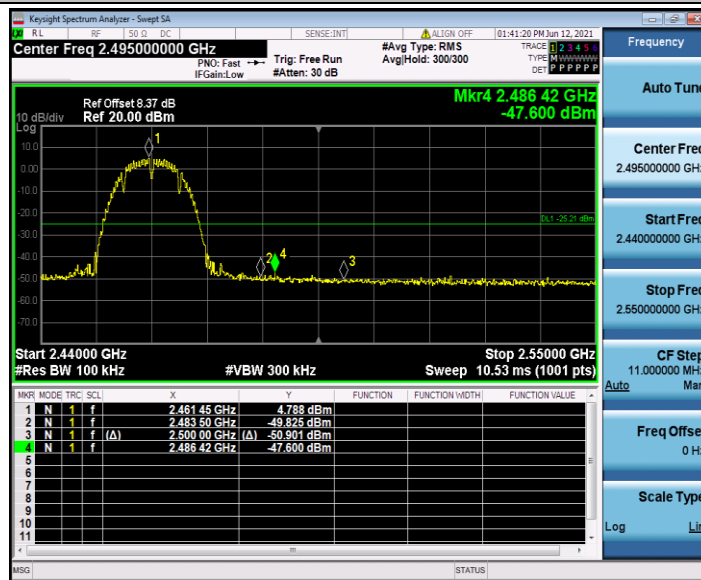


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou branch Technical Services Co., Ltd. EEC Laboratory, 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com


11G_Ant1_Low_2412

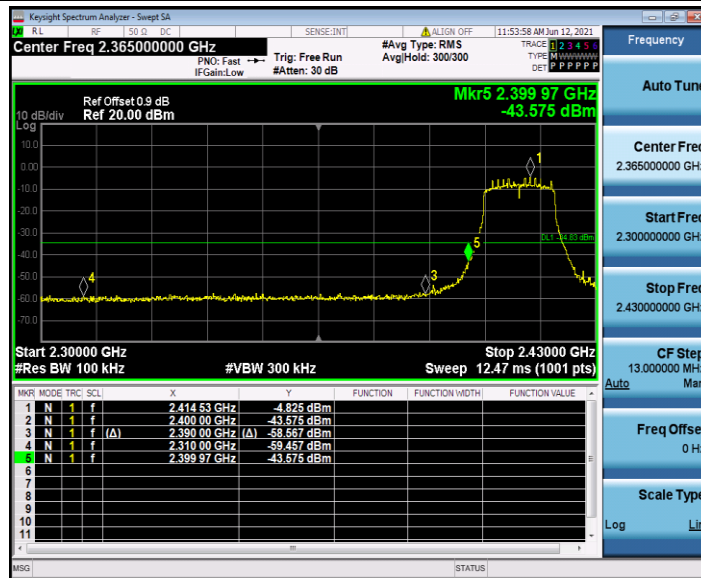


11G_Ant2_Low_2412

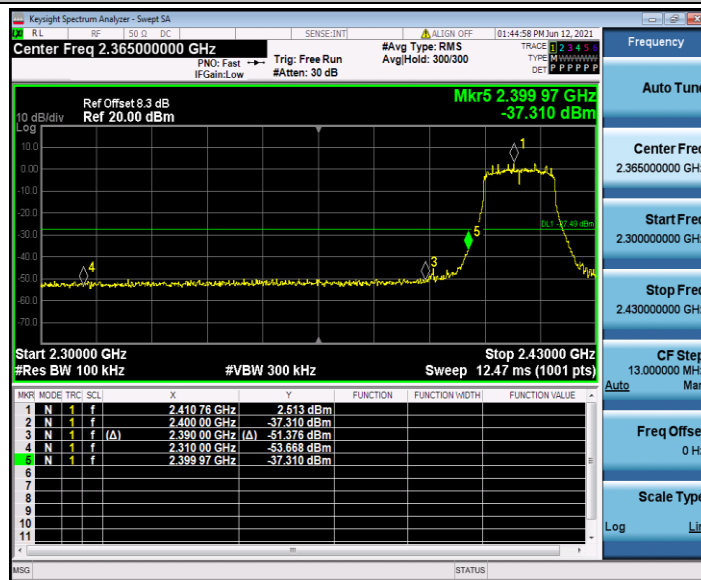


11G_Ant1_High_2462

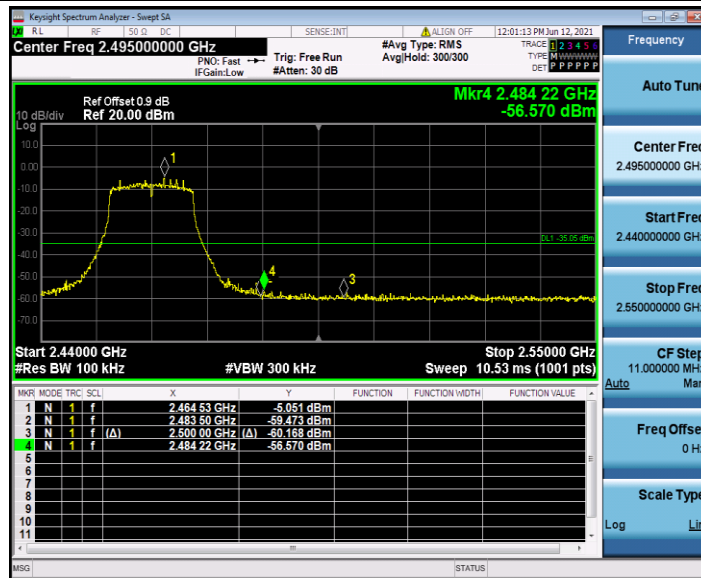


11G_Ant2_High_2462

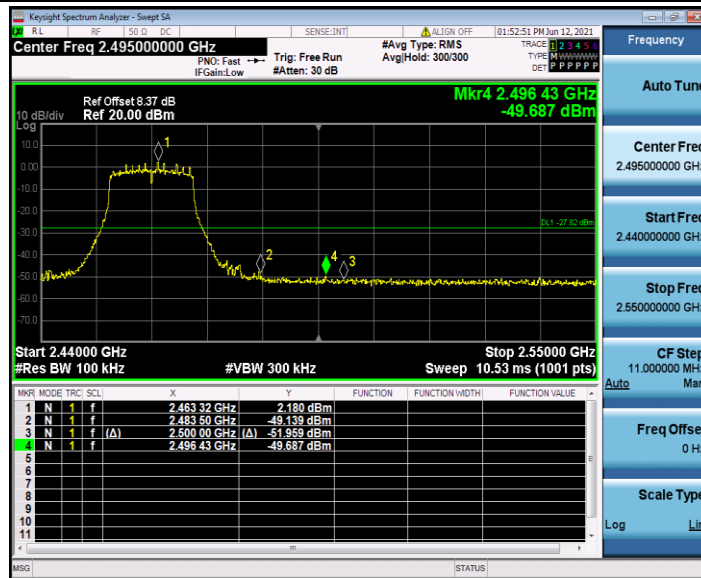


11N20SISO_Ant1_Low_2412

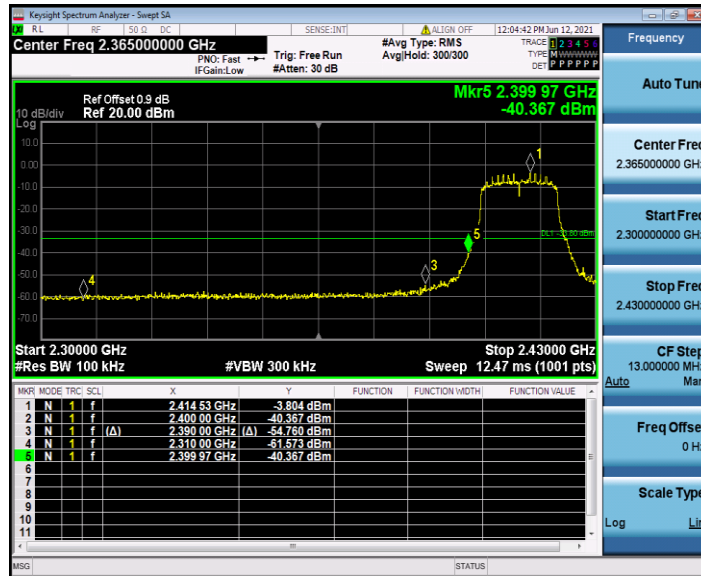


11N20SISO_Ant2_Low_2412

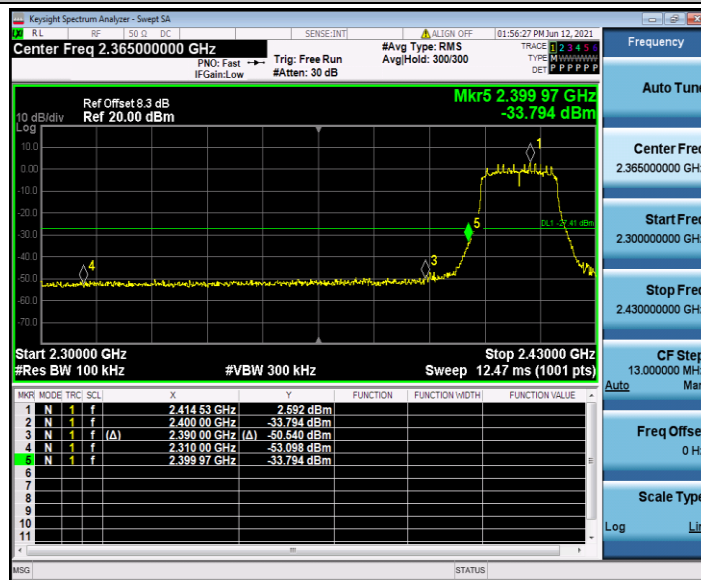


11N20SISO_Ant1_High_2462

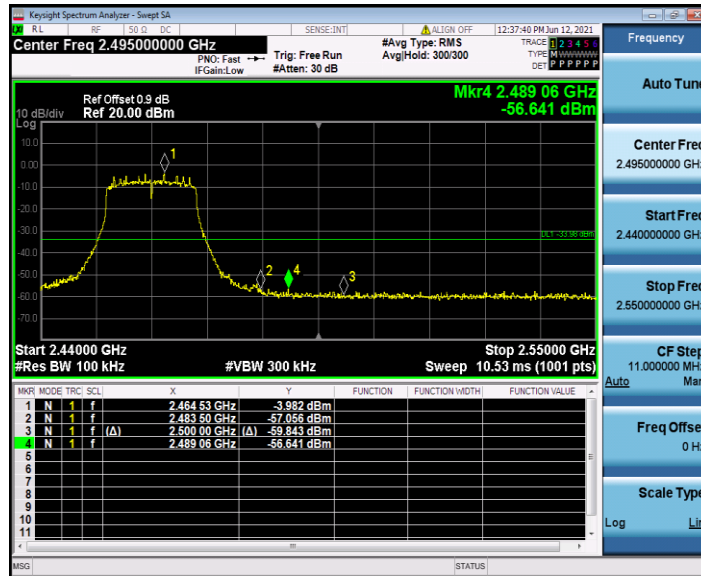


11N20SISO_Ant2_High_2462

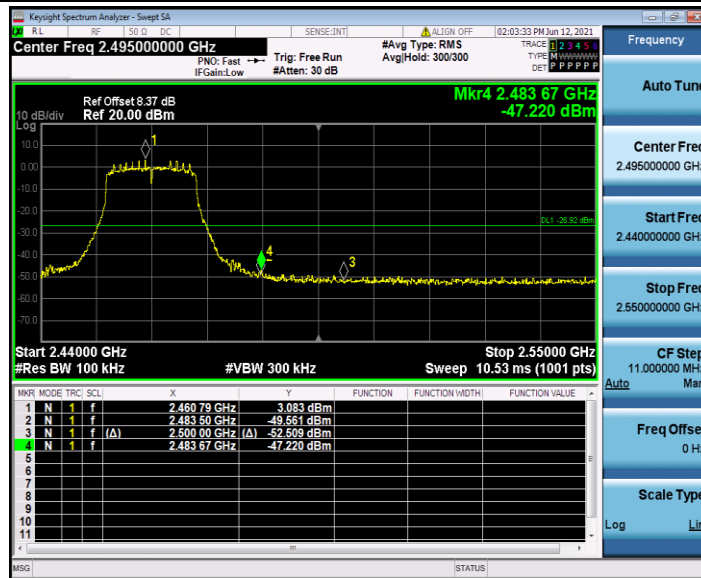


11N40SISO_Ant1_Low_2422

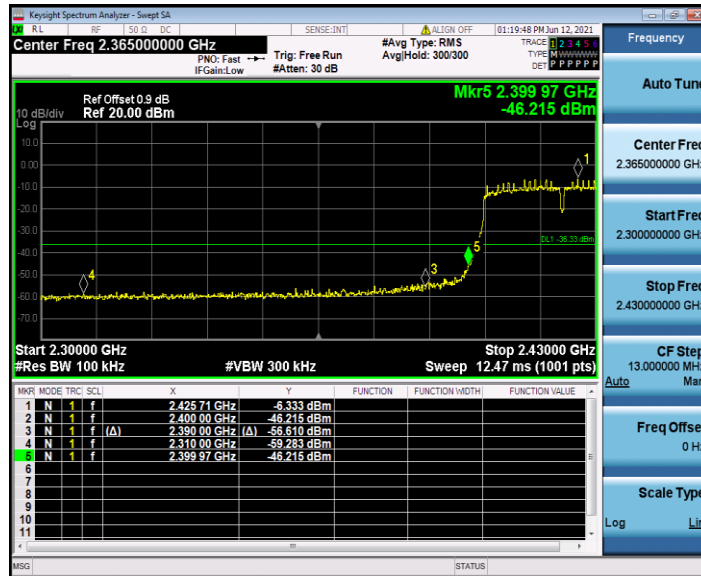

11N40SISO_Ant2_Low_2422

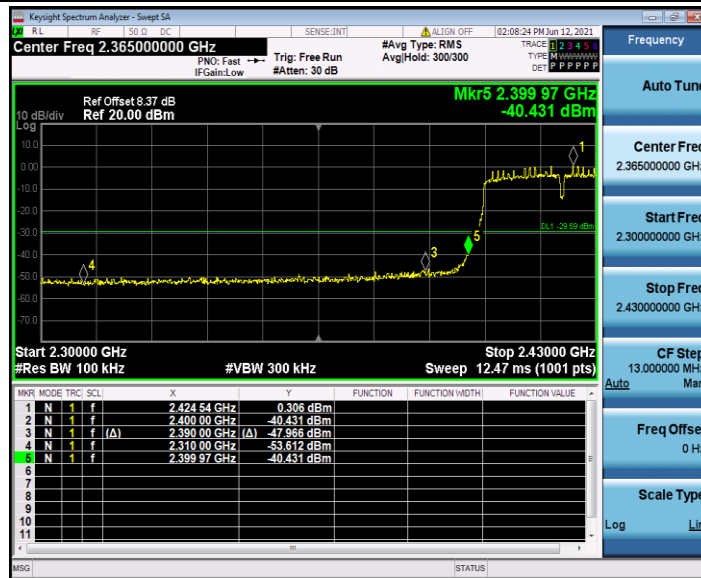

11N40SISO_Ant1_High_2452

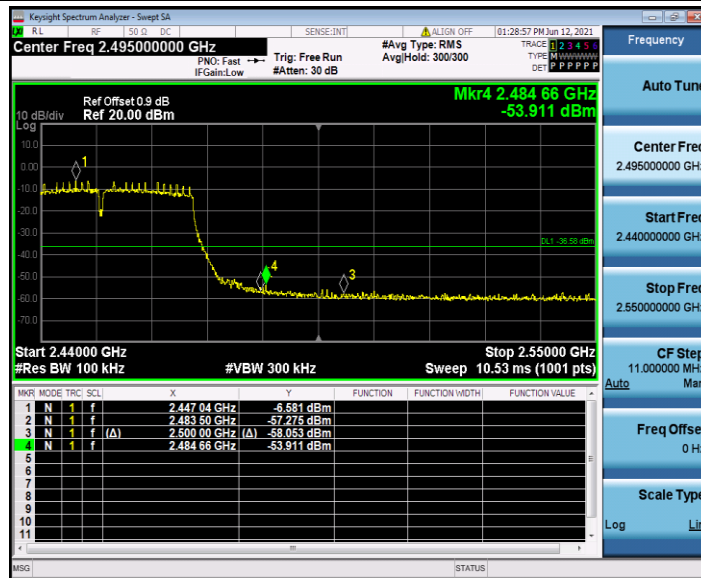

11N40SISO_Ant2_High_2452




8.5 Appendix E: Conducted Spurious Emission**8.5.1 Test Result**


TestMode	Antenna	Channel	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	-2.84	-2.84	---	PASS
			30~1000	---	-69.879	<=-22.84	PASS
			1000~26500	---	-60.825	<=-22.84	PASS
	Ant2	2412	Reference	4.75	4.75	---	PASS
			30~1000	---	-61.662	<=-15.254	PASS
			1000~26500	---	-51.369	<=-15.254	PASS
	Ant1	2442	Reference	-2.19	-2.19	---	PASS
			30~1000	---	-69.627	<=-22.194	PASS
			1000~26500	---	-59.91	<=-22.194	PASS
	Ant2	2442	Reference	4.92	4.92	---	PASS
			30~1000	---	-62.059	<=-15.079	PASS
			1000~26500	---	-52.996	<=-15.079	PASS
	Ant1	2462	Reference	-1.98	-1.98	---	PASS
			30~1000	---	-69.562	<=-21.975	PASS
			1000~26500	---	-59.961	<=-21.975	PASS
	Ant2	2462	Reference	4.86	4.86	---	PASS
			30~1000	---	-62.746	<=-15.143	PASS
			1000~26500	---	-53.348	<=-15.143	PASS
11G	Ant1	2412	Reference	-4.79	-4.79	---	PASS
			30~1000	---	-70.39	<=-24.792	PASS
			1000~26500	---	-60.137	<=-24.792	PASS
	Ant2	2412	Reference	1.39	1.39	---	PASS
			30~1000	---	-63.151	<=-18.615	PASS
			1000~26500	---	-52.861	<=-18.615	PASS
	Ant1	2442	Reference	-4.63	-4.63	---	PASS
			30~1000	---	-70.012	<=-24.632	PASS
			1000~26500	---	-59.815	<=-24.632	PASS
	Ant2	2442	Reference	1.72	1.72	---	PASS
			30~1000	---	-63.201	<=-18.285	PASS
			1000~26500	---	-52.082	<=-18.285	PASS
	Ant1	2462	Reference	-4.54	-4.54	---	PASS
			30~1000	---	-70.206	<=-24.542	PASS
			1000~26500	---	-60.584	<=-24.542	PASS
	Ant2	2462	Reference	2.00	2.00	---	PASS
			30~1000	---	-62.347	<=-18.003	PASS
			1000~26500	---	-53.322	<=-18.003	PASS

11N20SISO	Ant1	2412	Reference	-4.18	-4.18	---	PASS
			30~1000	30~1000	-70.226	<=-24.182	PASS
			1000~26500	1000~26500	-60.29	<=-24.182	PASS
	Ant2	2412	Reference	2.05	2.05	---	PASS
			30~1000	30~1000	-62.545	<=-17.947	PASS
			1000~26500	1000~26500	-53.115	<=-17.947	PASS
	Ant1	2442	Reference	-4.20	-4.20	---	PASS
			30~1000	30~1000	-70.156	<=-24.197	PASS
			1000~26500	1000~26500	-58.231	<=-24.197	PASS
	Ant2	2442	Reference	2.98	2.98	---	PASS
			30~1000	30~1000	-63.17	<=-17.019	PASS
			1000~26500	1000~26500	-52.786	<=-17.019	PASS
11N40SISO	Ant1	2422	Reference	-3.94	-3.94	---	PASS
			30~1000	30~1000	-70.39	<=-23.938	PASS
			1000~26500	1000~26500	-59.855	<=-23.938	PASS
	Ant2	2462	Reference	2.50	2.50	---	PASS
			30~1000	30~1000	-62.591	<=-17.497	PASS
			1000~26500	1000~26500	-52.281	<=-17.497	PASS
	Ant1	2442	Reference	-6.28	-6.28	---	PASS
			30~1000	30~1000	-67.35	<=-26.277	PASS
			1000~26500	1000~26500	-60.391	<=-26.277	PASS
	Ant2	2422	Reference	0.24	0.24	---	PASS
			30~1000	30~1000	-62.386	<=-19.76	PASS
			1000~26500	1000~26500	-52.617	<=-19.76	PASS
	Ant1	2442	Reference	-6.44	-6.44	---	PASS
			30~1000	30~1000	-67.432	<=-26.441	PASS
			1000~26500	1000~26500	-59.94	<=-26.441	PASS
	Ant2	2442	Reference	-0.27	-0.27	---	PASS
			30~1000	30~1000	-58.866	<=-20.274	PASS
			1000~26500	1000~26500	-51.287	<=-20.274	PASS
	Ant1	2452	Reference	-6.59	-6.59	---	PASS
			30~1000	30~1000	-65.834	<=-26.585	PASS
			1000~26500	1000~26500	-60.185	<=-26.585	PASS
	Ant2	2452	Reference	-0.60	-0.60	---	PASS
			30~1000	30~1000	-62.043	<=-20.596	PASS
			1000~26500	1000~26500	-53.542	<=-20.596	PASS

8.5.2 Test Graphs

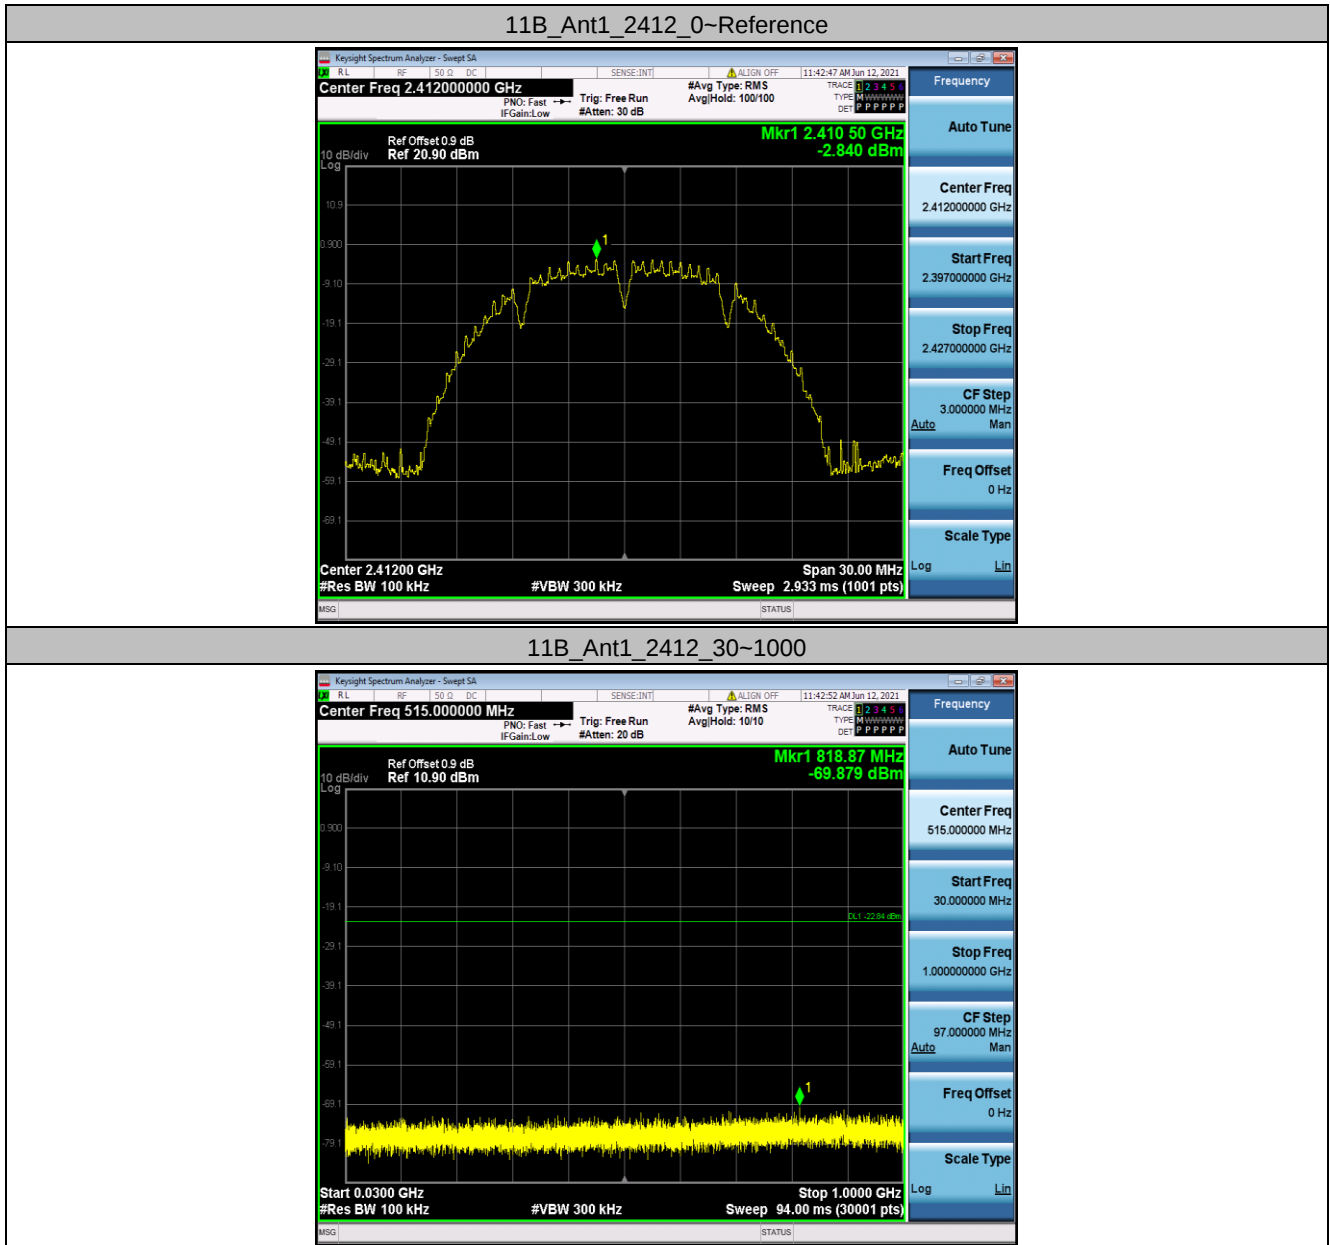


11B_Ant1_2412_1000~26500

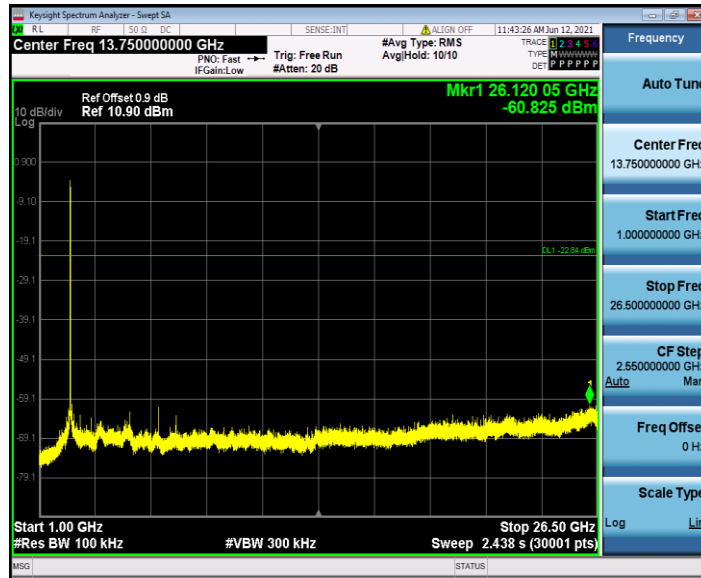


11B_Ant2_2412_0-Reference



11B_Ant2_2412_30~1000

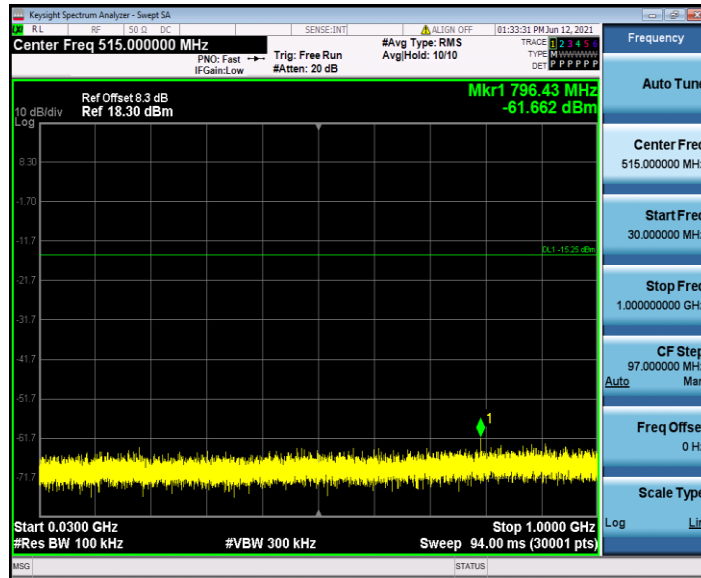


11B_Ant2_2412_1000~26500

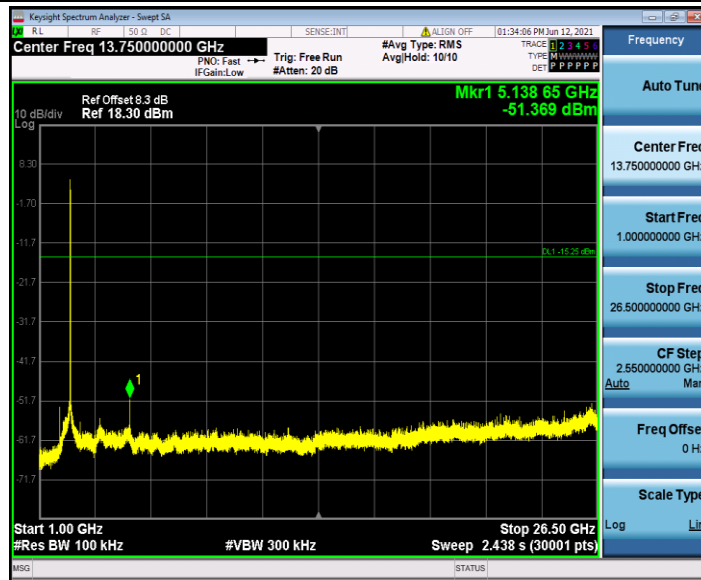


11B_Ant1_2442_0-Reference



11B_Ant1_2442_30-1000

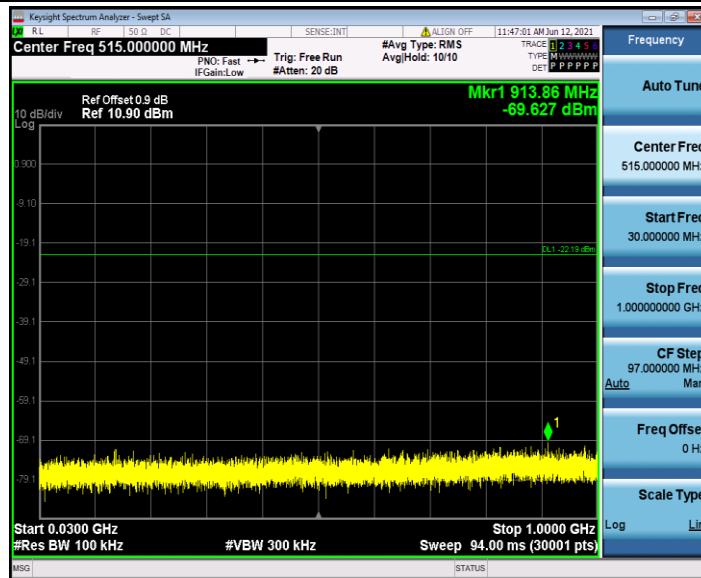

11B_Ant1_2442_1000~26500

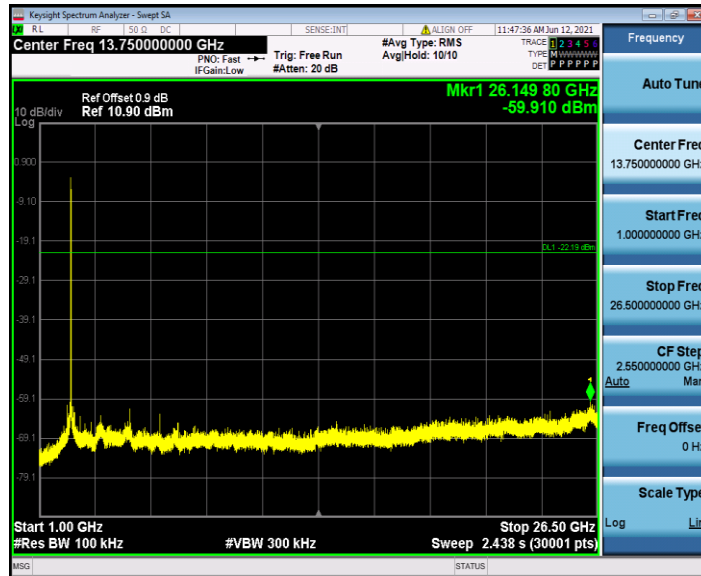

11B_Ant2_2442_0-Reference

