



Appendix A

RF Test Data for BLE (Conducted Measurement)

Product Name: Gamepad

Test Model: MOCUTE-060

Environmental Conditions

Temperature:	22.8° C
Relative Humidity:	53.7%
ATM Pressure:	100.0 kPa
Test Engineer:	Bill Zhu
Supervised by:	Li Huan




A.1 6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.693	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.697	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.707	0.5	Pass





Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

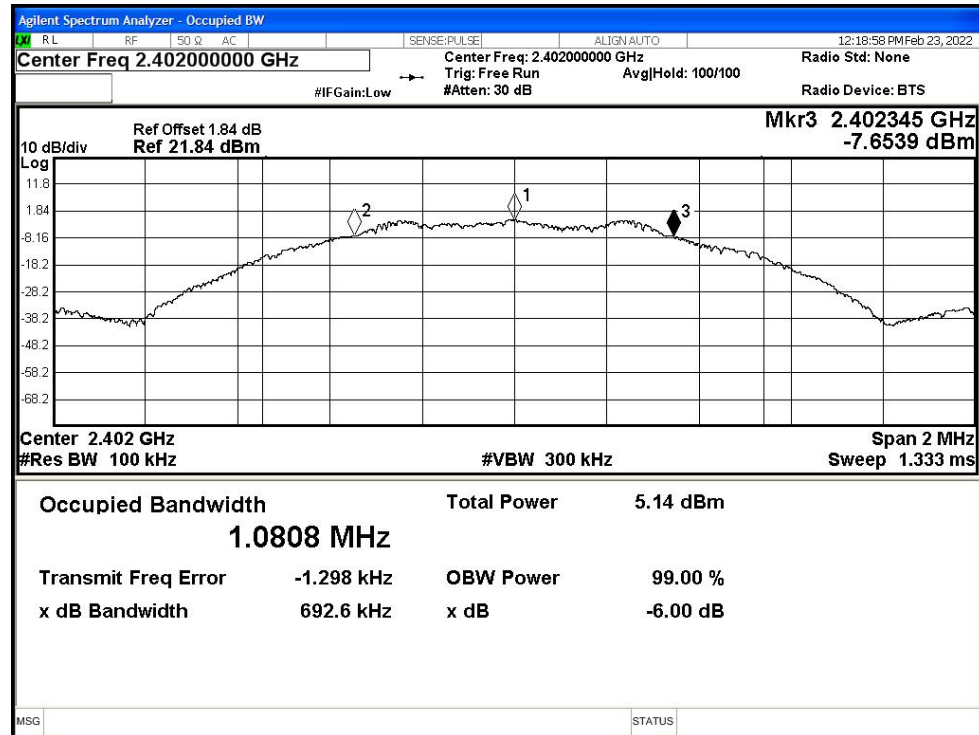

-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

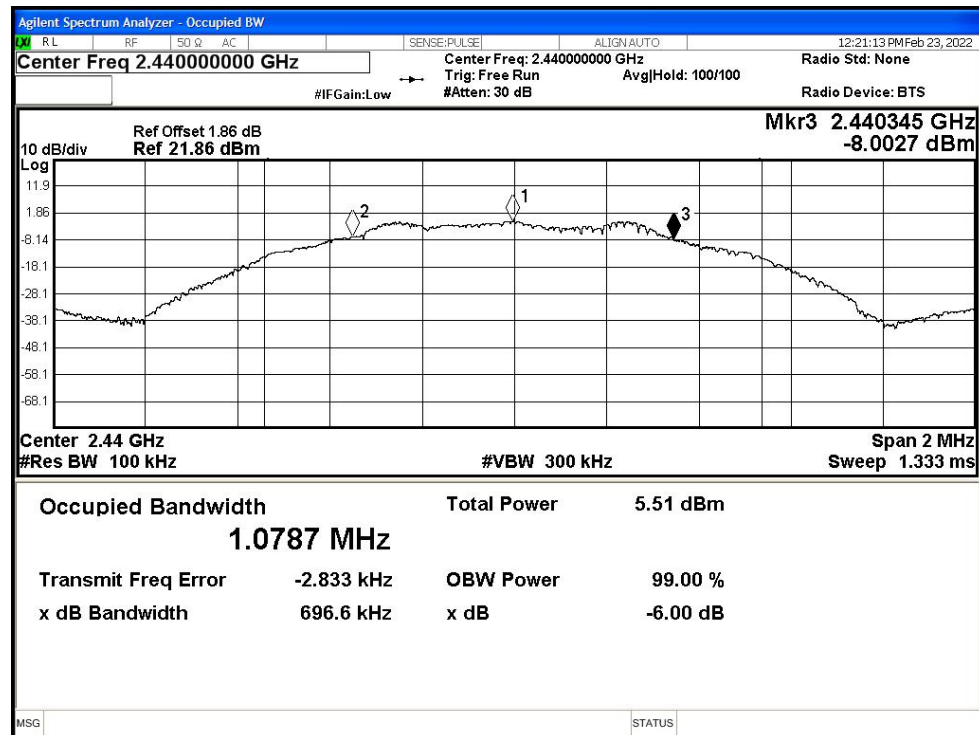

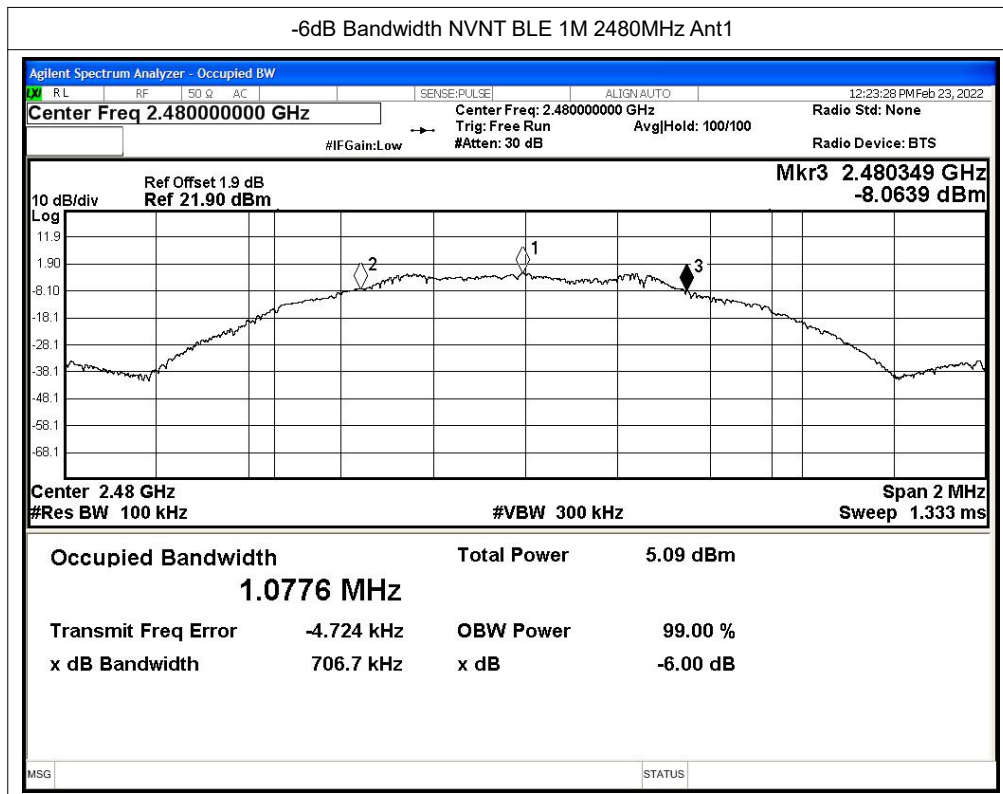




A.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-0.48	0	-0.48	30	Pass
NVNT	BLE 1M	2440	Ant1	-0.29	0	-0.29	30	Pass
NVNT	BLE 1M	2480	Ant1	-0.6	0	-0.6	30	Pass





Test Graphs

Power NVNT BLE 1M 2402MHz Ant1

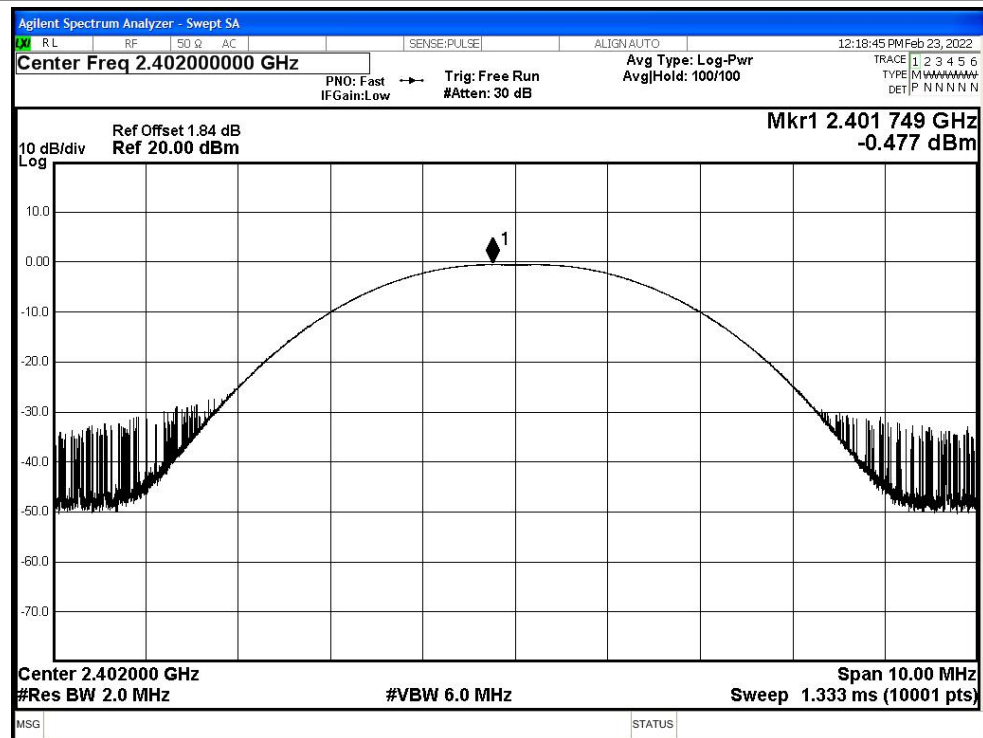

Power NVNT BLE 1M 2440MHz Ant1

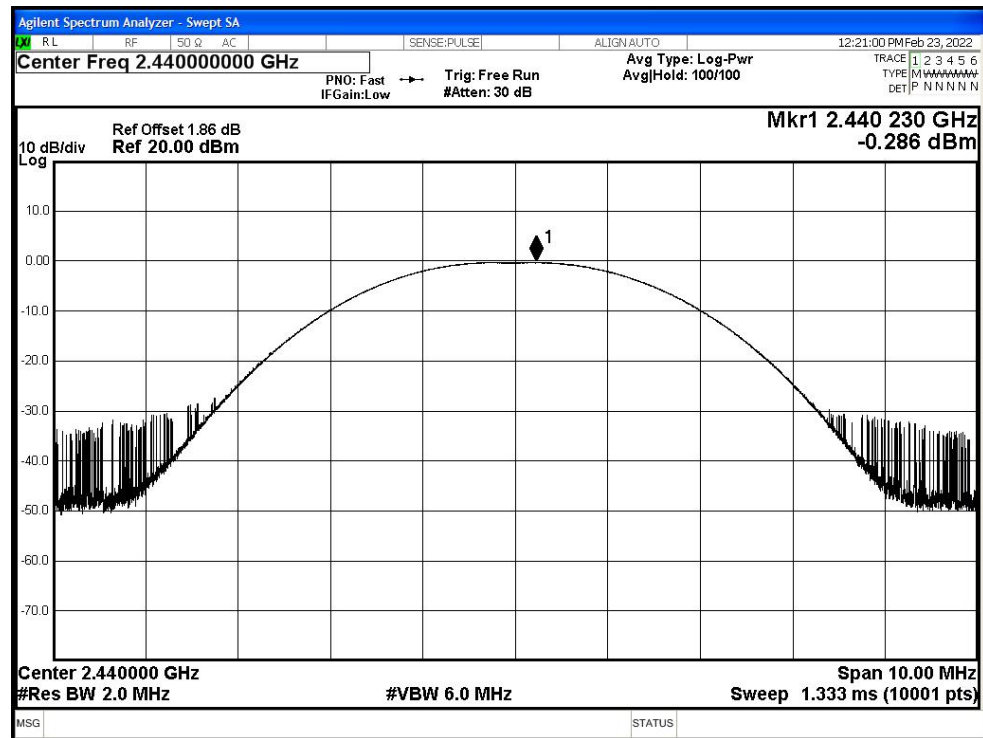

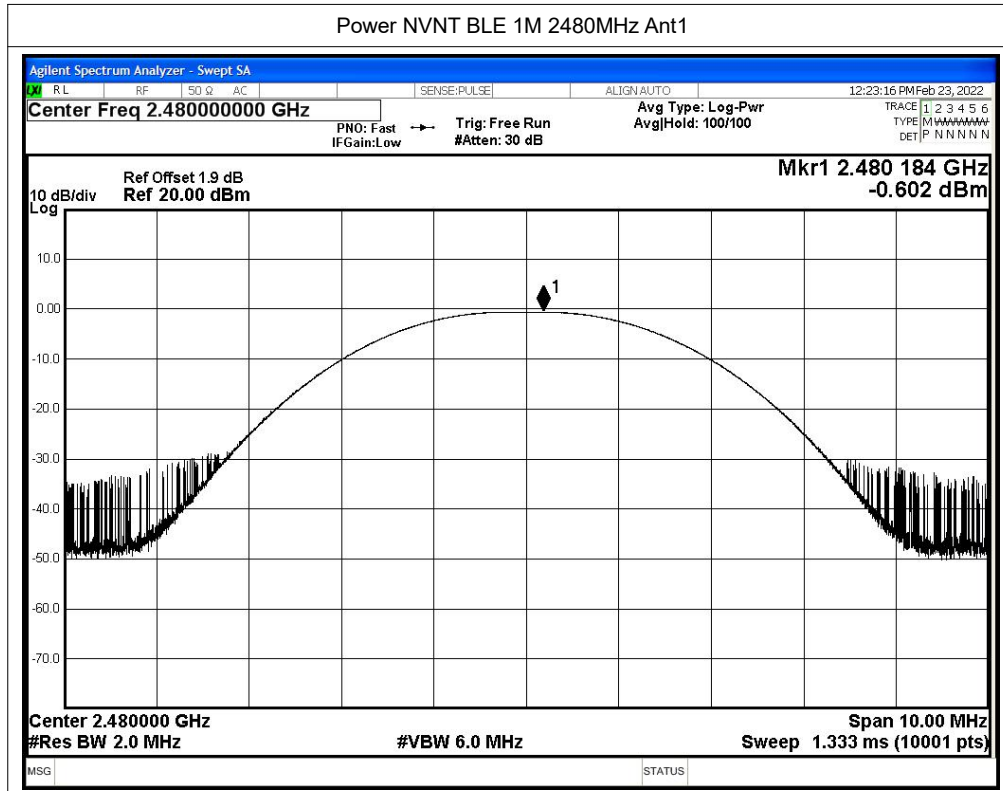




A.3 Power Spectral Density

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-15.28	0	-15.28	8	Pass
NVNT	BLE 1M	2440	Ant1	-15.31	0	-15.31	8	Pass
NVNT	BLE 1M	2480	Ant1	-15.68	0	-15.68	8	Pass





Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

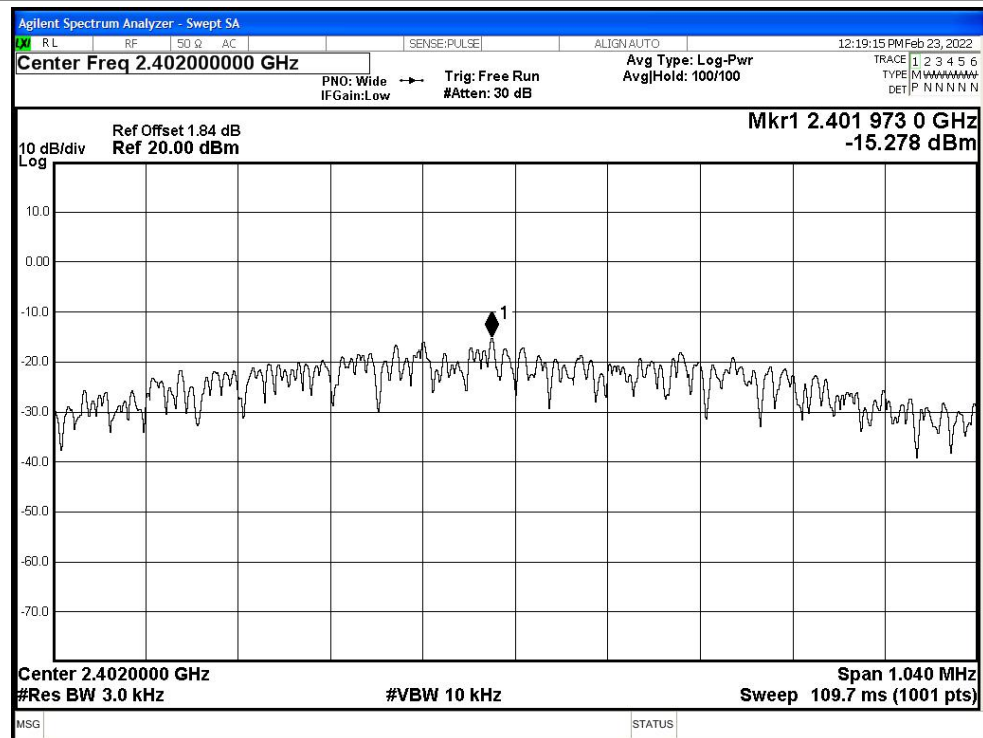

PSD NVNT BLE 1M 2440MHz Ant1

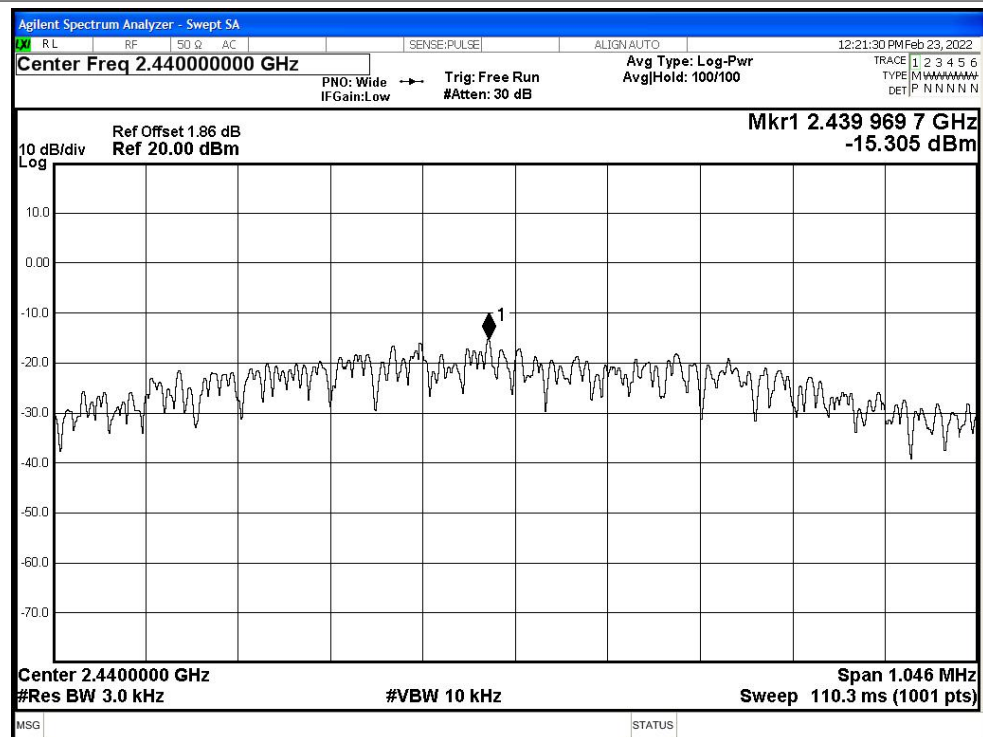

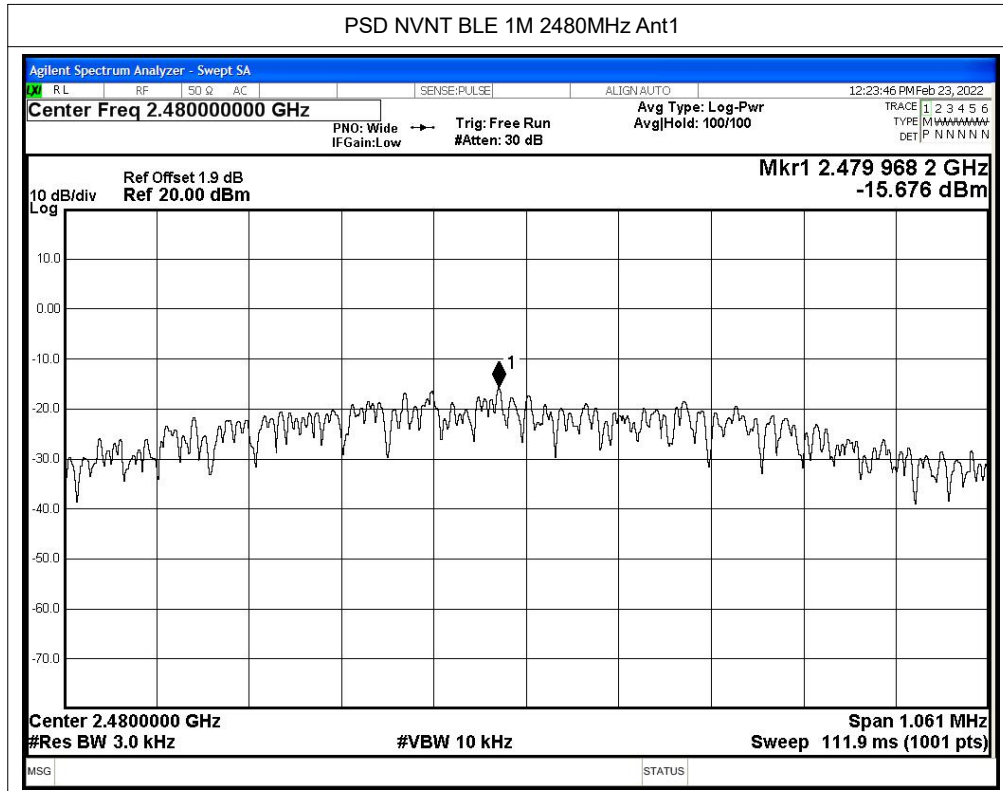




A.4 Band Edge Measurements

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-46.48	-20	Pass
NVNT	BLE 1M	2480	Ant1	-52.23	-20	Pass




Test Graphs

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

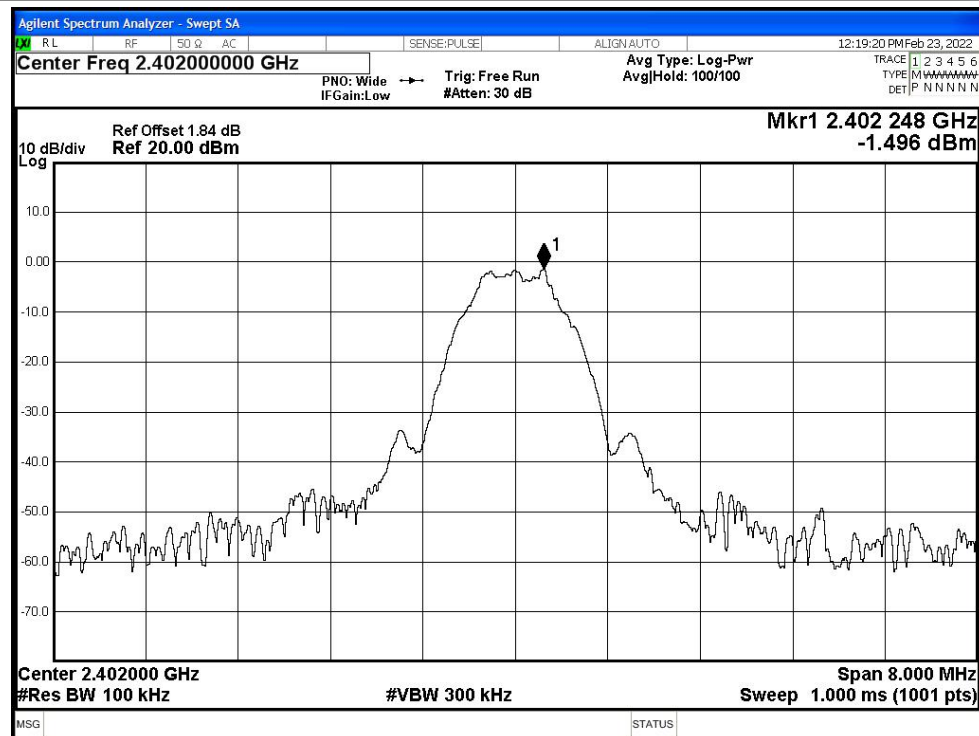


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

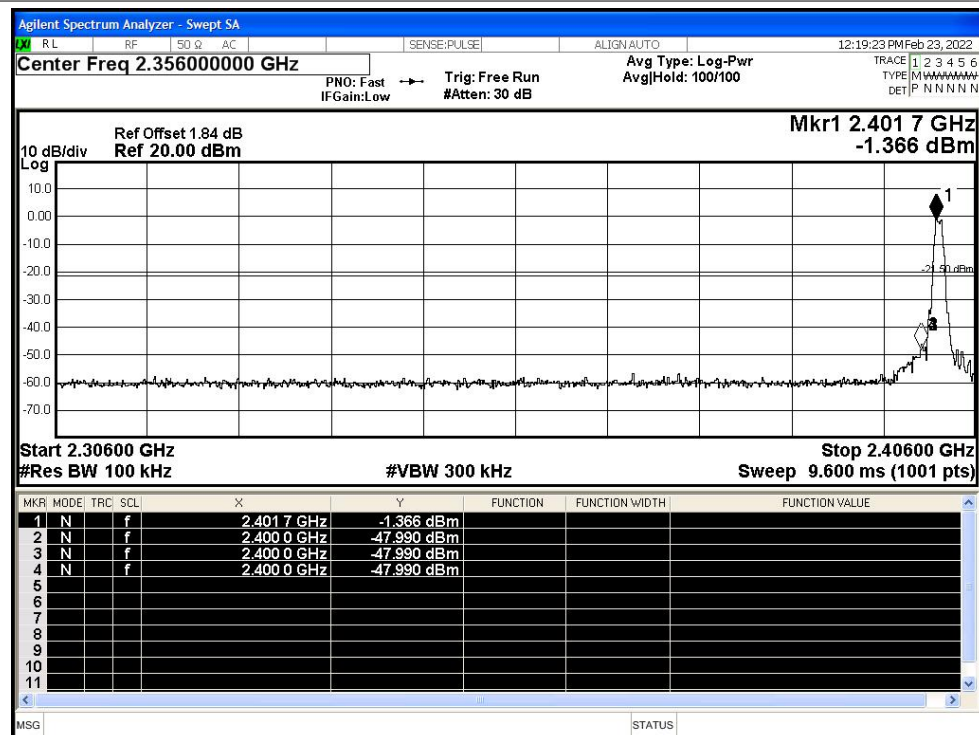




Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

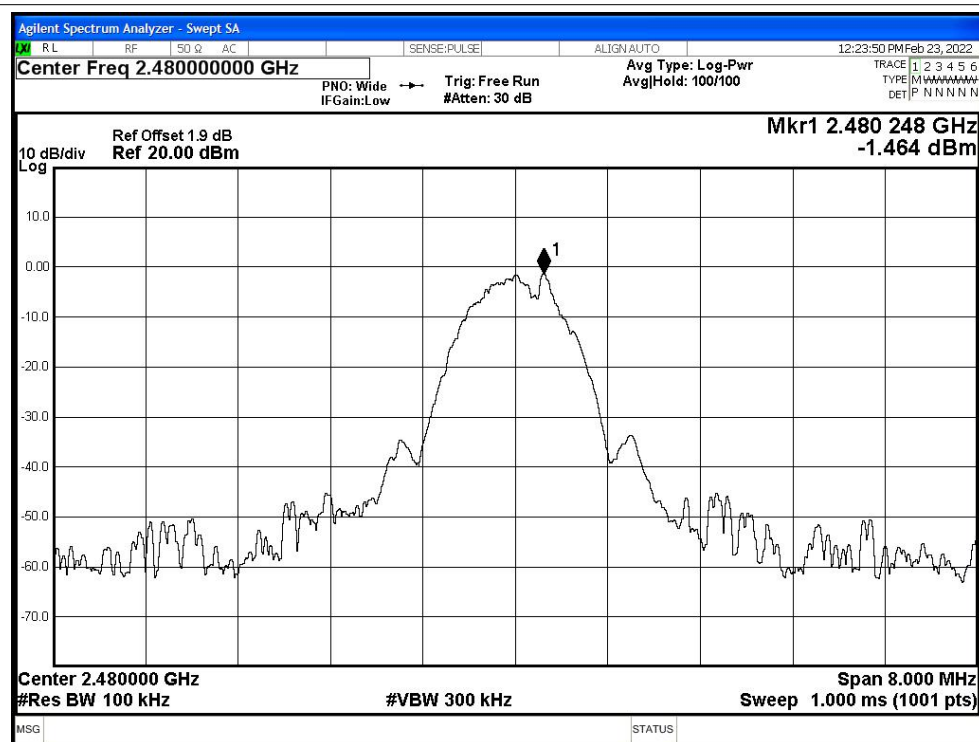

Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

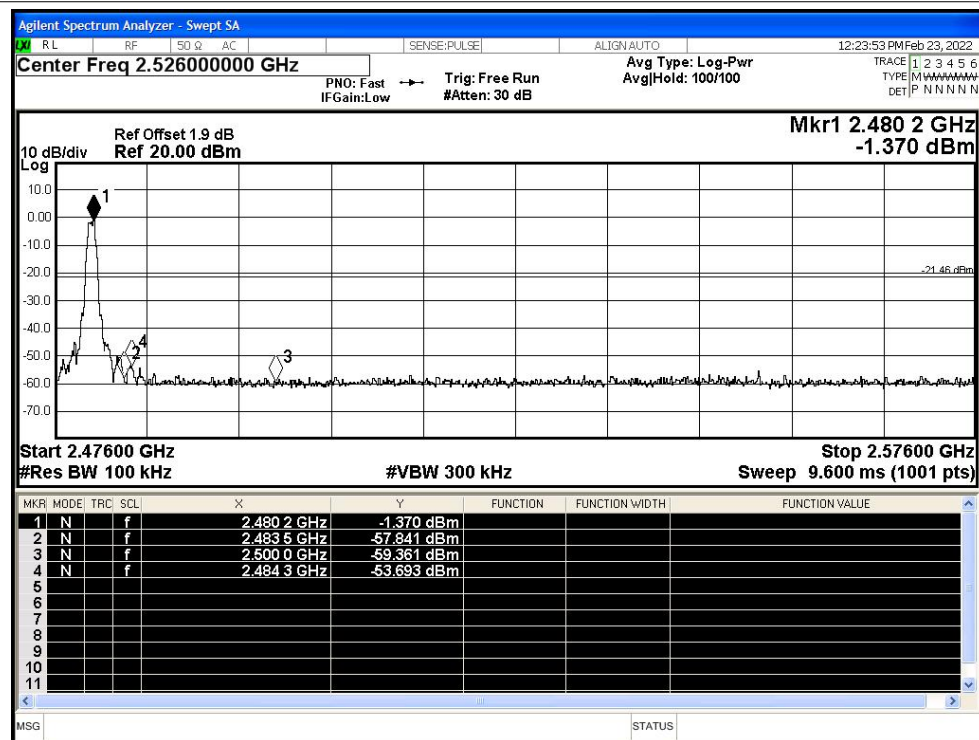




A.5 Conducted Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-53.71	-20	Pass
NVNT	BLE 1M	2440	Ant1	-54.27	-20	Pass
NVNT	BLE 1M	2480	Ant1	-54.25	-20	Pass




Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

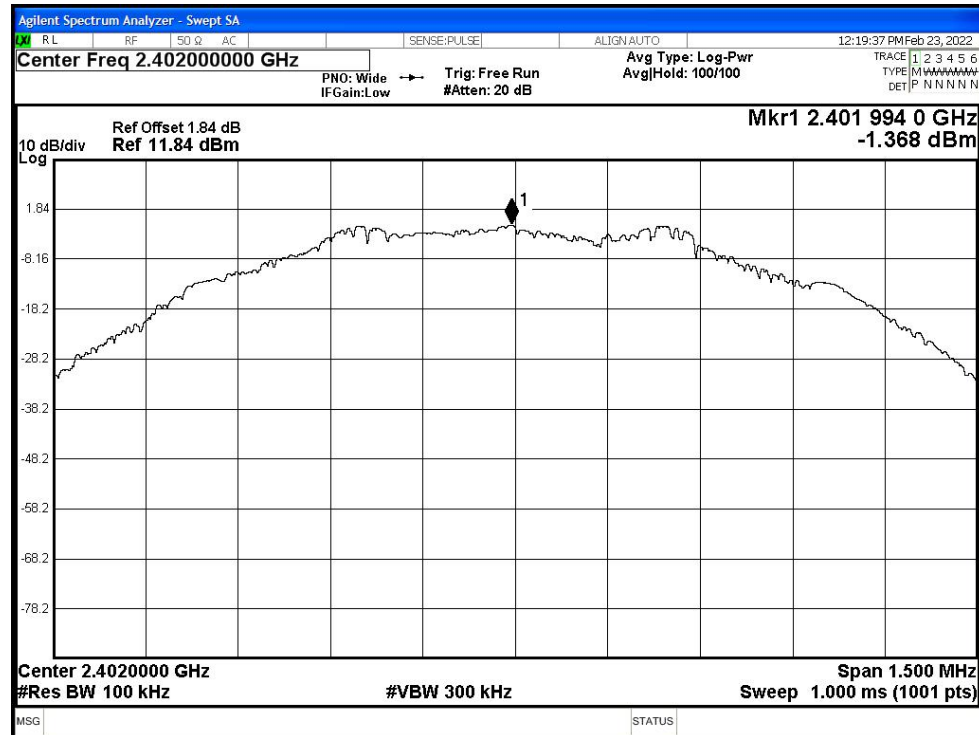


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

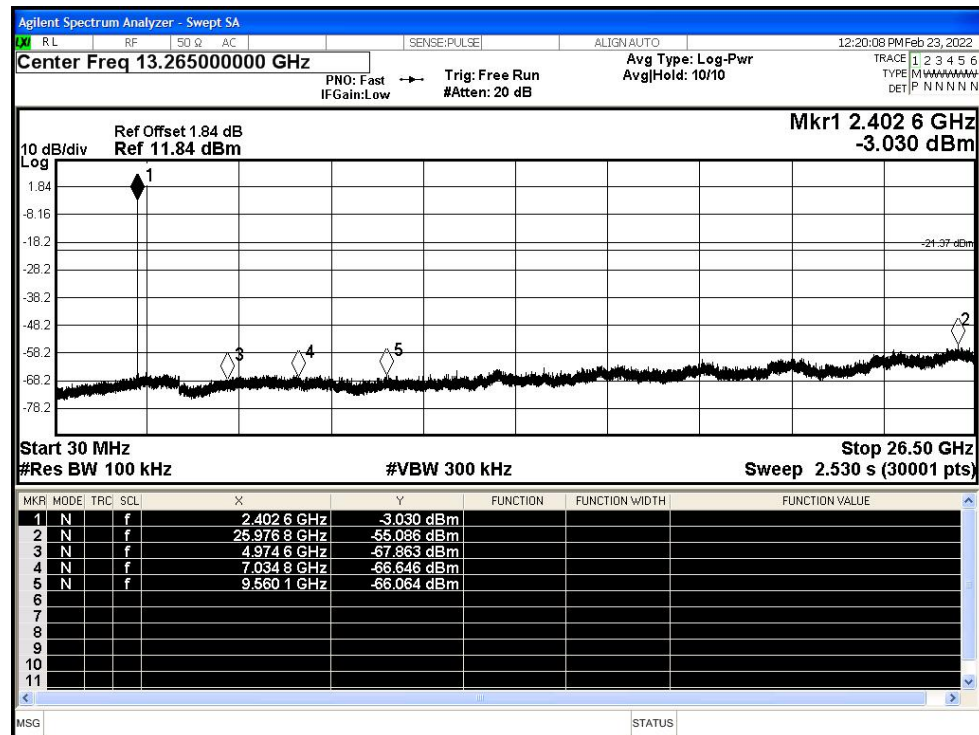




Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

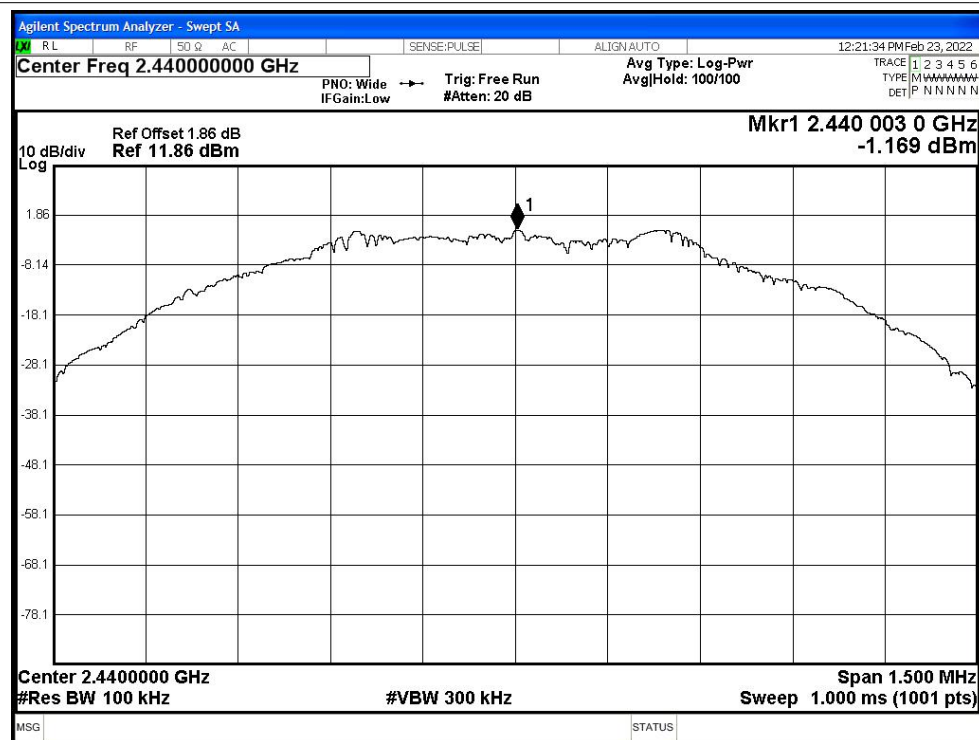


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

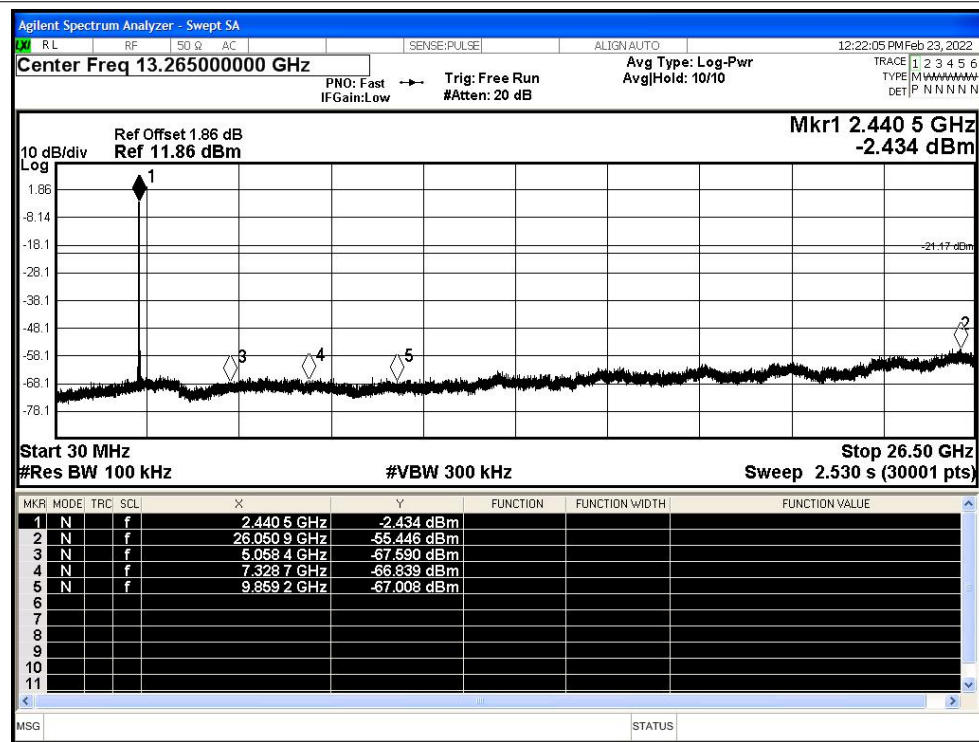




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

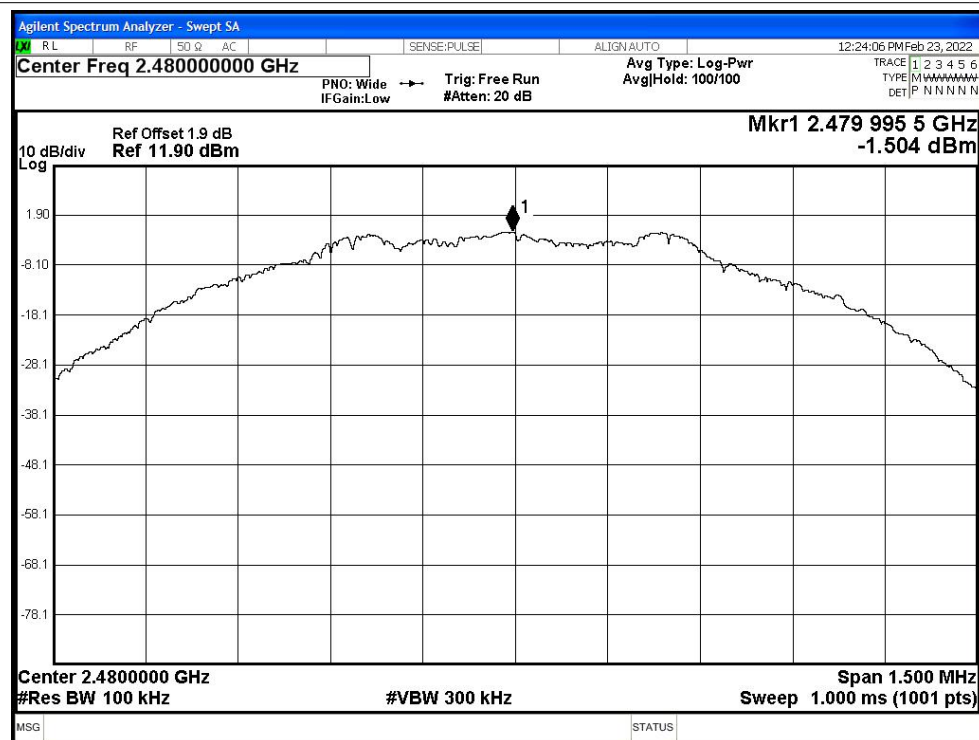

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

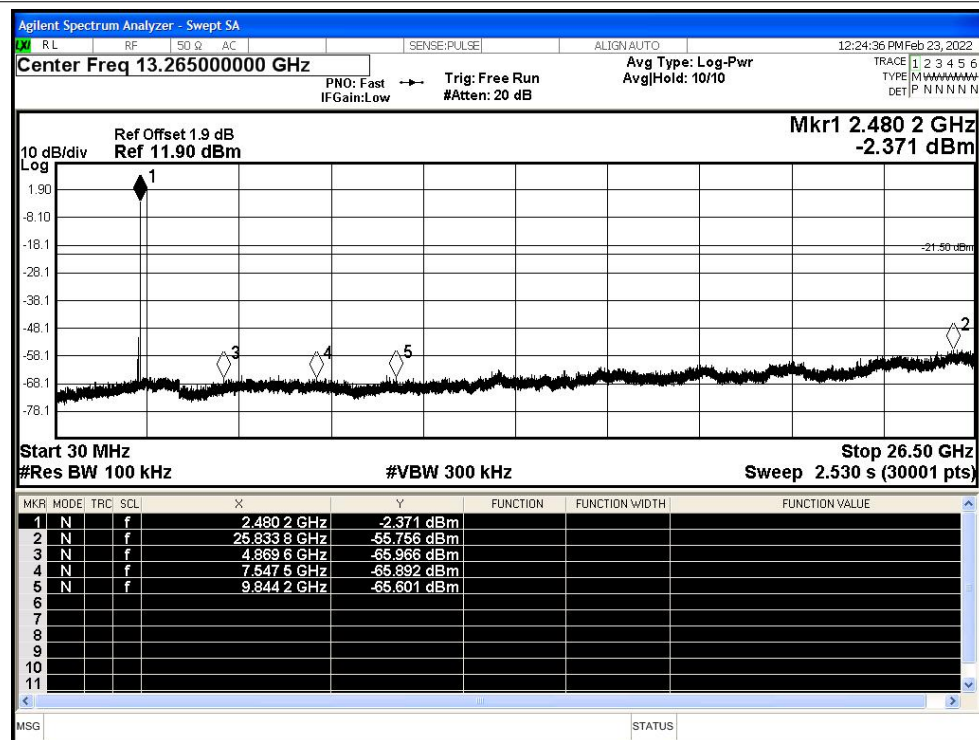




A.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	61.68	2.1	2.59
NVNT	BLE 1M	2440	Ant1	61.6	2.1	2.6
NVNT	BLE 1M	2480	Ant1	61.68	2.1	2.59





Test Graphs

Duty Cycle NVNT BLE 1M 2402MHz Ant1

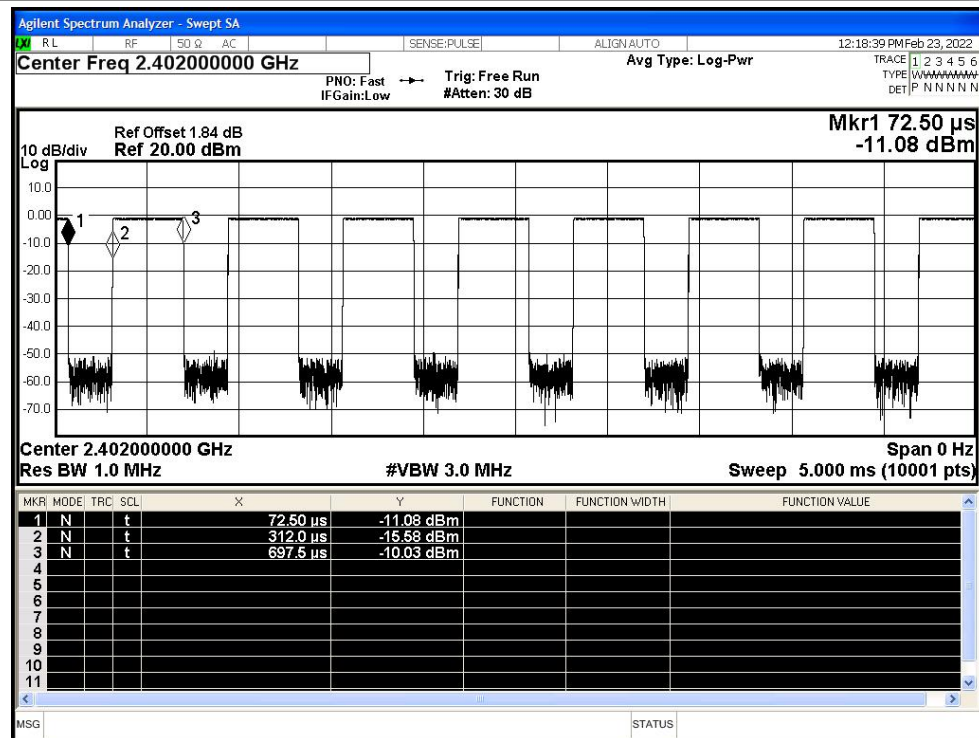

Duty Cycle NVNT BLE 1M 2440MHz Ant1

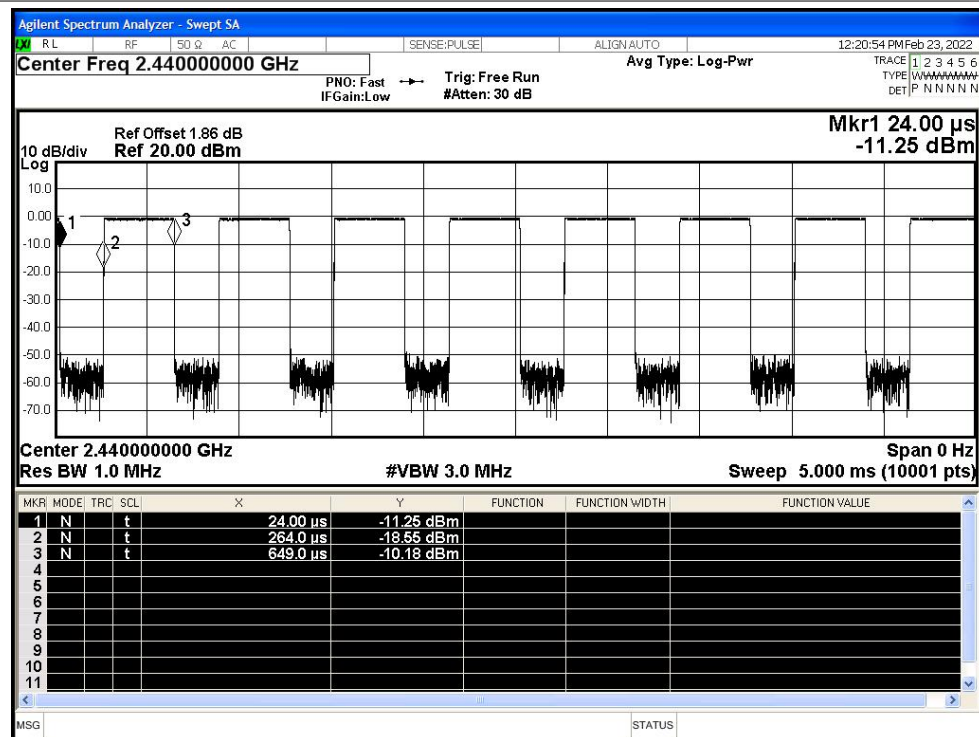

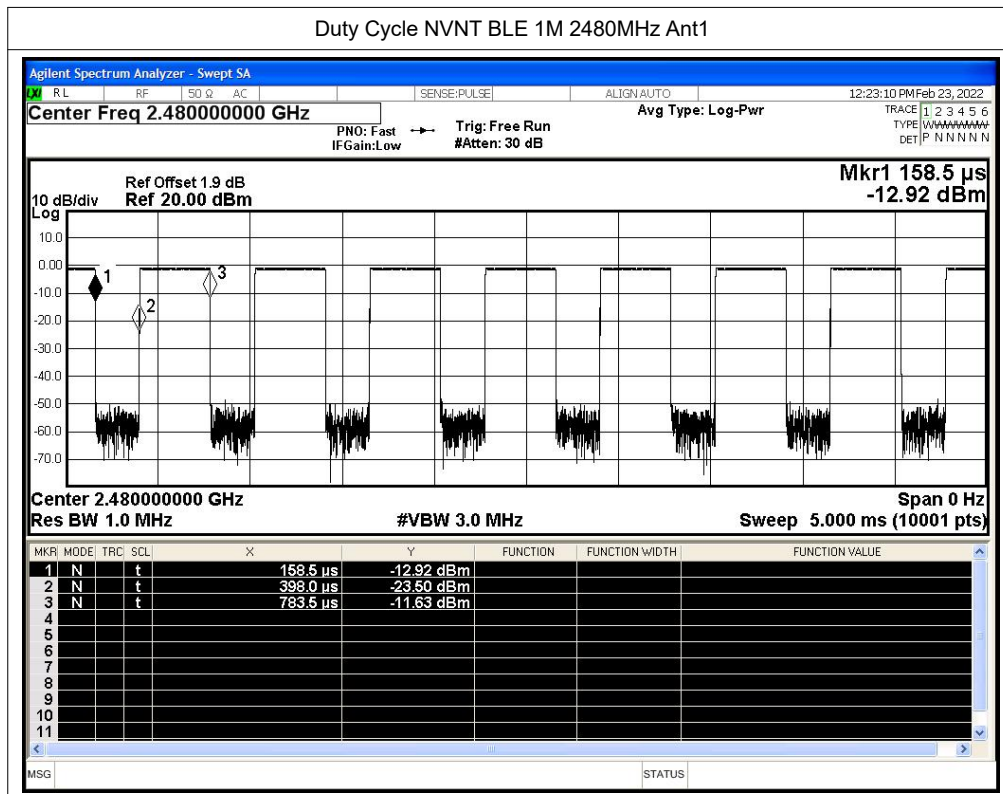

A.7 Emissions in Restricted Bands

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1M	2402	Ant1	2310	-51.8	2	45.46	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2310	-59.6	2	37.66	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2362.512	-48.22	2	49.04	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2389.488	-58.72	2	38.54	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2390	-50.55	2	46.71	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2390	-59.34	2	37.92	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-39.33	2	57.93	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-59.05	2	38.21	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2483.944	-38.3	2	58.96	Peak	74	Pass
NVNT	BLE	2480	Ant1	2491.672	-58.69	2	38.57	Average	54	Pass




	1M									
NVNT	BLE 1M	2480	Ant1	2500	-50.91	2	46.35	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2500	-59.32	2	37.94	Average	54	Pass




Test Graphs

Restrict Band NVNT BLE 1M 2402MHz Ant1 Peak

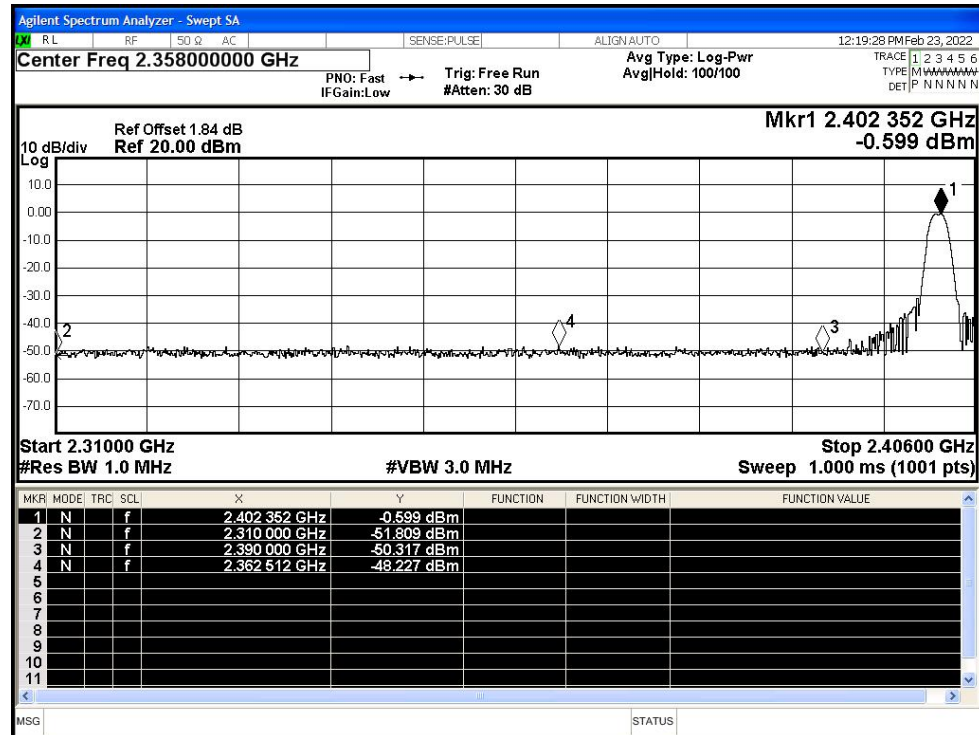


Restrict Band NVNT BLE 1M 2402MHz Ant1 Average

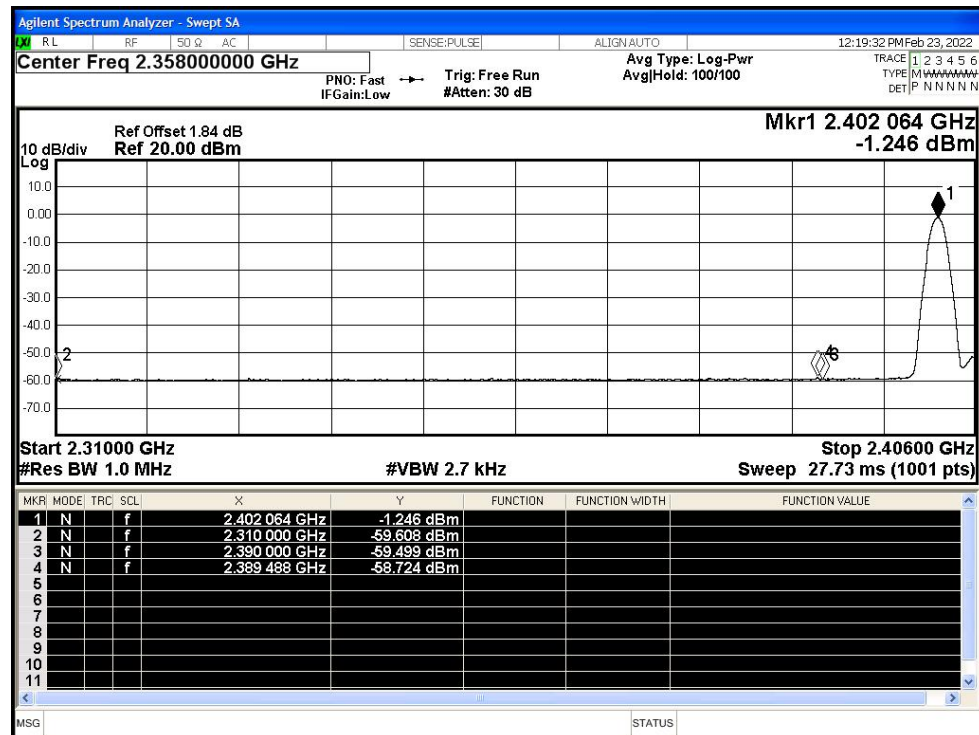



Restrict Band NVNT BLE 1M 2480MHz Ant1 Peak

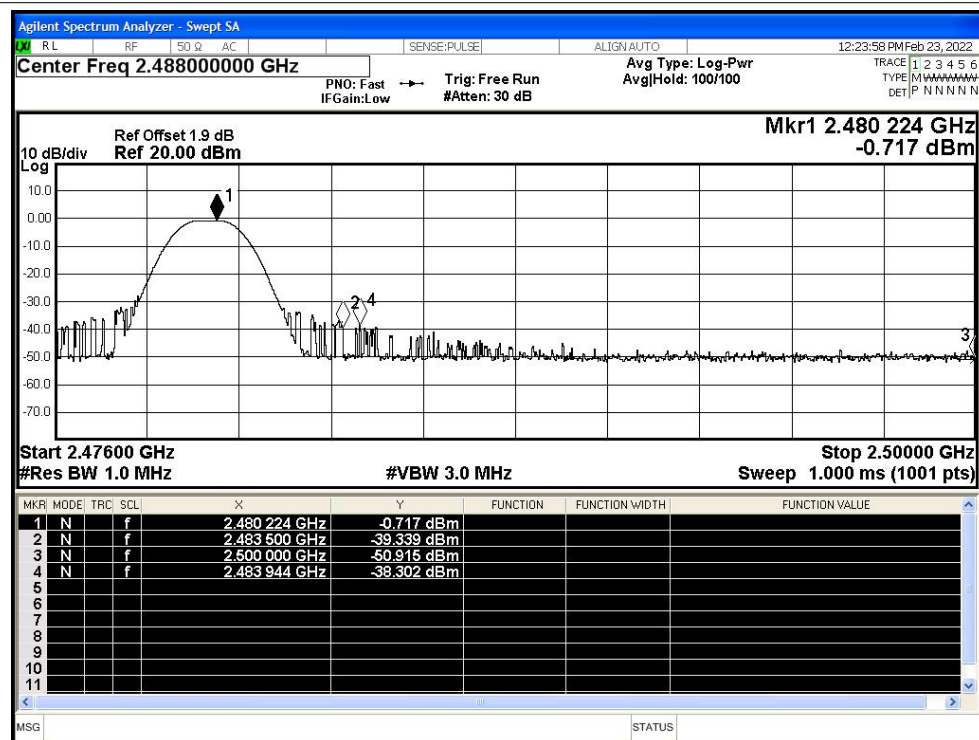

Restrict Band NVNT BLE 1M 2480MHz Ant1 Average

