




99% OCB NVNT ANT2_802_11ac(VHT40)_5795

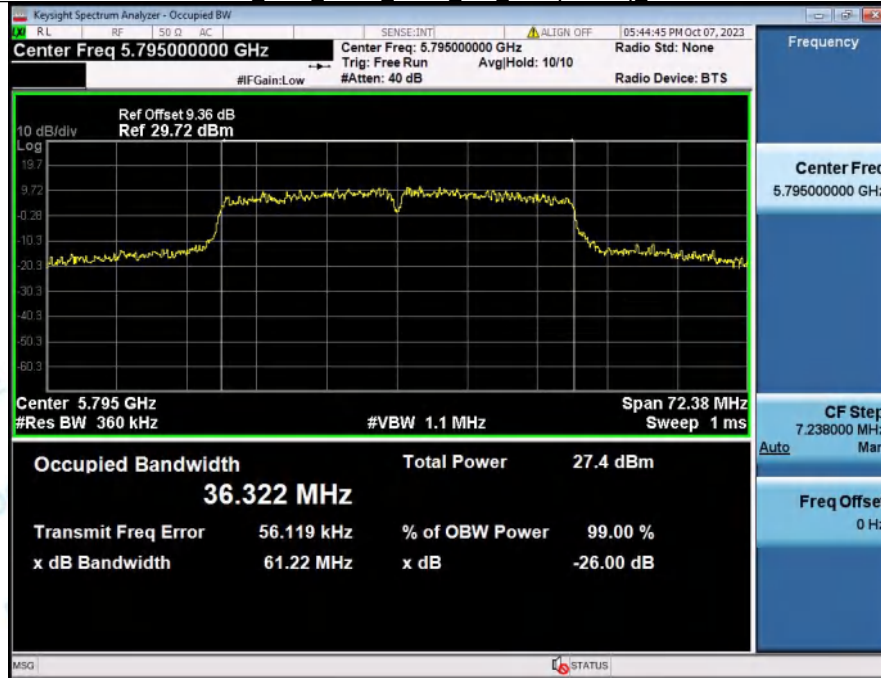


-26BW NVNT ANT2_802_11ac(VHT40)_5795

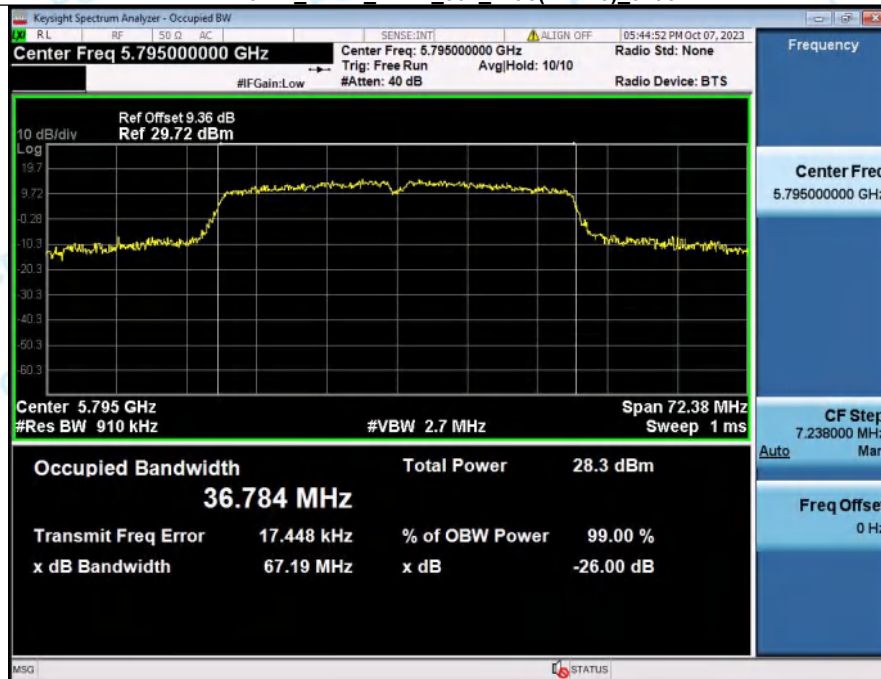


99%_OCB_NVNT_ANT1_802_11ac(VHT80)_5775

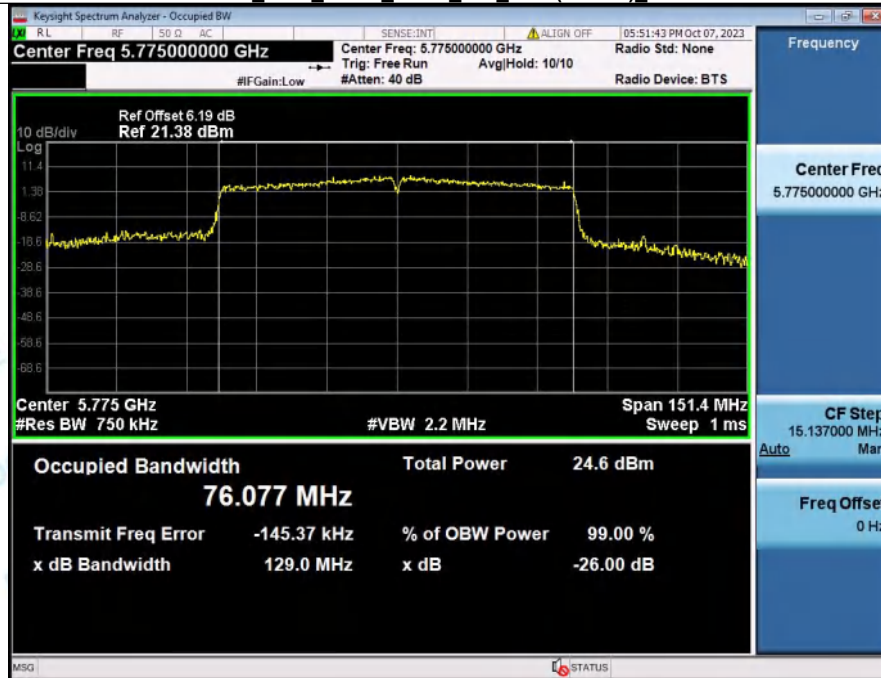


-26BW NVNT ANT1_802_11ac(VHT80)_5775

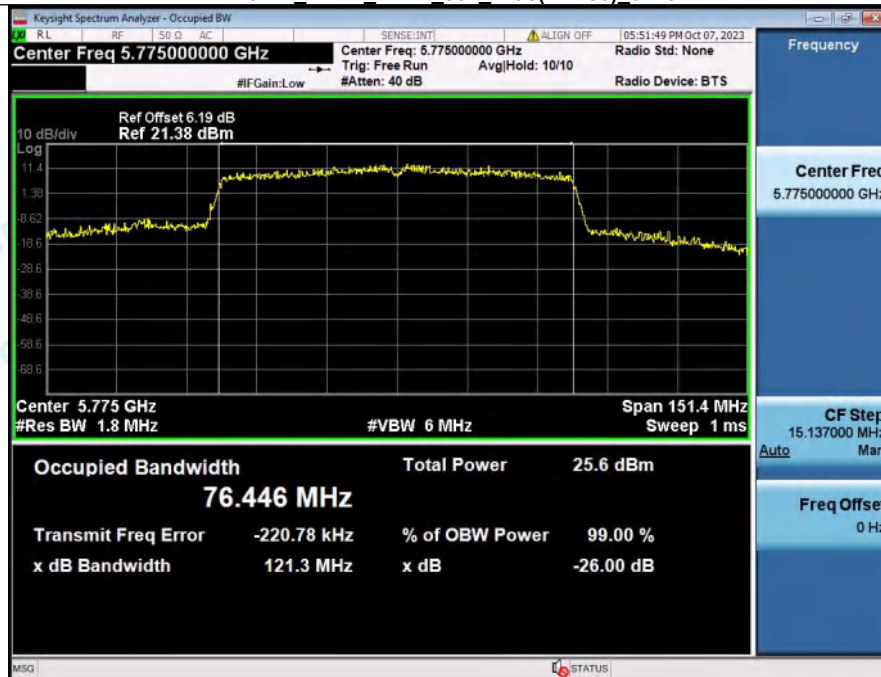

99% OCB NVNT ANT2_802_11ac(VHT80)_5775

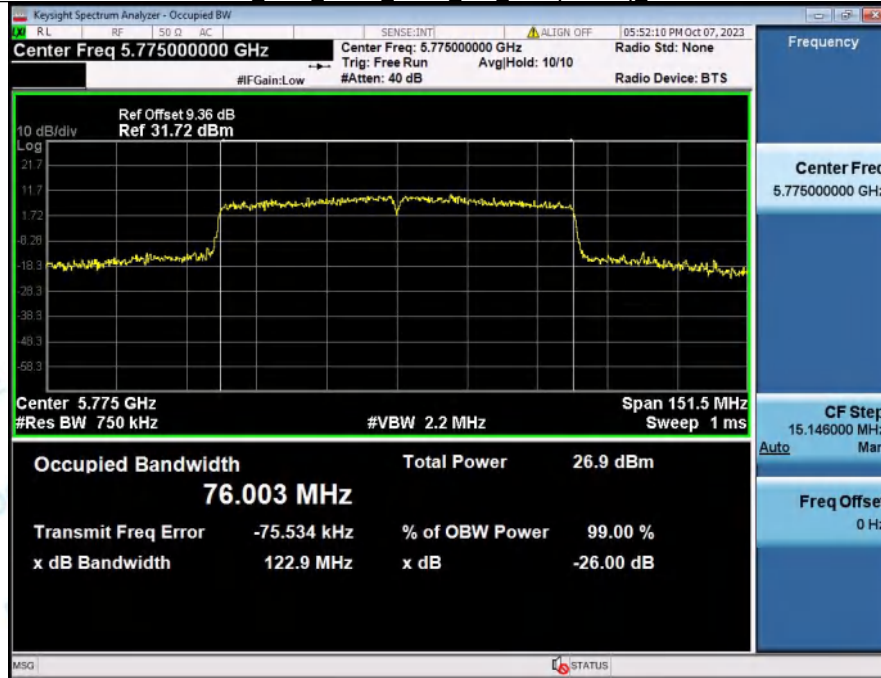


-26BW NVNT ANT2_802_11ac(VHT80)_5775

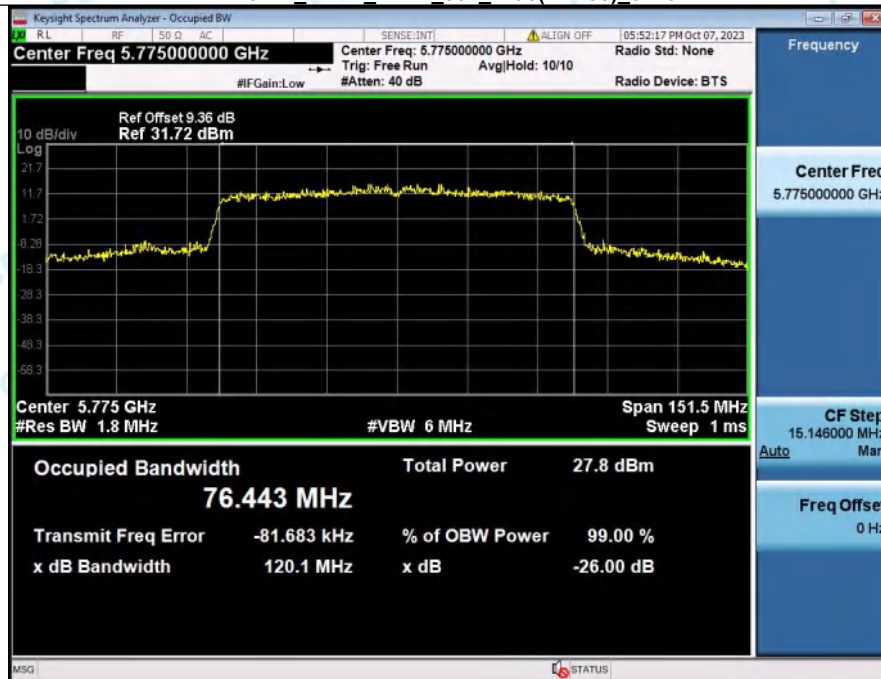


3. Duty Cycle

Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty_factor
NVNT	ANT1	802.11a	5745.00	81.40	0.89
NVNT	ANT2	802.11a	5745.00	82.35	0.84
NVNT	ANT1	802.11a	5785.00	81.40	0.89
NVNT	ANT2	802.11a	5785.00	100	0.00
NVNT	ANT1	802.11a	5825.00	83.33	0.79
NVNT	ANT2	802.11a	5825.00	81.40	0.89
NVNT	ANT1	802.11ac(VHT20)	5745.00	100	0.00
NVNT	ANT2	802.11ac(VHT20)	5745.00	80.49	0.94
NVNT	ANT1	802.11ac(VHT20)	5785.00	80.49	0.94
NVNT	ANT2	802.11ac(VHT20)	5785.00	80.25	0.96
NVNT	ANT1	802.11ac(VHT20)	5825.00	81.48	0.89
NVNT	ANT2	802.11ac(VHT20)	5825.00	80.49	0.94
NVNT	ANT1	802.11ac(VHT40)	5755.00	66.67	1.76
NVNT	ANT2	802.11ac(VHT40)	5755.00	68.75	1.63
NVNT	ANT1	802.11ac(VHT40)	5795.00	68.75	1.63
NVNT	ANT2	802.11ac(VHT40)	5795.00	68.75	1.63
NVNT	ANT1	802.11ac(VHT80)	5775.00	50.00	3.01
NVNT	ANT2	802.11ac(VHT80)	5775.00	50.00	3.01


Duty Cycle NVNT_ANT1_802_11a_5745

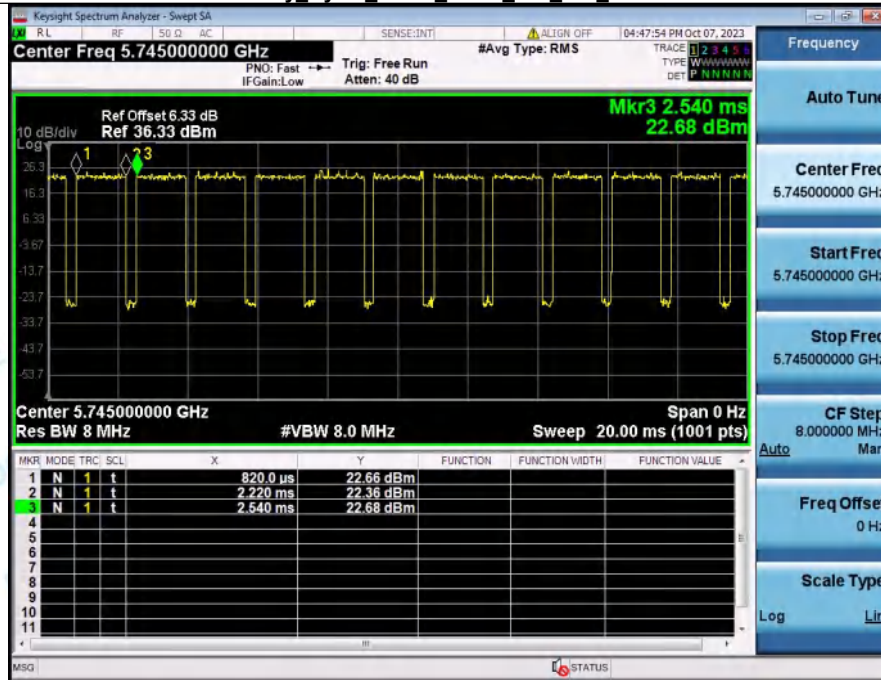


Duty Cycle NVNT_ANT2_802_11a_5745

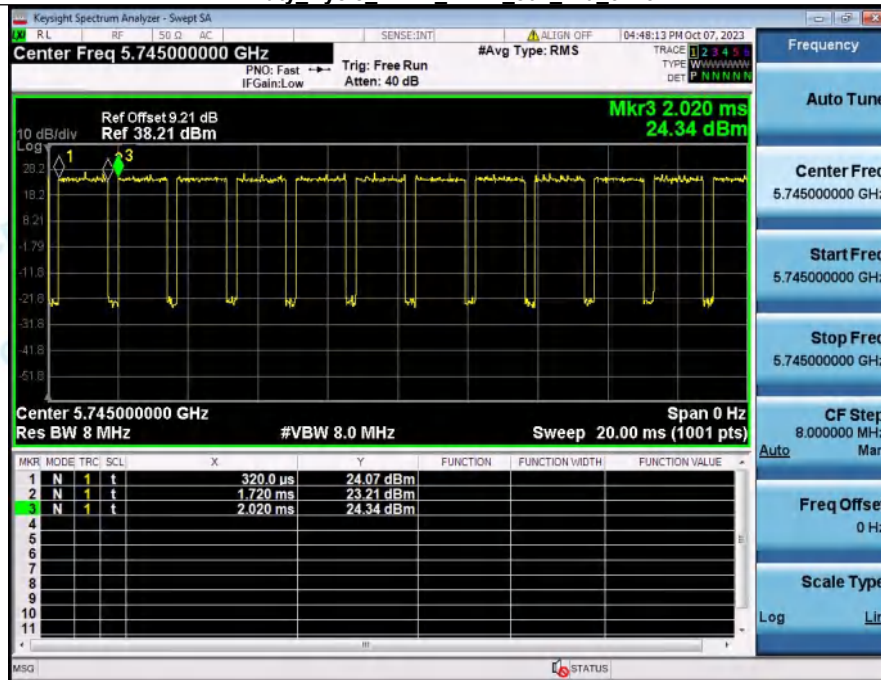


Duty Cycle NVNT_ANT1_802_11a_5785

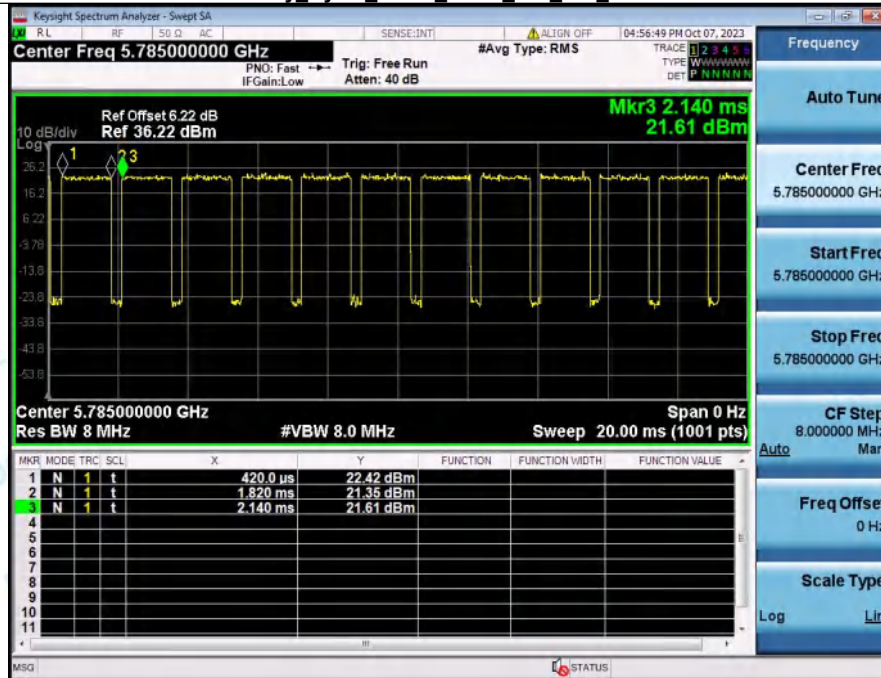


Duty Cycle NVNT_ANT2_802_11a_5785

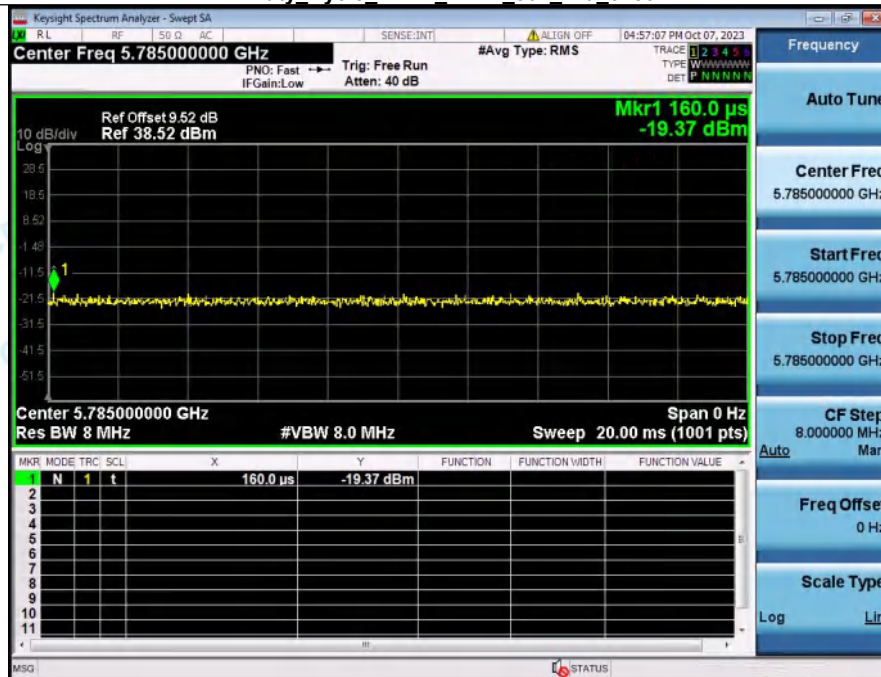


Duty Cycle NVNT_ANT1_802_11a_5825

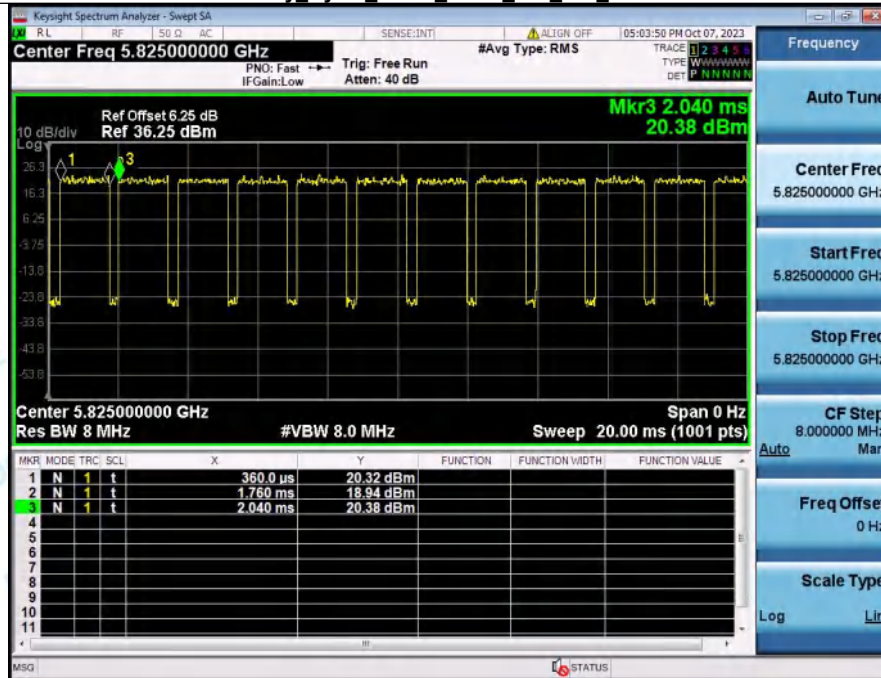


Duty Cycle NVNT_ANT2_802_11a_5825

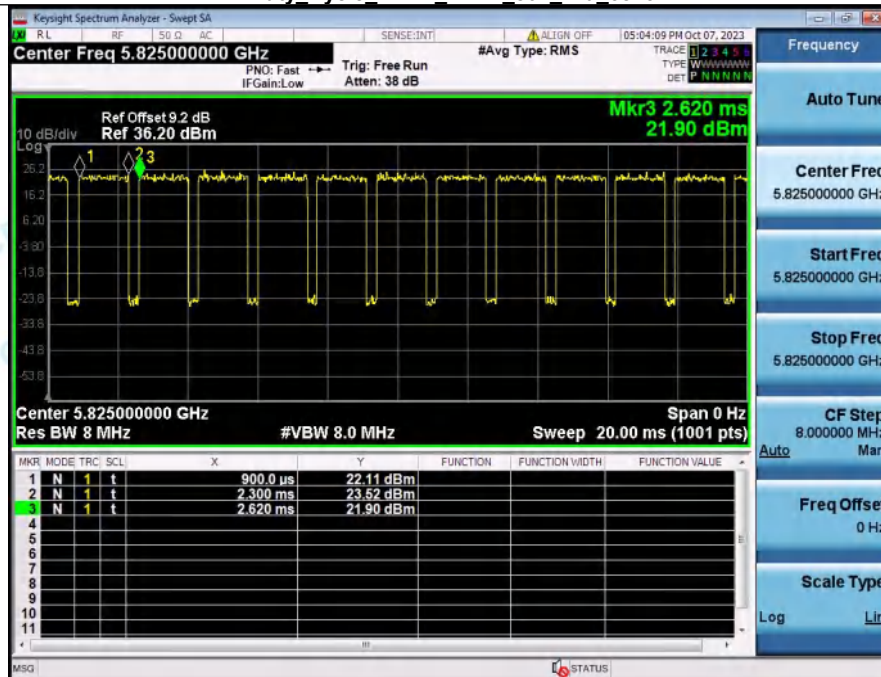


Duty Cycle NVNT_ANT1_802_11ac(VHT20)_5745

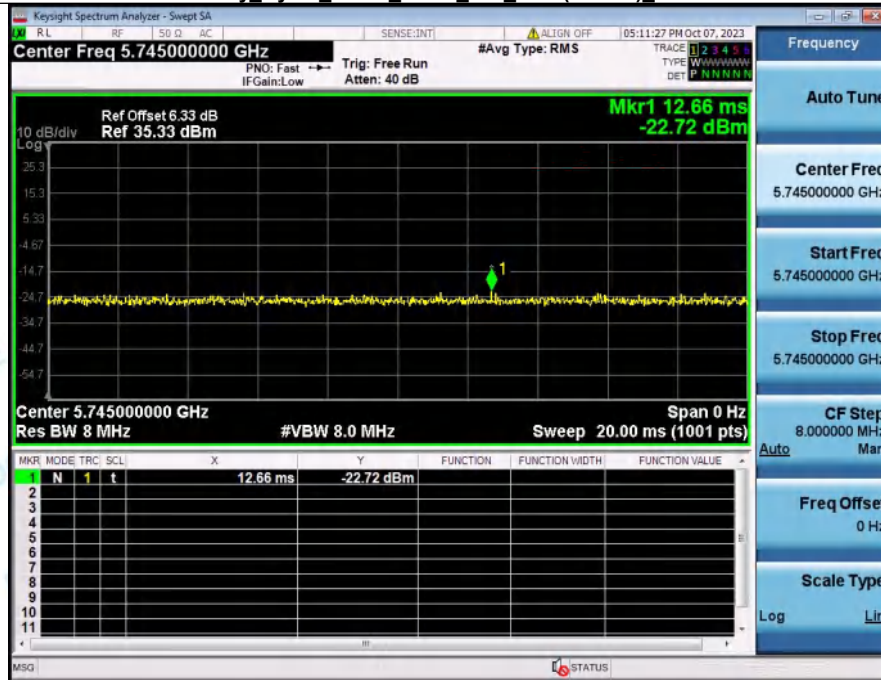


Duty Cycle NVNT_ANT2_802_11ac(VHT20)_5745

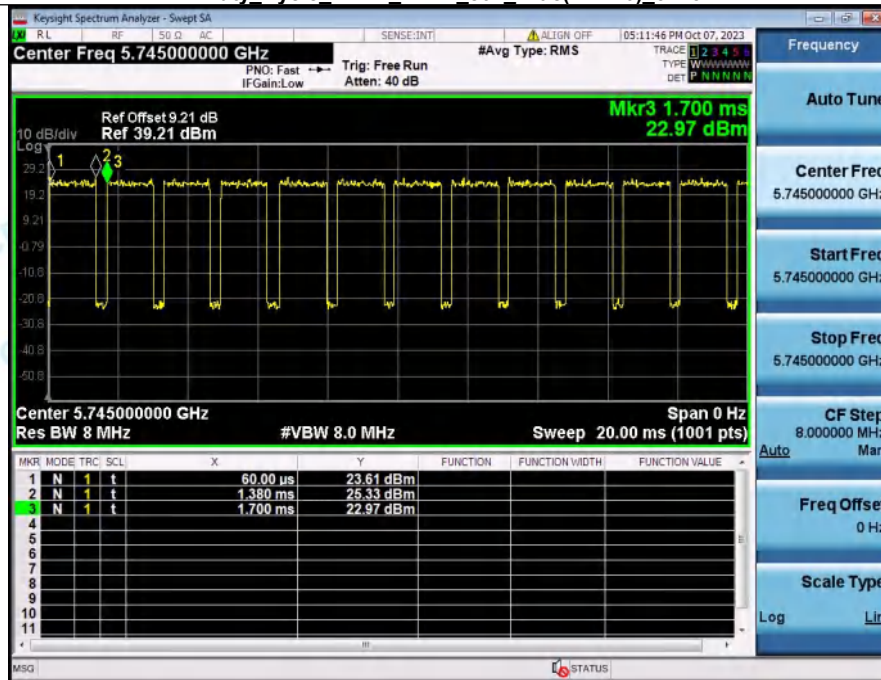


Duty Cycle NVNT_ANT1_802_11ac(VHT20)_5785

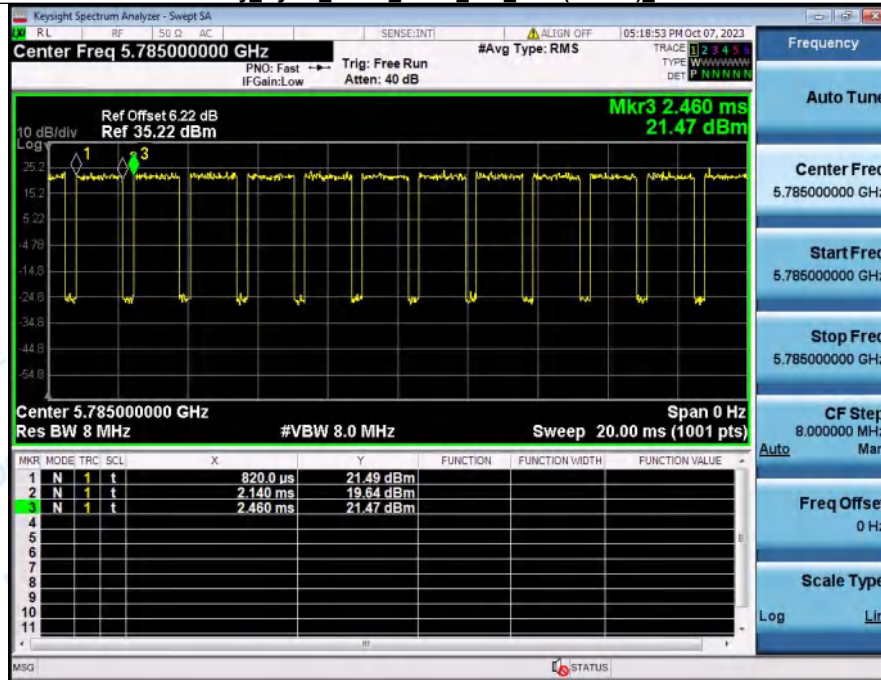


Duty Cycle NVNT_ANT2_802_11ac(VHT20)_5785

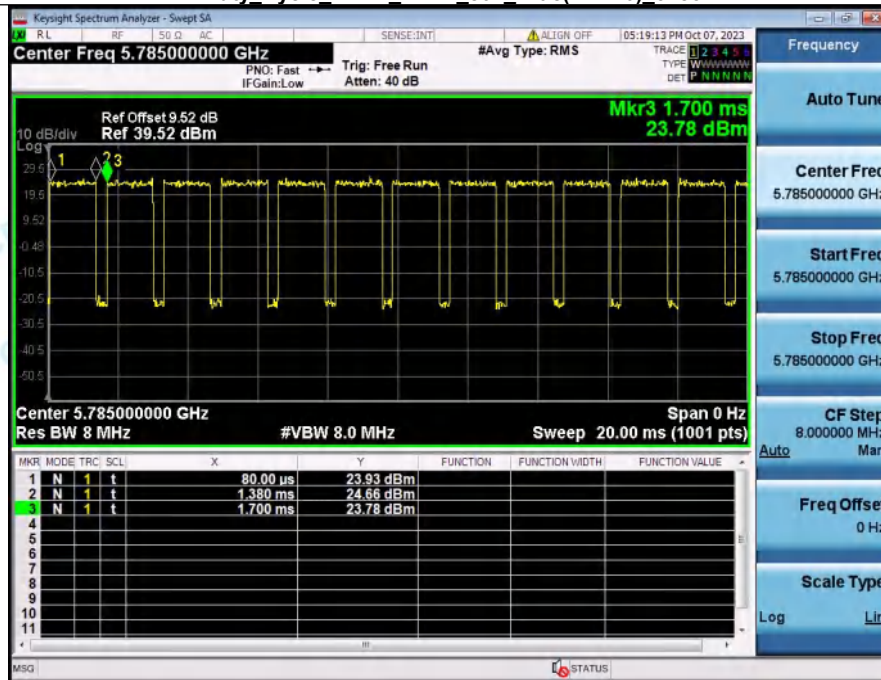


Duty Cycle NVNT_ANT1_802_11ac(VHT20)_5825

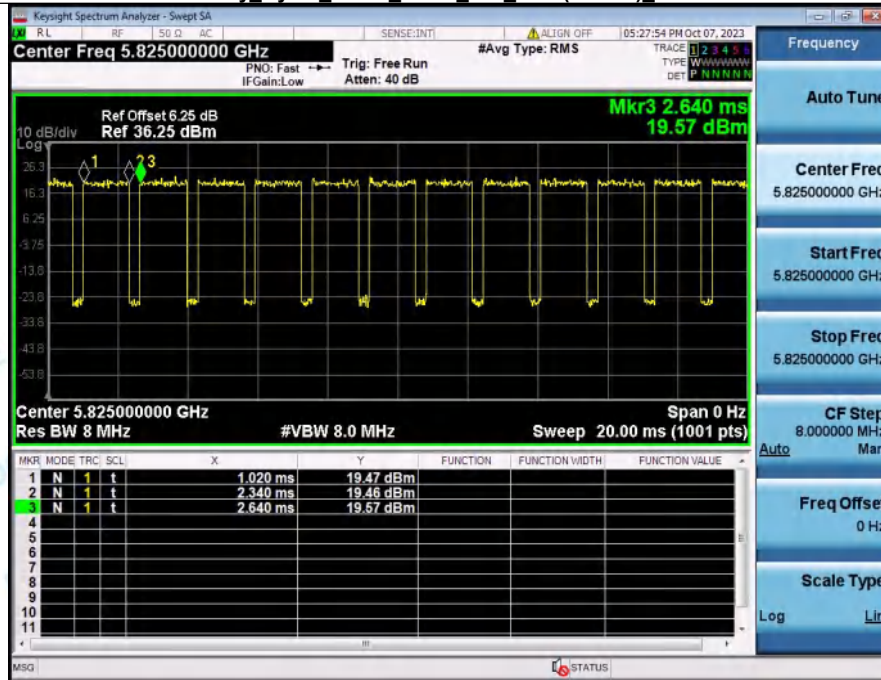


Duty Cycle NVNT_ANT2_802_11ac(VHT20)_5825

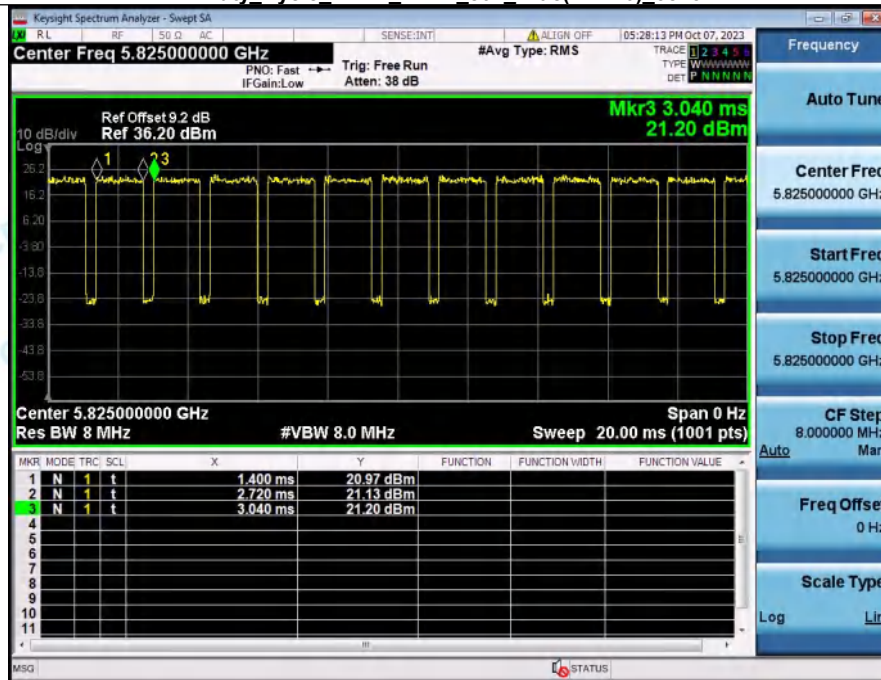


Duty Cycle NVNT_ANT1_802_11ac(VHT40)_5755

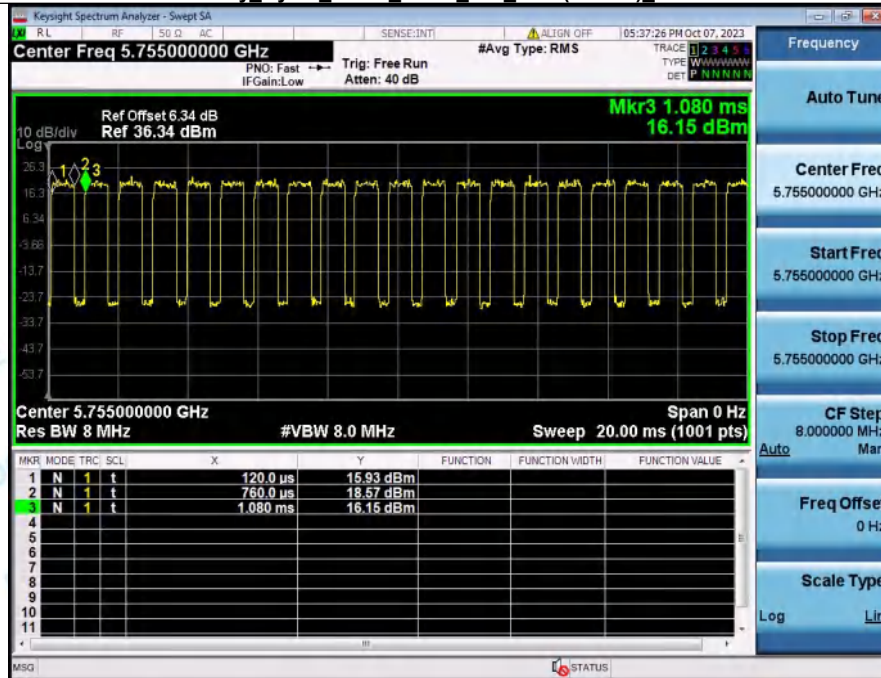


Duty Cycle NVNT_ANT2_802_11ac(VHT40)_5755

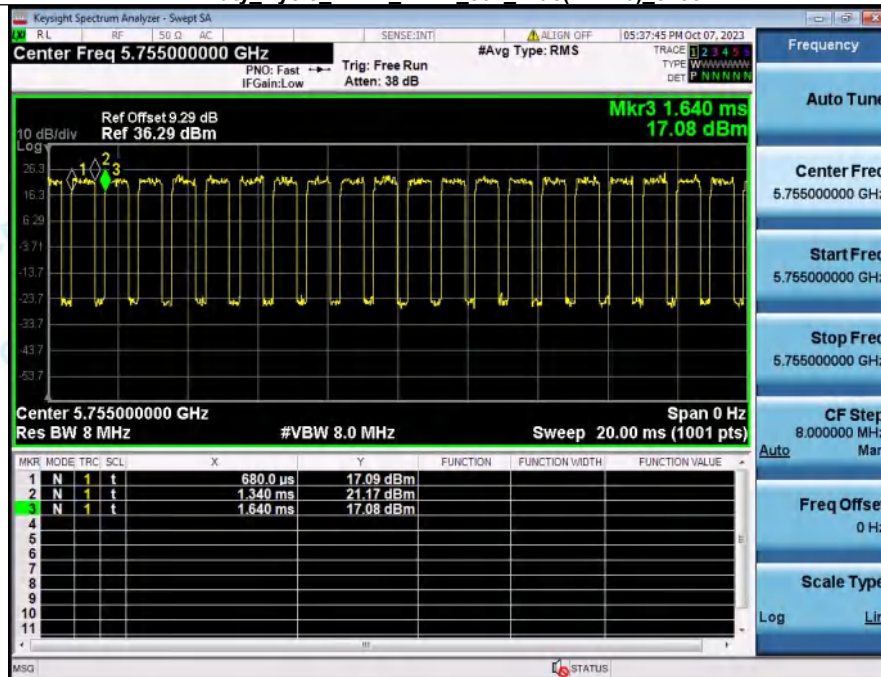

Duty Cycle NVNT_ANT1_802_11ac(VHT80)_5775

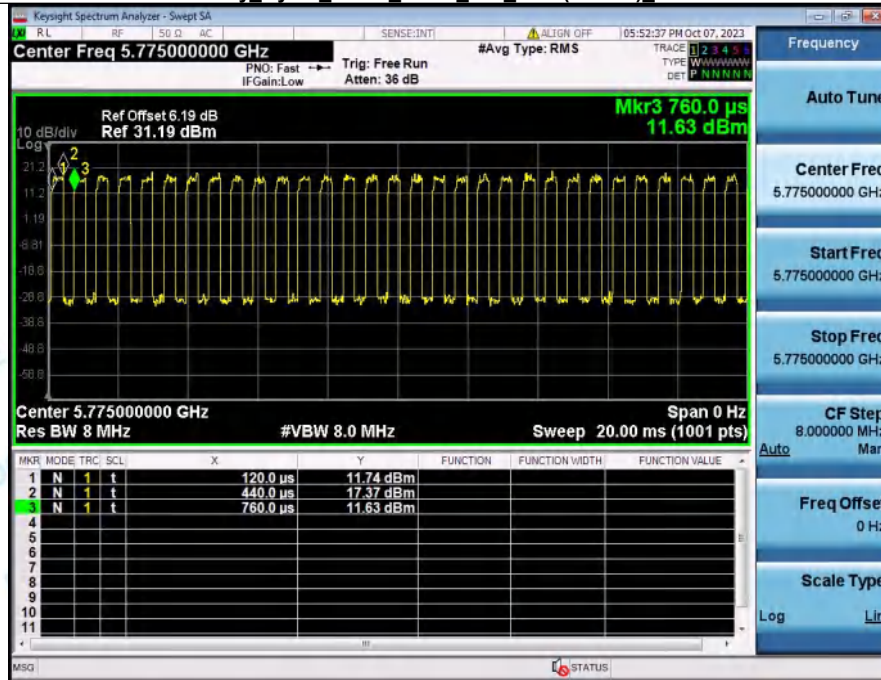

Duty Cycle NVNT_ANT2_802_11ac(VHT80)_5775

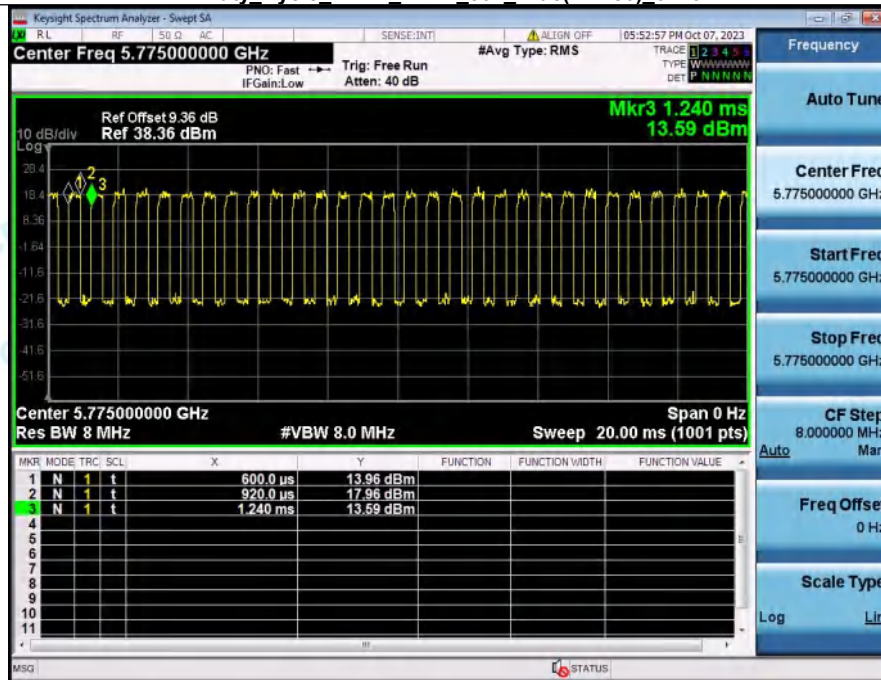

4. Maximum Conducted Output Power

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5745.00	18.08	0.89	18.97	24	Pass
NVNT	ANT2	802.11a	5745.00	19.74	0.84	20.58	24	Pass
NVNT	ANT1	802.11a	5785.00	18.09	0.89	18.98	24	Pass
NVNT	ANT2	802.11a	5785.00	20.20	0.00	20.20	24	Pass
NVNT	ANT1	802.11a	5825.00	16.08	0.79	16.87	24	Pass
NVNT	ANT2	802.11a	5825.00	17.90	0.89	18.79	24	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	17.16	0.00	17.16	24	Pass
NVNT	ANT2	802.11ac(VHT20)	5745.00	18.77	0.94	19.71	24	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	16.97	0.94	17.91	24	Pass
NVNT	ANT2	802.11ac(VHT20)	5785.00	19.29	0.96	20.25	24	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	15.03	0.89	15.92	24	Pass
NVNT	ANT2	802.11ac(VHT20)	5825.00	16.90	0.94	17.84	24	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	16.65	1.76	18.41	24	Pass
NVNT	ANT2	802.11ac(VHT40)	5755.00	18.37	1.63	20.00	24	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	16.43	1.63	18.06	24	Pass
NVNT	ANT2	802.11ac(VHT40)	5795.00	18.61	1.63	20.24	24	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	14.80	3.01	17.81	24	Pass
NVNT	ANT2	802.11ac(VHT80)	5775.00	16.67	3.01	19.68	24	Pass

Condition	Antenna	Mode	Frequency(MHz)	MIMO_Conducted Power(dBm)	Limit(dBm)	Result
NVNT	MIMO_TX	802.11ac(VHT20)	5745.00	21.05	30	Pass
NVNT	MIMO_TX	802.11ac(VHT20)	5785.00	21.29	30	Pass
NVNT	MIMO_TX	802.11ac(VHT20)	5825.00	19.08	30	Pass
NVNT	MIMO_TX	802.11ac(VHT40)	5755.00	20.61	30	Pass
NVNT	MIMO_TX	802.11ac(VHT40)	5795.00	20.66	30	Pass
NVNT	MIMO_TX	802.11ac(VHT80)	5775.00	18.84	30	Pass


$$P_{ant1} \text{ (MW)} = 10^{\frac{dBm}{10}}, P_{ant2} \text{ (MW)} = 10^{\frac{dBm}{10}}, P_{MIMO} \text{ (dBm)} = 10 * \log(P_{ant1} \text{ (MW)} + P_{ant2} \text{ (MW)})$$


Maximum Conducted Output Power NVNT_ANT1_802_11a_5745_20M





Maximum Conducted Output Power NVNT_ANT2_802_11a_5745_20M

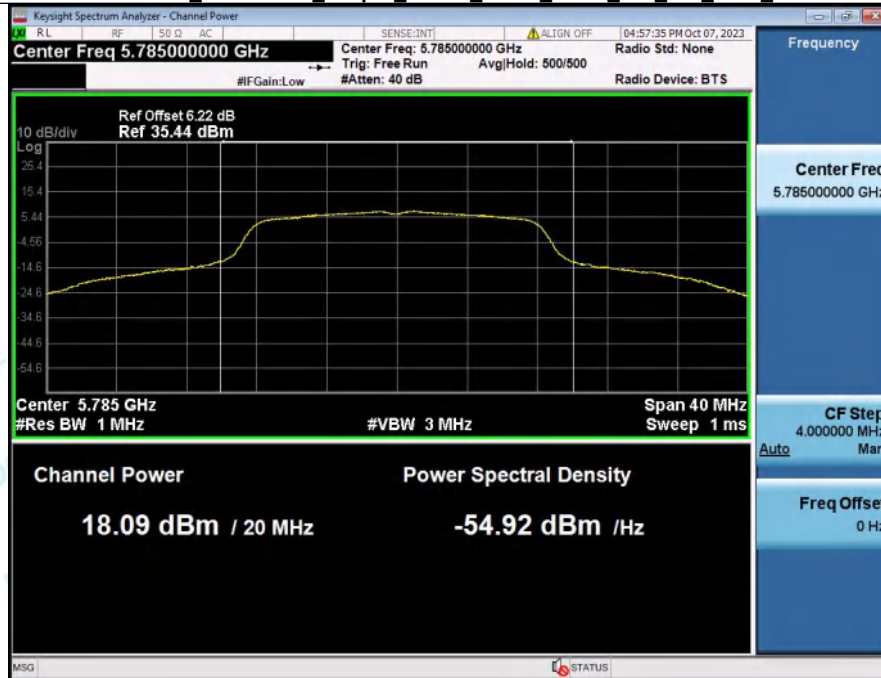


Maximum Conducted Output Power NVNT_ANT1_802_11a_5785_20M**Maximum Conducted Output Power NVNT_ANT2_802_11a_5785_20M**

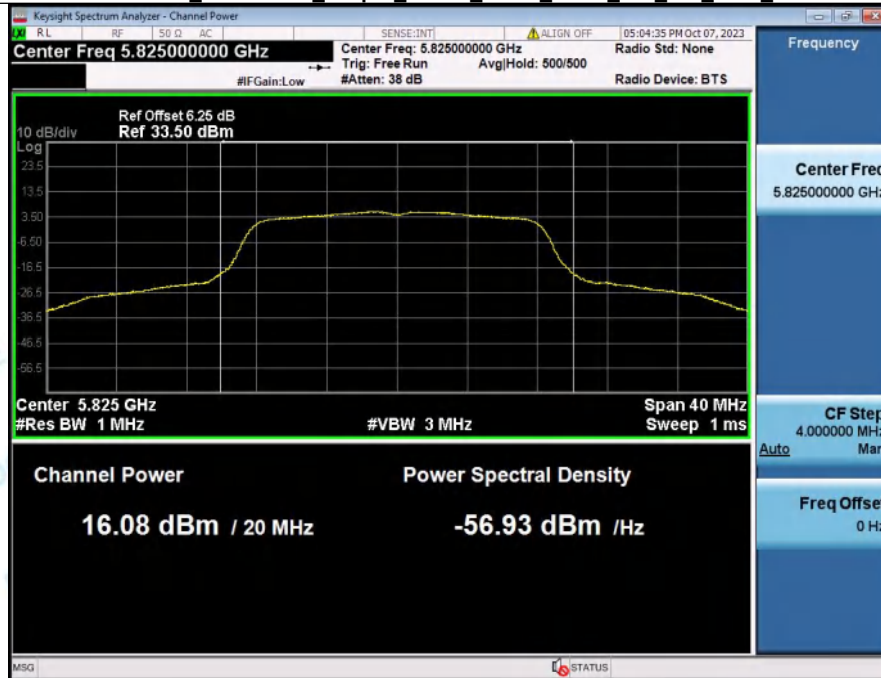Maximum Conducted Output Power NVNT_ANT1_802_11a_5825_20M**Maximum Conducted Output Power NVNT_ANT2_802_11a_5825_20M**

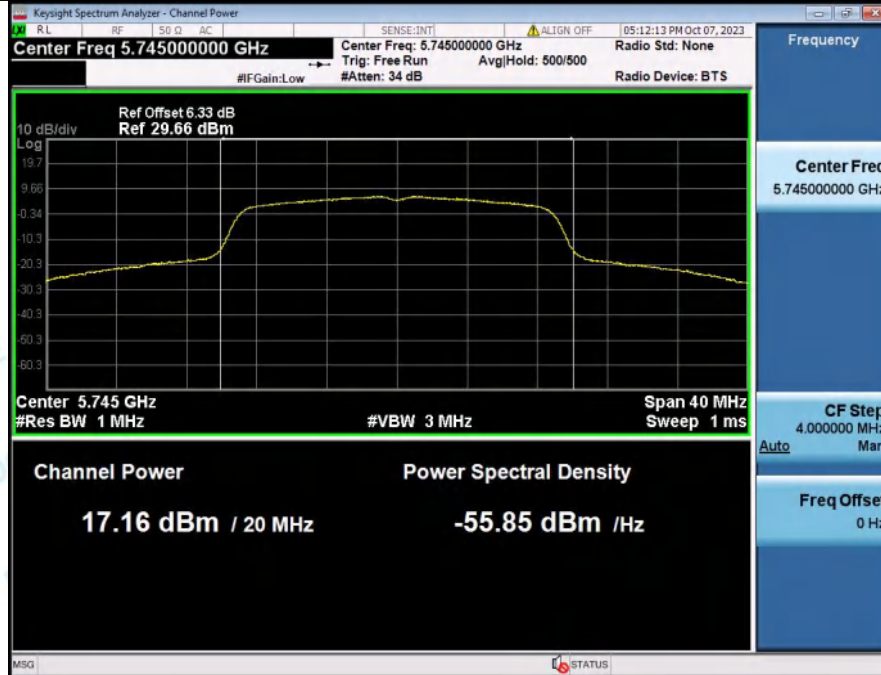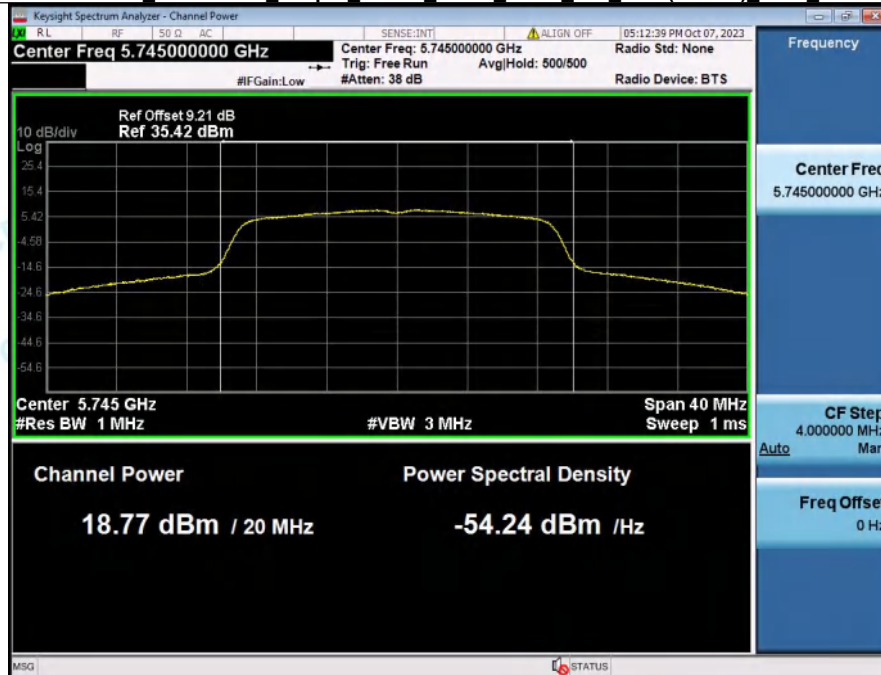Maximum Conducted Output Power NVNT_ANT1_802_11ac(VHT20)_5745_20M**Maximum Conducted Output Power NVNT_ANT2_802_11ac(VHT20)_5745_20M**


Maximum Conducted Output Power NVNT_ANT1_802_11ac(VHT20)_5785_20M**Maximum Conducted Output Power NVNT_ANT2_802_11ac(VHT20)_5785_20M**



Maximum Conducted Output Power NVNT_ANT1_802_11ac(VHT20)_5825_20M

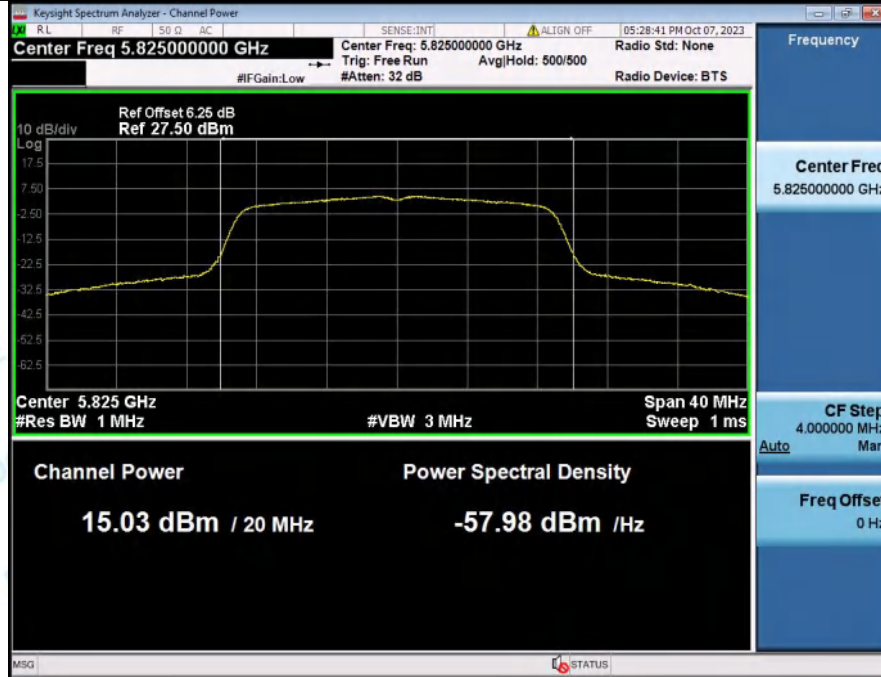


Maximum Conducted Output Power NVNT_ANT2_802_11ac(VHT20)_5825_20M

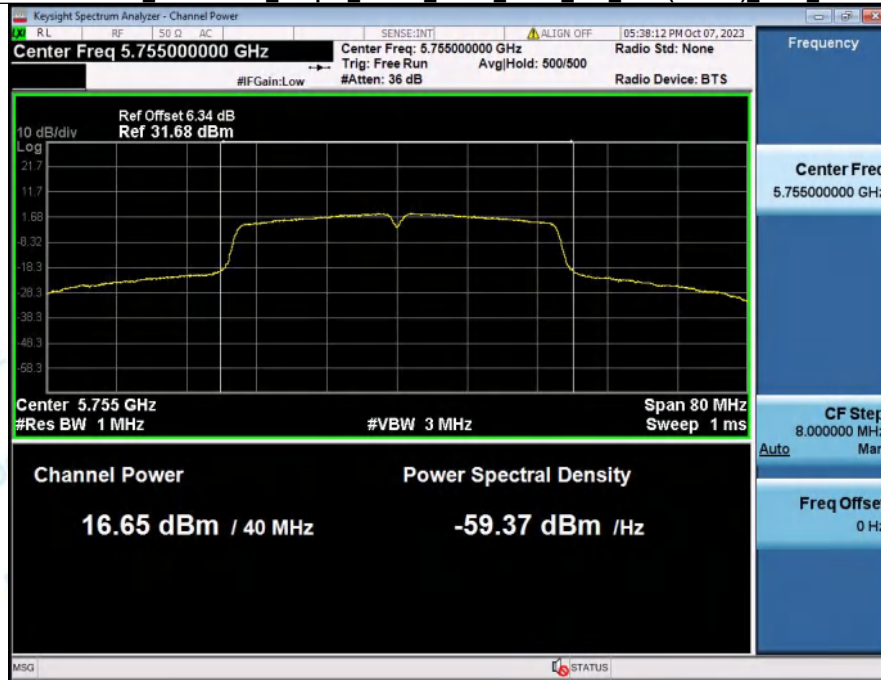


Maximum Conducted Output Power NVNT_ANT1_802_11ac(VHT40)_5755_40M**Maximum Conducted Output Power NVNT_ANT2_802_11ac(VHT40)_5755_40M**

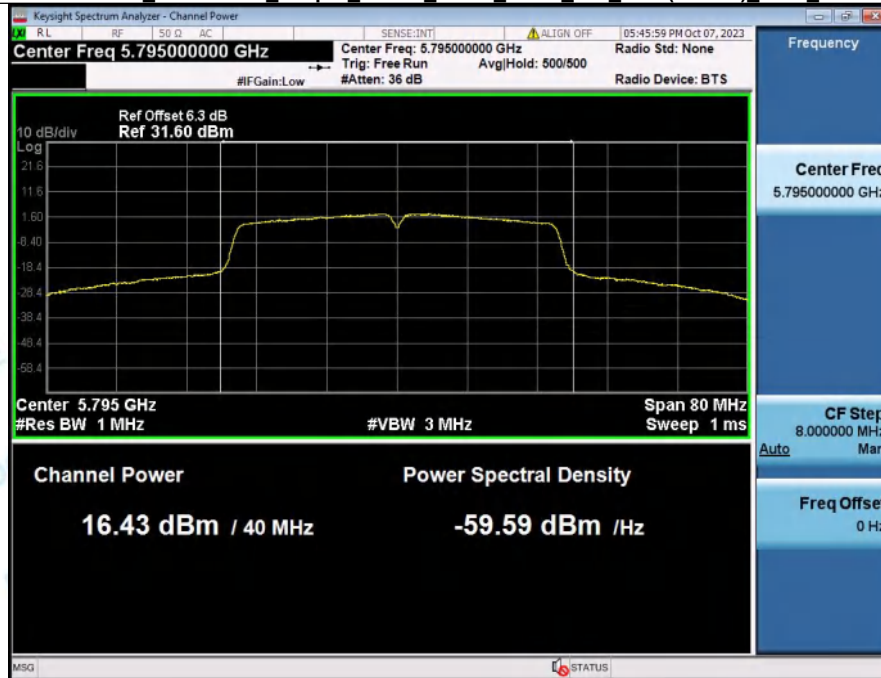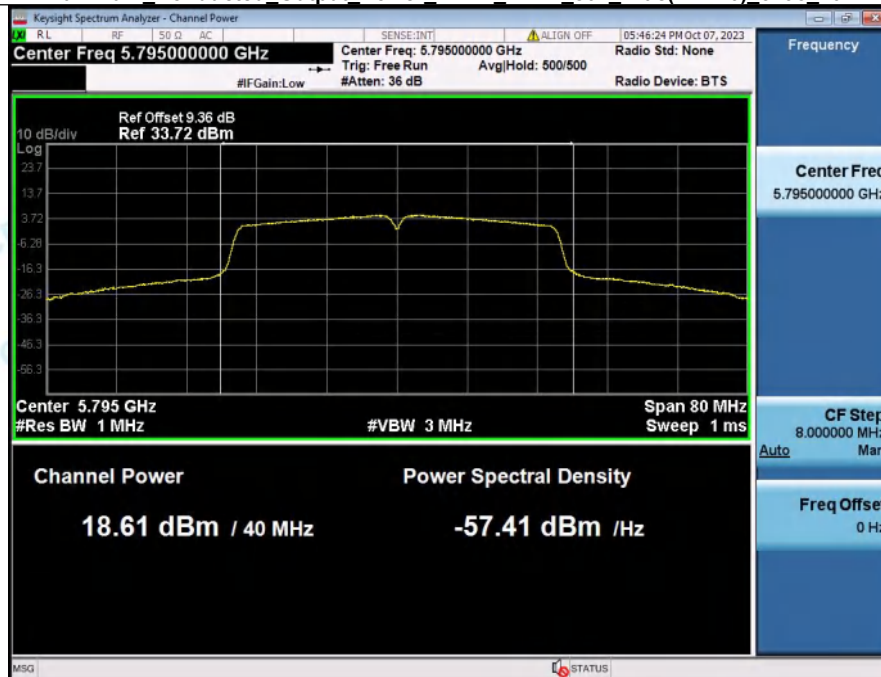Maximum Conducted Output Power NVNT_ANT1_802_11ac(VHT40)_5795_40M**Maximum Conducted Output Power NVNT_ANT2_802_11ac(VHT40)_5795_40M**

Maximum Conducted Output Power NVNT_ANT1_802_11ac(VHT80)_5775_80M

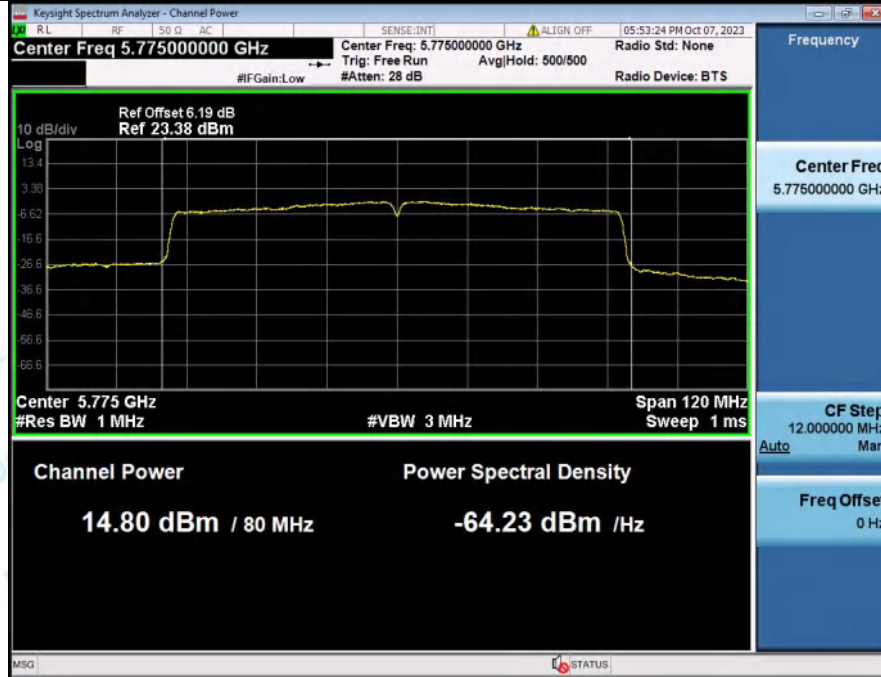

Maximum Conducted Output Power NVNT_ANT2_802_11ac(VHT80)_5775_80M

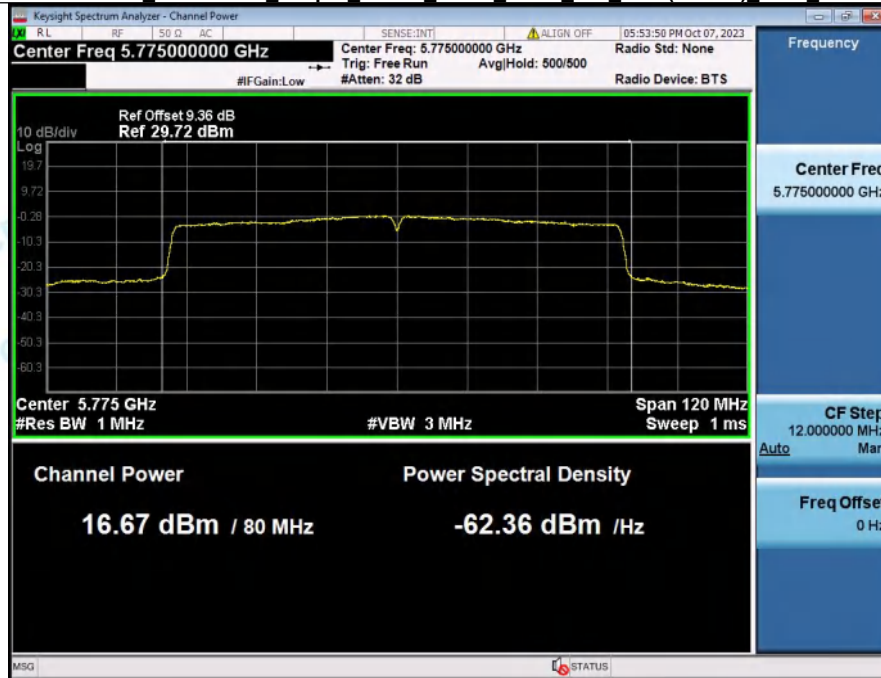

5. Power Spectral Density

Condition	Antenna	Modulation	Frequency (MHz)	PSD_SA(dBm)	Duty factor(dB)	PSD(dBm/500kHz)	limit(dBm)	Result
NVNT	ANT1	802.11a	5745.00	5.13	0.89	5.93	30	Pass
NVNT	ANT2	802.11a	5745.00	6.87	0.84	7.62	30	Pass
NVNT	ANT1	802.11a	5785.00	5.18	0.89	5.98	30	Pass
NVNT	ANT2	802.11a	5785.00	7.16	0.00	7.08	30	Pass
NVNT	ANT1	802.11a	5825.00	3.00	0.79	3.70	30	Pass
NVNT	ANT2	802.11a	5825.00	5.06	0.89	5.86	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	4.09	0.00	4.00	30	Pass
NVNT	ANT2	802.11ac(VHT20)	5745.00	5.99	0.94	6.84	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	3.62	0.94	4.47	30	Pass
NVNT	ANT2	802.11ac(VHT20)	5785.00	5.82	0.96	6.69	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	2.15	0.89	2.96	30	Pass
NVNT	ANT2	802.11ac(VHT20)	5825.00	3.56	0.94	4.41	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	0.55	1.76	2.22	30	Pass
NVNT	ANT2	802.11ac(VHT40)	5755.00	2.34	1.63	3.88	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	0.58	1.63	2.13	30	Pass
NVNT	ANT2	802.11ac(VHT40)	5795.00	2.60	1.63	4.14	30	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	-4.08	3.01	-1.15	30	Pass
NVNT	ANT2	802.11ac(VHT80)	5775.00	-2.32	3.01	0.60	30	Pass

Power Spectral Density_NVNT_ANT1_802_11a_5745



Power Spectral Density_NVNT_ANT2_802_11a_5745



Power Spectral Density_NVNT_ANT1_802_11a_5785



Power Spectral Density_NVNT_ANT2_802_11a_5785



Power Spectral Density_NVNT_ANT1_802_11a_5825



Power Spectral Density_NVNT_ANT2_802_11a_5825




Power Spectral Density NVNT_ANT1_802_11ac(VHT20)_5745



Power Spectral Density NVNT_ANT2_802_11ac(VHT20)_5745




Power Spectral Density NVNT_ANT1_802_11ac(VHT20)_5785

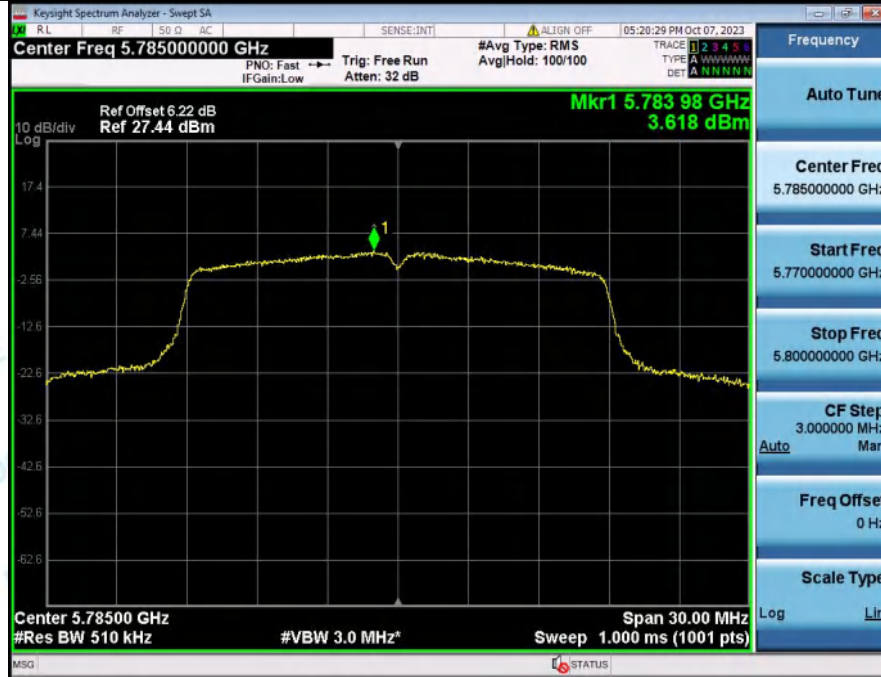

Power Spectral Density NVNT_ANT2_802_11ac(VHT20)_5785




Power Spectral Density NVNT_ANT1_802_11ac(VHT20)_5825

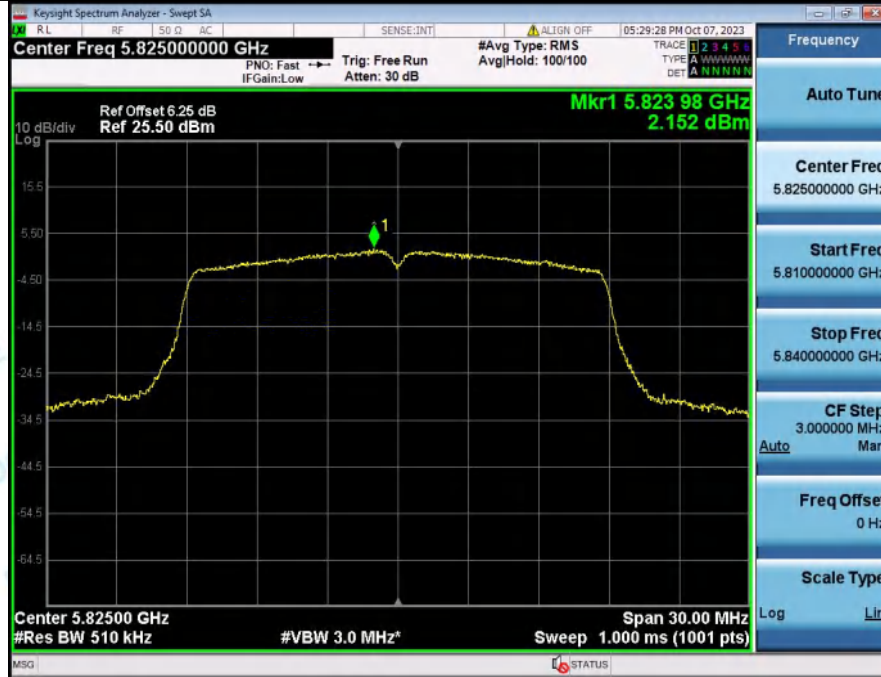


Power Spectral Density NVNT_ANT2_802_11ac(VHT20)_5825




Power Spectral Density NVNT_ANT1_802_11ac(VHT40)_5755

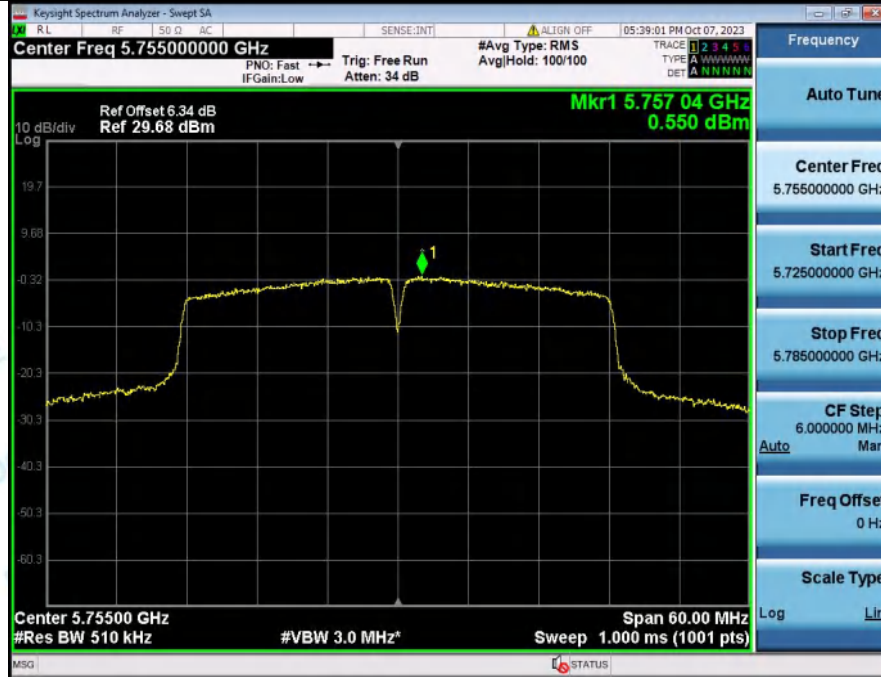


Power Spectral Density NVNT_ANT2_802_11ac(VHT40)_5755

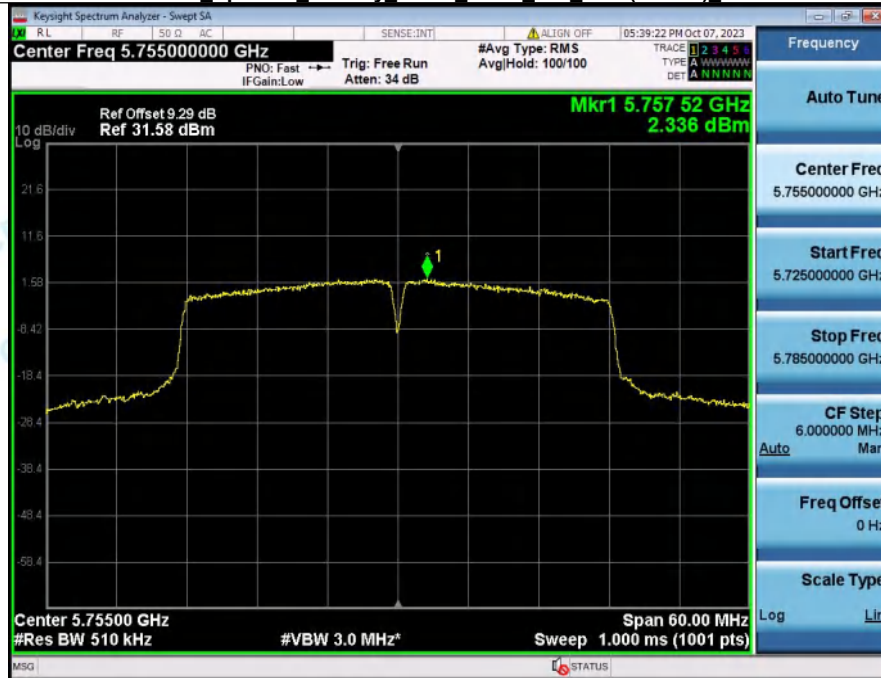

Power Spectral Density NVNT_ANT1_802_11ac(VHT40)_5795

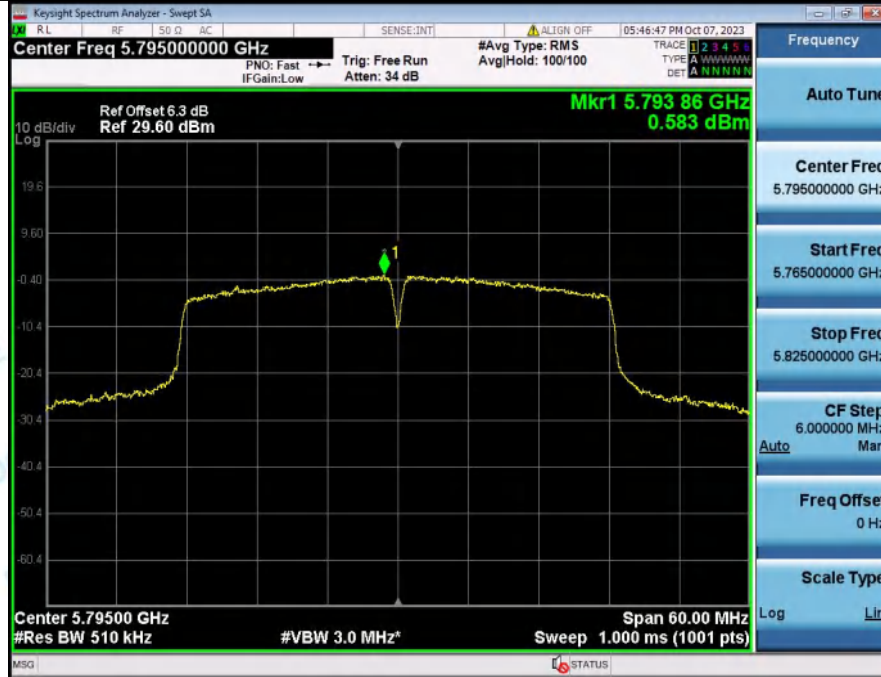

Power Spectral Density NVNT_ANT2_802_11ac(VHT40)_5795

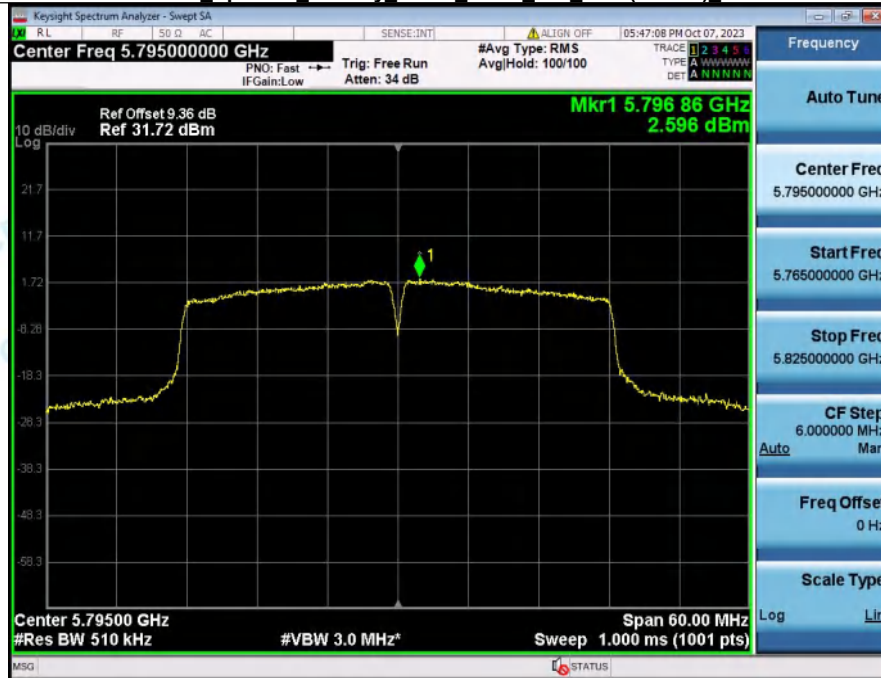

Power Spectral Density NVNT_ANT1_802_11ac(VHT80)_5775




Power Spectral Density NVNT_ANT2_802_11ac(VHT80)_5775




Condition	Antenna	Mode	Frequency (MHz)	MIMO PSD(dBm/500kHz)	Limit(dBm/MHz)	Result
NVNT	MIMO_TX	802.11ac(VHT20)	5745.00	8.53	30	Pass
NVNT	MIMO_TX	802.11ac(VHT20)	5785.00	8.61	30	Pass
NVNT	MIMO_TX	802.11ac(VHT20)	5825.00	6.42	30	Pass
NVNT	MIMO_TX	802.11ac(VHT40)	5755.00	5.97	30	Pass
NVNT	MIMO_TX	802.11ac(VHT40)	5795.00	6.18	30	Pass
NVNT	MIMO_TX	802.11ac(VHT80)	5775.00	2.53	30	Pass

$$P_{ant1} \text{ (MW)} = 10^{\frac{dBm}{10}}, P_{ant2} \text{ (MW)} = 10^{\frac{dBm}{10}}, P_{MIMO} \text{ (dBm)} = 10 \cdot \log(P_{ant1} \text{ (MW)} + P_{ant2} \text{ (MW)})$$


NVNT_MIMO_TX_802_11ac(VHT20)_Power_Spectral_Density_5745

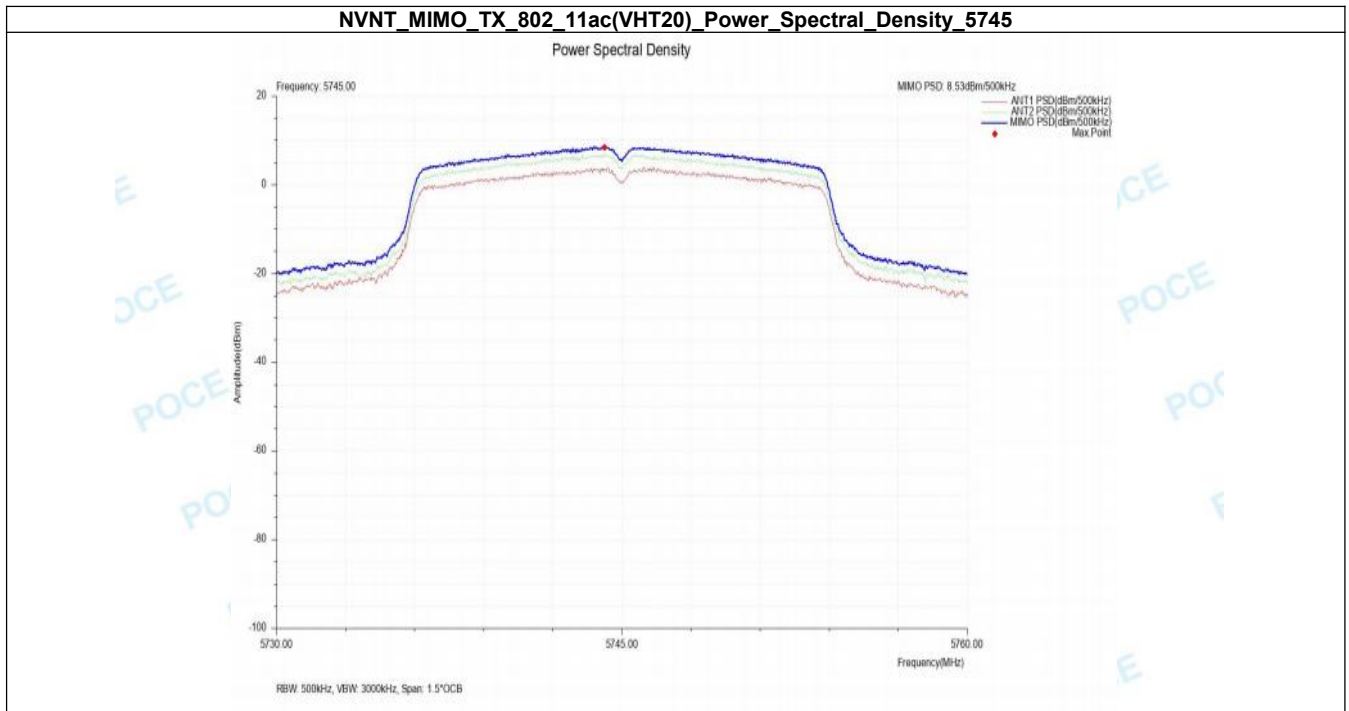


NVNT_MIMO_TX_802_11ac(VHT20)_Power_Spectral_Density_5785

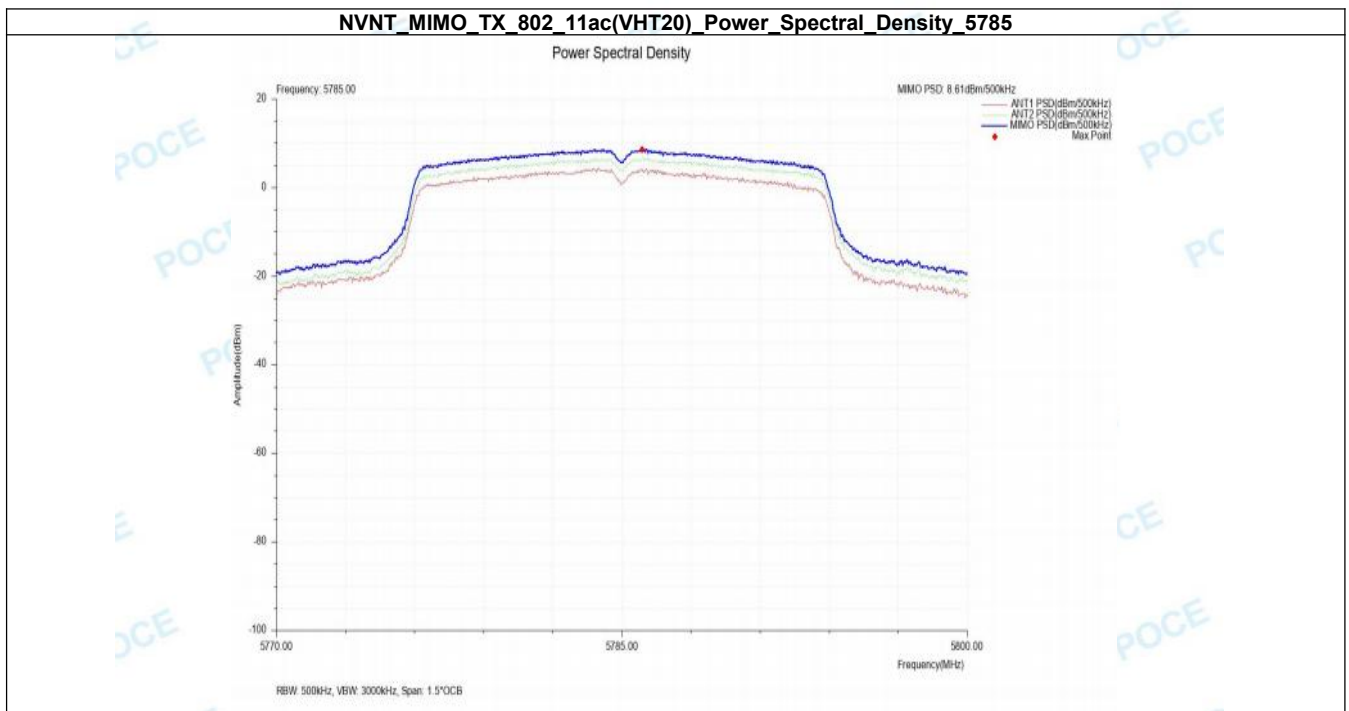


NVNT_MIMO_TX_802_11ac(VHT20)_Power_Spectral_Density_5825

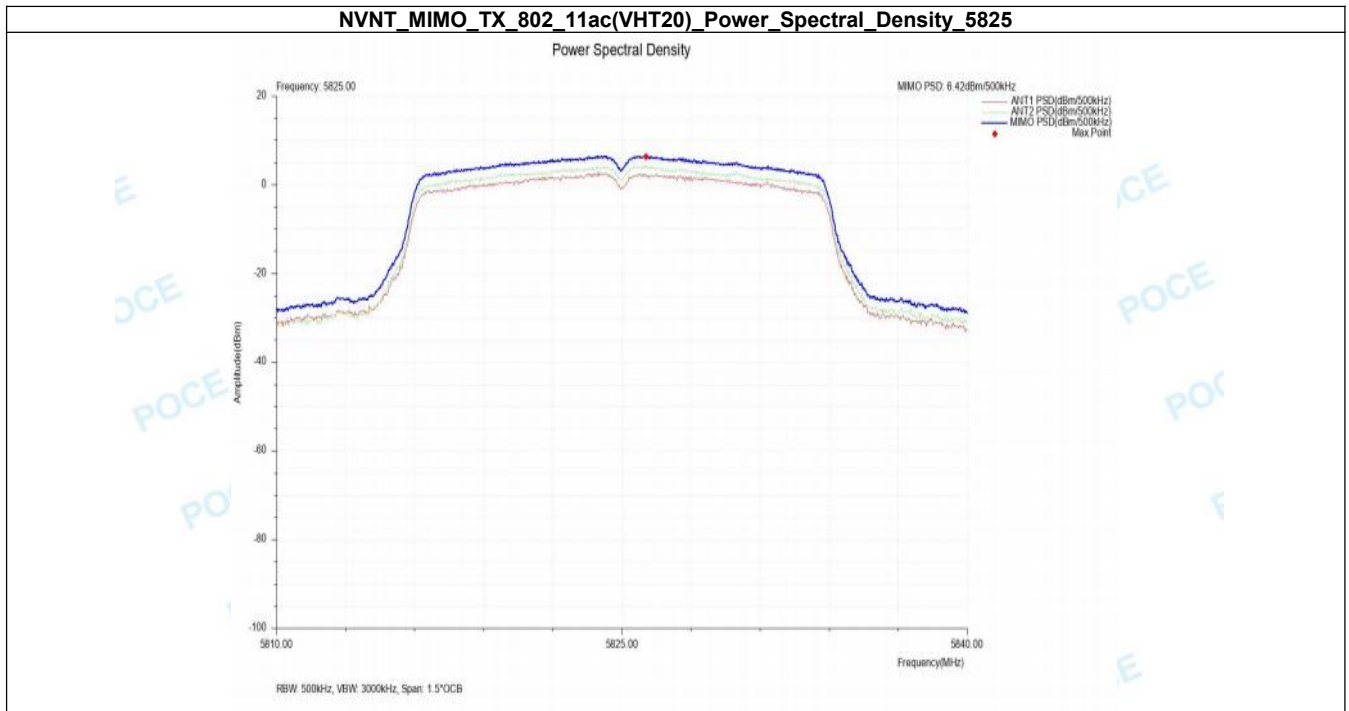


NVNT_MIMO_TX_802_11ac(VHT40)_Power_Spectral_Density_5755

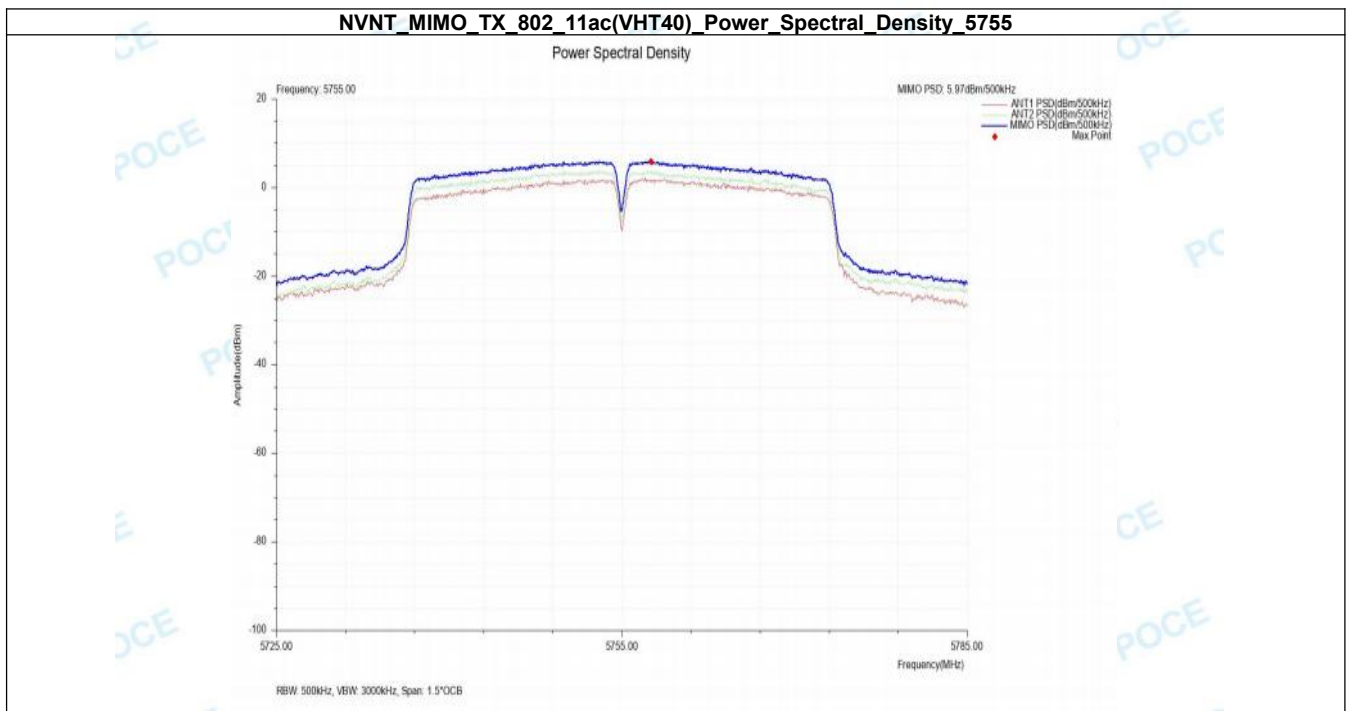

NVNT_MIMO_TX_802_11ac(VHT40)_Power_Spectral_Density_5795

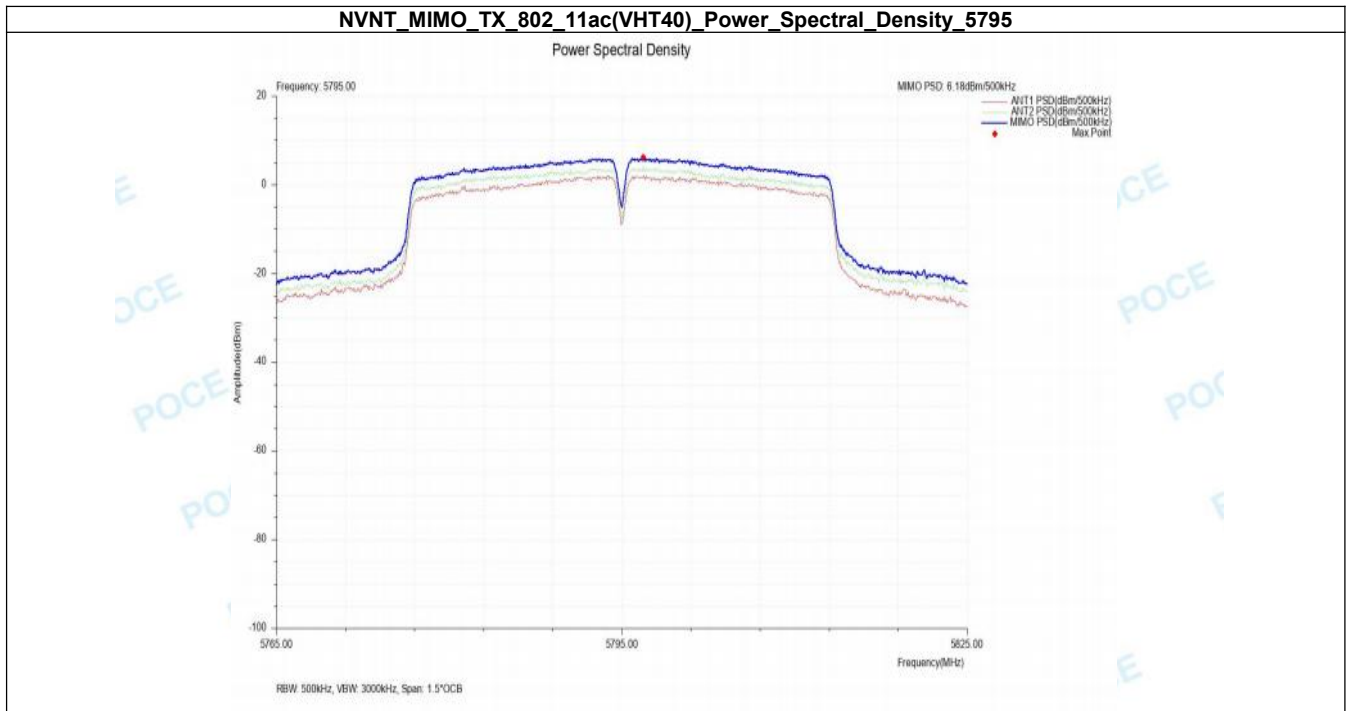


NVNT_MIMO_TX_802_11ac(VHT80)_Power_Spectral_Density_5775

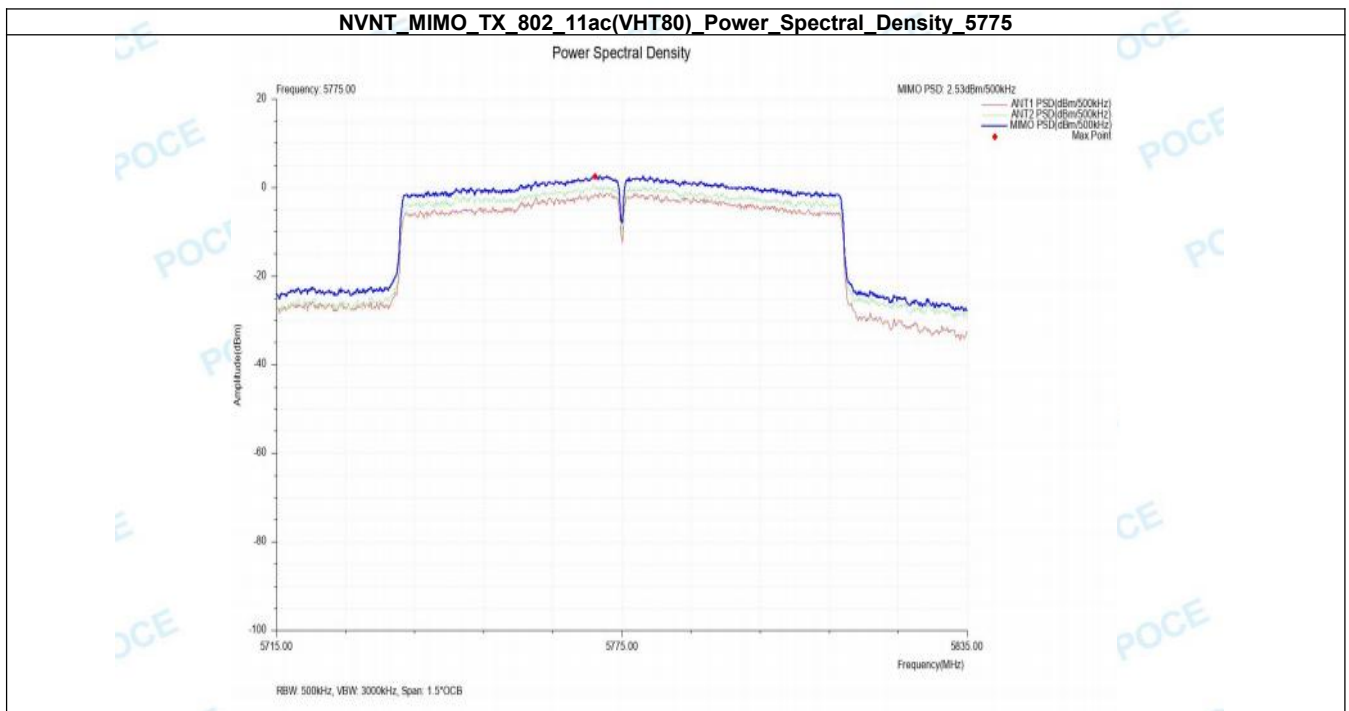


6. Bandedge

Condition	Antenna	Modulation	TX_Frequency (MHz)	Frequency Area(MHz)	Frequency(MHz)	Amplitude(dBm)	Limit(dBm)	Result
NVNT	ANT1	802.11a	LCH	5565-5655	5641.050	-48.09	-27.00	Pass
NVNT	ANT1	802.11a	LCH	5655-5700	5665.710	-44.02	-18.19	Pass
NVNT	ANT1	802.11a	LCH	5700-5720	5719.540	-27.59	15.47	Pass
NVNT	ANT1	802.11a	LCH	5720-5725	5723.905	-20.95	24.50	Pass
NVNT	ANT2	802.11a	LCH	5565-5655	5622.150	-44.88	-27.00	Pass
NVNT	ANT2	802.11a	LCH	5655-5700	5694.330	-40.62	5.34	Pass
NVNT	ANT2	802.11a	LCH	5700-5720	5719.160	-27.70	15.36	Pass
NVNT	ANT2	802.11a	LCH	5720-5725	5724.245	-18.20	25.28	Pass
NVNT	ANT1	802.11a	HCH	5850-5855	5854.270	-38.89	17.26	Pass
NVNT	ANT1	802.11a	HCH	5855-5875	5859.240	-41.16	14.41	Pass
NVNT	ANT1	802.11a	HCH	5875-5920	5910.190	-44.38	-18.93	Pass
NVNT	ANT1	802.11a	HCH	5920-6005	5964.880	-43.50	-27.00	Pass
NVNT	ANT2	802.11a	HCH	5850-5855	5850.800	-34.44	25.18	Pass
NVNT	ANT2	802.11a	HCH	5855-5875	5858.040	-37.34	14.75	Pass
NVNT	ANT2	802.11a	HCH	5875-5920	5906.770	-43.06	-16.12	Pass
NVNT	ANT2	802.11a	HCH	5920-6005	5970.405	-39.47	-27.00	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5565-5655	5631.150	-48.23	-27.00	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5655-5700	5658.825	-44.51	-23.86	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5700-5720	5716.740	-32.03	14.69	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5720-5725	5724.950	-18.65	26.89	Pass
NVNT	ANT2	802.11ac(VHT20)	LCH	5565-5655	5572.740	-45.58	-27.00	Pass
NVNT	ANT2	802.11ac(VHT20)	LCH	5655-5700	5693.160	-43.17	4.38	Pass
NVNT	ANT2	802.11ac(VHT20)	LCH	5700-5720	5719.940	-29.65	15.58	Pass
NVNT	ANT2	802.11ac(VHT20)	LCH	5720-5725	5724.175	-19.52	25.12	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5850-5855	5851.020	-38.24	24.67	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5855-5875	5857.140	-42.01	15.00	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5875-5920	5909.920	-47.35	-18.71	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5920-6005	5934.705	-43.72	-27.00	Pass
NVNT	ANT2	802.11ac(VHT20)	HCH	5850-5855	5850.755	-34.53	25.28	Pass
NVNT	ANT2	802.11ac(VHT20)	HCH	5855-5875	5858.200	-38.69	14.70	Pass
NVNT	ANT2	802.11ac(VHT20)	HCH	5875-5920	5911.090	-44.74	-19.67	Pass
NVNT	ANT2	802.11ac(VHT20)	HCH	5920-6005	5955.020	-40.28	-27.00	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5595-5655	5646.600	-47.57	-27.00	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5655-5700	5697.570	-36.24	8.00	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5700-5720	5718.860	-19.25	15.28	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5720-5725	5723.710	-17.77	24.06	Pass
NVNT	ANT2	802.11ac(VHT40)	LCH	5595-5655	5654.280	-43.50	-27.00	Pass
NVNT	ANT2	802.11ac(VHT40)	LCH	5655-5700	5691.810	-35.43	3.27	Pass
NVNT	ANT2	802.11ac(VHT40)	LCH	5700-5720	5718.780	-21.60	15.26	Pass
NVNT	ANT2	802.11ac(VHT40)	LCH	5720-5725	5720.270	-17.71	16.22	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5850-5855	5854.660	-38.33	16.38	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5855-5875	5857.980	-39.00	14.77	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5875-5920	5885.170	-44.41	1.64	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5920-5955	5932.495	-42.86	-27.00	Pass
NVNT	ANT2	802.11ac(VHT40)	HCH	5850-5855	5853.340	-34.38	19.38	Pass
NVNT	ANT2	802.11ac(VHT40)	HCH	5855-5875	5859.480	-34.58	14.35	Pass
NVNT	ANT2	802.11ac(VHT40)	HCH	5875-5920	5891.695	-40.89	-3.73	Pass
NVNT	ANT2	802.11ac(VHT40)	HCH	5920-5955	5953.425	-40.91	-27.00	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5650-5655	5652.270	-41.87	-27.00	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5655-5700	5698.065	-25.51	8.41	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5700-5720	5702.860	-21.48	10.80	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5720-5725	5720.610	-19.11	16.99	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5850-5855	5854.670	-32.00	16.35	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5855-5875	5869.020	-31.84	11.67	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5875-5920	5877.745	-38.00	7.74	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5920-5925	5922.900	-39.10	-27.00	Pass
NVNT	ANT2	802.11ac(VHT80)	MCH	5650-5655	5654.050	-38.54	-27.00	Pass
NVNT	ANT2	802.11ac(VHT80)	MCH	5655-5700	5681.370	-25.81	-5.32	Pass
NVNT	ANT2	802.11ac(VHT80)	MCH	5700-5720	5708.960	-20.46	12.51	Pass
NVNT	ANT2	802.11ac(VHT80)	MCH	5720-5725	5720.935	-18.06	17.73	Pass
NVNT	ANT2	802.11ac(VHT80)	MCH	5850-5855	5853.170	-24.89	19.77	Pass
NVNT	ANT2	802.11ac(VHT80)	MCH	5855-5875	5862.240	-26.59	13.57	Pass
NVNT	ANT2	802.11ac(VHT80)	MCH	5875-5920	5882.740	-35.10	3.64	Pass
NVNT	ANT2	802.11ac(VHT80)	MCH	5920-5925	5923.910	-36.12	-27.00	Pass


Bandedge_NVNT_ANT1_802_11a_5745

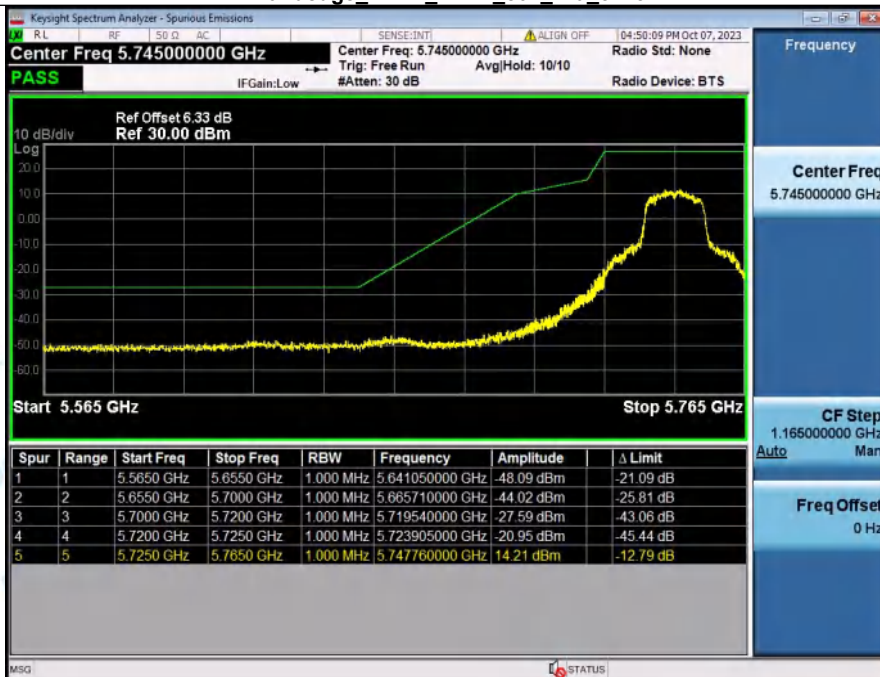


Bandedge_NVNT_ANT2_802_11a_5745

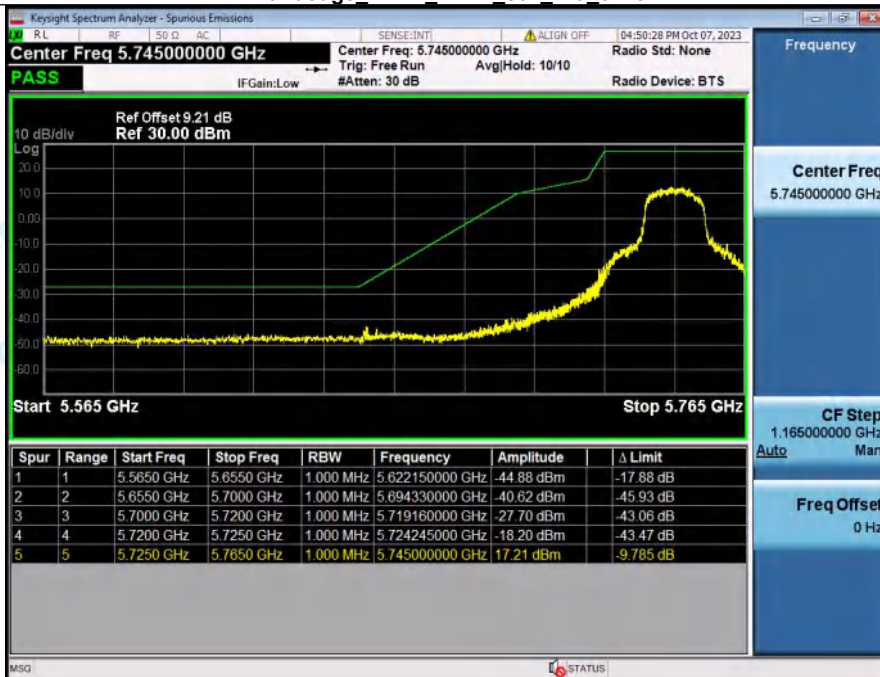


Bandedge_NVNT_ANT1_802_11a_5825

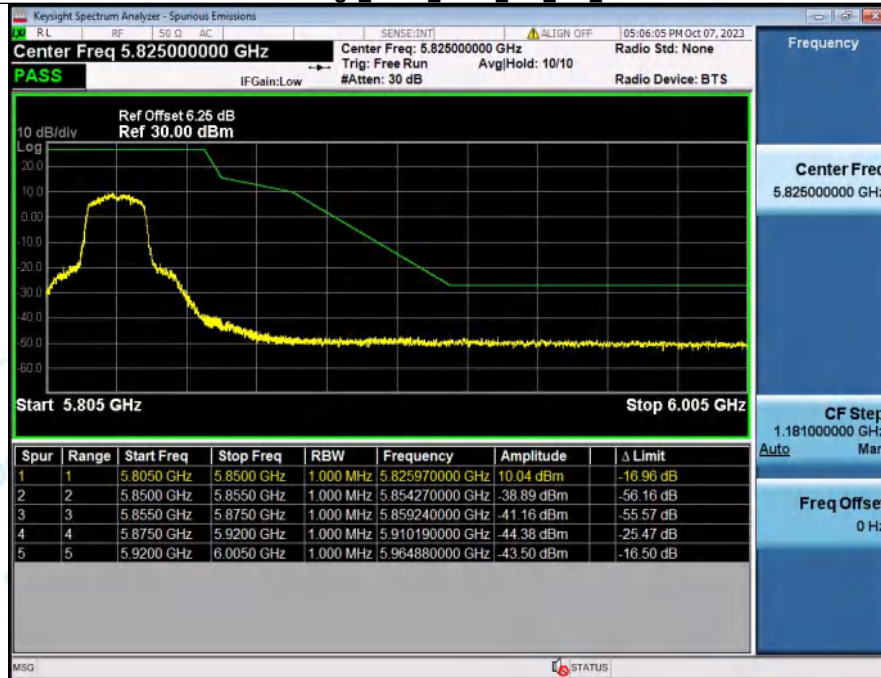


Bandedge_NVNT_ANT2_802_11a_5825

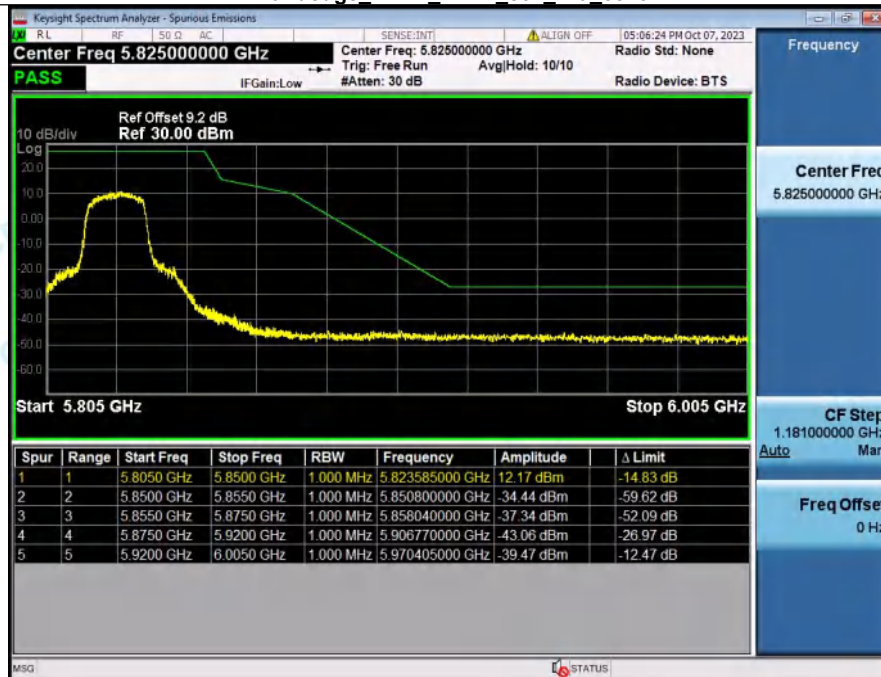


Bandedge_NVNT_ANT1_802_11ac(VHT20)_5745

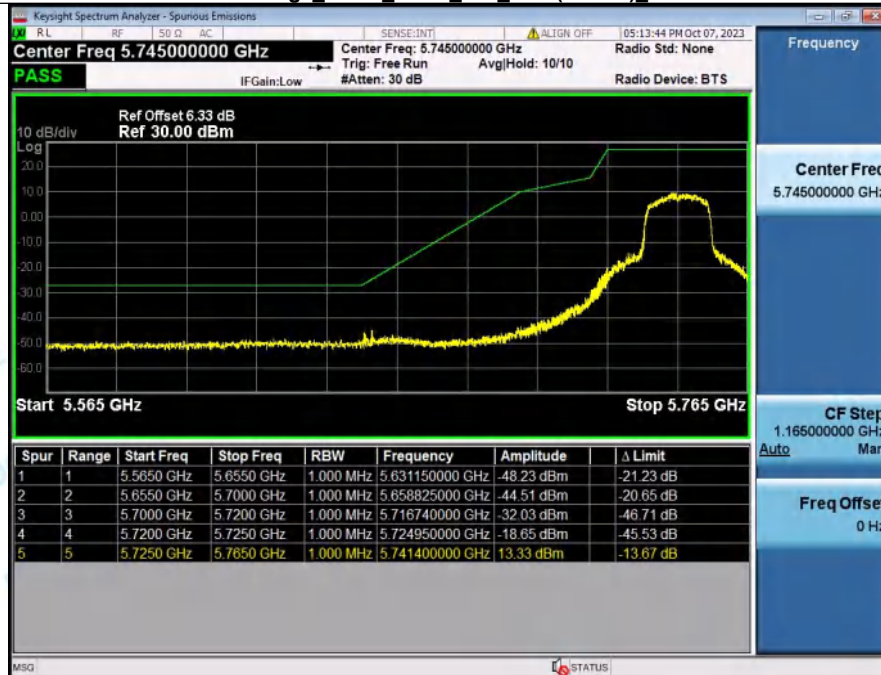


Bandedge_NVNT_ANT2_802_11ac(VHT20)_5745

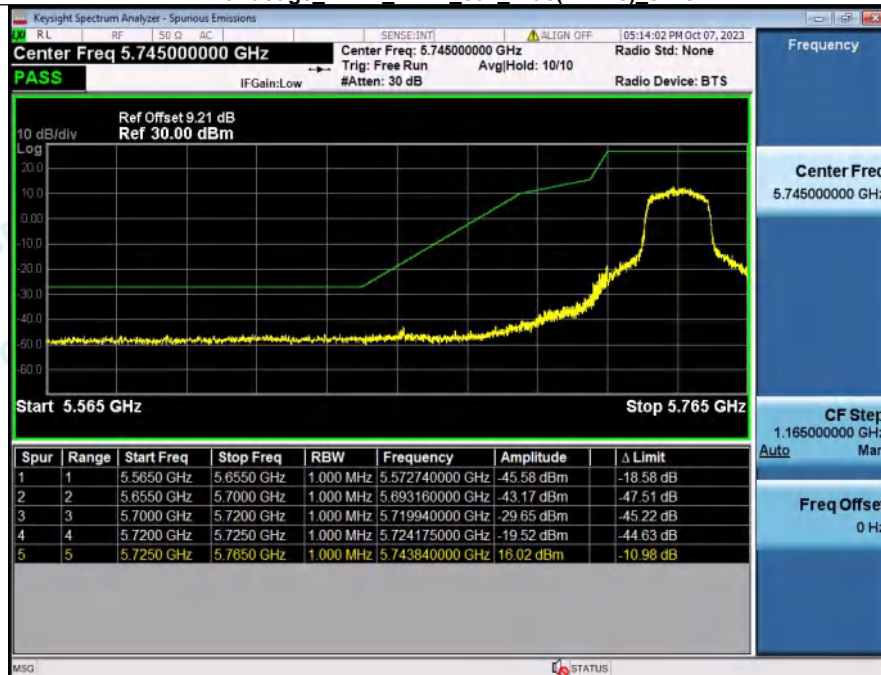


Bandedge_NVNT_ANT1_802_11ac(VHT20)_5825

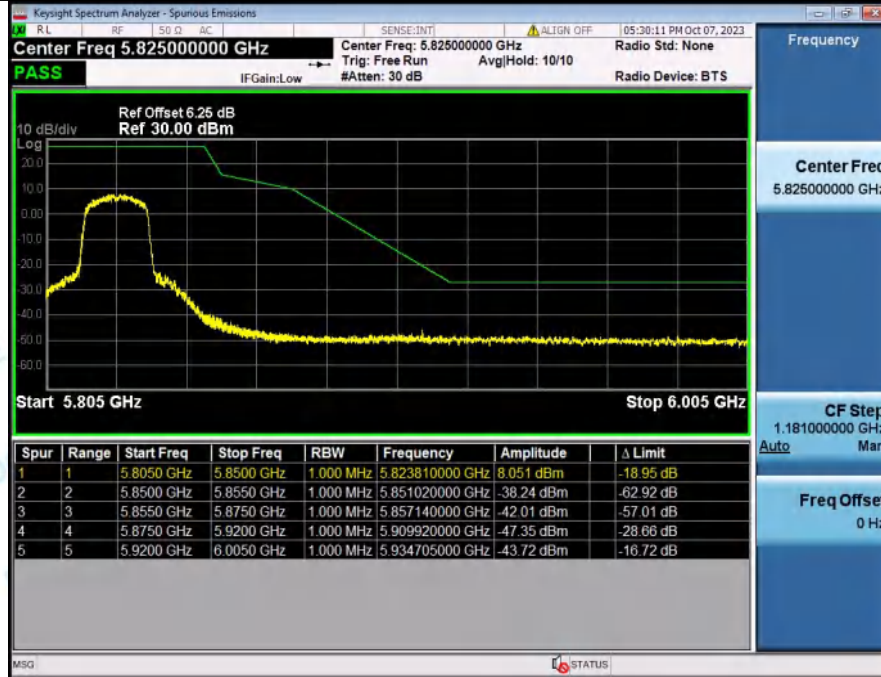


Bandedge_NVNT_ANT2_802_11ac(VHT20)_5825

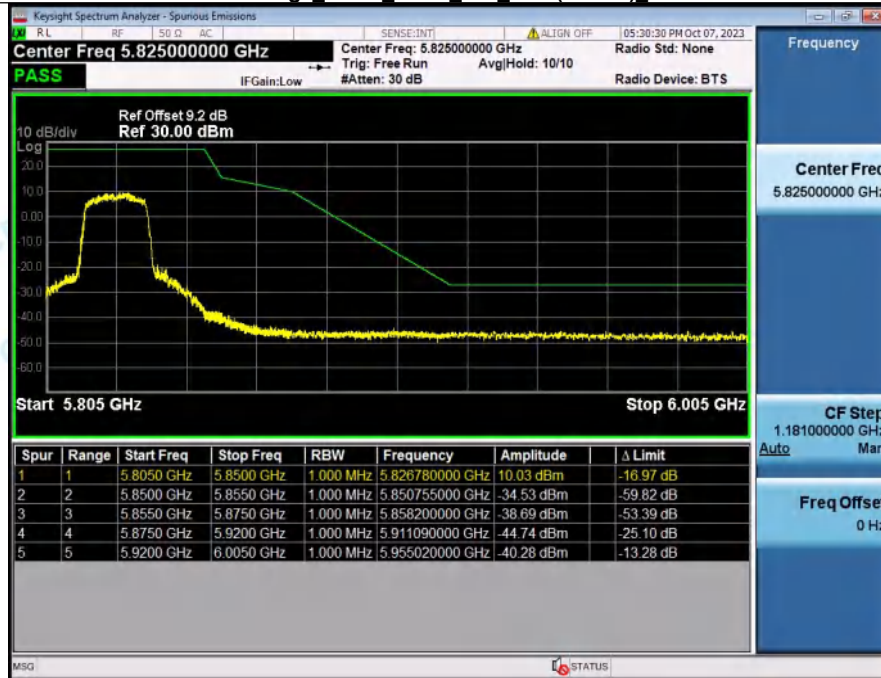


Bandedge_NVNT_ANT1_802_11ac(VHT40)_5755

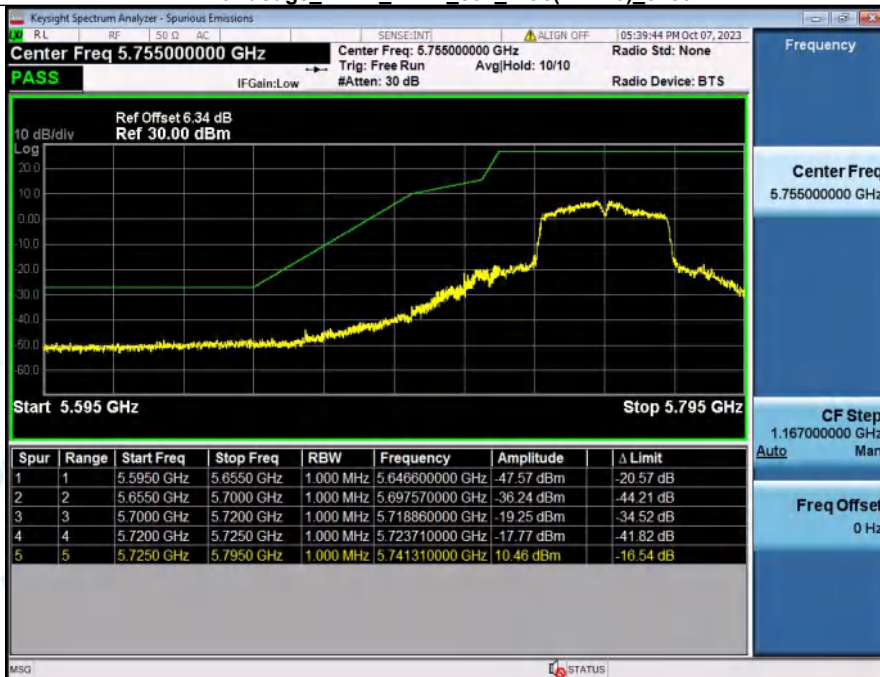


Bandedge_NVNT_ANT2_802_11ac(VHT40)_5755

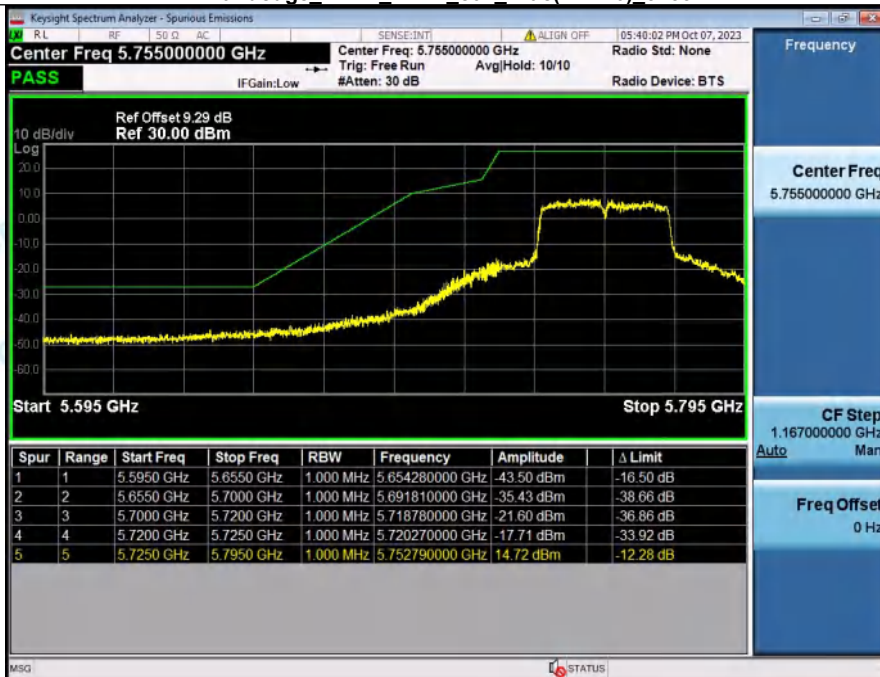


Bandedge_NVNT_ANT1_802_11ac(VHT40)_5795

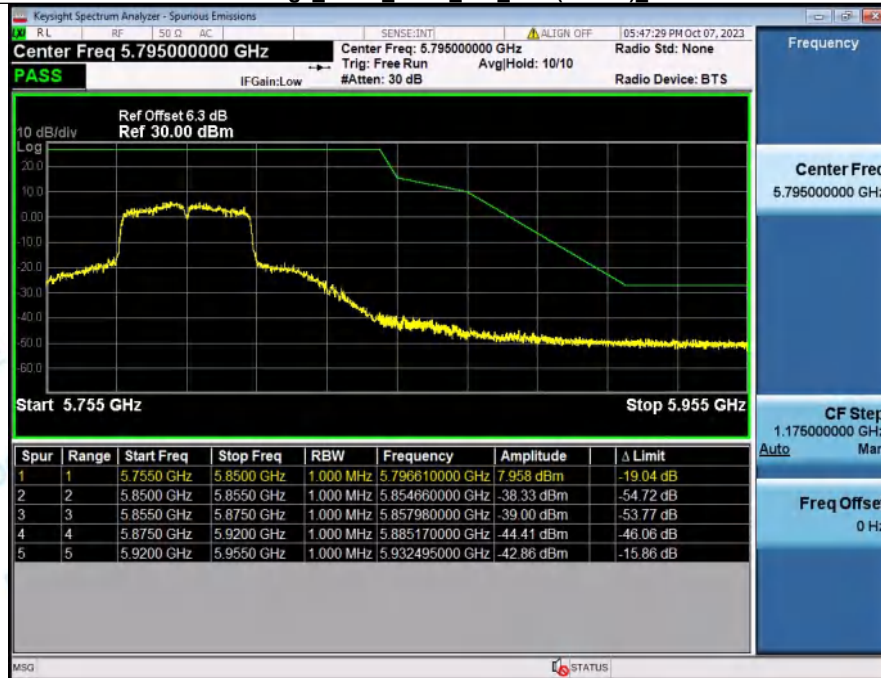

Bandedge_NVNT_ANT2_802_11ac(VHT40)_5795

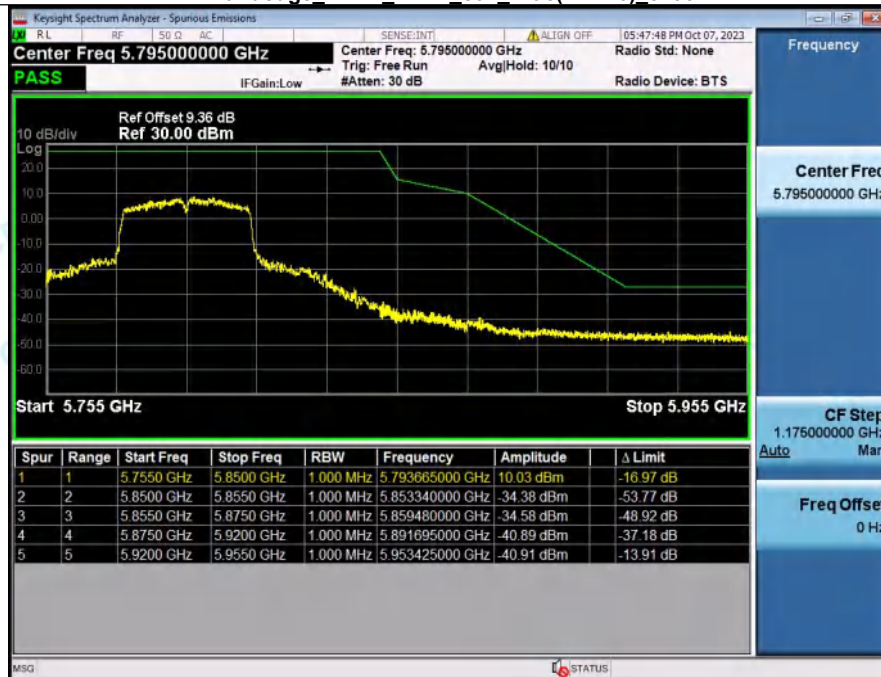

Bandedge_NVNT_ANT1_802_11ac(VHT80)_5775_low

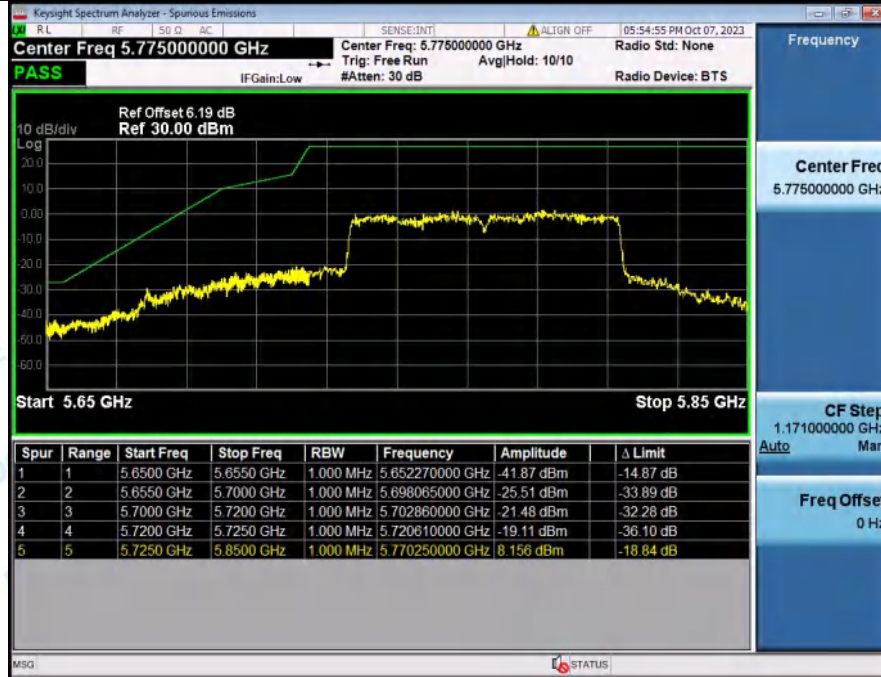

Bandedge_NVNT_ANT1_802_11ac(VHT80)_5775_up



Bandedge NVNT ANT2 802 11ac(VHT80) 5775 low




Bandedge NVNT ANT2 802 11ac(VHT80) 5775 up




7. Spurious Emission

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark Frequency(MHz)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5745.00	25033.56	-48.01	-27	Pass
NVNT	ANT2	802.11a	5745.00	17235.50	-43.47	-27	Pass
NVNT	ANT1	802.11a	5785.00	25009.74	-47.89	-27	Pass
NVNT	ANT2	802.11a	5785.00	24964.74	-44.45	-27	Pass
NVNT	ANT1	802.11a	5825.00	24520.04	-48.18	-27	Pass
NVNT	ANT2	802.11a	5825.00	25025.62	-45.05	-27	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	25038.86	-47.90	-27	Pass
NVNT	ANT2	802.11ac(VHT20)	5745.00	24991.21	-45.02	-27	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	24533.28	-48.52	-27	Pass
NVNT	ANT2	802.11ac(VHT20)	5785.00	24985.92	-45.51	-27	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	24562.40	-48.72	-27	Pass
NVNT	ANT2	802.11ac(VHT20)	5825.00	25046.80	-45.95	-27	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	25054.74	-48.24	-27	Pass
NVNT	ANT2	802.11ac(VHT40)	5755.00	24075.35	-45.15	-27	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	24559.75	-48.30	-27	Pass
NVNT	ANT2	802.11ac(VHT40)	5795.00	25036.21	-45.40	-27	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	25033.56	-48.75	-27	Pass
NVNT	ANT2	802.11ac(VHT80)	5775.00	24901.21	-45.04	-27	Pass


Spurious Emission NVNT_ANT1_802_11a_5745

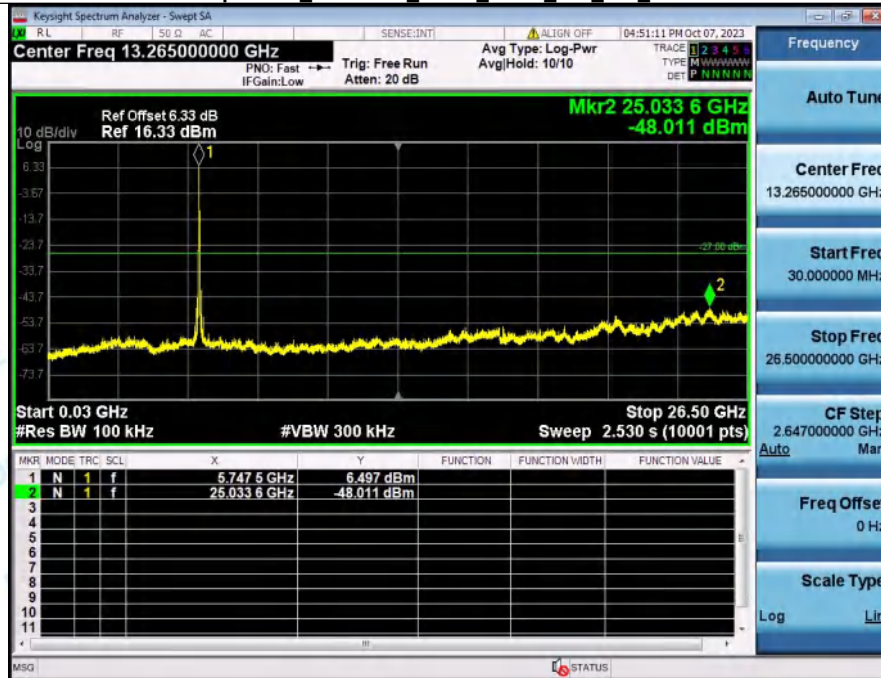


Spurious Emission NVNT_ANT2_802_11a_5745

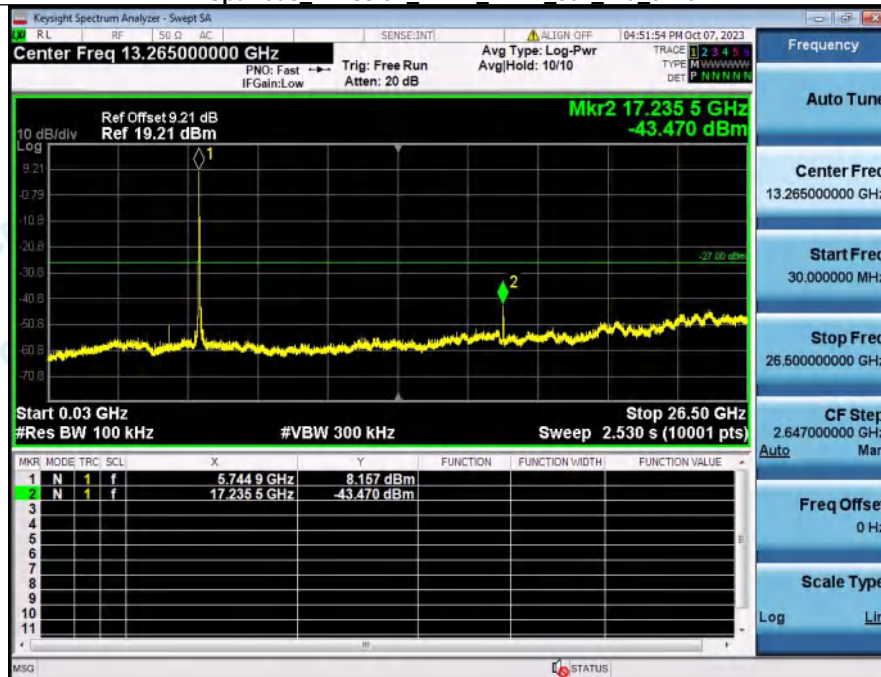


Spurious_Emission_NVNT_ANT1_802_11a_5785

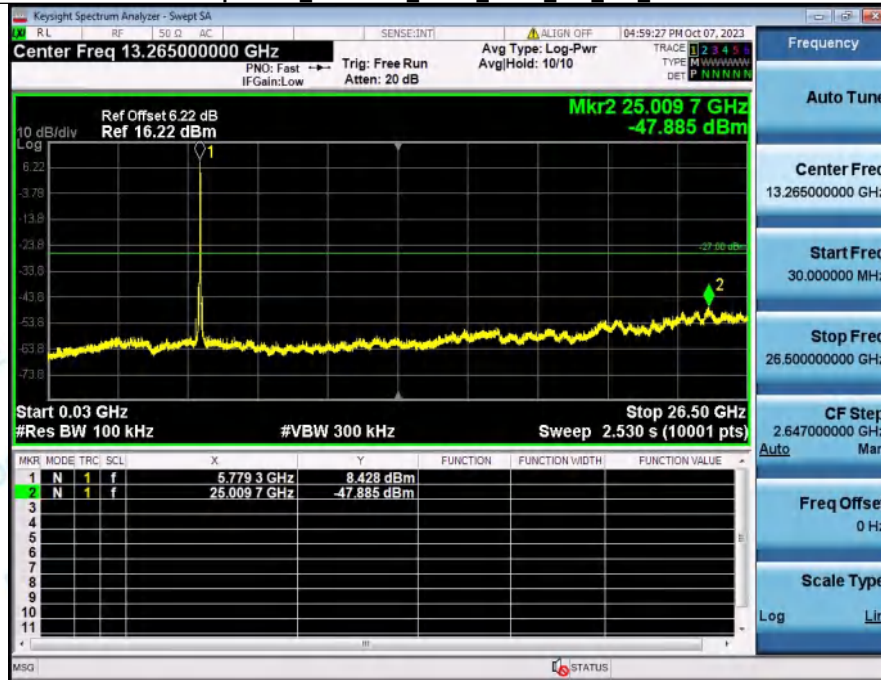


Spurious_Emission_NVNT_ANT2_802_11a_5785

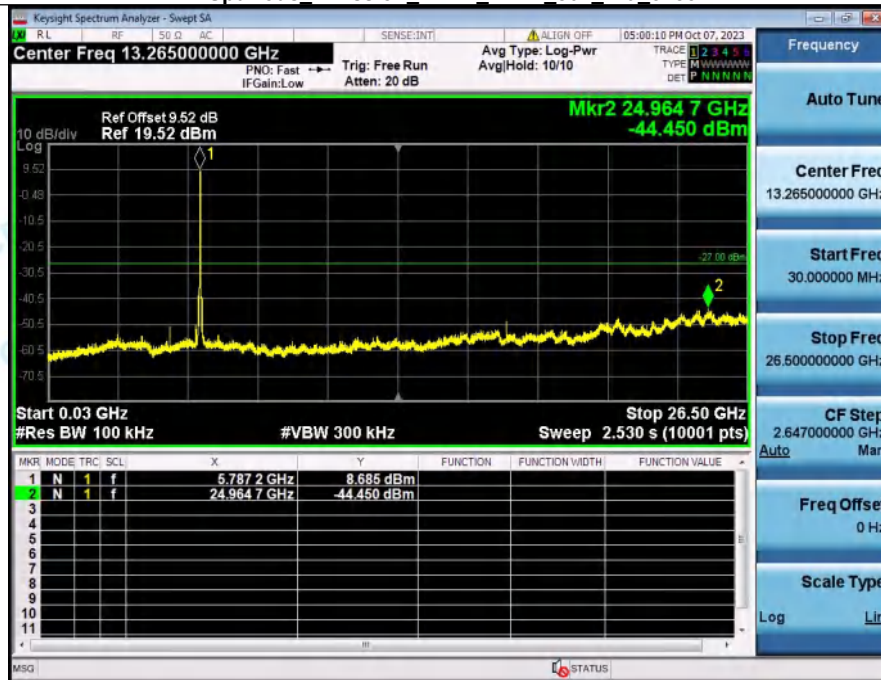


Spurious Emission NVNT_ANT1_802_11a_5825

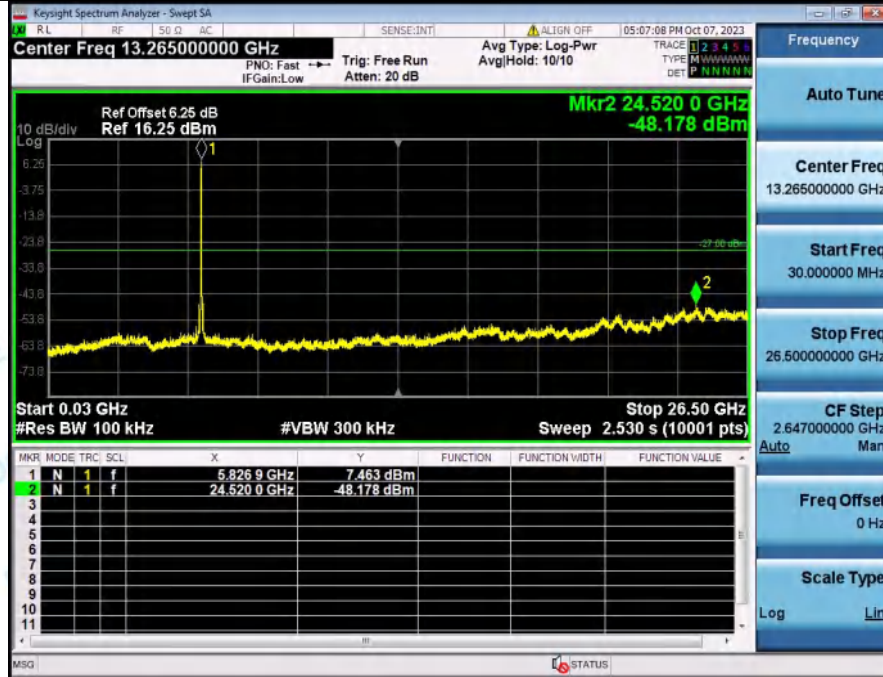


Spurious Emission NVNT_ANT2_802_11a_5825

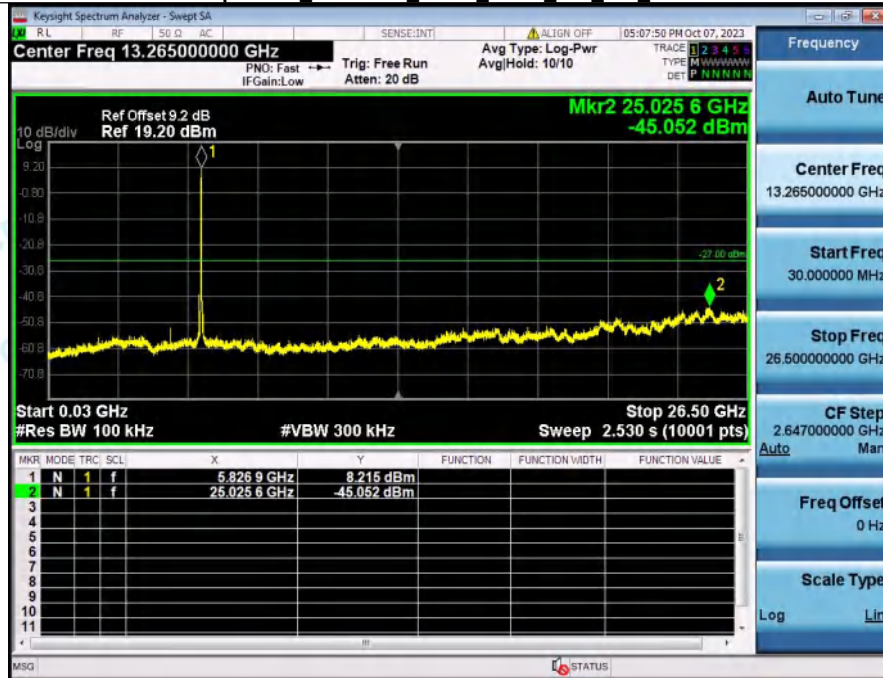


Spurious Emission NVNT_ANT1_802_11ac(VHT20)_5745

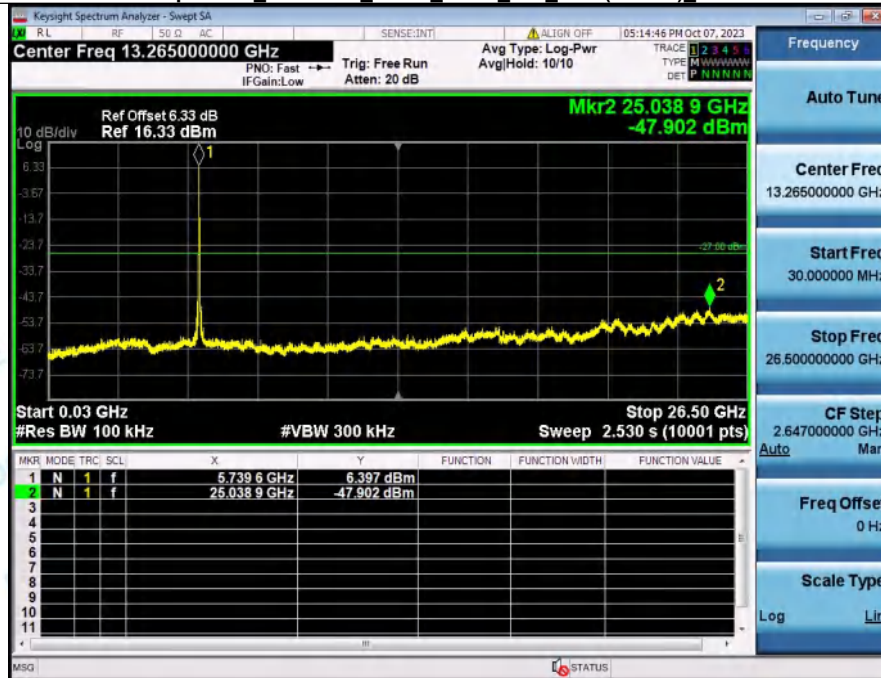


Spurious Emission NVNT_ANT2_802_11ac(VHT20)_5745

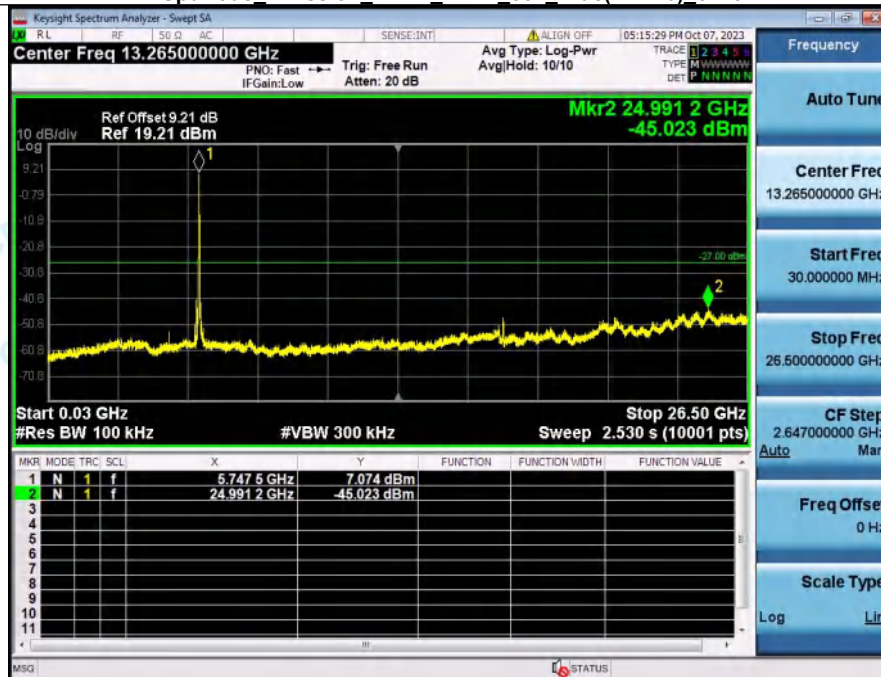


Spurious Emission NVNT_ANT1_802_11ac(VHT20)_5785

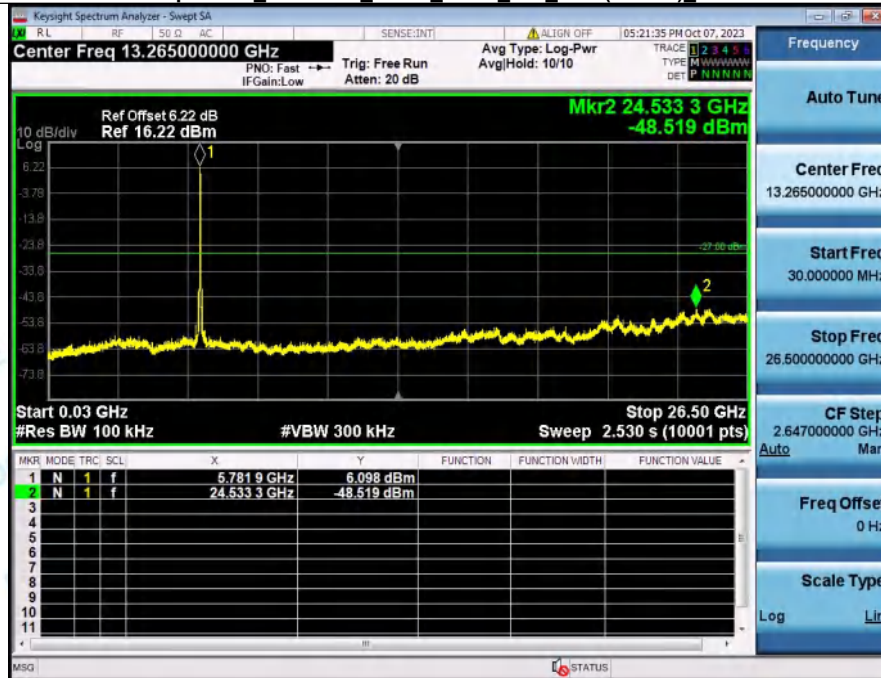


Spurious Emission NVNT_ANT2_802_11ac(VHT20)_5785

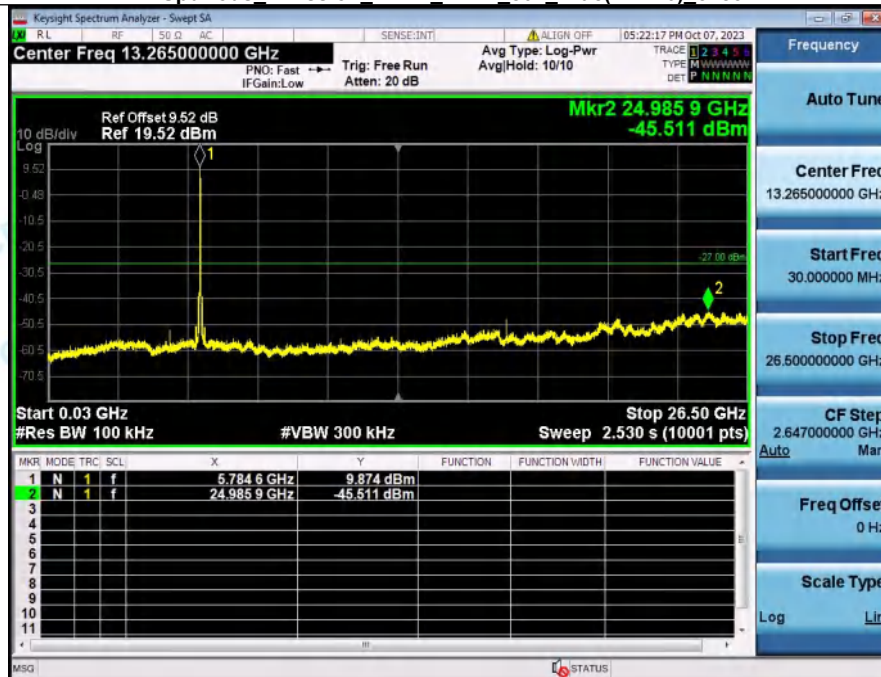


Spurious Emission NVNT_ANT1_802_11ac(VHT20)_5825

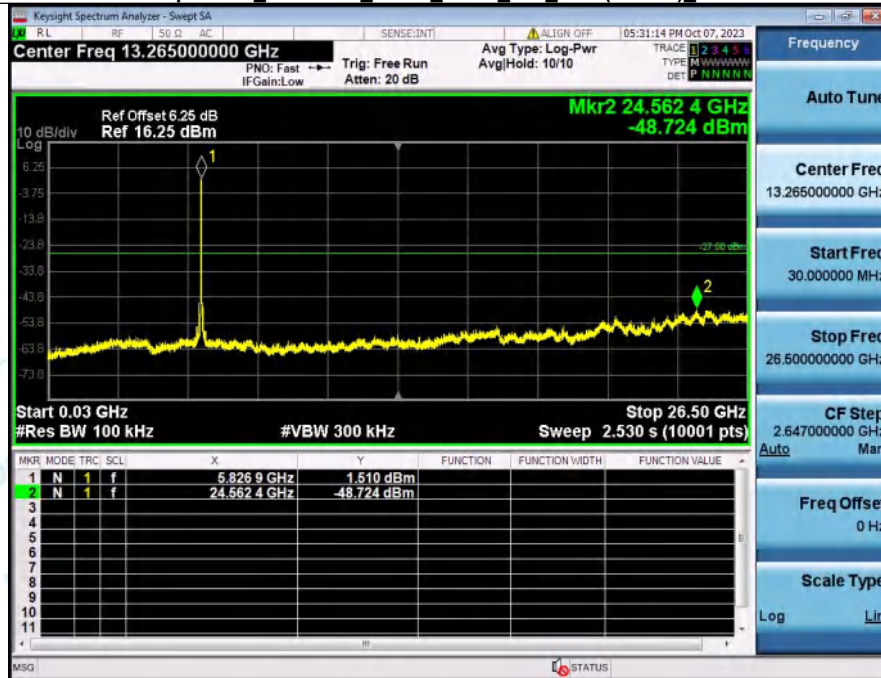


Spurious Emission NVNT_ANT2_802_11ac(VHT20)_5825

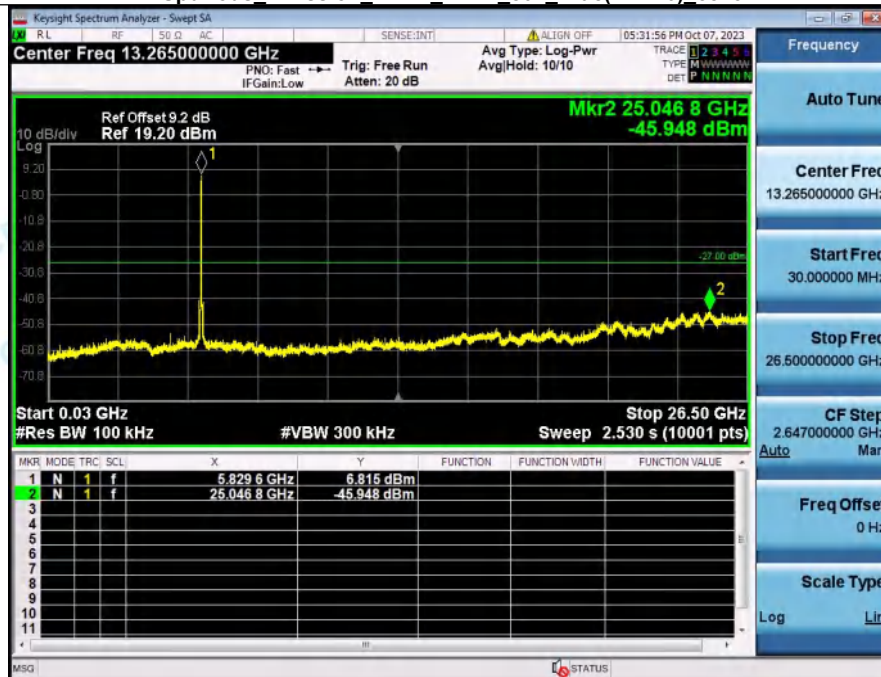


Spurious Emission NVNT_ANT1_802_11ac(VHT40)_5755

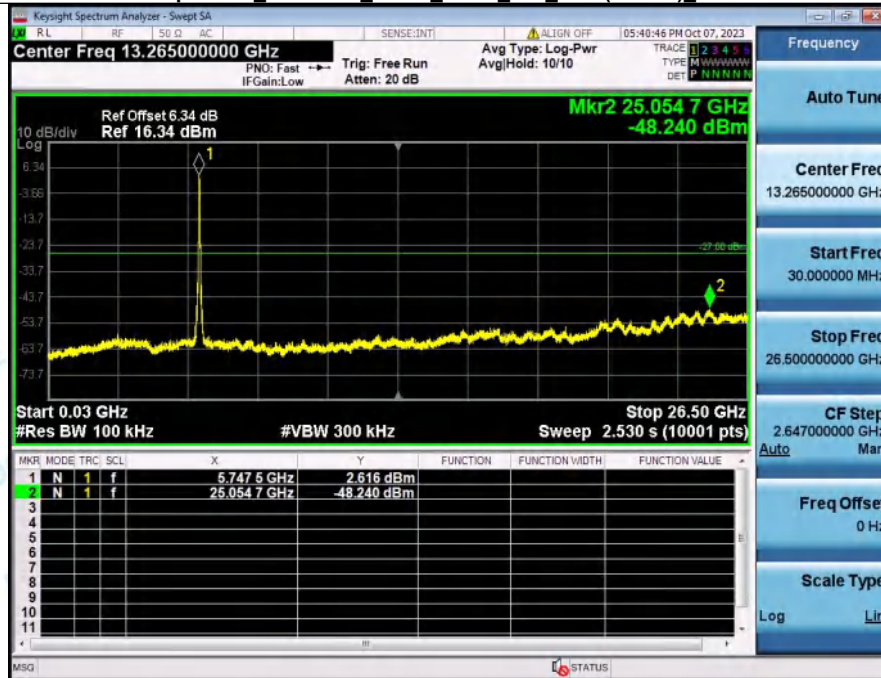


Spurious Emission NVNT_ANT2_802_11ac(VHT40)_5755

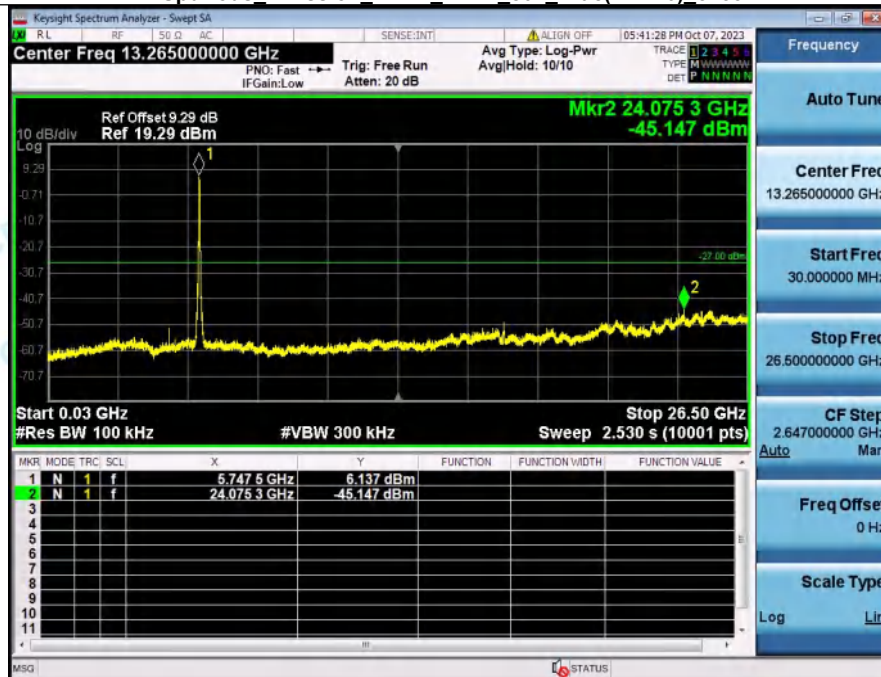


Spurious Emission NVNT_ANT1_802_11ac(VHT40)_5795

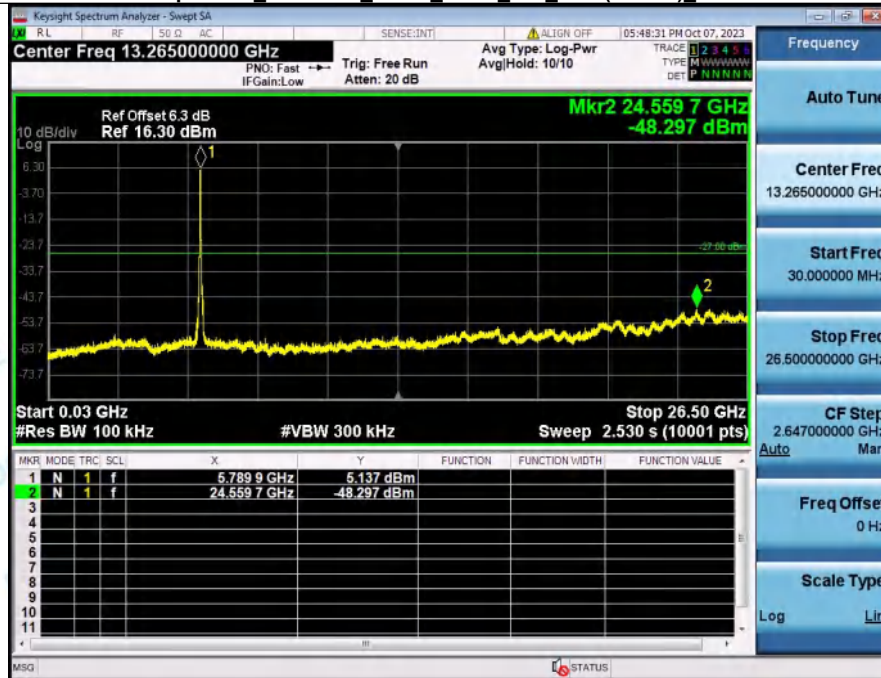


Spurious Emission NVNT_ANT2_802_11ac(VHT40)_5795

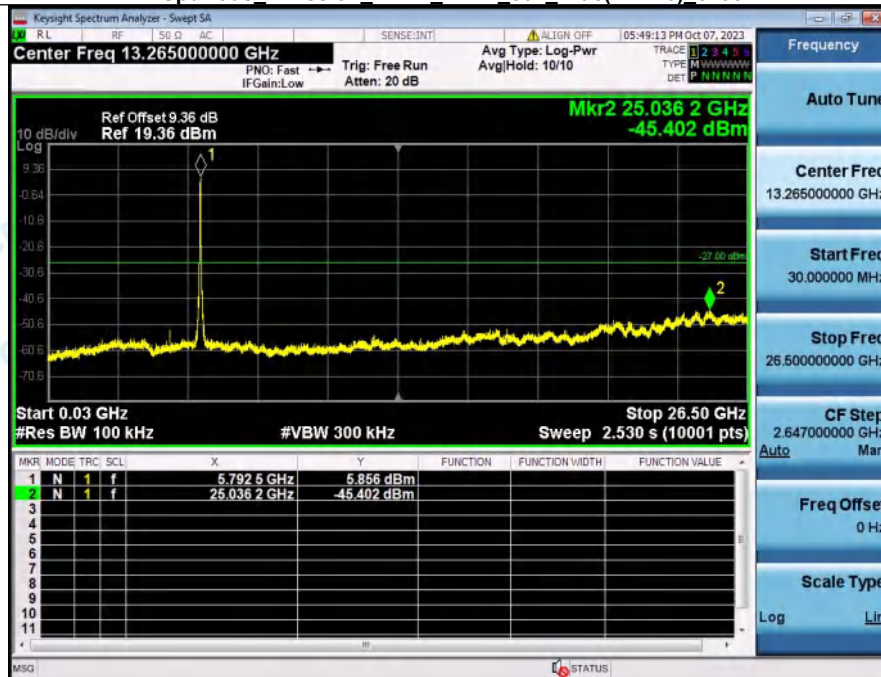

Spurious Emission NVNT_ANT1_802_11ac(VHT80)_5775

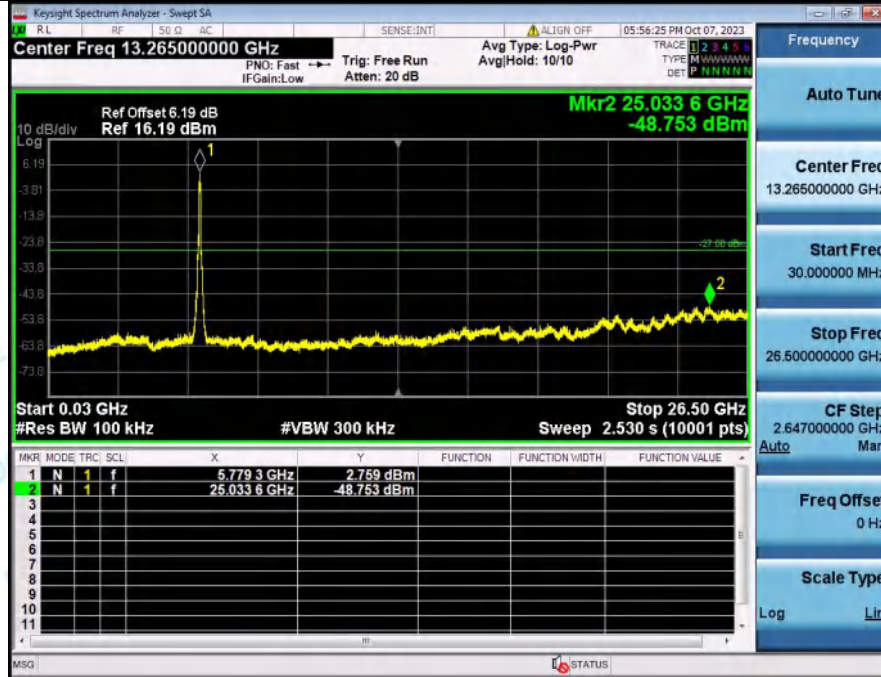


Spurious Emission NVNT_ANT2_802_11ac(VHT80)_5775

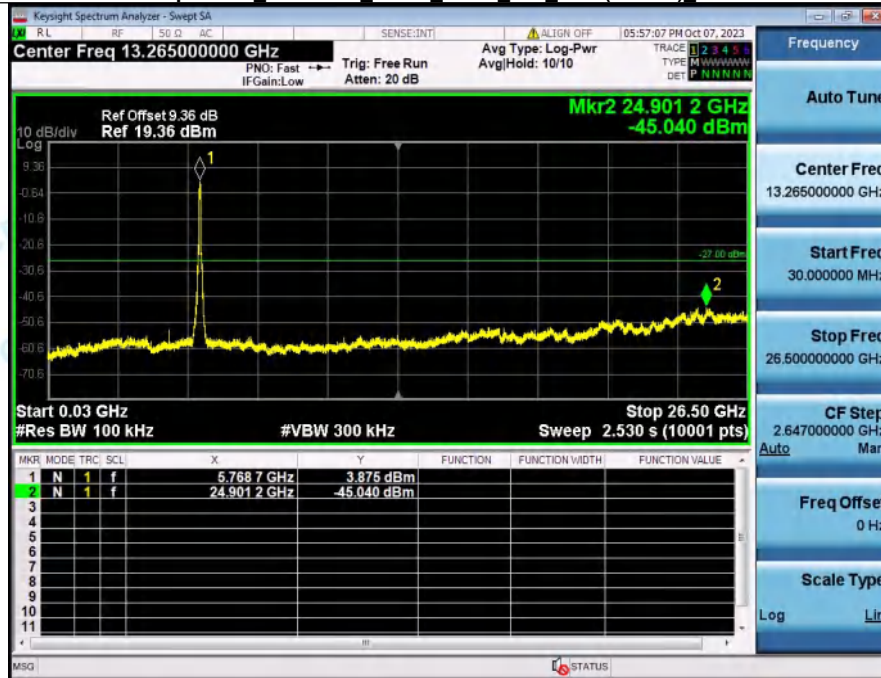


8. Frequency Stability

Condition	Antenna	Modulation	Frequency (MHz)	Fc(MHz)	Fi(MHz)	Fh(MHz)	Limit(MHz)	Result
NVNT	ANT1	802.11a	5745.00	5744.952	5732.020	5757.884	5725~5850	Pass
NVNT	ANT2	802.11a	5745.00	5745.298	5732.692	5757.904	5725~5850	Pass
NVNT	ANT1	802.11a	5785.00	5784.988	5772.028	5797.948	5725~5850	Pass
NVNT	ANT2	802.11a	5785.00	5785.244	5772.840	5797.648	5725~5850	Pass
NVNT	ANT1	802.11a	5825.00	5825.078	5816.092	5834.064	5725~5850	Pass
NVNT	ANT2	802.11a	5825.00	5825.012	5816.144	5833.880	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	5744.808	5734.552	5755.064	5725~5850	Pass
NVNT	ANT2	802.11ac(VHT20)	5745.00	5745.260	5735.056	5755.464	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	5784.944	5774.684	5795.204	5725~5850	Pass
NVNT	ANT2	802.11ac(VHT20)	5785.00	5785.242	5775.052	5795.432	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	5824.970	5815.844	5834.096	5725~5850	Pass
NVNT	ANT2	802.11ac(VHT20)	5825.00	5824.984	5815.940	5834.028	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	5753.716	5733.048	5774.384	5725~5850	Pass
NVNT	ANT2	802.11ac(VHT40)	5755.00	5755.292	5735.424	5775.160	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	5794.392	5774.416	5814.368	5725~5850	Pass
NVNT	ANT2	802.11ac(VHT40)	5795.00	5795.684	5775.504	5815.864	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	5774.778	5736.420	5813.136	5725~5850	Pass
NVNT	ANT2	802.11ac(VHT80)	5775.00	5774.982	5736.780	5813.184	5725~5850	Pass


Frequency Stability NVNT_ANT1_802_11a_5745

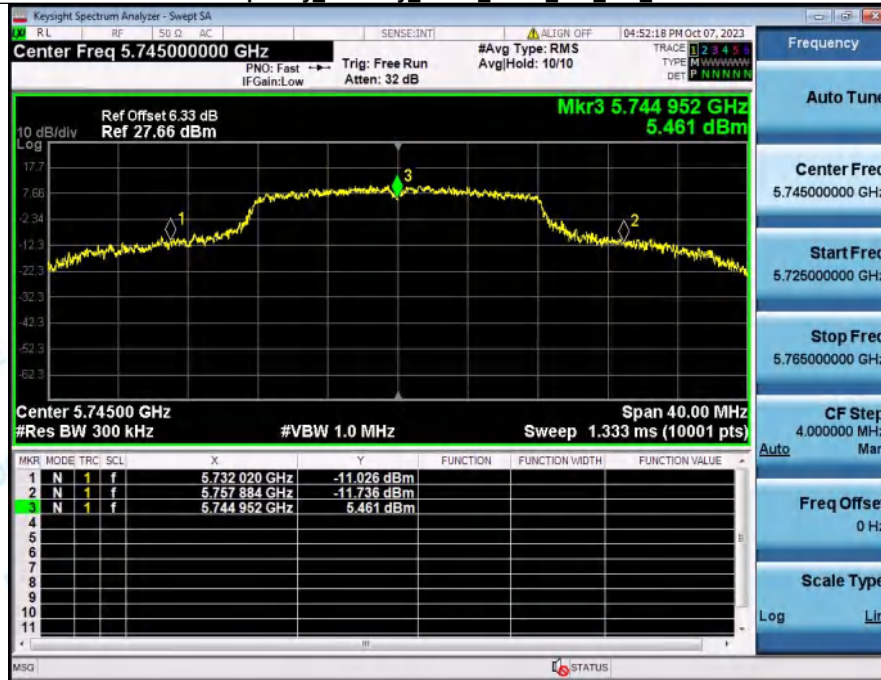


Frequency Stability NVNT_ANT2_802_11a_5745

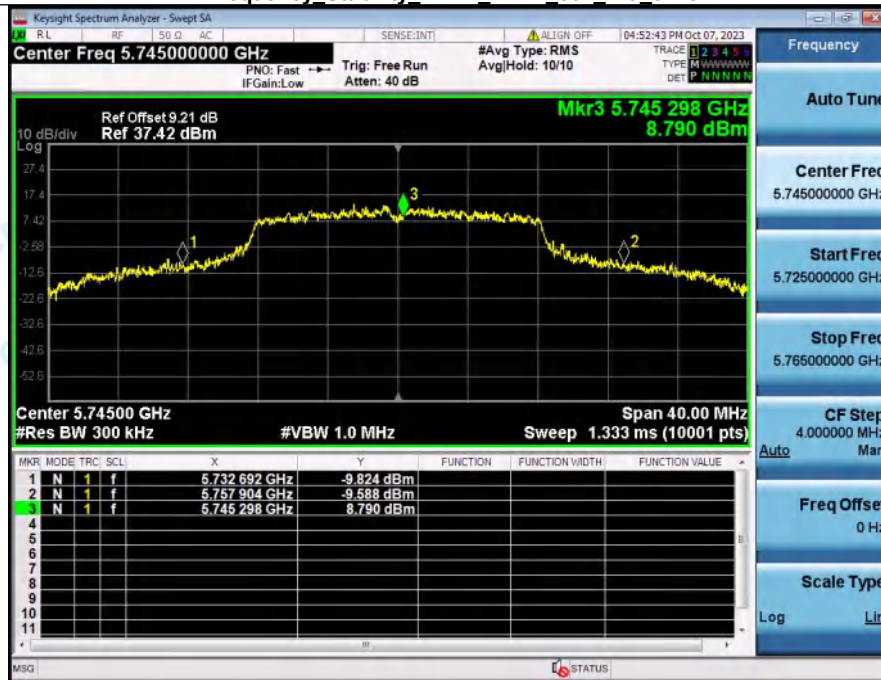


Frequency Stability NVNT_ANT1_802_11a_5785

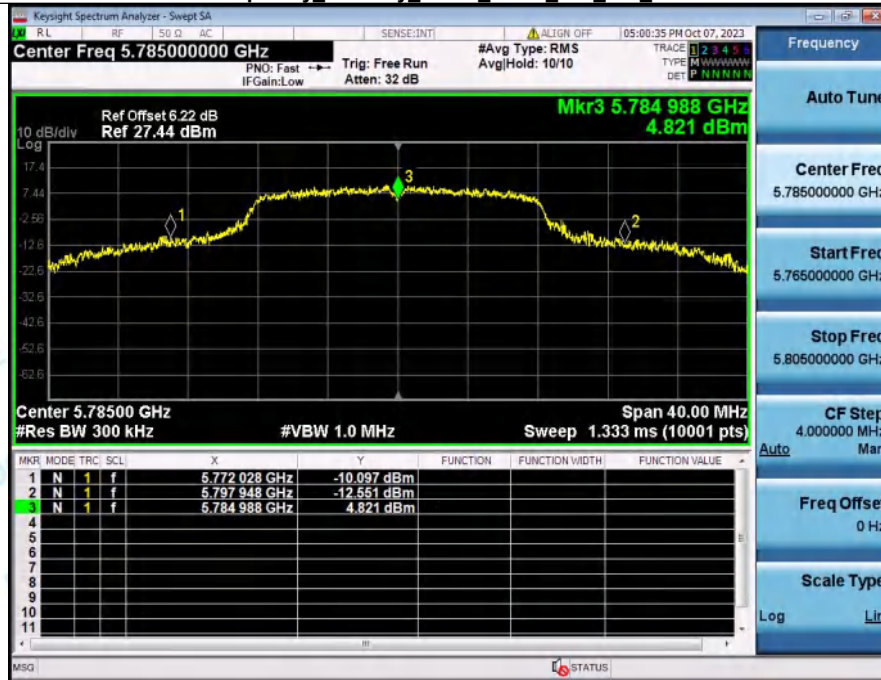


Frequency Stability NVNT_ANT2_802_11a_5785

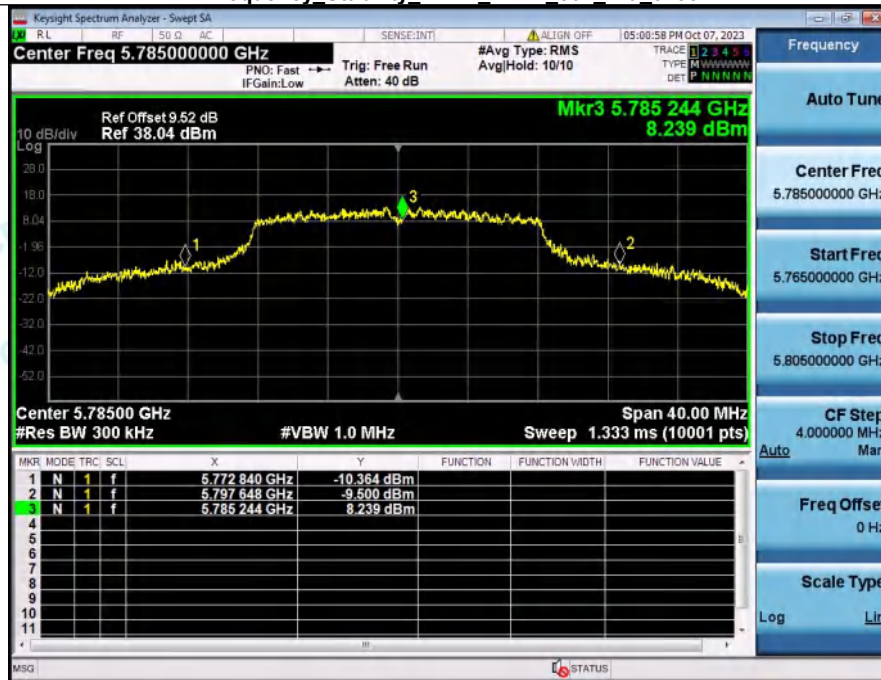


Frequency Stability NVNT_ANT1_802_11a_5825

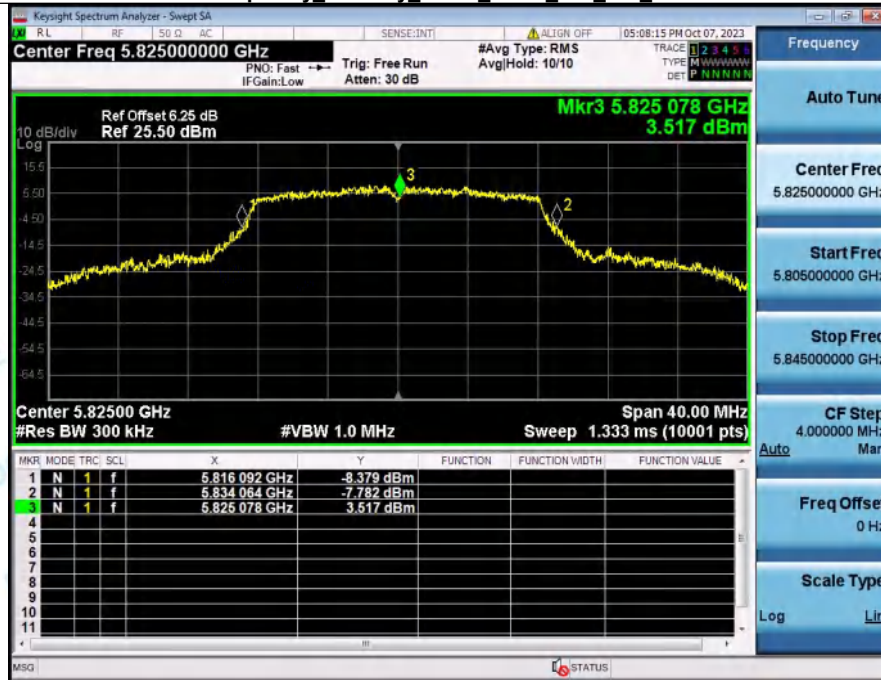


Frequency Stability NVNT_ANT2_802_11a_5825

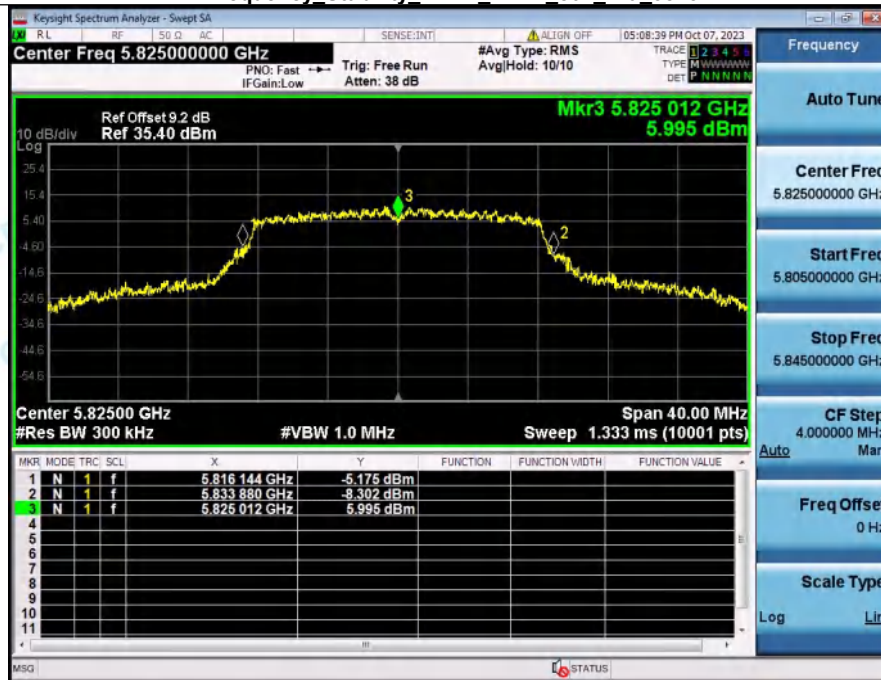


Frequency Stability NVNT_ANT1_802_11ac(VHT20)_5745

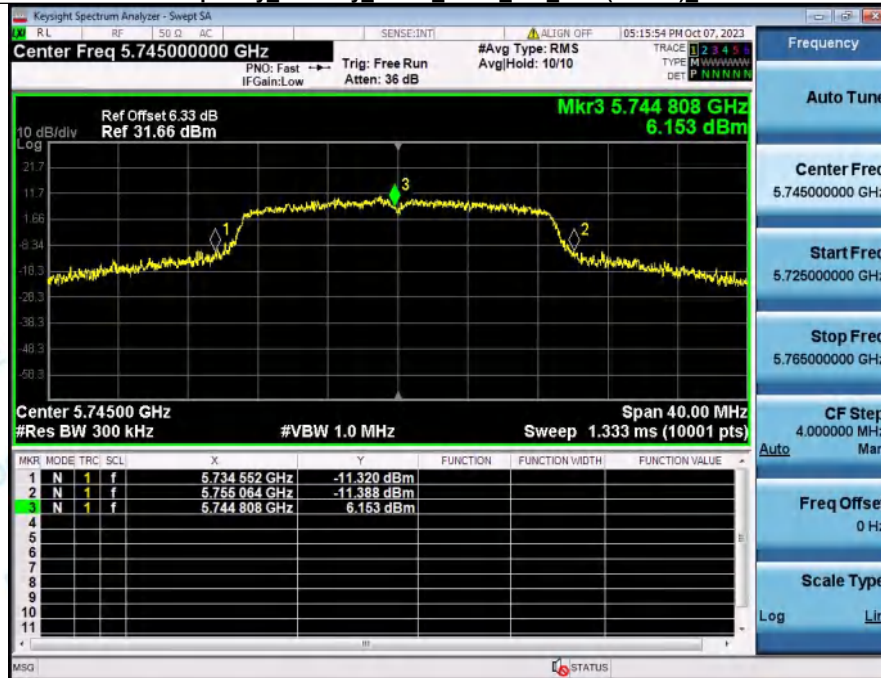


Frequency Stability NVNT_ANT2_802_11ac(VHT20)_5745

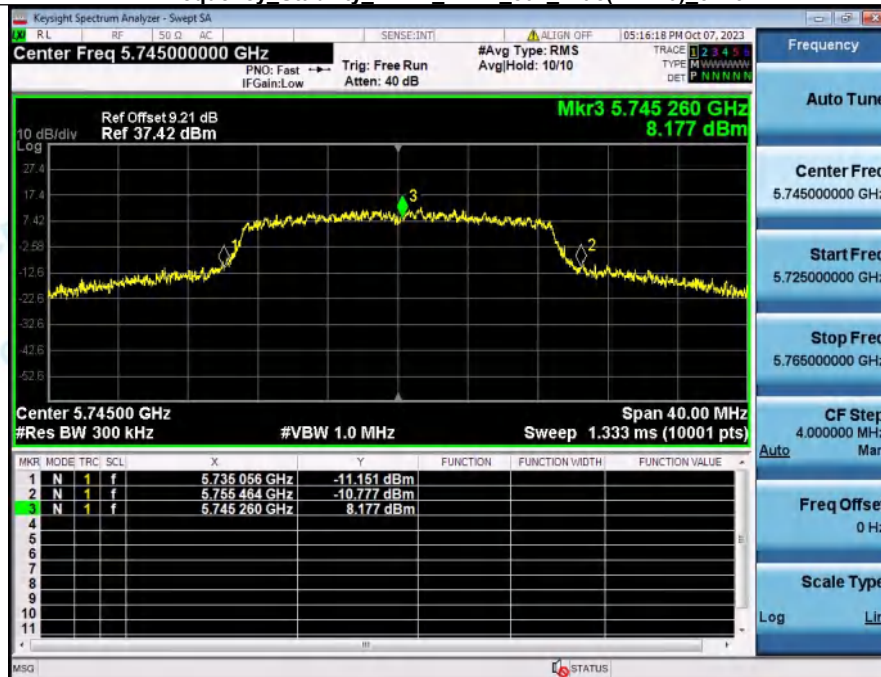


Frequency Stability NVNT_ANT1_802_11ac(VHT20)_5785

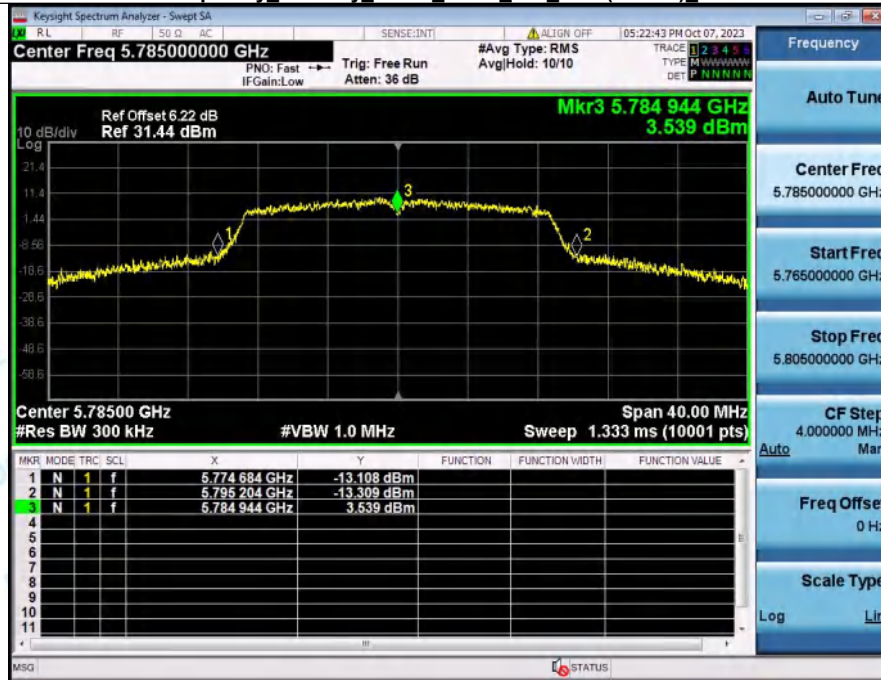


Frequency Stability NVNT_ANT2_802_11ac(VHT20)_5785

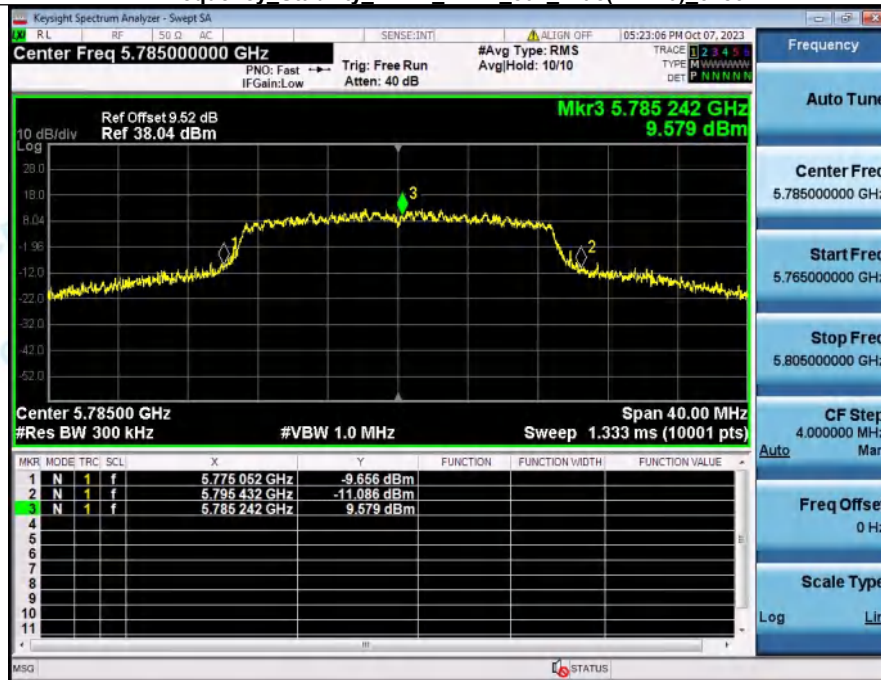


Frequency Stability NVNT_ANT1_802_11ac(VHT20)_5825

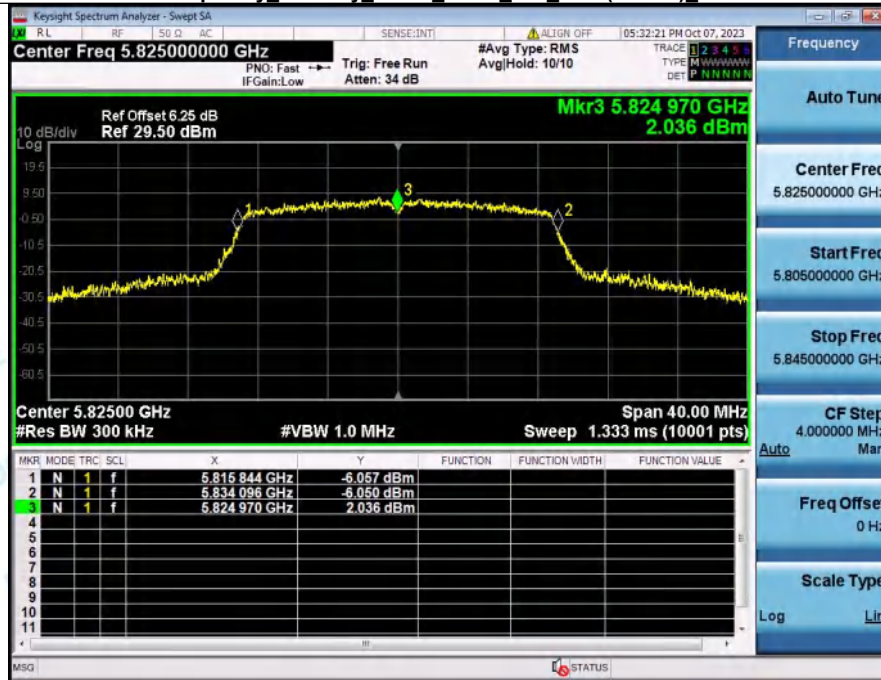


Frequency Stability NVNT_ANT2_802_11ac(VHT20)_5825

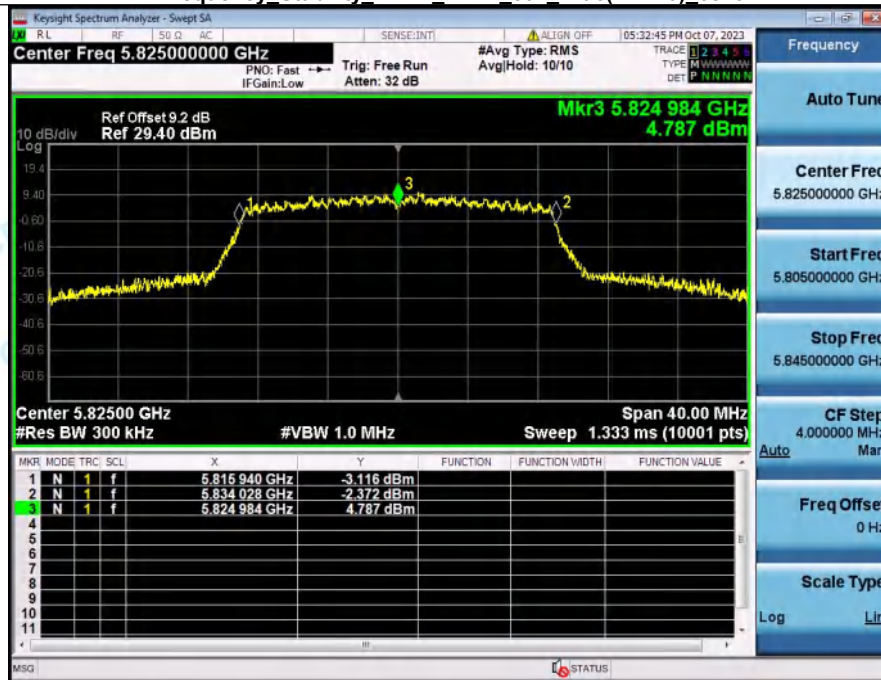


Frequency Stability NVNT_ANT1_802_11ac(VHT40)_5755

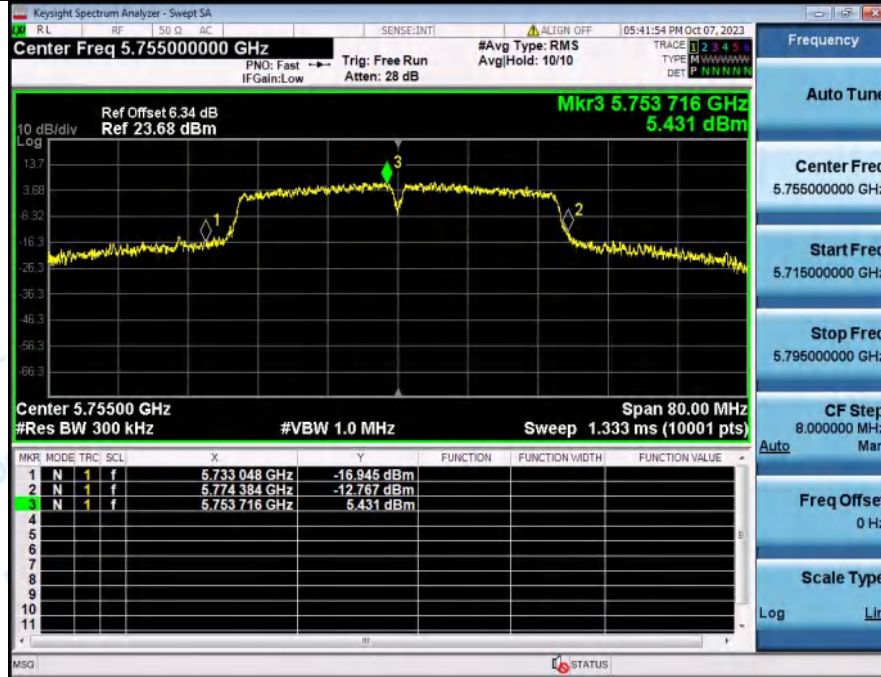


Frequency Stability NVNT_ANT2_802_11ac(VHT40)_5755

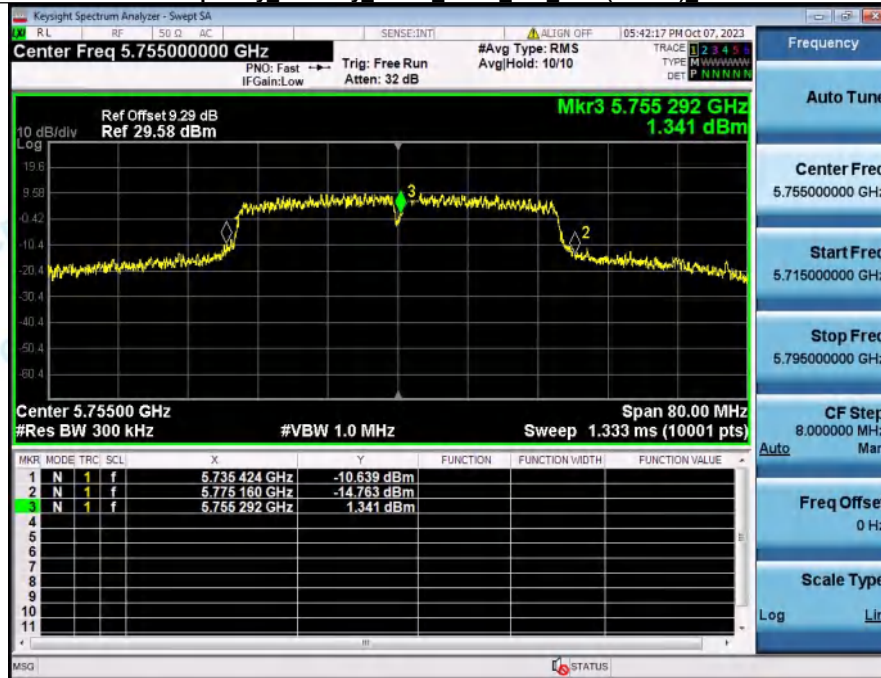


Frequency Stability NVNT_ANT1_802_11ac(VHT40)_5795

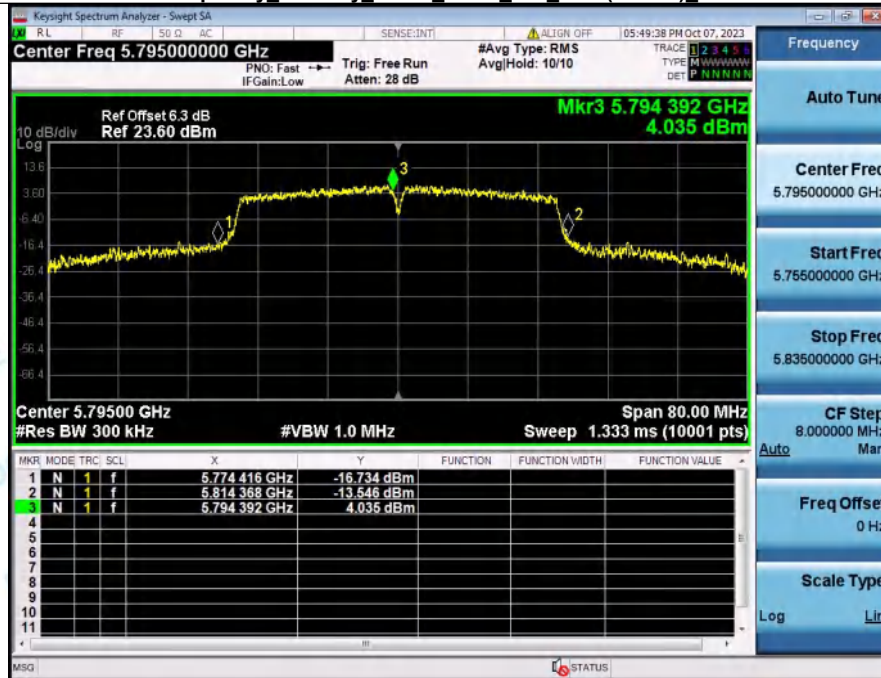


Frequency Stability NVNT_ANT2_802_11ac(VHT40)_5795

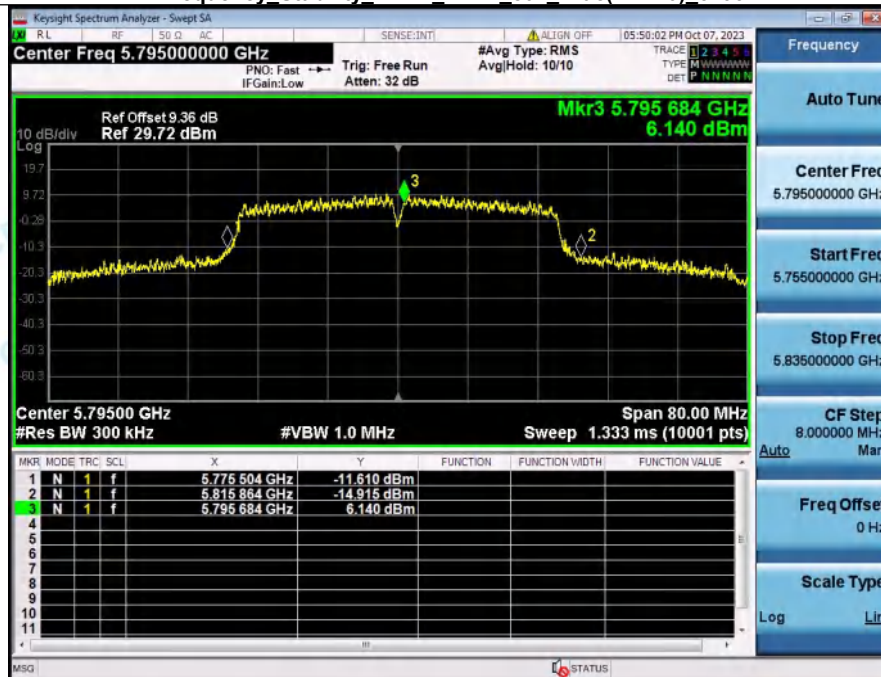

Frequency Stability NVNT_ANT1_802_11ac(VHT80)_5775

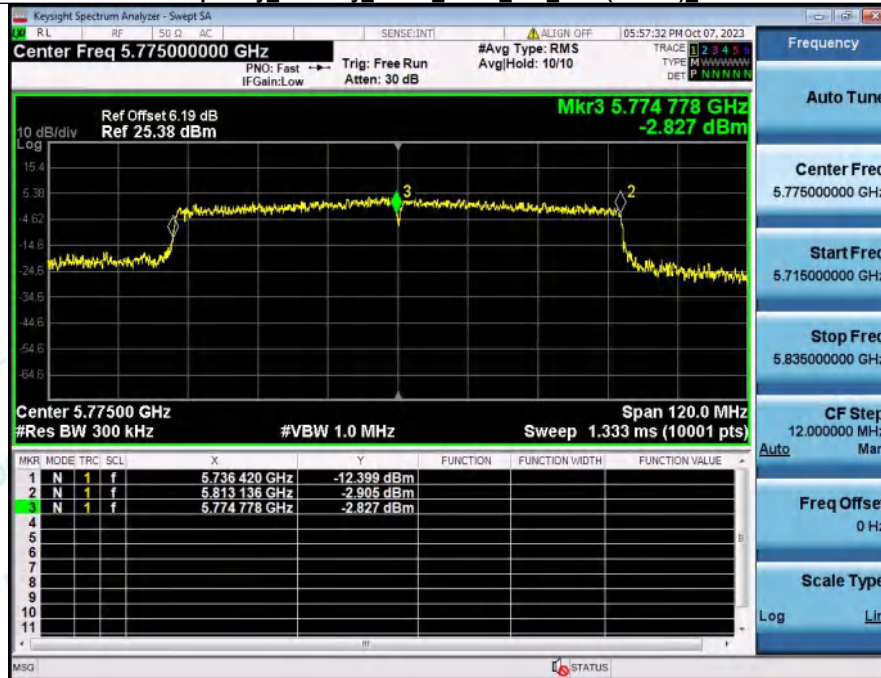

Frequency Stability NVNT_ANT2_802_11ac(VHT80)_5775

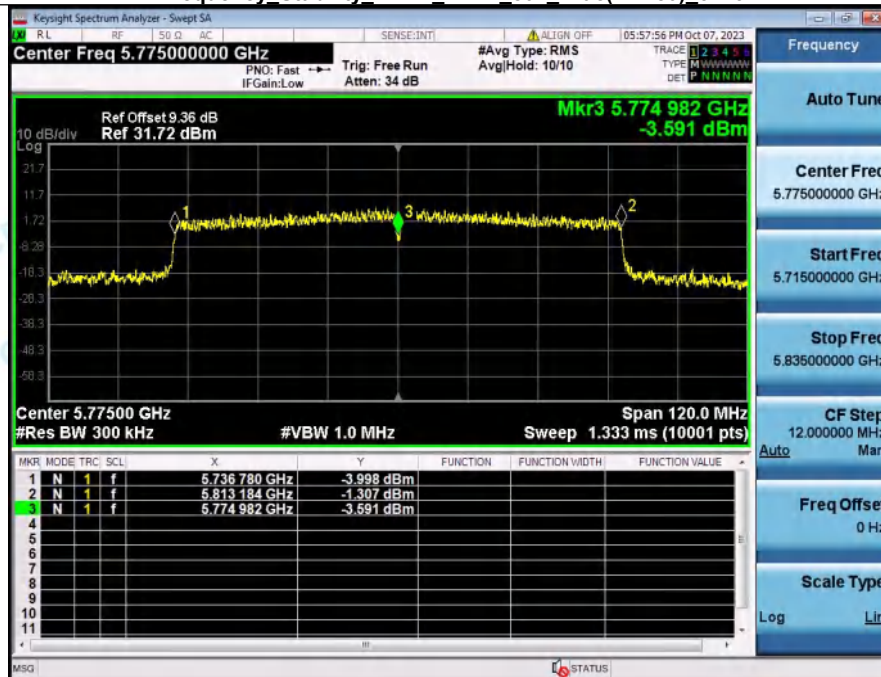

***** End of Report *****