


Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:			


Test Graph

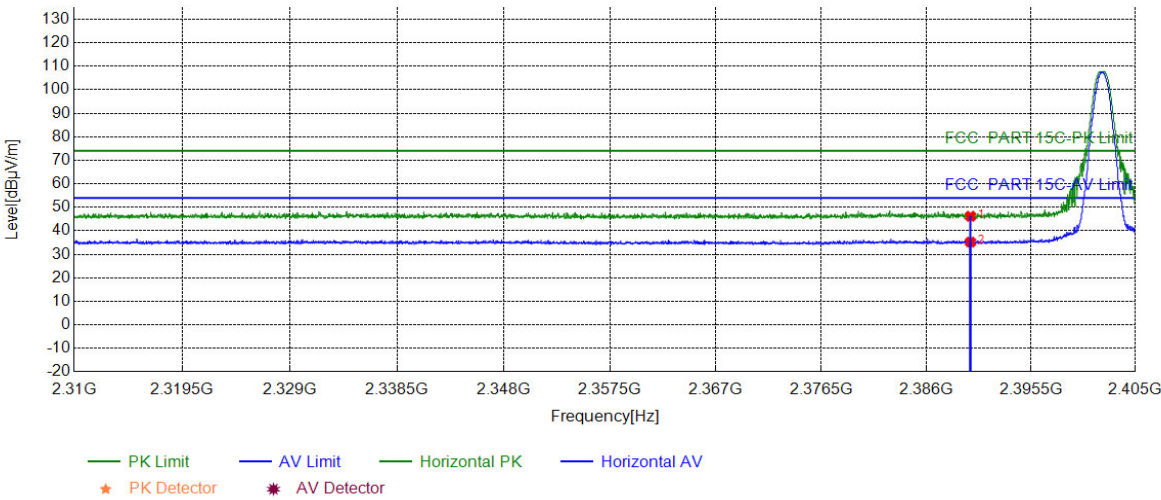

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	40.43	46.20	54.00	7.80	PASS	Horizontal	PK
2	2390.0000	5.77	29.44	35.21	54.00	18.79	PASS	Horizontal	AV

Mode:	GFSK Transmitting	Channel:	2402
Remark:			


Test Graph

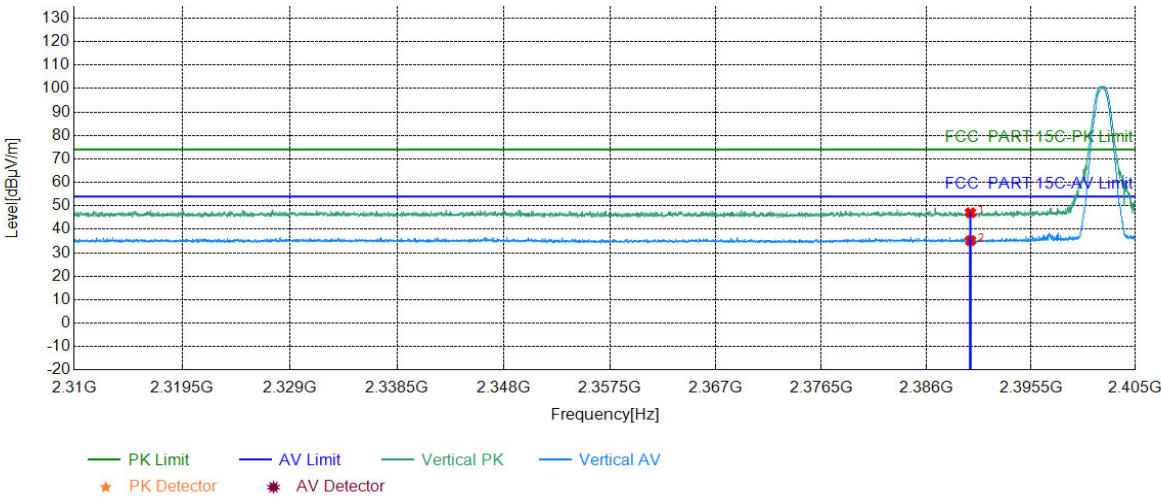

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	41.29	47.06	54.00	6.94	PASS	Vertical	PK
2	2390.0000	5.77	29.41	35.18	54.00	18.82	PASS	Vertical	AV

Mode:	GFSK Transmitting	Channel:	2480
Remark:			


Test Graph

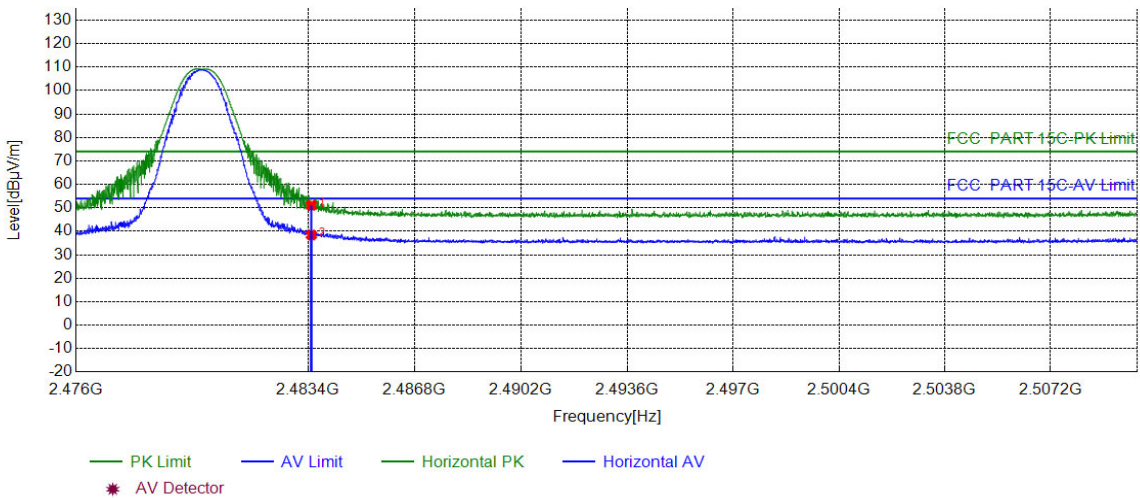

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	44.51	51.08	54.00	2.92	PASS	Horizontal	PK
2	2483.5000	6.57	31.87	38.44	54.00	15.56	PASS	Horizontal	AV

Mode:	GFSK Transmitting	Channel:	2480
Remark:			


Test Graph

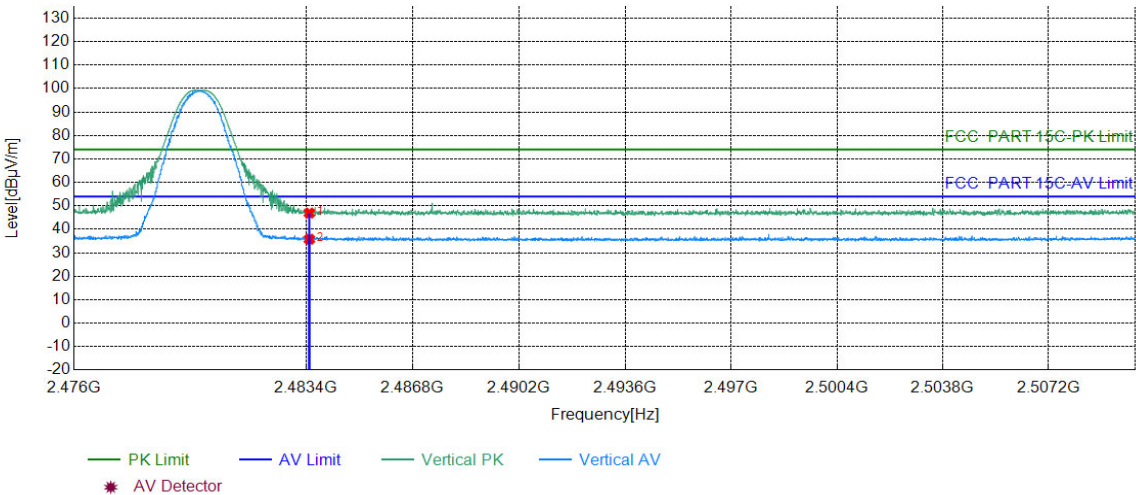

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	40.38	46.95	54.00	7.05	PASS	Vertical	PK
2	2483.5000	6.57	29.22	35.79	54.00	18.21	PASS	Vertical	AV

Mode:	π /4DQPSK Transmitting	Channel:	2402
Remark:			


Test Graph

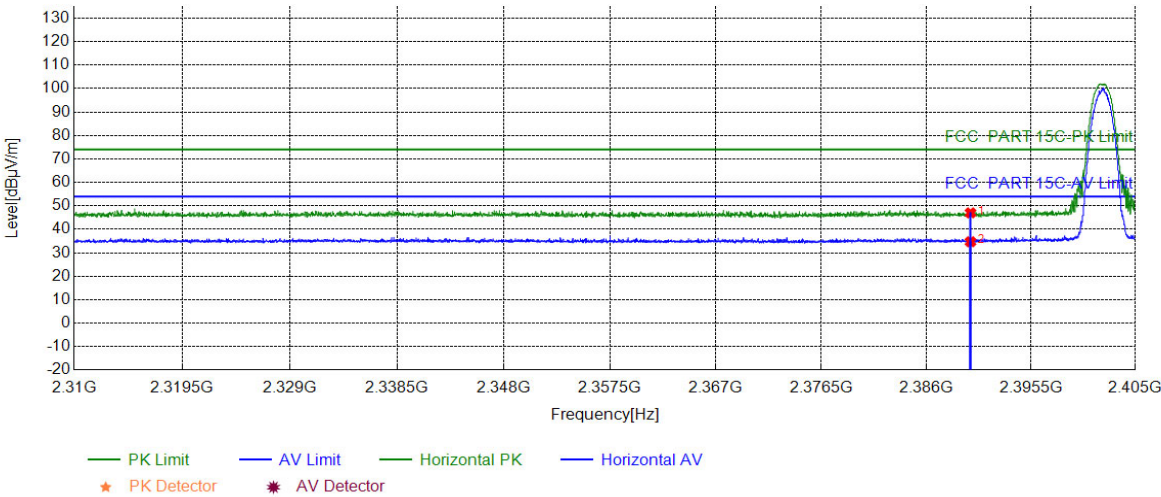

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	41.25	47.02	54.00	6.98	PASS	Horizontal	PK
2	2390.0000	5.77	28.94	34.71	54.00	19.29	PASS	Horizontal	AV

Mode:	π /4DQPSK Transmitting	Channel:	2402
Remark:			


Test Graph

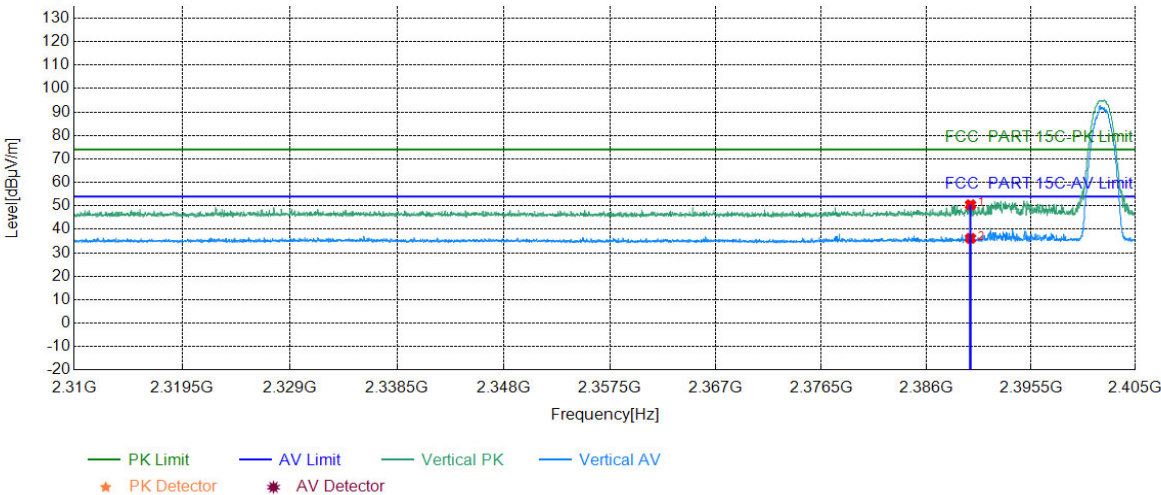

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	44.66	50.43	54.00	3.57	PASS	Vertical	PK
2	2390.0000	5.77	30.37	36.14	54.00	17.86	PASS	Vertical	AV

Mode:	π /4DQPSK Transmitting	Channel:	2480
Remark:			


Test Graph

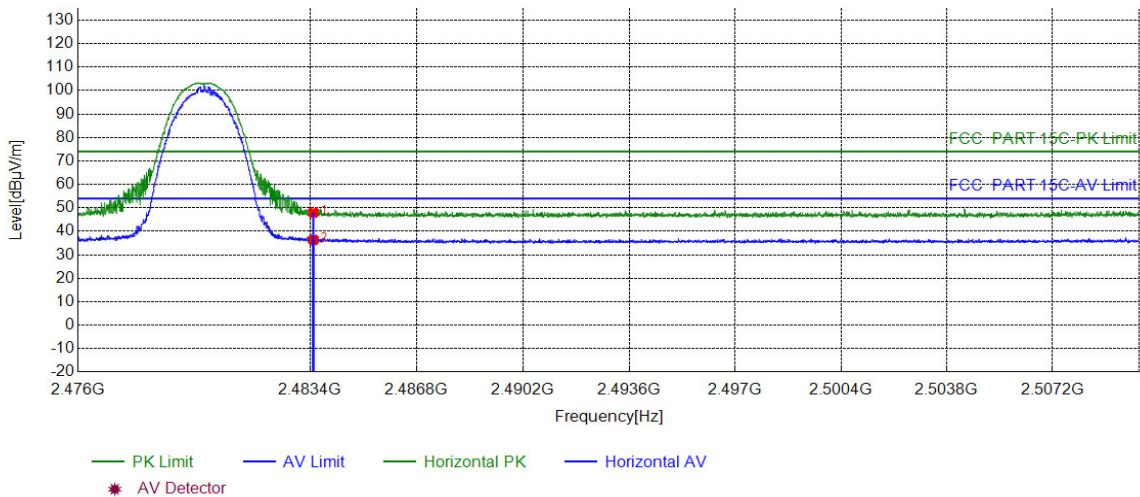

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	41.43	48.00	54.00	6.00	PASS	Horizontal	PK
2	2483.5000	6.57	29.77	36.34	54.00	17.66	PASS	Horizontal	AV

Mode:	π /4DQPSK Transmitting	Channel:	2480
Remark:			


Test Graph

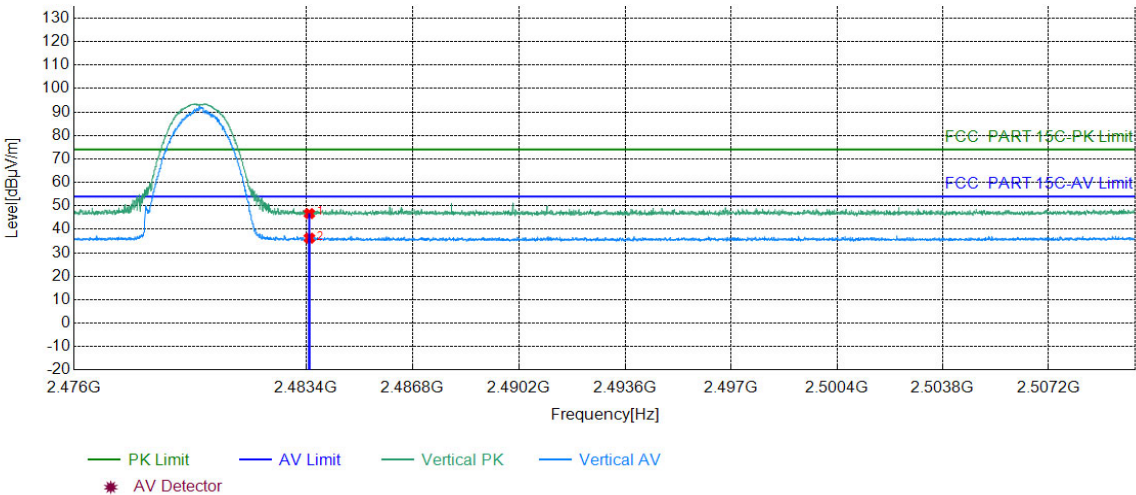

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	40.14	46.71	54.00	7.29	PASS	Vertical	PK
2	2483.5000	6.57	29.66	36.23	54.00	17.77	PASS	Vertical	AV

Mode:	8DPSK Transmitting	Channel:	2402
Remark:			


Test Graph

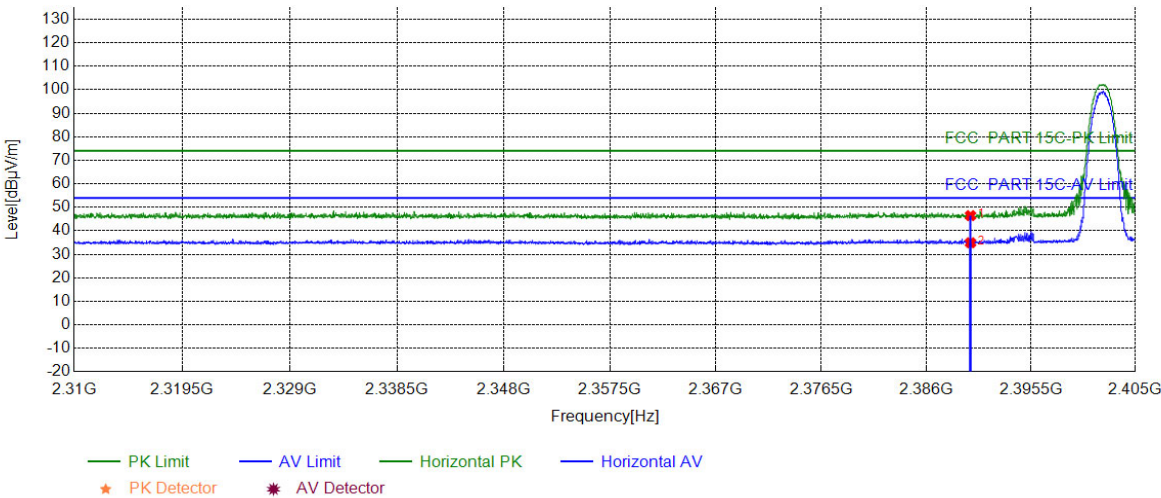

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	40.69	46.46	54.00	7.54	PASS	Horizontal	PK
2	2390.0000	5.77	29.14	34.91	54.00	19.09	PASS	Horizontal	AV

Mode:	8DPSK Transmitting	Channel:	2402
Remark:			


Test Graph

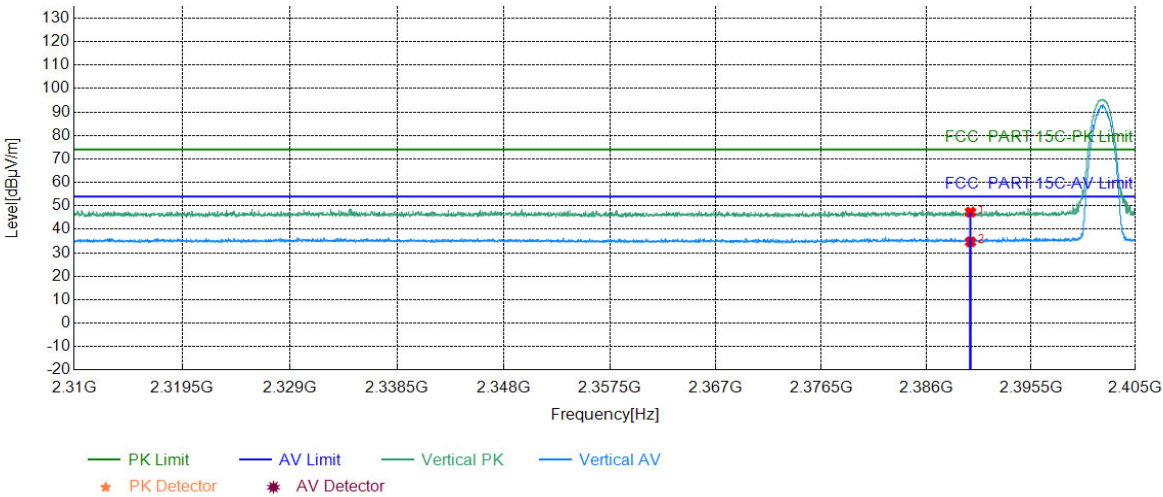

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	41.56	47.33	54.00	6.67	PASS	Vertical	PK
2	2390.0000	5.77	28.92	34.69	54.00	19.31	PASS	Vertical	AV

Mode:	8DPSK Transmitting	Channel:	2480
Remark:			


Test Graph

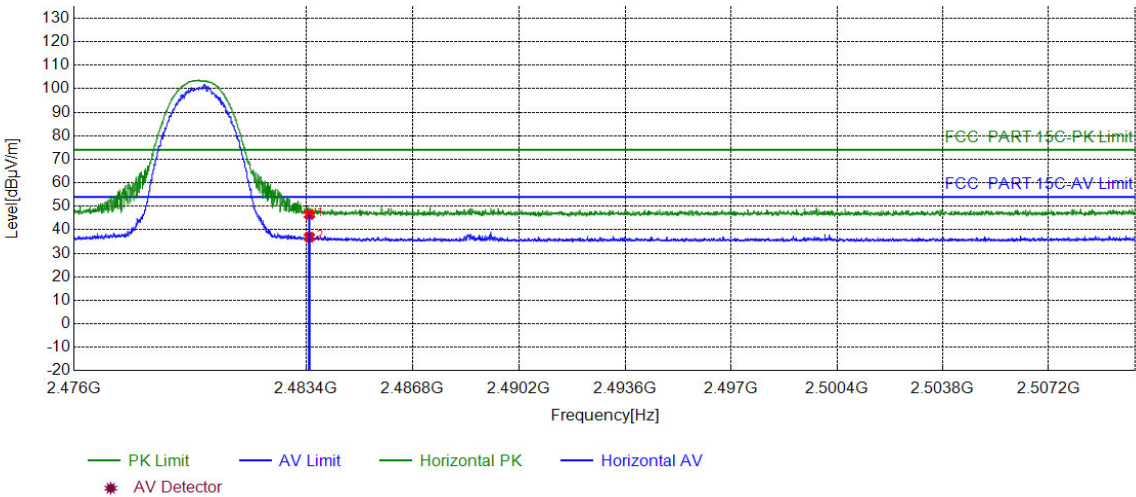

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	39.96	46.53	54.00	7.47	PASS	Horizontal	PK
2	2483.5000	6.57	30.32	36.89	54.00	17.11	PASS	Horizontal	AV

Mode:	8DPSK Transmitting	Channel:	2480
Remark:			

Test Graph

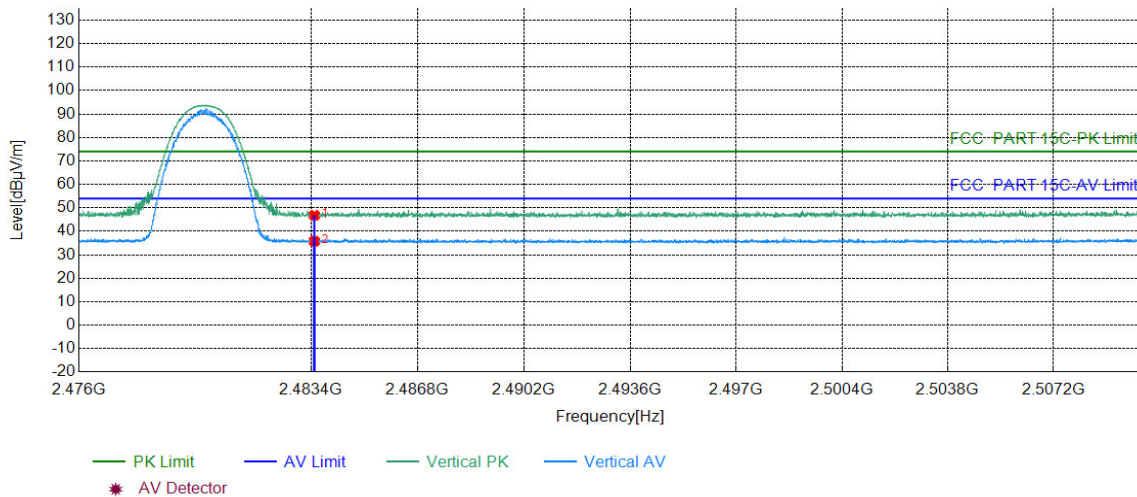

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	40.27	46.84	54.00	7.16	PASS	Vertical	PK
2	2483.5000	6.57	29.22	35.79	54.00	18.21	PASS	Vertical	AV

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix L) Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Test Procedure:	Peak	1MHz	10Hz	Average	
	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). - Test the EUT in the lowest channel ,the middle channel ,the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Radiated Spurious Emissions test Data:

During the test, the Radiated Spurious Emissions from 30MHz to 1GHz was performed in all modes with all channels, 8DPSK, Channel 2480MHz was selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Radiated Emission below 1GHz

Mode:			8DPSK Transmitting			Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	34.0744	-19.64	47.89	28.25	40.00	11.75	Pass	H	PK
2	64.8265	-19.60	46.99	27.39	40.00	12.61	Pass	H	PK
3	173.1863	-20.25	47.57	27.32	43.50	16.18	Pass	H	PK
4	263.9874	-16.27	54.25	37.98	46.00	8.02	Pass	H	PK
5	545.1215	-9.92	35.05	25.13	46.00	20.87	Pass	H	PK
6	909.8780	-4.90	36.84	31.94	46.00	14.06	Pass	H	PK
7	31.2611	-19.74	50.59	30.85	40.00	9.15	Pass	V	PK
8	65.2145	-19.69	46.67	26.98	40.00	13.02	Pass	V	PK
9	120.0250	-20.08	45.78	25.70	43.50	17.80	Pass	V	PK
10	263.9874	-16.27	48.40	32.13	46.00	13.87	Pass	V	PK
11	553.7554	-9.72	36.72	27.00	46.00	19.00	Pass	V	PK
12	898.7219	-4.99	35.93	30.94	46.00	15.06	Pass	V	PK

Transmitter Emission above 1GHz

Mode:			GFSK Transmitting			Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1284.8285	1.02	43.99	45.01	74.00	28.99	Pass	H	PK
2	3400.0267	-20.20	59.23	39.03	74.00	34.97	Pass	H	PK
3	5006.1337	-15.81	57.81	42.00	74.00	32.00	Pass	H	PK
4	7068.2712	-11.66	55.29	43.63	74.00	30.37	Pass	H	PK
5	9608.4406	-7.37	65.01	57.64	74.00	16.36	Pass	H	PK
6	9608.4406	-7.37	53.64	46.27	54.00	7.73	Pass	H	AV
7	12009.600	-5.31	56.47	51.16	74.00	22.84	Pass	H	PK
8	1219.8220	0.85	43.39	44.24	74.00	29.76	Pass	V	PK
9	1676.8677	2.79	42.06	44.85	74.00	29.15	Pass	V	PK
10	3996.0664	-18.90	64.51	45.61	74.00	28.39	Pass	V	PK
11	6000.2000	-12.96	61.67	48.71	74.00	25.29	Pass	V	PK
12	9607.4405	-7.37	66.80	59.43	74.00	14.57	Pass	V	PK
13	9609.4406	-7.37	58.28	50.91	54.00	3.09	Pass	V	AV
14	12010.600	-5.31	57.58	52.27	74.00	21.73	Pass	V	PK

Mode:			GFSK Transmitting			Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1073.8074	0.88	47.12	48.00	74.00	26.00	Pass	H	PK
2	1943.8944	4.26	42.59	46.85	74.00	27.15	Pass	H	PK
3	5014.1343	-15.80	57.07	41.27	74.00	32.73	Pass	H	PK
4	5992.1995	-13.01	56.51	43.50	74.00	30.50	Pass	H	PK
5	9764.4510	-7.50	66.77	59.27	74.00	14.73	Pass	H	PK
6	9765.4510	-7.49	57.54	50.05	54.00	3.95	Pass	H	AV
7	12205.613	-5.15	55.10	49.95	74.00	24.05	Pass	H	PK
8	1219.8220	0.85	43.39	44.24	74.00	29.76	Pass	V	PK
9	1660.8661	2.69	42.01	44.70	74.00	29.30	Pass	V	PK
10	3987.0658	-18.92	59.85	40.93	74.00	33.07	Pass	V	PK
11	5320.1547	-14.76	61.27	46.51	74.00	27.49	Pass	V	PK
12	6638.2426	-12.70	62.79	50.09	74.00	23.91	Pass	V	PK
13	9764.4510	-7.50	65.71	58.21	74.00	15.79	Pass	V	PK
14	9765.4510	-7.49	56.64	49.15	54.00	4.85	Pass	V	AV

Mode:			GFSK Transmitting			Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1321.0321	1.13	43.69	44.82	74.00	29.18	Pass	H	PK
2	1977.8978	4.44	42.04	46.48	74.00	27.52	Pass	H	PK
3	3427.0285	-20.15	58.40	38.25	74.00	35.75	Pass	H	PK
4	5879.1919	-13.60	62.95	49.35	74.00	24.65	Pass	H	PK
5	9920.4614	-7.10	63.04	55.94	74.00	18.06	Pass	H	PK
6	9921.4614	-7.10	55.09	47.99	54.00	6.01	Pass	H	PK
7	14399.760	1.22	48.44	49.66	74.00	24.34	Pass	H	PK
8	1332.2332	1.17	45.29	46.46	74.00	27.54	Pass	V	PK
9	2074.3074	4.80	42.48	47.28	74.00	26.72	Pass	V	PK
10	3999.0666	-18.89	64.01	45.12	74.00	28.88	Pass	V	PK
11	5313.1542	-14.77	60.70	45.93	74.00	28.07	Pass	V	PK
12	9920.4614	-7.10	62.12	55.02	74.00	18.98	Pass	V	PK
13	9921.4614	-7.10	53.96	46.86	54.00	7.14	Pass	V	AV
14	13106.673	-3.64	51.66	48.02	74.00	25.98	Pass	V	PK

Mode:			π/4DQPSK Transmitting			Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1079.4079	0.87	46.45	47.32	74.00	26.68	Pass	H	PK
2	2087.3087	4.84	42.09	46.93	74.00	27.07	Pass	H	PK
3	3507.0338	-20.04	58.08	38.04	74.00	35.96	Pass	H	PK
4	5030.1353	-15.78	57.45	41.67	74.00	32.33	Pass	H	PK
5	9608.4406	-7.37	61.73	54.36	74.00	19.64	Pass	H	PK
6	14306.753	-0.33	49.42	49.09	74.00	24.91	Pass	H	PK
7	1063.8064	0.89	49.17	50.06	74.00	23.94	Pass	V	PK
8	2017.5018	4.61	41.98	46.59	74.00	27.41	Pass	V	PK
9	3993.0662	-18.90	61.83	42.93	74.00	31.07	Pass	V	PK
10	6652.2435	-12.65	59.61	46.96	74.00	27.04	Pass	V	PK
11	9608.4406	-7.37	61.44	54.07	74.00	19.93	Pass	V	PK
12	17394.959	2.54	56.69	59.23	74.00	14.77	Pass	V	PK
13	17396.959	2.51	40.33	42.84	54.00	11.16	Pass	V	AV

Mode:			$\pi/4$ DQPSK Transmitting			Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1080.8081	0.87	44.82	45.69	74.00	28.31	Pass	H	PK
2	1854.4854	3.69	41.94	45.63	74.00	28.37	Pass	H	PK
3	3522.0348	-20.10	57.66	37.56	74.00	36.44	Pass	H	PK
4	4993.1329	-15.85	57.67	41.82	74.00	32.18	Pass	H	PK
5	9764.4510	-7.50	60.32	52.82	74.00	21.18	Pass	H	PK
6	13942.729	-1.72	50.44	48.72	74.00	25.28	Pass	H	PK
7	1063.6064	0.89	48.90	49.79	74.00	24.21	Pass	V	PK
8	1734.8735	3.06	42.17	45.23	74.00	28.77	Pass	V	PK
9	3933.0622	-19.03	58.96	39.93	74.00	34.07	Pass	V	PK
10	6000.2000	-12.96	61.42	48.46	74.00	25.54	Pass	V	PK
11	9764.4510	-7.50	63.19	55.69	74.00	18.31	Pass	V	PK
12	9765.4510	-7.49	55.43	47.94	54.00	6.06	Pass	V	AV
13	13713.714	-1.75	50.15	48.40	74.00	25.60	Pass	V	PK

Mode:			$\pi/4$ DQPSK Transmitting			Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1054.4054	0.90	45.10	46.00	74.00	28.00	Pass	H	PK
2	1938.6939	4.23	42.38	46.61	74.00	27.39	Pass	H	PK
3	3330.0220	-19.92	57.85	37.93	74.00	36.07	Pass	H	PK
4	5029.1353	-15.78	56.87	41.09	74.00	32.91	Pass	H	PK
5	9919.4613	-7.10	62.31	55.21	74.00	18.79	Pass	H	PK
6	9921.4614	-7.10	54.01	46.91	54.00	7.09	Pass	H	AV
7	14403.760	1.17	49.24	50.41	74.00	23.59	Pass	H	PK
8	1064.8065	0.89	47.08	47.97	74.00	26.03	Pass	V	PK
9	2077.3077	4.81	42.71	47.52	74.00	26.48	Pass	V	PK
10	3331.0221	-19.92	61.60	41.68	74.00	32.32	Pass	V	PK
11	5312.1541	-14.78	60.21	45.43	74.00	28.57	Pass	V	PK
12	9920.4614	-7.10	63.05	55.95	74.00	18.05	Pass	V	PK
13	9921.4614	-7.10	54.43	47.33	54.00	6.67	Pass	V	AV
14	13668.711	-1.73	50.80	49.07	74.00	24.93	Pass	V	PK

Mode:			8DPSK Transmitting			Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1079.6080	0.87	45.37	46.24	74.00	28.00	Pass	H	PK
2	2069.1069	4.78	41.91	46.69	74.00	27.39	Pass	H	PK
3	3412.0275	-20.18	58.76	38.58	74.00	36.07	Pass	H	PK
4	4995.1330	-15.84	57.74	41.90	74.00	32.91	Pass	H	PK
5	9608.4406	-7.37	59.68	52.31	74.00	18.79	Pass	H	PK
6	14361.757	0.59	49.50	50.09	74.00	7.09	Pass	H	PK
7	1064.8065	0.89	48.04	48.93	74.00	25.07	Pass	V	PK
8	1977.0977	4.43	42.58	47.01	74.00	26.99	Pass	V	PK
9	3985.0657	-18.92	61.70	42.78	74.00	31.22	Pass	V	PK
10	6638.2426	-12.70	58.37	45.67	74.00	28.33	Pass	V	PK
11	9608.4406	-7.37	62.30	54.93	74.00	19.07	Pass	V	PK
12	9609.4406	-7.37	54.31	46.94	54.00	7.06	Pass	V	AV
13	15179.812	1.81	49.04	50.85	74.00	23.15	Pass	V	PK

Mode:			8DPSK Transmitting			Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1054.0054	0.90	45.03	45.93	74.00	28.07	Pass	H	PK
2	1928.6929	4.18	41.71	45.89	74.00	28.11	Pass	H	PK
3	3503.0335	-20.03	58.87	38.84	74.00	35.16	Pass	H	PK
4	5004.1336	-15.81	58.23	42.42	74.00	31.58	Pass	H	PK
5	9764.4510	-7.50	64.74	57.24	74.00	16.76	Pass	H	PK
6	9765.4510	-7.49	56.85	49.36	54.00	4.64	Pass	H	AV
7	15471.831	0.34	50.06	50.40	74.00	23.60	Pass	H	PK
8	1332.0332	1.17	45.78	46.95	74.00	27.05	Pass	V	PK
9	2052.7053	4.72	42.43	47.15	74.00	26.85	Pass	V	PK
10	4497.0998	-16.95	57.47	40.52	74.00	33.48	Pass	V	PK
11	6000.2000	-12.96	61.78	48.82	74.00	25.18	Pass	V	PK
12	9764.4510	-7.50	63.61	56.11	74.00	17.89	Pass	V	PK
13	9765.4510	-7.49	55.22	47.73	54.00	6.27	Pass	V	AV
14	14396.759	1.17	49.49	50.66	74.00	23.34	Pass	V	PK

Mode:			8DPSK Transmitting			Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1074.4074	0.88	45.83	46.71	74.00	27.29	Pass	H	PK
2	1988.2988	4.49	42.56	47.05	74.00	26.95	Pass	H	PK
3	3351.0234	-20.00	59.36	39.36	74.00	34.64	Pass	H	PK
4	5021.1347	-15.79	57.57	41.78	74.00	32.22	Pass	H	PK
5	9920.4614	-7.10	62.52	55.42	74.00	18.58	Pass	H	PK
6	13883.725	-1.91	50.85	48.94	74.00	25.06	Pass	H	PK
7	1063.2063	0.89	46.41	47.30	74.00	26.70	Pass	V	PK
8	2051.9052	4.72	42.79	47.51	74.00	26.49	Pass	V	PK
9	3982.0655	-18.93	60.22	41.29	74.00	32.71	Pass	V	PK
10	6639.2426	-12.69	59.37	46.68	74.00	27.32	Pass	V	PK
11	9920.4614	-7.10	62.27	55.17	74.00	18.83	Pass	V	PK
12	13440.696	-2.79	51.07	48.28	74.00	25.72	Pass	V	PK

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.