



14. Place the two plastic terminal covers over the connection points.

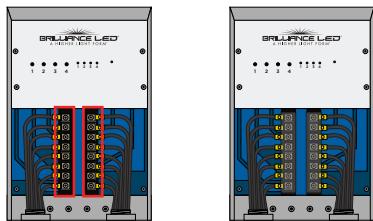

15. Close the Sector Selector cover using the latches on the side.



Assembly complete.

PROGRAMMING INSTRUCTIONS

NOTE: The Brilliance Sector Selector is designed to be powered by a Low Voltage Landscape Lighting Transformer. The transformer must be powered on 24/7 for the Sector Selector to operate.

To provide power to the Sector Selector, power from the transformer must be supplied to Input #1. This unit will draw 5W on the transformer.

1. Download the Brilliance Smart App from Apple App Store or Google Play. Register for an account for a first time user.



2. Enable Wi-Fi on a 2.4GHz network, make sure Bluetooth is turned on.
3. Turn on the power to the transformer, the blue indicator light will start blinking rapidly.
4. Open the Brilliance Smart App.
5. Press the add button in the upper right corner.
6. Tap Go to add.
7. Enter your Wi-Fi password and press next.
8. The Sector Selector will start to populate and will be added to your devices list

Instructions complete.



brillianceled.com | 800.867.2108
7202 E Cave Creek Rd, Suite 3A
PO Box 2281 Carefree, AZ 85377