



Appendix A. Test Result of AC Power Line Conducted Emission

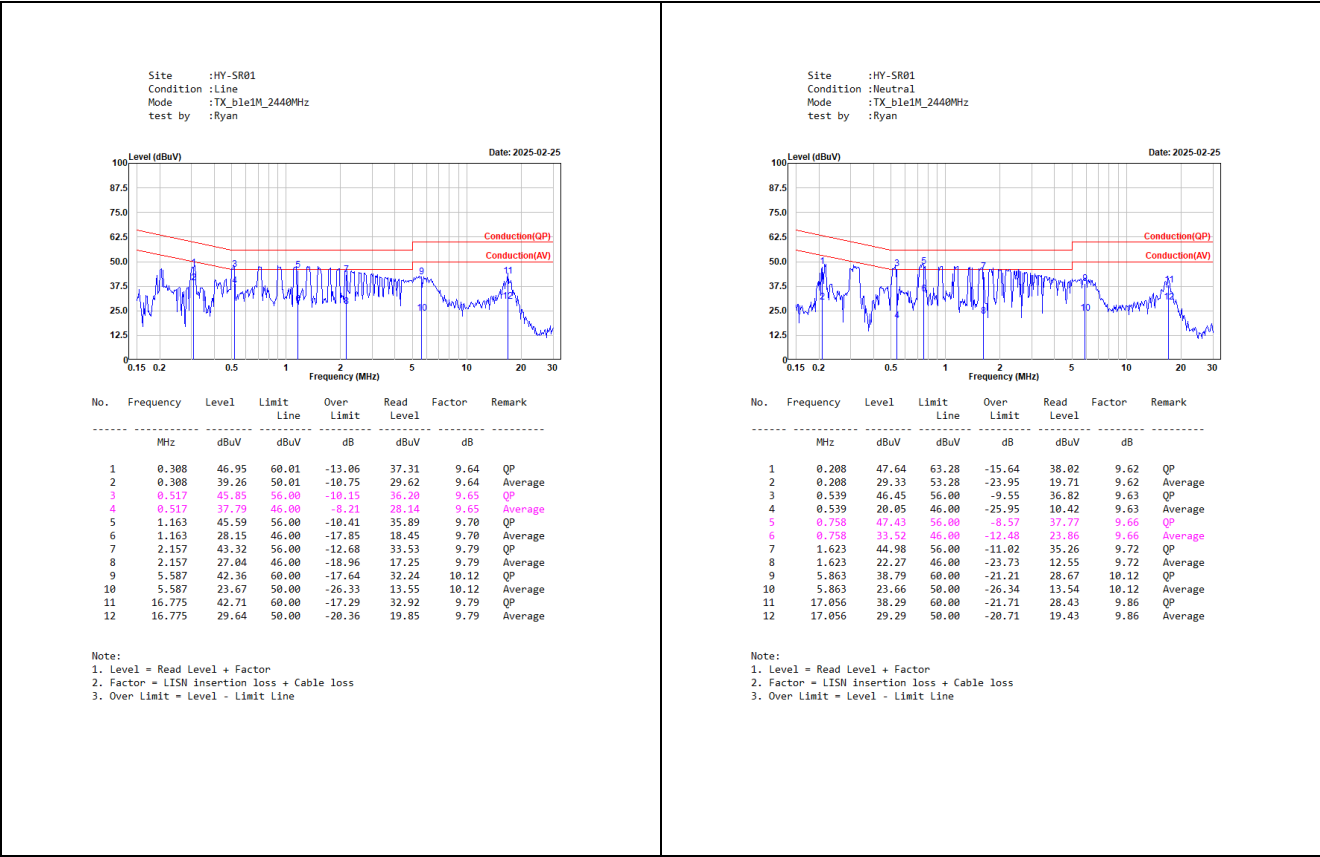


Appendix B. Test Result of 6dB Bandwidth

Modulation	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
		Ant. 1		
GFSK (1Mbps)	2402	0.70	>0.50	Pass
	2440	0.71	>0.50	Pass
	2480	0.72	>0.50	Pass


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1

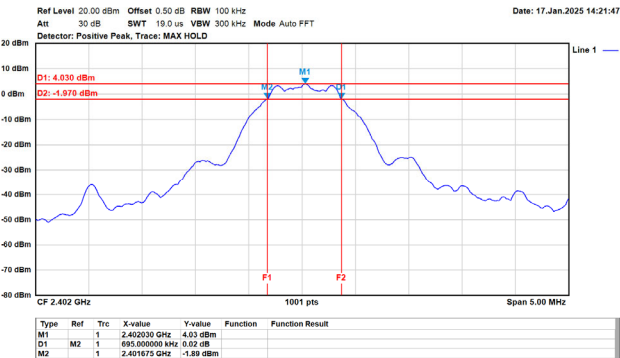

GFSK/1MHz/1M/2440MHz/Ch19/Ant.1

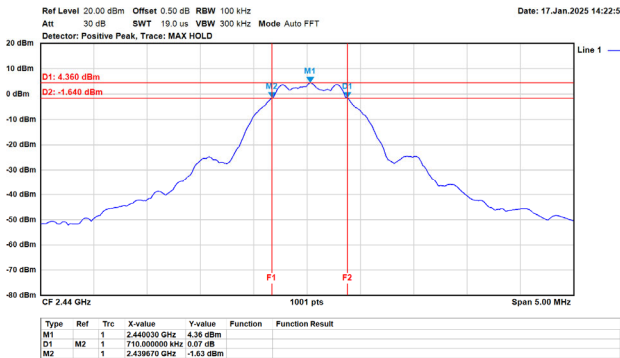

GFSK/1MHz/1M/2480MHz/Ch39/Ant.1

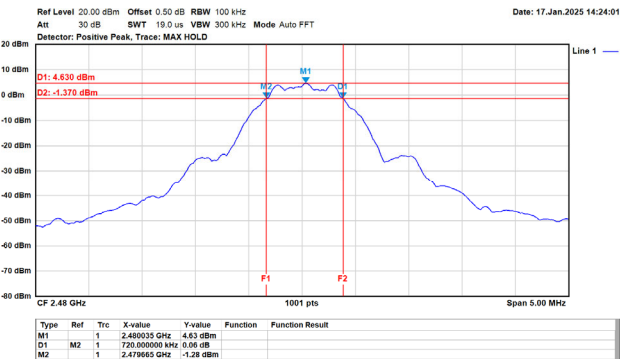


Appendix C. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
		Ant. 1		
GFSK (1Mbps)	2402	4.56	30.00	Pass
	2440	4.83	30.00	Pass
	2480	5.04	30.00	Pass


Appendix D. Test Result of Power Spectral Density


Modulation	Frequency (MHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
		Ant. 1		
GFSK (1Mbps)	2402	-11.42	8.00	Pass
	2440	-11.14	8.00	Pass
	2480	-11.00	8.00	Pass

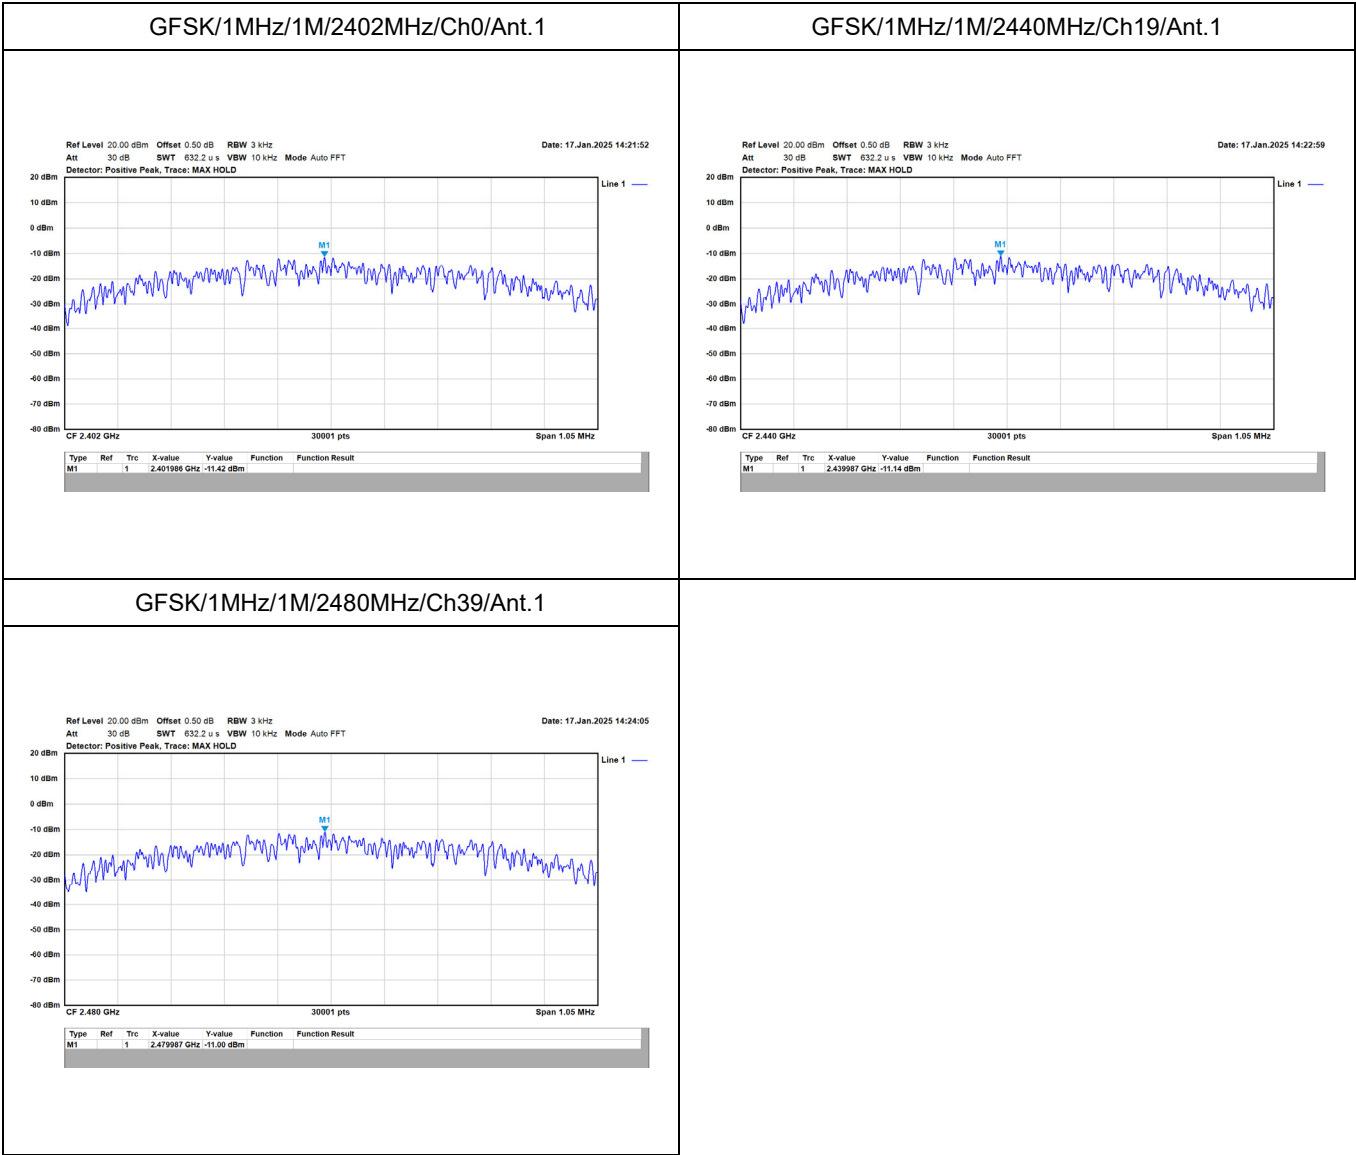

Appendix E. Test Result of Antenna Port Conducted Emission


Modulation	Measurement Level Δ (dB)	Result
GFSK (1 Mbps)	> 20	PASS

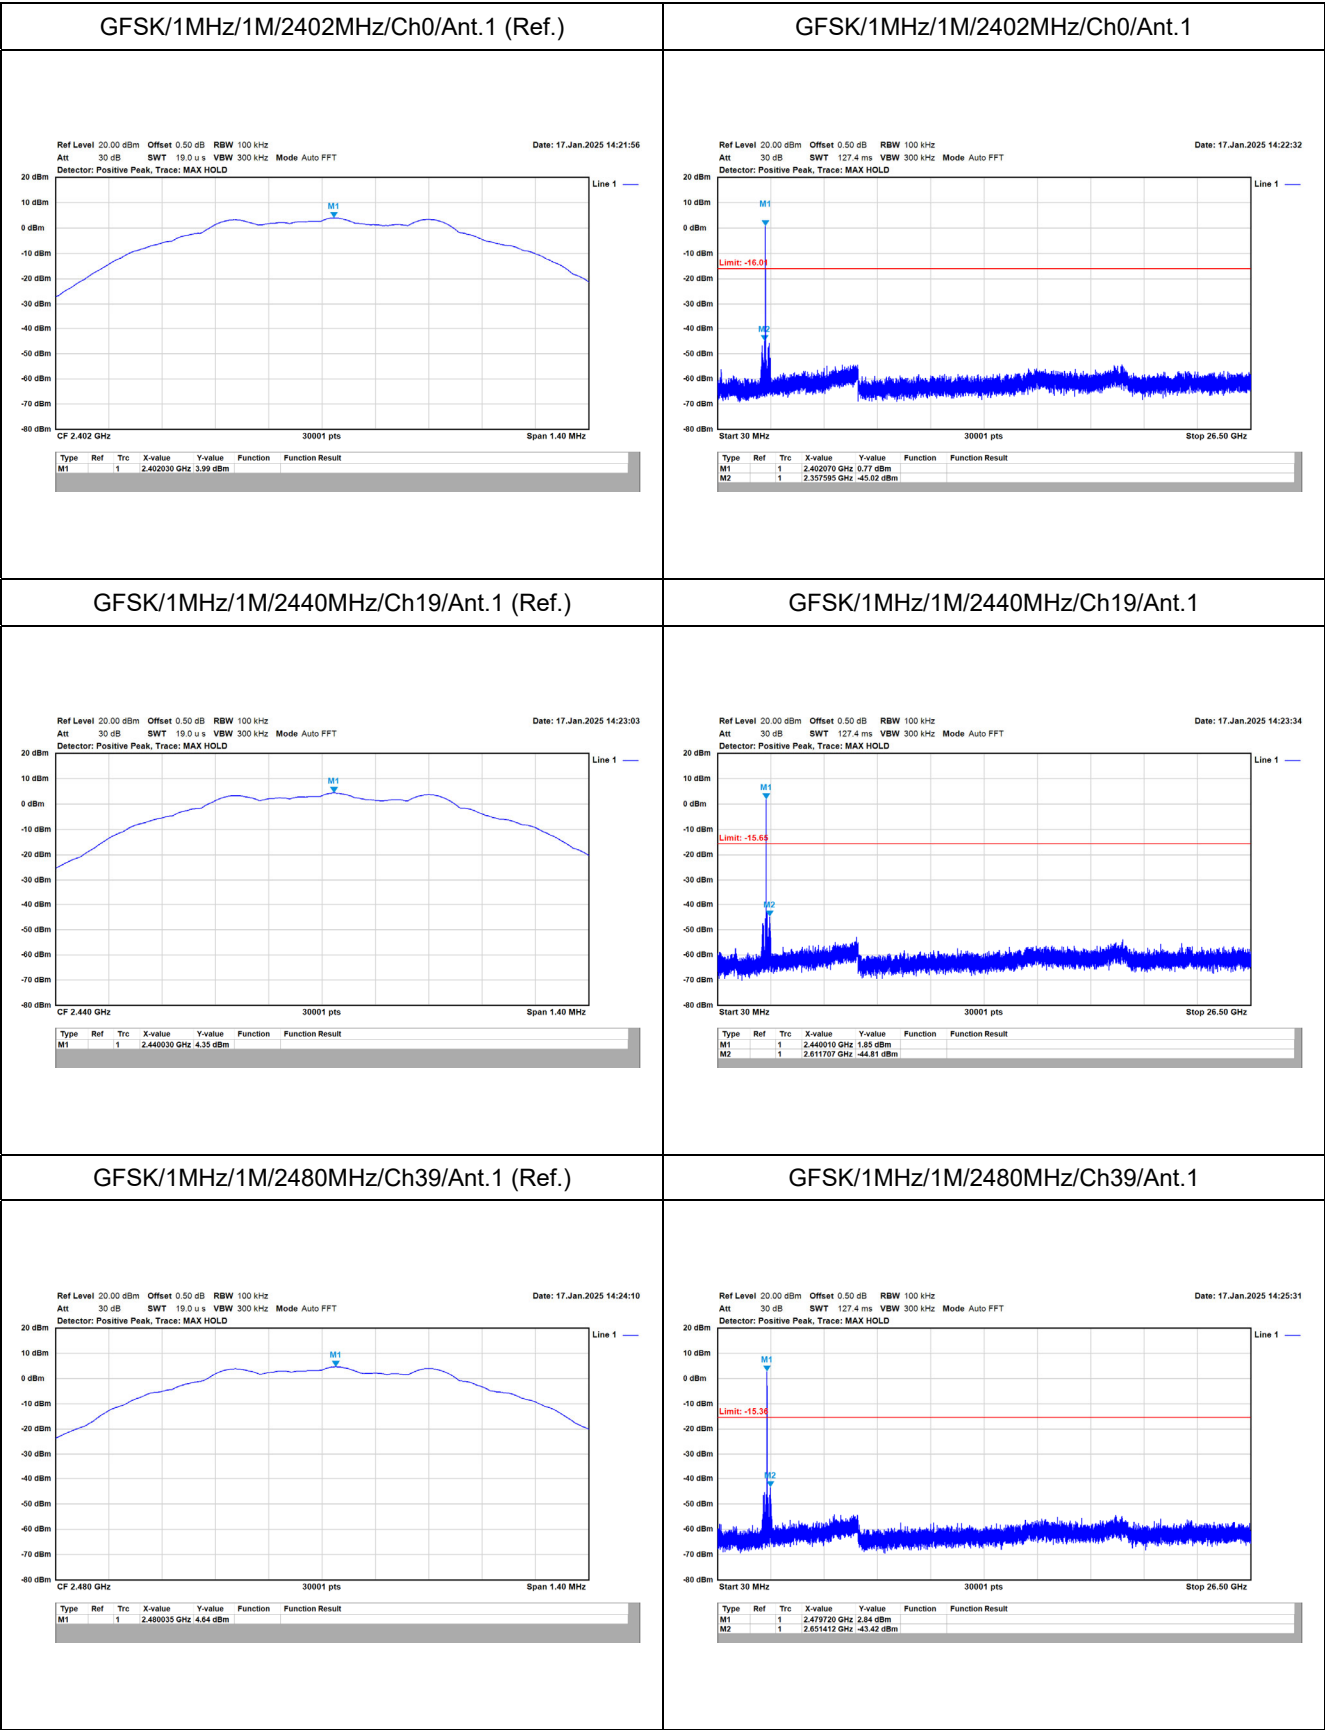

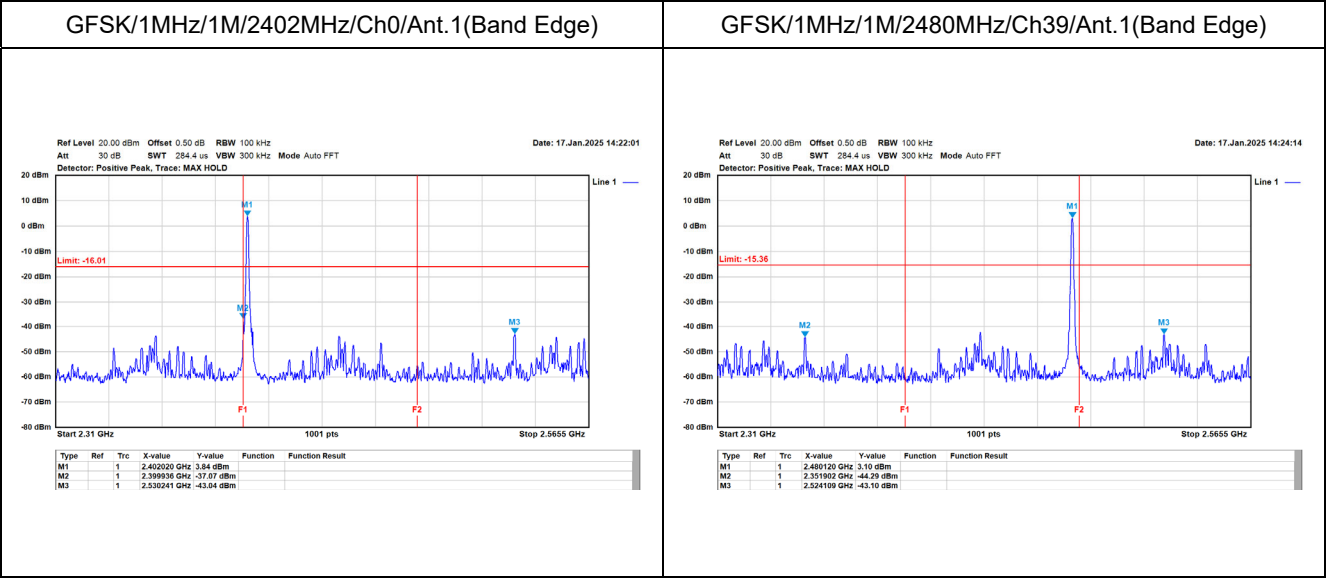

Appendix F. Test Result of Radiated Emission


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2402MHz
Test BY :Bob

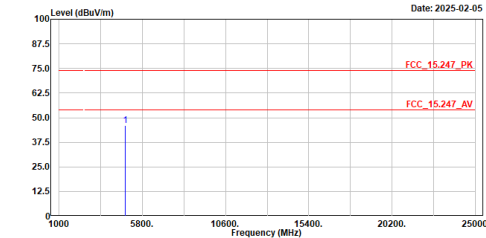

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	46.06	74.00	-27.94	60.69	-14.63	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2402MHz
Test BY :Bob

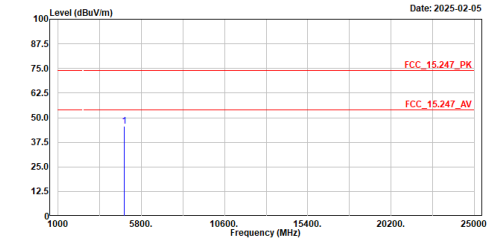

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	45.69	74.00	-28.31	60.32	-14.63	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2440MHz
Test BY :Bob

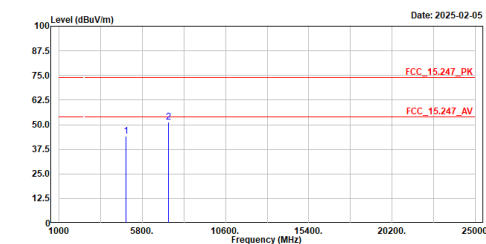

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	44.29	74.00	-29.71	58.56	-14.27	Peak
2	7320.000	51.28	74.00	-22.72	57.84	-6.56	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2440MHz
Test BY :Bob

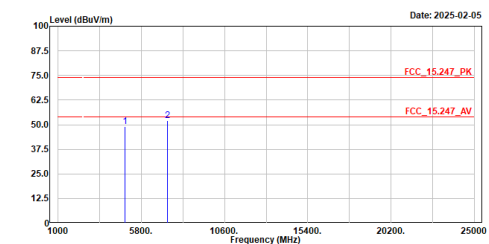

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	49.22	74.00	-24.78	63.49	-14.27	Peak
2	7320.000	52.24	74.00	-21.76	58.80	-6.56	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2480MHz
Test BY :Bob

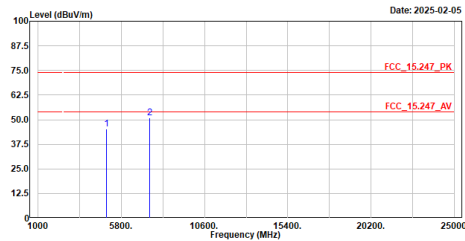


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	45.18	74.00	-28.82	59.08	-13.90	Peak
2	7440.000	50.78	74.00	-23.22	57.44	-6.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2480MHz
Test BY :Bob

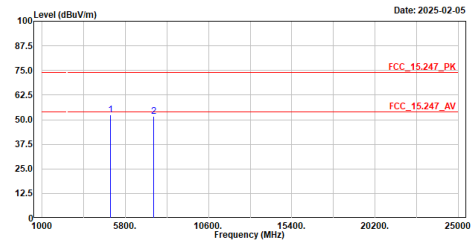


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	52.47	74.00	-21.53	66.37	-13.90	Peak
2	7440.000	51.84	74.00	-22.16	58.50	-6.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2440MHz
Test BY :Bob

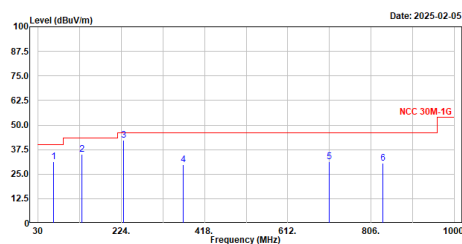


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	65.890	31.27	40.00	-8.73	57.17	-25.90	QP
2	132.820	35.01	43.50	-8.49	60.14	-25.13	QP
3	229.820	42.09	46.00	-3.91	67.91	-25.82	QP
4	368.530	29.70	46.00	-16.30	51.05	-21.35	QP
5	708.030	31.21	46.00	-14.79	45.19	-13.98	QP
6	833.160	30.44	46.00	-15.56	42.71	-12.27	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2440MHz
Test BY :Bob

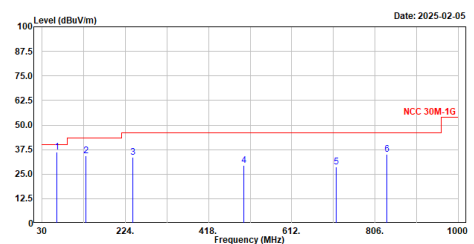


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	64.920	36.17	40.00	-3.83	61.62	-25.45	QP
2	132.820	34.49	43.50	-9.01	59.62	-25.13	QP
3	241.460	33.67	46.00	-12.33	58.68	-25.01	QP
4	499.480	29.27	46.00	-16.73	47.29	-18.02	QP
5	714.820	28.60	46.00	-17.40	42.39	-13.79	QP
6	833.160	35.02	46.00	-10.98	47.29	-12.27	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2402MHz
Test BY :Bob

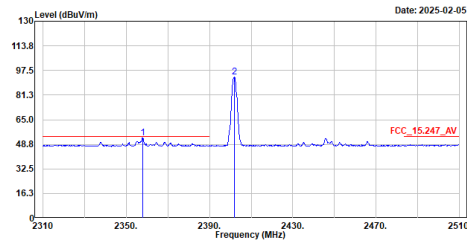


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2357.800	53.10	54.00	-0.90	22.45	30.65	Average
2	2401.800	93.12	-----	-----	62.43	30.69	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2402MHz
Test BY :Bob

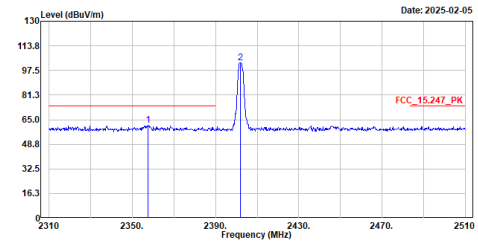


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2357.400	61.27	74.00	-12.73	30.62	30.65	Peak
2	2401.800	102.49	-----	-----	71.80	30.69	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2402MHz
Test BY :Bob

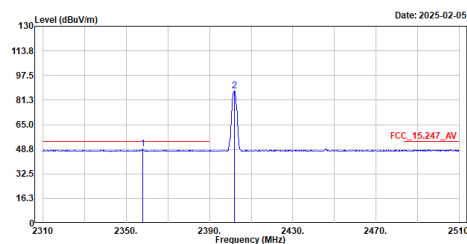


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2357.800	49.26	54.00	-4.74	18.61	30.65	Average
2	2402.000	87.50	-----	-----	56.81	30.69	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2402MHz
Test BY :Bob

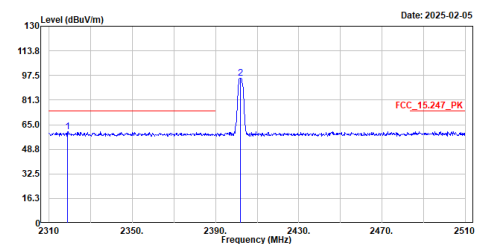


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2319.000	60.51	74.00	-13.49	29.67	30.84	Peak
2	2402.000	95.63	-----	-----	64.94	30.69	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2480MHz
Test BY :Bob

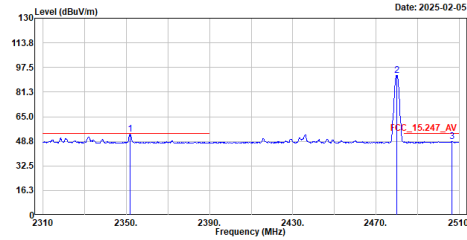

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2351.000	53.33	54.00	-0.67	22.68	30.65	Average
2	2480.000	92.35	54.00	38.35	61.73	30.62	Average
3	2506.600	48.70	54.00	-5.30	17.95	30.75	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ble1M_2480MHz
Test BY :Bob

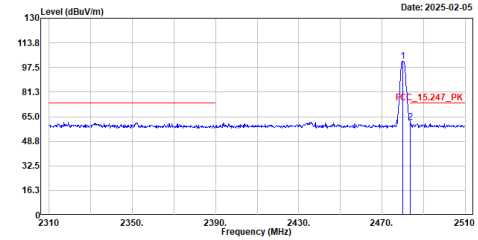

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.000	101.34	54.00	47.34	70.72	30.62	Peak
2	2483.600	61.17	54.00	7.17	30.50	30.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2480MHz
Test BY :Bob

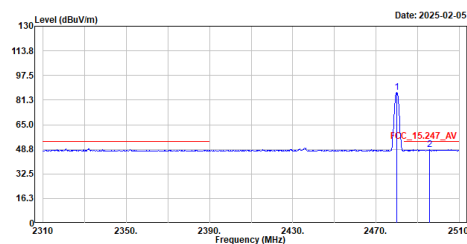

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.000	86.17	54.00	32.17	55.55	30.62	Average
2	2495.800	48.60	54.00	-5.40	17.86	30.74	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ble1M_2480MHz
Test BY :Bob

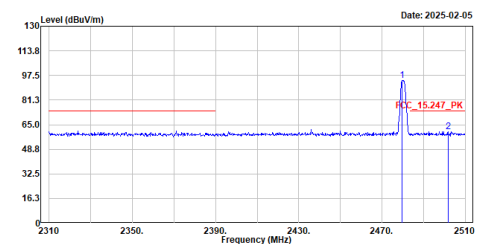

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2479.800	94.08	54.00	40.08	63.46	30.62	Peak
2	2501.800	60.54	54.00	6.54	29.80	30.74	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.