



FCC Test Report

Report No.: BUMK-ESH-P20082481B-1

FCC ID: 2AWXZTY-R8821

Product: Smart Camera

Model: SC101-WA2, SC101-WO2

Received Date: Aug.27, 2020

Test Date: Sep.01 to Sep.15, 2020

Issued Date: Sep.23, 2020

Applicant: Zhejiang Tuya Smart Electronics Co., Ltd

Address: Room 901, Building 1, Huace Center, Xihu District, Hangzhou, Zhejiang Province, China

Issued By: BUREAU VERITAS ADT (Shanghai) Corporation

Lab Address: No. 829, Xinzhuan Road, Shanghai, P.R.China (201612)

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



Table of Contents

Release Control Record.....	5
1 Certificate of Conformity	6
2 Summary of Test Results	7
2.1 Test Instruments.....	8
2.2 Measurement Uncertainty	9
2.3 Modification Record	9
3 General Information.....	10
3.1 General Description of EUT.....	10
3.2 Description of Test Modes	11
3.2.1 Test Mode Applicability:	12
3.2.2 Test Condition:	13
3.3 Duty Cycle of Test Signal	14
3.4 Description of Support Units.....	19
3.5 General Description of Applied Standards	19
4 Test Procedure and Results	20
4.1 AC Power Conducted Emission.....	20
4.1.1 Limits	20
4.1.2 Test Procedures	20
4.1.3 Deviation from Test Standard.....	20
4.1.4 Test Setup.....	21
4.1.5 EUT Operating Conditions.....	21
4.1.6 Test Results	22
4.2 Minimum 6dB Bandwidth.....	30
4.2.1 Limit.....	30
4.2.2 Test Setup.....	30
4.2.3 Test Procedures	30
4.2.4 Deviation of Test Standard.....	30
4.2.5 Test Results	31
4.3 Conducted Output Power	36
4.3.1 Limit.....	36
4.3.2 Test Setup.....	36
4.3.3 Test Procedures	36



4.3.4	Deviation of Test Standard.....	36
4.3.5	Test Results	37
4.4	Power Spectral Density	42
4.4.1	Limit.....	42
4.4.2	Test Setup.....	42
4.4.3	Test Procedures	42
4.4.4	Deviation of Test Standard.....	42
4.4.5	Test Results	43
4.5	Conducted Band Edges Measurement	48
4.5.1	Limit.....	48
4.5.2	Test Setup.....	48
4.5.3	Test Procedures	48
4.5.4	Deviation of Test Standard.....	48
4.5.5	Test Results	49
4.6	Conducted Spurious Emissions.....	53
4.6.1	Limit.....	53
4.6.2	Test Setup.....	53
4.6.3	Test Procedures	53
4.6.4	Deviation of Test Standard.....	53
4.6.5	Test Results	54
4.7	Emissions in restricted frequency bands.....	67
4.7.1	Test Limit.....	67
4.7.2	Test Procedure Reference.....	68
4.7.3	Test Procedures	68
4.7.4	Test Setup.....	69
4.7.5	Test Results	70
4.8	Radiated Emission Measurement.....	78
4.8.1	Limits	78
4.8.2	Test Procedures	78
4.8.3	Deviation from Test Standard.....	79
4.8.4	Test Setup.....	80
4.8.5	EUT Operating Conditions.....	81
4.8.6	Test Results	81

5	Pictures of Test Arrangements	94
---	-------------------------------------	----



Release Control Record

Issue No.	Description	Date Issued
BUMK-ESH-P20082481B-1	Original release	Sep.23.2020



1 Certificate of Conformity

Product: Smart Camera

Brand: --

Model: SC101-WA2, SC101-WO2

Applicant: Zhejiang Tuya Smart Electronics Co., Ltd

Test Date: Sep.01 to Sep.15, 2020

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **BUREAU VERITAS ADT (Shanghai) Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

Yuan Zhang

, **Date:**

Sep.23, 2020

Yuan ZHANG
Project Engineer

Approved by :



, **Date:**

Sep.23, 2020

Daniel Sun
EMC Lab Manager



2 Summary of Test Results

The EUT has been tested according to the following specifications:

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.203	Antenna Requirement	PASS	No antenna connector is used.
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	Minimum 6dB Bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output Power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.247(d)	Conducted Band Edges Measurement	PASS	Meet the requirement of limit.
15.247(d)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
15.247(d)	Emissions in restricted frequency bands	PASS	Meet the requirement of limit.
15.205 / 15.209 / 15.247(d)	Radiated Emissions Measurement	PASS	Meet the requirement of limit.

2.1 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Hybrid Antenna(25MHz-1.5GHz)	Schwarzbeck	VULB9168	E1A1012	Jul.29, 20	Jul.28, 22
Horn Antenna(1GHz -18GHz)	Schwarzbeck	BBHA9120D	E1A1017	Aug.25, 20	Aug.24, 22
Double Ridge Horn Antenna(18G-40G)	COM-POWER	AH-840	E1A1040	Jul.15, 20	Jul.14, 22
Pre-Amplifier(100kHz-1.3GHz)	Agilent	8447D	E1A2001	Apr.20, 20	Apr.19, 21
Pre-Amplifier(0.5GHz-18GHz)	EMCI	EMC184045SE	E1A2009	Jul.06, 20	Jul.05, 21
Pre-Amplifier(18GHz-40GHz)	EMCI	EMC051845SE	E1A2008	Jul.06, 20	Jul.05, 21
EMI test receiver	R&S	ESR7	E1R1005	Apr.20, 20	Apr.19, 21
Spectrum Analyzer	Keysight	N9030B	E1S1003	Jul.23, 20	Jul.22, 21
Spectrum Analyzer	Keysight	N9020A	E1S1004	Mar.03, 20	Mar.02, 21
EMI test receiver	R&S	ESCS30	E1R1001	May.12, 20	May.11, 21
LISN	R&S	ENV216	E1L1011	May.12, 20	May.11, 21
Humidity&Temp Tester	Baolima	WS508	E1H1011	Apr. 03, 20	Apr. 02, 21
RF Control Unit	Toscend	JS0806-2	E1C5003	N/A	N/A
Test Software	ADT	ADT_COND_V7 .3.1	N/A	N/A	N/A
Test Software	Toscend	JS32-RE	N/A	N/A	N/A
Test Software	Toscend	JS1120	N/A	N/A	N/A
Test Software	Toscend	JS1120-3	N/A	N/A	N/A

2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Frequency	Expanded Uncertainty ($k=2$) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.36 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.47 dB
	6GHz ~ 18GHz	3.75 dB
	18GHz ~ 40GHz	3.30 dB

2.3 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Smart Camera
Brand	--
Test Model	SC101-WA2, SC101-WO2
Model Difference	Only appearance, screen printing, software version differences
Power Rating	5VDC/1A with adaptor 100-240V~,50/60Hz
Adapter Information	1) KA06E-0501000US I/P:100-240Vac, 50/60Hz, 0.25A O/P:5Vdc, 1A 2) TPA-46B050100UU I/P:100-240Vac, 50/60Hz, 0.2A O/P:5Vdc, 1A
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Operating Frequency	See clause 3.2
Number of Channel	See clause 3.2
Antenna Type	Ceramic Antenna
Antenna Connector	--
Antenna Gain	3dBi

Note: 1. For more details, please refer to the User's manual of the EUT.

2. The two models only have appearance, screen printing, software version differences, so we choose model SC101-WA2 to perform on full tests.

Modulation Mode	TX /RX Function
802.802.11b	1TX / 1RX
802.802.11g	1TX / 1RX
802.11n (HT20)	1TX / 1RX
802.11n (HT40)	1TX / 1RX

3.2 Description of Test Modes

11 channels are provided for 802.802.11b, 802.802.11g and 802.11n (HT20)

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz	-	-

7 channels are provided for 802.11n (HT40).

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability:

EUT Configure Mode	Applicable to				Description
	RE ≥ 1G	RE < 1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1 GHz):

- ☒ ☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1 GHz):

- ☒ ☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Power Line Conducted Emission Test:

- ☒ ☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.802.11b	1 to 11	1	DSSS	DBPSK	1.0

Antenna Port Conducted Measurement

- ☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

3.2.2 Test Condition:


Applicable to	Normal Environmental Conditions	Normal Input Power
RE ≥ 1G	25deg. C, 60%RH	120Vac, 60Hz
RE < 1G	25deg. C, 60%RH	120Vac, 60Hz
PLC	25deg. C, 60%RH	120Vac, 60Hz
APCM	25deg. C, 60%RH	120Vac, 60Hz

3.3 Duty Cycle of Test Signal


Test Mode	Antenna	Channel [MHz]	Duty Cycle [%]	10log(1/x) Factor[dB]
802.11b	Ant1	2412	99.60	0.02
		2437	99.20	0.03
		2462	98.73	0.06
802.11g	Ant1	2412	97.72	0.10
		2437	95.73	0.19
		2462	93.77	0.28
802.11n (HT20)	Ant1	2412	94.58	0.24
		2437	94.16	0.26
		2462	97.16	0.13
802.11n (HT40)	Ant1	2422	94.42	0.25
		2437	86.62	0.62
		2452	90.44	0.44




802.11b_Ant1_2412

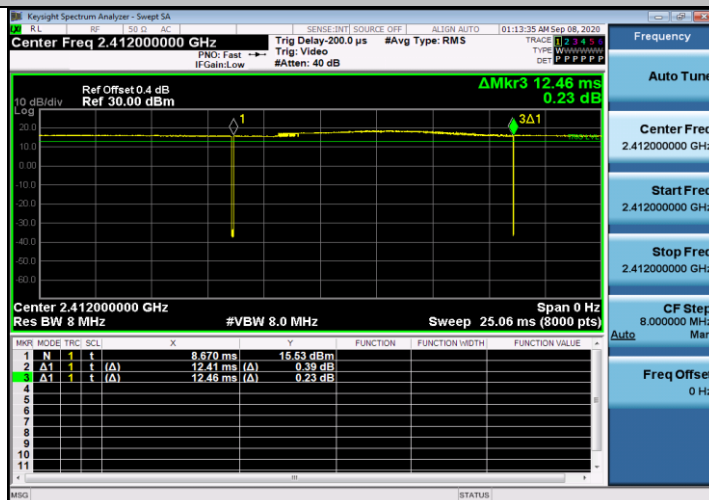


802.11b_Ant1_2437

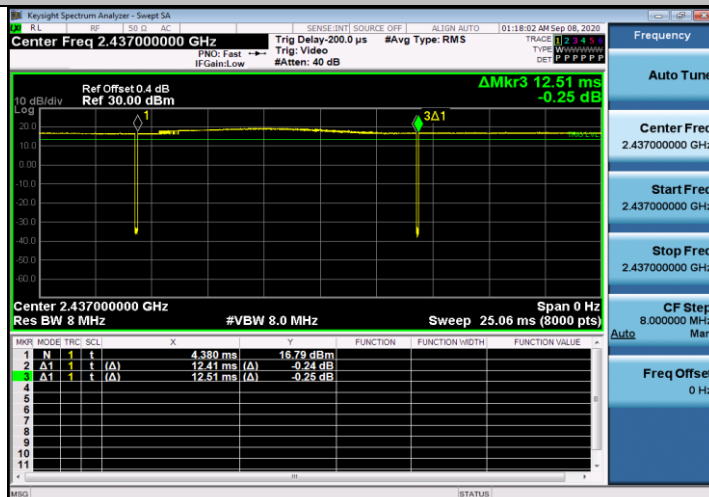


802.11b_Ant1_2462

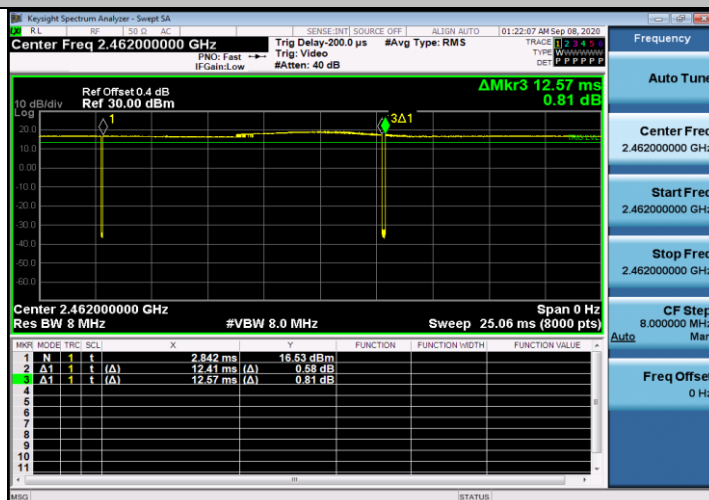


802.11g_Ant1_2412




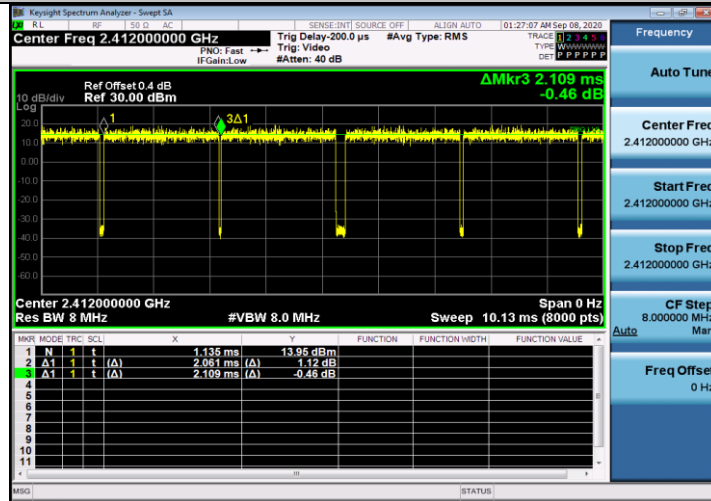


802.11g_Ant1_2437

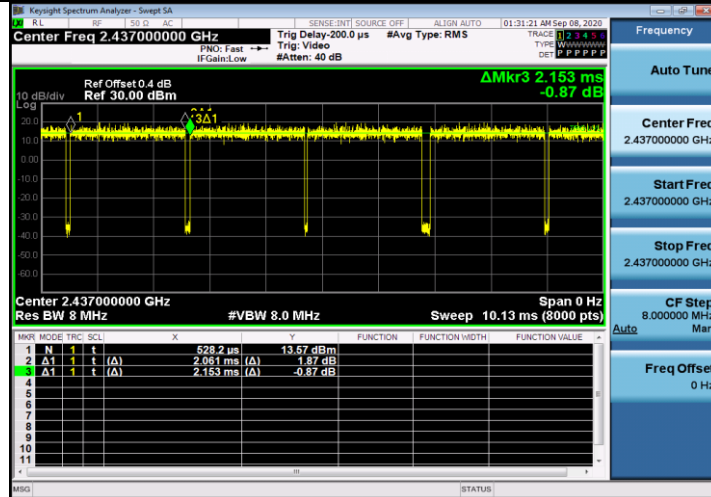

802.11g_Ant1_2462

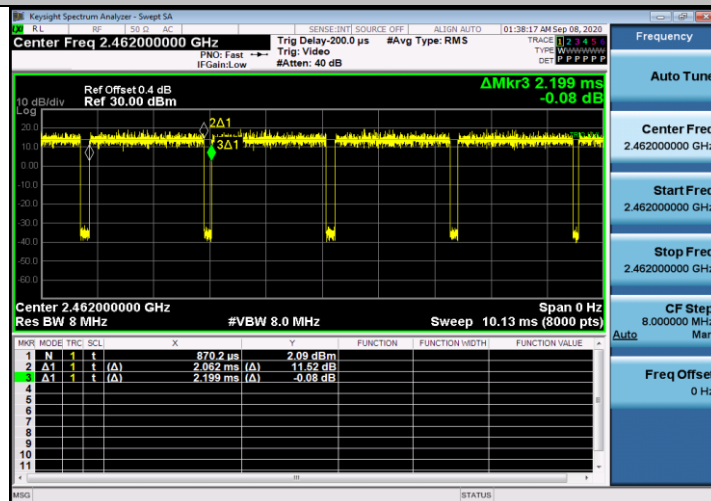

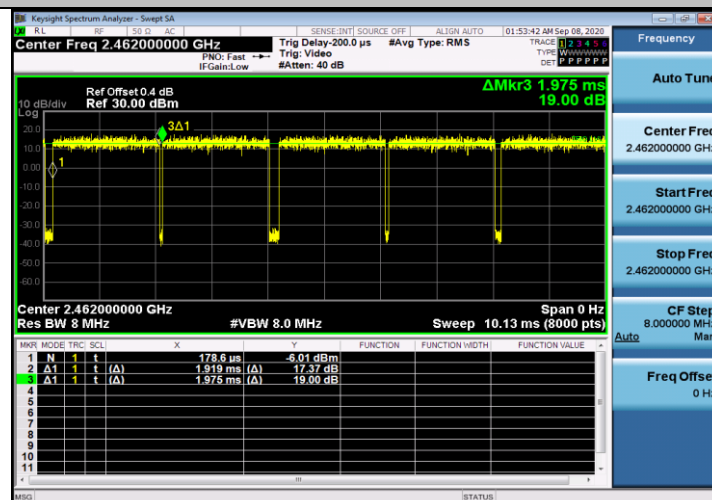



3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standard:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10:2013

All relaxed test items have been performed and recorded as per the above standard.

4 Test Procedure and Results

4.1 AC Power Conducted Emission

4.1.1 Limits

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.1.2 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.1.3 Deviation from Test Standard

No deviation.

4.1.4 Test Setup

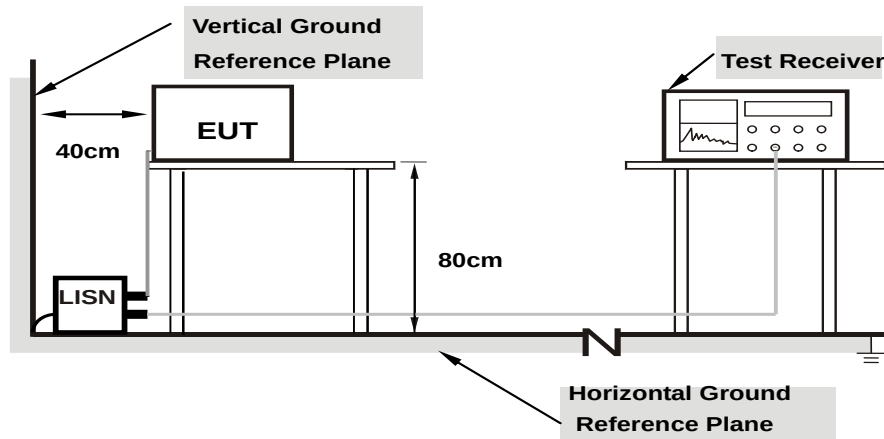

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).


4.1.5 EUT Operating Conditions

Same as 4.1.6.

4.1.6 Test Results

Working While Charging

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 120V, 60Hz with adapter KA06E-0501000US		

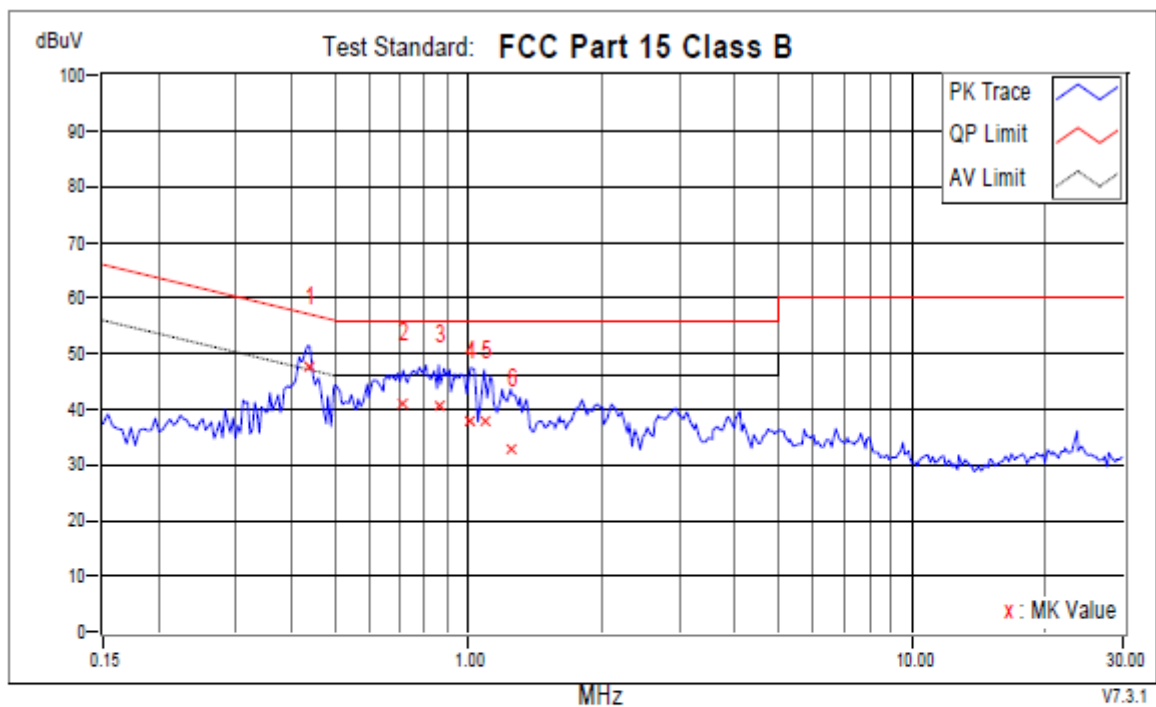


	Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
No.	MHz	dB	QP	AV	QP	AV	QP	AV	QP	AV	
+1	0.43543	9.70	37.86	18.55	47.56	28.25	57.15	47.15	-9.58	-18.89	
2	0.71304	9.59	31.24	20.46	40.83	30.05	56.00	46.00	-15.17	-15.95	
3	0.85771	9.58	31.01	18.49	40.59	28.07	56.00	46.00	-15.41	-17.93	
4	1.01173	9.59	28.37	16.49	37.96	26.08	56.00	46.00	-18.04	-19.92	
5	1.08602	9.60	28.36	15.81	37.96	25.41	56.00	46.00	-18.04	-20.59	
6	1.24633	9.63	23.32	7.45	32.95	17.08	56.00	46.00	-23.05	-28.92	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 120V, 60Hz with adapter KA06E-0501000US		

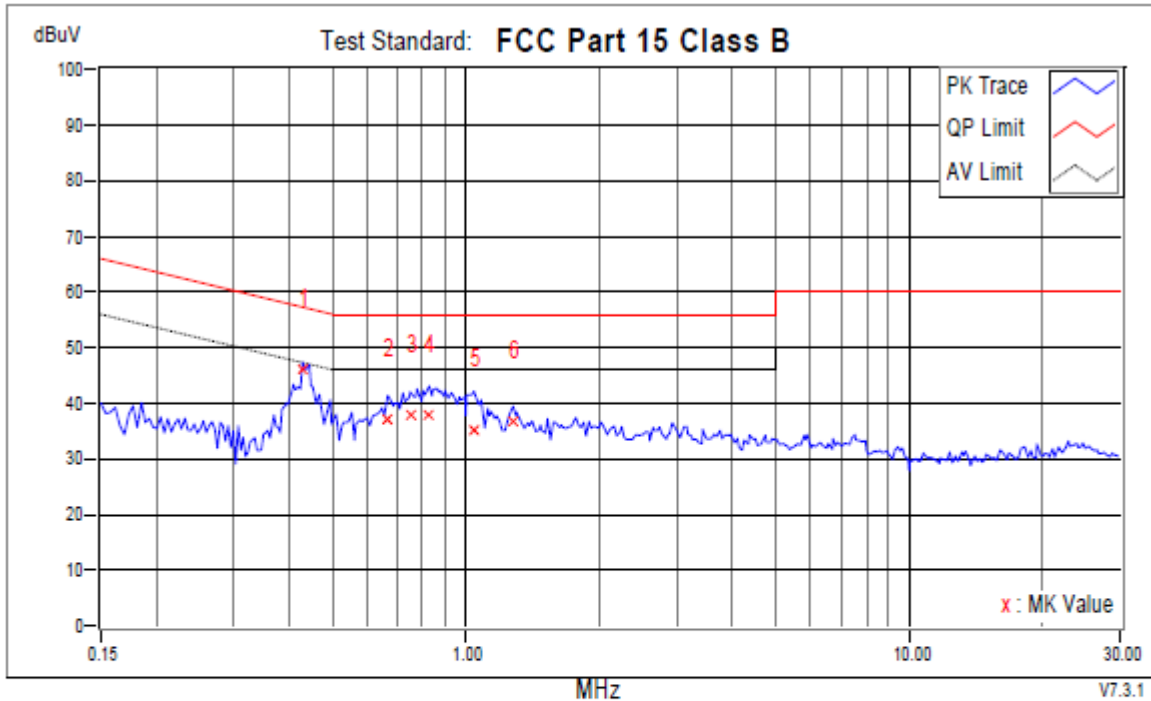


No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
+1	0.42761	9.84	36.25	19.08	46.09	28.92	57.30	47.30	-11.21	-18.38	
2	0.66612	9.81	27.27	15.57	37.08	25.38	56.00	46.00	-18.92	-20.62	
3	0.74823	9.84	28.12	16.13	37.96	25.97	56.00	46.00	-18.04	-20.03	
4	0.82643	9.88	27.84	12.11	37.72	21.99	56.00	46.00	-18.28	-24.01	
5	1.04301	9.89	25.45	12.28	35.34	22.17	56.00	46.00	-20.66	-23.83	
6	1.27761	9.90	26.68	12.65	36.58	22.55	56.00	46.00	-19.42	-23.45	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 240V, 50Hz with adapter KA06E-0501000US		

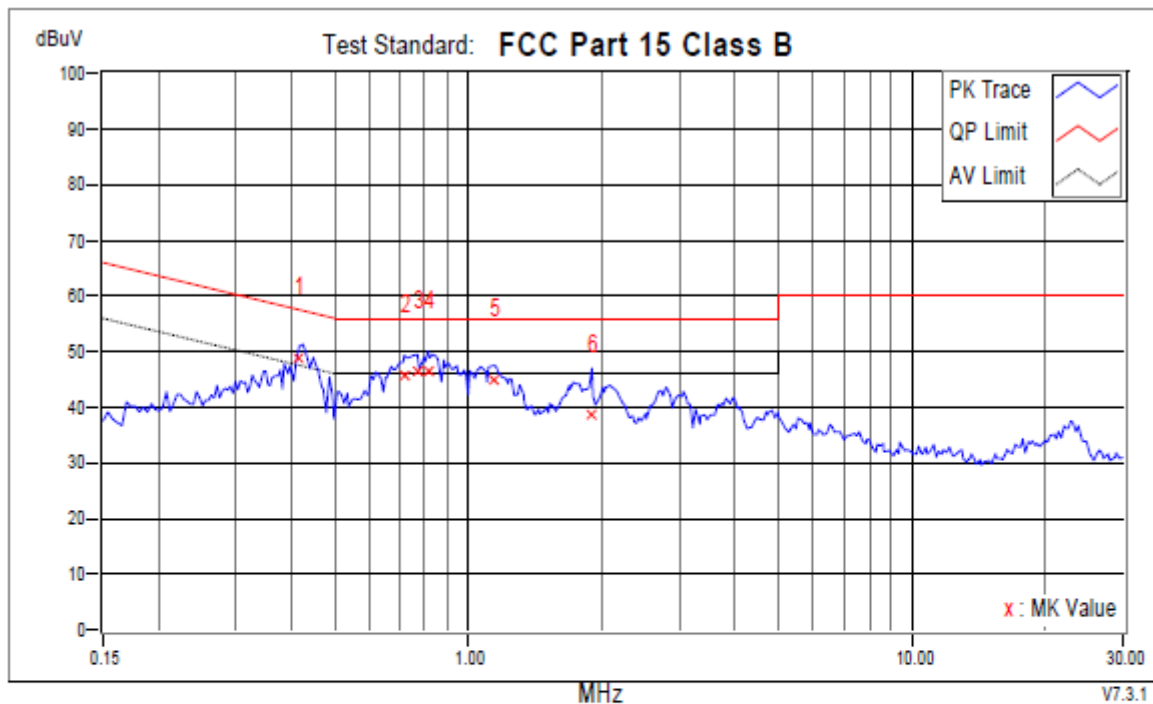


No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
+1	0.41588	9.70	39.30	19.64	49.00	29.34	57.53	47.53	-8.53	-18.19	
2	0.71695	9.59	36.02	23.50	45.61	33.09	56.00	46.00	-10.39	-12.91	
3	0.76778	9.58	36.81	23.44	46.39	33.02	56.00	46.00	-9.61	-12.98	
4	0.81079	9.58	36.78	24.37	46.36	33.95	56.00	46.00	-9.64	-12.05	
5	1.13685	9.61	35.29	21.75	44.90	31.36	56.00	46.00	-11.10	-14.64	
6	1.89930	9.73	28.84	15.56	38.57	25.29	56.00	46.00	-17.43	-20.71	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 240V, 50Hz with adapter KA06E-0501000US		

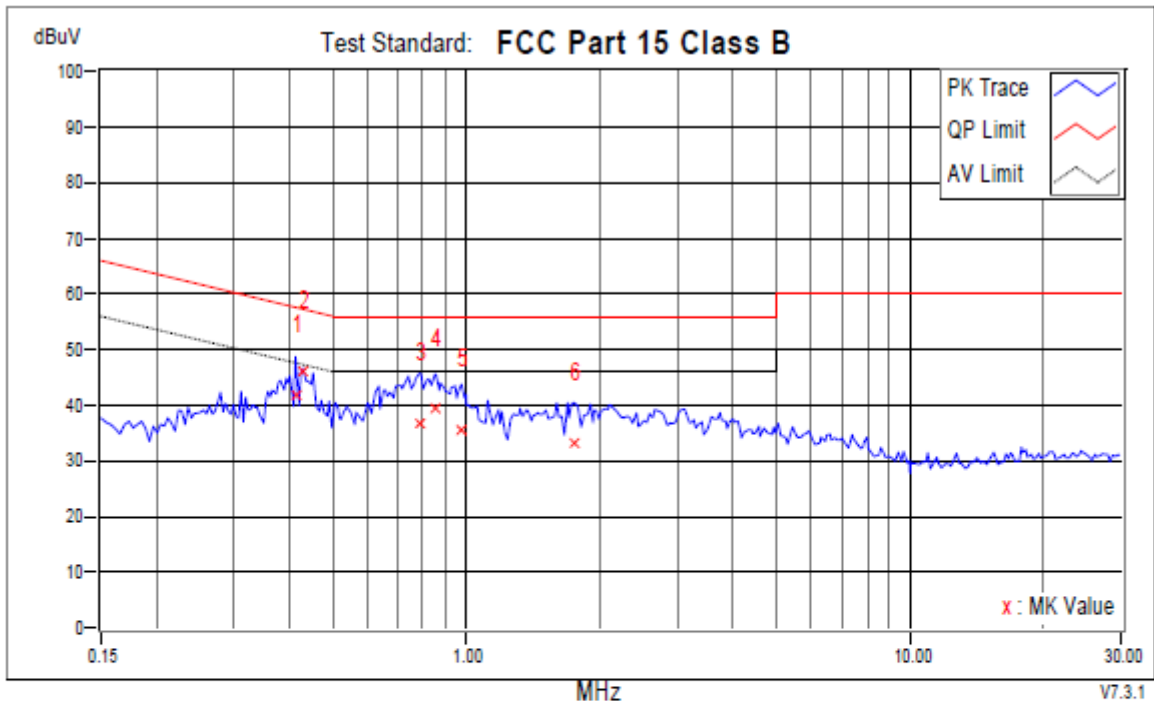


No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
1	0.41197	9.84	31.83	23.41	41.67	33.25	57.61	47.61	-15.94	-14.36	
+2	0.42761	9.84	36.15	21.07	45.99	30.91	57.30	47.30	-11.31	-16.39	
3	0.78342	9.87	26.97	13.71	36.84	23.58	56.00	46.00	-19.16	-22.42	
4	0.84989	9.88	29.69	20.01	39.57	29.89	56.00	46.00	-16.43	-16.11	
5	0.97501	9.89	25.61	14.44	35.50	24.33	56.00	46.00	-20.50	-21.67	
6	1.74681	9.90	23.16	12.64	33.06	22.54	56.00	46.00	-22.94	-23.46	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 120V, 60Hz with adapter TPA-46B050100UU		

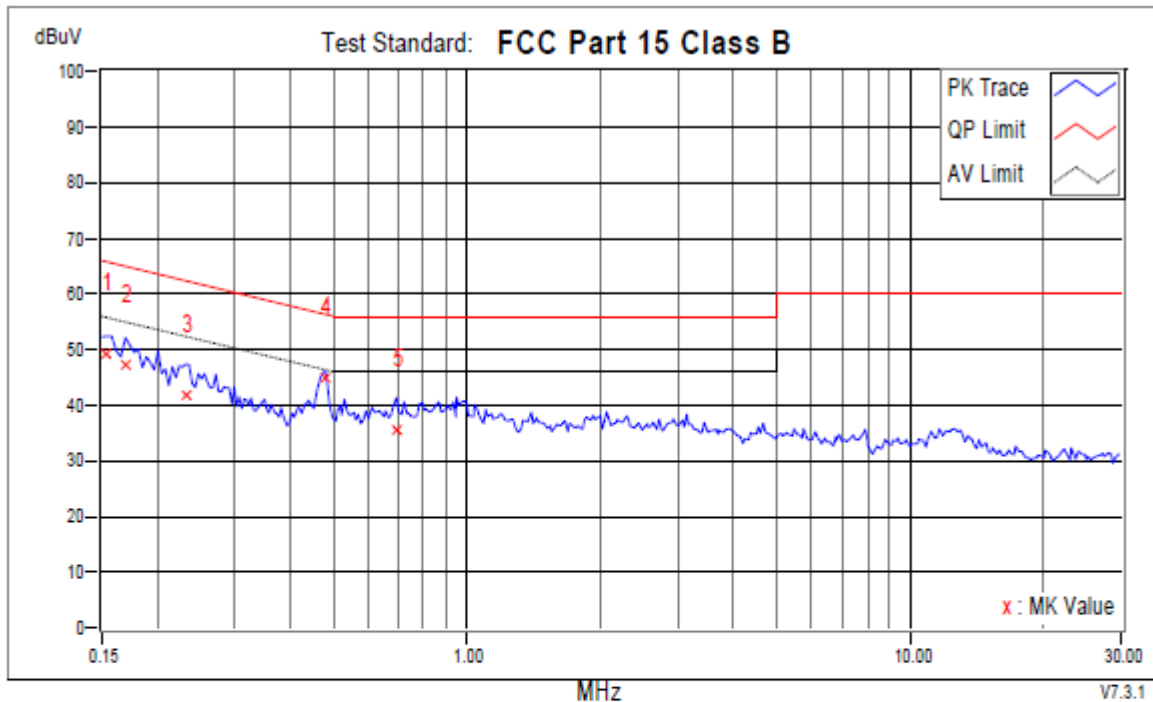


	Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
No.	MHz	dB	QP	AV	QP	AV	QP	AV	QP	AV	
1	0.15391	9.83	39.57	21.29	49.40	31.12	65.79	55.79	-16.38	-24.66	
2	0.16955	9.84	37.46	20.16	47.30	30.00	64.98	54.98	-17.68	-24.98	
3	0.23211	9.80	32.13	16.79	41.93	26.59	62.37	52.37	-20.45	-25.79	
+4	0.47844	9.71	35.33	28.28	45.04	37.99	56.37	46.37	-11.33	-8.38	
5	0.69349	9.59	26.05	17.42	35.64	27.01	56.00	46.00	-20.36	-18.99	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 120V, 60Hz with adapter TPA-46B050100UU		

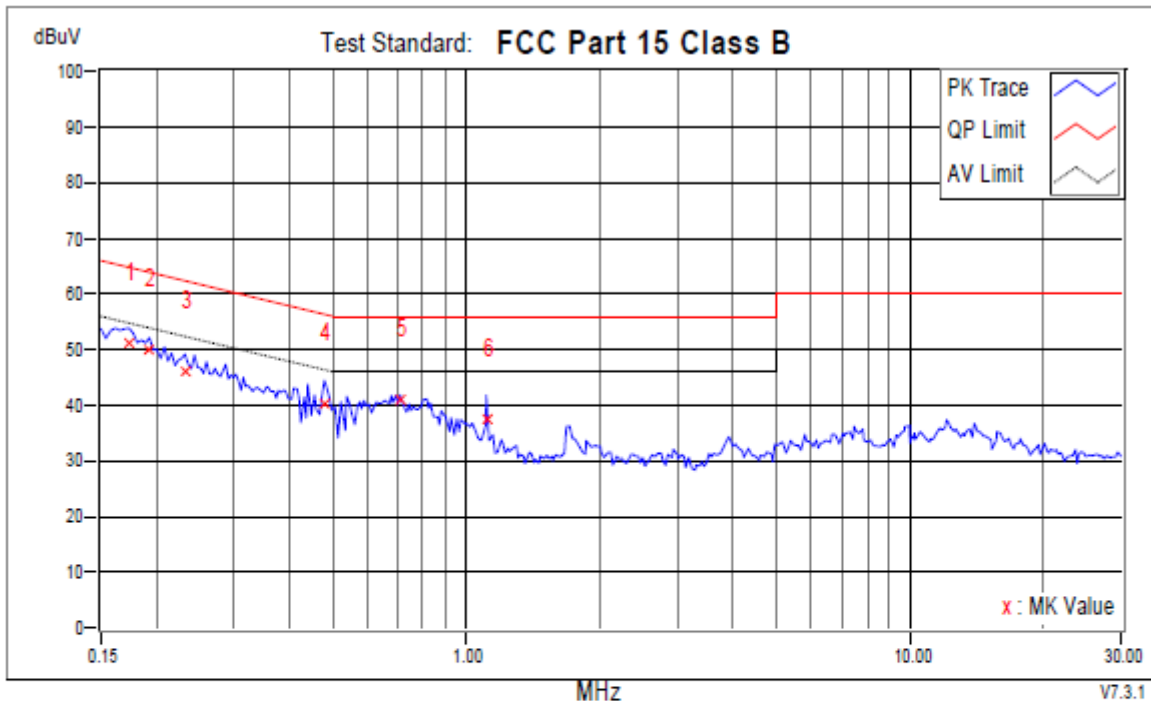


No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
+1	0.17346	9.82	41.18	20.86	51.00	30.68	64.79	54.79	-13.80	-24.12	
2	0.19301	9.80	40.16	23.68	49.96	33.48	63.91	53.91	-13.95	-20.43	
3	0.23211	9.81	36.17	15.99	45.98	25.80	62.37	52.37	-16.39	-26.57	
4	0.47844	9.83	30.32	9.28	40.15	19.11	56.37	46.37	-16.21	-27.25	
5	0.70913	9.81	31.22	14.69	41.03	24.50	56.00	46.00	-14.97	-21.50	
6	1.10948	9.89	27.76	11.33	37.65	21.22	56.00	46.00	-18.35	-24.78	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 240V, 50Hz with adapter TPA-46B050100UU		

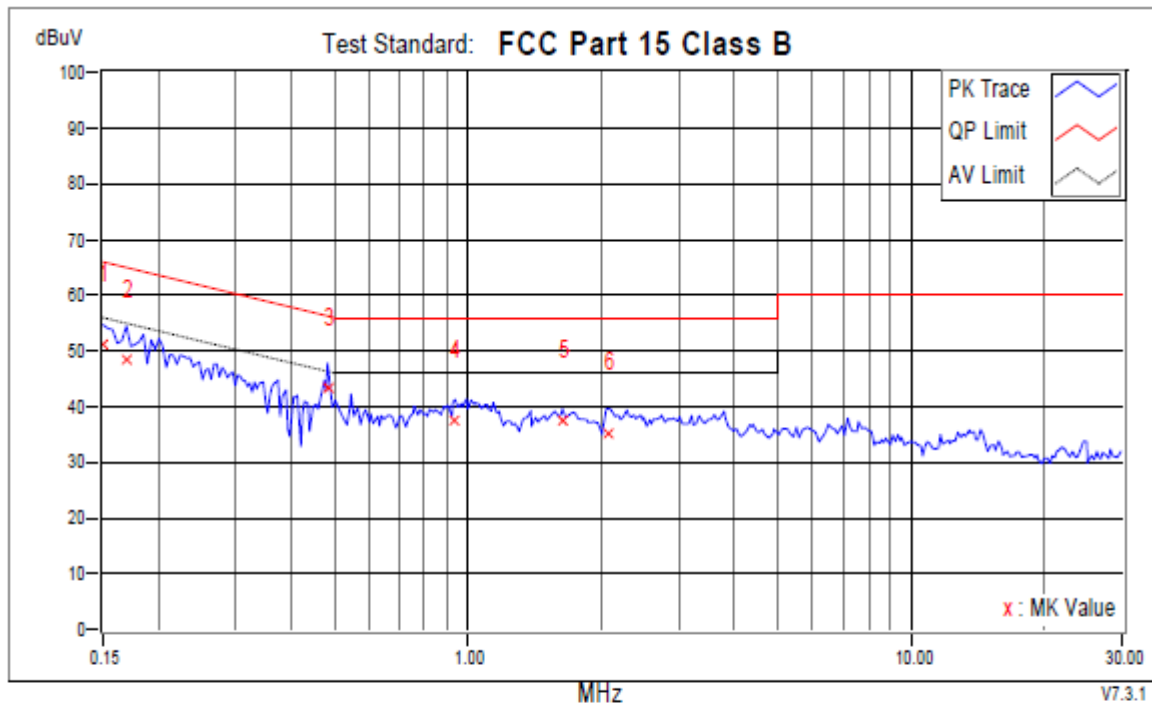


No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
1	0.15000	9.83	41.28	20.13	51.11	29.96	66.00	56.00	-14.89	-26.04	
2	0.16955	9.84	38.42	19.92	48.26	29.76	64.98	54.98	-16.72	-25.22	
+3	0.48235	9.71	33.63	19.25	43.34	28.96	56.30	46.30	-12.96	-17.34	
4	0.93591	9.59	27.89	19.18	37.48	28.77	56.00	46.00	-18.52	-17.23	
5	1.63342	9.69	27.73	21.14	37.42	30.83	56.00	46.00	-18.58	-15.17	
6	2.07134	9.75	25.22	15.44	34.97	25.19	56.00	46.00	-21.03	-20.81	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 240V, 50Hz with adapter TPA-46B050100UU		

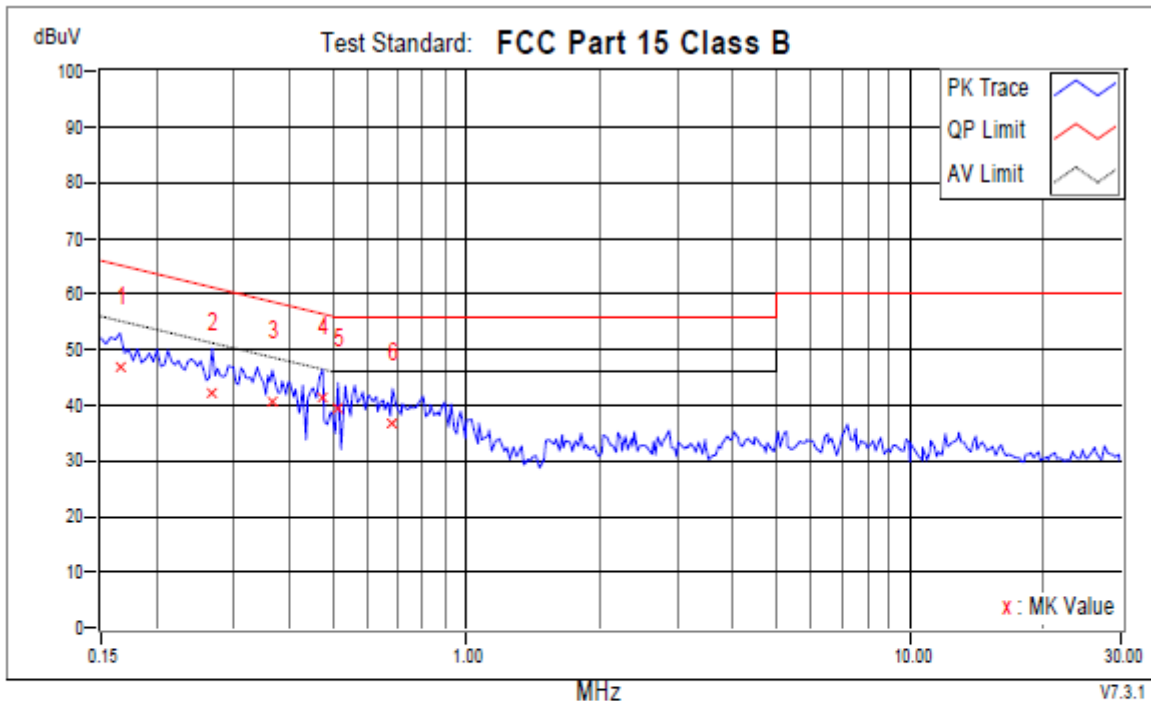

No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
1	0.16564	9.82	37.15	12.24	46.97	22.06	65.18	55.18	-18.20	-33.11	
2	0.26730	9.84	32.36	10.45	42.20	20.29	61.20	51.20	-19.00	-30.91	
3	0.36505	9.85	30.61	8.21	40.46	18.06	58.61	48.61	-18.15	-30.55	
+4	0.47453	9.83	31.52	18.48	41.35	28.31	56.43	46.43	-15.08	-18.12	
5	0.51363	9.83	29.57	12.87	39.40	22.70	56.00	46.00	-16.60	-23.30	
6	0.68176	9.80	26.86	7.92	36.66	17.72	56.00	46.00	-19.34	-28.28	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.