

# 封面

**SK-BH-M97**  
Bluetooth Headset




User Manual

**Contents:**

1. Product Overview	2
2. Basic Operation	3
3. Bluetooth Pairing and Connection	4
4. Charging the headset	5
5. Connection with Two devices	6
6. LED Indicator	7
7. Product Specification	8
8. Warranty, Q & A	9

**1. Product Overview**



**Package Contents:**

- A.Bluetooth Headset BH-M97 x 1
- B.Charge Base x 1
- C.Micro USB charging cable x 1
- D. User manual x 1
- E. Foam Mic Cover x 1

**2. Basic Operation**

Button	Function	Operation
MFB	Power On	In off status, Long press 1-3 seconds MFB to power on.
	Power Off	In on status, Long press 5 seconds to power off.
	Enter into Pairing Mode	In off status, Long press 5-8 seconds to enter into pairing mode. Or under unconnected standby mode, double press the MFB to enter into pairing mode.
	Play / Pause	Short press when play music.
	Redial a call	Double press MFB to dial the last call.
	Reconnect	When there is a pairing record, power on and enter into reconnect state or short press MFB to reconnect under pairing mode.
	Voice Dialing	Long press 1 second MFB then release
	Audio Switch	Long press 1 second MFB to switch the audio between phone and Bluetooth headset.
	Answer a call	Short press (when call coming)
	Hang up a call	Short press ( during a call )
Reject a call	Long press 1 second (when call coming)	
Volume +	Short press	
Volume Up	Short press	
Next Song	Long press for 1 seconds	
Volume -	Short press	
Volume Down	Short press	
Previous Song	Long press for 1 seconds	
Volume + Mute the Mic	Short press the v+&v- together to mute the mic	

**3. Bluetooth Pairing and Connection**


A. In off status, Long press 5-8 seconds to enter into pairing mode with LED Blue & Red flash alternately.

B. Search and click to connect "SK-BH-M97" on your phone Bluetooth lists, LED change to LED Blue flash after connected, now you can play music from phone to headphone.

C. You can press MFB/ volume+ / volume- on the Bluetooth headset to control the answer/hang up a call and play/pause of the music, next and previous songs, volume up and down.



pairing  
In off status, Long press MFB 5-8 seconds to enter into pairing mode with LED Blue & Red alternately flash.




connection  
1M  
Search and connect  
Connection: Search and click to connect "SK-BH-M97" on your phone Bluetooth lists

**4. Charging the headset:**



Please charge the headset at once when the Red LED flash. Charging time about 2 hours. Solid LED Red change to Solid LED Blue when full charged.

**Two charging way:**

**1) Charge the headset with the charging cable directly.**  
Please connect to the headset charging port through the Micro USB charging cable.




**2) Charging with charge Base**  
Please place the headset on the charging base to charge. when charging the base, please connect the charging base to USB charger through the Micro USB port for charging .

**Notes:**

1. Pls charge the BH-M97 at least one time every 2 moth when don't use it.


**5. Connection with Two devices:**

A. Follow part 3 above to connect with first phone, then turn off the Bluetooth function of first phone.

B. Double press MFB to enter pairing mode again with Red & Blue LED flash alternately.

C. Search and click to connect "SK-BH-M97" on your second phone Bluetooth lists, LED change to Blue LED low flash after connected.

D. Turn on Bluetooth function of first phone, click to reconnect "SK-BH-M97" on Bluetooth lists. Headset connected with two phones now.

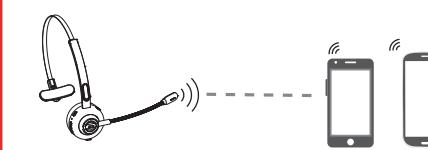

**Notes:**

\* Music only can be played from one phone under two connections, when you want to play music from another phone, you need to pause or close the music of the previous phone. The same operation during talking status.

**6. LED Indicator**

Mode	LED Indicator
Power on	LED Blue flashes 1 second
Power off	LED Red flashes 1 second
Pairing mode	LED Red & Blue flashes alternately
Unconnected standby mode	LED Blue flashes once every 2 seconds
Connected standby mode	LED Blue flashes once every 5 seconds
Playing Music	LED Blue flashes once every 5 seconds
Talking	LED Blue flashes once every 5 seconds
Delete paired record	Blue and Red LED flashes once at the same time
Charging	Solid LED Red
Full charged	Solid LED Blue
Low battery	Red LED flash

**7. Product Specification:**

Bluetooth Version	Bluetooth V5.0
Bluetooth Chipset	CSR 8615
Operation Range	10M
Bluetooth Protocols	HSP HFP A2DP AVRCP
CODEC Code	SBC
Battery Capacity	180mAh/3.7V
Charging Time	2H
Stand-by Time	200H
Working Time	About 17H (charging base offers 200H)
Headset Net Weight	About 51g
Charge Base Net Weight	About 242g
Headset Dimension	163.21*142.27*48.5mm
Charge Base Dimension	79*73*31mm

**Notes:** \*Actual use time will differ from environment and music

**8. Warranty**

Sanfant offers 45-day money back & 24-month worry-free guarantee.

After-service Email: [sanfantvip@outlook.com](mailto:sanfantvip@outlook.com)

**Q & A :**

**A. Fail to pair, try to Delete paired records, How?**  
In Power on state, long press the volume+ and the volume- button for 5 seconds to clear the pairing record. The indicator Blue and Red LED flashes once at the same time that means the pairing record has been cleared, and the SK-BH-M97 will not connect back to the connected device. When there are various connection problem, try clearing the pairing record.

**B. What's the password for pairing?**  
Some connection devices require password for pairing, pls try 0000 or 8888 or 1111 or 1234.

**C. What devices could charge for the headphone?**  
Any car charger, power bank, PC etc which meet DC 5V , charging current more than 500mA could be charge for this item.

**SIZE:65x95mm 128克双铜纸双面印刷 折叠 (手风琴式)**

FCC STATEMENT :

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.